


1 Discovery

topology, not sampling



same-family $d = 0.249$
diff-topology $d = 1.077$
LOOCV $r = 0.999995$

2 Mechanism

skip-mediated conflict

$$\alpha \cdot \mathbf{C} = \|\mathbf{s} - \mathbf{u}\| \varphi_{\ell} \rightarrow \text{PSNR}$$

cut peak skip ($\alpha = 0$):
drift -27.7% ($p = 1e-8$)
PSNR $+2.20$ dB
low-drift skip: n.s.


same cut on SDXL:
 -11.59 dB, opposite sign
 $\rightarrow$ *architecture-specific*

3 Application

sufficient vs bounded

$$\mathbf{f}_{out} = \mathbf{f}_{recon} + \lambda \cdot (\mathbf{f}_{inv} - \mathbf{f}_{recon})$$

recon: P2P-equiv · MB vs GB

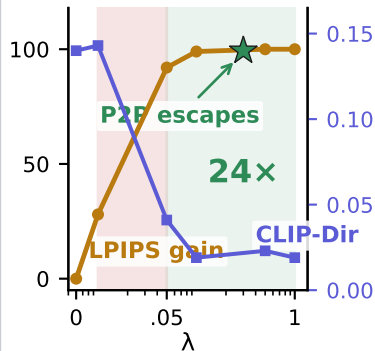

edit: either/or, not how-much