

Introduction to Scientific Programming in C++/Fortran2003

Victor Eijkhout

December 2, 2019

Contents

I Introduction 15

1	Introduction	17
1.1	<i>Programming and computational thinking</i>	17
1.1.1	History	17
1.1.2	Is programming science, art, or craft?	18
1.1.3	Computational thinking	19
1.1.4	Hardware	22
1.1.5	Algorithms	22
1.2	<i>About the choice of language</i>	23
2	Warming up	25
2.1	<i>Programming environment</i>	25
2.1.1	Language support in your editor	25
2.2	<i>Compiling</i>	26
2.3	<i>Your environment</i>	26
3	Teachers guide	27
3.1	<i>Justification</i>	27
3.2	<i>Timeline for a C++/F03 course</i>	28
3.2.1	Project-based teaching	28
3.2.2	Choice: Fortran or advanced topics	29

II C++ 31

4	Basic elements of C++	33
4.1	<i>From the ground up: Compiling C++</i>	33
4.1.1	A quick word about unix commands	34
4.1.2	C++ is a moving target	35
4.2	<i>Statements</i>	35
4.3	<i>Variables</i>	36
4.3.1	Variable declarations	37
4.3.2	Assignments	38
4.3.3	Datatypes	39
4.3.4	Initialization	41
4.4	<i>Input/Output, or I/O as we say</i>	41
4.5	<i>Expressions</i>	42
4.5.1	Numerical expressions	42

4.5.2	Truth values	42
4.5.3	Type conversions	43
4.6	<i>Advanced topics</i>	44
4.6.1	Library functions	44
4.6.2	Number values and undefined values	44
4.6.3	Constants	45
4.6.4	Numerical precision	45
4.7	<i>Review questions</i>	46
4.8	<i>Sources used in this chapter</i>	46
5	Conditionals	49
5.1	<i>Conditionals</i>	49
5.2	<i>Operators</i>	50
5.2.1	Short-circuit operators	51
5.3	<i>Switch statement</i>	52
5.4	<i>Scopes</i>	52
5.5	<i>Init statements</i>	53
5.6	<i>Sources used in this chapter</i>	53
6	Looping	55
6.1	<i>The ‘for’ loop</i>	55
6.1.1	Loop syntax	57
6.2	<i>Looping until</i>	58
6.3	<i>Advanced topics</i>	61
6.3.1	Parallelism	61
6.4	<i>Exercises</i>	62
6.5	<i>Sources used in this chapter</i>	62
7	Functions	65
7.1	<i>Function definition and call</i>	65
7.1.1	Why use functions?	67
7.2	<i>Anatomy of a function definition and call</i>	68
7.2.1	Examples	69
7.2.2	Another option for defining functions	69
7.3	<i>Void functions</i>	69
7.4	<i>Parameter passing</i>	70
7.4.1	Pass by value	70
7.4.2	Pass by reference	72
7.5	<i>Recursive functions</i>	74
7.6	<i>Advanced function topics</i>	75
7.6.1	Default arguments	75
7.6.2	Polymorphic functions	76
7.6.3	Stack overflow	76
7.7	<i>Library functions</i>	76
7.7.1	Random function	76
7.8	<i>Review questions</i>	77
7.9	<i>Sources used in this chapter</i>	78
8	Scope	81
8.1	<i>Scope rules</i>	81

8.1.1	Lexical scope	81
8.1.2	Shadowing	81
8.1.3	Lifetime versus reachability	82
8.1.4	Scope subtleties	83
8.2	<i>Static variables</i>	84
8.3	<i>Scope and memory</i>	84
8.4	<i>Review questions</i>	85
8.5	<i>Sources used in this chapter</i>	86
9	Structures	89
9.1	<i>Why structures?</i>	89
9.2	<i>The basics of structures</i>	89
9.3	<i>Structures and functions</i>	91
9.4	<i>Sources used in this chapter</i>	93
10	Classes and objects	97
10.1	<i>What is an object?</i>	97
10.1.1	Constructor	98
10.1.2	Methods	98
10.1.3	Initialization	99
10.1.4	Methods	100
10.1.5	Default constructor	102
10.1.6	Accessors	102
10.1.7	Examples	103
10.2	<i>Inclusion relations between classes</i>	104
10.2.1	Literal and figurative has-a	105
10.3	<i>Inheritance</i>	106
10.3.1	Methods of base and derived classes	107
10.3.2	Virtual methods	108
10.3.3	Advanced topics in inheritance	109
10.4	<i>Advanced topics</i>	109
10.4.1	Returning by reference	109
10.4.2	Accessor functions	110
10.4.3	Accessability	111
10.4.4	Polymorphism	111
10.4.5	Operator overloading	111
10.4.6	Functors	112
10.4.7	Copy constructor	112
10.4.8	Destructor	113
10.4.9	‘this’ pointer	115
10.4.10	Static members	115
10.5	<i>Review question</i>	116
10.6	<i>Sources used in this chapter</i>	116
11	Arrays	129
11.1	<i>Introduction</i>	129
11.1.1	Vector creation	129
11.1.2	Element access	130
11.1.3	Initialization	130

11.2	<i>Ranging over a vector</i>	131
11.3	<i>Vector are a class</i>	133
11.3.1	<i>Vector methods</i>	134
11.3.2	<i>Vectors are dynamic</i>	134
11.4	<i>Vectors and functions</i>	135
11.4.1	<i>Pass vector to function</i>	135
11.4.2	<i>Vector as function return</i>	136
11.5	<i>Vectors in classes</i>	136
11.5.1	<i>Timing</i>	137
11.6	<i>Wrapping a vector in an object</i>	138
11.7	<i>Multi-dimensional cases</i>	139
11.7.1	<i>Matrix as vector of vectors</i>	139
11.7.2	<i>A better matrix class</i>	140
11.8	<i>Advanced topics</i>	140
11.8.1	<i>Iterators</i>	140
11.8.2	<i>Old-style arrays</i>	141
11.8.3	<i>Stack and heap allocation</i>	143
11.8.4	<i>The Array class</i>	144
11.8.5	<i>Span</i>	144
11.9	<i>Exercises</i>	145
11.10	<i>Sources used in this chapter</i>	146
12	Strings	157
12.1	<i>Characters</i>	157
12.2	<i>Basic string stuff</i>	157
12.3	<i>String streams</i>	160
12.4	<i>Advanced topics</i>	160
12.4.1	<i>Conversation to/from string</i>	160
12.4.2	<i>Unicode</i>	161
12.5	<i>C strings</i>	161
12.6	<i>Sources used in this chapter</i>	161
13	Input/output	167
13.1	<i>Formatted output</i>	167
13.1.1	<i>Floating point output</i>	169
13.1.2	<i>Saving and restoring settings</i>	171
13.2	<i>File output</i>	171
13.3	<i>Output your own classes</i>	172
13.4	<i>Output buffering</i>	172
13.5	<i>Input</i>	173
13.5.1	<i>File input</i>	173
13.5.2	<i>Input streams</i>	174
13.6	<i>Sources used in this chapter</i>	174
14	References	183
14.1	<i>Reference</i>	183
14.2	<i>Pass by reference</i>	183
14.3	<i>Reference to class members</i>	184
14.4	<i>Reference to array members</i>	186

14.5	<i>rvalue references</i>	187
14.6	<i>Sources used in this chapter</i>	187
15	Pointers	191
15.1	<i>The ‘arrow’ notation</i>	191
15.2	<i>Making a shared pointer</i>	192
15.2.1	Pointers and arrays	192
15.2.2	Smart pointers versus address pointers	194
15.3	<i>Garbage collection</i>	194
15.4	<i>More about pointers</i>	195
15.4.1	Get the pointed data	195
15.5	<i>Advanced topics</i>	196
15.5.1	Unique pointers	196
15.5.2	Base and derived pointers	196
15.5.3	Shared pointer to ‘this’	196
15.5.4	Weak pointers	197
15.5.5	Null pointer	197
15.5.6	Opaque pointer	198
15.5.7	Pointers to non-objects	198
15.6	<i>Smart pointers vs C pointers</i>	199
15.7	<i>Sources used in this chapter</i>	199
16	C-style pointers and arrays	205
16.1	<i>What is a pointer</i>	205
16.2	<i>Pointers and addresses, C style</i>	205
16.3	Arrays and pointers	207
16.4	<i>Pointer arithmetic</i>	208
16.5	<i>Multi-dimensional arrays</i>	209
16.6	<i>Parameter passing</i>	209
16.6.1	Allocation	210
16.6.2	Use of new	211
16.7	<i>Memory leaks</i>	212
16.8	<i>Sources used in this chapter</i>	212
17	Const	215
17.1	<i>Const arguments</i>	215
17.2	<i>Const references</i>	215
17.2.1	Const references in range-based loops	217
17.3	<i>Const methods</i>	217
17.4	<i>Overloading on const</i>	218
17.5	<i>Const and pointers</i>	218
17.6	<i>Mutable</i>	219
17.7	<i>Compile-time constants</i>	221
17.8	<i>Sources used in this chapter</i>	222
18	Prototypes	229
18.1	<i>Prototypes for functions</i>	229
18.1.1	Separate compilation	230
18.1.2	Header files	231
18.1.3	C and C++ headers	231

18.2	<i>Prototypes for class methods</i>	232
18.3	<i>Header files and templates</i>	232
18.4	<i>Namespaces and header files</i>	233
18.5	<i>Global variables and header files</i>	233
19	Namespaces	235
19.1	<i>Solving name conflicts</i>	235
19.1.1	Namespace header files	236
19.2	<i>Best practices</i>	237
20	Preprocessor	239
20.1	<i>Textual substitution</i>	239
20.2	<i>Parametrized macros</i>	240
20.3	<i>Conditionals</i>	240
20.3.1	<i>Check on a value</i>	240
20.3.2	<i>Check for macros</i>	241
20.3.3	<i>Including a file only once</i>	241
20.4	<i>Other pragmas</i>	241
21	Templates	243
21.1	<i>Templated functions</i>	243
21.2	<i>Templated classes</i>	244
21.2.1	<i>Specific implementation</i>	244
21.3	<i>Concepts</i>	244
22	Error handling	247
22.1	<i>General discussion</i>	247
22.2	<i>Mechanisms to support error handling and debugging</i>	248
22.2.1	<i>Assertions</i>	248
22.2.2	<i>Exception handling</i>	248
22.2.3	<i>'Where does this error come from'</i>	250
22.2.4	<i>Legacy mechanisms</i>	250
22.2.5	<i>Legacy C mechanisms</i>	250
22.3	<i>Tools</i>	251
23	Standard Template Library	253
23.1	<i>Complex numbers</i>	253
23.2	<i>Containers</i>	253
23.2.1	<i>Maps: associative arrays</i>	254
23.2.2	<i>Iterators</i>	254
23.3	<i>Regular expression</i>	256
23.4	<i>Tuples and structured bindings</i>	257
23.5	<i>Union-like stuff: tuples, optionals, variants</i>	258
23.5.1	<i>Tuples</i>	258
23.5.2	<i>Optional</i>	259
23.5.3	<i>Variant</i>	259
23.6	<i>Algorithms</i>	260
23.7	<i>Limits</i>	260
23.7.1	<i>Storage</i>	261
23.8	<i>Random numbers</i>	261
23.9	<i>Time</i>	261

23.10	<i>Sources used in this chapter</i>	261
24	Obscure stuff	271
24.1	<i>Auto</i>	271
24.1.1	<i>Declarations</i>	271
24.1.2	<i>Iterating</i>	272
24.1.3	<i>decltype: declared type</i>	273
24.2	<i>Iterating over classes</i>	273
24.3	<i>Lambdas</i>	276
24.3.1	<i>Lambda members of classes</i>	276
24.3.2	<i>Generic lambdas</i>	277
24.3.3	<i>Lambda in algorithm</i>	277
24.3.4	<i>Lambda variables by reference</i>	278
24.4	<i>Casts</i>	278
24.4.1	<i>Static cast</i>	279
24.4.2	<i>Dynamic cast</i>	279
24.4.3	<i>Const cast</i>	281
24.4.4	<i>Reinterpret cast</i>	281
24.4.5	<i>A word about void pointers</i>	281
24.5	<i>Ivalue vs rvalue</i>	282
24.5.1	<i>Conversion</i>	283
24.5.2	<i>References</i>	283
24.5.3	<i>Rvalue references</i>	283
24.6	<i>Move semantics</i>	284
24.7	<i>Graphics</i>	284
24.8	<i>Standards timeline</i>	284
24.8.1	<i>C++98/C++03</i>	284
24.8.2	<i>C++11</i>	285
24.8.3	<i>C++14</i>	285
24.8.4	<i>C++17</i>	285
24.8.5	<i>C++20</i>	286
24.9	<i>Sources used in this chapter</i>	286
25	C++ for C programmers	293
25.1	<i>I/O</i>	293
25.2	<i>Arrays</i>	293
25.2.1	<i>Vectors from C arrays</i>	293
25.3	<i>Dynamic storage</i>	294
25.4	<i>Strings</i>	294
25.5	<i>Pointers</i>	294
25.5.1	<i>Parameter passing</i>	295
25.6	<i>Objects</i>	295
25.7	<i>Namespaces</i>	295
25.8	<i>Templates</i>	295
25.9	<i>Obscure stuff</i>	295
25.9.1	<i>Lambda</i>	295
25.9.2	<i>Const</i>	295
25.9.3	<i>Lvalue and rvalue</i>	295

25.10 *Sources used in this chapter* 296

26 **C++ review questions** 297

26.1 *Arithmetic* 297

26.2 *Looping* 297

26.3 *Functions* 297

26.4 *Vectors* 298

26.5 *Vectors* 298

26.6 *Objects* 298

III Fortran 301

27 **Basics of Fortran** 303

27.1 *Source format* 303

27.2 *Compiling Fortran* 304

27.3 *Main program* 304

27.3.1 *Program structure* 304

27.3.2 *Statements* 305

27.3.3 *Comments* 305

27.4 *Variables* 305

27.4.1 *Declarations* 306

27.4.2 *Precision* 306

27.4.3 *Initialization* 307

27.5 *Input/Output, or I/O as we say* 308

27.6 *Expressions* 308

27.7 *Review questions* 309

27.8 *Sources used in this chapter* 310

28 **Conditionals** 313

28.1 *Forms of the conditional statement* 313

28.2 *Operators* 313

28.3 *Select statement* 314

28.4 *Boolean variables* 314

28.5 *Review questions* 315

29 **Loop constructs** 317

29.1 *Loop types* 317

29.2 *Interruptions of the control flow* 318

29.3 *Implied do-loops* 318

29.4 *Review questions* 319

30 **Scope** 321

30.1 *Scope* 321

30.1.1 *Variables local to a program unit* 321

30.1.2 *Variables in an internal procedure* 322

31 **Subprograms and modules** 323

31.1 *Procedures* 323

31.1.1 *Subroutines and functions* 323

31.1.2 *Return results* 325

31.1.3 *Arguments* 327

31.1.4	Types of procedures	328
31.1.5	More about arguments	328
31.2	<i>Interfaces</i>	329
31.2.1	Polymorphism	329
31.3	<i>Sources used in this chapter</i>	329
32	String handling	335
32.1	<i>String denotations</i>	335
32.2	<i>Characters</i>	335
32.3	<i>Strings</i>	335
32.4	<i>Strings versus character arrays</i>	336
32.5	<i>Sources used in this chapter</i>	336
33	Structures, eh, types	337
34	Modules	339
34.1	<i>Modules for program modularization</i>	340
34.2	<i>Modules</i>	340
34.2.1	Polymorphism	341
34.2.2	Operator overloading	341
34.3	<i>Sources used in this chapter</i>	342
35	Classes and objects	343
35.1	<i>Classes</i>	343
36	Arrays	347
36.1	<i>Static arrays</i>	347
36.1.1	Initialization	348
36.1.2	Array sections	348
36.1.3	Integer arrays as indices	349
36.2	<i>Multi-dimensional</i>	349
36.2.1	Querying an array	351
36.2.2	Reshaping	352
36.3	<i>Arrays to subroutines</i>	352
36.4	<i>Allocatable arrays</i>	353
36.5	<i>Array output</i>	353
36.6	<i>Operating on an array</i>	353
36.6.1	Arithmetic operations	353
36.6.2	Intrinsic functions	354
36.6.3	Restricting with <code>where</code>	355
36.6.4	Global condition tests	355
36.7	<i>Array operations</i>	355
36.7.1	Loops without looping	355
36.7.2	Loops without dependencies	356
36.7.3	Loops with dependencies	357
36.8	<i>Review questions</i>	358
36.9	<i>Sources used in this chapter</i>	358
37	Pointers	361
37.1	<i>Basic pointer operations</i>	361
37.2	<i>Pointers and arrays</i>	363
37.3	<i>Example: linked lists</i>	363

37.4	<i>Sources used in this chapter</i>	366
38	Input/output	367
38.1	<i>Types of I/O</i>	367
38.2	<i>Print to terminal</i>	367
38.2.1	Print on one line	367
38.2.2	Printing arrays	368
38.2.3	Formats	368
38.3	<i>File and stream I/O</i>	370
38.3.1	Units	370
38.3.2	Other write options	370
38.4	<i>Unformatted output</i>	370
38.5	<i>Sources used in this chapter</i>	371
39	Leftover topics	373
39.1	<i>Random numbers</i>	373
39.2	<i>Timing</i>	373
40	Fortran review questions	375
40.1	<i>Fortran versus C++</i>	375
40.2	<i>Arrays</i>	375
40.3	<i>Subprograms</i>	375

IV	Exercises and projects	377
41	Prime numbers	379
41.1	<i>Arithmetic</i>	379
41.2	<i>Conditionals</i>	379
41.3	<i>Looping</i>	379
41.4	<i>Functions</i>	380
41.5	<i>While loops</i>	380
41.6	<i>Structures</i>	380
41.7	<i>Classes and objects</i>	381
41.8	<i>Eratosthenes sieve</i>	382
41.8.1	<i>Arrays implementation</i>	382
41.8.2	<i>Streams implementation</i>	382
41.9	<i>Range implementation</i>	383
42	Geometry	385
42.1	<i>Basic functions</i>	385
42.2	<i>Point class</i>	385
42.3	<i>Using one class in another</i>	386
42.4	<i>Is-a relationship</i>	388
42.5	<i>More stuff</i>	388
43	Infectuous disease simulation	389
43.1	<i>Model design</i>	389
43.1.1	<i>Other ways of modeling</i>	389
43.2	<i>Coding up the basics</i>	390
43.3	<i>Population</i>	391
43.4	<i>Contagion</i>	391

43.5	<i>Spreading</i>	392
43.6	<i>Project writeup and submission</i>	392
43.6.1	<i>Program files</i>	392
43.6.2	<i>Writeup</i>	392
44	PageRank	395
44.1	<i>Basic ideas</i>	395
44.2	<i>Clicking around</i>	396
44.3	<i>Graph algorithms</i>	396
44.4	<i>Page ranking</i>	397
44.5	<i>Graphs and linear algebra</i>	398
44.6	<i>Sources used in this chapter</i>	398
45	Redistricting	399
45.1	<i>Basic concepts</i>	399
45.2	<i>Basic functions</i>	400
45.2.1	<i>Voters</i>	400
45.2.2	<i>Populations</i>	400
45.2.3	<i>Districting</i>	401
45.3	<i>Strategy</i>	402
45.4	<i>Efficiency: dynamic programming</i>	403
45.5	<i>Extensions</i>	403
46	Amazon delivery truck scheduling	405
46.1	<i>Problem statement</i>	405
46.2	<i>Coding up the basics</i>	405
46.2.1	<i>Address list</i>	405
46.2.2	<i>Add a depot</i>	407
46.2.3	<i>Greedy construction of a route</i>	407
46.3	<i>Optimizing the route</i>	408
46.4	<i>Multiple trucks</i>	409
46.5	<i>Amazon prime</i>	410
46.6	<i>Dynamicism</i>	410
46.7	<i>Sources used in this chapter</i>	410
47	High performance linear algebra	411
47.1	<i>Mathematical preliminaries</i>	411
47.2	<i>Matrix storage</i>	412
47.2.1	<i>Submatrices</i>	413
47.3	<i>Multiplication</i>	414
47.3.1	<i>One level of blocking</i>	414
47.3.2	<i>Recursive blocking</i>	414
47.4	<i>Performance issues</i>	414
47.4.1	<i>Parallelism (optional)</i>	415
47.4.2	<i>Comparison (optional)</i>	415
48	Memory allocation	417
49	DNA Sequencing	419
49.1	<i>Basic functions</i>	419
50	Cryptography	421
50.1	<i>Basic ideas</i>	421

51	Climate change	423
51.1	<i>Reading the data</i>	423
51.2	<i>Statistical hypothesis</i>	423

V Advanced topics 425

52	Programming strategies	427
52.1	<i>A philosophy of programming</i>	427
52.2	<i>Programming: top-down versus bottom up</i>	427
52.2.1	Worked out example	428
52.3	<i>Coding style</i>	429
52.4	<i>Documentation</i>	429
52.5	<i>Testing</i>	429
52.6	<i>Best practices: C++ Core Guidelines</i>	430
53	Tiniest of introductions to algorithms and data structures	431
53.1	<i>Data structures</i>	431
53.1.1	Stack	431
53.1.2	Linked lists	431
53.1.3	Trees	436
53.2	<i>Algorithms</i>	438
53.2.1	Sorting	438
53.3	<i>Programming techniques</i>	439
53.3.1	Memoization	439
54	Complexity	441
54.1	<i>Order of complexity</i>	441
54.1.1	Time complexity	441
54.1.2	Space complexity	441

VI Index and such 443

55	Index	445
56	Bibliography	453

PART I

INTRODUCTION

Chapter 1

Introduction

1.1 Programming and computational thinking

1.1.1 History

Earliest computers


Historically, computers were used for big physics calculations, for instance, atom bomb calculations



(Robert Oppenheimer and John von Neumann)

Hands-on programming

Very early computers such as ENIAC were hardwired

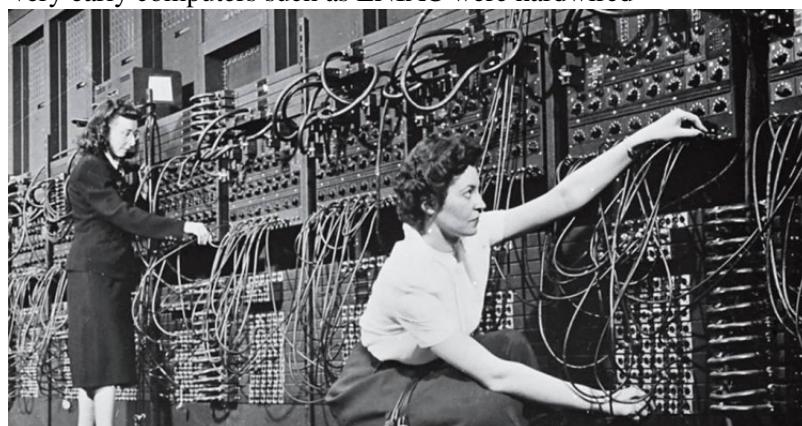

later became ‘stored program’ computer.

see <http://eniacprogrammers.org/>

Program entry


1. Introduction

Later programs were written on punchcards



The first programming language

Initial programming was about translating the math formulas; after a while they made a language for that: FORmula TRANslator

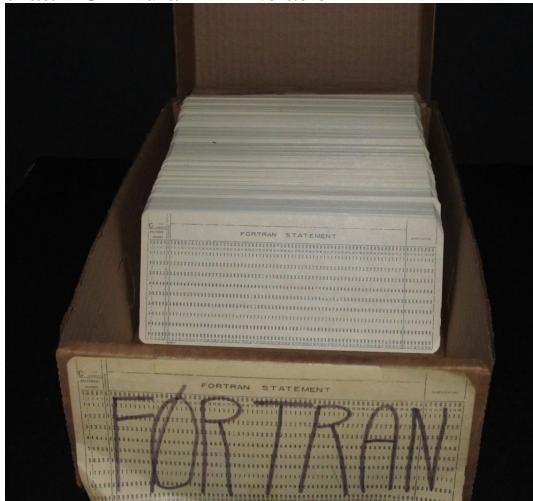

Programming is everywhere

Programming is used in many different ways these days.

- You can make your own commands in *Microsoft Word*.
- You can make apps for your *smartphone*.
- You can solve the riddles of the universe using big computers.

This course is aimed at people in the last category.

1.1.2 Is programming science, art, or craft?

In the early days of computing, hardware design was seen as challenging, while programming was little more than data entry. The fact that Fortran stands for ‘formula translation’ speaks of this: once you have the math, programming is nothing more than translating the math into code. The fact that programs could have subtle errors, or *bugs*, came as quite a surprise.

The fact that programming was not as highly valued also had the side-effect that many of the early programmers were women. Two famous examples were Navy Rear-admiral Grace Hopper, inventor of the Cobol language, and Margaret Hamilton who led the development of the Apollo program software. This situation changed after the 1960s and certainly with the advent of PCs¹.

There are scientific aspects to programming:

- Algorithms and complexity theory have a lot of math in them.
- Programming language design is another mathematically tinged subject.

But for a large part programming is a discipline. What constitutes a good program is a matter of taste. That does not mean that there aren't recommended practices. In this course we will emphasize certain practices that we think lead to good code, as likewise will discourage you from certain idioms.

None of this is an exact science. There are multiple programs that give the right output. However, programs are rarely static. They often need to be amended or extended, or even fixed, if erroneous behaviour comes to light, and in that case a badly written program can be a detriment to programmer productivity. An important consideration, therefore, is intelligibility of the program, to another programmer, to your professor in this course, or even to yourself two weeks from now.

1.1.3 Computational thinking

Programming is not simple

Programs can get pretty big:

It's not just translating formulas anymore.
Translating ideas to computer code: computational thinking.

Computational thinking: elevator scheduling

Mathematical thinking:

- Number of people per day, speed of elevator \Rightarrow yes, it is possible to get everyone to the right floor.

1. <http://www.sysgen.com.ph/articles/why-women-stopped-coding/27216>

1. Introduction

- Distribution of people arriving etc. \Rightarrow average wait time.

Sufficient condition \neq existence proof.

Computational thinking: actual design of a solution

- Elevator scheduling: someone at ground level presses the button, there are cars on floors 5 and 10; which one do you send down?

Coming up with a strategy takes creativity!

Exercise 1.1. A straightforward calculation is the simplest example of an algorithm.

Calculate how many schools for hair dressers the US can sustain. Identify the relevant factors, estimate their sizes, and perform the calculation.

Exercise 1.2. Algorithms are usually not uniquely determined:

there is more than one way solve a problem.

Four self-driving cars arrive simultaneously at an all-way-stop intersection. Come up with an algorithm that a car can follow to safely cross the intersection. If you can come up with more than one algorithm, what happens when two cars using different algorithms meet each other?

Computation and complexity

Looking up a name in the phone book

- start on page 1, then try page 2, et cetera
- or start in the middle, continue with one of the halves.

What is the average search time in the two cases?

Having a correct solution is not enough!

Programming languages are about ideas

A powerful programming language serves as a framework within which we organize our ideas. Every programming language has three mechanisms for accomplishing this:

- primitive expressions
- means of combination
- means of abstraction

Abelson and Sussman, The Structure and Interpretation of Computer Programs

Abstraction

- The elevator programmer probably thinks: ‘if the button is pressed’, not ‘if the voltage on that wire is 5 Volt’.
- The Google car programmer probably writes: ‘if the car before me slows down’, not ‘if I see the image of the car growing’.
- ... but probably another programmer had to write that translation.

A program has layers of abstractions.

Abstraction is good

Abstraction means your program talks about your application concepts, rather than about numbers and characters and such.

Your program should read like a story about your application; not about bits and bytes.

Good programming style makes code intelligible and maintainable.

(Bad programming style may lead to lower grade.)

Trust him, he's Dutch!

The competent programmer is fully aware of the strictly limited size of his own skull; therefore he approaches the programming task in full humility, and among other things he avoids clever tricks like the plague — Edsger Dijkstra

Data abstraction

What is the structure of the data in your program?



Margaret Hamilton, director of the Software Engineering Division, the MIT Instrumentation Laboratory, which developed on-board software for the Apollo program.



Stack: you can only get at the top item



Queue: items get added in the back, processed at the front



A program contains structures that support the algorithm. You may have to design them yourself.

1.1.4 Hardware

Do you have to know much about hardware?

Yes, it's there, but we don't think too much about it in this course.

Advanced programmers know that hardware influences the speed of execution (see TACC's ISTC course).

1.1.5 Algorithms

What is an algorithm?

An algorithm is a sequence of unambiguous instructions for solving a problem, i.e., for obtaining a required output for any legitimate input in a finite amount of time
[A. Levitin, Introduction to The Design and Analysis of Algorithms,
Addison-Wesley, 2003]

The instructions are written in some language:

- We will teach you C++ and Fortran;
- the compiler translates those languages to machine language

Program steps

- Simple instructions: arithmetic.
- Complicated instructions: control structures
 - conditionals
 - loops

Program data

- Input and output data: to/from file, user input, screen output, graphics.
- Data during the program run:
 - Simple variables: character, integer, floating point
 - Arrays: indexed set of characters and such
 - Data structures: trees, queues
 - * Defined by the user, specific for the application
 - * Found in a library (big difference between C/C++!)

1.2 About the choice of language

There are many programming languages, and not every language is equally suited for every purpose. In this book you will learn C++ and Fortran, because they are particularly good for scientific computing. And by ‘good’, we mean

- They can express the sorts of problems you want to tackle in scientific computing, and
- they execute your program efficiently.

There are other languages that may not be as convenient or efficient in expressing scientific problems. For instance, *python* is a popular language, but typically not the first choice if you’re writing a scientific program. As an illustration, here is simple sorting algorithm, coded in both C++ and python.

Comparing two languages

Python vs C++ on bubblesort:

```
for i in range(n-1):
    for j in range(n-i-1):
        if numbers[j+1]<numbers[j]:
            swaptmp = numbers[j+1]
            numbers[j+1] = numbers[j]
            numbers[j] = swaptmp

for (int i=0; i<n-1; i++)
    for (int j=0; j<n-1-i; j++) {
        if (numbers[j+1]<numbers[j]) {
            int swaptmp = numbers[j+1];
            numbers[j+1] = numbers[j];
            numbers[j] = swaptmp;
        }
    }

$ python bubblesort.py 5000
Elapsed time: 12.1030311584
$ ./bubblesort 5000
Elapsed time: 0.24121
```

But this ignores one thing: the sorting algorithm we just implemented is not actually a terribly good one, and in fact python has a better one built-in.

The right language is not all

Python with quicksort algorithm:

```
numpy.sort(numbers,kind='quicksort')

[] python arraysort.py 5000
Elapsed time: 0.00210881233215
```

So that is another consideration when choosing a language: is there a language that already comes with the tools you need. This means that your application may dictate the choice of language. If you’re stuck with one language, don’t reinvent the wheel! If someone has already coded it or it’s part of the language, don’t redo it yourself.

Chapter 2

Warming up

2.1 Programming environment

Programming can be done in any number of ways. It is possible to use an Integrated Development Environment (IDE) such as *Xcode* or *Visual Studio*, but for if you're going to be doing some computational science you should really learn a *Unix* variant.

- If you have a *Linux* computer, you are all set.
- If you have an *Apple* computer, it is easy to get you going. You can use the standard *Terminal* program, or you can use a full *X windows* installation, such as *XQuartz*, which makes *Unix* graphics possible. This, and other *Unix* programs can be obtained through a *package manager* such as *homebrew* or *macports*.
- *Microsoft Windows* users can use *putty* but it is probably a better solution to install a virtual environment such as *VMware* (<http://www.vmware.com/>) or *Virtualbox* (<https://www.virtualbox.org/>).

Next, you should know a text editor. The two most common ones are *vi* and *emacs*.

2.1.1 Language support in your editor

The author of this book is very much in favour of the *emacs* editor. The main reason is its support for programming languages. Most of the time it will detect what language a file is written in, based on the file extension:

- `cxx, cpp, cc` for C++, and
- `f90, F90` for Fortran.

If your editor somehow doesn't detect the language, you can add a line at the top of the file:

```
// -*- c++ -*-
```

for C++ mode, and

```
! -*- f90 -*-
```

for Fortran mode.

Main advantages are automatic indentation (C++ and Fortran) and supplying block end statements (Fortran). The editor will also apply ‘syntax colouring’ to indicate the difference between keywords and variables.

2.2 Compiling

The word ‘program’ is ambiguous. Part of the time it means the *source code*: the text that you type, using a text editor. And part of the time it means the *executable*, a totally unreadable version of your source code, that can be understood and executed by the computer. The process of turning your source code into an executable is called *compiling*, and it requires something called a *compiler*. (So who wrote the source code for the compiler? Good question.)

Here is the workflow for program development

1. You think about how to solve your program
2. You write code using an editor. That gives you a source file.
3. You compile your code. That gives you an executable.
Oh, make that: you try to compile, because there will probably be compiler errors: places where you sin against the language syntax.
4. You run your code. Chances are it will not do exactly what you intended, so you go back to the editing step.

2.3 Your environment

Exercise 2.1. Do an online search into the history of computer programming. Write a page, if possible with illustration, and turn this into a pdf file. Submit this to your teacher.

Chapter 3

Teachers guide

This book was written for a one-semester introductory programming course at The University of Texas at Austin, aimed primarily at students in the physical and engineering sciences. Thus, examples and exercises are as much as possible scientifically motivated. This target audience also explains the inclusion of Fortran.

This book is not encyclopedic. Rather than teaching each topic in its full glory, the author has taken a ‘good practices’ approach, where students learn enough of each topic to become a competent programmer. This serves to keep this book at a manageable length, and to minimize class lecture time, emphasizing lab exercises instead.

Even then, there is more material here than can be covered and practiced in one semester. If only C++ is taught, it is probably possible to cover the whole of Part II; for the case where both C++ and Fortran are taught, we have a suggested timeline below.

3.1 Justification

The chapters of Part II and Part III are presented in suggested teaching order. Here we briefly justify our (non-standard) sequencing of topics and outline a timetable for material to be covered in one semester. Most notably, Object-Oriented programming is covered before arrays and pointers come very late, if at all.

There are several thoughts behind this. For one, dynamic arrays in C++ are most easily realized through the `std :: vector` mechanism, which requires an understanding of classes. The same goes for `std :: string`.

Secondly, in the traditional approach, object-oriented techniques are taught late in the course, after all the basic mechanisms, including arrays. We consider OOP to be an important notion in program design, and central to C++, rather than an embellishment on the traditional C mechanisms, so we introduce it as early as possible.

Even more elementary, we emphasize range-based loops as much as possible over indexed loops, since ranges are increasing in importance in recent language versions.

3. Teachers guide

3.2 Timeline for a C++/F03 course

As remarked above, this book is based on a course that teaches both C++ and Fortran2003. Here we give the timeline used, including some of the assigned exercises.

For a one semester course of slightly over three months, two months would be spent on C++ (see table 3.1), after which a month is enough to explain Fortran. Remaining time will go to exams and elective topics.

lesson#	Topic	Exercises			
		homework	prime	geom	infect
1	Statements and expressions	4.11	41.1		
2	Conditionals	5.3	41.2		
4	Looping	6.4	41.3, 41.4, 41.6		
5	continue				
6	Functions	7.4, 7.7	41.5		
7	continue			42.1	
8	I/O				
9	Structs	9.1	41.7		
10	Objects		41.8, 41.10	42.3	43.1
11	continue				
12	has-a relation			42.9, 42.10, 42.1, 42.12	43.2
13	inheritance			42.13, 42.14	
14	Arrays				43.2 and further
15	continue				
16	Strings				
Advanced					
Pointers and C-style addresses		Section 53.1.2			
Prototypes (and separate compilation) and namespaces					
Error handling and exceptions		22.1			
Lambdas		24.3			

Table 3.1: Two-month lesson plan for C++

3.2.1 Project-based teaching

To an extent it is inevitable that students will do a number of exercises that are not connected to any earlier or later ones. However, to give some continuity, we have given some programming projects that students gradually build towards.

prime Prime number testing, culminating in prime number sequence objects, and testing a corollary of the Goldbach conjecture. Chapter 41.

geom Geometry related concepts; this is mostly an exercise in object-oriented programming. Chapter 42.

infect The spreading of infectious diseases; these are exercises in object-oriented design. Students can explore various real-life scenarios. Chapter 43.

pagerank The Google Pagerank algorithm. Students program a simulated internet, and explore pageranking, including ‘search engine optimization’. This exercise uses lots of pointers. Chapter 44.

scheduling Exploration of concepts related to the Traveling Salesman Problem (TSP), with some modifications that model *Amazon Prime*.

Rather than including the project exercises in the didactic sections, each section of these projects list the prerequisite basic sections.

Our projects are very much computation-based. A more GUI-like approach to project-based teaching is described in [6].

3.2.2 Choice: Fortran or advanced topics

After two months of grounding in OOP programming in C++, the Fortran lectures and exercises reprise this sequence, letting the students do the same exercises in Fortran that they did in C++. However, array mechanisms in Fortran warrant a separate lecture.

If the course focuses solely on C++, the third month can be devoted to

- templates,
- exceptions,
- namespaces,
- multiple inheritance,
- the cpp preprocessor,
- closures.

3. Teachers guide

PART II

C++

Chapter 4

Basic elements of C++

4.1 From the ground up: Compiling C++

In this chapter and the next you are going to learn the C++ language. But first we need some externalia: how do you deal with any program?

Two kinds of files

In programming you have two kinds of files:

- *source files*, which are understandable to you, and which you create with an editor such as vi or emacs; and
- *binary files*, which are understandable to the computer, and unreadable to you.

Your source files are translated to binary by a *compiler*.

Let's say that

- you have a source code file myprogram.cxx;
- and you want an executable file called myprogram,
- and your compiler is g++, the C++ compiler of the GNU project. (If you have the Intel compilers, you will use icpc instead.)

which you can verbalize as ‘invoke the g++ (or icpc) compiler, with output myprogram, on myprogram.cxx’.

Let's do an example.

Exercise 4.1. Make a file zero.cc with the following lines:

```
#include <iostream>
using std::cout;
using std::endl;

int main() {
    return 0;
}
```

and compile it. Intel compiler:

```
icpc -o zeroprogram zero.cc
```

Run this program (it gives no output):

```
./zeroprogram
```

Compile line

- *icpc*: compiler. Alternative: use g++ or clang++

- `-o zeroprogram`: output into a binary name of your choosing
- `zero.cc`: your source file.

In the above program:

1. The first three lines are magic, for now. Always include them.
2. The `main` line indicates where the program starts; between its opening and closing brace will be the *program statements*.
3. The `return` statement indicates successful completion of your program.

As you may have guessed, this program produces absolutely no output when you run it.

Exercise 4.2. Add this line:

```
// cout << "Hello world!" << endl;
```

(copying from the pdf file is dangerous! please type it yourself)

Compile and run again.

(Did you indent the ‘hello world’ line? Did your editor help you with the indentation?)

File names

File names can have extensions: the part after the dot.

- `program.cxx` or `program.cc` are typical extensions for C++ sources.
- `program.cpp` is also used, but there is a possible confusion with ‘C PreProcessor’.
- Using `program` without extension usually indicates an *executable*.

Review 4.1. True or false?

1. The programmer only writes source files, no binaries.
2. The computer only executes binary files, no human-readable files.

4.1.1 A quick word about unix commands

The compile line

```
g++ -o myprogram myprogram.cxx
```

can be thought of as consisting of three parts:

- The command `g++` that starts the line and determines what is going to happen;
- The argument `myprogram.cxx` that ends the line is the main thing that the command works on; and
- The option/value pair `-o myprogram`. Most Unix commands have various options that are, as the name indicates, optional. For instance you can tell the compiler to try very hard to make a fast program:

```
g++ -O3 -o myprogram myprogram.cxx
```

Options can appear in any order, so this last command is equivalent to

```
g++ -o myprogram -O3 myprogram.cxx
```

Be careful not to mix up argument and option. If you type

```
g++ -o myprogram.cxx myprogram
```

then Unix will reason: ‘`myprogram.cxx` is the output, so if that file already exists (which, yes, it does) let’s just empty it before we do anything else’. And you have just lost your program. Good thing that editors like `emacs` keep a backup copy of your file.

4.1.2 C++ is a moving target

The C++ language has gone through a number of standards. (This is described in some detail in section 24.8.) In this course we focus on a fairly recent standard: *C++17*. Unfortunately, your compiler will assume an earlier standard, so constructs taught here may be marked as ungrammatical.

You can tell your compiler to use the modern standard:

```
icpc -std=c++17 [other options]
```

but to save yourself a lot of typing, you can define

```
alias icpc='icpc -std=c++17'
```

in your shell startup files. On the class `isp` machine this alias has been defined by default.

4.2 Statements

Each programming language has its own (very precise!) rules for what can go in a source file. Globally we can say that a program contains instructions for the computer to execute, and these instructions take the form of a bunch of ‘statements’. Here are some of the rules on statements; you will learn them in more detail as you go through this book.

Program statements

- A program contains statements, each terminated by a semicolon.
- ‘Curly braces’ can enclose multiple statements.
- A statement can correspond to some action when the program is executed.
- Some statements are definitions, of data or of possible actions.
- Comments are ‘Note to self’, short:

```
|| cout << "Hello world" << endl; // say hi!
```

and arbitrary:

```
|| cout << /* we are now going
           to say hello
           */ "Hello!" << /* with newline: */ endl;
```

Exercise 4.3. Take the ‘hello world’ program you wrote above, and duplicate the `Hello-line`.

Compile and run.

Does it make a difference whether you have the two hellos on the same line or on different lines?

Experiment with other changes to the layout of your source. Find at least one change that leads to a compiler error. Can you relate the message to the error?

Errors

There are two types of errors that your program can have:

1. *Syntax or compile-time* errors: these arise if what you write is not according to the language specification. The compiler catches these errors, and it refuses to produce a *binary file*.
2. *Run-time* errors: these arise if your code is syntactically correct, and the compiler has produced an executable, but the program does not behave the way you intended or foresaw. Examples are divide-by-zero or indexing outside the bounds of an array.

Review 4.2. True or false?

- If your program compiles correctly, it is correct.
- If you run your program and you get the right output, it is correct.

Fixed elements

You see that certain parts of your program are inviolable:

- There are *keywords* such as `return` or `cout`; you can not change their definition.
- Curly braces and parentheses need to be matched.
- There has to be a `main` keyword.
- The `iostream` and `std` are usually needed.

Exercise 4.4. Experiment with the `cout` statement. Replace the string by a number or a mathematical expression. Can you guess how to print more than one thing, for instance:

- the string One third is, and
 - the result of the computation $1/3$,
- with the same `cout` statement?

Return statement

- The language standard says that `main` has to be of type `int`; the *return statement* returns an `int`.
- Compilers are fairly tolerant of deviations from this.
- Usual interpretation: returning zero means success; anything else failure;
- This *return code* can be detected by the *shell*

Code:

```
|| int main() {
    return 1;
}
```

Output

[basic] `return:`

```
./return ; \
if [ $? -ne 0 ] ; then \
    echo "Program failed" ; \
fi
Program failed
```

For the source of this example, see section [4.8.1](#)

4.3 Variables

A program could not do much without storing data: input data, temporary data for intermediate results, and final results. Data is stored in *variables*, which have

- a name, so that you can refer to them,
- a *datatype*, and
- a value.

Think of a variable as a labeled placed in memory.

- The variable is defined in a *variable declaration*,
- which can include an *variable initialization*.
- After a variable is defined, and given a value, it can be used,
- or given a (new) value in a *variable assignment*.

Typical variable lifetime

```

|| int i, j; // declaration
|| i = 5;   // set a value
|| i = 6;   // set a new value
|| j = i+1; // use the value of i
|| i = 8; // change the value of i
||         // but this doesn't affect j:
||         // it is still 7.
  
```

4.3.1 Variable declarations

A variable is defined once in a *variable declaration*, but it can be given a (new) value multiple times. It is not an error to use a variable that has not been given a value, but it may lead to strange behaviour at runtime, since the variable may contain random memory contents.

Variable names

- A variable name has to start with a letter;
- a name can contains letters and digits, but not most special characters, except for the underscore.
- For letters it matters whether you use upper or lowercase: the language is *case sensitive*.
- Words such as *main* or *return* are *reserved words*.
- Usually *i* and *j* are not the best variable names: use *row* and *column*, or other meaningful names, instead.

Declaration

There are a couple of ways to make the connection between a name and a type. Here is a simple *variable declaration*, which establishes the name and the type:

```

|| int n;
|| float x;
|| int n1,n2;
|| double re_part, im_part;
  
```

Where do declarations go?

Declarations can go pretty much anywhere in your program, but they need to come before the first use of the variable.

Note: it is legal to define a variable before the main program but that's not a good idea. Please only declare *inside* main (or inside a function et cetera).

Exercise 4.5. Which of the following are legal variable names?

1. mainprogram
2. main
3. Main
4. 1forall
5. one4all

6. one_for_all
7. onefor{all}.

4.3.2 Assignments

Setting a variable

```
|| i = 5;
```

means storing a value in the memory location. It is not the same as defining a mathematical equality

let $i = 5$.

Assignment

Once you have declared a variable, you need to establish a value. This is done in an *assignment* statement. After the above declarations, the following are legitimate assignments:

```
|| n = 3;
|| x = 1.5;
|| n1 = 7; n2 = n1 * 3;
```

Variable of the left-hand side gets value of the right-hand side.

You see that you can assign both a simple value or an expression.

Assignments

A variable can be given a value more than once. The following sequence of statements is a legitimate part of a program:

```
|| int n;
|| n = 3;
|| n = 2*n + 5;
|| n = 3*n + 7;
```

These are not math equations: variable on the lhs gets the value of the rhs.

Special forms

Update:

```
|| x = x+2; y = y/3;
// can be written as
|| x += 2; y /= 3;
```

Integer add/subtract one:

```
|| i++; j--; /* same as: */ i=i+1; j=j-1;
```

Exercise 4.6. Which of the following are legal? If they are, what is their meaning?

1. $n = n;$
2. $n = 2n;$
3. $n = n2;$
4. $n = 2*k;$
5. $n/2 = k;$
6. $n /= k;$

Exercise 4.7.

```

||#include <iostream>
||using std::cout;
||using std::endl;
||int main() {
||    int i;
||    int j = i+1;
||    cout << j << endl;
||    return 0;
||}

```

What happens?

1. Compiler error
2. Output: 1
3. Output is undefined
4. Error message during running the program.

Terminal input

To make a program run dynamic, you can set starting values from keyboard input. For this, use `cin`, which takes keyboard input and puts it in a numerical (or string) variable.

```

||// add at the top of your program:
||using std::cin;

||// then in your main:
||int i;
||cin >> i;

```

4.3.3 Datatypes

Datatypes

Variables come in different types;

- We call a variable of type `int`, `float`, `double` a *numerical variable*.
- *Complex numbers* will be discussed later.
- For characters: `char`. Strings are complicated; see later.
- Truth values: `bool`
- You can make your own types. Later.

For complex numbers see section 23.1. For strings see chapter 12.

At some point you may start to wonder precisely what the range of integers or real numbers is that is stored in an `int` or `float` variable. This is addressed in section 23.7.

4.3.3.1 Integers

Mathematically, integers are a special case of real numbers. In a computer, integers are stored very differently from real numbers – or technically, floating point numbers.

C++ integers are stored as binary number and a sign bit, though not as naively as this sounds. The upshot is that normally within a certain range all integer values can be represented.

Exercise 4.8. These days, the default amount of storage for an `int` is 32 bits. After one bit is used for the sign, that leave 31 bits for the digits. What is the representible integer range?

The integer type in C++ is `int`:

```
|| int my_integer;
|| my_integer = 5;
|| cout << my_integer << endl;
```

4.3.3.2 Floating point variables

floating point numbers.

- On the other hand, not all real numbers have a floating point representation. For instance, since computer numbers are binary, $1/2$ is representable but $1/3$ is not.
- You can assign variables of one type to another, but this may lead to truncation (assigning a floating point number to an integer) or unexpected bits (assigning a single precision floating point number do a double precision).

Floating points numbers do not behave like mathematical numbers.

Warning: floating point arithmetic

Floating point arithmetic is full of pitfalls.

- Don't count on $3 * (1./3)$ being exactly 1.
- Not even associative.

(See Eijkhout, Introduction to High Performance Computing, chapter 3.)

The following exercise illustrates another point about computer numbers.

Exercise 4.9. Define

```
|| float one = 1.;
```

and

1. Read a `float` `eps`,
2. Make a new variable that has the value `one+eps`. Print this.
3. Make another variable that is the previous one minus `one`. Print the result again.
4. Test your program with $.001, .0001, .00001, 0.00001$. Do you understand the result?

Complex numbers exist, see section 23.1.

4.3.3.3 Boolean values

Truth values

So far you have seen integer and real variables. There are also *boolean values* which represent truth values. There are only two values: `true` and `false`.

```
|| bool found{false};
|| found = true;
```

4.3.3.4 Strings

Strings, that is, strings of characters, are not a C++ built-in datatype. Thus, they take some extra setup to use. See chapter 12 for a full discussion. For now, if you want to use strings:

Quick intro to strings

- Add the following at the top of your file:

```
|| #include <string>
|| using std::string;
```

- Declare string variables as

```
|| string name;
```

- And you can now `cin` and `cout` them.

Exercise 4.10. Write a program that asks for the user's first name, uses `cin` to read that, and prints something like Hello, Susan! in response.

What happens if you enter first and last name?

4.3.4 Initialization

It is possible to give a variable a value right when it's created. This is known as *initialization* and it's different from creating the variable and later assigning to it (section 4.3.2).

Initialization syntax

There are two ways of initializing a variable

```
|| int i = 5;
|| int j{6};
```

Note that writing

```
|| int i;
|| i = 7;
```

is not an initialization: it's a declaration followed by an assignment.

If you declare a variable but not initialize, you can not count on its value being anything, in particular not zero. Such implicit initialization is often omitted for performance reasons.

4.4 Input/Output, or I/O as we say

A program typically produces output. For now we will only display output on the screen, but output to file is possible too. Regarding input, sometimes a program has all information for its computations, but it is also possible to base the computation on user input.

Terminal output

You have already seen `cout`:

```
|| float x = 5;
|| cout << "Here is the root: " << sqrt(x) << endl;
```

Terminal input

`cin` is limited. There is also `getline`, which is more general.

For more I/O, see chapter 13.

4.5 Expressions

The most basic step in computing is to form expressions such as sums, products, logical conjunctions, string appending. Let's start with constants.

4.5.1 Numerical expressions

Expressions in programming languages for the most part look the way you would expect them to.

- Mathematical operators: + - / and * for multiplication.
- Integer modulus: `5%2`
- You can use parentheses: `5*(x+y)`. Use parentheses if you're not sure about the precedence rules for operators.
- C++ does not have a power operator (Fortran does): 'Power' and various mathematical functions are realized through library calls.

Math library calls

Math function in `cmath`:

```
|| #include <cmath>
|| .....
|| x = pow(3,.5);
```

For squaring, usually better to write `x*x` than `pow(x, 2)`.

Exercise 4.11. Write a program that :

- displays the message Type a number,
- accepts an integer number from you (use `cin`),
- makes another variable that is three times that integer plus one,
- and then prints out the second variable.

4.5.2 Truth values

In addition to numerical types, there are truth values, `true` and `false`, with all the usual logical operators defined on them.

Boolean expressions

- Testing: == != < > <= >=
- Not, and, or: ! && ||
- Shortcut operators:

```
|| if ( x>=0 && sqrt(x)<5 ) { }
```

Logical expressions in C++ are evaluated using *shortcut operators*: you can write

```
|| x>=0 && sqrt(x)<2
```

If x is negative, the second part will never be evaluated because the ‘and’ conjunction can already be concluded to be false. Similarly, ‘or’ conjunctions will only be evaluated until the first true clause.

The ‘true’ and ‘false’ constants could strictly speaking be stored in a single bit. C++ does not do that, but there are bit operators that you can apply to, for instance, all the bits in an integer.

Bit operators

Bitwise: & | ^

4.5.3 Type conversions

Since a variable has one type, and will always be of that type, you may wonder what happens with

```
|| float x = 1.5;
|| int i;
|| i = x;
```

or

```
|| int i = 6;
|| float x;
|| x = i;
```

- Assigning a floating point value to an integer truncates the latter.
- Assigning an integer to a floating point variable fills it up with zeros after the decimal point.

Exercise 4.12.

- What happens when you assign a positive floating point value to an integer variable?
- What happens when you assign a negative floating point value to an integer variable?
- What happens when you assign a `float` to a `double`? Try various numbers for the original float. Can you explain the result? (Hint: think about the conversion between binary and decimal.)

The rules for type conversion in expressions are not entirely logical. Consider

```
|| float x; int i=5, j=2;
|| x = i/j;
```

This will give 2 and not 2.5, because i/j is an integer expression and is therefore completely evaluated as such, giving 2 after truncation. The fact that it is ultimately assigned to a floating point variable does not cause it to be evaluated as a computation on floats.

You can force the expression to be computed in floating point numbers by writing

```
|| x = (1.*i)/j;
```

or any other mechanism that forces a conversion, without changing the result. Another mechanism is the cast; this will be discussed in section 24.4.

Exercise 4.13. Write a program that asks for two integer numbers n_1, n_2 .

- Assign the integer ratio n_1/n_2 to an integer variable.

- Can you use this variable to compute the modulus

$$n_1 \mod n_2$$

(without using the % modulus operator!)

Print out the value you get.

- Also print out the result from using the modulus operator: %.
- Investigate the behaviour of your program for negative inputs. Do you get what you were expecting?

Exercise 4.14. Write two programs, one that reads a temperature in Centigrade and converts to Fahrenheit, and one that does the opposite conversion.

$$C = (F - 32) \cdot 5/9, \quad F = 9/5 C + 32$$

Check your program for the freezing and boiling point of water.

(Do you know the temperature where Celsius and Fahrenheit are the same?)

Can you use Unix pipes to make one accept the output of the other?

Review 4.3. True or false?

1. Within a certain range, all integers are available as values of an integer variable.
2. Within a certain range, all real numbers are available as values of a float variable.
3. $5(7+2)$ is equivalent to 45.
4. $1--1$ is equivalent to zero.
5. `int i = 5/3.;` The variable `i` is 2.
6. `float x = 2/3;` The variable `x` is approximately 0.6667.

4.6 Advanced topics

4.6.1 Library functions

Some functions, such as `abs` can be included through `cmath`:

```
#include <cmath>
using std::abs;
```

Others, such as `max`, are in the less common `algorithm`:

```
#include <algorithm>
using std::max;
```

4.6.2 Number values and undefined values

A computer allocates a fixed amount of space for integers and floating point numbers, typically 4 or 8 bytes. That means that not all numbers are representable.

- Using 4 bytes, that is 32 bits, we can represent 2^{32} integers. Typically this is the range $-2^{31} \dots 0 \dots 2^{31} - 1$.

- Floating point numbers are represented by a sign bit, an exponent, and a number of significant digits. For 4-byte numbers, the number of significant (decimal) digits is around 6; for 8-byte numbers it is around 15.

If you compute a number that ‘fall in between the gaps’ of the representable numbers, it gets truncated or rounded. The effects of this on your computation constitute its own field of numerical mathematics, called *roundoff error analysis*.

If a number goes outside the bounds of what is representable, it becomes either:

- *Inf*: infinity. This happens if you add or multiply enough large numbers together. There is of course also a value *-Inf*. Or:
- *NaN*: not a number. This happens if you subtract one *Inf* from another, or do things such as taking the root of a negative number.

Your program will not be interrupted if a *NaN* or *Inf* is generated: the computation will merrily (and at full speed) progress with these numbers. See section 23.7 for detection of such quantities.

Some people advocate filling uninitialized memory with such illegal values, to make it recognizable as such.

4.6.3 Constants

Floating point constants

- Default: `double`
- Float: `3.14f` or `3.14F`
- Long double: `1.22l` or `1.22L`.

Integer constants

Integers are normally written in decimal, and stored in 32 bits. If you need something else:

```
int d = 42;
int o = 052; // start with zero
int x = 0x2a;
int X = 0X2A;
int b = 0b101010;
long ell = 42L;
```

Binary numbers are new to C++14.

4.6.4 Numerical precision

Truncation and precision are tricky things.

Code:

```
|| double point3d = .3/.7;
|| float
||   point3f = .3f/.7f,
||   point3t = point3d;
|| cout << "double precision: "
||   << point3d << endl
||   << "single precision: "
||   << point3f << endl
||   << "difference with truncation:"
||   << point3t - point3f
||   << endl;
```

Output

```
[basic] point3:
double precision: 0.428571
single precision: 0.428571
difference with truncation:-2.98023e-08
```

For the source of this example, see section [4.8.2](#)

4.7 Review questions

Exercise 4.15. What is the output of:

```
|| int m=32, n=17;
|| cout << n%m << endl;
```

Exercise 4.16. Given

```
|| int n;
```

give an expression that uses elementary mathematical operators to compute n -cubed: n^3 . Do you get the correct result for all n ? Explain.

How many elementary operations does the computer perform to compute this result? Can you now compute n^6 , minimizing the number of operations the computer performs?

4.8 Sources used in this chapter

4.8.1 Listing of code/basic/return

```
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2019 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** return.cxx : nonzero return result from main
*****
*****
```

```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

//codesnippet returnnone
```

```
|| int main() {
||     return 1;
|| }
|| //codesnippet end
```

4.8.2 Listing of code/basic/point3

```
/*
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2019 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** point3.cxx : about truncation to float
*****
*/
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

int main() {

    //answersnippet truncvsf
    double point3d = .3/.7;
    float
        point3f = .3f/.7f,
        point3t = point3d;
    cout << "double precision: "
        << point3d << endl
        << "single precision: "
        << point3f << endl
        << "difference with truncation:"
        << point3t - point3f
        << endl;
    //answersnippet end

    return 0;
}
```


Chapter 5

Conditionals

A program consisting of just a list of assignment and expressions would not be terribly versatile. At least you want to be able to say ‘if $x > 0$, do one computation, otherwise compute something else’, or ‘until some test is true, iterate the following computations’. The mechanism for testing and choosing an action accordingly is called a *conditional*.

5.1 Conditionals

Here are some forms a conditional can take.

Single statement

```
|| if (x<0)
    x = -x;
```

Single statement and alternative:

```
|| if (x>=0)
    x = 1;
else
    x = -1;
```

Multiple statements:

```
|| if (x<0) {
    x = 2*x; y = y/2;
} else {
    x = 3*x; y = y/3;
}
```

Chaining conditionals (where the dots stand for omitted code):

```
|| if (x>0) {
    ....
} else if (x<0) {
    ....
} else {
    ....
}
```

Nested conditionals:

```

||| if (x>0) {
|||   if (y>0) {
|||     ....
|||   } else {
|||     ....
|||   }
||| } else {
|||   ....
||| }
```

- In that last example the outer curly brackets in the true branch are optional. But it's safer to use them anyway.
- When you start nesting constructs, use indentation to make it clear which line is at which level. A good editor helps you with that.

Exercise 5.1. For what values of x will the left code print 'b'?

For what values of x will the right code print 'b'?

```

||| float x = /* something */
||| if ( x > 1 ) {
|||   cout << "a" << endl;
|||   if ( x > 2 )
|||     cout << "b" << endl;
||| }
```

```

||| float x = /* something */
||| if ( x > 1 ) {
|||   cout << "a" << endl;
||| } else if ( x > 2 ) {
|||   cout << "b" << endl;
||| }
```

5.2 Operators

You have already seen arithmetic expressions; now we need to look at logical expressions: just what can be tested in a conditional. Here is a fragment of language grammar that spells out what is legal. You see that most of the rules are recursive, but there is an important exception.

What are logical expressions?

```

logical_expression ::=
  comparison_expression
  | NOT comparison_expression
  | logical_expression CONJUNCTION comparison_expression
comparison_expression ::=
  numerical_expression COMPARE numerical_expression
numerical_expression ::=
  quantity
  | numerical_expression OPERATOR quantity
quantity ::= number | variable
```

Comparison and logical operators

Here are the most common *logic operators* and *comparison operators*.

Operator	meaning	example
<code>==</code>	equals	<code>x==y-1</code>
<code>!=</code>	not equals	<code>x*x!=5</code>
<code>></code>	greater	<code>y>x-1</code>
<code>>=</code>	greater or equal	<code>sqrt(y)>=7</code>
<code><,<=</code>	less, less equal	
<code>&&, </code>	and, or	<code>x<1 && x>0</code>
and,or		<code>x<1 and x>0</code>
<code>!</code>	not	<code>!(x>1 && x<2)</code>
not		<code>not(x>1 and x<2)</code>

Precedence rules of operators are common sense. When in doubt, use parentheses.

Remark 1 There are also bitwise operators.

Exercise 5.2. Read in an integer. If it is even, print ‘even’, otherwise print ‘odd’:

```
|| if ( /* your test here */ )
    cout << "even" << endl;
else
    cout << "odd" << endl;
```

Then, rewrite your test so that the true branch corresponds to the odd case?

Exercise 5.3. Read in an integer. If it’s a multiple of three print ‘Fizz!'; if it’s a multiple of five print ‘Buzz'!. If it is a multiple of both three and five print ‘Fizzbuzz!'. Otherwise print nothing. (Note: your program should display at most one output.)

Review 5.1. True or false?

- The tests `if (i>0)` and `if (0<i)` are equivalent.
- The test

```
|| if (i<0 && i>1)
    cout << "foo"
```

prints `foo` if $i < 0$ and also if $i > 1$.

- The test

```
|| if (0<i<1)
    cout << "foo"
```

prints `foo` if i is between zero and one.

Any comments on the following?

```
|| bool x;
// ... code with x ...
if (x == true)
    // do something
```

5.2.1 Short-circuit operators

C++ logic operators have a feature called short-circuiting: a *short-circuit operator* stops evaluating when the result is clear. For instance, in

```
|| clause1 and clause2
```

5. Conditionals

the second clause is not evaluated if the first one is `false`, because the truth value of this conjunction is already determined.

Likewise, in

```
|| clause1 or clause2
```

the second clause is not evaluated if the first one is `true`.

This mechanism allows you to write

```
|| if ( x>=0 and sqrt(x)<10 ) { /* ... */ }
```

Without short-circuiting the square root operator could be applied to negative numbers.

5.3 Switch statement

If you have a number of cases corresponding to specific integer values, there is the `switch` statement.

Switch statement example

Cases are executed consecutively until you ‘break’ out of the switch statement:

Code:

```
switch (n) {
    case 1 :
    case 2 :
        cout << "very small" << endl;
        break;
    case 3 :
        cout << "trinity" << endl;
        break;
    default :
        cout << "large" << endl;
}
```

Output
[basic] switch:
for v in 1 2 3 4 5 ; do \
 echo \$v | ./switch ; \
done
very small
very small
trinity
large
large

For the source of this example, see section 5.6.1

Exercise 5.4. Suppose the variable `n` is a nonnegative integer. Write a `switch` statement that has the same effect as:

```
if (n<5)
    cout << "Small" << endl;
else
    cout << "Not small" << endl;
```

5.4 Scopes

The true and false branch of a conditional can consist of a single statement, or of a block in curly brackets. Such a block creates a scope where you can define local variables.

```
if ( something ) {
    int i;
    .... do something with i
}
// the variable 'i' has gone away.
```

See chapter 8 for more detail.

5.5 Init statements

The C++17 standard introduced a new form of the `if` and `switch` statement: it is possible to have a single statement of declaration prior to the test.

Code:

```
if ( char c = getchar(); c != 'a' )
    cout << "Not an a, but: " << c << endl;
else
    cout << "That was an a!" << endl;
```

Output

[basic] ifinit:

```
for c in d b a z ; do \
    echo $c | ./ifinit ; \
done
Not an a, but: d
Not an a, but: b
That was an a!
Not an a, but: z
```

For the source of this example, see section [5.6.2](#)

This is particularly elegant if the init statement is a declaration, because the declared variable is then local to the conditional. Previously one would have had to write

```
char c;
c = getchar();
if ( c != 'a' ) /* ... */
```

with the variable globally defined.

5.6 Sources used in this chapter

5.6.1 Listing of code/basic/switch

```
*****
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2016/7 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** switch.cxx : illustrating switch statement
*****
*****
```

```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

int main() {
    int n;
    cin >> n;
    //codesnippet switchstatement
    switch (n) {
    case 1 :
    case 2 :
        cout << "very small" << endl;
        break;
    case 3 :
```

```
    cout << "trinity" << endl;
    break;
default :
    cout << "large" << endl;
}
//codesnippet end
return 0;
}
```

5.6.2 Listing of code/basic/ifinit

```
/*********************************************
*****
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2019 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** ifinit.cxx : conditionals with init part
*****
***** /*****************************************/
```

```
#include <iostream>
using std::cout;
using std::endl;
#include <cstdio>

int main() {

    //codesnippet ifinitchar
    if ( char c = getchar(); c !='a' )
        cout << "Not an a, but: " << c << endl;
    else
        cout << "That was an a!" << endl;
    //codesnippet end

    return 0;
}
```

Chapter 6

Looping

There are many cases where you want to repeat an operation or series of operations:

- A time-dependent numerical simulation executes a fixed number of steps, or until some stopping test.
- Recurrences:

$$x_{i+1} = f(x_i).$$

- Inspect or change every element of a database table.

The C++ construct for such repetitions is known as a *loop*: a number of statements that get repeated. The two types of loop statement in C++ are:

- the *for loop* which is typically associated with a pre-determined number of repetitions, and with the repeated statements being based on a counter of some sort; and
- the *while loop*, where the statements are repeated indefinitely until some condition is satisfied.

However, the difference between the two is not clear-cut: in many cases you can use either.

We will now first consider the `for` loop; the `while` loop comes in section 6.2.

6.1 The ‘for’ loop

In the most common case, a for loop has a *loop counter*, ranging from some lower to some upper bound. An example showing the syntax for this simple case is:

```
|| int sum_of_squares{0};  
|| for (int var=low; var<upper; var++) {  
||     sum_of_squares += var*var;  
|| }  
|| cout << "The sum of squares from "  
||       << low << " to " << upper  
||       << " is " << sum_of_squares << endl;
```

The `for` line is called the *loop header*, and the statements between curly brackets the *loop body*. Each execution of the loop body is called an *iteration*.

Remark 2 Declaring the loop variable in the loop header is also a modern addition to the C language. Use compiler flag `-std=c99`.

6. Looping

If you want to perform N iterations you can write

```
|| for (int iter=0; iter<N; iter++)
```

or

```
|| for (int iter=1; iter<=N; iter++)
```

The former is slightly more idiomatic to C++.

The loop header has three components, all of which are optional.

- An initialization. This is usually a declaration and initialization of an integer *loop variable*. Using floating point values is less advisable.
- A stopping test, usually involving the loop variable. If you leave this out, you need a different mechanism for stopping the loop; see section 6.2.
- An increment, often $i++$ or spelled out $i=i+1$. You can let the loop count down by using $i--$.

Exercise 6.1. Read an integer value with `cin`, and print ‘Hello world’ that many times.

Exercise 6.2. Extend exercise 6.1: the input 17 should now give lines

```
Hello world 1  
Hello world 2  
....  
Hello world 17
```

Can you do this both with the loop index starting at 0 and 1?

Also, let the numbers count down. What are the starting and final value of the loop variable and what is the update? There are several possibilities!

This is how a loop is executed.

- The initialization is performed.
- At the start of each iteration, including the very first, the stopping test is performed. If the test is true, the iteration is performed with the current value of the loop variable(s).
- At the end of each iteration, the increment is performed.

Popular increments

- $i++$ for a loop that counts forward;
- $i--$ for a loop that counts backward;
- $i+=2$ to cover only odd or even numbers, depending on where you started;
- $i*=10$ to cover powers of ten.

Review 6.1. For each of the following loop headers, how many times is the body executed?

(You can assume that the body does not change the loop variable.)

```
|| for (int i=0; i<7; i++)  
|| for (int i=0; i<=7; i++)  
|| for (int i=0; i<0; i++)
```

What is the last iteration executed?

```
|| for (int i=1; i<=2; i=i+2)  
|| for (int i=1; i<=5; i*=2)
```

```

|| for (int i=0; i<0; i--)
||   for (int i=5; i>=0; i--)
||     for (int i=5; i>0; i--)

```

Some variations on the simple case.

- It is preferable to declare the loop variable in the loop header:

```
|| for (int var=low; var<upper; var++) {
```

The variable only has meaning inside the loop so it should only be defined there.

However, it can also be defined outside the loop:

```

|| int var;
|| for (var=low; var<upper; var++) {
```

You will see an example where this makes sense below.

- The stopping test can be omitted

```
|| for (int var=low; ; var++) { ... }
```

if the loops ends in some other way. You’ll see this later.

- The stopping test doesn’t need to be an upper bound. Here is an example of a loop that counts down to a lower bound.

```
|| for (int var=high; var>=low; var--) { ... }
```

- The test is performed before each iteration:

Code:

```

|| cout << "before the loop" << endl;
|| for (int i=5; i<4; i++)
||   cout << "in iteration "
||     << i << endl;
|| cout << "after the loop" << endl;

```

Output

[basic] pretest:

before the loop
after the loop

For the source of this example, see section 6.5.1

(Historical note: at some point Fortran was post-test, so one iteration was always performed.)

- The loop body can be a single statement:

```

|| int s{0};
|| for (int i=0; i<N; i++)
||   s += i;

```

or a block:

```

|| int s{0};
|| for (int i=0; i<N; i++) {
||   int t = i*i;
||   s += t;
|| }
```

6.1.1 Loop syntax

The loop variable is typically an integer. You can use floating point numbers, this may complicate the stopping test:

6. Looping

```
|| for (float x=.1; x<=.5; x+=.1)
```

because of numerical rounding it is not clear when this loop will end.

Quite often, the loop body will contain another loop. For instance, you may want to iterate over all elements in a matrix. Both loops will have their own unique loop variable.

```
|| for (int row=0; row<m; row++)
    for (int col=0; col<n; col++)
        ...
    
```

This is called *loop nest*; the *row*-loop is called the *outer loop* and the *col*-loop the *inner loop*.

Traversing an index space (whether that corresponds to an array object or not) by *row*, *col* is called the *lexicographic ordering*. Below you'll see that there are also different ways.

Exercise 6.3. Write an i, j loop nest that prints out all pairs with

$$1 \leq i, j \leq 10, \quad j \leq i.$$

Output one line for each *i* value.

Now write an i, j loop that prints all pairs with

$$1 \leq i, j \leq 10, \quad |i - j| < 2,$$

again printing one line per *i* value. Food for thought: this exercise is definitely easiest with a conditional in the inner loop, but can you do it without?

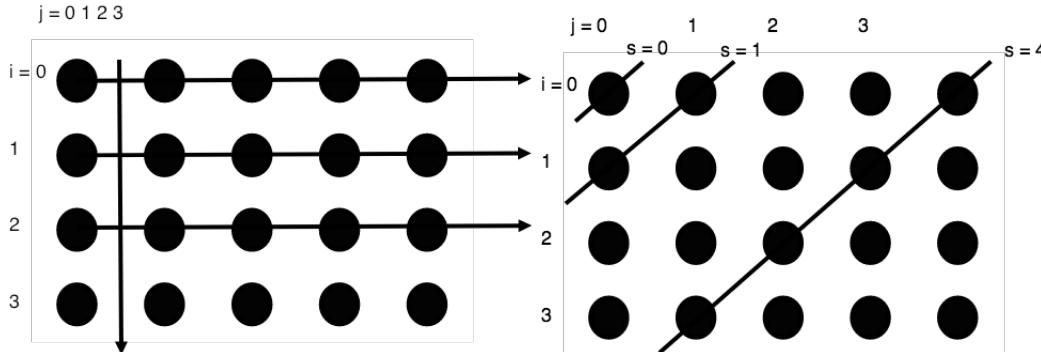


Figure 6.1: Lexicographic and diagonal ordering of an index set

Figure 6.1 illustrates that you can look at the i, j indices by row/column or by diagonal. Just like rows and columns being defined as $i = \text{constant}$ and $j = \text{constant}$ respectively, a diagonal is defined by $i + j = \text{constant}$.

6.2 Looping until

The basic for loop looks pretty deterministic: a loop variable ranges through a more-or-less prescribes set of values. This is appropriate for looping over the elements of an array, but not if you are coding some process that needs to run until some dynamically determined condition is satisfied. In this section you will see some ways of coding such cases.

First of all, the stopping test in the ‘for’ loop is optional, so you can write an indefinite loop as:

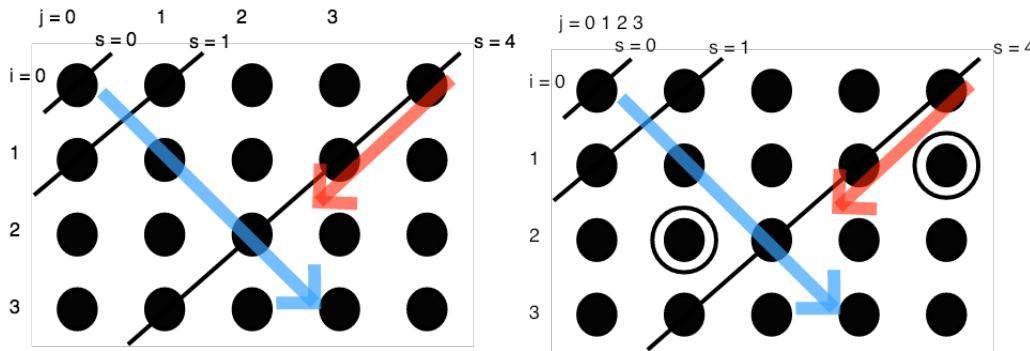


Figure 6.2: Illustration of the second part of exercise 6.4

```
|| for (int var=low; ; var=var+1) { ... }
```

How do you end such a loop? For that you use the `break` statement. If the execution encounters this statement, it will continue with the first statement after the loop.

```
|| for (int var=low; ; var=var+1) {
    // statements;
    if (some_test) break;
    // more statements;
}
```

Exercise 6.4. Write a double loop over $0 \leq i, j < 10$ that prints the first pair where the product of indices satisfies $i \cdot j > N$, where N is a number your read in. A good test case is $N = 40$.

Secondly, find pair with $i \cdot j > N$, but with the smallest value for $i + j$. Can you traverse the i, j indices such that they first enumerate all pairs $i + j = 1$, then $i + j = 2$, then $i + j = 3$ et cetera? Hint: write a loop over the sum value $1, 2, 3, \dots$, then find i, j .

Your program should print out both pairs, each on a separate line, with the numbers separated with a comma, for instance 8, 5.

Exercise 6.5. All three parts of a loop header are optional. What would be the meaning of

```
|| for (;;) { /* some code */ }
```

?

Where did the `break` happen?

Suppose you want to know what the loop variable was when the `break` happened. You need the loop variable to be global:

```
|| int var;
... code that sets var ...
for ( ; var<upper; var++) {
    ... statements ...
    if (some condition) break
    ... more statements ...
}
... code that uses the breaking value of var ...
```

6. Looping

In other cases: define the loop variable in the header!

Test in the loop header

If the test comes at the start or end of an iteration, you can move it to the loop header:

```
|| bool stopping_test{false};  
|| for (int var=low; !stopping_test ; var++) {  
||     ... some code ...  
||     if ( some condition )  
||         stopping_test = true;  
|| }
```

Another mechanism to alter the control flow in a loop is the **continue** statement. If this is encountered, execution skips to the start of the next iteration.

Skip iteration

```
|| for (int var=low; var<N; var++) {  
||     statement;  
||     if (some_test) {  
||         statement;  
||         statement;  
||     }  
|| }
```

Alternative:

```
|| for (int var=low; var<N; var++) {  
||     statement;  
||     if (!some_test) continue;  
||     statement;  
||     statement;  
|| }
```

The only difference is in layout.

While loop

The other possibility for ‘looping until’ is a **while** loop, which repeats until a condition is met.

Syntax:

```
|| while ( condition ) {  
||     statements;  
|| }
```

or

```
|| do {  
||     statements;  
|| } while ( condition );
```

The while loop does not have a counter or an update statement; if you need those, you have to create them yourself.

The two while loop variants can be described as ‘pre-test’ and ‘post-test’. The choice between them entirely depends on context. Here is an example in which the second syntax is more appropriate.

While syntax 1

```

cout << "Enter a positive number: " ;
cin >> invar;
while (invar>0) {
    cout << "Enter a positive number: " ;
    cin >> invar;
}
cout << "Sorry, " << invar << " is negative" << endl;

```

Problem: code duplication.

While syntax 2

```

do {
    cout << "Enter a positive number: " ;
    cin >> invar;
} while (invar>0);
cout << "Sorry, " << invar << " is negative" << endl;

```

The post-test syntax leads to more elegant code.

Exercise 6.6. Read in an integer r . If it is prime, print a message saying so. If it is not prime, find integers $p \leq q$ so that $r = p \cdot q$ and so that p and q are as close together as possible. For instance, for $r = 30$ you should print out $5, 6$, rather than $3, 10$. You are allowed to use the function `sqrt`.

Exercise 6.7. A horse is tied to a post with a 1 meter elastic band. A spider that was sitting on the post starts walking to the horse over the band, at 1cm/sec. This startles the horse, which runs away at 1m/sec. Assuming that the elastic band is infinitely stretchable, will the spider ever reach the horse?

Exercise 6.8. One bank account has 100 dollars and earns a 5 percent per year interest rate. Another account has 200 dollars but earns only 2 percent per year. In both cases the interest is deposited into the account.

After how many years will the amount of money in the first account be more than in the second? Solve this with a `while` loop.

Food for thought: compare solutions with a pre-test and post-test, and also using a for-loop.

6.3 Advanced topics

6.3.1 Parallelism

At the start of this chapter we mentioned the following examples of loops:

- A time-dependent numerical simulation executes a fixed number of steps, or until some stopping test.
- Recurrences:

$$x_{i+1} = f(x_i).$$

- Inspect or change every element of a database table.

The first two cases actually need to be performed in sequence, while the last one corresponds more to a mathematical ‘forall’ quantor. You will later learn two different syntaxes for this in the context of arrays. This difference can also be exploited when you learn *parallel programming*. Fortran has a *do concurrent* loop construct for this.

6.4 Exercises

Exercise 6.9. Find all triples of integers u, v, w under 100 such that $u^2 + v^2 = w^2$. Make sure you omit duplicates of solutions you have already found.

Exercise 6.10. The integer sequence

$$u_{n+1} = \begin{cases} u_n/2 & \text{if } u_n \text{ is even} \\ 3u_n + 1 & \text{if } u_n \text{ is odd} \end{cases}$$

leads to the *Collatz conjecture*: no matter the starting guess u_1 , the sequence $n \mapsto u_n$ will always terminate at 1.

$5 \rightarrow 16 \rightarrow 8 \rightarrow 4 \rightarrow 2 \rightarrow 1$

$7 \rightarrow 22 \rightarrow 11 \rightarrow 34 \rightarrow 17 \rightarrow 52 \rightarrow 26 \rightarrow 13 \rightarrow 40 \rightarrow 20 \rightarrow 10 \rightarrow 5 \dots$

(What happens if you keep iterating after reaching 1?)

Try all starting values $u_1 = 1, \dots, 1000$ to find the values that lead to the longest sequence: every time you find a sequence that is longer than the previous maximum, print out the starting number.

Exercise 6.11. Large integers are often printed with a comma (US usage) or a period (European usage) between all triples of digits. Write a program that accepts an integer such as 2542981 from the input, and prints it as 2,542,981.

Exercise 6.12. Root finding. For many functions f , finding their zeros, that is, the values x for which $f(x) = 0$, can not be done analytically. You then have to resort to numerical *root finding* schemes. In this exercise you will implement a simple scheme.

Suppose x_-, x_+ are such that

$$x_- < x_+, \quad f(x_-) \cdot f(x_+) < 0,$$

that is, the function values are of opposite sign. Then there is a zero in the interval (x_-, x_+) . Try to find this zero by looking at the halfway point, and based on the function value there, considering the left or right interval.

- How do you find x_-, x_+ ? This is tricky in general; if you can not find them in the interval $[-10^6, +10^6]$, halt the program.
- Finding the zero exactly may also be tricky or maybe impossible. Stop your program if $|x_- - x_+| < 10^{-10}$.

The website <http://www.codeforwin.in/2015/06/for-do-while-loop-programming-exercises.html>

6.5 Sources used in this chapter

6.5.1 Listing of code/basic/pretest

```
/*
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2018 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** pretest.cxx : illustrating if test
*****
*****
```

```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

int main() {

    //codesnippet pretest
    cout << "before the loop" << endl;
    for (int i=5; i<4; i++)
        cout << "in iteration "
        << i << endl;
    cout << "after the loop" << endl;
    //codesnippet end
    return 0;
}
```

6. Looping


Chapter 7

Functions

A *function* (or *subprogram*) is a way to abbreviate a block of code and replace it by a single line. This is foremost a code structuring device: by giving a function a relevant name you introduce the terminology of your application into your program.

- Find a block of code that has a clearly identifiable function.
- Turn this into a function: the function definition will contain that block, plus a header and (maybe) a return statement.
- The function definition is placed before the main program.
- The function is called by its name.

*Introducing a function
program*

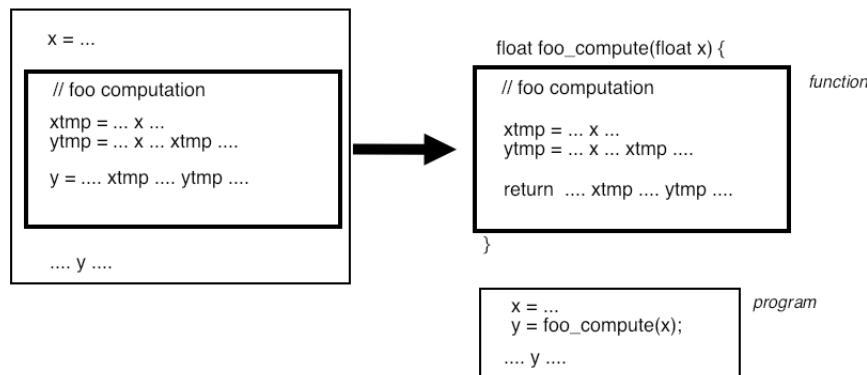

Using a function can also shorten your code, since it replaces two similar code blocks with one function definition and two calls.

Even if the number of lines doesn't go down, there are still reasons for using functions.

- By removing *code duplication* you have removed a likely source of future errors: if you later edit one occurrence of the code block, you're likely to forget the other.
- By introducing a function name you have introduced *abstraction*: your program now uses terms related to your problem, and not only `for` and `int` and such.

7.1 Function definition and call

There are two sides to a function:

7. Functions

- The *function definition* is done once, typically above the main program;
- a *function call* to any function can happen multiple times, inside the main or inside other functions.

Program without functions

Example: zero-finding through bisection; everything in the main program.

```
int main() {
    float left{0.},right{1.};
    while (right-left>.1) {
        float mid = (left+right)/2.,
            fmid = mid*mid*mid - mid*mid-1;
        if (fmid<0)
            left = mid;
        else
            right = mid;
    }
    cout << "Zero happens at: " << mid << endl;
}
```

Introducing functions, step 1

Introduce function for the objective function:

```
float f(float m) {
    return m*m*m - m*m-1;
};
```

```
int main() {
    float left{0.},right{1.};
    while (right-left>.1) {
        float mid
            = (left+right)/2.,
            fmid = f(mid);
        if (fmid<0)
            left = mid;
        else
            right = mid;
    }
    cout << "Zero happens at: "
        << mid << endl;
}
```

Introducing functions, step 2

Add function for zero finding:

```
float f(float m) {
    return m*m*m - m*m-1;
};
float find_zero_between
    (float l,float r) {
    while (r-l>.1) {
        float mid = (l+r)/2.,
            fmid = f(mid);
        if (fmid<0)
            l = mid;
        else
            r = mid;
    }
};
```

```
int main() {
    float left{0.},right{1.};
    float mid
        = find_zero_between(left,right);
    cout << "Zero happens at: "
        << mid << endl;
}
```

Code becomes more readable (though not necessarily shorter): introduce application terminology.

In this example, the function definition consists of:

- The keyword `float` indicates that the function returns a `float` result to the calling code.
- The name `find_zero_between` is picked by you.
- The parenthetical `(int n)` is called the ‘parameter list’: it says that the function takes an `int` as input. For purposes of the function, the `int` will have the name `n`, but this is not necessarily the same as the name in the main program.
- The ‘body’ of the function, the code that is going to be executed, is enclosed in curly brackets.

The *function call* consists of

- The name of the function, and
- In between parentheses, any input argument(s).

7.1.1 Why use functions?

In many cases, code that is written using functions can also be written without. So why would you use functions? There are several reasons for this.

Function can be motivated as making your code more structured and intelligible. The source where you use the function call becomes shorter, and the function name makes the code more descriptive. This is sometimes called ‘self-documenting code’.

Sometimes introducing a function can be motivated from a point of *code reuse*: if the same block of code appears in two places in your source (this is known as *code duplication*), you replace this by one function definition, and two (single line) function calls. The two occurrences of the function code do not have to be identical:

Code reuse

Suppose you do the same computation twice:

```
|| double x, y, v, w;
|| y = ..... computation from x .....
|| w = ..... same computation, but from v .....
```

With a function this can be replaced by:

```
|| double computation(double in) {
||   return .... computation from 'in' ....
|| }
|| y = computation(x);
|| w = computation(v);
```

Code reuse

Example: multiple norm calculations:

Repeated code:

```
|| float s = 0;
|| for (int i=0; i<x.size(); i++)
||   s += abs(x[i]);
|| cout << "One norm x: " << s << endl;
```

```
s = 0;
for (int i=0; i<y.size(); i++)
  s += abs(y[i]);
cout << "One norm y: " << s << endl;
```

7. Functions

becomes:

```
|| float OneNorm( vector<float> a ) {
||     float sum = 0;
||     for (int i=0; i<a.size(); i++)
||         sum += abs(a[i]);
||     return sum;
|| }
```

```
|| int main() {
||     ... // stuff
||     cout << "One norm x: "
||           << OneNorm(x) << endl;
||     cout << "One norm y: "
||           << OneNorm(y) << endl;
```

(Don't worry about array stuff in this example)

A final argument for using functions is code maintainability:

- Easier to debug: if you use the same (or roughly the same) block of code twice, and you find an error, you need to fix it twice.
- Maintenance: if a block occurs twice, and you change something in such a block once, you have to remember to change the other occurrence(s) too.
- Localization: any variables that only serve the calculation in the function now have a limited scope.

```
|| void print_mod(int n,int d) {
||     int m = n%d;
||     cout << "The modulus of " << n << " and " << d
||           << " is " << m << endl;
```

Review 7.1. True or false?

- The purpose of functions is to make your code shorter.
- Using functions makes your code easier to read and understand.
- Functions have to be defined before you can use them.

7.2 Anatomy of a function definition and call

Loosely, a function takes input and computes some result which is then returned. Formally, a function consists of:

- *function result type*: you need to indicate the type of the result;
- name: you get to make this up;
- zero or more *function parameters*. These describe how many *function arguments* you need to supply as input to the function. Parameters consist of a type and a name. This makes them look like variable declarations, and that is how they function. Parameters are separated by commas. Then follows the:
- *function body*: the statements that make up the function. The function body is a *scope*: it can have local variables. (You can not nest function definitions.)
- a *return* statement. Which doesn't have to be the last statement, by the way.

The function can then be used in the main program, or in another function:

Function call

The function call

1. copies the value of the *function argument* to the *function parameter*;
2. causes the function body to be executed, and
3. the function call is replaced by whatever you *return*.

4. (If the function does not return anything, for instance because it only prints output, you declare the return type to be `void`.)

7.2.1 Examples

Functions with return result

```
#include <cmath>
double pi() {
    return 4*atan(1.0);
}
```

The `atan` is a standard function

Functions with input and output

```
float squared(float x) {
    return x*x;
}
```

A function body defines a scope: the local variables of the function calculation are invisible to the calling program.

Functions can not be nested: you can not define a function inside the body of another function.

7.2.2 Another option for defining functions

The C++ compiler translates your code in *one pass*: it goes from top to bottom through your code. This means you can not make reference to anything, like a function name, that you haven't defined yet. This is why above we said that the function definition has to come before the main program.

This is not entirely true: the translation of a program that uses a function can proceed once the compiler know its name, and the types of the inputs and result. Just like you can declare a variable and set its value later, you can declare the existence of a function and give its definition later. The resulting code looks like:

```
int my_computation(int);
int main() {
    int result;
    result = my_computation(5);
    return 0;
}
int my_computation(int i) {
    return i+3;
}
```

The line above the main program is called a *function header* or *function prototype*. See chapter 18 for more details.

7.3 Void functions

Some functions do not return anything, for instance because only write output to screen or file. In that case you define the function to be of type `void`.

Functions without input, without return result

```

void print_header() {
    cout << "*****" << endl;
    cout << "* Output      *" << endl;
    cout << "*****" << endl;
}
int main() {
    print_header();
    cout << "The results for day 25:" << endl;
    // code that prints results ....
    return 0;
}

```

Void function with input

```

void print_result(int day, float value) {
    cout << "*****" << endl;
    cout << "* Output      *" << endl;
    cout << "*****" << endl;
    cout << "The results for day " << day << ":" << endl;
    cout << "      " << value << endl;
}
int main() {
    print_result(25, 3.456);
    return 0;
}

```

Review 7.2. True or false?

- A function can have only one input
- A function can have only one return result
- A void function can not have a **return** statement.

7.4 Parameter passing

C++ functions resemble mathematical functions: you have seen that a function can have an input and an output. In fact, they can have multiple inputs, separated by commas, but they have only one output¹.

$$a = f(x, y, i, j)$$

We start by studying functions that look like these mathematical functions. They involve a *parameter passing* mechanism called *passing by value*. Later we will then look at *passing by reference*.

7.4.1 Pass by value

The following style of programming is very much inspired by mathematical functions, and is known as *functional programming*².

- A function has one result, which is returned through a return statement. The function call then looks like

1. Unless you use more sophisticated mechanisms.
 2. There is more to functional programming. For instance, strictly speaking your whole program needs to be based on function calling; there is no other code than function definitions and calls.

```
|| Y = f(x1, x2, x3);
```

- The definition of the C++ parameter passing mechanism says that input arguments are copied to the function, meaning that they don't change in the calling program:

Code:

<pre>double squared(double x) { x = x*x; return x; } /* ... */ number = 5.1; cout << "Input starts as: " << number << endl; other = squared(number); cout << "Input var is now: " << number << endl; cout << "Output var is: " << other << endl;</pre>	Output [func] passvalue: Input starts as: 5.1 Input var is now: 5.1 Output var is: 26.01
---	--

For the source of this example, see section [7.9.1](#)

We say that the input argument is *passed by value*: its value is copied into the function. In this example, the function parameter `x` acts as a local variable in the function, and it is initialized with a copy of the value of `number` in the main program.

Later we will worry about the cost of this copying.

Passing a variable to a routine passes the value; in the routine, the variable is local. So, in this example the value of the argument is not changed:

Code:

<pre>void change_scalar(int i) { i += 1; } /* ... */ number = 3; cout << "Number is 3: " << number << endl; change_scalar(number); cout << "is it still 3? Let's see: " << number << endl;</pre>	Output [func] localparm: Number is 3: 3 is it still 3? Let's see: 3
--	--

For the source of this example, see section [7.9.2](#)

Exercise 7.1. If you are doing the prime project (chapter 41) you can now do exercise [41.5](#).

Background Square roots through Newton

Early computers had no hardware for computing a square root. Instead, they used *Newton's method*. Suppose you have a value y and you want to compute $x = \sqrt{y}$. This is equivalent to finding the zero of

$$f(x) = x^2 - y$$

where y is fixed. To indicate this dependence on y , we will write $f_y(x)$. Newton's method then finds the zero by evaluating

$$x_{\text{next}} = x - f_y(x)/f'_y(x)$$

until the guess is accurate enough, that is, until $f_y(x) \approx 0$.

Exercise 7.2.

- Write functions `f(x, y)` and `deriv(x, y)`, that compute $f_y(x)$ and $f'_y(x)$ for the definition of f_y above.
- Read a value y and iterate until $|f(x, y)| < 10^{-5}$. Print x .
- Second part: write a function `newton_root` that computes \sqrt{y} .

7.4.2 Pass by reference

Having only one output is a limitation on functions. Therefore there is a mechanism for altering the input parameters and returning (possibly multiple) results that way. You do this by not copying values into the function parameters, but by turning the function parameters into aliases of the variables at the place where the function is called.

We need the concept of a reference:

Reference

A reference is indicated with an ampersand in its definition, and it acts as an alias of the thing it references.

Code:

Code:	Output [basic] ref:
<pre>int i; int &ri = i; i = 5; cout << i << "," << ri << endl; i *= 2; cout << i << "," << ri << endl; ri -= 3; cout << i << "," << ri << endl;</pre>	<pre>5,5 10,10 7,7</pre>

For the source of this example, see section [7.9.3](#)

(You will not use references often this way.)

You can make a function parameter into a reference of a variable in the main program:

Parameter passing by reference

The function parameter `n` becomes a reference to the variable `i` in the main program:

<pre>void f(int &n) { n = /* some expression */ ; }; int main() { int i; f(i); // i now has the value that was set in the function }</pre>

Using the ampersand, the parameter is *passed by reference*: instead of copying the value, the function receives a *reference*: information where the variable is stored in memory.

Remark 3 The pass by reference mechanism in C was different and should not be used in C++. In fact it was not a true pass by reference, but passing an address by value.

We also the following terminology for function parameters:

- *input* parameters: passed by value, so that it only functions as input to the function, and no result is output through this parameter;
- *output* parameters: passed by reference so that they return an ‘output’ value to the program.
- *throughput* parameters: these are passed by reference, and they have an initial value when the function is called. In C++, unlike Fortran, there is no real separate syntax for these.

Pass by reference example 1

Code:

Code:	Output [basic] setbyref:
<pre> void f(int &i) { i = 5; } int main() { int var = 0; f(var); cout << var << endl; } </pre>	5

For the source of this example, see section [7.9.4](#)

Compare the difference with leaving out the reference.

As an example, consider a function that tries to read a value from a file. With anything file-related, you always have to worry about the case of the file not existing and such. So our function returns:

- a boolean value to indicate whether the read succeeded, and
- the actual value if the read succeeded.

The following is a common idiom, where the success value is returned through the `return` statement, and the value through a parameter.

Pass by reference example 2

Code:	
<pre> bool can_read_value(int &value) { // this uses functions defined elsewhere int file_status = try_open_file(); if (file_status==0) value = read_value_from_file(); return file_status==0; } int main() { int n; if (!can_read_value(n)) { // if you can't read the value, set a default n = 10; } do something with 'n' } </pre>	

Exercise 7.3. Write a `void` function `swapij` of two parameters that exchanges the input values:

Code:	
<pre> int i=2, j=3; swapij(i, j); // now i==3 and j==2 </pre>	

Exercise 7.4. Write a divisibility function that takes a number and a divisor, and gives:

- a `bool` return result indicating that the number is divisible, and
- a remainder as output parameter.

```
|| int number, divisor, remainder;
|| // read in the number and divisor
|| if ( is_divisible(number, divisor, remainder) )
||   cout << number << " is divisible by " << divisor << endl;
|| else
||   cout << number << "/" << divisor <<
||     " has remainder " << remainder << endl;
```

Exercise 7.5. If you are doing the geometry project, you should now do the exercises in section 42.1.

7.5 Recursive functions

In mathematics, sequences are often recursively defined. For instance, the sequence of factorials $n \mapsto f_n \equiv n!$ can be defined as

$$f_0 = 1, \quad \forall_{n>0}: f_n = n \times f_{n-1}.$$

Instead of using a subscript, we write an argument in parentheses

$$F(n) = n \times F(n - 1) \quad \text{if } n > 0, \text{ otherwise } 1$$

This is a form that can be translated into a C++ function. The header of a factorial function can look like:

```
|| int factorial(int n)
```

So what would the function body be? We need a `return` statement, and what we return should be $n \times F(n - 1)$:

```
|| int factorial(int n) {
||   return n*factorial(n-1);
|| } // almost correct, but not quite
```

So what happens if you write

```
|| int f3; f3 = factorial(3);
```

Well,

- The expression `factorial(3)` calls the `factorial` function, substituting 3 for the argument `n`.
- The return statement returns `n*factorial(n-1)`, in this case `3*factorial(2)`.
- But what is `factorial(2)`? Evaluating that expression means that the `factorial` function is called again, but now with `n` equal to 2.
- Evaluating `factorial(2)` returns `2*factorial(1),...`
- ... which returns `1*factorial(0),...`
- ... which returns ...
- Uh oh. We forgot to include the case where `n` is zero. Let's fix that:

```

||| int factorial(int n) {
|||     if (n==0)
|||         return 1;
|||     else
|||         return n*factorial(n-1);
|||
}

```

- Now `factorial(0)` is 1, so `factorial(1)` is `1*factorial(0)`, which is 1,...
- ... so `factorial(2)` is 2, and `factorial(3)` is 6.

Exercise 7.6. The sum of squares:

$$S_n = \sum_{n=1}^N n^2$$

can be defined recursively as

$$S_1 = 1, \quad S_n = n^2 + S_{n-1}.$$

Write a recursive function that implements this second definition. Test it on numbers that are input interactively.

Then write a program that prints the first 100 sums of squares.

Exercise 7.7. Write a recursive function for computing Fibonacci numbers:

$$F_0 = 1, \quad F_1 = 1, \quad F_n = F_{n-1} + F_{n-2}$$

First write a program that computes F_n for a value n that is input interactively.

Then write a program that prints out a sequence of Fibonacci numbers; set interactively how many.

Remark 4 A function does not need to call itself directly to be recursive; if it does so indirectly we can call this mutual recursion.

Remark 5 If you let your Fibonacci program print out each time it computes a value, you'll see that most values are computed several times. (Math question: how many times?) This is wasteful in running time. This problem is addressed in section 53.3.1.

7.6 Advanced function topics

7.6.1 Default arguments

Default arguments

Functions can have *default argument(s)*:

```

||| double distance( double x, double y=0. ) {
|||     return sqrt( (x-y)*(x-y) );
|||
|||     ...
|||     d = distance(x); // distance to origin
|||     d = distance(x,y); // distance between two points
}

```

Any default argument(s) should come last in the parameter list.

7.6.2 Polymorphic functions

Polymorphic functions

You can have multiple functions with the same name:

```
|| double sum(double a, double b) {
    ||| return (a+b)/2;
|| double sum(double a, double b, double c) {
    ||| return (a+b+c)/3;
```

Distinguished by type or number of input arguments: can not differ only in return type.

7.6.3 Stack overflow

So far you have seen only very simple recursive functions. Consider the function

$$\forall_{n>1}: g_n = (n-1) \cdot g(n-1), \quad g(1) = 1$$

and its implementation:

```
|| int multifact( int n ) {
    ||| if (n==1)
    |||| return 1;
    ||| else {
    |||| int oneless = n-1;
    |||| return oneless*multifact(oneless);
    |||}
```

Now the function has a local variable. Suppose we compute $g(3)$. That involves

```
|| int oneless = 2;
```

and then the computation of g_2 . But that computation involved

```
|| int oneless = 1;
```

Do we still get the right result for g_3 ? Is it going to compute $g_3 = 2 \cdot g_2$ or $g_3 = 1 \cdot g_2$?

Not to worry: each time you call *multifact* a new local variable *oneless* gets created ‘on the stack’. That is good, because it means your program will be correct³, but it also means that if your function has both

- a large amount of local data, and
- a large *recursion depth*,

it may lead to *stack overflow*.

7.7 Library functions

7.7.1 Random function

There is an easy (but not terribly great) *random number generator* that works the same as in C (for a better generator, see section 23.8):

3. Historical note: very old versions of Fortran did not do this, and so recursive functions were basically impossible.

```

||#include <random>
using std::rand;
float random_fraction =
    (float)rand() / (float)RAND_MAX;

```

The function `rand` yields an integer – a different one every time you call it – in the range from zero to `RAND_MAX`. Using scaling and casting you can then produce a fraction between zero and one with the above code.

If you run your program twice, you will twice get the same sequence of random numbers. That is great for debugging your program but not if you were hoping to do some statistical analysis. Therefore you can set the *random number seed* from which the random sequence starts by the `srand` function. Example:

```
||srand(time(NULL));
```

seeds the random number generator from the current time.

7.8 Review questions

Exercise 7.8. What is the output of the following programs (assuming the usual headers):

<pre> int add1(int i) { return i+1; } int main() { int i=5; i = add1(i); cout << i << endl; } </pre>	<pre> void add1(int i) { i = i+1; } int main() { int i=5; add1(i); cout << i << endl; } </pre>
<pre> void add1(int &i) { i = i+1; } int main() { int i=5; add1(i); cout << i << endl; } </pre>	<pre> int add1(int &i) { return i+1; } int main() { int i=5; i = add1(i); cout << i << endl; } </pre>

Exercise 7.9. Suppose a function

```
||bool f(int);
```

is given, which is true for some positive input value. Write a main program that finds the smallest positive input value for which `f` is true.

Exercise 7.10. Suppose a function

```
||bool f(int);
```

is given, which is true for some negative input value. Write a code fragment that finds the (negative) input with smallest absolute value for which `f` is true.

Exercise 7.11. Suppose a function

```
|| bool f(int);
```

is given, which computes some property of integers. Write a code fragment that tests if $f(i)$ is true for some $0 \leq i < 100$, and if so, prints a message.

Exercise 7.12. Suppose a function

```
|| bool f(int);
```

is given, which computes some property of integers. Write a main program that tests if $f(i)$ is true for all $0 \leq i < 100$, and if so, prints a message.

7.9 Sources used in this chapter

7.9.1 Listing of code/func/passvalue

```
/*
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2017/8 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** passvalue.cxx : illustration pass-by-value
*****
****/
```

```
#include <iostream>
#include <cmath>
using std::cout;
using std::endl;

//examplesnippet passvalue
double squared( double x ) {
    x = x*x;
    return x;
}
//examplesnippet end

int main() {

    double number,other;
    //examplesnippet passvalue
    number = 5.1;
    cout << "Input starts as: "
        << number << endl;
    other = squared(number);
    cout << "Input var is now: "
        << number << endl;
    cout << "Output var is: "
        << other << endl;
    //examplesnippet end

    return 0;
}
```

7.9.2 Listing of code/func/localparm

```

/*
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2016-9 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** localparm.cxx : simple parameter passing
*****
***** */

#include <iostream>
using std::cout;
using std::endl;

#include <vector>
using std::vector;

//examplesnippet localparm
void change_scalar(int i) {
    i += 1;
}
//examplesnippet end

int main() {

    int number;

    //examplesnippet localparm
    number = 3;
    cout << "Number is 3: "
        << number << endl;
    change_scalar(number);
    cout << "is it still 3? Let's see: "
        << number << endl;
    //examplesnippet end

    return 0;
}

```

7.9.3 Listing of code/basic/ref

```

/*
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2018 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** ref.cxx : using references, not as parameter
*****
***** */

#include <iostream>
using std::cin;
using std::cout;
using std::endl;

int main() {

```

```
//codesnippet refint
int i;
int &ri = i;
i = 5;
cout << i << "," << ri << endl;
i *= 2;
cout << i << "," << ri << endl;
ri -= 3;
cout << i << "," << ri << endl;
//codesnippet end

return 0;
}
```

7.9.4 Listing of code/basic/setbyref

```
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2018 Victor Eijkhout eijkhout@tacc.utexas.edu
****

**** setbyref.cxx : illustration of passing by ref
****

*****
```

```
#include <iostream>
using std::cout;
using std::endl;

//codesnippet setbyref
void f( int &i ) {
    i = 5;
}
int main() {

    int var = 0;
    f(var);
    cout << var << endl;
    //codesnippet end

    return 0;
}
```

Chapter 8

Scope

8.1 Scope rules

The concept of *scope* answers the question ‘when is the binding between a name (read: variable) and the internal entity valid’.

8.1.1 Lexical scope

C++, like Fortran and most other modern languages, uses *lexical scope* rule. This means that you can textually determine what a variable name refers to.

```
|| int main() {
  ||| int i;
  ||| if ( something ) {
  |||| int j;
  |||| // code with i and j
  ||}
  ||| int k;
  ||| // code with i and k
  ||}
```

- The lexical scope of the variables `i`, `k` is the main program including any blocks in it, such as the conditional, from the point of definition onward. You can think that the variable in memory is created when the program execution reaches that statement, and after that it can be referred to by that name.
- The lexical scope of `j` is limited to the true branch of the conditional. The integer quantity is only created if the true branch is executed, and you can refer to it during that execution. After execution leaves the conditional, the name ceases to exist, and so does the integer in memory.
- In general you can say that any *use* of a name has to be in the lexical scope of that variable, and after its *definition*.

8.1.2 Shadowing

Scope can be limited by an occurrence of a variable by the same name:

8. Scope

Code:

```
||| bool something(true);
||| int i = 3;
||| if ( something ) {
|||     int i = 5;
|||     cout << "Local: " << i << endl;
||}
||| cout << "Global: " << i << endl;
||| if ( something ) {
|||     float i = 1.2;
|||     cout << "Local again: " << i << endl;
||}
||| cout << "Global again: " << i << endl;
```

Output

```
[basic] shadowtrue:
Local: 5
Global: 3
Local again: 1.2
Global again: 3
```

For the source of this example, see section ??

The first variable `i` has lexical scope of the whole program, minus the two conditionals. While its *lifetime* is the whole program, it is unreachable in places because it is *shadowed* by the variables `i` in the conditionals.

This is independent of dynamic / runtime behaviour!

Exercise 8.1. What is the output of this code?

```
||| bool something(false);
||| int i = 3;
||| if ( something ) {
|||     int i = 5;
|||     cout << "Local: " << i << endl;
||}
||| cout << "Global: " << i << endl;
||| if ( something ) {
|||     float i = 1.2;
|||     cout << i << endl;
|||     cout << "Local again: " << i << endl;
||}
||| cout << "Global again: " << i << endl;
```

Exercise 8.2. What is the output of this code?

```
||| for (int i=0; i<2; i++) {
|||     int j; cout << j << endl;
|||     j = 2; cout << j << endl;
||}
```

8.1.3 Lifetime versus reachability

The use of functions introduces a complication in the lexical scope story: a variable can be present in memory, but may not be textually accessible:

```
||| void f() {
|||     ...
||}
||| int main() {
|||     int i;
|||     f();
```

```
    } cout << i;
```

During the execution of `f`, the variable `i` is present in memory, and it is unaltered after the execution of `f`, but it is not accessible.

A special case of this is recursion:

```
void f(int i) {
    int j = i;
    if (i<100)
        f(i+1);
}
```

Now each incarnation of `f` has a local variable `i`; during a recursive call the outer `i` is still alive, but it is inaccessible.

8.1.4 Scope subtleties

8.1.4.1 Mutual recursion

If you have two functions `f`, `g` that call each other,

```
int f(int i) { return g(i-1); }
int g(int i) { return f(i+1); }
```

you need a *forward declaration*

```
int g(int);
int f(int i) { return g(i-1); }
int g(int i) { return f(i+1); }
```

since the use of name `g` has to come after its declaration.

There is also forward declaration of *classes*.

```
class B;
class A {
private:
    shared_ptr<B> myB;
};
class B {
private:
    int myint;
}
```

8.1.4.2 Closures

The use of lambdas or *closures* (section 24.3) comes with another exception to general scope rules. Read about ‘capture’.

8.2 Static variables

Variables in a function have *lexical scope* limited to that function. Normally they also have *dynamic scope* limited to the function execution: after the function finishes they completely disappear. (Class objects have their *destructor* called.)

There is an exception: a *static variable* persists between function invocations.

```
|| void fun() {
    static int remember;
|| }
```

For example

```
|| int onemore() {
    static int remember++; return remember;
|| }
int main() {
    for ( ... )
        cout << onemore() << endl;
    return 0;
|| }
```

gives a stream of integers.

Exercise 8.3. The static variable in the `onemore` function is never initialized. Can you find a mechanism for doing so? Can you do it with a default argument to the function?

8.3 Scope and memory

The notion of scope is connected to the fact that variables correspond to objects in memory. Memory is only reserved for an entity during the dynamic scope of the entity. This story is clear in simple cases:

```
|| int main() {
    // memory reserved for 'i'
    if (true) {
        int i; // now reserving memory for integer i
        ... code ...
    }
    // memory for 'i' is released
|| }
```

Recursive functions offer a complication:

```
|| int f(int i) {
    int itmp;
    ... code with 'itmp' ...
    if (something)
        return f(i-1);
    else return 1;
|| }
```

Now each recursive call of `f` reserves space for its own incarnation of `itmp`.

In both of the above cases the variables are said to be on the *stack*: each next level of scope nesting or recursive function invocation creates new memory space, and that space is released before the enclosing level is released.

Objects behave like variables as described above: their memory is released when they go out of scope. However, in addition, a *destructor* is called on the object, and on all its contained objects:

Code:

```
|| class SomeObject {
|| public:
||     SomeObject() {
||         cout << "calling the constructor"
||         << endl;
||     };
||     ~SomeObject() {
||         cout << "calling the destructor"
||         << endl;
||     };
||};
```

Output

[object] **constructor**:

Before the nested scope
calling the constructor
Inside the nested scope
calling the destructor
After the nested scope

For the source of this example, see section [10.6.12](#)

8.4 Review questions

Exercise 8.4. Is this a valid program?

```
|| void f() { i = 1; }
|| int main() {
||     int i=2;
||     f();
||     return 0;
|| }
```

If yes, what does it do; if no, why not?

Exercise 8.5. What is the output of:

```
#include <iostream>
using std::cout;
using std::endl;
int main() {
    int i=5;
    if (true) { i = 6; }
    cout << i << endl;
    return 0;
}
```

Exercise 8.6. What is the output of:

```
#include <iostream>
using std::cout;
using std::endl;
int main() {
    int i=5;
    if (true) { int i = 6; }
    cout << i << endl;
    return 0;
}
```

Exercise 8.7. What is the output of:

```
#include <iostream>
using std::cout;
using std::endl;
int main() {
    int i=2;
    i += /* 5;
    i += */ 6;
    cout << i << endl;
    return 0;
}
```

8.5 Sources used in this chapter

8.5.1 Listing of code/object/destructor

```
*****
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2016-9 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** destructor.cxx : illustration of objects going out of scope
*****
*****
```

```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

//examplesnippet destructor
class SomeObject {
public:
    SomeObject() {
        cout << "calling the constructor"
        << endl;
    };
    ~SomeObject() {
        cout << "calling the destructor"
        << endl;
    };
};
//examplesnippet end

int main() {

//examplesnippet destructoruse
    cout << "Before the nested scope"
    << endl;
{
    SomeObject obj;
    cout << "Inside the nested scope"
    << endl;
```

```
    }
    cout << "After the nested scope"
    << endl;
//examplesnippet end

    return 0;
}
```

8. Scope

Chapter 9

Structures

9.1 Why structures?

You have seen the basic datatypes in section 4.3.3. These are enough to program whatever you want, but it would be nice if the language had some datatypes that are more abstract, closer to the terms in which you think about your application. For instance, if you are programming something to do with geometry, you had rather talk about points than explicitly having to manipulate their coordinates.

Structures are a first way to define your own datatypes. A `struct` acts like a datatype for which you choose the name. A `struct` contains other datatypes; these can be elementary, or other structs.

```
// struct vector {  
//     double x; double y; int label;  
//};
```

The elements of a structure are also called *members*. You can give them an initial value:

```
// struct vector { double x=0.; double y=0.; } ;
```

The reason for using structures is to ‘raise the level of abstraction’: instead of talking about *x*, *y*-values, you can now talk about vectors and such. This makes your code look closer to the application you are modeling.

9.2 The basics of structures

A structure behaves like a data type: you declare variables of the structure type, and you use them in your program. The new aspect is that you first need to define the structure type. This definition can be done inside your main program or before it. The latter is preferable.

```
// definition of the struct  
struct AStructName { int num; double val; }  
int main() {  
    // declaration of struct variables  
    AStructName mystruct1,mystruct2;  
    .... code that uses your structures ....  
}
```

There are various ways of setting the members of the structure:

- You can set defaults that hold for any structure of that type;

9. Structures

- you can all members at once;
- or you can set any member individually.

Struct initialization

You assign a whole struct, or set defaults in the definition.

```
struct vector_a { double x; double y; } ;
struct vector_b { double x=0; double y=0; } ;

int main() {

    // initialization when you create the variable:
    struct vector_a x_a = {1.5,2.6};
    // initialization done in the structure definition:
    struct vector_b x_b;
    // ILLEGAL:
    // x_b = {3.7, 4.8};
    x_b.x = 3.7; x_b.y = 4.8;
```

Using structures

Once you have defined a structure, you can make variables of that type. Setting and initializing them takes a new syntax:

Code:

```
int main() {
    struct vector v1,v2;

    v1.x = 1.; v1.y = 2.; v1.label = 5;
    v2 = {3.,4.,5.};

    v2 = v1;
    cout << "v2: "
        << v2.x << "," << v2.y
        << endl;
```

Output

[struct] point:

```
./point
v2: 1,2
```

For the source of this example, see section [9.4.1](#)

Period syntax: compare to possessive ‘apostrophe-s’ in English.

Review 9.1. True or false?

- All members of a struct have to be of the same type.
- Writing

```
|| struct numbered { int n; double x; };
```

creates a structure with an integer and a double as members.

- With the above definition and `struct numbered xn;`,

```
|| cout << xn << endl;
```

Is this correct C++?

- With the same definitions, is this correct C++?

```
|| xn.x = xn.n+1;
```

Note: if you use initializations in the `struct` definition, you can not use the brace-assignment.

9.3 Structures and functions

You can use structures with functions, just as you could with elementary datatypes.

Functions on structures

You can pass a structure to a function:

Code:


```
double distance
( struct vector v1,
  struct vector v2 )
{
    double
        d1 = v1.x-v2.x, d2 = v1.y-v2.y;
    return sqrt( d1*d1 + d2*d2 );
}
/* ... */
struct vector v1 = { 1.,1. };
cout << "Displacement x,y?";
double dx,dy; cin >> dx >> dy; cout << endl;
cout << "dx=" << dx << ", dy=" << dy << endl;
struct vector v2 = { v1.x+dx,v1.y+dy };
cout << "Distance: " << distance(v1,v2) << endl;
```

Output

[struct] pointfun:

Displacement x,y?
dx=5, dy=12
Distance: 13

For the source of this example, see section 9.4.3



Exercise 9.1. Write a vector class, and a function that, given such a vector, returns the angle with the x -axis. (Hint: the `atan` function is in `cmath`)

Code:

```
struct vector a = {1.,1.};
double
alpha = angle(a),
pifrac = (4.*atan(1.0)) / alpha;
cout << "Angle of (" << a.x << "," << a.y << ") is:\n" << angle(a) << ", or pi/" << pifrac << endl;
```

Output

[struct] pointangle:

Angle of (1,1) is:
0.785398, or pi/4
Angle of (0.866025,0.5) is:
0.523599, or pi/6

The mechanisms of *parameter passing by value* and *parameter passing by reference* apply to structures just as to simple datatypes.

Exercise 9.2. Write a `void` function that has a `struct vector` parameter, and exchanges its coordinates:

$$\begin{pmatrix} 2.5 \\ 3.5 \end{pmatrix} \rightarrow \begin{pmatrix} 3.5 \\ 2.5 \end{pmatrix}$$

Code:

```
|| struct vector a = {3., 2.};
|| cout << "Flip of (" 
||     << a.x << "," << a.y << ")";
|| flip(a);
|| cout << " is (" 
||     << a.x << "," << a.y
||     << ")" << endl;
```

Output

[struct] pointflip:
Flip of (3,2) is (2,3)

Exercise 9.3. Write a function $y = f(x, a)$ that takes a `struct vector` and `double` parameter as input, and returns a vector that is the input multiplied by the scalar.

$$\begin{pmatrix} 2.5 \\ 3.5 \end{pmatrix}, 3 \rightarrow \begin{pmatrix} 7.5 \\ 10.5 \end{pmatrix}$$

Exercise 9.4. If you are doing the prime project (chapter 41) you can now do exercise 41.7.

Exercise 9.5. Write a function `inner_product` that takes two `vector` structures and computes the inner product.

Denotations

You can use initializer lists as struct *denotations*:

Code:

```
|| cout << "Distance: "
||     << distance( {1., 2.}, {6., 14.} )
||     << endl;
```

Output

[struct] pointdenote:
Distance: 13

For the source of this example, see section 9.4.3

Exercise 9.6. Take exercise 9.5 and rewrite it to use denotations.

Returning structures

You can return a structure from a function:

Code:

```
|| struct vector vector_add
||     ( struct vector v1,
||       struct vector v2 ) {
||     struct vector p_add =
||         {v1.x+v2.x, v1.y+v2.y};
||     return p_add;
|| };
|| /* ... */
|| v3 = vector_add(v1, v2);
|| cout << "Added: " <<
||     v3.x << "," << v3.y << endl;
```

Output

[struct] pointadd:
Added: 5, 6

For the source of this example, see section 9.4.4

(In case you're wondering about scopes and lifetimes here: the explanation is that the returned value is copied.)

Exercise 9.7. Write a 2×2 matrix class (that is, a structure storing 4 real numbers), and write a function `multiply` that multiplies a matrix times a vector.

Can you make a matrix structure that is based on the vector structure, for instance using vectors to store the matrix rows, and then using the inner product method to multiply matrices?

9.4 Sources used in this chapter

9.4.1 Listing of code/struct/point

```
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2016-9 Victor Eijkhout eijkhout@tacc.utexas.edu
**** point.cxx : struct for cartesian vector
**** ****
***** /
```

```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

//codesnippet structdef
struct vector {
    double x; double y; int label;
};
//codesnippet end

//codesnippet structuse
int main() {

    struct vector v1, v2;

    v1.x = 1.; v1.y = 2.; v1.label = 5;
    v2 = {3., 4., 5};

    v2 = v1;
    cout << "v2: "
        << v2.x << "," << v2.y
        << endl;
    //codesnippet end

    return 0;
}
```

9.4.2 Listing of code/struct/pointfun

```
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2016-8 Victor Eijkhout eijkhout@tacc.utexas.edu
**** ****
**** pointfun.cxx : function taking struct arguments
**** ****
***** /
```

```
#include <cmath>

#include <iostream>
using std::cin;
```

```
using std::cout;
using std::endl;

struct vector { double x; double y; } ;

//codesnippet structpass
double distance
( struct vector v1,
  struct vector v2 )
{
    double
    d1 = v1.x-v2.x, d2 = v1.y-v2.y;
    return sqrt( d1*d1 + d2*d2 );
}
//codesnippet end

int main() {

    cout << "Struct Pass" << endl;
    //codesnippet structpass
    struct vector v1 = { 1.,1. };
    cout << "Displacement x,y?";
    double dx,dy; cin >> dx >> dy; cout << endl;
    cout << "dx=" << dx << ", dy=" << dy << endl;
    struct vector v2 = { v1.x+dx,v1.y+dy };
    cout << "Distance: " << distance(v1,v2) << endl;
    //codesnippet end
    cout << ".. struct pass" << endl;

    cout << "Struct Denote" << endl;
    //codesnippet structdenote
    cout << "Distance: "
        << distance( {1.,2.}, {6.,14.} )
        << endl;
    //codesnippet end
    cout << ".. struct denote" << endl;

    return 0;
}
```

9.4.3 Listing of code/struct/pointfun

```
*****
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2016-8 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** pointfun.cxx : function taking struct arguments
*****
*****
```

```
#include <cmath>

#include <iostream>
using std::cin;
using std::cout;
```

```
using std::endl;

struct vector { double x; double y; } ;

//codesnippet structpass
double distance
( struct vector v1,
  struct vector v2 )
{
    double
    d1 = v1.x-v2.x, d2 = v1.y-v2.y;
    return sqrt( d1*d1 + d2*d2 );
}
//codesnippet end

int main() {

    cout << "Struct Pass" << endl;
    //codesnippet structpass
    struct vector v1 = { 1.,1. };
    cout << "Displacement x,y?";
    double dx,dy; cin >> dx >> dy; cout << endl;
    cout << "dx=" << dx << ", dy=" << dy << endl;
    struct vector v2 = { v1.x+dx,v1.y+dy };
    cout << "Distance: " << distance(v1,v2) << endl;
    //codesnippet end
    cout << ".. struct pass" << endl;

    cout << "Struct Denote" << endl;
    //codesnippet structdenote
    cout << "Distance: "
        << distance( {1.,2.}, {6.,14.} )
        << endl;
    //codesnippet end
    cout << ".. struct denote" << endl;

    return 0;
}
```

9.4.4 Listing of code/struct/pointadd

```
*****
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2016-8 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** pointadd.cxx : function returning struct
***** ****
***** /*****
```

```
#include <cmath>

#include <iostream>
using std::cin;
using std::cout;
using std::endl;
```

```
struct vector { double x; double y; } ;

//codesnippet structreturn
struct vector vector_add
( struct vector v1,
  struct vector v2 ) {
struct vector p_add =
{v1.x+v2.x,v1.y+v2.y};
return p_add;
};
//codesnippet end

int main() {

  struct vector v1,v2,v3;

  v1.x = 1.; v1.y = 1.;
  v2 = {4.,5.};

//codesnippet structreturn
  v3 = vector_add(v1,v2);
  cout << "Added: " <<
    v3.x << "," << v3.y << endl;
//codesnippet end

  return 0;
}
```

Chapter 10

Classes and objects

10.1 What is an object?

You learned about **structs** (chapter 9) as a way of abstracting from the elementary data types. The elements of a structure were called its members.

You also saw that it is possible to write functions that work on structures. We now combine these two elements to give a new level of abstraction:

Definition of object

An object is an entity that you can request to do certain things. These actions are the *methods* and to make these possible the object probably stores data, the *members*.

When designing an object, first ask yourself: ‘what functionality should this support’.

Objects belong to a class, so, as with structures:

- You need a class definition, typically places before the main program.
- (In larger programs you would put it in a *include file*.)
- You can then create multiple objects belonging to that class. Objects behave largely like any other datatype.

Let’s look at a simple example: as with structures we want a **vector** object, corresponding to a mathematical vector in \mathbb{R}^2 . Given a vector, you could want to know its length, or its angle with the x -axis.

Object functionality

Small illustration: vector objects.

Code:

```
Vector v(1.,2.); // make vector (1,2)
cout << "vector has length "
     << v.length() << endl;
v.scaleby(2.);
cout << "vector has length "
     << v.length() << endl
     << "and angle " << v.angle()
     << endl;
```

Output

[object] functionality:

```
vector has length 2.23607
vector has length 4.47214
and angle 1.10715
```

For the source of this example, see section 10.6.1

Note the ‘dot’ notation; in a **struct** we use it for the data members; in an object we (also) use it for methods.

Exercise 10.1. Thought exercise:

What data does the object need to store to do this?

Is there more than one possibility?

The object workflow

Similar to `struct`:

- You have to declare what an object looks like by giving a

```
|| class myobject { /* ... */ };
```

definition, typically before the `main`;

- You create specific objects with a declaration

```
|| myobject
  object1(/* ... */),
  object2( /* ... */ );
```

- You let the objects do things:

```
|| object1.do_this();
  object2.do_that( /* ... */ );
```

10.1.1 Constructor

Next we'll look at a syntax for creating class objects that is new. If you create an object, you actually call a function that has the same name as the class: the *constructor*.

Usually you write your own constructor, for instance to initialize data members. This fragment of the `class Vector` shows the constructor and the data members:

```
|| class Vector {
  private: // members
    double x,y;
  public: // methods
    Vector( double x,double y )
      : x(x),y(y) {};
```

Slightly less confusing:

```
|| class Vector {
  private: // members
    double my_x,my_y;
  public: // methods
    Vector( double in_x,double in_y )
      : my_x(in_x),my_y(in_y) {};
```

Constructor and initialization

- Keyword `private` indicates that data is internal
- keyword `public` indicates that the constructor function can be used in the program.
- The initialization `x(x)` is a *member initializer list*; it should be read as `membername(argumentname)`. Yes, having `x` twice is a little confusing.

10.1.2 Methods

Methods are things you can ask your class objects to do. For instance, in the `Vector` class, you could ask a vector what its length is, or you could ask it to scale its length by some number.

Class methods

Let's define methods `length` and `scaleby`. These are defined inside the class:

```

    double length() {
        return sqrt(x*x + y*y);
    }
    double angle() {
        return atan(y/x);
    }
};
```

- They look like ordinary functions,
- except that they can use the data members of the class, for instance `x`;
- Methods can only be used on an object:

```

Vector vec(5,12);
double s = vec.length();
```

10.1.3 Initialization

Member default values

Class members can have default values, just like ordinary variables:

```

class Point {
private:
    float x=3., y=.14;
private:
    // et cetera
}
```

Each object will have its members initialized to these values.

Member initializer lists

Other syntax for initialization:

```

class Vector {
private:
    double x,y;
public:
    Vector( double userx,double usery )
        : x(userx),y(usery) {
    }
```

Member initialization in the constructor

The members stored can be different from the constructor arguments.

Example: create a vector from `x, y` cartesian coordinates, but store `r, theta` polar coordinates:

```

class Vector {
private: // members
    double r,theta;
public: // methods
    Vector( double x,double y ) {
        r = sqrt(x*x+y*y);
        theta = atan(y/x);
    }
}
```

Advantage of initializer list

Allows for reuse of names:

Code:

```
|| class Vector {
| private:
|     double x,y;
| public:
|     Vector( double x,double y ) : x(x),y(y) {
|     }
|     /* ... */
|     Vector p1(1.,2.);
|     cout << "p1 = "
|           << p1.getx() << "," << p1.gety()
|           << endl;
```

Output

```
[geom] pointinitxy:  
p1 = 1,2
```

For the source of this example, see section [10.6.2](#)

Also saves on constructor invocation if the member is an object.

Initializer lists

Initializer lists can be used as denotations.

```
|| Point(float ux,float uy) {
| /* ... */
| Rectangle(Point bl,Point tr) {
| /* ... */
| Point origin{0.,0.};
| Rectangle lielow( origin, {5,2} );
```

10.1.4 Methods

You have just seen examples of class *methods*: a function that is only defined for objects of that class, and that has access to the private data of that object. Let's now look at more meaningful methods. For instance, for the `Vector` class you can define functions such as `length` and `angle`.

Code:

```
|| class Vector {
| private:
|     double x,y;
| public:
|     Vector( double x,double y )
|         : x(x),y(y) {};
|     double length() {
|         return sqrt(x*x + y*y); }
|     double angle() {
|         return 0.; /* something trig */; }
|     };

| int main() {
|     Vector p1(1.,2.);
|     cout << "p1 has length "
|           << p1.length() << endl;
```

Output

```
[geom] pointfunc:  
p1 has length 2.23607
```

For the source of this example, see section [10.6.3](#)

Exercise 10.2. Add methods `print` and `angle` to the `Vector` class.

How many parameters do they need?

By making these functions public, and the data members private, you define an Application Programmer Interface (API) for the class:

- You are defining operations for that class; they are the only way to access the data of the object.
- The methods can use the data of the object, or alter it. All data members, even when declared **private**, are global to the methods.
- Data members declared **private** are not accessible from outside the object.

10.1.4.1 Methods that return objects

So far you have seen methods that use the data members of an object to return some quantity. It is also possible to alter the members. For instance, you may want to scale a vector by some amount:

Code:

<pre>class Vector { /* ... */ void scaleby(double a) { vx *= a; vy *= a; } /* ... */ }; /* ... Vector p1(1.,2.); cout << "p1 has length " << p1.length() << endl; p1.scaleby(2.); cout << "p1 has length " << p1.length() << endl;</pre>	Output [geom] pointscaleby: p1 has length 2.23607 p1 has length 4.47214
---	--

For the source of this example, see section [10.6.4](#)

The methods you have seen so far only returned elementary datatypes. It is also possible to return an object, even from the same class. For instance, instead of scaling the members of a vector object, you could create a new object based on the scaled members:

Code:

<pre>class Vector { /* ... */ Vector scale(double a) { return Vector(vx*a, vy*a); } /* ... */ cout << "p1 has length " << p1.length() << endl; Vector p2 = p1.scale(2.); cout << "p2 has length " << p2.length() << endl;</pre>	Output [geom] pointscale: p1 has length 2.23607 p2 has length 4.47214
---	--

For the source of this example, see section [10.6.5](#)

Anonymous objects

(also known as ‘move semantics’) Instead of

<pre>Vector scale(double a) { return Vector(vx*a, vy*a); }</pre>
--

we could have written:

```

    Vector scale( double a ) {
        Vector result_vector( vx*a, vy*a );
        return result_vector;
    };

```

However, that involves an extra copy.

10.1.4.2 Changing state

Objects usually have data members that maintain the *state* of the object. By changing the values of the members you change the state of the object. Doing so is usually done through a method.

Changing the state of an object

Example: scaling a vector:

```

void scaleby( double a ) {
    x *= a; y *= a;
}

```

10.1.5 Default constructor

One of the more powerful ideas in C++ is that there can be more than one constructor. You will often be faced with this whether you want or not. The following code looks plausible:

```

Vector v1(1.,2.), v2;
cout << "v1 has length " << v1.length() << endl;
v2 = v1.scale(2.);
cout << "v2 has length " << v2.length() << endl;

```

but it will give an error message during compilation. The reason is that

```
Vector v2;
```

calls the default constructor. Now that you have defined your own constructor, the default constructor no longer exists. So you need to define it explicitly:

```

Vector() {};
Vector( double x, double y )
    : x(x), y(y) {};

```

10.1.6 Accessors

You may have noticed the keywords **public** and **private**. We made the data members private, and the methods public. Thinking back to structures, you could say that their data members were (by default) public. Why don't we do that here?

Objects are really supposed to be accessed through their functionality.

Another reason for making data members inaccessible is that we can change the internals of a class, without affecting the code that uses the class. Consider the scenario where you have a *Point* class, and you store the x, y coordinates. Then you change your mind and decide to store r, θ coordinates instead. If your program used the fact that it could directly access the x, y coordinates, you would be in for a lot of rewriting. On the other hand if you have a function *getx()*, your program does not need any rewriting, and you would only change how that function was written.

Decouple internals from externals

```

class PositiveNumber { /* ... */ }
class Point {
private:
    // data members
public:
    Point( float x, float y ) { /* ... */ };
    Point( PositiveNumber r, float theta ) { /* ... */ };
    float get_x() { /* ... */ };
    float get_y() { /* ... */ };
    float get_r() { /* ... */ };
    float get_theta() { /* ... */ };
};

```

The ‘get’ functionality is independent of what data members the *Point* class has.

Public versus private

- Interface: **public** functions that determine the functionality of the object; effect on data members is secondary.
- Implementation: data members, keep **private**: they only support the functionality.

This separation is a Good Thing:

- Protect yourself against inadvertent changes of object data.
- Possible to change implementation without rewriting calling code.

You should not write access functions lightly: you should first think about what elements of your class should conceptually be inspectable or changeable by the outside world. Consider for example a class where a certain relation holds between members. In that case only changes are allowed that maintain that relation.

Private access gone wrong

We make a class for points on the unit circle

You don’t want to be able to change just one of *x*, *y*!

```

class UnitCirclePoint {
private:
    float x,y;
public:
    UnitCirclePoint(float x) {
        setx(x); };
    void setx(float newx) {
        x = newx; y = sqrt(1-x*x);
    };
}

```

In general: enforce predicates on the members.

10.1.7 Examples

Classes for abstract objects

Objects can model fairly abstract things:

Code:

```

class stream {
private:
    int last_result{0};
public:
    int next() {
        return last_result++;
    }

int main() {
    stream ints;
    cout << "Next: "
        << ints.next() << endl;
    cout << "Next: "
        << ints.next() << endl;
    cout << "Next: "
        << ints.next() << endl;
}

```

Output

[object] stream:
Next: 0
Next: 1
Next: 2

For the source of this example, see section [10.6.6](#)

Exercise 10.3.

- Write a class *multiples_of_two* where every call of *next* yields the next multiple of two.
- Write a class *multiples* used as follows:

```
|| multiples multiples_of_three(3);
```

where the *next* call gives the next multiple of the argument of the constructor.

Exercise 10.4. If you are doing the prime project (chapter [41](#)), now is a good time to do exercise [41.8](#).

10.2 Inclusion relations between classes

The data members of an object can be of elementary datatypes, or they can be objects. For instance, if you write software to manage courses, each *Course* object will likely have a *Person* object, corresponding to the teacher.

```

class Person {
    string name;
    ...
}
class Course {
private:
    int year;
    Person the_instructor;
    vector<Person> students;
}

```

Designing objects with relations between them is a great mechanism for writing structured code, as it makes the objects in code behave like objects in the real world. The relation where one object contains another, is called a *has-a* relation between classes.

10.2.1 Literal and figurative has-a

Sometimes a class can behave as if it includes an object of another class, while not actually doing so. For instance, a line segment can be defined from two points

```
class Segment {
private:
    Point starting_point, ending_point;
}
...
int main() {
    Segment somesegment;
    Point somepoint = somesegment.get_the_end_point();
```

or from one point, and a distance and angle:

```
class Segment {
private:
    Point starting_point;
    float length,angle;
}
```

In both cases the code using the object is written as if the segment object contains two points. This illustrates how object-oriented programming can decouple the API of classes from their actual implementation.

Related to this decoupling, a class can also have two very different constructors.

Multiple constructors

```
class Segment {
private:
    // up to you how to implement!
public:
    Segment( Point start, float length, float angle )
    { ... }
    Segment( Point start, Point end ) { ... }
```

Depending on how you actually implement the class, the one constructor will simply store the defining data, and the other will do some conversion from the given data to the actually stored data.

This is another strength of object-oriented programming: you can change your mind about the implementation of a class without having to change the program that uses the class.

When you have a has-a relation between classes, the ‘default constructor’ problem (section 10.1.5) can pop up again:

Default Constructors in initialization

```
class Inner { /* ... */ };
class Outer {
private:
    Inner inside_thing;
```

Two possibilities for constructor:

```
|| Outer( Inner put_it )
|| : inside_thing(put_it) {};
```

The *Inner* object is copied during construction of *Outer* object.

```
|| Outer( Inner put_it ) {
||   inside_thing = put_it;
|| }
```

The *Outer* object is created, including construction of *Inner* object, then the argument is copied into place: \Rightarrow needs default constructor on *Inner*.

Exercise 10.5. If you are doing the geometry project, this is a good time to do the exercises in section 42.3.

10.3 Inheritance

In addition to the has-a relation, there is the *is-a relation*, also called *inheritance*. Here one class is a special case of another class. Typically the object of the *derived class* (the special case) then also inherits the data and methods of the *base class* (the general case).

Examples for base and derived cases

- Base case: employee. Has: salary, employee number.
Special case: manager. Has in addition: underlings.
- Base case: shape in drawing program. Has: extent, area, drawing routine.
Special case: square et cetera; has specific drawing routine.

```
class General {
protected: // note!
int g;
public:
void general_method() {};
};

class Special : public General {
public:
void special_method() { ... g ... };
};
```

How do you define a derived class?

- You need to indicate what the base class is:

```
|| class Special : public General { .... }
```

- The base class needs to declare its data members as **protected**: this is similar to private, except that they are visible to derived classes
- The methods of the derived class can then refer to data of the base class;
- Any method defined for the base class is available as a method for a derived class object.

The derived class has its own constructor, with the same name as the class name, but when it is invoked, it also calls the constructor of the base class. This can be the default constructor, but often you want to call the base constructor explicitly, with parameters that are describing how the special case relates to the base case. Example:

```

class General {
public:
    General( double x, double y ) {};
};

class Special : public General {
public:
    Special( double x ) : General(x, x+1) {};
};

```

Access levels

Methods and data can be

- private, because they are only used internally;
- public, because they should be usable from outside a class object, for instance in the main program;
- protected, because they should be usable in derived classes.

Exercise 10.6. If you are doing the geometry project, you can now do the exercises in section [42.4](#).

10.3.1 Methods of base and derived classes

Overriding methods

- A derived class can inherit a method from the base class.
- A derived class can define a method that the base class does not have.
- A derived class can *override* a base class method:

```

class Base {
public:
    virtual f() { ... };
};

class Deriv : public Base {
public:
    virtual f() override { ... };
};

```

Override and base method

Code:

<pre> class Base { protected: int i; public: Base(int i) : i(i) {}; virtual int value() { return i; }; }; class Deriv : public Base { public: Deriv(int i) : Base(i) {}; virtual int value() override { int ivalue = Base::value(); return ivalue*i; }; }; </pre>	Output [object] virtual: 25
--	--

For the source of this example, see section [10.6.7](#)

10.3.2 Virtual methods

Base vs derived methods

- Method defined in base class: can be used in any derived class.
- Method define in derived class: can only be used in that particular derived class.
- Method defined both in base and derived class, marked `override`: derived class method replaces (or extends) base class method.
- Virtual method: base class only declares that a routine has to exist, but does not give base implementation.
A class is called *abstract class* if it has virtual methods; pure virtual if all methods are virtual.
You can not make abstract objects.

Abstract classes

Special syntax for *abstract method*:

```
class Base {  
public:  
    virtual void f() = 0;  
};  
class Deriv {  
public:  
    virtual void f() { ... };  
};
```

Example: using virtual class

```
class VirtualVector {  
private:  
public:  
    virtual void setlinear(float) = 0;  
    virtual float operator[](int) = 0;  
};
```

Suppose `DenseVector` derives from `VirtualVector`:

```
DenseVector v(5);  
v.setlinear(7.2);  
cout << v[3] << endl;
```

Implementation

```
class DenseVector : VirtualVector {      missing snippet virtfuncfunc  
private:  
    vector<float> values;  
public:  
    DenseVector( int size ) {  
        values = vector<float>(size,0);  
    };  
    void setlinear( float v ) {  
        for (int i=0; i<values.size(); i++)  
            values[i] = i*v;  
    };  
    float operator[](int i) {  
        return values.at(i);  
    };  
};
```

10.3.3 Advanced topics in inheritance

Friend classes

A `friend` class can access private data and methods even if there is no inheritance relationship.

```
|| class A;
|| class B {
||     friend class A;
|| private:
||     int i;
|| };
|| class A {
|| public:
||     void f(B b) { b.i; };
||};
```

More

- Multiple inheritance: an X is-a A, but also is-a B.
This mechanism is somewhat dangerous.
- Virtual base class: you don't actually define a function in the base class, you only say 'any derived class has to define this function'.

10.4 Advanced topics

The remainder of this section is advanced material. Make sure you have studied section 14.3.

10.4.1 Returning by reference

Direct alteration of internals

Return a reference to a private member:

```
|| class Vector {
|| private:
||     double x, y;
|| public:
||     double &x_component() { return x; };
|| };
|| int main() {
||     Vector v;
||     v.x_component() = 3.1;
|| }
```

Only define this is really needed.

Reference to internals

Returning a reference saves you on copying.

Prevent unwanted changes by using a 'const reference'.

```
|| class Grid {
|| private:
||     vector<Point> thepoints;
|| public:
||     const vector<Point> &points() {
```

```

    return thepoints; }
};

int main() {
    Grid grid;
    cout << grid.points() [0];
    // grid.points () [0] = whatever ILLEGAL
}

```

10.4.2 Accessor functions

It is a good idea to make the data in an object private, to control outside access to it.

- Sometimes this private data is auxiliary, and there is no reason for outside access.
- Sometimes you do want outside access, but you want to precisely control by whom.

Accessor functions:

```

class thing {
private:
    float x;
public:
    float get_x() { return x; }
    void set_x(float v) { x = v; }
};

```

This has advantages:

- You can print out any time you get/set the value; great for debugging:

```

void set_x(float v) {
    cout << "setting: " << v << endl;
    x = v;
}

```

- You can catch specific values: if `x` is always supposed to be positive, print an error (throw an exception) if nonpositive.

Having two accessors can be a little clumsy. Is it possible to use the same accessor for getting and setting?

Setting members through accessor

Use a single accessor for getting and setting:

Code:

```

class SomeObject {
private:
    float x=0.;
public:
    SomeObject( float v ) : x(v) {};
    float &xvalue() { return x; };
};

int main() {
    SomeObject myobject(1.);
    cout << "Object member initially :"
        << myobject.xvalue() << endl;
    myobject.xvalue() = 3.;
    cout << "Object member updated   :"
        << myobject.xvalue() << endl;
}

```

Output

[object] accessref:

```

Object member initially :1
Object member updated   :3

```

For the source of this example, see section [10.6.8](#)

The function `xvalue` returns a reference to the internal variable `x`.

Of course you should only do this if you want the internal variable to be directly changable!

Exercise 10.7. This is a good time to do the exercises in section 42.2.

10.4.3 Accessibility

Access levels

Methods and data can be

- private, because they are only used internally;
- public, because they should be usable from outside a class object, for instance in the main program;
- protected, because they should be usable in derived classes.

10.4.4 Polymorphism

You can have multiple methods with the same name, as long as they can be distinguished by their argument types. This is known as *polymorphism*.

10.4.5 Operator overloading

Instead of writing

```
||myobject.plus(anotherobject)
```

you can actually redefine the `+` operator so that

```
||myobject + anotherobject
```

is legal. This is known as *operator overloading*.

The syntax for this is

Operator overloading

```
||<returntype> operator<op>(<argument>) { <definition> }
```

For instance:

Code:

```
Vector operator*(double factor) {
    return Vector(factor*vx, factor*vy);
}
/*
cout << "p1 has length "
    << p1.length() << endl;
Vector scale2r = p1*2.;
cout << "scaled right: "
    << scale2r.length() << endl;
// ILLEGAL Vector scale2l = 2.*p1;
```

Output

[geom] pointmult:

```
p1 has length 2.23607
scaled right: 4.47214
```

For the source of this example, see section ??

Can even redefine equals and parentheses.

Exercise 10.8. Write a `Fraction` class, and define the arithmetic operators on it.

10.4.6 Functors

A special case of operator overloading is *overloading the parentheses*. This makes an object look like a function; we call this a *functor*.

Simple example:

Code:

```
class IntPrintFunctor {
public:
    void operator()(int x) {
        cout << x << endl;
    }
};

/* ... */
IntPrintFunctor intprint;
intprint(5);
```

Output
[object] functor:

5

For the source of this example, see section [10.6.9](#)

Exercise 10.9. Extend that class as follows: instead of printing the argument directly, it should print it multiplied by a scalar. That scalar should be set in the constructor.
Make the following code work:

Code:

```
IntPrintTimes printx2(2);
printx2(1);
for (auto i : {5,6,7,8} )
    printx2(i);
```

Output
[object] functor2:

2
10
12
14
16

(The *for_each* is part of *algorithm*)

10.4.7 Copy constructor

Just like the default constructor which is defined if you don't define an explicit constructor, there is an implicitly defined *copy constructor*. This constructor is invoked whenever you do an obvious copy:

```
my_object x,y; // regular or default constructor
x = y;          // copy constructor
```

Usually the copy constructor that is implicitly defined does the right thing: it copies all data members. (If you want to define your own copy constructor, you need to know its prototype. We will not go into that.)

Example of the copy constructor in action:

```
class has_int {
private:
    int mine{1};
public:
    has_int(int v) {
        cout << "set: " << v << endl;
        mine = v; };
    has_int( has_int &h ) {
        auto v = h.mine;
```

```

    cout << "copy: " << v << endl;
    mine = v; };
void printme() { cout
    << "I have: " << mine << endl; };
};

```

Code:

```

has_int an_int(5);
has_int other_int(an_int);
an_int.printme();
other_int.printme();

```

Output

[object] copyscalar:
set: 5
copy: 5
I have: 5
I have: 5

*For the source of this example, see section 10.6.10**Copying is recursive*

Class with a vector:

```

class has_vector {
private:
    vector<int> myvector;
public:
    has_vector(int v) { myvector.push_back(v); };
    void set(int v) { myvector.at(0) = v; };
    void printme() { cout
        << "I have: " << myvector.at(0) << endl; };
};

```

*Copying is recursive, so the copy has its own vector:***Code:**

```

has_vector a_vector(5);
has_vector other_vector(a_vector);
a_vector.set(3);
a_vector.printme();
other_vector.printme();

```

Output

[object] copyvector:
I have: 3
I have: 5

For the source of this example, see section 10.6.11

10.4.8 Destructor

Just as there is a constructor routine to create an object, there is a *destructor* to destroy the object. As with the case of the default constructor, there is a default destructor, which you can replace with your own.

A destructor can be useful if your object contains dynamically created data: you want to use the destructor to dispose of that dynamic data to prevent a *memory leak*. Another example is closing files for which the *file handle* is stored in the object.

The destructor is typically called without you noticing it. For instance, any statically created object is destroyed when the control flow leaves its scope.

Example:

Code:

```
class SomeObject {
public:
    SomeObject() {
        cout << "calling the constructor"
        << endl;
    };
    ~SomeObject() {
        cout << "calling the destructor"
        << endl;
    };
};
```

Output

[object] destructor:

Before the nested scope
calling the constructor
Inside the nested scope
calling the destructor
After the nested scope

For the source of this example, see section [10.6.12](#)

Exercise 10.10. Write a class

```
class HasInt {
private:
    int mydata;
public:
    HasInt(int v) { /* initialize */ };
    ...
};
```

used as

Code:

```
{
    HasInt v(5);
    v.set(6);
    v.set(-2);
}
```

Output

[object] destructexercise:

**** object created with 5 ****
**** object set to 6 ****
**** object set to -2 ****
**** object destroyed after 2 updates ****

Destructors and exceptions

The destructor is called when you throw an exception:

Code:

```
class SomeObject {
public:
    SomeObject() {
        cout << "calling the constructor"
        << endl; };
    ~SomeObject() {
        cout << "calling the destructor"
        << endl; };
};

/* ... */
try {
    SomeObject obj;
    cout << "Inside the nested scope" << endl;
    throw(1);
} catch (...) {
    cout << "Exception caught" << endl;
}
```

Output

[object] exceptdestruct:

calling the constructor
Inside the nested scope
calling the destructor
Exception caught

For the source of this example, see section [10.6.13](#)

10.4.9 ‘this’ pointer

‘this’ pointer to the current object

Inside an object, a *pointer* to the object is available as `this`:

```
|| class MyClass {
| private:
|   int myint;
| public:
|   MyClass(int myint) {
|     this->myint = myint;
|   };
| };
```

‘this’ use

You don’t often need the `this` pointer. Example: you need to call a function inside a method that needs the object as argument)

```
|| class someclass;
| void somefunction(const someclass &c) {
|   /* ... */
| class someclass {
| // method:
| void somemethod() {
|   somefunction(*this);
| };
```

(Rare use of dereference star)

10.4.10 Static members

Static class members

A static member acts as if it’s shared between all objects.

(Note: C++17 syntax)

Code:

```
|| class myclass {
| private:
|   static inline int count=0;
| public:
|   myclass() { count++; };
|   int create_count() { return count; };
| };
| /* ... */
| myclass obj1,obj2;
| cout << "I have defined "
|   << obj1.create_count()
|   << " objects" << endl;
```

Output

[link] static17:

I have defined 2 objects

For the source of this example, see section 10.6.14

Static class members, C++11 syntax

```
|| class myclass {
| private:
|   static int count;
| public:
```

```
    myclass() { count++; };
    int create_count() { return count; };
};

/* ... */
// in main program
int myclass::count=0;
```

10.5 Review question

Exercise 10.11. Fill in the missing term

- The functionality of a class is determined by its...
- The state of an object is determined by its...

How many constructors do you need to specify in a class definition?

- Zero
- Zero or more
- One
- One or more

Exercise 10.12. Describe various ways to initialize the members of an object.

10.6 Sources used in this chapter

10.6.1 Listing of code/object/functionality

```
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2017-9 Victor Eijkhout eijkhout@tacc.utexas.edu
**** functionality.cxx : illustrating object functionality
****

#include <iostream>
using std::cin;
using std::cout;
using std::endl;

#include <cmath>
using std::sqrt;

//codesnippet functionalityconstruct
class Vector {
private: // members
    double x,y;
public: // methods
    Vector( double x,double y )
        : x(x),y(y) {};
    //codesnippet end
    //codesnippet stationaritymethod
```

```

void scaleby( double a ) {
    x *= a; y *= a; };
//codesnippet end
//codesnippet functionalitymethod
double length() {
    return sqrt(x*x + y*y); };
double angle() {
    return atan(y/x);
};
};

//codesnippet end

int main() {
    //codesnippet functionality
    Vector v(1.,2.); // make vector (1,2)
    cout << "vector has length "
        << v.length() << endl;
    v.scaleby(2.);
    cout << "vector has length "
        << v.length() << endl
        << "and angle " << v.angle()
        << endl;
    //codesnippet end

    //codesnippet functionalitymethoduse
    Vector vec(5,12);
    double s = vec.length();
    //codesnippet end

    return 0;
}

#if 0
//codesnippet functionalityconstructmyx
class Vector {
private: // members
    double my_x,my_y;
public: // methods
    Vector( double in_x,double in_y )
        : my_x(in_x),my_y(in_y) {};
    //codesnippet end
#endif

```

10.6.2 Listing of code/geom/pointinitxy

```

/*
*****
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2017/8 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** pointinit.cxx : about object initialization
*****
*/
#include <iostream>
using std::cin;

```

```
using std::cout;
using std::endl;

//codesnippet classpointinitxy
class Vector {
private:
    double x,y;
public:
    Vector( double x,double y ) : x(x),y(y) {
    }
//codesnippet end
    double getx() { return x; }
    double gety() { return y; }
};

int main() {
//codesnippet classpointinitxy
    Vector p1(1.,2.);
    cout << "p1 = "
        << p1.getx() << "," << p1.gety()
        << endl;
//codesnippet end

    return 0;
}
```

10.6.3 Listing of code/geom/pointfunc

```
/*
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2017-9 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** pointfun.cxx : class with method
*****
*****
```

```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

#include <cmath>
using std::sqrt;

//codesnippet pointfunc
class Vector {
private:
    double x,y;
public:
    Vector( double x,double y )
        : x(x),y(y) {};
    double length() {
        return sqrt(x*x + y*y); }
    double angle() {
        return 0.; /* something trig */; }
```

```

    } ;

int main() {
    Vector p1(1.,2.);
    cout << "p1 has length "
        << p1.length() << endl;
//codesnippet end

    return 0;
}

```

10.6.4 Listing of code/geom/pointscaleby

```

//***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2017-9 Victor Eijkhout eijkhout@tacc.utexas.edu
***** pointscaleby.cxx : method that operates on members
***** */

#include <iostream>
using std::cin;
using std::cout;
using std::endl;

#include <cmath>
using std::sqrt;

//codesnippet pointscaleby
class Vector {
//codesnippet end
private:
    double vx,vy;
public:
    Vector( double x,double y ) {
        vx = x; vy = y;
    };
//codesnippet pointscaleby
    void scaleby( double a ) {
        vx *= a; vy *= a; };
//codesnippet end
    double length() {
        return sqrt(vx*vx + vy*vy); };
//codesnippet pointscaleby
};

//codesnippet end

int main() {
//codesnippet pointscaleby
    Vector p1(1.,2.);
    cout << "p1 has length "
        << p1.length() << endl;
    p1.scaleby(2.);
    cout << "p1 has length "

```

```
    << p1.length() << endl;
//codesnippet end

    return 0;
}
```

10.6.5 Listing of code/geom/pointscale

```
/*********************************************
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2017-9 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** pointscale.cxx : Vector class with private data
*****
*****
```

```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

#include <cmath>
using std::sqrt;

//codesnippet pointscale
class Vector {
//codesnippet end
private:
    double vx, vy;
public:
    Vector( double x, double y ) {
        vx = x; vy = y;
    };
//codesnippet pointscale
    Vector scale( double a ) {
        return Vector( vx*a, vy*a );
    };
//codesnippet end
    double length() { return sqrt(vx*vx + vy*vy); }
//codesnippet pointmultop
    Vector operator*(double factor) {
        return Vector(factor*vx, factor*vy);
    };
//codesnippet end
};

//codesnippet end

int main() {
    Vector p1(1.,2.);
    cout << "Scale2" << endl;
//codesnippet pointscale
    cout << "p1 has length "
        << p1.length() << endl;
    Vector p2 = p1.scale(2.);
    cout << "p2 has length "
        << p2.length() << endl;
```

```

//codesnippet end
    cout << "scale2" << endl;

    cout << "Mult2" << endl;
//codesnippet pointmultop
    cout << "p1 has length "
        << p1.length() << endl;
    Vector scale2r = p1*2.;
    cout << "scaled right: "
        << scale2r.length() << endl;
    // ILLEGAL Vector scale2l = 2.*p1;
//codesnippet end
    cout << "mult2" << endl;

    return 0;
}

```

10.6.6 Listing of code/object/stream

```

//****************************************************************************
****  

**** This file belongs with the course  

**** Introduction to Scientific Programming in C++/Fortran2003  

**** copyright 2017/8 Victor Eijkhout eijkhout@tacc.utexas.edu  

****  

**** stream.cxx : simulate an integer stream  

****  

*****  

#include <iostream>
using std::cout;
using std::endl;  

//codesnippet integerstream
class stream {
private:
    int last_result{0};
public:
    int next() {
        return last_result++;
    };
  

int main() {
    stream ints;
    cout << "Next: "
        << ints.next() << endl;
    cout << "Next: "
        << ints.next() << endl;
    cout << "Next: "
        << ints.next() << endl;
    //codesnippet end
    return 0;
}

```

10.6.7 Listing of code/object/virtual

```

|| ****  


```

10. Classes and objects

```
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2019 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** virtual.cxx : virtual methods and overriding
*****
***** /*****
```

```
#include <iostream>
using std::cout;
using std::endl;
#include <sstream>
#include <cmath>

//codesnippet virtualoverride
class Base {
protected:
    int i;
public:
    Base(int i) : i(i) {};
    virtual int value() { return i; };
};

class Deriv : public Base {
public:
    Deriv(int i) : Base(i) {};
    virtual int value() override {
        int ivalue = Base::value();
        return ivalue*ivalue;
    };
};
//codesnippet end

int main() {

    Deriv five(5);
    cout << five.value() << endl;
    return 0;
}
```

10.6.8 Listing of code/object/accessref

```
***** /*****
```

```
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2016-8 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** accessref.cxx : method returning reference
*****
***** /*****
```

```
#include <iostream>
using std::cout;
using std::endl;
```

```
//codesnippet objaccessref
class SomeObject {
private:
    float x=0.;
public:
    SomeObject( float v ) : x(v) {};
    float &xvalue() { return x; };
};

int main() {
    SomeObject myobject(1.);
    cout << "Object member initially :"
        << myobject.xvalue() << endl;
    myobject.xvalue() = 3.;
    cout << "Object member updated    :"
        << myobject.xvalue() << endl;
    //codesnippet end

    return 0;
}
```

10.6.9 Listing of code/object/functor

```
/*
*****
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2019 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** functor.cxx : parentheses overloading
*****
*****/

#include <iostream>
using std::cout;
using std::endl;

#include <vector>
using std::vector;

#include <algorithm>
using std::for_each;

//codesnippet printfunctor
class IntPrintFunctor {
public:
    void operator()(int x) {
        cout << x << endl;
    }
};
//codesnippet end

//answersnippet printfunctortwo
class IntPrintTimes {
private:
    int factor{1};
public:
```

```
    IntPrintTimes(int f)
        : factor(f) {};
    void operator()(int x) {
        cout << factor*x << endl;
    }
};

//answersnippet end

int main() {

    cout << "One" << endl;
    //codesnippet printfunctor
    IntPrintFunctor intptrint;
    intptrint(5);
    //codesnippet end
    cout << "one" << endl;

    cout << "Two" << endl;
    //codesnippet functortworun
    IntPrintTimes printx2(2);
    printx2(1);
    for (auto i : {5,6,7,8} ) {
        printx2(i);
    }
    //codesnippet end
    cout << "two" << endl;

    // vector<int> ints{5,6,7,8};
    // for_each
    //     (ints.begin(),ints.end(),
    //      printx2);

    return 0;
}
```

10.6.10 Listing of code/object/copyscalar

```
*****
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2017/8 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** copyscalar.cxx : copy constructor with a simple class
***** */

#include <iostream>
using std::cin;
using std::cout;
using std::endl;

//codesnippet classwithcopy
class has_int {
private:
    int mine{1};
public:
    has_int(int v) {
```

```

cout << "set: " << v << endl;
mine = v; }
has_int( has_int &h ) {
    auto v = h.mine;
    cout << "copy: " << v << endl;
    mine = v; }
void printme() { cout
    << "I have: " << mine << endl; }
};

//codesnippet end

int main() {

    //codesnippet classwithcopyuse
    has_int an_int(5);
    has_int other_int(an_int);
    an_int.printme();
    other_int.printme();
    //codesnippet end

    return 0;
}
}

```

10.6.11 Listing of code/object/copyvector

```

/*
*****
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2018 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** copyvector.cxx : copy constructor with a class containing vector
*****
*/
#include <iostream>
using std::cin;
using std::cout;
using std::endl;
#include <vector>
using std::vector;

//codesnippet classwithcopyvector
class has_vector {
private:
    vector<int> myvector;
public:
    has_vector(int v) { myvector.push_back(v); }
    void set(int v) { myvector.at(0) = v; }
    void printme() { cout
        << "I have: " << myvector.at(0) << endl; }
};

//codesnippet end

int main() {

    //codesnippet classwithcopyvectoruse
}
}

```

```

    has_vector a_vector(5);
    has_vector other_vector(a_vector);
    a_vector.set(3);
    a_vector.printme();
    other_vector.printme();
    //codesnippet end

    return 0;
}

```

10.6.12 Listing of code/object/destructor

```

/*
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2016-9 Victor Eijkhout eijkhout@tacc.utexas.edu
****

**** destructor.cxx : illustration of objects going out of scope
****

***** */

#include <iostream>
using std::cin;
using std::cout;
using std::endl;

//examplesnippet destructor
class SomeObject {
public:
    SomeObject() {
        cout << "calling the constructor"
        << endl;
    };
    ~SomeObject() {
        cout << "calling the destructor"
        << endl;
    };
};

//examplesnippet end

int main() {

//examplesnippet destructoruse
    cout << "Before the nested scope"
    << endl;
{
    SomeObject obj;
    cout << "Inside the nested scope"
    << endl;
}
    cout << "After the nested scope"
    << endl;
//examplesnippet end

    return 0;
}

```

10.6.13 Listing of code/object/exceptdestruct

```

/*
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2016-8 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** exceptdestruct.cxx : an exception calls the destructor
*****
***** */

#include <iostream>
using std::cin;
using std::cout;
using std::endl;

//examplesnippet exceptdestruct
class SomeObject {
public:
    SomeObject() {
        cout << "calling the constructor"
        << endl; };
    ~SomeObject() {
        cout << "calling the destructor"
        << endl; };
};

//examplesnippet end

int main() {

//examplesnippet exceptdestruct
    try {
        SomeObject obj;
        cout << "Inside the nested scope" << endl;
        throw(1);
    } catch (...) {
        cout << "Exception caught" << endl;
    }
//examplesnippet end

    return 0;
}

```

10.6.14 Listing of code/link/static17

```

/*
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2019 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** static.cxx : static class variables, C++17 syntax
*****
***** */

#include <iostream>
using std::cin;

```

```
using std::cout;
using std::endl;

//codesnippet classstatic17
class myclass {
private:
    static inline int count=0;
public:
    myclass() { count++; }
    int create_count() { return count; }
};

//codesnippet end

int main() {

    //codesnippet classstatic17
    myclass obj1,obj2;
    cout << "I have defined "
        << obj1.create_count()
        << " objects" << endl;
    //codesnippet end

    return 0;
}
```

Chapter 11

Arrays

11.1 Introduction

An array is an indexed data structure, that for each index stores an integer, floating point number, character, object, et cetera. In scientific applications, arrays often correspond to vectors and matrices, potentially of quite large size. (If you know about the Finite Element Method (FEM), you know that vectors can have sizes in the millions or beyond.)

In this chapter you will see the C++ `vector` construct, which implements the notion of an array of things, whether they be numbers, strings, object.

While C++ can use the C mechanisms for arrays, for almost all purposes it is better to use `vector`. In particular, this is a safer way to do dynamic allocation. The old mechanisms are briefly discussed in section 11.8.2.

11.1.1 Vector creation

To use vectors, you first need the `vector` header from the Standard Template Library (STL). Then you declare a vector, specifying what type of element it contains. Next you may want to decide how many elements it contains; you can specify this when you declare the vector, or determine it later, dynamically.

Vector definition

Definition, mostly without initialization.

```
#include <vector>
using std::vector;

vector<type> name;
vector<type> name(size);
vector<type> name(size, init_value);
```

where

- `vector` is a keyword,
- `type` (in angle brackets) is any elementary type or class name,
- `name` is up to you, and
- `size` is the (initial size of the vector). This is an integer, or more precisely, a `size_t` parameter.
- Initialize all elements to `init_value`.

11.1.2 Element access

The simplest way to access vector elements is with the square bracket notation:

```
|| x[1] = 3.14;  
|| cout << x[2];
```

This gives very fast access, but there is no *checking* on whether the index is within the *array bounds*. Accessing an element outside the bounds may abort your code, typically with a *segmentation fault*, but your code may just as well proceed, using invalid data.

As you see in this example, if `a` is a vector, and `i` an integer, then `a.at(i)` is the `i`'th element.

- The expression `a.at(i)` can be used to get the value of a vector element, or it can occur in the left-hand side of an assignment to set the value.
- The *array index* (or *array subscript*) `i` starts numbering at zero.
- Therefore, if a vector has n elements, its last element has index $n-1$.
- If you try to get an element outside the bounds of the vector, the compiler will only detect this in simple cases. More likely, your program may give a runtime error, but that does not necessarily happen. You could just get some random value.

There is a safer way to access elements:

```
|| x.at(1) = 3.14;  
|| cout << x.at(2);
```

This is slightly slower, but it does perform bounds checking for every access.

11.1.3 Initialization

In some applications you will create an array, and gradually fill it, for instance in a loop. However, sometimes your elements are known in advance and you can write them out. Specifying these values while creating the array is called *array initialization*, and there is more than one way to do so.

First of all, you can easily set a vector to a constant:

Vector constant initialization

There is a syntax for initializing a vector with a constant:

```
|| vector<float> x(25, 3.15);
```

which gives a vector of size 25, with all elements initialized to 3.15.

If your vector is short enough, you can set all elements explicitly with an *initializer list*:

Vector initialization

You can initialize a vector as a whole:

Code:

```
{  
    vector<int> numbers{5, 6, 7, 8, 9, 10};  
    cout << numbers.at(3) << endl;  
}  
{  
    vector<int> numbers = {5, 6, 7, 8, 9, 10};  
    numbers.at(3) = 21;  
    cout << numbers.at(3) << endl;  
}
```

Output

[array] dynamicinit:
8
21

For the source of this example, see section [11.10.1](#)

11.2 Ranging over a vector

If you need to consider all the elements in a vector, you typically use a `for` loop. There are various ways of doing this.

First of all consider the cases where you consider the vector as a collection of elements, and the loop functions like a mathematical ‘for all’.

Range over elements

You can write a *range-based for* loop, which considers the elements as a collection.

```
for ( float e : array )  
    // statement about element with value e  
for ( auto e : array )  
    // same, with type deduced by compiler
```

Code:

```
vector<int> numbers = {1, 4, 2, 6, 5};  
int tmp_max = numbers[0];  
for (auto v : numbers)  
    if (v > tmp_max)  
        tmp_max = v;  
cout << "Max: " << tmp_max  
    << " (should be 6)" << endl;
```

Output

[array] dynamicmax:
Max: 6 (should be 6)

For the source of this example, see section [11.10.2](#)

Ranging over a vector

```
for ( auto e : my_vector )  
    cout << e;
```

(Technical note: `e` is a copy of the array element.)

(You can spell out the type of the vector element, but such type specifications can be complex. In that case, using `auto` is quite convenient.)

So-called *initializer lists* can also be used as a list denotation:

Range over vector denotation

Code:

```
|| for ( auto i : {2,3,5,7,9} )  
||   cout << i << ",";  
||   cout << endl;
```

Output

[array] rangedenote:
2,3,5,7,9,

For the source of this example, see section [11.10.3](#)

If you actually need the index of the element, you can use a traditional **for** loop with loop variable.

Indexing the elements

You can write an *indexed for* loop, which uses an index variable that ranges from the first to the last element.

```
|| for (int i= /* from first to last index */ )  
||   // statement about index i
```

Example: find the maximum element in the array, and where it occurs.

Code:

```
|| int tmp_idx = 0;  
|| int tmp_max = numbers.at(tmp_idx);  
|| for (int i=0; i<numbers.size(); i++) {  
||   int v = numbers.at(i);  
||   if (v>tmp_max) {  
||     tmp_max = v; tmp_idx = i;  
||   }  
|| }  
|| cout << "Max: " << tmp_max  
||       << " at index: " << tmp_idx << endl;
```

Output

[array] vecidxmax:
Max: 6.6 at index: 3

For the source of this example, see section [11.10.4](#)

Exercise 11.1. Indicate for each of the following vector operations whether you prefer to use an indexed loop or a range-based loop. Give a short motivation.

- Count how many elements of a vector are zero.
- Find the location of the last zero.

Exercise 11.2. Find the element with maximum absolute value in a vector. Use:

```
|| vector<int> numbers = {1,-4,2,-6,5};
```

Hint:

```
|| #include <cmath>  
|| ..  
|| absx = abs(x);
```

Exercise 11.3. Find the location of the first negative element in a vector.

Which mechanism do you use?

Exercise 11.4. Check whether a vector is sorted.

Range over elements by reference

Range-based loop indexing makes a copy of the vector element. If you want to alter the vector, use a reference:

```
|| for ( auto &e : my_vector)  
||   e = ....
```

Code:

```
vector<float> myvector
    = {1.1, 2.2, 3.3};
for ( auto &e : myvector )
    e *= 2;
cout << myvector.at(2) << endl;
```

Output**[array] vectorrangeref:**

6.6

For the source of this example, see section 11.10.5(Can also use `const auto& e` to prevent copying, but also prevent altering data.)

Exercise 11.5. If you do the prime numbers project, you can now do exercise 41.8.1.

*Indexing with pre/post increment*Indexing in `while` loop and such:

```
x = a.at(i++); /* is */ x = a.at(i); i++;
y = b.at(++i); /* is */ i++; y = b.at(i);
```

*Example of increment indexing***Code:**

```
vector<int> numbers{3,5,7,8,9,11};
int index{0};
while ( numbers[index++]%2==1 ) ;
cout << "The first even number"
     << " appears at index "
     << index << endl;
```

Output**[loop] plusplus:**

The first even number appears at index 4

*For the source of this example, see section 11.10.6*Exercise: modify this so that after the while loop `index` is the number of leading odd elements.

11.3 Vector are a class

You wouldn't tell it from the above examples, but vectors actually form a `vector` class. You can have a vector of ints, floats, doubles, et cetera; the angle bracket notation indicates what the specific type stored in the vector is. You could say that the vector class is parametrized with the type (see chapter 21 for the details). We could say that `vector<int>` is a new data type, pronounced ‘vector-of-int’, and you can make variables of that type.

Vector copy

Vectors can be copied just like other datatypes:

Code:

```
vector<float> v(5,0), vcopy;
v.at(2) = 3.5;
vcopy = v;
vcopy.at(2) *= 2;
cout << v.at(2) << ","
     << vcopy.at(2) << endl;
```

Output**[array] vectorcopy:**

3.5,7

For the source of this example, see section 11.10.7

11.3.1 Vector methods

There are several *methods* to the `vector` class. Some of the simpler ones are:

- `at`: index an element
- `size`: give the size of the vector
- `front`: first element
- `back`: last element

There are also methods relating to dynamic storage management, which we will get to next.

Exercise 11.6. Create a `vector` x of `float` elements, and set them to random values.

Now normalize the vector in L_2 norm and check the correctness of your calculation, that is,

1. Compute the L_2 norm of the vector:

$$\|v\| \equiv \sqrt{\sum_i v_i^2}$$

2. Divide each element by that norm;
3. The norm of the scaled vector should now be 1. Check this.

What type of loop are you using?

11.3.2 Vectors are dynamic

A vector can be grown or shrunk after its creation. For instance, you can use the `push_back` method to add elements at the end:

Dynamic vector extension

Extend with `push_back`:

Code:

```
|| vector<int> array(5, 2);
|| array.push_back(35);
|| cout << array.size() << endl;
|| cout << array[array.size()-1] << endl;
```

Output
[array] vectorend:

6

35

For the source of this example, see section [11.10.13](#)

also `pop_back`, `insert`, `erase`.

Flexibility comes with a price.

It is tempting to use `push_back` to create a vector dynamically.

Dynamic size extending

```
|| vector<int> iarray;
```

creates a vector of size zero. You can then

```
|| iarray.push_back(5);
|| iarray.push_back(32);
|| iarray.push_back(4);
```

However, this dynamic resizing involves memory management, and maybe operating system functions. This will probably be inefficient. Therefore you should use such dynamic mechanisms only when strictly necessary. If you know the size, create a vector with that size. If the size is not precisely known but you have a reasonable upper bound, you can reserve the vector at that size:

```

||| vector<int> iarray;
iarray.reserve(100);
while ( ... )
    iarray.push_back( ... );

```

11.4 Vectors and functions

11.4.1 Pass vector to function

Vector as function argument

You can pass a vector to a function:

```

||| void print0( vector<double> v ) {
    cout << v.at(0) << endl;
} ;

```

Vectors, like any argument, are passed by value, so the vector is actually copied into the function.

Vector pass by value example

Code:

```

||| void set0
    ( vector<float> v, float x )
{
    v.at(0) = x;
}
/* ... */
vector<float> v(1);
v.at(0) = 3.5;
set0(v, 4.6);
cout << v.at(0) << endl;

```

Output

[array] vectorpassnot:

3.5

For the source of this example, see section [11.10.9](#)

Exercise 11.7. Revisit exercise [11.6](#) and introduce a function for computing the L_2 norm.

Vector pass by reference

If you want to alter the vector, you have to pass by reference:

Code:

```

||| void set0
    ( vector<float> &v, float x )
{
    v.at(0) = x;
}
/* ... */
vector<float> v(1);
v.at(0) = 3.5;
set0(v, 4.6);
cout << v.at(0) << endl;

```

Output

[array] vectorpassref:

4.6

For the source of this example, see section [11.10.10](#)

Exercise 11.8. Write functions `random_vector` and `sort` to make the following main program work:

```
|| int length = 10;
|| vector<float> values = random_vector(length);
|| vector<float> sorted = sort(values);
```

This creates a vector of random values of a specified length, and then makes a sorted copy of it.

The alternative would in-place sorting. Find arguments for/against that approach.

(See section 7.7.1 for the random function.)

Passing a vector by reference means that the subprogram becomes able to alter it. To prevent that, pass it as a *const reference*; section 17.2.

11.4.2 Vector as function return

Vector as function return

You can have a vector as return type of a function.

Example: this function creates a vector, with the first element set to the size:

Code:

<pre>vector<int> make_vector(int n) { vector<int> x(n); x.at(0) = n; return x; } /* ... vector<int> x1 = make_vector(10); // "auto" also possible! cout << "x1 size: " << x1.size() << endl; cout << "zero element check: " << x1.at(0) << endl;</pre>	Output [array] vectorreturn: x1 size: 10 zero element check: 10
--	---

For the source of this example, see section 11.10.11

Exercise 11.9. Write a function of one `int` argument n , which returns vector of length n , and which contains the first n squares.

Exercise 11.10. Write code to take a vector of integers, and construct two vectors, one containing all the odd inputs, and one containing all the even inputs. So:

```
|| input:
||   5, 6, 2, 4, 5
|| output:
||   5, 5
||   6, 2, 4
```

Can you write a function that accepts a vector and produces two vectors as described?

11.5 Vectors in classes

You may want an object that contains a vector, where the size of the vector is passed to the constructor. Since the class definition is an abstract definition of all possible objects, clearly you can not have the vector size there.

```

class witharray {
private:
    vector<int> the_array(????? );
public:
    witharray( int n ) {
        the_array(????? n ????? );
    }
}

```

The solution is to specify a vector without size in the class definition, which creates a vector of size zero. When you create an object, you then create a vector of the right size, and use that as the vector member of the object.

Create and assign

The following mechanism works:

```

class witharray {
private:
    vector<int> the_array;
public:
    witharray( int n )
        : the_array(vector<int>(n)) {
    };
}

```

Better than

```

witharray( int n ) {
    the_array = vector<int>(n);
};

```

The two cases behave slightly differently.

- The expression `vector<int>(n)` creates an anonymous vector of size `n`;
 - In the first case, that anonymous vector is moved to become the value of the `the_array` variable;
 - in the second case, the object is first created with `the_array` being an empty vector, and the `size-n` is then written over it. This is less efficient and less elegant.
- Either way, now you have an object with a vector of size `n` internally.

11.5.1 Timing

Different ways of accessing a vector can have drastically different timing cost.

Filling in vector elements

You can push elements into a vector:

```

vector<int> flex;
/* ... */
for (int i=0; i<LENGTH; i++)
    flex.push_back(i);

```

If you allocate the vector statically, you can assign with at:

```

vector<int> stat(LENGTH);
/* ... */
for (int i=0; i<LENGTH; i++)
    stat.at(i) = i;

```

Filling in vector elements

With subscript:

```
||  vector<int> stat(LENGTH);
||  /* ... */
||  for (int i=0; i<LENGTH; i++)
||      stat[i] = i;
```

You can also use `new` to allocate:

```
||  int *stat = new int[LENGTH];
||  /* ... */
||  for (int i=0; i<LENGTH; i++)
||      stat[i] = i;
```

(note: legacy C mechanism. Do not use)

For `new`, see section 16.6.2. However, note that this mode of allocation is basically never needed.

Timings are partly predictable, partly surprising:

Timing the ways of filling a vector

```
|| Flexible time: 2.445
|| Static at time: 1.177
|| Static assign time: 0.334
|| Static assign time to new: 0.467
```

The increased time for `new` is a mystery.

So do you use `at` for safety or `[]` for speed? Well, you could use `at` during development of the code, and insert

```
|| #define at(x) operator[](x)
```

for production.

11.6 Wrapping a vector in an object

You may want to create objects that contain a vector, for instance because you want to add some methods.

```
|| class namedvector {
|| private:
||     string name;
||     vector<int> values;
|| public:
||     printable(int n, string name="unnamed")
||         name(name), values(vector<int>(n)) {
||     };
||     string rendered() {
||         string render{name};
||         render += ":";
||         for (auto v : values)
||             render += " "+atoi(v)+",";
||         return render;
||     }
|| }
```

```

    }
/* ... */
};
```

Unfortunately this means you may have to recreate some methods:

```

int &at(int i) {
    return values.at(i);
};
```

11.7 Multi-dimensional cases

Unlike Fortran, C++ has little support for multi-dimensional arrays. If your multi-dimensional arrays are to model linear algebra objects, it would be good to check out the *Eigen* library. Here are some general remarks on multi-dimensional storage.

11.7.1 Matrix as vector of vectors

Multi-dimensional vectors

Multi-dimensional is harder with vectors:

```

vector<float> row(20);
vector<vector<float>> rows(10, row);
// alternative:
vector<vector<float>> rows(10);
for (auto &row : rows)
    row = vector<float>(20);
```

Create a row vector, then store 10 copies of that:
vector of vectors.

This is not the best implementation of a matrix, for instance because the elements are not contiguous. However, let's continue with it for a moment.

Matrix class

```

class matrix {
private:
    vector<vector<double>> elements;
public:
    matrix(int m, int n) {
        elements =
            vector<vector<double>>(m, vector<double>(n));
    }
    void set(int i, int j, double v) {
        elements.at(i).at(j) = v;
    };
    double get(int i, int j) {
        return elements.at(i).at(j);
    };
};
```

Exercise 11.11. Write `rows()` and `cols()` methods for this class that return the number of rows and columns respectively.

Exercise 11.12. Add methods such as transpose, scale to your matrix class.
Implement matrix-matrix multiplication.

11.7.2 A better matrix class

You can make a ‘pretend’ matrix by storing a long enough `vector` in an object:

```
class matrix {
private:
    std::vector<double> the_matrix;
    int m, n;
public:
    matrix(int m, int n)
        : m(m), n(n), the_matrix(m*n) {};
    void set(int i, int j, double v) {
        the_matrix.at( i*n + j ) = v;
    };
    double get(int i, int j) {
        return the_matrix.at( i*n + j );
    };
    /* ... */
};
```

Exercise 11.13. Why are `m, n` here stored explicitly, and not in the previous case?

The most important advantage of this is that it is compatible with the storage traditionally used in many libraries and codes.

The syntax for `set` and `get` can be improved.

Exercise 11.14. Write a method `element` of type `double&`, so that you can write

```
|| A.element(2, 3) = 7.24;
```

11.8 Advanced topics

11.8.1 Iterators

You have seen how you can iterate over a vector

- by an indexed loop over the indices, and
- with a range-based loop over the indices.

There is a third way, which is actually the basic mechanism underlying the range-based looping.

An *iterator* is, in a metaphorical sense (see section 23.2.2 for details) a pointer to a vector element. Mirroring the index-loop convention of

```
|| for (int i=0; i<hi; i++)
    element = vec.at(i);
```

you can iterate:

```
|| for (auto elt_ptr=vec.begin(); elt_ptr!=vec.end(); ++elt_ptr)
    element = *elt_ptr;
```

Some remarks:

- This is one of the very few places where you need the asterisk in C++ for *dereferencing*; section 16.2. (However, the thing you are dereferencing is an iterator, not a pointer.)
- As with a normal loop, the `end` iterator point just beyond the end of the vector.
- You can do *pointer arithmetic* on iterators, as you can see in the `++elt_ptr` update part of the loop header.

Another illustration of pointer arithmetic on iterators is getting the last element of a vector:

Code:

```
vector<int> array(5, 2);
array.push_back(35);
cout << array.size() << endl;
cout << array[array.size()-1] << endl;
```

Output
[array] vectorend:

6
35

For the source of this example, see section 11.10.13

Code:

```
vector<int> array(5, 2);
array.push_back(35);
cout << array.size() << endl;
cout << *(&array.end()) << endl;
```

Output
[array] vectorenditerator:

6
35

For the source of this example, see section 11.10.13

11.8.2 Old-style arrays

Static arrays are really an abuse of the equivalence of arrays and addresses of the C programming language. This appears for instance in parameter passing mechanisms.

For small arrays you can use a different syntax.

Code:

```
{
    int numbers[] = {5, 4, 3, 2, 1};
    cout << numbers[3] << endl;
}
{
    int numbers[5] {5, 4, 3, 2, 1};
    numbers[3] = 21;
    cout << numbers[3] << endl;
}
```

Output
[array] staticinit:

2
21

For the source of this example, see section 11.10.14

This has the (minimal) advantage of not having the overhead of a class mechanism. On the other hand, it has a number of disadvantages:

- You can not query the size of an array by its name: you have to store that information separately in a variable.
- Passing such an array to a function is really passing the address of its first element, so it is always (sort of) by reference.

Range-based indexing works the same as with vectors:

Code:

```

int numbers[] = {1, 4, 2, 6, 5};
int tmp_max = numbers[0];
for (auto v : numbers)
    if (v > tmp_max)
        tmp_max = v;
cout << "Max: " << tmp_max << " (should be 6)" << endl;

```

Output

```

[array] rangemax:
Max: 6 (should be 6)

```

For the source of this example, see section [11.10.15](#)

11.8.2.1 C-style arrays and subprograms

Arrays can be passed to a subprogram, but the bound is unknown there.

```

void array_set( double ar[], int idx, double val) {
    ar[idx] = val;
}
/* ... */
array_set(array, 1, 3.5);

```

Exercise 11.15. Rewrite the above exercises where the sorting tester or the maximum finder is in a subprogram.

Unlike with scalar arguments, array arguments can be altered by a subprogram: it is as if the array is always passed by reference. This is not strictly true: what happens is that the address of the first element of the array is passed. Thus we are really dealing with pass by value, but it is the array address that is passed rather than its value.

11.8.2.2 Multi-dimensional arrays

Multi-dimensional arrays can be declared and used with a simple extension of the prior syntax:

```

float matrix[15][25];

for (int i=0; i<15; i++)
    for (int j=0; j<25; j++)
        // something with matrix[i][j]


```

Passing a multi-dimensional array to a function, only the first dimension can be left unspecified:

```

void print12( int ar[][6] ) {
    cout << "Array[1][2]: " << ar[1][2] << endl;
    return;
}
/* ... */
int array[5][6];
array[1][2] = 3;
print12(array);

```

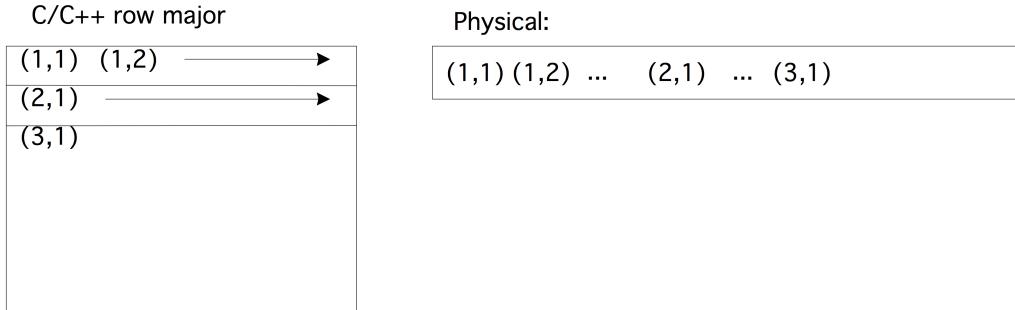

11.8.2.3 Memory layout

Puzzling aspects of arrays, such as which dimensions need to be specified and which not in a function call, can be understood by considering how arrays are stored in memory. The question then is how a two-dimensional (or higher dimensional) array is mapped to memory, which is linear.

- A one-dimensional array is stored in contiguous memory.
- A two-dimensional array is also stored contiguously, with first the first row, then the second, et cetera.
- Higher dimensional arrays continue this notion, with contiguous blocks of the highest so many dimensions.

As a result of this, indexing beyond the end of a row, brings you to the start of the next row:

```
void print06( int ar[][] ) {
    cout << "Array[0][6]: " << ar[0][6] << endl;
    return;
}
/* ... */
int array[5][6];
array[1][0] = 35;
print06(array);
```

We can now also understand how arrays are passed to functions:

- The only information passed to a function is the address of the first element of the array;
- In order to be able to find location of the second row (and third, et cetera), the subprogram needs to know the length of each row.
- In the higher dimensional case, the subprogram needs to know the size of all dimensions except for the first one.

11.8.3 Stack and heap allocation

Entities stored in memory (variables, structures, objects) can exist in two locations: the *stack* and the *heap*.

- Every time a program enters a new *scope*, entities declared there are placed on top of the stack, and they are removed by the end of the scope.
- The heap is for entities that transcend scope, for instance because they are pointed-to by a *pointer*. The space of such objects can be returned to the free store at any time, so the heap can suffer from *fragmentation*.

The concepts of *stack* and *heap* do not appear in the *C++ standard*. However, the following description generally applies:

- Objects that obey scope are allocated on the stack, so that their memory is automatically freed when control leaves the scope.
- Dynamically created objects, such as the target of a pointer, live on the heap because their lifetime is not subject to scope.

The existence of the second category is a source of *memory leaks* in languages such as C. This danger is greatly lessened in C++.

While in C the only way to create dynamic objects is by a call to `malloc`, in C++ a `vector` obeys scope, and therefore lives on the stack. If you wonder if this may lead to *stack overflow*, rest assured: only the descriptor, the part of the vector that remembers the size, is on the stack, while the actual data is on the heap. However, it is no longer subject to memory leaking, since the heap storage is deallocated when the vector object goes out of scope.

If you want heap memory that transcends scope you can use the *smart pointer* mechanism, which also guarantees against memory leaks. See chapter 15.

11.8.4 The Array class

In cases where an array will never change size it would be convenient to have a variant of the `vector` class that does not have the dynamic memory management facility. The `array` class seems to fulfill this role at first sight. However, it is limited to arrays where the size is known at compile time.

11.8.5 Span

The old C style arrays allowed for some operations that are harder to do with vectors. For instance, you could create a subset of an array with:

```
double *x = (double*)malloc(N*sizeof(double));
double *subx = x+1;
subx[1] = 5.; // same as: x[2] = 5.;
```

In C++ you can write

```
vector<double> x(N);
vector<double> subx( x.begin() + 1, x.end() );
```

but that allocates new storage.

If you really want two vector-like objects to share data there is the `span` class, which is in the STL of C++20. Until this standard is available you can use the *Guideline Support Library (GSL)*, for instance implemented in <https://github.com/Microsoft/GSL>.

A span is little more than a pointer and a size, so it allows for the above use case. Also, it does not have the overhead of creating a whole new vector.

Span

```
vector<double> v;
auto v_span = gsl::span<double>( v.data(), v.size() );
```

The `span` object has the same `at`, `data`, and `size` methods, and you can iterate over it, but it has no dynamic methods.

11.9 Exercises

Exercise 11.16. Given a vector of integers, write two loops;

1. One that sums all even elements, and
2. one that sums all elements with even indices.

Use the right type of loop.

Exercise 11.17. Program *bubble sort*: go through the array comparing successive pairs of elements, and swapping them if the second is smaller than the first. After you have gone through the array, the largest element is in the last location. Go through the array again, swapping elements, which puts the second largest element in the one-before-last location. Et cetera.

Pascal's triangle

Pascal's triangle contains binomial coefficients:

Row	1:	1
Row	2:	1 1
Row	3:	1 2 1
Row	4:	1 3 3 1
Row	5:	1 4 6 4 1
Row	6:	1 5 10 10 5 1
Row	7:	1 6 15 20 15 6 1
Row	8:	1 7 21 35 35 21 7 1
Row	9:	1 8 28 56 70 56 28 8 1
Row	10:	1 9 36 84 126 126 84 36 9 1

where

$$p_{rc} = \binom{r}{c} = \frac{r!}{c!(r-c)!}.$$

The coefficients can easily be computed from the recurrence

$$p_{rc} = \begin{cases} 1 & c \equiv 1 \vee c \equiv r \\ p_{r-1,c-1} + p_{r-1,c} & \text{otherwise} \end{cases}$$

Exercise 11.18.

- Write a class `pascal` so that `pascal(n)` is the object containing n rows of the above coefficients. Write a method `get(i, j)` that returns the (i, j) coefficient.
- Write a method `print` that prints the above display.
- Write a method `print(int m)` that prints a star if the coefficient modulo m is nonzero, and a space otherwise.

```

      *
      * *
      *   *
      * * * *
      *       *
      * *     * *
      *   *   *   *
      * * * * * * *
      *
      * *

```

- The object needs to have an array internally. The easiest solution is to make an array of size $n \times n$.

Exercise 11.19. Extend the Pascal exercise:

Optimize your code to use precisely enough space for the coefficients.

Exercise 11.20. A knight on the chess board moves by going two steps horizontally or vertically, and one step either way in the orthogonal direction. Given a starting position, find a sequence of moves that brings a knight back to its starting position. Are there starting positions for which such a cycle doesn't exist?

Exercise 11.21. Put eight queens on a chessboard so that none threatens any other.

Exercise 11.22. From the 'Keeping it REAL' book, exercise 3.6 about Markov chains.

11.10 Sources used in this chapter

11.10.1 Listing of code/array/dynamicinit

```
*****  
**** This file belongs with the course  
**** Introduction to Scientific Programming in C++/Fortran2003  
**** copyright 2018/9 Victor Eijkhout eijkhout@tacc.utexas.edu  
****  
**** dynamicinit.cxx : initialization of vectors  
****  
*****  
  
#include <iostream>  
using std::cout;  
using std::endl;  
  
#include <vector>  
using std::vector;  
  
int main() {  
  
    //codesnippet dynamicinit  
    {  
        vector<int> numbers{5,6,7,8,9,10};  
        cout << numbers.at(3) << endl;  
    }  
    {  
        vector<int> numbers = {5,6,7,8,9,10};  
        numbers.at(3) = 21;  
        cout << numbers.at(3) << endl;  
    }  
    //codesnippet end  
  
    return 0;  
}
```

11.10.2 Listing of code/array/dynamicmax

```
*****  
**** This file belongs with the course
```

```
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2017-9 Victor Eijkhout eijkhout@tacc.utexas.edu
*** 
**** dynamicmax.cxx : static array length examples
**** 
***** ****
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

#include <vector>
using std::vector;

int main() {

    //examplesnippet dynamicmax
    vector<int> numbers = {1,4,2,6,5};
    int tmp_max = numbers[0];
    for (auto v : numbers)
        if (v>tmp_max)
            tmp_max = v;
    cout << "Max: " << tmp_max
        << " (should be 6)" << endl;
    //examplesnippet end

    return 0;
}
```

11.10.3 Listing of code/array/rangedenote

```
/*****
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2017-9 Victor Eijkhout eijkhout@tacc.utexas.edu
*** 
**** rangedenote.cxx : range over denotation
**** 
***** ****
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

#include <vector>
using std::vector;

int main() {

    //examplesnippet rangedenote
    for ( auto i : {2,3,5,7,9} )
        cout << i << ",";
    cout << endl;
    //examplesnippet end
}
```

```
    }  
    return 0;  
}
```

11.10.4 Listing of code/array/vecidxmax

```
/*********************************************  
****  
**** This file belongs with the course  
**** Introduction to Scientific Programming in C++/Fortran2003  
**** copyright 2017/8 Victor Eijkhout eijkhout@tacc.utexas.edu  
****  
**** idxmax.cxx : static array length examples  
****  
*****  
  
#include <iostream>  
using std::cin;  
using std::cout;  
using std::endl;  
  
#include <vector>  
using std::vector;  
  
int main() {  
  
    vector<float> numbers = {1.1,4.4,2.2,6.6,5.5};  
    //examplesnippet vecidxmax  
    int tmp_idx = 0;  
    float tmp_max = numbers[tmp_idx];  
    for (int i=0; i<5; i++) {  
        float v = numbers[i];  
        if (v>tmp_max) {  
            tmp_max = v; tmp_idx = i;  
        }  
    }  
    cout << "Max: " << tmp_max  
        << " at index: " << tmp_idx << endl;  
    //examplesnippet end  
  
    return 0;  
}
```

11.10.5 Listing of code/array/vectorrangeref

```
/*********************************************  
****  
**** This file belongs with the course  
**** Introduction to Scientific Programming in C++/Fortran2003  
**** copyright 2016-8 Victor Eijkhout eijkhout@tacc.utexas.edu  
****  
**** vectorrangeref.cxx : range-based indexing by reference  
****  
*****  
  
#include <iostream>  
using std::cin;
```

```

using std::cout;
using std::endl;

#include <vector>
using std::vector;

int main() {

//codesnippet vectorrangeref
vector<float> myvector
= {1.1, 2.2, 3.3};
for ( auto &e : myvector )
e *= 2;
cout << myvector.at(2) << endl;
//codesnippet end

return 0;
}

```

11.10.6 Listing of code/loop/plusplus

```

/*********************************************
*****
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2019 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** plusplus.cxx : illustration of plusplus indexing
*****
******************************************/

#include <iostream>
using std::cin;
using std::cout;
using std::endl;

#include <vector>
using std::vector;

int main() {

cout << "Test" << endl;
{
//codesnippet plusplustest1
vector<int> numbers{3,5,7,8,9,11};
int index{0};
while ( numbers[index++]%2==1 ) ;
cout << "The first even number"
<< " appears at index "
<< index << endl;
//codesnippet end
}
cout << "test" << endl;
{
//answersnippet plusplustest2
vector<int> numbers{3,5,7,8,9,11};
int index{-1};

```

```
    while ( numbers[++index]%2==1 ) ;
    cout << "The first "
      << index
      << " numbers are odd" << endl;
    //answersnippet end
}

return 0;
}
```

11.10.7 Listing of code/array/vectorcopy

```
/*
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2016/7 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** vectorcopy.cxx : example of vector copying
*****
****

#include <iostream>
using std::cin;
using std::cout;
using std::endl;

#include <vector>
using std::vector;

int main() {

//codesnippet vectorcopy
vector<float> v(5,0), vcopy;
v.at(2) = 3.5;
vcopy = v;
vcopy.at(2) *= 2;
cout << v.at(2) << ","
      << vcopy.at(2) << endl;
//codesnippet end

return 0;
}
```

11.10.8 Listing of code/array/vectorend

```
/*
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2018 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** vectorend.cxx : example of vector end iterator
*****
****

#include <iostream>
```

```
using std::cin;
using std::cout;
using std::endl;

#include <vector>
using std::vector;

int main() {

    cout << "End Bracket" << endl;
    {
        //codesnippet vectorpush
        vector<int> array(5,2);
        array.push_back(35);
        cout << array.size() << endl;
        cout << array[array.size()-1] << endl;
        //codesnippet end
    }
    cout << "... bracket" << endl;

    cout << "End Iterator" << endl;
    {
        //codesnippet vectorpushiterator
        vector<int> array(5,2);
        array.push_back(35);
        cout << array.size() << endl;
        cout << *( --array.end() ) << endl;
        //codesnippet end
    }
    cout << "... iterator" << endl;

    return 0;
}
```

11.10.9 Listing of code/array/vectorpassnot

```
*****
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2016/7 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** vectorpassnotcxx : example of vector passed by value
***** */

#include <iostream>
using std::cin;
using std::cout;
using std::endl;

#include <vector>
using std::vector;

//codesnippet vectorpassval
void set0
( vector<float> v, float x )
```

```
{  
    v.at(0) = x;  
}  
//codesnippet end  
  
int main() {  
  
    //codesnippet vectorpassval  
    vector<float> v(1);  
    v.at(0) = 3.5;  
    set0(v, 4.6);  
    cout << v.at(0) << endl;  
    //codesnippet end  
  
    return 0;  
}
```

11.10.10 Listing of code/array/vectorpassref

```
*****  
**** This file belongs with the course  
**** Introduction to Scientific Programming in C++/Fortran2003  
**** copyright 2016/7 Victor Eijkhout eijkhout@tacc.utexas.edu  
****  
**** vectorpassref.cxx : example of vector passed by reference  
****  
*****  
  
#include <iostream>  
using std::cin;  
using std::cout;  
using std::endl;  
  
#include <vector>  
using std::vector;  
  
//codesnippet vectorpassref  
void set0  
    ( vector<float> &v, float x )  
{  
    v.at(0) = x;  
}  
//codesnippet end  
  
int main() {  
  
    //codesnippet vectorpassref  
    vector<float> v(1);  
    v.at(0) = 3.5;  
    set0(v, 4.6);  
    cout << v.at(0) << endl;  
    //codesnippet end  
  
    return 0;  
}
```

11.10.11 Listing of code/array/vectorreturn

```
/*********************************************
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2016-9 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** vectorreturn.cxx : return vector from function
*****
******************************************/
```

```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

#include <vector>
using std::vector;

//codesnippet vectorreturn
vector<int> make_vector(int n) {
    vector<int> x(n);
    x.at(0) = n;
    return x;
}
//codesnippet end

int main() {

    //codesnippet vectorreturn
    vector<int> x1 = make_vector(10);
    // "auto" also possible!
    cout << "x1 size: " << x1.size() << endl;
    cout << "zero element check: " << x1.at(0) << endl;
    //codesnippet end

    return 0;
}
```

11.10.12 Listing of code/array/vectorend

```
/*********************************************
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2018 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** vectorend.cxx : example of vector end iterator
*****
******************************************/
```

```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

#include <vector>
```

```
using std::vector;

int main() {

    cout << "End Bracket" << endl;
{
    //codesnippet vectorpush
    vector<int> array(5,2);
    array.push_back(35);
    cout << array.size() << endl;
    cout << array[array.size()-1] << endl;
    //codesnippet end
}
cout << "... bracket" << endl;

cout << "End Iterator" << endl;
{
    //codesnippet vectorpushiterator
    vector<int> array(5,2);
    array.push_back(35);
    cout << array.size() << endl;
    cout << *( --array.end() ) << endl;
    //codesnippet end
}
cout << "... iterator" << endl;

return 0;
}
```

11.10.13 Listing of code/array/vectorend

```
/*********************************************
 ****
 **** This file belongs with the course
 **** Introduction to Scientific Programming in C++/Fortran2003
 **** copyright 2018 Victor Eijkhout eijkhout@tacc.utexas.edu
 ****
 **** vectorend.cxx : example of vector end iterator
 ****
 **********************************************/
```

```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

#include <vector>
using std::vector;

int main() {

    cout << "End Bracket" << endl;
{
    //codesnippet vectorpush
    vector<int> array(5,2);
    array.push_back(35);
    cout << array.size() << endl;
```

```
    cout << array[array.size()-1] << endl;
    //codesnippet end
}
cout << "... bracket" << endl;

cout << "End Iterator" << endl;
{
    //codesnippet vectorpushiterator
    vector<int> array(5,2);
    array.push_back(35);
    cout << array.size() << endl;
    cout << *( --array.end() ) << endl;
    //codesnippet end
}
cout << "... iterator" << endl;

return 0;
}
```

11.10.14 Listing of code/array/staticinit

```
/*
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2018 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** staticinit.cxx : initialization of static arrays
*****
*/
#include <iostream>
using std::cout;
using std::endl;

#include <vector>
using std::vector;

int main() {

    //codesnippet arrayinit
    {
        int numbers[] = {5,4,3,2,1};
        cout << numbers[3] << endl;
    }
    {
        int numbers[5]{5,4,3,2,1};
        numbers[3] = 21;
        cout << numbers[3] << endl;
    }
    //codesnippet end

    return 0;
}
```

11.10.15 Listing of code/array/rangemax

```
/*
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2017/8 Victor Eijkhout eijkhout@tacc.utexas.edu
*** 
**** rangemax.cxx : static array length examples
*****
****/ 

#include <iostream>
using std::cin;
using std::cout;
using std::endl;

#include <vector>
using std::vector;

int main() {

    //examplesnippet rangemax
    int numbers[] = {1,4,2,6,5};
    int tmp_max = numbers[0];
    for (auto v : numbers)
        if (v>tmp_max)
            tmp_max = v;
    cout << "Max: " << tmp_max << " (should be 6)" << endl;
    //examplesnippet end

    return 0;
}
```

Chapter 12

Strings

12.1 Characters

Characters and ints

- Type `char`;
- represents ‘7-bit ASCII’: printable and (some) unprintable characters.
- Single quotes: `char c = 'a'`

Char / int equivalence

Equivalent to (short) integer:

Code:

```
|| char ex = 'x';
|| int x_num = ex, y_num = ex+1;
|| char why = y_num;
|| cout << "x is at position " << x_num
||     << endl;
|| cout << "one further lies " << why
||     << endl;
```

Output
[string] intchar:
x is at position 120
one further lies y

For the source of this example, see section [12.6.1](#)

Also: 'x' - 'a' is distance $a - x$

Exercise 12.1. Write a program that accepts an integer $1 \dots 26$ and prints the so-manieth letter of the alphabet.

Extend your program so that if the input is negative, it prints the minus-so-manieth uppercase letter of the alphabet.

12.2 Basic string stuff

String declaration

```
|| #include <string>
|| using std::string;
|| // .. and now you can use 'string'
```

(Do not use the C legacy mechanisms.)

String creation

A `string` variable contains a string of characters.

12. Strings

```
|| string txt;
```

You can initialize the string variable or assign it dynamically:

```
|| string txt{"this is text"};
|| string moretxt("this is also text");
|| txt = "and now it is another text";
```

Normally, quotes indicate the start and end of a string. So what if you want a string with quotes in it?

Quotes in strings

You can escape a quote, or indicate that the whole string is to be taken literally:

Code:

<pre> string one("a b c"), two("a \"b\" c"), three(R"(a ""b """c)"); cout << one << endl; cout << two << endl; cout << three << endl;</pre>	<p>Output [string] quote: a b c a "b" c "a ""b """c</p>
---	--

For the source of this example, see section [12.6.2](#)

Concatenation

Strings can be concatenated:

```
|| txt = txt1+txt2;
|| txt += txt3;
```

String indexing

You can query the size:

```
|| int txtlen = txt.size();
```

or use subscripts:

```
|| cout << "The second character is <<" 
||       << txt[1] << ">>" << endl;
```

Ranging over a string

Same as ranging over vectors.

Range-based for:

Code:

<pre> cout << "By character: "; for (char c : abc) cout << c << " "; cout << endl;</pre>	<p>Output [string] stringrange: By character: a b c</p>
---	--

For the source of this example, see section [12.6.5](#)

Ranging by index:

Code:

```
string abc = "abc";
cout << "By character: ";
for (int ic=0; ic<abc.size(); ic++)
    cout << abc[ic] << " ";
cout << endl;
```

Output

[string] stringindex:
By character: a b c

For the source of this example, see section [12.6.5](#)

Range with reference

Range-based for makes a copy of the element

You can also get a reference:

Code:

```
for (char &c : abc)
    c += 1;
cout << "Shifted: " << abc << endl;
```

Output

[string] stringrangeset:
Shifted: bcd

For the source of this example, see section [12.6.5](#)

Iterating over a string

```
for (auto c : some_string)
    // do something with the character 'c'
```

Review 12.1. True or false?

- '0' is a valid value for a char variable
- "0" is a valid value for a char variable
- "0" is a valid value for a string variable
- 'a'+'b' is a valid value for a char variable

Exercise 12.2. The oldest method of writing secret messages is the *Caesar cypher*. You would take an integer s and rotate every character of the text over that many positions:

$$s \equiv 3: "acdz" \Rightarrow "dfgc".$$

Write a program that accepts an integer and a string, and display the original string rotated over that many positions.

Exercise 12.3. (this continues exercise [12.2](#))

If you find a message encrypted with the Caesar cipher, can you decrypt it? Take your inspiration from the *Sherlock Holmes* story ‘The Adventure of the Dancing Men’, where he uses the fact that ‘e’ is the most common letter.

Can you implement a more general letter permutation cipher, and break it with the ‘dancing men’ approach?

More vector methods

Other methods for the vector class apply: `insert`, `empty`, `erase`, `push_back`, et cetera. Methods only for `string`: `find` and such.

http://en.cppreference.com/w/cpp/string/basic_string

Exercise 12.4. Write a function to print out the digits of a number: 156 should print one five six. You need to convert a digit to a string first; can you think of more than one way to do that?

Start by writing a program that reads a single digit and prints its name.

For the full program it is easiest to generate the digits last-to-first. Then figure out how to print them reversed.

Exercise 12.5. Write a function to convert an integer to a string: the input 215 should give two hundred fifteen, et cetera.

Exercise 12.6. Write a pattern matcher, where a period . matches any one character, and x* matches any number of ‘x’ characters.

For example:

- The string abc matches a . c but abbc doesn’t.
- The string abbc matches ab*c, as does ac, but abzbc doesn’t.

12.3 String streams

You can concatenate string with the + operator. The less-less operator also does a sort of concatenation. It is attractive because it does conversion from quantities to string. Sometimes you may want a combination of these facilities: conversion to string, with a string as result.

For this you can use a *string stream*:

String stream

Like cout (including conversion from quantity to string), but to object, not to screen.

- Use the << operator to build it up; then
- use the *str* method to extract the string.

```
#include <iostream>
stringstream s;
s << "text" << 1.5;
cout << s.str() << endl;
```

Exercise 12.7. Use integer output to print real numbers aligned on the decimal:

Code:

```
string quasifix(double);
int main() {
    for (auto x : { 1.5, 12.32, 123.456, 1234.5678 } )
        cout << quasifix(x) << endl;
```

Output

[string] quasifix:

make[3]: *** No rule to make target 'run_quasifix'

Use four spaces for both the integer and fractional part; test only with numbers that fit this format.

12.4 Advanced topics

12.4.1 Conversation to/from string

There are various mechanisms for converting between strings and numbers.

- The C legacy mechanisms *sprintf* and *itoa*.
- *to_string*
- Above you saw the *stringstream*; section 12.3.

- The Boost library has a *lexical cast*.

Additionally, in C++17 there is the `charconv` header with `to_chars` and `from_chars`. These are low level routines that do not throw exceptions, do not allocate, and are each other's inverses. The low level nature is for instance apparent in the fact that they work on character buffers (not null-terminated). Thus, they can be used to build more sophisticated tools on top of.

12.4.2 Unicode

C++ strings are essentially vectors of characters. A character is a single byte. Unfortunately, in these interweb days there are more characters around than fit in one byte. In particular, there is the *Unicode* standard that covers millions of characters. The way they are rendered is by an *extendible encoding*, in particular *UTF8*. This means that sometimes a single ‘character’, or more correctly *glyph*, takes more than one byte.

Example:

12.5 C strings

In C a string is essentially an array of characters. C arrays don't store their length, but strings do have functions that implicitly or explicitly rely on this knowledge, so they have a terminator character: ASCII `\0`. C strings are called *null-terminated* for this reason.

12.6 Sources used in this chapter

12.6.1 Listing of code/string/intchar

```
*****  
***** This file belongs with the course  
***** Introduction to Scientific Programming in C++/Fortran2003  
***** copyright 2018/9 Victor Eijkhout eijkhout@tacc.utexas.edu  
*****  
***** intchar.cxx : int/char equivalence  
*****  
*****  
  
#include <iostream>  
using std::cin;  
using std::cout;  
using std::endl;  
#include <iomanip>  
using std::setw;  
  
#include <vector>  
using std::vector;  
  
#include <string>  
using std::string;  
  
int main() {
```

```
//codesnippet intcharxy
char ex = 'x';
int x_num = ex, y_num = ex+1;
char why = y_num;
cout << "x is at position " << x_num
    << endl;
cout << "one further lies " << why
    << endl;
//codesnippet end

return 0;
}
```

12.6.2 Listing of code/string/quote

```
*****  
**** This file belongs with the course  
**** Introduction to Scientific Programming in C++/Fortran2003  
**** copyright 2016/7 Victor Eijkhout eijkhout@tacc.utexas.edu  
****  
**** quote.cxx : quote handling  
****  
*****  
  
#include <iostream>
using std::cin;
using std::cout;
using std::endl;  
  
#include <string>
using std::string;  
  
int main() {  
  
    //codesnippet quotestring
    string
        one("a b c"),
        two("a \"b\" c"),
        three( R"(a ""b """c)" );
    cout << one << endl;
    cout << two << endl;
    cout << three << endl;
    //codesnippet end  
  
    return 0;
}
```

12.6.3 Listing of code/string/stringrange

```
*****  
**** This file belongs with the course  
**** Introduction to Scientific Programming in C++/Fortran2003  
**** copyright 2016-8 Victor Eijkhout eijkhout@tacc.utexas.edu  
****
```

```
**** stringrange.cxx : range over string
****

***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2016-8 Victor Eijkhout eijkhout@tacc.utexas.edu
****

***** stringrange.cxx : range over string
****

#include <iostream>
using std::cin;
using std::cout;
using std::endl;

#include <string>
using std::string;

int main() {

    cout << "Index" << endl;
    //codesnippet stringindex
    string abc = "abc";
    cout << "By character: ";
    for (int ic=0; ic<abc.size(); ic++)
        cout << abc[ic] << " ";
    cout << endl;
    //codesnippet end
    cout << "... index" << endl;

    cout << "Range" << endl;
    //codesnippet stringrange
    cout << "By character: ";
    for ( char c : abc )
        cout << c << " ";
    cout << endl;
    //codesnippet end
    cout << "... range" << endl;

    cout << "Set" << endl;
    //codesnippet stringrangeset
    for ( char &c : abc )
        c += 1;
    cout << "Shifted: " << abc << endl;
    //codesnippet end
    cout << "... set" << endl;

    return 0;
}
```

12.6.4 Listing of code/string/stringrange

```
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2016-8 Victor Eijkhout eijkhout@tacc.utexas.edu
****

***** stringrange.cxx : range over string
****

#include <iostream>
```

```
using std::cin;
using std::cout;
using std::endl;

#include <string>
using std::string;

int main() {

    cout << "Index" << endl;
    //codesnippet stringindex
    string abc = "abc";
    cout << "By character: ";
    for (int ic=0; ic<abc.size(); ic++)
        cout << abc[ic] << " ";
    cout << endl;
    //codesnippet end
    cout << ".. index" << endl;

    cout << "Range" << endl;
    //codesnippet stringrange
    cout << "By character: ";
    for (char c : abc)
        cout << c << " ";
    cout << endl;
    //codesnippet end
    cout << ".. range" << endl;

    cout << "Set" << endl;
    //codesnippet stringrangeset
    for (char &c : abc)
        c += 1;
    cout << "Shifted: " << abc << endl;
    //codesnippet end
    cout << ".. set" << endl;

    return 0;
}
```

12.6.5 Listing of code/string/stringrange

```
*****
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2016-8 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** stringrange.cxx : range over string
*****
*****
```

```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

#include <string>
```

```
using std::string;

int main() {

    cout << "Index" << endl;
    //codesnippet stringindex
    string abc = "abc";
    cout << "By character: ";
    for (int ic=0; ic<abc.size(); ic++)
        cout << abc[ic] << " ";
    cout << endl;
    //codesnippet end
    cout << ".. index" << endl;

    cout << "Range" << endl;
    //codesnippet stringrange
    cout << "By character: ";
    for ( char c : abc )
        cout << c << " ";
    cout << endl;
    //codesnippet end
    cout << ".. range" << endl;

    cout << "Set" << endl;
    //codesnippet stringrangeset
    for ( char &c : abc )
        c += 1;
    cout << "Shifted: " << abc << endl;
    //codesnippet end
    cout << ".. set" << endl;

    return 0;
}
```


Chapter 13

Input/output

13.1 Formatted output

Formatted output

- `cout` uses default formatting
- Possible: pad a number, use limited precision, format as hex/base2, etc
- Many of these output modifiers need

```
|| #include <iomanip>
```

Normally, output of numbers takes up precisely the space that it needs:

Code:

```
|| for (int i=1; i<200000000; i*=10)
    cout << "Number: " << i << endl;
    cout << endl;
```

Output
[io] <code>cunformat</code> :
Number: 1
Number: 10
Number: 100
Number: 1000
Number: 10000
Number: 100000
Number: 1000000
Number: 10000000
Number: 100000000

For the source of this example, see section [13.6.1](#)

Reserve space

You can specify the number of positions, and the output is right aligned in that space by default:

13. Input/output

Code:

```
cout << "Width is 6:" << endl;
for (int i=1; i<2000000000; i*=10)
    cout << "Number: "
        << setw(6) << i << endl;
cout << endl;

cout << "Width is 6:" << endl;
cout << "."
    << setw(6) << 1 << 2 << 3 << endl;
cout << endl;
```

Output

[io] width:

```
Width is 6:
Number:      1
Number:     10
Number:    100
Number:   1000
Number:  10000
Number: 100000
Number: 1000000
Number: 10000000
Number: 100000000
```

```
Width is 6:
.      123
```

For the source of this example, see section [13.6.2](#)

Padding character

Normally, padding is done with spaces, but you can specify other characters:

Code:

```
#include <iomanip>
using std::setfill;
using std::setw;
/* ... */
for (int i=1; i<2000000000; i*=10)
    cout << "Number: "
        << setfill('.')
        << setw(6) << i
        << endl;
```

Output

[io] formatpad:

```
Number: .....1
Number: ....10
Number: ...100
Number: ..1000
Number: .10000
Number: 100000
Number: 1000000
Number: 10000000
Number: 100000000
```

For the source of this example, see section [13.6.3](#)

Note: single quotes denote characters, double quotes denote strings.

Left alignment

Instead of right alignment you can do left:

Code:

```
#include <iomanip>
using std::left;
using std::setfill;
using std::setw;
/* ... */
for (int i=1; i<2000000000; i*=10)
    cout << "Number: "
        << left << setfill('.')
        << setw(6) << i << endl;
```

Output

[io] formatleft:

```
Number: 1.....
Number: 10....
Number: 100...
Number: 1000..
Number: 10000.
Number: 100000
Number: 1000000
Number: 10000000
Number: 100000000
```

For the source of this example, see section [13.6.4](#)

Number base

Finally, you can print in different number bases than 10:

Code:

```
#include <iomanip>
using std::setbase;
using std::setfill;
/* ...
cout << setbase(16) << setfill(' ');
for (int i=0; i<16; i++) {
    for (int j=0; j<16; j++)
        cout << i*16+j << " ";
    cout << endl;
}
```

Output**[io] format16:**

```
0 1 2 3 4 5 6 7 8 9 a b c d e f
10 11 12 13 14 15 16 17 18 19 1a 1b 1c 1d 1e 1f
20 21 22 23 24 25 26 27 28 29 2a 2b 2c 2d 2e 2f
30 31 32 33 34 35 36 37 38 39 3a 3b 3c 3d 3e 3f
40 41 42 43 44 45 46 47 48 49 4a 4b 4c 4d 4e 4f
50 51 52 53 54 55 56 57 58 59 5a 5b 5c 5d 5e 5f
60 61 62 63 64 65 66 67 68 69 6a 6b 6c 6d 6e 6f
70 71 72 73 74 75 76 77 78 79 7a 7b 7c 7d 7e 7f
80 81 82 83 84 85 86 87 88 89 8a 8b 8c 8d 8e 8f
90 91 92 93 94 95 96 97 98 99 9a 9b 9c 9d 9e 9f
a0 a1 a2 a3 a4 a5 a6 a7 a8 a9 aa ab ac ad ae af
b0 b1 b2 b3 b4 b5 b6 b7 b8 b9 ba bb bc bd be bf
c0 c1 c2 c3 c4 c5 c6 c7 c8 c9 ca cb cc cd ce cf
d0 d1 d2 d3 d4 d5 d6 d7 d8 d9 da db dc dd de df
e0 e1 e2 e3 e4 e5 e6 e7 e8 e9 ea eb ec ed ee ef
f0 f1 f2 f3 f4 f5 f6 f7 f8 f9 fa fb fc fd fe ff
```

*For the source of this example, see section 13.6.5***Exercise 13.1.** Make the first line in the above output align better with the other lines:

```
00 01 02 03 04 05 06 07 08 09 0a 0b 0c 0d 0e 0f
10 11 12 13 14 15 16 17 18 19 1a 1b 1c 1d 1e 1f
20 21 22 23 24 25 26 27 28 29 2a 2b 2c 2d 2e 2f
etc
```

Hexadecimal

Hex output is useful for pointers (chapter 15):

Code:

```
int i;
cout << "address of i, decimal: "
     << (long)&i << endl;
cout << "address of i, hex : "
     << std::hex << &i << endl;
```

Output**[pointer] coutpoint:**

```
address of i, decimal: 140732771781892
address of i, hex : 0x7ffee6decd04
```

For the source of this example, see section 16.8.2

Back to decimal:

```
|| cout << hex << i << dec << j;
```

13.1.1 Floating point output

Floating point precision

Use `setprecision` to set the number of digits before and after decimal point:

13. Input/output

Code:

```
#include <iomanip>
using std::left;
using std::setfill;
using std::setw;
using std::setprecision;
/* ... */
x = 1.234567;
for (int i=0; i<10; i++) {
    cout << setprecision(4) << x << endl;
    x *= 10;
}
```

Output
[io] formatfloat:
1.235
12.35
123.5
1235
1.235e+04
1.235e+05
1.235e+06
1.235e+07
1.235e+08
1.235e+09

For the source of this example, see section [13.6.7](#)

(Notice the rounding)

Fixed point precision

Fixed precision applies to fractional part:

Code:

```
x = 1.234567;
cout << fixed;
for (int i=0; i<10; i++) {
    cout << setprecision(4) << x << endl;
    x *= 10;
}
```

Output
[io] fix:
1.2346
12.3457
123.4567
1234.5670
12345.6700
123456.7000
1234567.0000
12345670.0000
123456700.0000
1234567000.0000

For the source of this example, see section [13.6.8](#)

Aligned fixed point output

Combine width and precision:

Code:

```
x = 1.234567;
cout << fixed;
for (int i=0; i<10; i++) {
    cout << setw(10) << setprecision(4) << x
        << endl;
    x *= 10;
}
```

Output
[io] align:
1.2346
12.3457
123.4567
1234.5670
12345.6700
123456.7000
1234567.0000
12345670.0000
123456700.0000
1234567000.0000

For the source of this example, see section [13.6.9](#)

Scientific notation

```
cout << "Combine width and precision:" << endl;
x = 1.234567;
cout << scientific;
for (int i=0; i<10; i++) {
```

```

    cout << setw(10) << setprecision(4) << x << endl;
    x *= 10;
}

```

Output

```

Combine width and precision:
1.2346e+00
1.2346e+01
1.2346e+02
1.2346e+03
1.2346e+04
1.2346e+05
1.2346e+06
1.2346e+07
1.2346e+08
1.2346e+09

```

13.1.2 Saving and restoring settings

```

ios::fmtflags old_settings = cout.flags();

cout.flags(old_settings);

int old_precision = cout.precision();

cout.precision(old_precision);

```

13.2 File output*Text output to file*

Streams are general: work the same for console out and file out.

```
#include <fstream>
```

Use:

Code:

```

||#include <fstream>
||using std::ofstream;
||/* ... */
||ofstream file_out;
||file_out.open("fio_example.out");
||/* ... */
||file_out << number << endl;
||file_out.close();

```

Output

[io] fio:	echo 24 ./fio ; \ cat fio_example.out
	A number please:
	Written.
	24

For the source of this example, see section [13.6.10](#)

Binary output

Code:

```
||| ofstream file_out;
||| file_out.open
|||     ("fio_binary.out", ios::binary);
||| /* ... */
||| file_out.write( (char*) (&number), 4);
```

Output

[io] fiobin:

```
echo 25 | ./fiobin ; \
od fio_binary.out
A number please: Written.
00000000 000031 000000
00000004
```

For the source of this example, see section [13.6.11](#)

13.3 Output your own classes

You have used statements like:

```
cout << "My value is: " << myvalue << endl;
```

How does this work? The ‘double less’ is an operator with a left operand that is a stream, and a right operand for which output is defined; the result of this operator is again a stream. Recursively, this means you can chain any number of applications of << together.

Redefine less-less

If you want to output a class that you wrote yourself, you have to define how the << operator deals with your class.

```
class container {
/* ... */
int value() const {
/* ... */
};
/* ... */
ostream &operator<<(ostream &os, const container &i) {
    os << "Container: " << i.value();
    return os;
};
/* ... */
container eye(5);
cout << eye << endl;
```

13.4 Output buffering

In C, the way to get a newline in your output was to include the character \n in the output. This still works in C++, and at first it seems there is no difference with using endl. However, endl does more than breaking the output line: it performs a std::flush.

Output is usually not immediately written to screen or disc or printer: it is saved up in buffers. This can be for efficiency, because output a single character may have a large overhead, or it may be because the device is busy doing something else, and you don’t want your program to hang waiting for the device to free up.

However, a problem with buffering is the output on the screen may lag behind the actual state of the program. In particular, if your program crashes before it prints a certain message, does it mean that it crashed before it got to that line, or does it mean that the message is hanging in a buffer.

This sort of output, that absolutely needs to be handled when the statement is called, is often called *logging* output. The fact that `endl` does a flush would mean that it would be good for logging output. However, it also flushes when not strictly necessary. In fact there is a better solution: `std::cerr` works just like `cout`, except it doesn't buffer the output.

In other words, use `cout` for regular output, `cerr` for logging output, and use `\n` instead of `endl`.

13.5 Input

Better terminal input

It is better to use `getline`. This returns a string, rather than a value, so you need to convert it with the following bit of magic:

```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;
#include <sstream>
using std::stringstream;
/* ... */
std::string saymany;
int howmany;

cout << "How many times? ";
getline( cin, saymany );
stringstream saidmany(saymany);
saidmany >> howmany;
```

You can not use `cin` and `getline` in the same program.

More info: <http://www.cplusplus.com/forum/articles/6046/>.

13.5.1 File input

File input streams

Input file stream, method `open`, then use `getline` to read one line at a time:

```
#include <fstream>
using std::ifstream;
/* ... */
ifstream input_file;
input_file.open("fox.txt");
string oneline;
while (getline(input_file, oneline)) {
    cout << "Got line: <<" << oneline << ">>" << endl;
}
```

End of file test

There are several ways of testing for the end of a file

- For text files, the `getline` function returns `false` if no line can be read.
- The `eof` function can be used after you have done a read.
- `EOF` is a return code of some library functions; it is not true that a file ends with an EOT character. Likewise you can not assume a Control-D or Control-Z at the end of the file.

Exercise 13.2. Put the following text in a file:

```
the quick brown fox  
jummps over the  
lazy dog.
```

Open the file, read it in, and count how often each letter in the alphabet occurs in it

Advanced note: You may think that `getline` always returns a `bool`, but that's not true. It actually returns an `ifstream`. However, a conversion operator

```
explicit operator bool() const;
```

exists for anything that inherits from `basic_ios`.

13.5.2 Input streams

Test, mostly for file streams: `is_eof` `is_open`

13.6 Sources used in this chapter

13.6.1 Listing of code/io/cunformat

```
*****  
**** This file belongs with the course  
**** Introduction to Scientific Programming in C++/Fortran2003  
**** copyright 2017/8 Victor Eijkhout eijkhout@tacc.utexas.edu  
****  
**** cunformat.cxx : default formatting  
****  
*****  
  
#include <iostream>  
using std::cout;  
using std::endl;  
  
int main() {  
  
    //codesnippet cunformat  
    for (int i=1; i<200000000; i+=10)  
        cout << "Number: " << i << endl;  
    cout << endl;  
    //codesnippet end  
  
    return 0;  
}
```

13.6.2 Listing of code/io/width

```

/*
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2017/8 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** width.cxx : setting output width
*****
***** */

#include <iostream>
using std::cout;
using std::endl;
#include <iomanip>
using std::right;
using std::setbase;
using std::setfill;
using std::setw;

int main() {

    //codesnippet formatwidth6
    cout << "Width is 6:" << endl;
    for (int i=1; i<200000000; i*=10)
        cout << "Number: "
            << setw(6) << i << endl;
    cout << endl;

    cout << "Width is 6:" << endl;
    cout << "."
        << setw(6) << 1 << 2 << 3 << endl;
    cout << endl;
    //codesnippet end

    return 0;
}

```

13.6.3 Listing of code/io/formatpad

```

/*
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2017/8 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** formatpad.cxx : padded io
*****
***** */

#include <iostream>
using std::cout;
using std::endl;
//codesnippet formatpad
#include <iomanip>
using std::setfill;
using std::setw;
//codesnippet end

```

```
int main() {  
  
    //codesnippet formatpad  
    for (int i=1; i<2000000000; i*=10)  
        cout << "Number: "  
            << setfill('.')  
            << setw(6) << i  
            << endl;  
    //codesnippet end  
  
    return 0;  
}
```

13.6.4 Listing of code/io/formatleft

```
*****  
**** This file belongs with the course  
**** Introduction to Scientific Programming in C++/Fortran2003  
**** copyright 2017/8 Victor Eijkhout eijkhout@tacc.utexas.edu  
****  
**** formatleft.cxx : left aligned io  
****  
*****  
  
#include <iostream>  
using std::cin;  
using std::cout;  
using std::endl;  
//codesnippet formatleft  
#include <iomanip>  
using std::left;  
using std::setfill;  
using std::setw;  
//codesnippet end  
  
int main() {  
  
    //codesnippet formatleft  
    for (int i=1; i<2000000000; i*=10)  
        cout << "Number: "  
            << left << setfill('.')  
            << setw(6) << i << endl;  
    //codesnippet end  
    cout << endl;  
  
    return 0;  
}
```

13.6.5 Listing of code/io/format16

```
*****  
**** This file belongs with the course  
**** Introduction to Scientific Programming in C++/Fortran2003  
**** copyright 2017/8 Victor Eijkhout eijkhout@tacc.utexas.edu
```

```
*****
**** format16.cxx : base 16 formatted io
*****
***** *****
****

#include <iostream>
using std::cout;
using std::endl;
//codesnippet format16
#include <iomanip>
using std::setbase;
using std::setfill;
//codesnippet end

int main() {

    //codesnippet format16
    cout << setbase(16) << setfill(' ');
    for (int i=0; i<16; i++) {
        for (int j=0; j<16; j++)
            cout << i*16+j << " ";
        cout << endl;
    }
    //codesnippet end

    return 0;
}
```

13.6.6 Listing of code/pointer/coutpoint

```
/*****
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2017-9 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** coutpoint.cxx : print a pointer
*****
***** *****
****

#include <iostream>
using std::cin;
using std::cout;
using std::endl;

int main() {

    //codesnippet coutpoint
    int i;
    cout << "address of i, decimal: "
        << (long)&i << endl;
    cout << "address of i, hex     : "
        << std::hex << &i << endl;
    //codesnippet end

    return 0;
}
```

13.6.7 Listing of code/io/formatfloat

```

/*****
 **** This file belongs with the course
 **** Introduction to Scientific Programming in C++/Fortran2003
 **** copyright 2017/8 Victor Eijkhout eijkhout@tacc.utexas.edu
 ****
 **** formatfloat.cxx : floating point output
 ****
 ****/



#include <iostream>
using std::cin;
using std::cout;
using std::endl;
//codesnippet formatfloat
#include <iomanip>
using std::left;
using std::setfill;
using std::setw;
using std::setprecision;
//codesnippet end

int main() {

    float x;
    //codesnippet formatfloat
    x = 1.234567;
    for (int i=0; i<10; i++) {
        cout << setprecision(4) << x << endl;
        x *= 10;
    }
    //codesnippet end

    return 0;
}

```

13.6.8 Listing of code/io/fix

```

/*****
 **** This file belongs with the course
 **** Introduction to Scientific Programming in C++/Fortran2003
 **** copyright 2018 Victor Eijkhout eijkhout@tacc.utexas.edu
 ****
 **** fix.cxx : fixed precision io
 ****
 ****/



#include <iostream>
using std::cin;
using std::cout;
using std::endl;

#include <iomanip>
using std::fixed;
using std::setprecision;

```

```
using std::setw;

int main() {

    double x;
    //codesnippet fixfrac
    x = 1.234567;
    cout << fixed;
    for (int i=0; i<10; i++) {
        cout << setprecision(4) << x << endl;
        x *= 10;
    }
    //codesnippet end

    return 0;
}
```

13.6.9 Listing of code/io/align

```
/*********************************************
*****
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2018 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** fix.cxx : fixed precision io
*****
********************************************/

#include <iostream>
using std::cin;
using std::cout;
using std::endl;

#include <iomanip>
using std::fixed;
using std::setprecision;
using std::setw;

int main() {

    double x;
    //codesnippet align
    x = 1.234567;
    cout << fixed;
    for (int i=0; i<10; i++) {
        cout << setw(10) << setprecision(4) << x
            << endl;
        x *= 10;
    }
    //codesnippet end

    return 0;
}
```

13.6.10 Listing of code/io/fio

13. Input/output

```
/*
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2016/8 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** fio.cxx : file io
*****
*****
```

```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;
#include <iomanip>
using std::right;
using std::setbase;
using std::setfill;
using std::setw;

//codesnippet fio
#include <fstream>
using std::ofstream;
//codesnippet end

int main() {

    //codesnippet fio
    ofstream file_out;
    file_out.open("fio_example.out");
    //codesnippet end

    int number;
    cout << "A number please: ";
    cin >> number;
    cout << endl;
    //codesnippet fio
    file_out << number << endl;
    file_out.close();
    //codesnippet end
    cout << "Written." << endl;

    return 0;
}
```

13.6.11 Listing of code/io/fiobin

```
/*
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2017/8 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** fiobin.cxx : binary file io
*****
*****
```

```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;
#include <iomanip>
using std::right;
using std::setbase;
using std::setfill;
using std::setw;

#include <fstream>
using std::ofstream;
using std::ios;

int main() {

    //codesnippet fiobin
    ofstream file_out;
    file_out.open
        ("fio_binary.out", ios::binary);
    //codesnippet end

    int number;
    cout << "A number please: ";
    cin >> number;
    // file_out << number ;
    //codesnippet fiobin
    file_out.write( (char*)(&number), 4);
    //codesnippet end
    file_out.close();
    cout << "Written." << endl;

    return 0;
}
```


Chapter 14

References

14.1 Reference

This section contains further facts about references, which you have already seen as a mechanism for parameter passing; section 7.4.2. Make sure you study that material first.

Passing a variable to a routine passes the value; in the routine, the variable is local.

```
|| void change_scalar(int i) {
    i += 1;
}
/* ...
number = 3;
cout << "Number is 3: "
    << number << endl;
change_scalar(number);
cout << "is it still 3? Let's see: "
    << number << endl;
```

If you do want to make the change visible in the *calling environment*, use a reference:

```
|| void change_scalar_by_reference(int &i) { i += 1; }
```

There is no change to the calling program. (Some people who are used to C find this bad, since you can not see from the use of a function whether it passes *by reference* or *by value*.)

14.2 Pass by reference

If you use a mathematical style of subprograms, where some values go in, and a new entity comes out, in effect all the inputs can be copied. This style is called *functional programming*, and there is much to be said for it. For instance, it makes it possible for the compiler to reason about your program. The only thing you have to worry about is the cost of copying, if the inputs are of non-trivial size, such as arrays.

However, sometimes you want to alter the inputs, so instead of a copy you need a way of accessing the actual input object. That's what *references* are invented for: to allow a subprogram access to the actual input entity.

A bonus of using references is that you do not incur the cost of copying. So what if you want this efficiency, but your program is really functional in design? Then you can use a *const reference*: the

14. References

argument is passed by reference, but you indicate explicitly that the subprogram does not alter it, again allowing compiler optimizations.

Reference: change argument

A reference makes the function parameter a synonym of the argument.

```
|| void f( int &i ) { i += 1; }
|| int main() {
||     int i = 2;
||     f(i); // makes it 3
```

Reference: save on copying

```
|| class BigDude {
|| public:
||     vector<double> array(5000000);
|| }
|
|| void f(BigDude d) {
||     cout << d.array[0];
|| }
|
|| int main() {
||     BigDude big;
||     f(big); // whole thing is copied
```

Instead write:

```
|| void f( BigDude &thing ) { .... };
```

Prevent changes:

```
|| void f( const BigDude &thing ) { .... };
```

14.3 Reference to class members

Here is the naive way of returning a class member:

```
|| class Object {
|| private:
||     SomeType thing;
|| public:
||     SomeType get_thing() {
||         return thing; };
|| };
```

The problem here is that the return statement makes a copy of `thing`, which can be expensive. Instead, it is better to return the member by *reference*:

```
||     SomeType &get_thing() {
||         return thing; };
```

The problem with this solution is that the calling program can now alter the private member. To prevent that, use a *const reference*:

Code:

```
class has_int {
private:
    int mine{1};
public:
    const int& int_to_get() { return mine; };
    int& int_to_set() { return mine; };
    void inc() { mine++; };
};

/* ...
has_int an_int;
an_int.inc(); an_int.inc(); an_int.inc();
cout << "Contained int is now: "
     << an_int.int_to_get() << endl;
/* Compiler error: an_int.int_to_get() = 5; */
an_int.int_to_set() = 17;
cout << "Contained int is now: "
     << an_int.int_to_get() << endl;
```

Output**[const] constref:**

Contained int is now: 4
Contained int is now: 17

For the source of this example, see section [17.8.1](#)

In the above example, the function giving a reference was used in the left-hand side of an assignment. If you would use it on the right-hand side, you would not get a reference. The result of an expression can not be a reference.

Let's again make a class where we can get a reference to the internals:

```
class myclass {
private:
    int stored{0};
public:
    myclass(int i) : stored(i) {};
    int &data() { return stored; };
};
```

Now we explore various ways of using that reference on the right-hand side:

Code:

```
myclass obj(5);
cout << "object data: "
    << obj.data() << endl;
int dcopy = obj.data();
dcopy++;
cout << "object data: "
    << obj.data() << endl;
int &dref = obj.data();
dref++;
cout << "object data: "
    << obj.data() << endl;
auto dauto = obj.data();
dauto++;
cout << "object data: "
    << obj.data() << endl;
auto &aref = obj.data();
aref++;
cout << "object data: "
    << obj.data() << endl;
```

Output**[func] rhsref:**

```
object data: 5
object data: 5
object data: 6
object data: 6
object data: 7
```

For the source of this example, see section [14.6.2](#)

(On the other hand, after `const auto &ref` the reference is not modifiable. This variant is useful if you want read-only access, without the cost of copying.)

You see that, despite the fact that the method `data` was defined as returning a reference, you still need to indicate whether the left-hand side is a reference.

See section [17.1](#) for the interaction between `const` and references.

14.4 Reference to array members

You can define various operator, such as `+-* /` arithmetic operators, to act on classes, with your own provided implementation; see section [10.4.5](#). You can also define the parentheses and square brackets operators, so make your object look like a function or an array respectively.

These mechanisms can also be used to provide safe access to arrays and/or vectors that are private to the object.

Suppose you have an object that contains an `int` array. You can return an element by defining the subscript (square bracket) operator for the class:

```
class vector10 {
private:
    int array[10];
public:
    /* ... */
    int operator()(int i) {
        return array[i];
    };
    int operator[](int i) {
        return array[i];
    };
};
```

```

    } ;
    /* ... */
vector10 v;
cout << v(3) << endl;
cout << v[2] << endl;
/* compilation error: v(3) = -2; */

```

Note that `return array[i]` will return a copy of the array element, so it is not possible to write

```
|| myobject[5] = 6;
```

For this we need to return a reference to the array element:

```

int& operator[](int i) {
    return array[i];
};
/* ... */
cout << v[2] << endl;
v[2] = -2;
cout << v[2] << endl;

```

Your reason for wanting to return a reference could be to prevent the *copy of the return result* that is induced by the `return` statement. In this case, you may not want to be able to alter the object contents, so you can return a *const reference*:

```

const int& operator[](int i) {
    return array[i];
};
/* ... */
cout << v[2] << endl;
/* compilation error: v[2] = -2; */

```

14.5 rvalue references

See the chapter about obscure stuff; section 24.5.3.

14.6 Sources used in this chapter

14.6.1 Listing of code/const/constref

```

*****
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2016-8 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** constref.cxx : returning a const by ref
*****
***** */

```

```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

//codesnippet constref
class has_int {
private:
    int mine{1};
public:
    const int& int_to_get() { return mine; }
    int& int_to_set() { return mine; }
    void inc() { mine++; }
};

//codesnippet end

int main() {

//codesnippet constref
    has_int an_int;
    an_int.inc(); an_int.inc(); an_int.inc();
    cout << "Contained int is now: "
        << an_int.int_to_get() << endl;
    /* Compiler error: an_int.int_to_get() = 5; */
    an_int.int_to_set() = 17;
    cout << "Contained int is now: "
        << an_int.int_to_get() << endl;
//codesnippet end

    return 0;
}
```

14.6.2 Listing of code/func/rhsref

```
*****
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2018 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** rhsref.cxx : result of an expression can not be reference
*****
*****
```

```
#include <iostream>
using std::cout;
using std::endl;

//codesnippet rhsrefclass
class myclass {
private:
    int stored{0};
public:
    myclass(int i) : stored(i) {};
    int &data() { return stored; };
};

//codesnippet end
```

```
int main() {  
  
    //codesnippet rhsref  
    myclass obj(5);  
    cout << "object data: "  
        << obj.data() << endl;  
    int dcopy = obj.data();  
    dcopy++;  
    cout << "object data: "  
        << obj.data() << endl;  
    int &dref = obj.data();  
    dref++;  
    cout << "object data: "  
        << obj.data() << endl;  
    auto dauto = obj.data();  
    dauto++;  
    cout << "object data: "  
        << obj.data() << endl;  
    auto &aref = obj.data();  
    aref++;  
    cout << "object data: "  
        << obj.data() << endl;  
    //codesnippet end  
  
    return 0;  
}
```


Chapter 15

Pointers

Pointers are an indirect way of associating an entity with a variable name. Consider for instance self-referential data structures:

A list is a node that functions as the head, and which has a tail that is a list.

Recursive data structures

```
|| class Node {  
||     private:  
||         int value;  
||         Node tail;  
||         /* ... */  
||     };
```

This does not work: would take infinite memory.

```
|| class Node {  
||     private:  
||         int value;  
||         PointToNode tail;  
||         /* ... */  
||     };
```

Pointer ‘points’ to the location of the tail.

This chapter will explain C++ *smart pointers*, and give some uses for them.

15.1 The ‘arrow’ notation

Members from pointer

- If `x` is object with member `y`:

`x.y`

- If `xx` is pointer to object with member `y`:

`xx->y`

- In class methods `this` is a pointer to the object, so:

```
|| class x {  
||     int y;  
||     x(int v) {  
||         this->y = v; }  
|| }
```

- Arrow notation works with old-style pointers and new shared/unique pointers.

15.2 Making a shared pointer

Smart pointers are used the same way as old-style pointers in C. If you have an object `obj x` with a member `y`, you access that with `x.y`; if you have a pointer `x` to such an object, you write `x->y`.

So what is the type of this latter `x` and how did you create it?

Creating a shared pointer

Allocation and pointer in one:

```
|| shared_ptr<Obj> X =
||   make_shared<Obj>( /* constructor args */ );
||   // or:
|| auto X = make_shared<Obj>( /* args */ );
|| X->method_or_member;
```

Headers for smart pointers

Using shared pointers requires at the top of your file:

```
|| #include <memory>
|| using std::shared_ptr;
|| using std::make_shared;
```

Simple example

Code:

```
|| class HasX {
|| private:
||   double x;
|| public:
||   HasX( double x ) : x(x) {};
||   auto &val() { return x; };
|| };
```



```
|| int main() {
||   auto X = make_shared<HasX>(5);
||   cout << X->val() << endl;
||   X->val() = 6;
||   cout << X->val() << endl;
|| }
```

Output
[pointer] pointx:

5
6

For the source of this example, see section [15.7.1](#)

Pointers to arrays

The constructor syntax is a little involved for vectors:

```
|| auto x = make_shared<vector<double>>(vector<double>{1.1, 2.2});
```

15.2.1 Pointers and arrays

Linked lists

The prototypical example use of pointers is in linked lists. Let a class `Node` be given:

```

class Node {
private:
    int datavalue{0};
    shared_ptr<Node> tail_ptr=nullptr;
public:
    Node() {}
    Node(int value) { datavalue = value; };
    void set_tail( shared_ptr<Node> tail ) {
        tail_ptr = tail; };
};

void print() {
    cout << datavalue;
    if (has_next()) {
        cout << ", " ; tail_ptr->print();
    }
};

```

List usage

Example use:

Code:

```

auto
first = make_shared<Node>(23),
second = make_shared<Node>(45);
first->set_tail(second);
cout << "List length: "
     << first->list_length() << endl;
first->print();

```

Output
[tree] simple:

List <<23,45>> has length 2

Linked lists and recursion

Many operations on linked lists can be done recursively:

```

int Node::list_length() {
    if (!has_next()) return 1;
    else return 1+tail_ptr->list_length();
};

```

Exercise 15.1. Write a recursive `append` method that appends a node to the end of a list:

Code:

```

auto
first = make_shared<Node>(23),
second = make_shared<Node>(45),
third = make_shared<Node>(32);
first->append(second);
first->append(third);
first->print();

```

Output
[tree] append:

Append 23 & 45 gives <<23,45>>
Append 32 gives <<23,45,32>>Exercise 15.2. Write a recursive `insert` method that inserts a node in a list, such that the list stays sorted:

Code:

```

auto
first = make_shared<Node>(23),
second = make_shared<Node>(45),
third = make_shared<Node>(32);
first->insert(second);
first->insert(third);
first->print();

```

Output
[tree] insert:

Insert 45 on 23 gives <<23,45>>
Insert 32 gives <<23,32,45>>

Exercise 15.3. For a more sophisticated approach to linked lists, do the exercises in section 53.1.2.

Exercise 15.4. If you are doing the prime numbers project (chapter 41) you can now do exercise 41.8.2.

15.2.2 Smart pointers versus address pointers

Pointers don't go with addresses

The oldstyle `&y` address pointer can not be made smart:

```
|| auto
  || p = shared_ptr<HasY>( &y );
  || p->y = 3;
  || cout << "Pointer's y: "
    << p->y << endl;
```

gives:

```
address(56325,0x7fff977cc380) malloc: *** error for object
0x7ffeeb9caf08: pointer being freed was not allocated
```

Smart pointers are much better than old style pointers

```
|| Obj *X;
|| *X = Obj( /* args */ );
```

There is a final way of creating a shared pointer where you cast an old-style `new` object to shared pointer

```
|| auto p = shared_ptr<Obj>( new Obj );
```

This is not the preferred mode of creation, but it can be useful in the case of *weak pointers*; section 15.5.4.

15.3 Garbage collection

The big problem with C-style pointers is the chance of a *memory leak*. If a pointer to a block of memory goes out of scope, the block is not returned to the Operating System (OS), but it is no longer accessible.

```
// the variable 'array' doesn't exist
{
    // attach memory to 'array':
    double *array = new double[25];
    // do something with array
}
// the variable 'array' does not exist anymore
// but the memory is still reserved.
```

Shared and unique pointers do not have this problem: if they go out of scope, or are overwritten, the destructor on the object is called, thereby releasing any allocated memory.

An example.

Reference counting illustrated

We need a class with constructor and destructor tracing:

```
|| class thing {
public:
    thing() { cout << "... calling constructor\n"; };
    ~thing() { cout << "... calling destructor\n"; };
};
```

Pointer overwrite

Let's create a pointer and overwrite it:

Code:

```
cout << "set pointer1"
     << endl;
auto thing_ptr1 =
    make_shared<thing>();
cout << "overwrite pointer"
     << endl;
thing_ptr1 = nullptr;
```

Output

[pointer] ptr1:
set pointer1
.. calling constructor
overwrite pointer
.. calling destructor

For the source of this example, see section [15.7.2](#)

However, if a pointer is copied, there are two pointers to the same block of memory, and only when both disappear, or point elsewhere, is the object deallocated.

Pointer copy

Code:

```
cout << "set pointer2" << endl;
auto thing_ptr2 =
    make_shared<thing>();
cout << "set pointer3 by copy"
     << endl;
auto thing_ptr3 = thing_ptr2;
cout << "overwrite pointer2"
     << endl;
thing_ptr2 = nullptr;
cout << "overwrite pointer3"
     << endl;
thing_ptr3 = nullptr;
```

Output

[pointer] ptr2:
set pointer2
.. calling constructor
set pointer3 by copy
overwrite pointer2
overwrite pointer3
.. calling destructor

For the source of this example, see section [15.7.3](#)

15.4 More about pointers

15.4.1 Get the pointed data

Most of the time, accessing the target of the pointer through the arrow notation is enough. However, if you actually want the object, you can get it with `get`. Note that this does not give you the pointed object, but a traditional pointer.

Getting the underlying pointer

```
X->y;
// is the same as
X.get()->y;
// is the same as
( *X.get() ).y;
```

Code:

```
|| auto Y = make_shared<HasY>(5);
|| cout << Y->y << endl;
|| Y.get()->y = 6;
|| cout << (*Y.get()) .y << endl;
```

Output

[pointer] pointy:	
5	
6	

For the source of this example, see section [15.7.4](#)

15.5 Advanced topics

15.5.1 Unique pointers

Shared pointers are fairly easy to program, and they come with lots of advantages, such as the automatic memory management. However, they have more overhead than strictly necessary because they have a *reference count* mechanism to support the memory management. Therefore, there exists a *unique pointer*, `unique_ptr`, for cases where an object will only ever be ‘owned’ by one pointer. In that case, you can use a C-style *bare pointer* for non-owning references.

15.5.2 Base and derived pointers

Suppose you have base and derived classes:

```
|| class A {};
|| class B : public A {};
```

Just like you could assign a `B` object to an `A` variable:

```
|| B b_object;
|| A a_object = b_object;
```

is it possible to assign a `B` pointer to an `A` pointer?

The following construct makes this possible:

```
|| auto a_ptr = shared_pointer<A> ( make_shared<B> () );
```

Note: this is better than

```
|| auto a_ptr = shared_pointer<A> ( new B () );
```

Again a reason we don’t need `new` anymore!

15.5.3 Shared pointer to ‘this’

Inside an object method, the object is accessible as `this`. This is a pointer in the classical sense. So what if you want to refer to ‘this’ but you need a shared pointer?

For instance, suppose you’re writing a linked list code, and your `node` class has a method `prepend_or_append` that gives a shared pointer to the new head of the list.

Your code would start something like this, handling the case where the new node is appended to the current:

```

|| shared_pointer<node> node::append
||     ( shared_ptr<node> other ) {
||     if (other->value>this->value) {
||         this->tail = other;
||     }
|| }

```

But now you need to return this node, as a shared pointer. But `this` is a `node*`, not a `shared_ptr<node>`.

The solution here is that you can return

```

||     return this->shared_from_this();

```

if you have defined your node class to inherit from what probably looks like magic:

```

|| class node : public enable_shared_from_this<node>

```

15.5.4 Weak pointers

In addition to shared and unique pointers, which own an object, there is also `weak_ptr` which creates a *weak pointer*. This pointer type does not own, but at least it knows when it dangles.

```

|| weak_ptr<R> wp;
|| shared_ptr<R> sp( new R );
|| sp->call_member();
|| wp = sp;
|| // access through new shared pointer:
|| auto p = wp.lock();
|| if (p) {
||     p->call_member();
|| }
|| if (!wp.expired()) { // not thread-safe!
||     wp.lock()->call_member();
|| }

```

There is a subtlety with weak pointers and shared pointers. The call

```

|| auto sp = shared_ptr<Obj>( new Obj );

```

creates first the object, then the ‘control block’ that counts owners. On the other hand,

```

|| auto sp = make_shared<Obj>();

```

does a single allocation for object and control block. However, if you have a weak pointer to such a single object, it is possible that the object is destructed, but not de-allocated. On the other hand, using

```

|| auto sp = shared_ptr<Obj>( new Obj );

```

creates the control block separately, so the pointed object can be destructed and de-allocated. Having a weak pointer to it means that only the control block needs to stick around.

15.5.5 Null pointer

In C there was a macro `NULL` that, only by convention, was used to indicate *null pointers*: pointers that do not point to anything. C++ has the `nullptr`, which is an object of type `std::nullptr_t`.

There are some scenarios where this is useful, for instance, with polymorphic functions:

```
|| void f(int);
|| void f(int*);
```

Calling `f(ptr)` where the point is `NULL`, the first function is called, whereas with `nullptr` the second is called.

15.5.6 Opaque pointer

The need for *opaque pointers* `void*` is a lot less in C++ than it was in C. For instance, contexts can often be modeled with captures in closures (chapter 24.3). If you really need a pointer that does not *a priori* know what it points to, use `std::any`, which is usually smart enough to call destructors when needed.

Code:

Code:	Output [pointer] any:
<pre> std::any a = 1; cout << a.type().name() << ":" << std::any_cast<int>(a) << endl; a = 3.14; cout << a.type().name() << ":" << std::any_cast<double>(a) << endl; a = true; cout << a.type().name() << ":" << std::any_cast<bool>(a) << endl; try { a = 1; cout << std::any_cast<float>(a) << endl; } catch (const std::bad_any_cast& e) { cout << e.what() << endl; }</pre>	<pre>d: 3.14 bad any cast</pre>

For the source of this example, see section 15.7.5

15.5.7 Pointers to non-objects

In the introduction to this chapter we argued that many of the uses for pointers that existed in C have gone away in C++, and the main one left is the case where multiple objects share ‘ownership’ of some other object.

You can still make shared pointers to scalar data, for instance to an array of scalars. You then get the advantage of the memory management, but you do not get the `size` function and such that you would have if you’d used a `vector` object.

Here is an example of a pointer to a solitary double:

Code:

Code:	Output [pointer] ptrdouble:
<pre>// shared pointer to allocated double auto array = std::shared_ptr<double>(&new double);² double *ptr = array.get(); array.get()[0] = 2.0; cout << ptr[0] << endl;</pre>	<pre>2.0</pre>

For the source of this example, see section 15.7.7

It is possible to initialize that double:

Code:

```
// shared pointer to initialized double
auto array = make_shared<double>(50);
double *ptr = array.get();
cout << ptr[0] << endl;
```

Output

```
[pointer] ptrdoubleinit:  
50
```

For the source of this example, see section [15.7.7](#)

15.6 Smart pointers vs C pointers

We remark that there is less need for pointers in C++ than there was in C.

- To pass an argument *by reference*, use a *reference*. Section [7.4](#).
- Strings are done through `std::string`, not character arrays; see [12](#).
- Arrays can largely be done through `std::vector`, rather than `malloc`; see [11](#).
- Traversing arrays and vectors can be done with ranges; section [11.2](#).
- Anything that obeys a scope should be created through a *constructor*, rather than using `malloc`.

Legitimate needs:

- Linked lists and Directed Acyclic Graphs (DAGs); see the example in section [53.1.2](#).
- Objects on the heap.
- Use `nullptr` as a signal.

15.7 Sources used in this chapter

15.7.1 Listing of code(pointer/pointx)

```
*****
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2017/8 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** pointx.cxx : access through arrow
*****
*****
```

```
#include <iostream>
using std::cout;
using std::endl;

#include <memory>
using std::make_shared;

//codesnippet pointx
class HasX {
private:
    double x;
public:
    HasX( double x ) : x(x) {};
    auto &val() { return x; };
}
```

```
    } ;

int main() {
    auto X = make_shared<HasX>(5);
    cout << X->val() << endl;
    X->val() = 6;
    cout << X->val() << endl;
    //codesnippet end
}
```

15.7.2 Listing of code/pointer/ptr1

```
/*
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2017/8 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** ptr1.cxx : shared pointers
*****
***** */

#include <iostream>
using std::cout;
using std::endl;

#include <memory>
using std::shared_ptr;
using std::make_shared;

//codesnippet thingcall
class thing {
public:
    thing() { cout << "... calling constructor\n"; };
    ~thing() { cout << "... calling destructor\n"; };
};

//codesnippet end

int main() {

    //codesnippet shareptr1
    cout << "set pointer1"
        << endl;
    auto thing_ptr1 =
        make_shared<thing>();
    cout << "overwrite pointer"
        << endl;
    thing_ptr1 = nullptr;
    //codesnippet end

#if 0
    // alternatively
    auto thing_ptr1 = shared_ptr<thing>( new thing );
#endif

    return 0;
}
```

15.7.3 Listing of code/pointer/ptr2

```

/*****
 **** This file belongs with the course
 **** Introduction to Scientific Programming in C++/Fortran2003
 **** copyright 2017/8 Victor Eijkhout eijkhout@tacc.utexas.edu
 ****
 **** ptr2.hxx : shared pointers
 ****
 ****
#include <iostream>
using std::cout;
using std::endl;

#include <memory>
using std::shared_ptr;
using std::make_shared;

class thing {
public:
    thing() { cout << "... calling constructor\n"; };
    ~thing() { cout << "... calling destructor\n"; };
};

int main() {

    //codesnippet shareptr2
    cout << "set pointer2" << endl;
    auto thing_ptr2 =
        make_shared<thing>();
    cout << "set pointer3 by copy"
        << endl;
    auto thing_ptr3 = thing_ptr2;
    cout << "overwrite pointer2"
        << endl;
    thing_ptr2 = nullptr;
    cout << "overwrite pointer3"
        << endl;
    thing_ptr3 = nullptr;
    //codesnippet end

#if 0
    // alternatively
    auto thing_ptr2 =
        shared_ptr<thing>
        ( new thing );
#endif

    return 0;
}

```

15.7.4 Listing of code/pointer/poinky

```

/*****
 ****
 **** This file belongs with the course
 ****
 ****
****
```

```
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2017/8 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** pointx.cxx : access through arrow
*****
***** ****
#include <iostream>
using std::cout;
using std::endl;

#include <memory>
using std::make_shared;

class HasY {
public:
    double y;
    HasY( double y ) : y(y) {};
};

int main() {
//codesnippet pointy
auto Y = make_shared<HasY>(5);
cout << Y->y << endl;
Y.get()->y = 6;
cout << (*Y.get()).y << endl;
//codesnippet end
}
```

15.7.5 Listing of code/pointer/any

```
***** ****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2019 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** any.cxx : instead of opaque pointers
*****
***** ****
#include <any>
#include <iostream>
using std::cout;
using std::endl;

int main()
{
    cout << std::boolalpha;

//codesnippet opaqueany
std::any a = 1;
cout << a.type().name() << ":" << std::any_cast<int>(a) << endl;
a = 3.14;
cout << a.type().name() << ":" << std::any_cast<double>(a) << endl;
a = true;
cout << a.type().name() << ":" << std::any_cast<bool>(a) << endl;
```

```

try {
    a = 1;
    cout << std::any_cast<float>(a) << endl;
} catch (const std::bad_any_cast& e) {
    cout << e.what() << endl;
}
//codesnippet end

return 0;
}

```

15.7.6 Listing of code/pointer/ptrdouble

```

//*********************************************************************
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2017-9 Victor Eijkhout eijkhout@tacc.utexas.edu
****

**** ptrdouble.cxx : shared pointers to scalar
****

//********************************************************************

#include <iostream>
using std::cout;
using std::endl;

#include <memory>
using std::shared_ptr;
using std::make_shared;

int main() {

    cout << "Double" << endl;
    {
        //codesnippet ptrdouble
        // shared pointer to allocated double
        auto array = make_shared<double>( new double );
        double *ptr = array.get();
        array.get()[0] = 2.;
        cout << ptr[0] << endl;
        //codesnippet end
    }
    cout << "double" << endl;
    cout << "Init" << endl;
    {
        //codesnippet ptrdoubleinit
        // shared pointer to initialized double
        auto array = make_shared<double>(50);
        double *ptr = array.get();
        cout << ptr[0] << endl;
        //codesnippet end
    }
    cout << "init" << endl;
}

```

```
    } return 0;
```

15.7.7 Listing of code/pointer/ptrdouble

```
/******
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2017-9 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** ptrdouble.cxx : shared pointers to scalar
*****
***** */

#include <iostream>
using std::cout;
using std::endl;

#include <memory>
using std::shared_ptr;
using std::make_shared;

int main() {

    cout << "Double" << endl;
    {
        //codesnippet ptrdouble
        // shared pointer to allocated double
        auto array = shared_ptr<double>( new double );
        double *ptr = array.get();
        array.get()[0] = 2.;
        cout << ptr[0] << endl;
        //codesnippet end
    }
    cout << "double" << endl;
    cout << "Init" << endl;
    {
        //codesnippet ptrdoubleinit
        // shared pointer to initialized double
        auto array = make_shared<double>(50);
        double *ptr = array.get();
        cout << ptr[0] << endl;
        //codesnippet end
    }
    cout << "init" << endl;

    return 0;
}
```

Chapter 16

C-style pointers and arrays

16.1 What is a pointer

The term pointer is used to denote a reference to a quantity. The reason that people like to use C as high performance language is that pointers are actually memory addresses. So you're programming ‘close to the bare metal’ and are in fargoing control over what your program does. C++ also has pointers, but there are fewer uses for them than for C pointers. When possible, references should be used.

16.2 Pointers and addresses, C style

You have learned about variables, and maybe you have a mental concept of variables as ‘named memory locations’. That is not too far of: while you are in the (dynamic) scope of a variable, it corresponds to a fixed memory location.

Exercise 16.1. When does a variable not always correspond to the same location in memory?

There is a mechanism of finding the actual address of a variable: you prefix its name by an ampersand. This address is integer-valued, but its range is actually greater than of the `int` type.

Memory addresses

If you have an

```
|| int i;
```

then `&i` is the address of `i`.

An address is a (long) integer, denoting a memory address. Usually it is rendered in *hexadecimal* notation. C style:

Code:

```
|| int i;
|| printf("address of i: %ld\n",
||         (long) (&i));
|| printf(" same in hex: %lx\n",
||         (long) (&i));
```

Output

[pointer] printfpoint:

```
address of i: 140732657900820
same in hex: 7ffee0151d14
```

For the source of this example, see section [16.8.1](#)

and C++:

Code:

```
|| int i;
|| cout << "address of i, decimal: "
||     << (long)&i << endl;
|| cout << "address of i, hex    : "
||     << std::hex << &i << endl;
```

Output

[pointer] coutpoint:

```
address of i, decimal: 140732736396548
address of i, hex    : 0x7ffee4c2dd04
```

For the source of this example, see section [16.8.2](#)

You could just print out the address of a variable, which is sometimes useful for debugging. If you want to store the address, you need to create a variable of the appropriate type. This is done by taking a type and affixing a star to it.

Address types

The type of ‘`& i`’ is `int*`, pronounced ‘int-star’, or more formally: ‘pointer-to-int’.

You can create variables of this type:

```
|| int i;
|| int* addr = &i;
```

Now if you have have a pointer that refers to an int:

```
|| int i;
|| int *iaddr = &i;
```

you can use (for instance print) that pointer, which gives you the address of the variable. If you want the value of the variable that the pointer points to, you need to *dereference* it.

Dereferencing

Using `*addr` ‘dereferences’ the pointer: gives the thing it points to; the value of what is in the memory location.

Code:

```
|| int i;
|| int* addr = &i;
|| i = 5;
|| cout << *addr << endl;
|| i = 6;
|| cout << *addr << endl;
```



Output

[pointer] cintpointer:


```
5
6
```

For the source of this example, see section [16.8.3](#)

illustration

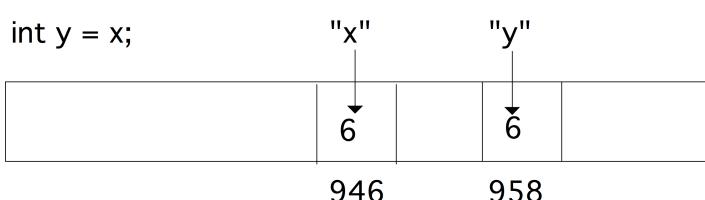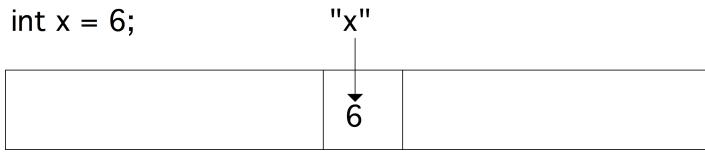

illustration

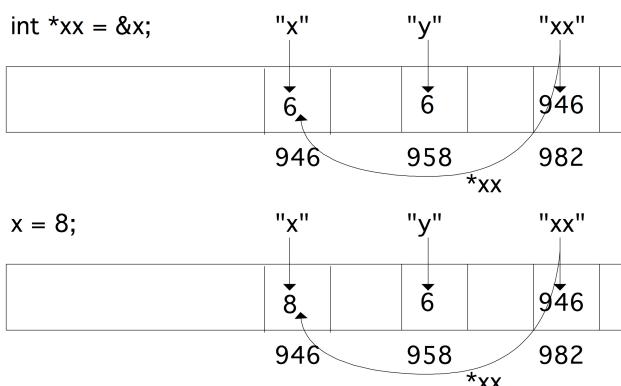

- `addr` is the address of `i`.
- You set `i` to 5; nothing changes about `addr`. This has the effect of writing 5 in the memory location of `i`.
- The first `cout` line dereferences `addr`, that is, looks up what is in that memory location.
- Next you change `i` to 6, that is, you write 6 in its memory location.
- The second `cout` looks in the same memory location as before, and now finds 6.

The syntax for declaring a pointer-to-sometype allows for a small variation, which indicates the two way you can interpret such a declaration.

Star stuff

Equivalent:

- `int* addr`: `addr` is an int-star, or
- `int *addr`: `*addr` is an int.

The notion `int* addr` is equivalent to `int *addr`, and semantically they are also the same: you could say that `addr` is an int-star, or you could say that `*addr` is an int.

16.3 Arrays and pointers

In section 11.8.2 you saw the treatment of static arrays in C++. Examples such as:

```

|| void array_set( double ar[], int idx, double val) {
||     ar[idx] = val;
|| }
|| /* ... */
||     array_set(array,1,3.5);

```

show that, even though all parameters are normally passed by value, that is through copying, array parameters can be altered. The reason for this is that there is no actual array type, and what is passed is a pointer to the first element of the array. So arrays are still passed by value, just not the ‘value of the array’, but the value of its location.

So you could pass an array like this:

```

|| void array_set_star( double *ar, int idx, double val) {
||     ar[idx] = val;
|| }
|| /* ... */
||     array_set_star(array,2,4.2);

```

Array and pointer equivalence

Array and memory locations are largely the same:

Code:

```

|| double array[5] = {11,22,33,44,55};
|| double *addr_of_second = &(array[1]);
|| cout << *addr_of_second << endl;
|| array[1] = 7.77;
|| cout << *addr_of_second << endl;

```

Output
[pointer] arrayaddr:
22
7.77

For the source of this example, see section [16.8.4](#)

Dynamic allocation

`new` gives a something-star:

```

|| double *x;
|| x = new double[27];

```

(Actually, C uses `malloc`, but that looks similar.)

16.4 Pointer arithmetic

Pointer arithmetic

pointer arithmetic uses the size of the objects it points at:

```

|| double *addr_of_element = array;
|| cout << *addr_of_element;
|| addr_of_element = addr_of_element+1;
|| cout << *addr_of_element;

```

Increment add size of the array element, 4 or 8 bytes, not one!

Exercise 16.2. Write a subroutine that sets the i -th element of an array, but using pointer arithmetic: the routine should not contain any square brackets.

16.5 Multi-dimensional arrays

Multi-dimensional arrays

After

```
|| double x[10][20];
```

a row `x[3]` is a `double*`, so is `x` a `double**`?

Was it created as:

```
|| double ***x = new double*[10];
  for (int i=0; i<10; i++)
    x[i] = new double[20];
```

No: multi-d arrays are contiguous.

16.6 Parameter passing

C++ pass by reference

C++ style functions that alter their arguments:

```
|| void inc(int &i) { i += 1; }
int main() {
  int i=1;
  inc(i);
  cout << i << endl;
  return 0;
}
```

C-style pass by reference

In C you can not pass-by-reference like this. Instead, you pass the address of the variable `i` by value:

```
|| void inc(int *i) { *i += 1; }
int main() {
  int i=1;
  inc(&i);
  cout << i << endl;
  return 0;
}
```

Now the function gets an argument that is a memory address: `i` is an `int-star`. It then increases `*i`, which is an `int` variable, by one.

Exercise 16.3. Write another version of the `swap` function:

```
|| void swapij( /* something with i and j */ {
  /* your code */
}
int main() {
  int i=1, j=2;
  swapij( /* something with i and j */ );
  cout << "check that i is 2: " << i << endl;
  cout << "check that j is 1: " << i << endl;
  return 0;
}
```

Hint: write C++ code, then insert stars where needed.

16.6.1 Allocation

In section 11.8.2 you learned how to create arrays that are local to a scope:

Problem with static arrays

```
|| if ( something ) {
||   double ar[25];
|| } else {
||   double ar[26];
|| }
|| ar[0] = // there is no array!
```

The array `ar` is created depending on if the condition is true, but after the conditional it disappears again. The mechanism of using `new` (section 16.6.2) allows you to allocate storage that transcends its scope:

Declaration and allocation

```
|| double *array;
|| if (something) {
||   array = new double[25];
|| } else {
||   array = new double[26];
|| }
```

(Size in doubles, not in bytes as in C)

Memory leak1

```
|| void func() {
||   double *array = new double[large_number];
||   // code that uses array
|| }
|| int main() {
||   func();
|| }
```

- The function allocates memory
- After the function ends, there is no way to get at that memory
- ⇒ *memory leak*.

Memory leaks

```
|| for (int i=0; i<large_num; i++) {
||   double *array = new double[1000];
||   // code that uses array
|| }
```

Every iteration reserves memory, which is never released: another *memory leak*. Your code will run out of memory!

De-allocation

Memory allocated with `new` does not disappear when you leave a scope. Therefore you have to delete the memory explicitly:

```
|| delete(array);
```

The C++ `vector` does not have this problem, because it obeys scope rules.

Stop using C!

No need for `malloc` or `new`

- Use `std::string` for character arrays, and
- `std::vector` for everything else.

No performance hit if you don't dynamically alter the size.

16.6.1.1 Malloc

The keywords `new` and `delete` are in the spirit of C style programming, but don't exist in C. Instead, you use `malloc`, which creates a memory area with a size expressed in bytes. Use the function `sizeof` to translate from types to bytes:

Allocation in C

```
|| int n;
|| double *array;
|| array = malloc( n*sizeof(double) );
|| if (!array)
||   // allocation failed!
```

16.6.1.2 Allocation in a function

The mechanism of creating memory, and assigning it to a ‘star’ variable can be used to allocate data in a function and return it from the function.

Allocation in a function

```
|| void make_array( double **a, int n ) {
||   *a = new double[n];
|| }
|| int main() {
||   double *array;
||   make_array(&array, 17);
|| }
```

Note that this requires a ‘double-star’ or ‘star-star’ argument:

- The variable `a` will contain an array, so it needs to be of type `double*`;
- but it needs to be passed by reference to the function, making the argument type `double**`;
- inside the function you then assign the new storage to the `double*` variable, which is `*a`.

Tricky, I know.

16.6.2 Use of `new`

Before doing this section, make sure you study section 16.3.

There is a dynamic allocation mechanism that is much inspired by memory management in C. Don't use this as your first choice.

Use of `new` uses the equivalence of array and reference.

```
|| void make_array( int **new_array, int length ) {
||     *new_array = new int[length];
|| }
|| /* ... */
|| int *the_array;
|| make_array(&the_array, 10000);
```

Since this is not scoped, you have to free the memory yourself:

```
|| class with_array{
|| private:
||     int *array;
||     int array_length;
|| public:
||     with_array(int size) {
||         array_length = size;
||         array = new int[size];
||     };
||     ~with_array() {
||         delete array;
||     };
||     /* ... */
||     with_array thing_with_array(12000);
```

Notice how you have to remember the array length yourself? This is all much easier by using a `std::vector`. See <http://www.cplusplus.com/articles/37Mf92yv/>.

The `new` mechanism is a cleaner variant of `malloc`, which was the dynamic allocation mechanism in C. Malloc is still available, but should not be used. There are even very few legitimate uses for `new`.

16.7 Memory leaks

Pointers can lead to a problem called *memory leaking*: there is memory that you have reserved, but you have lost the ability to access it.

In this example:

```
|| double *array = new double[100];
|| // ...
|| array = new double[105];
```

memory is allocated twice. The memory that was allocated first is never released, because in the intervening code another pointer to it may have been set. However, if that doesn't happen, the memory is both allocated, and unreachable. That's what memory leaks are about.

16.8 Sources used in this chapter

16.8.1 Listing of code(pointer/printfpoint

```
/*
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2017/8 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** printfpoint.cxx : print a pointer
*****
**** /*****
```

```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

int main() {

    //codesnippet printfpoint
    int i;
    printf("address of i: %ld\n",
        (long)(&i));
    printf(" same in hex: %lx\n",
        (long)(&i));
    //codesnippet end

    return 0;
}
```

16.8.2 Listing of code/pointer/coutpoint

```
/*
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2017-9 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** coutpoint.cxx : print a pointer
*****
**** /*****
```

```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

int main() {

    //codesnippet coutpoint
    int i;
    cout << "address of i, decimal: "
        << (long)&i << endl;
    cout << "address of i, hex : "
        << std::hex << &i << endl;
    //codesnippet end

    return 0;
}
```

16.8.3 Listing of code/pointer/cintpointer

```
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2017/8 Victor Eijkhout eijkhout@tacc.utexas.edu
**** 
**** cintpointer.cxx : oldstyle C pointers
**** 
*****
```

```
#include <iostream>
using std::cout;
using std::endl;

int main() {

    //codesnippet cintpointer
    int i;
    int* addr = &i;
    i = 5;
    cout << *addr << endl;
    i = 6;
    cout << *addr << endl;
    //codesnippet end

    return 0;
}
```

16.8.4 Listing of code/pointer/arrayaddr

```
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2017/8 Victor Eijkhout eijkhout@tacc.utexas.edu
**** 
**** arrayaddr.cxx : pointer to C style array
**** 
*****
```

```
#include <iostream>
using std::cout;
using std::endl;

int main() {

    //codesnippet arrayaddr
    double array[5] = {11,22,33,44,55};
    double *addr_of_second = &(array[1]);
    cout << *addr_of_second << endl;
    array[1] = 7.77;
    cout << *addr_of_second << endl;
    //codesnippet end

    return 0;
}
```

Chapter 17

Const

The keyword `const` can be used to indicate that various quantities can not be changed. This is mostly for programming safety: if you declare that a method will not change any members, and it does so (indirectly) anyway, the compiler will warn you about this.

17.1 Const arguments

The use of const arguments is one way of protecting you against yourself. If an argument is conceptually supposed to stay constant, the compiler will catch it if you mistakenly try to change it.

Constant arguments

Function arguments marked `const` can not be altered by the function code. The following segment gives a compilation error:

```
|| void f(const int i) {  
||     i++;  
|| }
```

17.2 Const references

A more sophisticated use of `const` is the *const reference*:

```
|| void f( const int &i ) { .... }
```

This may look strange. After all, references, and the pass-by-reference mechanism, were introduced in section 7.4 to return changed values to the calling environment. The `const` keyword negates that possibility of changing the parameter.

But there is a second reason for using references. Parameters are passed by value, which means that they are copied, and that includes big objects such as `std::vector`. Using a reference to pass a vector is much less costly in both time and space, but then there is the possibility of changes to the vector propagating back to the calling environment.

Consider a class that has methods that return an internal member by reference, once as `const` reference and once not:

Code:

```

class has_int {
private:
    int mine{1};
public:
    const int& int_to_get() { return mine; };
    int& int_to_set() { return mine; };
    void inc() { mine++; };
};

/* ...
has_int an_int;
an_int.inc(); an_int.inc(); an_int.inc();
cout << "Contained int is now: "
    << an_int.int_to_get() << endl;
/* Compiler error: an_int.int_to_get() = 5; */
an_int.int_to_set() = 17;
cout << "Contained int is now: "
    << an_int.int_to_get() << endl;

```

Output**[const] constref:**

Contained int is now: 4
Contained int is now: 17

For the source of this example, see section 17.8.1

We can make visible the difference between pass by value and pass by const-reference if we define a class where the *copy constructor* explicitly reports itself:

```

class has_int {
private:
    int mine{1};
public:
    has_int(int v) {
        cout << "set: " << v << endl;
        mine = v; };
    has_int( has_int &h ) {
        auto v = h.mine;
        cout << "copy: " << v << endl;
        mine = v; };
    void printme() { cout
        << "I have: " << mine << endl; };
};

```

Now if we define two functions, with the two parameter passing mechanisms, we see that passing by value invokes the copy constructor, and passing by const reference does not:

Code:

```

void f_with_copy(has_int other) {
    cout << "function with copy" << endl; };
void f_with_ref(const has_int &other) {
    cout << "function with ref" << endl; };
/* ...
cout << "Calling f with copy..." << endl;
f_with_copy(an_int);

cout << "Calling f with ref..." << endl;
f_with_ref(an_int);

```

Output**[const] constcopy:**

Calling f with copy...
(calling copy constructor)
function with copy
Calling f with ref...
function with ref
... done

For the source of this example, see section 17.8.2

17.2.1 Const references in range-based loops

The same pass by value/reference issue comes up in range-based for loops. The syntax

```
|| for ( auto v : some_vector )
```

copies the vector elements to the `v` variable, whereas

```
|| for ( auto& v : some_vector )
```

makes a reference. To get the benefits of references (no copy cost) while avoiding the pitfalls (inadvertant changes), you can also use a const-reference here:

```
|| for ( const auto& v : some_vector )
```

17.3 Const methods

We can distinguish two types of methods: those that alter internal data members of the object, and those that don't. The ones that don't can be marked `const`. While this is in no way required, it contributes to a clean programming style:

Intention checking

Using `const` will catch mismatches between the prototype and definition of the method. For instance,

```
|| class Things {
    private:
        int var;
    public:
        f(int &ivar, int c) const {
            var += c; // typo: should be 'ivar'
        }
}
```

Here, the use of `var` was a typo, should have been `ivar`. Since the method is marked `const`, the compiler will generate an error.

No side-effects

It encourages a functional style, in the sense that it makes *side-effects* impossible:

```
|| class Things {
private:
    int i;
public:
    int get() const { return i; }
    int inc() { return i++; } // side-effect!
    void addto(int &thru) const { thru += i; }
}
```

17.4 Overloading on const

Const polymorphism

A const method and its non-const variant are different enough that you can use this for overloading.

Code:

	Output
<code>class has_array {</code>	<code>[const] constat:</code>
<code>private:</code>	<code>const at</code>
<code> vector<float> values;;</code>	<code>const at</code>
<code>public:</code>	<code>const at</code>
<code> has_array(int l, float v)</code>	1.5
<code> : values(vector<float>(l, v)) {};</code>	<code>var at</code>
<code> auto& at(int i) {</code>	<code>const at</code>
<code> cout << "var at" << endl;</code>	<code>const at</code>
<code> return values.at(i); }</code>	<code>const at</code>
<code> const auto& at (int i) const {</code>	3.97157e+18
<code> cout << "const at" << endl;</code>	<code>const at</code>
<code> return values.at(i); }</code>	<code>const at</code>
<code> auto sum() const {</code>	
<code> float p;</code>	
<code> for (int i=0; i<values.size(); i++)</code>	
<code> p += at(i);</code>	
<code> return p;</code>	
<code> };</code>	
<code>};</code>	
<code>int main() {</code>	
<code> int l; float v;</code>	
<code> cin >> l; cin >> v;</code>	
<code> has_array fives(l, v);</code>	
<code> cout << fives.sum() << endl;</code>	
<code> fives.at(0) = 2;</code>	
<code> cout << fives.sum() << endl;</code>	

For the source of this example, see section [17.8.3](#)

Exercise 17.1. Explore variations on this example, and see which ones work and which ones not.

1. Remove the second definition of `at`. Can you explain the error?
2. Remove either of the `const` keywords from the second `at` method. What errors do you get?

17.5 Const and pointers

Let's declare a class `thing` to point to, and a class `has_thing` that contains a pointer to a `thing`.

<code>class thing {</code>	<code>};</code>
<code>private:</code>	
<code> int i;</code>	
<code>public:</code>	
<code> thing(int i) : i(i) {};</code>	
<code> void set_value(int ii) { i = ii; };</code>	
<code> auto value() const { return i; };</code>	
<code>class has_thing {</code>	
<code>private:</code>	
<code> shared_ptr<thing></code>	
<code> thing_ptr<nullptr>;</code>	
<code>public:</code>	

```

    has_thing(int i)
      : thing_ptr
        (make_shared<thing>(i)) {};
  
```

```

void print() const {
  cout << thing_ptr->value() << endl; };
  
```

If we define a method to return the pointer, we get a copy of the pointer, so redirecting that pointer has no effect on the container:

Code:

```

auto get_thing_ptr() const {
  return thing_ptr; };
/* ... */
has_thing container(5);
container.print();
container.get_thing_ptr() =
  make_shared<thing>(6);
container.print();
  
```

Output

[const] constpoint2:

```

5
5
  
```

For the source of this example, see section [17.8.5](#)

If we return the pointer by reference we can change it. However, this requires the method not to be const. On the other hand, with the const method earlier we can change the object:

Code:

```

// Error: does not compile
// auto &get_thing_ptr() const {
auto &access_thing_ptr() {
  return thing_ptr; };
/* ... */
has_thing container(5);
container.print();
container.access_thing_ptr() =
  make_shared<thing>(7);
container.print();
container.get_thing_ptr()->set_value(8);
container.print();
  
```

Output

[const] constpoint3:

```

5
7
8
  
```

For the source of this example, see section [17.8.5](#)

If you want to prevent the pointed object from being changed, you can declare the pointer as a `shared_ptr<const thing>`:

```

private:
  shared_ptr<const thing>
    const_thing=nullptr;
public:
  has_thing(int i,int j)
    : const_thing
      (make_shared<thing>(i+j)) {};
  auto get_const_ptr() const {
  
```

```

    return const_thing; };
  void print() const {
    cout << const_thing->value() << endl; };
/* ... */
has_thing constainer(1,2);
// Error: does not compile
constainer.get_const_ptr()->set_value(9);
  
```

17.6 Mutable

Typical class with non-const update methods, and const readout of some computed quantity:

```

class Stuff {
private:
    int i, j;
public:
    Stuff(int i,int j) : i(i),j(j) {};
    void seti(int inew) { i = inew; };
    void setj(int jnew) { j = jnew; };
    int result () const { return i+j; };
}

```

Attempt at caching the computation:

```

class Stuff {
private:
    int i, j;
    int cache;
    void compute_cache() { cache = i+j; };
public:
    Stuff(int i,int j) : i(i),j(j) {};
    void seti(int inew) { i = inew; compute_cache(); };
    void setj(int jnew) { j = jnew; compute_cache(); };
    int result () const { return cache; };
}

```

But what if setting happens way more often than getting?

```

class Stuff {
private:
    int i, j;
    int cache;
    bool cache_valid{false};
    void update_cache() {
        if (!cache_valid) {
            cache = i+j; cache_valid = true;
        };
    };
public:
    Stuff(int i,int j) : i(i),j(j) {};
    void seti(int inew) { i = inew; cache_valid = false; };
    void setj(int jnew) { j = jnew; cache_valid = false; }
    int result () const {
        update_cache(); return cache; };
}

```

This does not compile, because `result` is `const`, but it calls a non-`const` function.

We can solve this by declaring the cache variables to be `mutable`. Then the methods that conceptually don't change the object can still stay `const`, even while altering the state of the object. (It is better not to use `const_cast`.)

```

class Stuff {
private:
    int i, j;
    mutable int cache;
    mutable bool cache_valid{false};
    void update_cache() const {
        if (!cache_valid) {
            cache = i+j; cache_valid = true;
        };
    };
public:
    Stuff(int i,int j) : i(i),j(j) {};
}

```

```
|| void seti(int inew) { i = inew; cache_valid = false; }
|| void setj(int jnew) { j = jnew; cache_valid = false; }
|| int result () const {
||     update_cache(); return cache; }
```

17.7 Compile-time constants

Compilers have long been able to simplify expressions that only contain constants:

```
|| int i=5;
|| int j=i+4;
|| f(j)
```

Here the compiler will conclude that `j` is 9, and that's where the story stops. It also becomes possible to let `f(j)` be evaluated by the compiler, if the function `f` is simple enough. C++17 added several more variants of `constexpr` usage.

The `const` keyword can be used to indicate that a variable can not be changed:

```
|| const int i=5;
|| // DOES NOT COMPILE:
|| i += 2;
```

Constexpr if

The combination `if constexpr` is useful with templates:

```
|| template <typename T>
|| auto get_value(T t) {
||     if constexpr (std::is_pointer_v<T>)
||         return *t;
||     else
||         return t;
|| }
```

Constant functions

To declare a function to be constant, use `constexpr`. The standard example is:

```
|| constexpr double pi() {
||     return 4.0 * atan(1.0); }
```

but also

```
|| constexpr int factor(int n) {
||     return n <= 1 ? 1 : (n*fact(n-1)); }
```

(Recursion in C++11, loops and local variables in C++14.)

- Can use conditionals, if testing on constant data;
- can use loops, if number of iterations constant;
- (C++20) can allocate memory, if size constant.

17.8 Sources used in this chapter

17.8.1 Listing of code/const/constref

```
*****  
**** This file belongs with the course  
**** Introduction to Scientific Programming in C++/Fortran2003  
**** copyright 2016-8 Victor Eijkhout eijkhout@tacc.utexas.edu  
****  
**** constref.cxx : returning a const by ref  
****  
*****  
  
#include <iostream>  
using std::cin;  
using std::cout;  
using std::endl;  
  
//codesnippet constref  
class has_int {  
    private:  
        int mine{1};  
    public:  
        const int& int_to_get() { return mine; };  
        int& int_to_set() { return mine; };  
        void inc() { mine++; };  
};  
//codesnippet end  
  
int main() {  
  
    //codesnippet constref  
    has_int an_int;  
    an_int.inc(); an_int.inc(); an_int.inc();  
    cout << "Contained int is now: "  
        << an_int.int_to_get() << endl;  
    /* Compiler error: an_int.int_to_get() = 5; */  
    an_int.int_to_set() = 17;  
    cout << "Contained int is now: "  
        << an_int.int_to_get() << endl;  
    //codesnippet end  
  
    return 0;  
}
```

17.8.2 Listing of code/const/constcopy

```
*****  
**** This file belongs with the course  
**** Introduction to Scientific Programming in C++/Fortran2003  
**** copyright 2017/8 Victor Eijkhout eijkhout@tacc.utexas.edu  
****  
**** constcopy.cxx : demonstate yes/no copying  
****  
*****
```

```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

class has_int {
private:
    int mine{1};
public:
    has_int(int v) { mine = v; }
    has_int(has_int &other) { cout << "(calling copy constructor)" << endl;
        mine = other.mine;
    };
};

//codesnippet constcopy
void f_with_copy(has_int other) {
    cout << "function with copy" << endl; };
void f_with_ref(const has_int &other) {
    cout << "function with ref" << endl; };
//codesnippet end

int main() {

    has_int an_int(5);

    //codesnippet constcopy
    cout << "Calling f with copy..." << endl;
    f_with_copy(an_int);

    cout << "Calling f with ref..." << endl;
    f_with_ref(an_int);
//codesnippet end

    cout << "... done" << endl;

    return 0;
}
```

17.8.3 Listing of code/const/constat

```
*****
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2017-9 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** constat.cxx : explore const overloading
*****
*****
```

```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;
```

```

#include <vector>
using std::vector;

//codesnippet constatclass
class has_array {
private:
    vector<float> values;;
public:
    has_array(int l, float v)
        : values(vector<float>(l, v)) {}
    auto& at(int i) {
        cout << "var at" << endl;
        return values.at(i); }
    const auto& at (int i) const {
        cout << "const at" << endl;
        return values.at(i); }
    auto sum() const {
        float p;
        for ( int i=0; i<values.size(); i++)
            p += at(i);
        return p;
    };
}

int main() {

    int l; float v;
    cin >> l; cin >> v;
    has_array fives(l, v);
    cout << fives.sum() << endl;
    fives.at(0) = 2;
    cout << fives.sum() << endl;
    //codesnippet end

    return 0;
}

```

17.8.4 Listing of code/const/constpoint

```

*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2019 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** constpoint.cxx : pointers and constness
*****
***** constpoint.cxx : pointers and constness
***** /



#include <iostream>
using std::cin;
using std::cout;
using std::endl;

#include <memory>
using std::make_shared;
using std::shared_ptr;

```

```

//codesnippet constpoint1
class thing {
private:
    int i;
public:
    thing(int i) : i(i) {};
    void set_value(int ii) { i = ii; };
    auto value() const { return i; };
};

class has_thing {
private:
    shared_ptr<thing>
        thing_ptr{nullptr};
public:
    has_thing(int i)
        : thing_ptr
            (make_shared<thing>(i));
    void print() const {
        cout << thing_ptr->value() << endl;
    }
//codesnippet end
//codesnippet constpoint2
auto get_thing_ptr() const {
    return thing_ptr;
}
//codesnippet end
//codesnippet constpoint3
// Error: does not compile
// auto &get_thing_ptr() const {
auto &access_thing_ptr() {
    return thing_ptr;
}
//codesnippet end
//codesnippet constpoint4
private:
    shared_ptr<const thing>
        const_thing{nullptr};
public:
    has_thing(int i,int j)
        : const_thing
            (make_shared<thing>(i+j));
    auto get_const_ptr() const {
        return const_thing;
    }
    void crint() const {
        cout << const_thing->value() << endl;
    }
//codesnippet end
};

int main() {

    cout << "Point2" << endl;
{
    //codesnippet constpoint2
    has_thing container(5);
    container.print();
    container.get_thing_ptr() =
        make_shared<thing>(6);
    container.print();
}

```

```
//codesnippet end
}
cout << "point2" << endl;

cout << "Point3" << endl;
{
    //codesnippet constpoint3
    has_thing container(5);
    container.print();
    container.access_thing_ptr() =
        make_shared<thing>(7);
    container.print();
    container.get_thing_ptr()->set_value(8);
    container.print();
    //codesnippet end
}
cout << "point3" << endl;

#ifndef 0
{
    //codesnippet constpoint4
    has_thing constainer(1,2);
    // Error: does not compile
    constainer.get_const_ptr()->set_value(9);
    //codesnippet end
}
#endif

return 0;
}
```

17.8.5 Listing of code/const/constpoint

```
*****
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2019 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** constpoint.cxx : pointers and constness
***** */

#include <iostream>
using std::cin;
using std::cout;
using std::endl;

#include <memory>
using std::make_shared;
using std::shared_ptr;

//codesnippet constpoint1
class thing {
private:
    int i;
public:
```

```

    thing(int i) : i(i) {};
    void set_value(int ii) { i = ii; };
    auto value() const { return i; };
};

class has_thing {
private:
    shared_ptr<thing>
        thing_ptr{nullptr};
public:
    has_thing(int i)
        : thing_ptr
            (make_shared<thing>(i)) {};
    void print() const {
        cout << thing_ptr->value() << endl; };
    //codesnippet end
    //codesnippet constpoint2
    auto get_thing_ptr() const {
        return thing_ptr; };
    //codesnippet end
    //codesnippet constpoint3
    // Error: does not compile
    // auto &get_thing_ptr() const {
    auto &access_thing_ptr() {
        return thing_ptr; };
    //codesnippet end
    //codesnippet constpoint4
private:
    shared_ptr<const thing>
        const_thing{nullptr};
public:
    has_thing(int i,int j)
        : const_thing
            (make_shared<thing>(i+j)) {};
    auto get_const_ptr() const {
        return const_thing; };
    void crint() const {
        cout << const_thing->value() << endl; };
    //codesnippet end
};

int main() {

    cout << "Point2" << endl;
    {
        //codesnippet constpoint2
        has_thing container(5);
        container.print();
        container.get_thing_ptr() =
            make_shared<thing>(6);
        container.print();
        //codesnippet end
    }
    cout << "point2" << endl;

    cout << "Point3" << endl;
    {

```

```
//codesnippet constpoint3
has_thing container(5);
container.print();
container.access_thing_ptr() =
    make_shared<thing>(7);
container.print();
container.get_thing_ptr()->set_value(8);
container.print();
//codesnippet end
}
cout << "point3" << endl;

#if 0
{
    //codesnippet constpoint4
    has_thing constainer(1,2);
    // Error: does not compile
    constainer.get_const_ptr()->set_value(9);
    //codesnippet end
}
#endif

    return 0;
}
```

Chapter 18

Prototypes

18.1 Prototypes for functions

In most of the programs you have written in this course, you put any functions or classes above the main program, so that the compiler could inspect the definition before it encountered the use. However, the compiler does not actually need the whole definition, say of a function: it is enough to know its name, the types of the input parameters, and the return type.

Such a minimal specification of a function is known as function *prototype*; for instance

```
// int tester(float);
```

Prototypes and forward declarations, 1

A first use of prototypes is *forward declaration*.

Some people like defining functions after the main:

```
|| int f(int);
|| int main() {
||   f(5);
|| };
|| int f(int i) {
||   return i;
|| }
```

versus before:

```
|| int f(int i) {
||   return i;
|| }
|| int main() {
||   f(5);
|| };
```

Prototypes and forward declarations, 2

You also need forward declaration for mutually recursive functions:

```
|| int f(int);
|| int g(int i) { return f(i); }
|| int f(int i) { return g(i); }
```

Prototypes are useful if you spread your program over multiple files. You would put your functions in one file and the main program in another.

```
// file: def.cxx
int tester(float x) {
  ....
}
```

```
// file : main.cxx
int main() {
  int t = tester(...);
  return 0;
}
```

```
|| }
```

In this example a function `tester` is defined in a different file from the main program, so we need to tell `main` what the function looks like in order for the main program to be compilable:

```
// file : main.cxx
int tester(float);
int main() {
    int t = tester(...);
    return 0;
}
```

Splitting your code over multiple files and using *separate compilation* is good software engineering practice for a number of reasons.

1. If your code gets large, compiling only the necessary files cuts down on compilation time.
2. Your functions may be useful in other projects, by yourself or others, so you can reuse the code without cutting and pasting it between projects.
3. It makes it easier to search through a file without being distracted by unrelated bits of code.

(However, you would not do things like this in practice. See section 18.1.2 about header files.)

18.1.1 Separate compilation

Compiling and linking

Your regular compile line

```
icpc -o yourprogram yourfile.cc
```

actually does two things: compilation, and linking. You can do those separately:

1. First you compile

```
icpc -c yourfile.cc
```

which gives you a file `yourfile.o`, a so-called *object file*; and

2. Then you use the compiler as *linker* to give you the *executable file*:

```
icpc -o yourprogram yourfile.o
```

In this particular example you may wonder what the big deal is. That will become clear if you have multiple source files: now you invoke the compile line for each source, and you link them only once.

Dealing with multiple files

Compile each file separately, then link:

```
icpc -c mainfile.cc
icpc -c functionfile.cc
icpc -o yourprogram mainfile.o functionfile.o
```

At this point, you should learn about the *Make* tool for managing your programming project.

18.1.2 Header files

Even better than writing the prototype every time you need the function is to have a *header file*:

Prototypes and header files

```
// file: def.h
int tester(float);
```

The header file gets included both in the definitions file and the main program:

```
// file: def.cxx
#include "def.h"
int tester(float x) {
    ....
}

// file : main.cxx
#include "def.h"

int main() {
    int t = tester(...);
    return 0;
}
```

What happens if you leave out the `#include "def.h"` in both cases?

Having a header file is an important safety measure:

- Suppose you change your function definition, changing its return type;
- The compiler will complain when you compile the definitions file;
- So you change the prototype in the header file;
- Now the compiler will complain about the main program, so you edit that too.

It is necessary to include the header file in the main program. It is not strictly necessary to include it in the definitions file, but doing so means that you catch potential errors: if you change the function definitions, but forget to update the header file, this is caught by the compiler.

Remark 6 *By the way, why does that compiler even recompile the main program, even though it was not changed? Well, that's because you used a makefile. See the tutorial.*

Remark 7 *Header files were able to catch more errors in C than they do in C++. With polymorphism of functions, it is no longer an error to have*

```
// header.h
int somefunction(int);
```

and

```
#include "header.h"
int somefunction( float x ) { .... }
```

18.1.3 C and C++ headers

You have seen the following syntaxes for including header files:

```
#include <header.h>
#include "header.h"
```

The first is typically used for system files, with the second typically for files in your own project. There are some header files that come from the C standard library such as `math.h`; the idiomatic way of including them in C++ is

```
|| #include <cmath>
```

18.2 Prototypes for class methods

Class prototypes

Header file:

```
|| class something {
| private:
|   int i;
| public:
|   double dosomething( std::vector<double> v );
|};
```

Implementation file:

```
|| double something::dosomething( std::vector<double> v ) {
|   // do something with v
|};
```

Data members in proto

Data members, even private ones, need to be in the header file:

```
|| class something {
| private:
|   int localvar;
| public:
|   double somedo(vector);
|};
```

Implementation file:

```
|| double something::somedo(vector v) {
|   .... something with v ....
|   .... something with localvar ....
|};
```

Review 18.1. For each of the following answer: is this a valid function definition or function prototype.

- `int foo();`
- `int foo() {};`
- `int foo(int) {};`
- `int foo(int bar) {};`
- `int foo(int) { return 0; };`
- `int foo(int bar) { return 0; };`

18.3 Header files and templates

The use of *templates* (see chapter 21) often make separate compilation impossible: in order to compile the templated definitions the compiler needs to know with what types they will be used.

18.4 Namespaces and header files

Namespaces (see chapter 19) are convenient, but they carry a danger in that they may define functions without the user of the namespace being aware of it.

Therefore, one should never put using namespace in a header file.

18.5 Global variables and header files

If you have a variable that you want known everywhere, you can make it a *global variable*:

```
// int processnumber;
void f() {
    ... processnumber ...
}
int main() {
    processnumber = // some system call
};
```

It is then defined in the main program and any functions defined in your program file.

Warning: it is tempting to define variables global but this is a dangerous practice.

If your program has multiple files, you should not put ‘int processnumber’ in the other files, because that would create a new variable, that is only known to the functions in that file. Instead use:

```
// extern int processnumber;
```

which says that the global variable processnumber is defined in some other file.

What happens if you put that variable in a *header file*? Since the *preprocessor* acts as if the header is textually inserted, this again leads to a separate global variable per file. The solution then is more complicated:

```
//file: header.h
#ifndef HEADER_H
#define HEADER_H
#ifndef EXTERN
#define EXTERN extern
#endif
EXTERN int processnumber
#endif

//file: aux.cc
#include "header.h"

//file: main.cc
#define EXTERN
#include "header.h"
```

(This sort of preprocessor magic is discussed in chapter 20.)

This also prevents recursive inclusion of header files.

Chapter 19

Namespaces

19.1 Solving name conflicts

In section 11.3 you saw that the C++ STL comes with a `vector` class, that implements dynamic arrays. You say

```
|| std::vector<int> bunch_of_ints;
```

and you have an object that can store a bunch of ints. And if you use such vectors often, you can save yourself some typing by having

```
|| using namespace std;
```

somewhere high up in your file, and write

```
|| vector<int> bunch_of_ints;
```

in the rest of the file.

More safe:

```
|| using std::vector;
```

But what if you are writing a geometry package, which includes a `vector` class? Is there confusion with the STL `vector` class? There would be if it weren't for the phenomenon *namespace*, which acts as a disambiguating prefix for classes, functions, variables.

You have already seen namespaces in action when you wrote `std::vector`: the ‘`std`’ is the name of the namespace.

Defining a namespace

You can make your own namespace by writing

```
|| namespace a_namespace {
    // definitions
    class an_object {
    };
|| }
```

so that you can write

Namespace usage

19. Namespaces

```
|| a_namespace::an_object myobject();
```

or

```
|| using namespace a_namespace;
|| an_object myobject();
```

or

```
|| using a_namespace::an_object;
|| an_object myobject();
```

19.1.1 Namespace header files

If your namespace is going to be used in more than one program, you want to have it in a separate source file, with an accompanying header file:

```
|| #include "geolib.h"
|| using namespace geometry;
```

The header would contain the normal function and class headers, but now inside a named namespace:

```
|| namespace geometry {
||     class point {
||         private:
||             double xcoord, ycoord;
||         public:
||             point() {};
||             point( double x, double y );
||             double x();
||             double y();
||     };
||     class vector {
||         private:
||             point from, to;
||         public:
||             vector( point from, point to );
||             double size();
||     };
|| }
```

and the implementation file would have the implementations, in a namespace of the same name:

```
|| namespace geometry {
||     point::point( double x, double y ) {
||         xcoord = x; ycoord = y; }
||     double point::x() { return xcoord; } // 'accessor'
||     double point::y() { return ycoord; }
||     vector::vector( point from, point to ) {
||         this->from = from; this->to = to;
||     };
||     double vector::size() {
||         double
||             dx = to.x() - from.x(), dy = to.y() - from.y();
||         return sqrt( dx*dx + dy*dy );
||     };
|| }
```

19.2 Best practices

In this course we advocated pulling in functions explicitly:

```
#include <iostream>
using std::cout;
```

It is also possible to use

```
#include <iostream>
using namespace std;
```

The problem with this is that it may pull in unwanted functions. For instance:

Why not ‘using namespace std’?

This compiles, but should not:

```
#include <iostream>
using namespace std;

def swap(int i,int j) {};

int main() {
    int i=1, j=2;
    swap(i, j);
    cout << i << endl;
    return 0;
}
```

This gives an error:

```
#include <iostream>
using std::cout;
using std::endl;

def swap(int i,int j) {};

int main() {
    int i=1, j=2;
    swap(i, j);
    cout << i << endl;
    return 0;
}
```

Even if you use `using namespace`, you only do this in a source file, not in a header file. Anyone using the header would have no idea what functions are suddenly defined.

Chapter 20

Preprocessor

In your source files you have seen lines starting with a hash sign, like

```
|| #include <iostream>
```

Such lines are interpreted by the *C preprocessor*.

Your source file is transformed to another source file, in a source-to-source translation stage, and only that second file is actually compiled by the *compiler*. In the case of an `#include` statement, the preprocessing stage takes form of literally inserting another file, here a *header file* into your source.

There are more sophisticated uses of the preprocessor.

20.1 Textual substitution

Suppose your program has a number of arrays and loop bounds that are all identical. To make sure the same number is used, you can create a variable, and pass that to routines as necessary.

```
|| void dosomething(int n) {
    for (int i=0; i<n; i++) ....
}

int main() {
    int n=100000;

    double array[n];

    dosomething(n);
```

You can also use `#define` to define a *preprocessor macro*:

```
|| #define N 100000
|| void dosomething() {
    for (int i=0; i<N; i++) ....
}

int main() {
    double array[N];

    dosomething();
```

It is traditional to use all uppercase for such macros.

20.2 Parametrized macros

Instead of simple text substitution, you can have *parametrized preprocessor macros*

```
|| #define CHECK_FOR_ERROR(i) if (i!=0) return i
|| ...
|| ierr = some_function(a,b,c); CHECK_FOR_ERROR(ierr);
```

When you introduce parameters, it's a good idea to use lots of parentheses:

```
// the next definition is bad!
#define MULTIPLY(a,b) a*b
...
x = MULTIPLY(1+2, 3+4);
```

Better

```
#define MULTIPLY(a,b) (a)*(b)
...
x = MULTIPLY(1+2, 3+4);
```

Another popular use of macros is to simulate multi-dimensional indexing:

```
#define INDEX2D(i, j, n) (i)*(n)+j
...
double array[m, n];
for (int i=0; i<m; i++)
    for (int j=0; j<n; j++)
        array[ INDEX2D(i, j, n) ] = ...
```

Exercise 20.1. Write a macro that simulates 1-based indexing:

```
#define INDEX2D1BASED(i, j, n) ?????
...
double array[m, n];
for (int i=1; i<=m; i++)
    for (int j=n; j<=n; j++)
        array[ INDEX2D1BASED(i, j, n) ] = ...
```

20.3 Conditionals

There are a couple of *preprocessor conditions*.

20.3.1 Check on a value

The `#if` macro tests on nonzero. A common application is to temporarily remove code from compilation:

```
#if 0
    bunch of code that needs to
    be disabled
#endif
```

20.3.2 Check for macros

The `#ifdef` test tests for a macro being defined. Conversely, `#ifndef` tests for a macro not being defined. For instance,

```
// #ifndef N
#define N 100
#endif
```

Why would a macro already be defined? Well you can do that on the compile line:

```
// icpc -c file.cc -DN=500
```

Another application for this test is in preventing recursive inclusion of header files; see section 18.5.

20.3.3 Including a file only once

It is easy to wind up including a file such as `iostream` more than once, if it is included in multiple other header files. This adds to your compilation time, or may lead to subtle problems. A header file may even circularly include itself. To prevent this, header files often have a structure

```
// this is foo.h
#ifndef FOO_H
#define FOO_H

// the things that you want to include

#endif
```

Now the file will effectively be included only once: the second time it is included its content is skipped.

Many compilers support the pragma `#once` (which, however, is not a language standard) that has the same effect:

```
// this is foo.h
#pragma once

// the things you want to include only once
```

20.4 Other pragmas

- Packing data structure without padding bytes by `#pack`

```
// #pragma pack(push, 1)
// data structures
#pragma pack(pop)
```


Chapter 21

Templates

Sometimes you want a function or a class based on more than one different datatypes. For instance, in chapter 11 you saw how you could create an array of ints as `vector<int>` and of doubles as `vector<double>`. Here you will learn the mechanism for that.

Templated type name

If you have multiple routines that do ‘the same’ for multiple types, you want the type name to be a variable. Syntax:

```
|| template <typename yourtypevariable>
|| // ... stuff with yourtypevariable ...
```

Historically `typename` was `class` but that’s confusing.

21.1 Templatized functions

Example: function

Definition:

```
|| template<typename T>
|| void function(T var) { cout << var << endl; }
```

Usage:

```
|| int i; function(i);
|| double x; function(x);
```

and the code will behave as if you had defined `function` twice, once for `int` and once for `double`.

Exercise 21.1. Machine precision, or ‘machine epsilon’, is sometimes defined as the smallest number ϵ so that $1 + \epsilon > 1$ in computer arithmetic.

Write a templated function `epsilon` so that the following code prints out the values of the machine precision for the `float` and `double` type respectively:

Code:

```

float float_eps;
epsilon(float_eps);
cout << "Epsilon float: "
<< setw(10) << setprecision(4)
<< float_eps << endl;

double double_eps;
epsilon(double_eps);
cout << "Epsilon double: "
<< setw(10) << setprecision(4)
<< double_eps << endl;

```

Output

[template] eps:
Epsilon float: 1.0000e-07
Epsilon double: 1.0000e-15

21.2 Templated classes

The most common use of templates is probably to define templated classes. You have in fact seen this mechanism in action:

Templated vector

the STL contains in effect

```

template<typename T>
class vector {
private:
    // data definitions omitted
public:
    T at(int i) { /* return element i */ };
    int size() { /* return size of data */ };
    // much more
}

```

21.2.1 Specific implementation

```

template <typename T>
void f(T);
template <>
void f(char c) { /* code with c */ };
template <>
void f(double d) { /* code with d */ };

```

21.3 Concepts

Coming in C++.

Templates can be too generic. For instance, one could write a templated *gcd* function

```

template <typename T>
T gcd( T a, T b ) {
    if (b==0) return a;
    else return gcd(b, a%b);
}

```

which will work for various integral types. To prevent it being applied to non-integral types, you can specify a *concept* to the type:

```
|| template<typename T>
| concept bool Integral() {
|   return std::is_integral<T>::value;
| }
```

used as:

```
|| template <typename T>
| requires Integral<T>{}
| T gcd( T a, T b ) { /* ... */ }
```

or

```
|| template <Integral T>
| T gcd( T a, T b ) { /* ... */ }
```

Abbreviated function templates:

```
|| Integral auto gcd
|   ( Integral auto a, Integral auto b )
|   { /* ... */ }
```


Chapter 22

Error handling

22.1 General discussion

When you're programming, making errors is close to inevitable. *Syntax errors*, violations of the grammar of the language, will be caught by the compiler, and prevent generation of an executable. In this section we will therefore talk about *runtime errors*: behaviour at runtime that is other than intended.

Here are some sources of runtime errors

Array indexing Using an index outside the array bounds may give a runtime error:

```
|| vector<float> a(10);
|| for (int i=0; i<=10; i++)
||   a.at(i) = x; // runtime error
```

or undefined behaviour:

```
|| vector<float> a(10);
|| for (int i=0; i<=10; i++)
||   a[i] = x;
```

See further section 11.3.

Null pointers Using an uninitialized pointer is likely to crash your program:

```
|| Object *x;
|| if (false) x = new Object;
|| x->method();
```

Numerical errors such as division by zero will not crash your program, so catching them takes some care.

Guarding against errors.

- Check preconditions.
- Catch results.
- Check postconditions.

Error reporting:

- Message
- Total abort
- Exception

22.2 Mechanisms to support error handling and debugging

22.2.1 Assertions

One way catch errors before they happen, is to sprinkle your code with assertions: statements about things that have to be true. For instance, if a function should mathematically always return a positive result, it may be a good idea to check for that anyway. You do this by using the `assert` command, which takes a boolean, and will stop your program if the boolean is false:

```
|| #include <cassert>
|| float positive_outcome = f(x,y,z);
|| assert( positive_outcome>0 );
```

Since checking an assertion is a minor computation, you may want to disable it when you run your program in production by defining the `NDEBUG` macro:

```
|| #define NDEBUG
```

One way of doing that is passing it as a compiler flag:

```
icpc -DNDEBUG yourprog.cxx
```

Function return values

22.2.2 Exception handling

Exception throwing

Throwing an exception is one way of signalling an error or unexpected behaviour:

```
|| void do_something() {
||   if ( oops )
||     throw(5);
|| }
```

Catching an exception

It now becomes possible to detect this unexpected behaviour by *catching* the exception:

```
|| try {
||   do_something();
|| } catch (int i) {
||   cout << "doing something failed: error=" << i << endl;
|| }
```

You can throw integers to indicate an error code, a string with an actual error message. You could even make an error class:

Exception classes

```
|| class MyError {
|| public :
||   int error_no; string error_msg;
||   MyError( int i, string msg )
||   : error_no(i), error_msg(msg) {};
```

```

throw( MyError(27, "oops");

try {
    // something
} catch ( MyError &m ) {
    cout << "My error with code=" << m.error_no
    << " msg=" << m.error_msg << endl;
}

```

You can use exception inheritance!

Multiple catches

You can multiple `catch` statements to catch different types of errors:

```

try {
    // something
} catch ( int i ) {
    // handle int exception
} catch ( std::string c ) {
    // handle string exception
}

```

Catch any exception

Catch exceptions without specifying the type:

```

try {
    // something
} catch ( ... ) { // literally: three dots
    cout << "Something went wrong!" << endl;
}

```

Exercise 22.1. Define the function

$$f(x) = x^3 - 19x^2 + 79x + 100$$

and evaluate $\sqrt{f(i)}$ for the integers $i = 0 \dots 20$.

- First write the program naively, and print out the root. Where is $f(i)$ negative? What does your program print?
- You see that floating point errors such as the root of a negative number do not make your program crash or something like that. Alter your program to throw an exception if $f(i)$ is negative, catch the exception, and print an error message.
- Alter your program to test the output of the `sqrt` call, rather than its input. Use the function `isnan`

```

#include <cfenv>
using std::isnan;

```

and again throw an exception.

Exceptions in constructors

A `function try block` will catch exceptions, including in initializer lists of constructors.

```

f::f( int i )
    try : fbase(i) {
        // constructor body
}

```

```

    }
  catch (...) { // handle exception
}

```

More about exceptions

- Functions can define what exceptions they throw:

```

void func() throw( MyError, std::string );
void funk() throw();

```

- Predefined exceptions: `bad_alloc`, `bad_exception`, etc.
- An exception handler can throw an exception; to rethrow the same exception use ‘`throw;`’ without arguments.
- Exceptions delete all stack data, but not `new` data. Also, destructors are called; section 10.4.8.
- There is an implicit `try/except` block around your main. You can replace the handler for that. See the `exception` header file.
- Keyword `noexcept`:

```

void f() noexcept { ... };

```

- There is no exception thrown when dereferencing a `nullptr`.

22.2.3 ‘Where does this error come from’

The **CPP!** (**CPP!**) defines two macros, `__FILE__` and `__LINE__` that give you respectively the current file name and the current line number. You can use these to generate pretty error messages such as

```
Overflow occurred in line 25 of file numerics.cxx
```

The **C++ 20** standard will offer `std::source_location` as a native mechanism instead.

22.2.4 Legacy mechanisms

The traditional approach to error checking is for each routine to return an integer parameter that indicates success or absence thereof. Problems with this approach arise if it’s used inconsistently, for instance by a user forgetting to heed the return codes of a library. Also, it requires that every level of the function calling hierarchy needs to check return codes.

The **PETSc** library uses this mechanism consistently throughout, and to great effect.

Exceptions are a better mechanism, since

- they can not be ignored, and
- they do not require handling on the levels of the calling hierarchy between where the exception is thrown and where it is caught.

And then there is the fact that memory management is automatic with exceptions.

22.2.5 Legacy C mechanisms

The `errno` variable and the `set jmp` / `long jmp` functions should not be used. These functions for instance do not have the memory management advantages of exceptions.

22.3 Tools

Despite all your careful programming, your code may still compute the wrong result or crash with strange errors. There are two tools that may then be of assistance:

- *gdb* is the GNU interactive *debugger*. With it, you can run your code step-by-step, inspecting variables along way, and detecting various conditions. It also allows you to inspect variables after your code throws an error.
- *valgrind* is a memory testing tool. It can detect memory leaks, as well as the use of uninitialized data.

Chapter 23

Standard Template Library

The C++ language has a *Standard Template Library* (STL), which contains functionality that is considered standard, but that is actually implemented in terms of already existing language mechanisms. The STL is enormous, so we just highlight a couple of parts.

You have already seen

- arrays (chapter 11),
- strings (chapter 12),
- streams (chapter 13).

Using a template class typically involves

```
#include <something>
using std::function;
```

see section 19.1.

23.1 Complex numbers

Complex numbers use templating to set their precision.

```
#include <complex>
complex<float> f;
f.re = 1.; f.im = 2.;

complex<double> d(1., 3.);
```

Math operator like `+`, `*` are defined, as are math functions.

23.2 Containers

Vectors (section 11.3) and strings (chapter 12) are special cases of a STL *container*. Methods such as `push_back` and `insert` apply to all containers.

23.2.1 Maps: associative arrays

Arrays use an integer-valued index. Sometimes you may wish to use an index that is not ordered, or for which the ordering is not relevant. A common example is looking up information by string, such as finding the age of a person, given their name. This is sometimes called ‘indexing by content’, and the data structure that supports this is formally known as an **associative array**.

In C++ this is implemented through a *map*:

```
#include <map>
using std::map;
map<string,int> ages;
```

is set of pairs where the first item (which is used for indexing) is of type *string*, and the second item (which is found) is of type *int*.

A map is made by inserting the elements one-by-one:

```
#include <map>
using std::make_pair;
ages.insert(make_pair("Alice",29));
ages["Bob"] = 32;
```

You can range over a map:

```
for ( auto person : ages )
    cout << person.first << " has age " << person.second << endl;
```

A more elegant solution uses structured bindings (section 23.4):

```
for ( auto [person,age] : ages )
    cout << person << " has age " << age << endl;
```

Searching for a key gives either the iterator of the key/value pair, or the *end* iterator if not found:

```
for ( auto k : {4,5} ) {
    auto wherek = intcount.find(k);
    if (wherek==intcount.end())
        cout << "could not find key" << k << endl;
    else {
        auto [kk,vk] = *wherek;
        cout << "found key: " << kk << " has value " << vk << endl;
    }
}
```

23.2.2 Iterators

The container class has a subclass *iterator* that can be used to iterate through all elements of a container. This was discussed in section 11.8.1.

However, an *iterator* can be used outside of strictly iterating.

Iterators outside a loop

First, you can use them by themselves:

Code:

```

vector<int> v{1,3,5,7};
auto pointer = v.begin();
cout << "we start at "
    << *pointer << endl;
pointer++;
cout << "after increment: "
    << *pointer << endl;

pointer = v.end();
cout << "end is not a valid element: "
    << *pointer << endl;
pointer--;
cout << "last element: "
    << *pointer << endl;

```

Output

[stl] iter:
we start at 1
after increment: 3
end is not a valid element: 0
last element: 7

For the source of this example, see section [23.10.2](#)

(Note: the `auto` actually stands for `vector::iterator`)

Note that the star notation is an operator, no a *pointer dereference*:

```

vector<int> vec{11,22,33,44,55,66};
auto second = vec.begin(); second++;
cout << "Dereference second: "
    << *second << endl;
// DOES NOT COMPILE
// the iterator is not a type-star:
// int *subarray = second;

```

23.2.2.1 Vector methods using iterators

Vector methods such as `erase` and `insert` use these iterators:

Iterators in vector methods

Methods `erase` and `insert` indicate their range with begin/end iterators

Code:

```

vector<int> v{1,3,5,7,9};
cout << "Vector: ";
for ( auto e : v ) cout << e << " ";
cout << endl;
auto first = v.begin();
first++;
auto last = v.end();
last--;
v.erase(first,last);
cout << "Erased: ";
for ( auto e : v ) cout << e << " ";
cout << endl;

```

Output

[stl] erase:
Vector: 1 3 5 7 9
Erased: 1 9

For the source of this example, see section [23.10.2](#)

Note: end is exclusive.

23.2.2.2 Algorithms using iterators

Numerical reductions can be applied using iterators:

Reduction operation

Default is sum reduction:

Code:

```
vector<int> v{1,3,5,7};
auto first = v.begin();
auto last = v.end();
auto sum = accumulate(first, last, 0);
cout << "sum: " << sum << endl;
```

For the source of this example, see section [23.10.4](#)

Reduction with supplied operator

Supply multiply operator:

Code:

```
vector<int> v{1,3,5,7};
auto first = v.begin();
auto last = v.end();
first++; last--;
auto product =
    accumulate
    (first, last, 2, multiplies<>());
cout << "product: " << product << endl;
```

For the source of this example, see section [23.10.4](#)

23.2.2.3 Forming sub-arrays

Iterators can be used to construct a `vector`. This can for instance be used to create a *subvector*:

Code:

```
vector<int> vec{11,22,33,44,55,66};
auto second = vec.begin(); second++;
auto before = vec.end(); before--;
vector<int> sub(second, before);
cout << "no first and last: ";
for ( auto i : sub ) cout << i << ", ";
cout << endl;
```

Output

[stl] **accumulate**:

sum: 16

Output

[stl] **product**:

product: 30

Output

[iter] **subvector**:

```
clang++ -g -c -std=c++14 \
-O2 \
-o iter.o iter.cxx
```

```
iter.cxx:49:38: error: member reference type 'v
cout << "vector at " << (long)vec->data() \
^~~~^
```

```
iter.cxx:50:35: error: member reference type 'v
cout << "sub at " << (long)sub->data() << e
^~~~^~
```

2 errors generated.

make[3]: *** [iter.o] Error 1

For the source of this example, see section [23.10.5](#)

23.3 Regular expression

The header `regex` gives C++ the functionality for *regular expression* matching.

Code:

<pre>vector<string> names {"Victor", "adam", "DoD"}; auto cap = regex("[A-Z][a-z]+"); for (auto n : names) { auto match = regex_match(n, cap); cout << n; if (match) cout << ": yes"; else cout << ": no" ; cout << endl; }</pre>	Output [regexp] regexp: Looks like a name: Victor: yes adam: no DoD: no
---	--

For the source of this example, see section [23.10.6](#)

23.4 Tuples and structured bindings

Remember how in section [7.4.2](#) we said that if you wanted to return more than one value, you could not do that through a return value, and had to use an *output parameter*? Well, using the STL there is a different solution.

You can make a *tuple*: an entity that comprises several components, possibly of different type, and which unlike a `struct` you do not need to define beforehand.

C++11 style tuples

<pre>std::tuple<int, double> id = \ std::make_tuple<int, double>(3, 5.12); double result = std::get<1>(id); std::get<0>(id) += 1;</pre>

This does not look terribly elegant. Fortunately, *C++17* can use denotations and the `auto` keyword to make this considerably shorter. Consider the case of a function that returns a tuple. You could use `auto` to deduce the return type:

<pre>auto maybe_root1(float x) { if (x<0) return make_tuple <bool, float>(false, -1); else return make_tuple <bool, float>(true, sqrt(x)); };</pre>
--

but more interestingly, you can use a *tuple* denotation:

<pre>tuple<bool, float> maybe_root2(float x) { if (x<0) return {false, -1}; else return {true, sqrt(x)}; };</pre>
--

Catching a returned tuple

The calling code is particularly elegant:

Code:

```
|| auto [succeed, y] = maybe_root2(x);
|| if (succeed)
||   cout << "Root of " << x
||     << " is " << y << endl;
|| else
||   cout << "Sorry, " << x
||     << " is negative" << endl;
```

Output

[stl] tuple:

```
Root of 2 is 1.41421
Sorry, -2 is negative
```

For the source of this example, see section [23.10.7](#)

This is known as *structured binding*.

An interesting use of structured bindings is iterating over a map (section [23.2.1](#)):

```
|| for ( const auto &[key, value] : mymap ) ....
```

23.5 Union-like stuff: tuples, optionals, variants

There are cases where you need a value that is one type or another, for instance, a number if a computation succeeded, and an error indicator if not.

The simplest solution is to have a function that returns both a bool and a number:

```
|| bool RootOrError(float &x) {
||   if (x<0)
||     return false;
||   else
||     x = sqrt(x);
||   return true;
|| }
|| /* ... */
|| for ( auto x : {2.f,-2.f} )
||   if (RootOrError(x))
||     cout << "Root is " << x << endl;
||   else
||     cout << "could not take root of " << x << endl;
```

We will now consider some more idiomatically C++17 solutions to this.

23.5.1 Tuples

Using tuples (section [23.4](#)) the solution to the above ‘a number or an error’ now becomes:

```
|| tuple<bool,float> RootAndValid(float x) {
||   if (x<0)
||     return {false,x};
||   else
||     return {true,sqrt(x)};
|| }
|| /* ... */
|| for ( auto x : {2.f,-2.f} )
```

```

|| if ( auto [ok,root] = RootAndValid(x) ; ok )
||   cout << "Root is " << root << endl;
|| else
||   cout << "could not take root of " << x << endl;

```

23.5.2 Optional

The most elegant solution to ‘a number or an error’ is to have a single quantity that you can query whether it’s valid. This can be done through `std::optional` (part of the C++17 standard):

```

|| #include <optional>
|| using std::optional;

```

- You can create an optional quantity with a function that returns either a value of the indicated type, or {}:

```

|| optional<float> f {
||   if (something) return 3.14;
||   else return {};
|| }

```

- You can test whether the optional quantity has a quantity with `has_value`, in which case you can extract the quantity with `value`:

```

|| auto maybe_x = f();
|| if (f.has_value)
||   // do something with f.value();

```

There is a function `value_or` that gives the value, or a default if the optional did not have a value.

23.5.3 Variant

In C, a `union` is an entity that can be one of a number of types. Just like that C arrays do not know their size, a `union` does not know what type it is. The C++ `variant` does not suffer from these limitations. The function `get_if` can retrieve a value by type.

```

|| #include <variant>
|| using std::variant;
|| variant<int,double,string> union_ids {"Hello world"};
|| if ( auto union_int = get_if<int>(&union_ids) ; union_int )
||   cout << "Int: " << union_int.value() << endl;

```

(You can also use the dereference ‘star’ or `union_int`.)

If you know what type the variant is, you can get it directly:

```
|| cout << "Int: " << get<int>(&union_ids) << endl;
```

Exercise 23.1. Write a routine that computes the roots of the quadratic equation

$$ax^2 + bx + c = 0.$$

The routine should return two roots, or one root, or an indication that the equation has no solutions.

In this exercise you can return a boolean to indicate ‘no roots’, but a boolean can have two values, and only one has meaning. For such cases there is `std::monostate`.

23.6 Algorithms

Many simple algorithms on arrays, testing ‘there is’ or ‘for all’, no longer have to be coded out in C++. They can now be done with a single function from `std::algorithm`.

- Test if any element satisfies a condition: `any_of`
- Test if all elements satisfy a condition: `all_of`
- Apply an operation to all elements: `for_each`.

The object to which the function applies is not specified directly; rather, you have to specify a start and end iterator. An example applied to a `std::vector`:

Code:

Code:	Output
<pre>#include <algorithm> using std::for_each; /* ... */ vector<int> ints{3,4,5,6,7}; for_each (ints.begin(), ints.end(), [] (int x) -> void { if (x%2==0) cout << x << endl; });</pre>	[stl] printeach: 4 6

For the source of this example, see section [24.9.5](#)

See section [23.2.2](#) for iterators, and section [24.3](#) for the use of lambda expressions.

23.7 Limits

There used to be a header file `limits.h` that contained macros such as `MAX_INT`. While this is still available, the STL offers a better solution in the `numeric_limits` header.

Templated functions for limits

Use header file `limits`:

```
#include <limits>
using std::numeric_limits;

cout << numeric_limits<long>::max();
```

Exercise 23.2. Write a program to discover what the maximal $n!$ is so that $n!$, that is, n -factorial, can be represented in an `int`, `long`, or `long long`. Can you write this as a templated function?

Operations such as dividing by zero lead to floating point numbers that do not have a valid value. For efficiency of computation, the processor will compute with these as if they are any other floating point number.

There are tests for detecting whether a number is `Inf` or `Nan`. However, using these may slow a computation down.

Detection of Inf and NaN

The functions `isinf` and `isnan` are defined for the floating point types (`float`, `double`, `long double`), returning a `bool`.

```

|| #include <math.h>
isnan(-1.0/0.0); // false
isnan(sqrt(-1.0)); // true
isinf(-1.0/0.0); // true
isinf(sqrt(-1.0)); // false

```

23.7.1 Storage

- An `int` used to be 16 bits in the olden days, but these days 32 bits is more common.
- A `long int long` has at least the range of an `int`, and at least 32 bits.
- A `long long int long long` has at least the range of a `long`, and at least 64 bits.

23.8 Random numbers

The STL has a *random number generator* that is more general and more flexible than the C version (section 7.7.1).

- There are several generators that give uniformly distributed numbers;
- then there are distributions that translate this to non-uniform or discrete distributions.

Random number example

```

// set the default generator
std::default_random_engine generator;

// distribution: ints 1..6
std::uniform_int_distribution<int> distribution(1,6);

// apply distribution to generator:
int dice_roll = distribution(generator);
// generates number in the range 1..6

```

23.9 Time

23.10 Sources used in this chapter

23.10.1 Listing of code/stl/iter

```

*****
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2019 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** itera.cxx : use of iterators
*****
***** ****

```

```

#include <iostream>
using std::cin;

```

```

using std::cout;
using std::endl;

#include <vector>
using std::vector;

int main() {

{
    cout << "Iter" << endl;
    //codesnippet veciterator
    vector<int> v{1,3,5,7};
    auto pointer = v.begin();
    cout << "we start at "
        << *pointer << endl;
    pointer++;
    cout << "after increment: "
        << *pointer << endl;

    pointer = v.end();
    cout << "end is not a valid element: "
        << *pointer << endl;
    pointer--;
    cout << "last element: "
        << *pointer << endl;
    //codesnippet end
    cout << "iter" << endl;
}

{
    cout << "Erase.." << endl;
    //codesnippet vecerase
    vector<int> v{1,3,5,7,9};
    cout << "Vector: ";
    for ( auto e : v ) cout << e << " ";
    cout << endl;
    auto first = v.begin();
    first++;
    auto last = v.end();
    last--;
    v.erase(first, last);
    cout << "Erased: ";
    for ( auto e : v ) cout << e << " ";
    cout << endl;
    //codesnippet end
    cout << "...erase" << endl;
}

return 0;
}

```

23.10.2 Listing of code/stl/iter

```

*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
*****
```

```
**** copyright 2019 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** itera.cxx : use of iterators
*****
***** **** **** **** **** **** **** **** **** **** **** **** **** **** **** /



#include <iostream>
using std::cin;
using std::cout;
using std::endl;

#include <vector>
using std::vector;

int main() {

{
    cout << "Iter" << endl;
    //codesnippet veciterator
    vector<int> v{1,3,5,7};
    auto pointer = v.begin();
    cout << "we start at "
        << *pointer << endl;
    pointer++;
    cout << "after increment: "
        << *pointer << endl;

    pointer = v.end();
    cout << "end is not a valid element: "
        << *pointer << endl;
    pointer--;
    cout << "last element: "
        << *pointer << endl;
    //codesnippet end
    cout << "iter" << endl;
}

{
    cout << "Erase.." << endl;
    //codesnippet vecerase
    vector<int> v{1,3,5,7,9};
    cout << "Vector: ";
    for ( auto e : v ) cout << e << " ";
    cout << endl;
    auto first = v.begin();
    first++;
    auto last = v.end();
    last--;
    v.erase(first,last);
    cout << "Erased: ";
    for ( auto e : v ) cout << e << " ";
    cout << endl;
    //codesnippet end
    cout << "...erase" << endl;
}
}
```

```
    || return 0;
  || }
```

23.10.3 Listing of code/stl/reduce

```
/******
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2019 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** reduce.cxx : use of reductions
*****
***** */

#include <iostream>
using std::cin;
using std::cout;
using std::endl;

#include <vector>
using std::vector;

#include <numeric>
using std::accumulate;
using std::multiplies;

int main() {

{
  cout << "Accumulate .." << endl;
  //codesnippet vecaccumulate
  vector<int> v{1,3,5,7};
  auto first = v.begin();
  auto last = v.end();
  auto sum = accumulate(first,last,0);
  cout << "sum: " << sum << endl;
  //codesnippet end
  cout << "... accumulate" << endl;
}

{
  cout << "Product .." << endl;
  //codesnippet vecproduct
  vector<int> v{1,3,5,7};
  auto first = v.begin();
  auto last = v.end();
  first++; last--;
  auto product =
  accumulate
    (first,last,2,multiplies<>());
  cout << "product: " << product << endl;
  //codesnippet end
  cout << "... product" << endl;
}
```

```
    || return 0;
  || }
```

23.10.4 Listing of code/stl/reduce

```
/*****
 **** This file belongs with the course
 **** Introduction to Scientific Programming in C++/Fortran2003
 **** copyright 2019 Victor Eijkhout eijkhout@tacc.utexas.edu
 ****
 **** reduce.hxx : use of reductions
 ****
 ****/
```

```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

#include <vector>
using std::vector;

#include <numeric>
using std::accumulate;
using std::multiplies;

int main() {

{
  cout << "Accumulate .." << endl;
  //codesnippet vecaccumulate
  vector<int> v{1,3,5,7};
  auto first = v.begin();
  auto last = v.end();
  auto sum = accumulate(first, last, 0);
  cout << "sum: " << sum << endl;
  //codesnippet end
  cout << ".. accumulate" << endl;
}

{
  cout << "Product .." << endl;
  //codesnippet vecproduct
  vector<int> v{1,3,5,7};
  auto first = v.begin();
  auto last = v.end();
  first++; last--;
  auto product =
  accumulate
    (first, last, 2, multiplies<>());
  cout << "product: " << product << endl;
  //codesnippet end
  cout << ".. product" << endl;
}
```

```
    } return 0;
```

23.10.5 Listing of code/iter/iter

```
/*
 **** This file belongs with the course
 **** Introduction to Scientific Programming in C++/Fortran2003
 **** copyright 2019 Victor Eijkhout eijkhout@tacc.utexas.edu
 ****
 **** iter.cxx : tinkering with iterators
 ****
 ****
#include <iostream>
using std::cout;
using std::endl;

#include <vector>
using std::vector;

#include <memory>
using std::shared_ptr;

int main() {

{

    cout << "Subvectorcopy" << endl;
    //codesnippet subvectorcopy
    vector<int> vec{11,22,33,44,55,66};
    auto second = vec.begin(); second++;
    auto before = vec.end(); before--;
    //    vector<int> sub(second,before);
    vector<int> sub(vec.data()+1,vec.data()+vec.size()-1);
    cout << "no first and last: ";
    for ( auto i : sub ) cout << i << ", ";
    cout << endl;
    vec.at(1) = 222;
    cout << "did we get a change in the sub vector? " << sub.at(0) << endl;
    //codesnippet end
    cout << "... subvector" << endl;
}

{

    cout << "Subvectorassign" << endl;
    //codesnippet subvectorcopy
    vector<int> vec{11,22,33,44,55,66};
    auto second = vec.begin(); second++;
    auto before = vec.end(); before--;
    //    vector<int> sub(second,before);
    vector<int> sub; sub.assign(second,before);
    cout << "vector at " << (long)vec->data() << endl;
    cout << "sub at " << (long)sub->data() << endl;

    cout << "no first and last: ";
```

```

    for ( auto i : sub ) cout << i << ", ";
    cout << endl;
    vec.at(1) = 222;
    cout << "did we get a change in the sub vector? " << sub.at(0) << endl;
    //codesnippet end
    cout << "... subvector" << endl;
}

{
    cout << "Subpointer" << endl;
    //codesnippet subpointer
    auto vec = shared_ptr<vector<int>>(new vector<int>{11,22,33,44,55,66});
    auto second = vec->begin(); second++;
    auto before = vec->end(); before--;
    auto sub = shared_ptr<vector<int>>(new vector<int>(second,before));
    cout << "vector at " << (long)vec->data() << endl;
    cout << "sub at " << (long)sub->data() << endl;
    cout << "no first and last: ";
    for ( auto i : *(sub.get()) ) cout << i << ", ";
    cout << endl;
    vec->at(1) = 222;
    cout << "did we get a change in the sub vector? " << sub->at(0) << endl;
    //codesnippet end
    cout << "... subpointer" << endl;
}

{
    //codesnippet iterderef
    vector<int> vec{11,22,33,44,55,66};
    auto second = vec.begin(); second++;
    cout << "Dereference second: "
        << *second << endl;
    // DOES NOT COMPILE
    // the iterator is not a type-star:
    // int *subarray = second;
    //codesnippet end
}

return 0;
}

```

23.10.6 Listing of code/regexp/regexp

```

/*
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2019 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** regexp.cxx : regular expression
*****
*/
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

```

```
#include <string>
using std::string;

#include <vector>
using std::vector;

#include <regex>
using std::regex;
using std::regex_match;

int main() {

    cout << "Looks like a name:" << endl;
    //codesnippet regexname
    vector<string> names {"Victor", "adam", "DoD"};
    auto cap = regex("[A-Z][a-z]+");
    for ( auto n : names ) {
        auto match = regex_match( n, cap );
        cout << n;
        if (match) cout << ": yes";
        else cout << ": no";
        cout << endl;
    }
    //codesnippet end

    return 0;
}
```

23.10.7 Listing of code/stl/tuple

```
*****
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2018 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** tuple.cxx : std::tuple
*****
*****
```



```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

#include <cmath>

#include <tuple>
using std::make_tuple;
using std::tuple;

//codesnippet tuplemake
auto maybe_root1(float x) {
    if (x<0)
        return make_tuple
```

```

        <bool,float>(false,-1);
    else
        return make_tuple
        <bool,float>(true,sqrt(x));
};

//codesnippet end

//codesnippet tupledenote
tuple<bool,float>
maybe_root2(float x) {
    if (x<0)
        return {false,-1};
    else
        return {true,sqrt(x)};
};
//codesnippet end

int main() {
    float x;
    cin >> x;
    if (false) {
        auto [succeed,y] = maybe_root1(x);
        if (succeed)
            cout << "Root of " << x
            << " is " << y << endl;
        else
            cout << "Sorry, " << x
            << " is negative" << endl;
    }

    {
        //codesnippet tupleauto
        auto [succeed,y] = maybe_root2(x);
        if (succeed)
            cout << "Root of " << x
            << " is " << y << endl;
        else
            cout << "Sorry, " << x
            << " is negative" << endl;
        //codesnippet end
    }
    return 0;
}

```

23.10.8 Listing of code/stl/printeach

```

*****
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2019 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** printeach.cxx : use of for_each
*****
***** /*****

```

```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

//codesnippet printeach
#include <algorithm>
using std::for_each;
//codesnippet end

#include <vector>
using std::vector;

int main() {

    cout << "Print" << endl;
    //codesnippet printeach
    vector<int> ints{3,4,5,6,7};
    for_each
        ( ints.begin(), ints.end(),
        [] (int x) -> void {
            if (x%2==0)
                cout << x << endl;
        } );
    //codesnippet end
    cout << "print" << endl;

    cout << "Count" << endl;
    //codesnippet counteach
    vector<int> moreints{8,9,10,11,12};
    int count{0};
    for_each
        ( moreints.begin(), moreints.end(),
        [&count] (int x) mutable {
            if (x%2==0)
                count++;
        } );
    cout << "number of even: " << count << endl;
    //codesnippet end
    cout << "count" << endl;

    return 0;
}
```

Chapter 24

Obscure stuff

24.1 Auto

This is not actually obscure, but it intersects many other topics, so we put it here for now.

24.1.1 Declarations

Sometimes the type of a variable is obvious:

```
|| std::vector< std::shared_ptr< myclass >>*
  myvar = new std::vector< std::shared_ptr< myclass >>
           ( 20, new myclass(1.3) );
```

(Pointer to vector of 20 shared pointers to `myclass`, initialized with unique instances.) You can write this as:

```
|| auto myvar =
  new std::vector< std::shared_ptr< myclass >>
           ( 20, new myclass(1.3) );
```

Type deduction in functions

Return type can be deduced in C++17:

```
|| auto equal(int i,int j) {
  return i==j;
};
```

Type deduction in methods

Return type of methods can be deduced in C++17:

```
|| class A {
private: float data;
public:
  A(float i) : data(i) {};
  auto &access() {
    return data; };
  void print() {
    cout << "data: " << data << endl; };
};
```

Auto and references, 1

`auto` discards references and such:

Code:

```
|| A my_a(5.7);
|| auto get_data = my_a.access();
|| get_data += 1;
|| my_a.print();
```

Output

[auto] plainget:

data: 5.7

For the source of this example, see section [24.9.1](#)

Auto and references, 2

Combine `auto` and references:

Code:

```
|| A my_a(5.7);
|| auto &get_data = my_a.access();
|| get_data += 1;
|| my_a.print();
```

Output

[auto] refget:

data: 6.7

For the source of this example, see section [24.9.2](#)

Auto and references, 3

For good measure:

Code:

```
|| A my_a(5.7);
|| const auto &get_data = my_a.access();
|| get_data += 1;
|| my_a.print();
```

Output [auto] constrefget:

make[3]: *** No rule to make target `error_constrefget'.

24.1.2 Iterating

Auto iterators

```
|| vector<int> myvector(20);
|| for ( auto copy_of_int : myvector )
||     s += copy_of_int;
|| for ( auto &ref_to_int : myvector )
||     ref_to_int = s;
|| for ( const auto& copy_of_thing : myvector )
||     s += copy_of_thing.f();
```

is actually short for:

```
|| for ( std::vector<int>
||         iterator it=myvector.begin() ;
||         it!=myvector.end() ; ++it )
||         s += *it ; // note the deref
```

Range iterators can be used with anything that is iterable
(vector, map, your own classes!)

Other iterator uses

Reverse iteration can not be done with range-based syntax.

Use general syntax with reverse iterator: `rbegin`, `rend`.

Also:

```

|| auto first = myarray.begin();
|| first += 2;
|| auto last = myarray.end();
|| last -= 2;
|| myarray.erase(first, last);

```

24.1.3 decltype: declared type

There are places where you want the compiler to deduce the type of a variable, but where this is not immediately possible. Suppose that in

```

|| auto v = some_object.get_stuff();
|| f(v);

```

you want to put a `try ... catch` block around just the creation of `v`. This does not work:

```

|| try { auto v = some_object.get_stuff();
|| } catch (...) {}
|| f(v);

```

because the `try` block is a scope. It also doesn't work to write

```

|| auto v;
|| try { v = some_object.get_stuff();
|| } catch (...) {}
|| f(v);

```

because there is no indication what type `v` is created with.

Instead, it is possible to query the type of the expression that creates `v` with `decltype`:

```

|| decltype(some_object.get_stuff()) v;
|| try { auto v = some_objects.get_stuff();
|| } catch (...) {}
|| f(v);

```

11.8.3

24.2 Iterating over classes

You know that you can iterate over `vector` objects:

```

|| vector<int> myvector(20);
|| for ( auto copy_of_int : myvector )
||   s += copy_of_int;
|| for ( auto &ref_to_int : myvector )
||   ref_to_int = s;

```

(Many other STL classes are iterable like this.)

This is not magic: it is possible to iterate over any class: a *class* is *iterable* that has a number of conditions satisfied.

The class needs to have:

- a method `begin` with prototype

```
|| iteratableClass iteratableClass::begin()
```

That gives an object in the initial state, which we will call the ‘iterator object’; likewise

- a method `end`

```
|| iteratableClass iteratableClass::end()
```

that gives an object in the final state; furthermore you need

- an increment operator

```
|| void iteratableClass::operator++()
```

that advances the iterator object to the next state;

- a test

```
|| bool iteratableClass::operator!=(const iteratableClass&)
```

to determine whether the iteration can continue; finally

- a dereference operator

```
|| iteratableClass::operator*()
```

that takes the iterator object and returns its state.

Simple illustration

Let’s make a class, called a `bag`, that models a set of integers, and we want to enumerate them. For simplicity sake we will make a set of contiguous integers:

```
|| class bag {
    // basic data
private:
    int first, last;
public:
    bag(int first, int last) : first(first), last(last) {};
```

Internal state

When you create an iterator object it will be copy of the object you are iterating over, except that it remembers how far it has searched:

```
|| private:
    int seek{0};
```

Initial/final state

The `begin` method gives a `bag` with the `seek` parameter initialized:

```
|| public:
    bag &begin() {
        seek = first; return *this;
    };
    bag end() {
        seek = last; return *this;
    };
```

These routines are public because they are (implicitly) called by the client code.

Termination test

The termination test method is called on the iterator, comparing it to the `end` object:

```

|| bool operator!=( const bag &test ) const {
||   return seek<=test.last;
|| };

```

Dereference

Finally, we need the increment method and the dereference. Both access the `seek` member:

```

|| void operator++() { seek++; };
|| int operator*() { return seek; };

```

Use case

We can iterate over our own class:

Code:

```

bag digits(0,9);

bool find3{false};
for ( auto seek : digits )
  find3 = find3 || (seek==3);
cout << "found 3: " << boolalpha
  << find3 << endl;

bool find15{false};
for ( auto seek : digits )
  find15 = find15 || (seek==15);
cout << "found 15: " << boolalpha
  << find15 << endl;

```

Output

[loop] bagfind:
found 3: true
found 15: false

For the source of this example, see section ??

(for this particular case, use `std::any_of`)

If we add a method `has` to the class:

```

bool has(int tst) {
  for ( auto seek : *this )
    if (seek==tst) return true;
  return false;
};

```

we can call this:

```

cout << "f3: " << digits.has(3) << endl;
cout << "f15: " << digits.has(15) << endl;

```

Of course, we could have written this function without the range-based iteration, but this implementation is particularly elegant.

Exercise 24.1. You can now do exercise 41.15, implementing a prime number generator with this mechanism.

If you think you understand `const`, consider that the `has` method is conceptually `cost`. But if you add that keyword, the compiler will complain about that use of `*this`, since it is altered through the `begin` method.

Exercise 24.2. Find a way to make `has` a `const` method.

24.3 Lambdas

The mechanism of *lambda expressions* (added in C++) makes dynamic definition of functions possible.

Lambda expressions

```
[capture] ( inputs ) -> outtype { definition };
```

Example:

```
|| [] (float x, float y) -> float {
    ||| return x+y; } ( 1.5, 2.3 )
```

Store lambda in a variable:

```
|| auto summing =
    ||| [] (float x, float y) -> float {
        ||| return x+y; };
    || cout << summing ( 1.5, 2.3 ) << endl;
```

A non-trivial use of lambdas uses the *capture* to fix one argument of a function. Let's say we want a function that computes exponentials for some fixed exponent value. We take the *cmath* function

```
pow( x, exponent );
```

and fix the exponent:

```
|| int exponent=5;
  || auto powerfunction =
    ||| [exponent] (float x) -> float {
        ||| return pow(x,exponent); };
```

Now *powerfunction* is a function of one argument, which computes that argument to a fixed power.

The lambda notation can be even shorter if the output is void and there are no parameters:

```
|| [] { /* computation */ }
```

24.3.1 Lambda members of classes

Storing a lambda in a class is hard because it has unique type. Solution: use *std::function*.

Lambda in object

```
||#include <functional>
  || using std::function;
  ||/* ... */
  || class SelectedInts {
  ||| private:
  ||| vector<int> bag;
  ||| function< bool(int) > selector;
  ||| public:
  ||| SelectedInts( function< bool(int) > f ) {
  |||     selector = f; };
  ||| void add(int i) {
  |||     if (selector(i))
  |||         bag.push_back(i);
  ||| };
```

```

    int size() { return bag.size(); };
    std::string string() { std::string s;
        for (int i : bag)
            s += to_string(i) + " ";
        return s;
    };
};

```

Illustration

Code:

<pre> cout << "Give a divisor: "; cin >> divisor; cout << "... using " << divisor << endl; SelectedInts multiples ([divisor] (int i) -> bool { return i%divisor==0; }); for (int i=1; i<50; i++) multiples.add(i); </pre>	<p>Output</p> <p>[func] lambdafun: cout << endl; Give a divisor: ... using 7 Multiples of 7: 7 14 21 28 35 42 49</p>
---	--

For the source of this example, see section [24.9.4](#)

Exercise 24.3. Refer to [7.17](#) for background, and note that finding x such that $f(x) = a$ is equivalent to applying Newton to $f(x) - a$.

Implement a class `valuefinder` and its double `find(double)` method.

```

class valuefinder {
private:
    function< double(double) >
        f,fprime;
    double tolerance{.00001};
public:
    valuefinder
    ( function< double(double) > f,
        function< double(double) > fprime )
        : f(f),fprime(fprime) {};

```

used as

```

double root = newton_root.find(number);

```

Exercise 24.4. Can you write a derived class `rootfinder` used as

```

squarefinder newton_root;
double root = newton_root.find(number);

```

24.3.2 Generic lambdas

The `auto` keyword can be used, almost abused, for generic lambdas:

```

|| auto compare = [] (auto a,auto b) { return a<b; };

```

Here the return type is clear, but the input types are generic.

24.3.3 Lambda in algorithm

The `algorithm` header contains a number of functions that naturally use lambdas. For instance, `any_of` can test whether any element of a `vector` satisfies a condition. You can then use a lambda to specify the `bool` function that tests the condition.

24.3.4 Lambda variables by reference

Normally, captured variables are copied by value. You can capture them by reference by prefixing an ampersand to them

```
|| auto maybeinc =
  [&count] (int i) mutable {
    if (f(i)) count++;
}
```

The lambda expression also needs to be marked `mutable` because by default it is a `const`.

Code:

```
|| vector<int> moreints{8,9,10,11,12};
int count{0};
for_each
  ( moreints.begin(),moreints.end(),
  [&count] (int x) mutable {
    if (x%2==0)
      count++;
  });
cout << "number of even: " << count << endl;
```

Output

[stl] counteach:

```
awk: illegal statement
input record number 6, file
source line number 1
make[3]: *** [run_counteach] Error 2
```

For the source of this example, see section [24.9.5](#)

Lambdas without captures can be converted to a function pointer.

24.4 Casts

In C++, constants and variables have clear types. For cases where you want to force the type to be something else, there is the *cast* mechanism. With a cast you tell the compiler: treat this thing as such-and-such a type, no matter how it was defined.

In C, there was only one casting mechanism:

```
|| sometype x;
othertype y = (othertype)x;
```

This mechanism is still available as the `reinterpret_cast`, which does ‘take this byte and pretend it is the following type’:

```
|| sometype x;
auto y = reinterpret_cast<othertype>(x);
```

The inheritance mechanism necessitates another casting mechanism. An object from a derived class contains in it all the information of the base class. It is easy enough to take a pointer to the derived class, the bigger object, and cast it to a pointer to the base object. The other way is harder.

Consider:

```
|| class Base {};
class Derived : public Base {};
Base *dobject = new Derived;
```

Can we now cast dobject to a pointer-to-derived ?

- `static_cast` assumes that you know what you are doing, and it moves the pointer regardless.
- `dynamic_cast` checks whether `object` was actually of class `Derived` before it moves the pointer, and returns `nullptr` otherwise.

Remark 8 One further problem with the C-style casts is that their syntax is hard to spot, for instance by searching in an editor. Because C++ casts have a unique keyword, they are easily recognized.

Further reading <https://www.quora.com/How-do-you-explain-the-differences-among-static-cast-reinterpret-cast-const-cast-and-dynamic-cast-to-a-new-C++-programmer/answer/Brian-Bi>

24.4.1 Static cast

One use of casting is to convert to constants to a ‘larger’ type. For instance, allocation does not use integers but `size_t`.

```
int hundredk = 100000;
int overflow;
overflow = hundredk*hundredk;
cout << "overflow: " << overflow << endl;
size_t bignum = static_cast<size_t>(hundredk) * hundredk;
cout << "bignum: " << bignum << endl;
```

However, if the conversion is possible, the result may still not be ‘correct’.

Code:

<pre>long int hundreddg = 1000000000000; cout << "long number: " << hundreddg << endl; int overflow; overflow = static_cast<int>(hundreddg); cout << "assigned to int: " << overflow << endl;</pre>	Output [cast] intlong: <pre>long number: 1000000000000 assigned to int: 1215752192</pre>
--	---

For the source of this example, see section 24.9.6

There are no runtime tests on static casting.

Static casts are a good way of casting back void pointers to what they were originally.

24.4.2 Dynamic cast

Consider the case where we have a base class and derived classes.

```
class Base {
public:
    virtual void print() = 0;
};
class Derived : public Base {
public:
    virtual void print() {
        cout << "Construct derived!"
            << endl; };
};
```

```
class Erived : public Base {  
public:  
    virtual void print() {  
        cout << "Construct erived!"  
        << endl; };  
};
```

Also suppose that we have a function that takes a pointer to the base class: missing snippet polymain
The function can discover what derived class the base pointer refers to:

```
void f( Base *obj ) {  
    Derived *der =  
        dynamic_cast<Derived*>(obj);  
    if (der==nullptr)  
        cout << "Could not be cast to Derived"  
        << endl;  
    else  
        der->print();  
};  
/* ... */  
Base *object = new Derived();  
f(object);  
Base *nobject = new Erived();  
f(nobject);
```

If we have a pointer to a derived object, stored in a pointer to a base class object, it's possible to turn it safely into a derived pointer again:

Code:

```
void f( Base *obj ) {  
    Derived *der =  
        dynamic_cast<Derived*>(obj);  
    if (der==nullptr)  
        cout << "Could not be cast to Derived"  
        << endl;  
    else  
        der->print();  
};  
/* ... */  
Base *object = new Derived();  
f(object);  
Base *nobject = new Erived();  
f(nobject);
```

Output

[cast] deriverright:

Construct derived!
Could not be cast to Derived

For the source of this example, see section ??

On the other hand, a `static_cast` would not do the job:

Code:

```
|| void g( Base *obj ) {
  Derived *der =
    static_cast<Derived*>(obj);
  der->print();
};

/* ... */
Base *object = new Derived();
g(object);
Base *nobject = new Erived();
g(nobject);
```

Output

[cast] derivewrong:
Construct derived!
Construct erived!

For the source of this example, see section ??

Note: the base class needs to be polymorphic, meaning that that pure virtual method is needed. This is not the case with a static cast, but, as said, this does not work correctly in this case.

24.4.3 Const cast

With `const_cast` you can add or remove const from a variable. This is the only cast that can do this.

24.4.4 Reinterpret cast

The `reinterpret_cast` is the crudest cast, and it corresponds to the C mechanism of ‘take this byte and pretend it of type whatever’. There is a legitimate use for this:

```
|| void *ptr;
ptr = malloc( how_much );
auto address = reinterpret_cast<long int>(ptr);
```

so that you can do arithmetic on the address. For this particular case, `intptr_t` is actually better.

24.4.5 A word about void pointers

A traditional use for casts in C was the treatment of *void pointers*. The need for this is not as severe in C++ as it was before.

A typical use of void pointers appears in the PETSc [3, 4] library. Normally when you call a library routine, you have no further access to what happens inside that routine. However, PETSc has the functionality for you to specify a monitor so that you can print out internal quantities.

```
|| int KSPSetMonitor(KSP ksp,
  int (*monitor)(KSP,int,PetscReal,void*),
  void *context,
  // one parameter omitted
);
```

Here you can declare your own monitor routine that will be called internally: the library makes a *callback* to your code. Since the library can not predict whether your monitor routine may need further information in order to function, there is the `context` argument, where you can pass a structure as void pointer.

This mechanism is no longer needed in C++ where you would use a *lambda* (section 24.3):

```
|| KSPSetMonitor( ksp,
    [mycontext] (KSP k, int , PetscReal r) -> int {
        my_monitor_function(k, r, mycontext); } );
```

24.5 Ivalue vs rvalue

The terms ‘lvalue’ and ‘rvalue’ sometimes appear in compiler error messages.

```
int foo() { return 2; }

int main()
{
    foo() = 2;

    return 0;
}

# gives:
test.c: In function 'main':
test.c:8:5: error: lvalue required as left operand of assignment
```

See the ‘lvalue’ and ‘left operand’? To first order of approximation you’re forgiven for thinking that an *Ivalue* is something on the left side of an assignment. The name actually means ‘locator value’: something that’s associated with a specific location in memory. Thus an lvalue is, also loosely, something that can be modified.

An *rvalue* is then something that appears on the right side of an assignment, but is really defined as everything that’s not an lvalue. Typically, rvalues can not be modified.

The assignment `x=1` is legal because a variable `x` is at some specific location in memory, so it can be assigned to. On the other hand, `x+1=1` is not legal, since `x+1` is at best a temporary, therefore not at a specific memory location, and thus not an lvalue.

Less trivial examples:

```
int foo() { x = 1; return x; }
int main() {
    foo() = 2;
}
```

is not legal because `foo` does not return an lvalue. However,

```
class foo {
private:
    int x;
public:
    int &xfoo() { return x; };
};
int main() {
    foo x;
    x.xfoo() = 2;
```

is legal because the function `xfoo` returns a reference to the non-temporary variable `x` of the `foo` object.

Not every lvalue can be assigned to: in

```
|| const int a = 2;
```

the variable `a` is an lvalue, but can not appear on the left hand side of an assignment.

24.5.1 Conversion

Most lvalues can quickly be converted to rvalues:

```
|| int a = 1;
|| int b = a+1;
```

Here `a` first functions as lvalue, but becomes an rvalue in the second line.

The ampersand operator takes an lvalue and gives an rvalue:

```
|| int i;
|| int *a = &i;
|| &i = 5; // wrong
```

24.5.2 References

The ampersand operator yields a reference. It needs to be assigned from an lvalue, so

```
|| std::string &s = std::string(); // wrong
```

is illegal. The type of `s` is an ‘lvalue reference’ and it can not be assigned from an rvalue.

On the other hand

```
|| const std::string &s = std::string();
```

works, since `s` can not be modified any further.

24.5.3 Rvalue references

A new feature of C++ is intended to minimize the amount of data copying through *move semantics*.

Consider a copy assignment operator

```
|| BigThing& operator=( const BigThing &other ) {
    BigThing tmp(other); // standard copy
    std::swap( /* tmp data into my data */ );
    return *this;
};
```

This calls a copy constructor and a destructor on `tmp`. (The use of a temporary makes this safe under exceptions. The `swap` method never throws an exception, so there is no danger of half-copied memory.)

However, if you assign

```
|| thing = BigThing(stuff);
```

Now a constructor and destructor is called for the temporary rvalue object on the right-hand side.

Using a syntax that is new in C++, we create an *rvalue reference*:

```
|| BigThing& operator=( BigThing &&other ) {
    swap( /* other into me */ );
    return *this;
}
```

24.6 Move semantics

With an *overloaded operator*, such as addition, on matrices (or any other big object):

```
|| Matrix operator+(Matrix &a, Matrix &b);
```

the actual addition will involve a copy:

```
|| Matrix c = a+b;
```

Use a move constructor:

```
|| class Matrix {
private:
    Representation rep;
public:
    Matrix(Matrix &&a) {
        rep = a.rep;
        a.rep = {};
    }
};
```

24.7 Graphics

C++ has no built-in graphics facilities, so you have to use external libraries such as *OpenFrameworks*, <https://openframeworks.cc>.

24.8 Standards timeline

Each standard has many changes over the previous. That said, here are some of the highlights of recent standards.

24.8.1 C++98/C++03

Of the C++98 standard we only highlight deprecated features.

- `auto_ptr` was an early attempt at smart pointers. It is deprecated, and C++17 compilers will actually issue an error on it. For current smart pointers see chapter 15.

24.8.2 C++11

- `auto`

```
|| const auto count = std::count
  (begin(vec), end(vec), value);
```

The `count` variable now gets the type of whatever `vec` contained.

- Range-based for. We have been treating this as the base case, for instance in section 11.2. The C++11 mechanism, using an *iterator* (section 23.2.2) is largely obviated.
- Lambdas. See section 24.3.
- Variadic templates.
- Unique pointer.

```
|| unique_ptr<int> iptr( new int(5) );
```

This fixes problems with `auto_ptr`.

- `constexpr`

```
|| constexpr int get_value() {
  return 5*3;
}
```

24.8.3 C++14

C++14 can be considered a bug fix on C++11. It simplifies a number of things and makes them more elegant.

- Auto return type deduction:

```
|| auto f() {
  SomeType something;
  return something;
}
```

- Generic lambdas (section 24.3.2)

```
|| const auto count = std::count(begin(vec), end(vec),
  [] ( const auto i ) { return i<3; })
);
```

Also more sophisticated capture expressions.

- Unique pointer

```
|| auto iptr( make_unique<int>(5) );
```

This makes `new` and `delete` completely superfluous.

- `constexpr`

```
|| constexpr int get_value() {
  int val = 5;
  int val2 = 3;
  return val*val2
}
```

24.8.4 C++17

- Optional; section .
- Structured binding declarations as an easier way of dissecting tuples; section 23.4.
- Init statement in conditionals; section ??.

24.8.5 C++20

- *modules*: these offer a better interface specification than using *header files*.
- *coroutines*, another form of parallelism.
- *concepts* including in the standard library via ranges; section 21.3.
- *spaceship operator* including in the standard library
- broad use of normal C++ for direct compile-time programming, without resorting to template metaprogramming (see last trip reports)
- *ranges*
- *calendars* and *time zones*
- *text formatting*
- *span*. See section 11.8.5.

24.9 Sources used in this chapter

24.9.1 Listing of code/auto/plainget

```
/*********************************************
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2018 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** plainget.cxx : combining auto and references
*****
*******************************************/
```

```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

//codesnippet autoclass
class A {
private: float data;
public:
    A(float i) : data(i) {};
    auto &access() {
        return data; };
    void print() {
        cout << "data: " << data << endl; };
};

//codesnippet end

int main() {

    //codesnippet autoplain
    A my_a(5.7);
    auto get_data = my_a.access();
    get_data += 1;
    my_a.print();
    //codesnippet end
```

```
    || return 0;
  || }
```

24.9.2 Listing of code/auto/refget

```
/*****
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2018 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** refget.cxx : combining auto and references
*****
*****
```

```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

class A {
private: float data;
public:
  A(float i) : data(i) {};
  auto &access() {
    return data; };
  void print() {
    cout << "data: " << data << endl; };
};

int main() {

  //codesnippet autoref
  A my_a(5.7);
  auto &get_data = my_a.access();
  get_data += 1;
  my_a.print();
  //codesnippet end

  return 0;
}
```

24.9.3 Listing of code/auto/constrefget

```
/*****
*****
**** This file belongs with the course
**** Introduction to Scientific Programming in C++/Fortran2003
**** copyright 2018 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
**** constrefget.cxx : combining auto and references
**** This Does Not Compile
*****
*****
```

```
#include <iostream>
using std::cin;
```

```
using std::cout;
using std::endl;

class A {
private: float data;
public:
    A(float i) : data(i) {};
    auto &access() {
        return data; };
    void print() {
        cout << "data: " << data << endl; };
};

int main() {

    //codesnippet constrefget
    A my_a(5.7);
    const auto &get_data = my_a.access();
    get_data += 1;
    my_a.print();
    //codesnippet end

    return 0;
}
```

24.9.4 Listing of code/func/lambdafun

```
/*********************************************
*****
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2018/9 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** lambdafun.cxx : storing a lambda
*****
********************************************/

//codesnippet lambdaclass
#include <functional>
using std::function;
//codesnippet end

#include <iostream>
using std::cin;
using std::cout;
using std::endl;

#include <vector>
using std::vector;

#include <string>
using std::string;
using std::to_string;

//codesnippet lambdaclass
class SelectedInts {
private:
```

```

vector<int> bag;
function< bool(int) > selector;
public:
SelectedInts( function< bool(int) > f ) {
    selector = f; }
void add(int i) {
    if (selector(i))
        bag.push_back(i);
};
int size() { return bag.size(); };
std::string string() { std::string s;
    for ( int i : bag )
        s += to_string(i)+" ";
    return s;
};
//codesnippet end

int main() {

SelectedInts greaterthan5
    ( [] (int i) -> bool { return i>5; } );
int upperbound = 20;
for (int i=0; i<upperbound; i++)
    greaterthan5.add(i);
// cout << "Ints under " << upperbound <<
//     " greater than 5: " << greaterthan5.size() << endl;

int divisor;
//codesnippet lambdaclasse
cout << "Give a divisor: "; cin >> divisor; cout << endl;
cout << "... using " << divisor << endl;
SelectedInts multiples
    ( [divisor] (int i) -> bool {
        return i%divisor==0; } );
for (int i=1; i<50; i++)
    multiples.add(i);
//codesnippet end
cout << "Multiples of " << divisor << ":" "
    << "\n"
    << multiples.string() << endl;

return 0;
}

```

24.9.5 Listing of code/stl/printeach

```

*****
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2019 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** printeach.cxx : use of for_each
*****
***** ****

```

```
#include <iostream>
using std::cin;
using std::cout;
using std::endl;

//codesnippet printeach
#include <algorithm>
using std::for_each;
//codesnippet end

#include <vector>
using std::vector;

int main() {

    cout << "Print" << endl;
    //codesnippet printeach
    vector<int> ints{3,4,5,6,7};
    for_each
        ( ints.begin(), ints.end(),
        [] (int x) -> void {
            if (x%2==0)
                cout << x << endl;
        } );
    //codesnippet end
    cout << "print" << endl;

    cout << "Count" << endl;
    //codesnippet counteach
    vector<int> moreints{8,9,10,11,12};
    int count{0};
    for_each
        ( moreints.begin(), moreints.end(),
        [&count] (int x) mutable {
            if (x%2==0)
                count++;
        } );
    cout << "number of even: " << count << endl;
    //codesnippet end
    cout << "count" << endl;

    return 0;
}
```

24.9.6 Listing of code/cast/intlong

```
*****
***** This file belongs with the course
***** Introduction to Scientific Programming in C++/Fortran2003
***** copyright 2018 Victor Eijkhout eijkhout@tacc.utexas.edu
*****
***** intlong.cxx : cast int
*****
*****
```

```
#include <iostream>
using namespace std; //::static_cast;

int main() {
    //codesnippet longcast
    long int hundreddg = 1000000000000;
    cout << "long number: "
        << hundreddg << endl;
    int overflow;
    overflow = static_cast<int>(hundreddg);
    cout << "assigned to int: "
        << overflow << endl;
    //codesnippet end

    return 0;
}
```


Chapter 25

C++ for C programmers

25.1 I/O

There is little employ for `printf` and `scanf`. Use `cout` (and `cerr`) and `cin` instead. There is also the `fmlib` library.

Chapter 13.

25.2 Arrays

Arrays through square bracket notation are unsafe. They are basically a pointer, which means they carry no information beyond the memory location.

It is much better to use `vector`. Use range-based loops, even if you use bracket notation.

Chapter 11.

Vectors own their data exclusively, so having multiple C style pointers into the same data act like so many arrays does not work. For that, use the `span`; section 11.8.5.

25.2.1 Vectors from C arrays

Suppose you have to interface to a C code that uses `malloc`. Vectors have advantages, such as that they know their size, you may want to wrap these C style arrays in a vector object. This is easily done using a *range constructor*:

```
|| vector<double> x( pointer_to_first, pointer_after_last );
```

Such vectors can still be used dynamically, but this may give a memory leak and other possibly unwanted behavior:

Code:

```
float *x;
x = (float*)malloc(length*sizeof(float));
/* ... */
vector<float> xvector(x, x+length);
cout << "xvector has size: " << xvector.size();
xvector.push_back(5);
cout << "Push back was successful" << endl;
cout << "pushed element: "
     << xvector.at(length) << endl;
cout << "original array: "
     << x[length] << endl;
```

Output

```
[array] xvector:
xvector has size: 53
Push back was successful
pushed element: 5
original array: 3.97157e+18
```

For the source of this example, see section [25.10.1](#)

25.3 Dynamic storage

Another advantage of vectors and other containers is the *RAII* mechanism, which implies that dynamic storage automatically gets deallocated when leaving a scope. Section [11.8.3](#). (For safe dynamic storage that transcends scope, see smart pointers discussed below.)

RAII stands for ‘Resource Allocation Is Initialization’. This means that it is no longer possible to write

```
double *x;
if (something1) x = malloc(10);
if (something2) x[0];
```

which may give a memory error. Instead, declaration of the name and allocation of the storage are one indivisible action.

On the other hand:

```
|| vector<double> x(10);
```

declares the variable `x`, allocates the dynamic storage, and initializes it.

25.4 Strings

A *C string* is a character array with a *null terminator*. On the other hand, a *string* is an object with operations defined on it.

Chapter [12](#).

25.5 Pointers

Many of the uses for *C pointers*, which are really addresses, have gone away.

- Strings are done through `std::string`, not character arrays; see above.
- Arrays can largely be done through `std::vector`, rather than `malloc`; see above.

- Traversing arrays and vectors can be done with ranges; section 11.2.
- To pass an argument *by reference*, use a *reference*. Section 7.4.
- Anything that obeys a scope should be created through a *constructor*, rather than using `malloc`.

There are some legitimate needs for pointers, such as Objects on the heap. In that case, use `shared_ptr` or `unique_ptr`; section 15.2. The C pointers are now called *bare pointers*, and they can still be used for ‘non-owning’ occurrences of pointers.

25.5.1 Parameter passing

No longer by address: now true references! Section 7.4.

25.6 Objects

Objects are structures with functions attached to them. Chapter 10.

25.7 Namespaces

No longer name conflicts from loading two packages: each can have its own namespace. Chapter 19.

25.8 Templates

If you find yourself writing the same function for a number of types, you’ll love templates. Chapter 21.

25.9 Obscure stuff

25.9.1 Lambda

Function expressions. Section 24.3.

25.9.2 Const

Functions and arguments can be declared const. This helps the compiler. Section 17.1.

25.9.3 Lvalue and rvalue

Section 24.5.

25.10 Sources used in this chapter

25.10.1 Listing of code/array/cvector

```
/*
 ****
 **** This file belongs with the course
 **** Introduction to Scientific Programming in C++/Fortran2003
 **** copyright 2019 Victor Eijkhout eijkhout@tacc.utexas.edu
 ****
 **** cvector.cxx : vector from C array
 ****
 ****
#include <iostream>
using std::cerr;
using std::cin;
using std::cout;
using std::endl;

#include <vector>
using std::vector;

int main() {

{
    int length{53};
    //codesnippet cvector1
    float *x;
    x = (float*)malloc(length*sizeof(float));
    //codesnippet end
    if (!x) {
        cerr << "Could not allocate example 1\n";
        throw(1);
    }
    //codesnippet cvector1
    vector<float> xvector(x, x+length);
    cout << "xvector has size: " << xvector.size() << endl;
    xvector.push_back(5);
    cout << "Push back was successful" << endl;
    cout << "pushed element: "
        << xvector.at(length) << endl;
    cout << "original array: "
        << x[length] << endl;
    //codesnippet end
}

    return 0;
}
```

Chapter 26

C++ review questions

26.1 Arithmetic

1. Given

```
int n;
```

write code that uses elementary mathematical operators to compute n-cubed: n^3 .
Do you get the correct result for all n ? Explain.

2. What is the output of:

```
int m=32, n=17;  
cout << n%m << endl;
```

26.2 Looping

1. Suppose a function

```
bool f(int);
```

is given, which is true for some positive input value. Write a main program that finds the smallest positive input value for which f is true.

2. Suppose a function

```
bool f(int);
```

is given, which is true for some negative input value. Write a main program that finds the (negative) input with smallest absolute value for which f is true.

26.3 Functions

Exercise 26.1. The following code snippet computes in a loop the recurrence

$$v_{i+1} = av_i + b, \quad v_0 \text{ given.}$$

Write a recursive function

```
|| float v = value_n(n, a, b, v0);
```

that computes the value v_n for $n \geq 0$.

26.4 Vectors

Exercise 26.2. The following program has several syntax and logical errors. The intended purpose is to read an integer N , and sort the integers $1, \dots, N$ into two vectors, one for the odds and one for the evens. The odds should then be multiplied by two. Your assignment is to debug this program. For 10 points of credit, find 10 errors and correct them. Extra errors found will count as bonus points. For logic errors, that is, places that are syntactically correct, but still ‘do the wrong thing’, indicate in a few words the problem with the program logic.

```
#include <iostream>
using std::cout; using std::cin;
using std::vector;

int main() {
    vector<int> evens, odd;
    cout << "Enter an integer value " << endl;
    cin << N;
    for (i=0; i<N; i++) {
        if (i%2==0) {
            odds.push_back(i);
        }
        else
            evens.push_back(i);
    }
    for (auto o : odds)
        o /= 2
    return 1
}
```

26.5 Vectors

Exercise 26.3. Take another look at exercise 26.1. Now assume that you want to save the values v_i in an array $\text{vector} < \text{float} >$ values . Write code that does that, using first the iterative, then the recursive computation. Which do you prefer?

26.6 Objects

Exercise 26.4. Let a class Point class be given. How would you design a class SetOfPoints (which models a set of points) so that you could write

```
Point p1, p2, p3;
SetOfPoints pointset;
// add points to the set:
pointset.add(p1); pointset.add(p2);
```

Give the relevant data members and methods of the class.

Exercise 26.5. You are programming a video game. There are moving elements, and you want to have an object for each. Moving elements need to have a method move with an argument that indicates a time duration, and this method updates the position of the element, using the speed of that object and the duration.

Supply the missing bits of code.

```
class position {
    /* ... */
public:
    position() {};
    position(int initial) { /* ... */ };
    void move(int distance) { /* ... */ };
};

class actor {
protected:
    int speed;
    position current;

public:
    actor() { current = position(0); };
    void move(int duration) {
        /* THIS IS THE EXERCISE: */
        /* write the body of this function */
    };
};

class human : public actor {
public:
    human() // EXERCISE: write the constructor
};

class airplane : public actor {
public:
    airplane() // EXERCISE: write the constructor
};

int main() {
    human Alice;
    airplane Seven47;
    Alice.move( 5 );
    Seven47.move( 5 );
```


PART III

FORTRAN

Chapter 27

Basics of Fortran

Fortran is an old programming language, dating back to the 1950s, and the first ‘high level programming language’ that was widely used. In a way, the fields of programming language design and compiler writing started with Fortran, rather than this language being based on established fields. Thus, the design of Fortran has some idiosyncracies that later designed languages have not adopted. Many of these are now ‘deprecated’ or simply inadvisable. Fortunately, it is possible to write Fortran in a way that is every bit as modern and sophisticated as other current languages.

In this part of our book, we will teach you safe practices for writing Fortran. Occasionally we will not mention practices that you will come across in old Fortran codes, but that we would not advise you taking up. While our exposition of Fortran can stand on its own, we will in places point out explicitly differences with C++.

For secondary reading, this is a good course on modern Fortran: http://www.pcc.qub.ac.uk/tec/courses/f77tof90/stu-notes/f90studentMIF_1.html

27.1 Source format

Fortran started in the era when programs were stored on *punch cards*. Those had 80 columns, so a line of Fortran source code could not have more than 80 characters. Also, the first 6 characters had special meaning. This is referred to as *fixed format*. However, starting with *Fortran 90* it became possible to have *free format*, which allowed longer lines without special meaning for the initial columns.

There are further differences between the two formats (notably continuation lines) but we will only discuss free format in this course.

Many compilers have a convention for indicating the source format by the file name extension:

- f and f90 are the extensions for old-style fixed format; and
- F and F90 are the extensions for new free format.

The postfix 90 indicates that the *C preprocessor* is applied to the file. For this course we will use the *F90* extension.

27.2 Compiling Fortran

For Fortran programs, the compiler is *gfortran* for the GNU compiler, and *ifort* for Intel.

The minimal Fortran program is:

```
|| Program SomeProgram
  ! stuff goes here
|| End Program SomeProgram
```

Exercise 27.1. Add the line

```
|| print *, "Hello world!"
```

to the empty program, and compile and run it.

Fortran ignores case. Both keywords such as `Begin` or `Program` can just as well be written as `bEGIN` or `PrOgRaM`.

A program optionally has a `stop` statement, which can return a message to the OS.

Code:

```
|| Program SomeProgram
  stop 'the code stops here'
|| End Program SomeProgram
```

Output

[basicf] stop:

STOP the code stops here

For the source of this example, see section [27.8.1](#)

27.3 Main program

Fortran does not use curly brackets to delineate blocks, instead you will find `end` statements. The very first one appears right when you start writing your program: a Fortran program needs to start with a `Program` line, and end with `End Program`. The program needs to have a name on both lines:

```
|| Program SomeProgram
  ! stuff goes here
|| End Program SomeProgram
```

and you can not use that name for any entities in the program.

27.3.1 Program structure

Unlike C++, Fortran can not mix variable declarations and executable statements, so both the main program and any subprograms have roughly a structure:

```
|| Program foo
  < declarations >
  < statements >
|| End Program foo
```

(The *emacs* editor will supply the block type and name if you supply the ‘end’ and hit the TAB or RETURN key; see section [2.1.1](#).)

Things to note

- No includes before the program

- Program has a name (emacs tip: type `end<TAB>`)
- There is an **End**, rather than curly braces.
- Declarations first, not interspersed.

27.3.2 Statements

Let's say a word about layout. Fortran has a ‘one line, one statement’ principle.

- As long as a statement fits on one line, you don’t have to terminate it explicitly with something like a semicolon:

```
|| x = 1
|| y = 2
```

- If you want to put two statements on one line, you have to terminate the first one:

```
|| x = 1; y = 2
```

- If a statement spans more than one line, all but the first line need to have an explicit *continuation character*, the ampersand:

```
|| x = very &
   long &
   expression
```

27.3.3 Comments

Fortran knows only single-line *comments*, indicated by an exclamation point:

```
|| x = 1 ! set x to one
```

Everything from the exclamation point onwards is ignored.

Maybe not entirely obvious: you can have a comment after a continuation character:

```
|| x = f(a) & ! term1
   + g(b)      ! term2
```

27.4 Variables

Unlike in C++, where you can declare a variable right before you need it, Fortran wants its variables declared near the top of the program or subprogram:

```
|| Program YourProgram
  || implicit none
  || ! variable declaration
  || ! executable code
  || End Program YourProgram
```

A variable declaration looks like:

```
|| type [ , attributes ] :: name1 [ , name2, .... ]
```

where

- we use the common grammar shorthand that [something] stands for an optional ‘something’;
- *type* is most commonly `integer`, `real(4)`, `real(8)`, `logical`. See below; section 27.4.1.
- *attributes* can be `dimension`, `allocatable`, `intent`, `parameters` et cetera.
- *name* is something you come up with. This has to start with a letter.

Data types

- Numeric: `Integer`, `Real`, `Complex`.
- Logical: `Logical`.
- Character: `Character`. Strings are realized as arrays of characters.

Further specifications for numerical precision are discussed in section 27.4.2. Strings are discussed in chapter 32.

27.4.1 Declarations

Fortran has a somewhat unusual treatment of data types: if you don’t specify what data type a variable is, Fortran will deduce it from a default or user rules. This is a very dangerous practice, so we advocate putting a line

```
// implicit none
```

immediately after any program or subprogram header.

You can the number of bytes for numerical types in the declaration:

```
integer(2) :: i2
integer(4) :: i4
integer(8) :: i8

real(4) :: r4
real(8) :: r8
real(16) :: r16

complex(8) :: c8
complex(16) :: c16
complex*32 :: c32
```

27.4.2 Precision

In Fortran you can actually ask for a type with specified precision.

- For integers you can specify the number of decimal digits with `selected_int_kind(n)`.
- For floating point numbers can specify the number of significant digits, and optionally the decimal exponent range with `selected_real_kind(p[,r])` of significant digits.
- To query the type of a variable, use the function `kind`, which returns an integer.

Likewise, you can specify the precision of a constant. Writing `3.14` will usually be a single precision `real`.

Single/double precision constants

Code:

```

|| real(8) :: x,y,z
x = 1.
y = .1
z = x+y
print *,z
x = 1.d0
y = .1d0
z = x+y
print *,z

```

Output

[basicf] e0:

```

1.100000014901161
1.1000000000000001

```

For the source of this example, see section [27.8.2](#)

You can query how many bytes a data type takes with `kind`.

Numerical precision

Number of bytes determines numerical precision:

- Computations in 4-byte have relative error $\approx 10^{-6}$
- Computations in 8-byte have relative error $\approx 10^{-15}$

Also different exponent range: max $10^{\pm 50}$ and $10^{\pm 300}$ respectively.

Storage size

F08: `storage_size` reports number of bits.

F95: `bit_size` works on integers only.

`c_sizeof` reports number of bytes, requires `iso_c_binding` module.

Force a constant to be `real(8)`:

Double precision constants

```

|| real(8) :: x,y
x = 3.14d0
y = 6.022e-23

```

- Use a compiler flag such as `-r8` to force all reals to be 8-byte.
- Write `3.14d0`
- `x = real(3.14, kind=8)`

Complex

Complex constants are written as a pair of reals in parentheses.

There are some basic operations.

Code:

```

|| Complex :: &
    fourtyfivedegrees = (1.,1.), &
    other
print *,fourtyfivedegrees
other = 2*fourtyfivedegrees
print *,other

```

Output

[basicf] complex:

```

(1.0000000,1.0000000)
(2.0000000,2.0000000)

```

For the source of this example, see section [27.8.3](#)

27.4.3 Initialization

Variables can be initialized in their declaration:

```
|| integer :: i=2
|| real(4) :: x = 1.5
```

That this is done at compile time, leading to a common error:

```
|| subroutine foo()
||   implicit none
||   integer :: i=2
||   print *, i
||   i = 3
|| end subroutine foo
```

On the first subroutine call `i` is printed with its initialized value, but on the second call this initialization is not repeated, and the previous value of 3 is remembered.

27.5 Input/Output, or I/O as we say

Simple I/O

- Input:

```
|| READ *, n
```

- Output:

```
|| PRINT *, n
```

There is also `WRITE`.

The ‘star’ indicates that default formatting is used.

Other syntax for read/write with files and formats.

27.6 Expressions

Arithmetic expressions

- Pretty much as in C++
- Exception: `r**a` for power r^a .
- Modulus is a function: `MOD(7,3)`.

Boolean expressions

- Long form:

```
.and. .not. .or.
.lt. .le. .eq. .ne. .ge. .gt.
.true. .false.
```

- Short form:

```
< <= == /= > >=
```

Conversion and casting

Conversion is done through functions.

- `INT`: truncation; `NINT` rounding
- `REAL`, `FLOAT`, `SNGL`, `DBLE`
- `Cmplx`, `Conjg`, `AIMag`

<http://userweb.eng.gla.ac.uk/peter.smart/com/com/f77-conv.htm>

Complex

Complex numbers exist

Strings

Strings are delimited by single or double quotes.

For more, see chapter 32.

27.7 Review questions

Exercise 27.2. What is the output for this fragment, assuming *i*, *j* are integers?

```
|| integer :: idiv
|| !! ...
|| i = 3 ; j = 2 ; idiv = i/j
|| print *,idiv
```

Exercise 27.3. What is the output for this fragment, assuming *i*, *j* are integers?

```
|| real :: fdiv
|| !! ...
|| i = 3 ; j = 2 ; fdiv = i/j
|| print *,fdiv
```

Exercise 27.4. In declarations

```
|| real(4) :: x
|| real(8) :: y
```

what do the 4 and 8 stand for?

What is the practical implication of using the one or the other?

Exercise 27.5. Write a program that :

- displays the message Type a number,
- accepts an integer number from you (use Read),
- makes another variable that is three times that integer plus one,
- and then prints out the second variable.

Exercise 27.6. In the following code, if value is nonzero, what do expect about the output?

```
|| real(8) :: value8,should_be_value
|| real(4) :: value4
|| !! ...
|| print *, "... original value was:",value8
|| value4 = value8
|| print *, "... copied to single:",value4
|| should_be_value = value4
|| print *, "... copied back to double:",should_be_value
|| print *, "Difference:",value8-should_be_value
```

27.8 Sources used in this chapter

27.8.1 Listing of code/basicf/stop

```
!*****
!***  
!*** This file belongs with the course  
!*** Introduction to Scientific Programming in C++/Fortran2003  
!*** copyright 2017 Victor Eijkhout eijkhout@tacc.utexas.edu  
!***  
!*** emptyprog.F90 : an empty program  
!***  
!*****  
  
!!codesnippet stopf  
Program SomeProgram  
    stop 'the code stops here'  
End Program SomeProgram  
!!codesnippet end
```

27.8.2 Listing of code/basicf/e0

```
!*****  
!***  
!*** This file belongs with the course  
!*** Introduction to Scientific Programming in C++/Fortran2003  
!*** copyright 2017/8 Victor Eijkhout eijkhout@tacc.utexas.edu  
!***  
!*** e0.F90 : constants  
!***  
!*****  
  
Program DO  
    implicit none  
  
    !!codesnippet f0const  
    real(8) :: x,y,z  
    x = 1.  
    y = .1  
    z = x+y  
    print *, z  
    x = 1.d0  
    y = .1d0  
    z = x+y  
    print *, z  
    !!codesnippet end  
  
End Program DO
```

27.8.3 Listing of code/basicf/complex

```
!*****  
!***  
!*** This file belongs with the course  
!*** Introduction to Scientific Programming in C++/Fortran2003  
!*** copyright 2017 Victor Eijkhout eijkhout@tacc.utexas.edu  
!***  
!*** complex.F90 : basic complex stuff
```

```
!***  
*****  
  
Program Complex  
    implicit none  
  
    !!codesnippet fcomplex  
    Complex :: &  
        fourtyfivedegrees = (1.,1.), &  
        other  
    print *,fourtyfivedegrees  
    other = 2*fourtyfivedegrees  
    print *,other  
    !!codesnippet end  
  
End Program Complex
```


Chapter 28

Conditionals

28.1 Forms of the conditional statement

The Fortran conditional statement uses the `if` keyword:

Conditionals

Single line conditional:

```
|| if ( test ) statement
```

The full if-statement is:

```
|| if ( something ) then
  !! something_doing
else
  !! otherwise_else
end if
```

The ‘else’ part is optional; you can nest conditionals.

You can label conditionals, which is good for readability but adds no functionality:

```
|| checkx: if ( ... some test on x ... ) then
checky:   if ( ... some test on y ... ) then
          ... code ...
        end if checky
      else checkx
        ... code ...
    end if checkx
```

28.2 Operators

Comparison and logical operators

Operator	old style	meaning	example
<code>==</code>	<code>.eq.</code>	equals	<code>x==y-1</code>
<code>/=</code>	<code>.ne.</code>	not equals	<code>x*x!=5</code>
<code>></code>	<code>.gt.</code>	greater	<code>y>x-1</code>
<code>>=</code>	<code>.ge.</code>	greater or equal	<code>sqrt(y)>=7</code>
<code><</code>	<code>.lt.</code>	less than	
<code><=</code>	<code>.le.</code>	less equal	
	<code>.and. .or.</code>	and, or	<code>x<1 .and. x>0</code>
	<code>.not.</code>	not	<code>.not. (x>1 .and. x<2)</code>
	<code>.eqv.</code>	equiv	$(x \wedge y) \vee (\neg x \wedge \neg y)$
	<code>.neqv.</code>	not equiv	$(x \wedge \neg y) \vee (\neg x \wedge y)$

The logical operators such as `.AND.` are not short-cut as in C++. Clauses can be evaluated in any order.

Exercise 28.1. Read in three grades: Algebra, Biology, Chemistry, each on a scale 1 ··· 10.

Compute the average grade, with the conditions:

- Algebra is always included.
- Biology is only included if it increases the average.
- Chemistry is only included if it is 6 or more.

28.3 Select statement

The Fortran equivalent of the C++ `case` statement is `select`. It takes single values or ranges; works for integers and characters.

Select statement

Test single values or ranges, integers or characters:

```
|| Select Case (i)
|| Case (: -1)
||   print *, "Negative"
|| Case (5)
||   print *, "Five!"
|| Case (0)
||   print *, "Zero."
|| Case (1:4,6:) ! can not have (1:)
||   print *, "Positive"
|| end Select
```

Compiler does checking on overlapping cases!

28.4 Boolean variables

The Fortran type for booleans is `Logical`.

The two literals are `.true.` and `.false.`

Exercise 28.2. Print a boolean variable. What does the output look like in the true and false case?

28.5 Review questions

Exercise 28.3. What is a conceptual difference between the C++ `switch` and the Fortran `Select` statement?

Chapter 29

Loop constructs

29.1 Loop types

Fortran has the usual indexed and ‘while’ loops. There are variants of the basic loop, and both use the `do` keyword. The simplest loop has

- a loop variable, which needs to be declared;
- a lower bound and upper bound.

We’ll see more types of loops below.

Indexed Do loops

```
|| integer :: i
|| do i=1,10
||   ! code with i
|| end do
```

You can include a step size (which can be negative) as a third parameter:

```
|| do i=1,10,3
||   ! code with i
|| end do
```

While loop

The while loop has a pre-test:

```
|| do while (i<1000)
||   print *,i
||   i = i*2
|| end do
```

You can label loops, which improves readability, but see also below.

```
|| outer: do i=1,10
||   inner: do j=1,10
||     end do inner
||   end do outer
```

The label needs to be on the same line as the `do`, and if you use a label, you need to mention it on the `end do` line.

F77 note: Do not use label-terminated loops. Do not use non-integer loop variables.

29.2 Interruptions of the control flow

For indeterminate looping, you can use the `while` test, or leave out the loop parameter altogether. In that case you need the `exit` statement to stop the iteration.

Exit and cycle

Loop without counter or while test:

```
|| do
  call random_number(x)
  if (x>.9) exit
  print *, "Nine out of ten exes agree"
end do
```

Skip rest of current iteration:

```
|| do i=1,100
  if (isprime(i)) cycle
  ! do something with non-prime
end do
```

Cycle and exit can apply to multiple levels, if the do-statements are labeled.

```
|| outer : do i = 1,10
inner : do j = 1,10
  if (i+j>15) exit outer
  if (i==j) cycle inner
end do inner
end do outer
```

29.3 Implied do-loops

There are do loops that you can write in a single line by an expression and a loop header. In effect, such an *implied do loop* becomes the sum of the indexed expressions. This is useful for I/O. For instance, iterate a simple expression:

Implied do loops

```
|| print *, (2*i, i=1,20)
```

You can iterate multiple expressions:

```
|| print *, (2*i, 2*i+1, i=1,20)
```

These loops can be nested:

```
|| print *, ( (i*j, i=1,20), j=1,20 )
```

This construct is especially useful for printing arrays.

Exercise 29.1. Use the implied do-loop mechanism to print a triangle:

```
|| 1
  2 2
  3 3 3
  4 4 4 4
```

up to a number that is input.

29.4 Review questions

Exercise 29.2. What is the output of:

```
|| do i=1,11,3  
||   print *,i  
|| end do
```

What is the output of:

```
|| do i=1,3,11  
||   print *,i  
|| end do
```


Chapter 30

Scope

30.1 Scope

Fortran ‘has no curly brackets’: you not easily create nested scopes with local variables as in C++. For instance, the range between `do` and `end do` is not a scope. This means that all variables have to be declared at the top of a program or subprogram.

30.1.1 Variables local to a program unit

Variables declared in a subprogram have similar scope rules as in C++:

- Their visibility is controlled by their textual scope:

```
|| Subroutine Foo()
||   integer :: i
||   ! 'i' can now be used
||   call Bar()
||   ! 'i' still exists
End Subroutine Foo
Subroutine Bar() ! no parameters
  ! The 'i' of Foo is unknown here
End Subroutine Bar
```

- Their dynamic scope is the lifetime of the program unit in which they are declared:

```
|| Subroutine Foo()
||   call Bar()
||   call Bar()
End Subroutine Foo
Subroutine Bar()
  Integer :: i
  ! 'i' is created every time Bar is called
End Subroutine Bar
```

30.1.1.1 Variables in a module

Variables in a module (section 34.2) have a lifetime that is independent of the calling hierarchy of program units: they are *static variables*.

30.1.1.2 Other mechanisms for making static variables

Before Fortran gained the facility for recursive functions, the data of each function was placed in a statically determined location. This meant that the second time you call a function, all variables still have the value that they had last time. To force this behaviour in modern Fortran, you can add the `Save` specification to a variable declaration.

Another mechanism for creating static data was the `Common` block. This should not be used, since a `Module` is a more elegant solution to the same problem.

30.1.2 Variables in an internal procedure

An *internal procedure* (that is, one placed in the `Contains` part of a program unit) can receive arguments from the containing program unit. It can also access directly any variable declared in the containing program unit, through a process called *host association*.

The rules for this are messy, especially when considering implicit declaration of variables, so we advise against relying on it.

Chapter 31

Subprograms and modules

31.1 Procedures

Programs can have subprograms: parts of code that for some reason you want to separate from the main program. If you structure your code in a single file, this is the recommended structure:

Subprograms in contains clause

```
|| Program foo
  < declarations>
  < executable statements >
  Contains
    < subprogram definitions >
End Program foo
```

That is, subprograms are placed after the main program statements, separated by a `Contains` clause.

In general, these are the placements of subprograms:

- Internal: after the `Contains` clause of a program
- In a `Module`; see section 34.2.
- Externally: the subprogram is not internal to a `Program` or `Module`. In this case it's safest to declare it through an `Interface` specification; section 31.2.

31.1.1 Subroutines and functions

Fortran has two types of subprograms:

- Subroutines, which are somewhat like `void` functions in C++: they can be used to structure the code, and they can only return information to the calling environment through their parameters.
- Functions, which are like C++ functions with a return value.

Both types have the same structure, which is roughly the same as of the main program:

```
|| subroutine foo( <parameters> )
<variable declarations>
<executable statements>
end subroutine foo
```

and

```

|| returntype function foo( <parameters> )
|| <variable declarations>
|| <executable statements>
end subroutine foo

```

Exit from a procedure can happen two ways:

1. the flow of control reaches the end of the procedure body, or
2. execution is finished by an explicit `return` statement.

```

|| subroutine foo()
||   print *, "foo"
||   if (something) return
||   print *, "bar"
end subroutine foo

```

The `return` statement is optional in the first case. The `return` statement is different from C++ in that it does not indicate the return result of a function.

Exercise 31.1. Rewrite the above subroutine `foo` without a `return` statement.

A subroutine is invoked with a `call` statement:

```
call foo()
```

Subroutine with argument

Code:

```

program printing
  implicit none
  call printint(5)
contains
  subroutine printint(invalue)
    implicit none
    integer :: invalue
    print *, invalue
  end subroutine printint
end program printing

```

Output
[funcf] **printone:**

5

For the source of this example, see section [31.3.1](#)

Subroutine can change argument

Code:

```

program adding
  implicit none
  integer :: i=5
  call addint(i, 4)
  print *, i
contains
  subroutine addint(inoutvar, addendum)
    implicit none
    integer :: inoutvar, addendum
    inoutvar = inoutvar + addendum
  end subroutine addint
end program adding

```

Output
[funcf] **addone:**

9

For the source of this example, see section [31.3.2](#)

Parameters are always ‘by reference’!

Recursion

Declare function as Recursive Function

Code:

```
recursive integer function fact(invalue) &
    result (val)
    implicit none
    integer,intent(in) :: invalue
    if (invalue==0) then
        val = 1
    else
        val = invalue * fact(invalue-1)
    end if
end function fact
```

Output

[funcf] fact:

```
echo 7 | ./fact
7 factorial is 5040
```

For the source of this example, see section [31.3.3](#)

Note the `result` clause. This prevents ambiguity.

31.1.2 Return results

While a subroutine can only return information through its parameters, a *function* procedure returns an explicit result:

```
logical function test(x)
    implicit none
    real :: x

    test = some_test_on(x)
    return ! optional, see above
end function test
```

You see that the result is not returned in the `return` statement, but rather through assignment to the function name. The `return` statement, as before, is optional and only indicates where the flow of control ends.

A *function* in Fortran is a subprogram that return a result to its calling program, much like a non-void function in C++

Function definition and usage

- **subroutine** vs **function**:
compare `void` functions vs non-void in C++.
- Return type, keyword `function`, name, parameters
- Function body has statements
- Result is returned by assigning to the function name
- Use: `y = f(x)`

Function example

Code:

```
program plussing
    implicit none
    integer :: i
    i = plusone(5)
    print *,i
contains
    integer function plusone(invalue)
        implicit none
        integer :: invalue
        plusone = invalue+1 ! note!
    end function plusone
end program plussing
```

Output
[funcf] plusone:

6

For the source of this example, see section [31.3.4](#)

A function is not invoked with `call`, but rather through being used in an expression:

```
|| if (test(3.0) .and. something_else) ...
```

You now have the following cases to make the function known in the main program:

- If the function is in a `contains` section, its type is known in the main program.
- If the function is in a module (see section [34.2](#) below), it becomes known through a `use` statement.

F77 note: Without modules and `contains` sections, you need to declare the function type explicitly in the calling program. The safe way is through using an `interface` specification.

Exercise 31.2. Write a program that asks the user for a positive number; negative input should be rejected. Fill in the missing lines in this code fragment:

Code:

```
program readpos
    implicit none
    real(4) :: userinput
    print *, "Type a positive number:"
    userinput = read_positive()
    print *, "Thank you for", userinput
contains
    real(4) function read_positive()
        implicit none
    !! ...
    end function read_positive
end program readpos
```

Output
[funcf] readpos:

```
Type a positive number:
No, not -5.00000000
No, not 0.00000000
No, not -3.14000010
Thank you for 2.48000002
```

For the source of this example, see section [31.3.5](#)

Why a ‘contains’ clause?

```
Program NoContains
    implicit none
    call DoWhat()
end Program NoContains

subroutine DoWhat(i)
```

```
    implicit none
    integer :: i
    i = 5
end subroutine DoWhat
```

Warning only, crashes.

```

Program ContainsScope
  implicit none
  call DoWhat()
contains
  subroutine DoWhat(i)
    implicit none

```

```

integer :: i
i = 5
end subroutine DoWhat
end Program ContainsScope

```

Error, does not compile

Why a ‘contains’ clause, take 2

Code:

```

Program NoContainTwo
  implicit none
  integer :: i=5
  call DoWhat(i)
end Program NoContainTwo

subroutine DoWhat(x)
  implicit none
  real :: x
  print *,x
end subroutine DoWhat

```

Output
[funcf] nocontaintype:

7.00649232E-45

For the source of this example, see section ??

At best compiler warning if all in the same file

For future reference: if you see very small floating point numbers, maybe you have made this error.

31.1.3 Arguments

Subprogram arguments

Arguments are declared in subprogram body:

```

subroutine f(x,y,i)
  implicit none
  integer,intent(in) :: i
  real(4),intent(out) :: x
  real(8),intent(inout) :: y
  x = 5; y = y+6
end subroutine f
! and in the main program
call f(x,y,5)

```

declaring the ‘intent’ is optional, but highly advisable.

Parameter passing

- Everything is passed by reference.
Don’t worry about large objects being copied.
- Optional intent declarations:
Use *in*, *out*, *inout* qualifiers to clarify semantics to compiler.

Fortran nomenclature

The term *dummy argument* is what Fortran calls the parameters in the subprogram definition. The arguments in the subprogram call are the *actual arguments*.

Intent checking

Compiler checks your intent against your implementation. This code is not legal:

```

|| subroutine ArgIn(x)
||   implicit none
||   real,intent(in) :: x
||   x = 5 ! compiler complains
|| end subroutine ArgIn

```

Why intent checking?

Self-protection: if you state the intended behaviour of a routine, the compiler can detect programming mistakes.

Allow compiler optimizations:

```

|| x = f()
|| call ArgOut(x)
|| print *,x

```

Call to `f` removed

```

|| do i=1,1000
||   x = ! something
||   y1 = .... x ....
||   call ArgIn(x)
||   y2 = ! same expression as y1

```

`y2` is same as `y1` because `x` not changed

(May need further specifications, so this is not the prime justification.)

Exercise 31.3. Write a subroutine `trig` that takes a number α as input and passes $\sin \alpha$ and $\cos \alpha$ back to the calling environment.

31.1.4 Types of procedures

Procedures that are in the main program (or another type of program unit), separated by a `contains` clause, are known as *internal procedures*. This is as opposed to *module procedures*.

There are also *statement functions*, which are single-statement functions, usually to identify commonly used complicated expressions in a program unit. Presumably the compiler will *inline* them for efficiency.

The `entry` statement is so bizarre that I refuse to discuss it.

31.1.5 More about arguments

Keyword arguments

- Use the name of the *formal parameter* as keyword.
- Keyword arguments have to come last.

Code:

```

|| call say_xy(1,2)
|| call say_xy(x=1,y=2)
|| call say_xy(y=2,x=1)
|| call say_xy(1,y=2)
! call say_xy(y=2,1) ! ILLEGAL
contains
  subroutine say_xy(x,y)
    implicit none
    integer,intent(in) :: x,y
    print *, "x=",x," , y=",y
  end subroutine say_xy

```

Output

[funcf] keyword:

x=	1 ,	y=	2
x=	1 ,	y=	2
x=	1 ,	y=	2
x=	1 ,	y=	2

For the source of this example, see section 31.3.6

Optional arguments

- Extra specifier: `Optional`
- Presence of argument can be tested with `Present`

31.2 Interfaces

If you want to use a subprogram in your main program, the compiler needs to know the signature of the subprogram: how many arguments, of what type, and with what intent. You have seen how the `contains` clause can be used for this purpose if the subprogram resides in the same file as the main program.

If the subprogram is in a separate file, the compiler does not see definition and usage in one go. To allow the compiler to do checking on proper usage, we can use an `interface` block. This is placed at the calling site, declaring the signature of the subprogram.

Main program:

```
|| interface
||   function f(x,y)
||     real*8 :: f
||     real*8,intent(in) :: x,y
||   end function f
|| end interface

|| real*8 :: in1=1.5, in2=2.6, result
|| result = f(in1,in2)
```

Subprogram:

```
|| function f(x,y)
|| implicit none
|| real*8 :: f
|| real*8,intent(in) :: x,y
```

The `interface` block is not required (an older `external` mechanism exists for functions), but is recommended. It is required if the function takes function arguments.

31.2.1 Polymorphism

The `interface` block can be used to define a generic function:

```
|| interface f
|| function f1( .... )
|| function f2( .... )
|| end interface f
```

where `f1,f2` are functions that can be distinguished by their argument types. The generic function `f` then becomes either `f1` or `f2` depending on what type of argument it is called with.

31.3 Sources used in this chapter

31.3.1 Listing of code/funcf/printone

```
!*****
!***  
!*** This file belongs with the course  
!*** Introduction to Scientific Programming in C++/Fortran2003  
!*** copyright 2018 Victor Eijkhout eijkhout@tacc.utexas.edu  
!***  
!*** printone.F90 : trivial subroutine  
!***  
!*****  
  
!!codesnippet fprintone  
program printing  
    implicit none  
    call printint(5)  
contains  
    subroutine printint(invalue)  
        implicit none  
        integer :: invalue  
        print *,invalue  
    end subroutine printint  
end program printing  
!!codesnippet end
```

31.3.2 Listing of code/funcf/addone

```
!*****  
!***  
!*** This file belongs with the course  
!*** Introduction to Scientific Programming in C++/Fortran2003  
!*** copyright 2018 Victor Eijkhout eijkhout@tacc.utexas.edu  
!***  
!*** addone.F90 : subroutine with output argument  
!***  
!*****  
  
!!codesnippet faddone  
program adding  
    implicit none  
    integer :: i=5  
    call addint(i,4)  
    print *,i  
contains  
    subroutine addint(inoutvar,addendum)  
        implicit none  
        integer :: inoutvar,addendum  
        inoutvar = inoutvar + addendum  
    end subroutine addint  
end program adding  
!!codesnippet end
```

31.3.3 Listing of code/funcf/fact

```
!*****  
!***  
!*** This file belongs with the course  
!*** Introduction to Scientific Programming in C++/Fortran2003  
!*** copyright 2018 Victor Eijkhout eijkhout@tacc.utexas.edu
```

```

! ***
! *** fib.F90 : recursive Fibonacci function
! ***
! ****
program Factorial
  implicit none
  integer :: i,f
  read *,i
  f = fact(i)
  print *,i,"factorial is",f
contains
  !!codesnippet frecursf
  recursive integer function fact(invalue) &
    result (val)
    implicit none
    integer,intent(in) :: invalue
    if (invalue==0) then
      val = 1
    else
      val = invalue * fact(invalue-1)
    end if
  end function fact
  !!codesnippet end
end program Factorial

```

31.3.4 Listing of code/funcf/plusone

```

! ****
! ***
! *** This file belongs with the course
! *** Introduction to Scientific Programming in C++/Fortran2003
! *** copyright 2017-9 Victor Eijkhout eijkhout@tacc.utexas.edu
! ***
! *** plusone.F90 : function with return type
! ***
! ****
!!codesnippet fplusone
program plussing
  implicit none
  integer :: i
  i = plusone(5)
  print *,i
contains
  integer function plusone(invalue)
    implicit none
    integer :: invalue
    plusone = invalue+1 ! note!
  end function plusone
end program plussing
!!codesnippet end

```

31.3.5 Listing of code/funcf/readpos

```

! ****
! ***

```

```

!*** This file belongs with the course
!*** Introduction to Scientific Programming in C++/Fortran2003
!*** copyright 2017 Victor Eijkhout eijkhout@tacc.utexas.edu
!***
!*** readpos.F90 : exercise for function with intent out
!***
!***** ****
!!codesnippet readpos
program readpos
    implicit none
    real(4) :: userinput
    print *, "Type a positive number:"
    userinput = read_positive()
    print *, "Thank you for", userinput
contains
    real(4) function read_positive()
        implicit none
        !!codesnippet end
        real(4) :: maybe
        do
            read *, maybe
            if (maybe<=0) then
                print *, "No, not", maybe
            else
                read_positive = maybe
                exit
            end if
        end do
        !!codesnippet readpos
    end function read_positive
end program readpos
!!codesnippet end

```

31.3.6 Listing of code/funcf/keyword

```

!*****
!***
!*** This file belongs with the course
!*** Introduction to Scientific Programming in C++/Fortran2003
!*** copyright 2017 Victor Eijkhout eijkhout@tacc.utexas.edu
!***
!*** keyword.F90 : function call with keywords
!***
!***** ****
program keyword
    implicit none
    integer :: i
    !!codesnippet sayxykw
    call say_xy(1,2)
    call say_xy(x=1,y=2)
    call say_xy(y=2,x=1)
    call say_xy(1,y=2)
    ! call say_xy(y=2,1) ! ILLEGAL
contains
    subroutine say_xy(x,y)

```

```
|| implicit none
|| integer,intent(in) :: x,y
|| print *, "x=",x, ", y=",y
|| end subroutine say_xy
|| !codesnippet end
|| end program keyword
```


Chapter 32

String handling

32.1 String denotations

A string can be enclosed in single or double quotes. That makes it easier to have the other type in the string.

```
|| print *, 'This string was in single quotes'
|| print *, 'This string in single quotes contains a single '' quote'
|| print *, "This string was in double quotes"
|| print *, "This string in double quotes contains a double "" quote"
```

32.2 Characters

32.3 Strings

The `len` function gives the length of the string as it was allocated, not how much non-blank content you put in it.

Code:

<pre> character(len=12) :: strvar !! strvar = "word" print *, len(strvar), len(trim(strvar))</pre>	<p>Output</p> <p>[stringf] strlen: 12 4</p>
---	--

For the source of this example, see section ??

To get the more intuitive length of a string, that is, the location of the last non-blank character, you need to `trim` the string.

Intrinsic functions: `LEN(string)`, `INDEX(substring, string)`, `CHAR(int)`, `ICHAR(char)`, `TRIM(string)`

Code:

```
|| character(len=10) :: firstname, lastname
| character(len=15) :: shortname, fullname
| !!
|   firstname = "Victor"; lastname = "Eijkhout"
|   shortname = firstname // lastname
|   print *, "without trimming: ", shortname
|   fullname = trim(firstname) // " " // trim(lastname)
|   print *, "with trimming: ", fullname
```

Output**[stringf] concat:**

without trimming: Victor Eijkhout
with trimming: Victor Eijkhout

For the source of this example, see section ??

32.4 Strings versus character arrays

32.5 Sources used in this chapter

Chapter 33

Structures, eh, types

Fortran has structures for bundling up data, but there is no `struct` keyword: instead you declare both the structure type and variables of that *derived type* with the `type` keyword.

Now you need to

- Define the type to describe what's in it;
- Declare variables of that type; and
- use those variables, but setting the type members or using their values.

Type declaration

Type name / End Type block.

Component declarations inside the block:

```
|| type mytype
  integer :: number
  character :: name
  real(4) :: value
end type mytype
```

Creating a type structure

Declare a type object in the main program:

```
|| Type(mytype) :: object1, object2
```

Initialize with type name:

```
|| object1 = mytype( 1, 'my_name', 3.7 )
```

Copying:

```
|| object2 = object1
```

Member access

Access structure members with %

```
|| Type(mytype) :: typed_object
  typed_object%member = ....
```

Example

```
|| type point
  ||| real :: x,y
  || end type point
  ||
  || type(point) :: p1,p2
  || p1 = point(2.5, 3.7)
  || p2 = p1
  || print *,p2%x,p2%y
```

Type definitions can go in the main program
(or use a module; see later)

You can have arrays of types:

```
|| type(my_struct) :: data
  || type(my_struct),dimension(1) :: data_array
```

Structures as subprogram argument

Structures can be passed as subprogram argument, just like any other datatype. This example:

- Takes a structure of `type(point)` as argument; and
- returns a `real(4)` result.
- The structure is declared as `intent(in)`.

Function with structure argument:

```
|| real(4) function length(p)
  || implicit none
  || type(point),intent(in) :: p
  || length = sqrt( p%x**2 + p%y )
  || end function length
```

Function call

```
|| print *, "Length:",length(p2)
```

Exercise 33.1. Write a program that has the following:

- A type `Point` that contains real numbers `x, y`;
- a type `Rectangle` that contains two `Points`, corresponding to the lower left and upper right point;
- a function `area` that has one argument: a `Rectangle`.

Test your program.

Chapter 34

Modules

Fortran has a clean mechanism for importing data, functions, types that are defined in another file.

Module definition

Modules look like a program, but without executable code:

```
Module definitions
  type point
    real :: x,y
  end type point
contains
  real(4) function length(p)
    implicit none
    type(point),intent(in) :: p
    length = sqrt( p%x**2 + p%y**2 )
  end function length
end Module definitions
```

Module use

Module imported through `use` statement;
comes before `implicit none`

Code:

```
Program size
  use definitions
  implicit none

  type(point) :: p1,p2
  p1 = point(2.5, 3.7)

  p2 = p1
  print *,p2%x,p2%y
  print *, "length:", length(p2)

end Program size
```

Output
[structf] typemod:
2.50000000 3.70000005
length: 4.46542263

For the source of this example, see section [34.3.1](#)

Exercise 34.1. Take exercise [33.1](#) and put all type definitions and all functions in a module.

34.1 Modules for program modularization

Modules are Fortran's mechanism for supporting *separate compilation*: you can put your module in one file, your main program in another, and compile them separately.

Separate compilation of modules

Suppose program is split over two files:

theprogram.F90 and themodule.F90.

- Compile the module: ifort -c themodule.F90; this gives
 - an *object file* (extension: .o) that will be linked later, and
 - a module file modulename.mod.
- Compile the main program:
ifort -c theprogram.F90 will read the .mod file; and finally
- Link the object files into an *executable*:
ifort -o myprogram theprogram.o themodule.o

The compiler is used as *linker*: there is no compiling in this step.

Important: the module needs to be compiled before any (sub)program that uses it.

34.2 Modules

A module is a container for definitions of subprograms and types, and for data such as constants and variables. A module is not a structure or object: there is only one instance.

What do you use a module for?

- Type definitions: it is legal to have the same type definition in multiple program units, but this is not a good idea. Write the definition just once in a module and make it available that way.
- Function definitions: this makes the functions available in multiple sources files of the same program, or in multiple programs.
- Define constants: for physics simulations, put all constants in one module and use that, rather than spelling out the constants each time.
- Global variables: put variables in a module if they do not fit an obvious scope.

F77 note: Modules are much cleaner than common blocks. Do not use those.

Any routines come after the `contains`

A module is made available with the `use` keyword, which needs to go before the `implicit none`.

Module use

```
|| Program ModProgram
||   use FunctionsAndValues
||   implicit none

||   print *, "Pi is:", pi
||   call SayHi()

|| End Program ModProgram
```

Also possible:

```
|| Use mymodule, Only: func1, func2
|| Use mymodule, func1 => new_name1
```

By default, all the contents of a module is usable by a subprogram that uses it. However, a keyword `private` make module contents available only inside the module. You can make the default behaviour explicit by using the `public` keyword. Both `public`, `private` can be used as attributes on definitions in the module. There is a keyword `protected` for data members that are public, but can not be altered by code outside the module.

If you compile a module, you will find a `.mod` file in your directory. (This is little like a `.h` file in C++) If this file is not present, you can not use the module in another program unit, so you need to compile the file containing the module first.

Exercise 34.2. Write a module `PointMod` that defines a type `Point` and a function `distance` to make this code work:

```
|| use pointmod
|| implicit none
|| type(Point) :: p1,p2
|| real(8) :: p1x,p1y,p2x,p2y
|| read *,p1x,p1y,p2x,p2y
|| p1 = point(p1x,p1y)
|| p2 = point(p2x,p2y)
|| print *, "Distance:", distance(p1,p2)
```

Put the program and module in two separate files and compile thusly:

```
|| ifort -g -c pointmod.F90
|| ifort -g -c pointmain.F90
|| ifort -g -o pointmain pointmod.o pointmain.o
```

34.2.1 Polymorphism

```
|| module somemodule
|| 
|| INTERFACE swap
|| MODULE PROCEDURE swapreal, swapint, swaplog, swappoint
|| END INTERFACE
|| 
|| contains
|| subroutine swapreal
|| ...
|| end subroutine swapreal
|| subroutine swapint
|| ...
|| end subroutine swapint
```

34.2.2 Operator overloading

```
|| MODULE operator_overloading
|| IMPLICIT NONE
|| ...
|| INTERFACE OPERATOR (+)
|| MODULE PROCEDURE concat
|| END INTERFACE
```

including the assignment operator:

```
|| INTERFACE ASSIGNMENT (=)
|| subroutine_interface_body
|| END INTERFACE
```

This mechanism can also be used for dot-operators:

```
|| INTERFACE OPERATOR (.DIST.)
|| MODULE PROCEDURE calcdist
|| END INTERFACE
```

34.3 Sources used in this chapter

34.3.1 Listing of code/structf/typemod

```
! -- f90 --
!*****
!*** This file belongs with the course
!*** Introduction to Scientific Programming in C++/Fortran2003
!*** copyright 2017 Victor Eijkhout eijkhout@tacc.utexas.edu
!***
!*** typemod.F90 : modules containing types and such
!***
!*****
```



```
!!codesnippet pointmod
Module definitions
  type point
    real :: x,y
  end type point
contains
  real(4) function length(p)
    implicit none
    type(point),intent(in) :: p
    length = sqrt( p%x**2 + p%y**2 )
  end function length
end Module definitions
!!codesnippet end

!!codesnippet pointmodprog
Program size
  use definitions
  implicit none

  type(point) :: p1,p2
  p1 = point(2.5, 3.7)

  p2 = p1
  print *,p2%x,p2%y
  print *, "length:", length(p2)

end Program size
!!codesnippet end
```

Chapter 35

Classes and objects

35.1 Classes

Classes and objects

Fortran classes are based on `type` objects, a little like the analogy between C++ `struct` and `class` constructs.

New syntax for specifying methods.

Object is type with methods

You define a type as before, with its data members, but now the type has a `contains` for the methods:

```
Module multmod
  type Scalar
    real(4) :: value
  contains
    procedure,public :: &
      printme,scaled
  end type Scalar

  contains ! methods
  !! ...
end Module multmod
```



```
Program Multiply
  use multmod
  implicit none

  type(Scalar) :: x
  real(4) :: y
  x = Scalar(-3.14)
  call x%printme()
  y = x%scaled(2.)
  print '(f7.3)',y
end Program Multiply
```

Method definition

```
subroutine printme(me)
  implicit none
  class(Scalar) :: me
  print ('("The value is",f7.3)',me%value)
end subroutine printme
function scaled(me,factor)
  implicit none
  class(Scalar) :: me
  real(4) :: scaled,factor
  scaled = me%value * factor
end function scaled
```

Methods have object as argument

You define functions that accept the type as first argument, but instead of declaring the argument as type, you define it as class.

The members of the class object have to be accessed through the % operator.

```
|| subroutine set(p,xu,yu)
||   implicit none
||   class(point) :: p
||   real(8),intent(in) :: xu,yu
||   p%x = xu; p%y = yu
|| end subroutine set
```

Class organization

- You're pretty much forced to use Module
- A class is a Type with a contains clause followed by procedure declaration
- Actual methods go in the contains part of the module
- ⇒ First argument of method is the object itself. ⇐

Point program

<pre><code>Module PointClass Type,public :: Point real(8) :: x,y contains procedure, public :: & distance End type Point contains !! ... distance function ... !! ... End Module PointClass</code></pre>	<pre><code>Program PointTest use PointClass implicit none type(Point) :: p1,p2 p1 = point(1.d0,1.d0) p2 = point(4.d0,5.d0) print *, "Distance:", & p1%distance(p2) End Program PointTest</code></pre>
--	--

Exercise 35.1. Take the point example program and add a distance function:

```
|| Type(Point) :: p1,p2
|| ! ... initialize p1,p2
|| dist = p1%distance(p2)
|| ! ... print distance
```

Exercise 35.2. Write a method add for the Point type:

```
|| Type(Point) :: p1,p2,sum
|| ! ... initialize p1,p2
|| sum = p1%add(p2)
```

What is the return type of the function add?

More OOP

Inheritance:

```
|| type,extends(baseclas) :: derived_class
```

Pure virtual:

```
|| type,abstract
```

Further reading

<http://fortranwiki.org/fortran/show/Object-oriented+programming>

Chapter 36

Arrays

Array handling in Fortran is similar to C++ in some ways, but there are differences, such as that Fortran indexing starts at 1, rather than 0. More importantly, Fortran has better handling of multi-dimensional arrays, and it is easier to manipulate whole arrays.

36.1 Static arrays

The preferred way for specifying an array size is:

Fortran dimension

Preferred way of creating arrays through `dimension` keyword:

```
|| real(8), dimension(100) :: x,y
```

One-dimensional arrays of size 100.

Older mechanism works too:

```
|| integer :: i(10,20)
```

Two-dimensional array of size 10×20 .

These arrays are statically defined, and only live inside their program unit.

Such an array, with size explicitly indicated, is called a *static array* or *automatic array*. (See section 36.4 for dynamic arrays.)

1-based Indexing

Array indexing in Fortran is 1-based by default:

```
|| integer,parameter :: N=8
  real(4),dimension(N) :: x
  do i=1,N
    ... x(i) ...
```

Note the use of `parameter`: *compile-time constant*

Lower bound

Unlike C++, Fortran can specify the lower bound explicitly:

```
|| real,dimension(-1:7) :: x
  do i=-1,7
    ... x(i) ...
```

Safer:

Code:

```
|| real,dimension(-1:7) :: array
|| integer :: idx
|| ...
|| do idx=lbound(array,1),ubound(array,1)
||   array(idx) = 1+idx/10.
||   print *,array(idx)
|| end do
```

Output
[arrayf] lbound:

0.899999976
1.00000000
1.10000002
1.20000005
1.29999995
1.39999998
1.50000000
1.60000002
1.70000005

For the source of this example, see section ??

Such arrays, as in C++, obey the scope: they disappear at the end of the program or subprogram.

36.1.1 Initialization

There are various syntaxes for *array initialization*, including the use of *implicit do-loops*:

Array initialization

```
|| real,dimension(5) :: real5 = [ 1.1, 2.2, 3.3, 4.4, 5.5 ]
|| ...
|| real5 = [ (1.01*i, i=1, size(real5,1)) ]
|| ...
|| real5 = (/ 0.1, 0.2, 0.3, 0.4, 0.5 /)
```

36.1.2 Array sections

Fortran is more sophisticated than C++ in how it can handle arrays as a whole. For starters, you can assign one array to another:

```
|| real*8, dimension(10) :: x,y
|| x = y
```

This obviously requires the arrays to have the same size. You can assign subarrays, or *array sections*, as long as they have the same shape. This uses a colon syntax.

Array sections

- : to get all indices,
- :n to get indices up to n,
- n: to get indices n and up.
- m:n indices in range m, . . . , n.

Use of sections

Code:

```

|| real(8), dimension(5) :: x = &
    [.1d0, .2d0, .3d0, .4d0, .5d0]
!! ...
x(2:5) = x(1:4)
print '(f5.3)', x

```

Output

[arrayf] sectionassign:	
0.100	
0.100	
0.200	
0.300	
0.400	

For the source of this example, see section ??

Exercise 36.1. Code out the above array assignment with an explicit, indexed loop. Do you get the same output? Why? What conclusion do you draw about internal mechanisms used in array sections?

You can even use a stride:

Strided sections

Code:

```

|| integer,dimension(5) :: &
    y = [0,0,0,0,0]
integer,dimension(3) :: &
    z = [3,3,3]
!! ...
y(1:5:2) = z(:)
print '(i3)', y


```

Output

[arrayf] sectionmg:	
3	
0	
3	
0	
3	

For the source of this example, see section ??

Exercise 36.2.

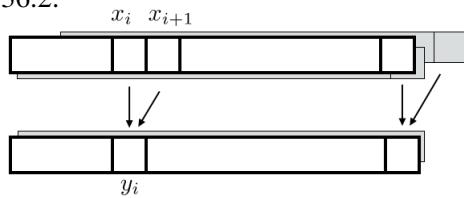

Code $\forall i: y_i = (x_i + x_{i+1})/2$:

- First with a do loop; then
- in a single array assignment statement by using sections.

Initialize the array x with values that allow you to check the correctness of your code.

36.1.3 Integer arrays as indices

Index arrays

```

|| integer,dimension(4) :: i = [2,4,6,8]
real(4),dimension(10) :: x
print *, x(i)

```

36.2 Multi-dimensional

Arrays above had ‘rank one’. The rank is defined as the number of indices you need to address the elements. Calling this the ‘dimension’ of the array can be confusing, but we will talk about the first and second dimension of the array.

A rank-two array, or matrix, is defined like this:

Multi-dimension arrays

```
|| real(8), dimension(20,30) :: array
|| array(i,j) = 5./2
```

With multidimensional arrays we have to worry how they are stored in memory. Are they stored row-by-row, or column-by-column? In Fortran the latter choice, also known as *column-major* storage, is used; see figure 36.1.

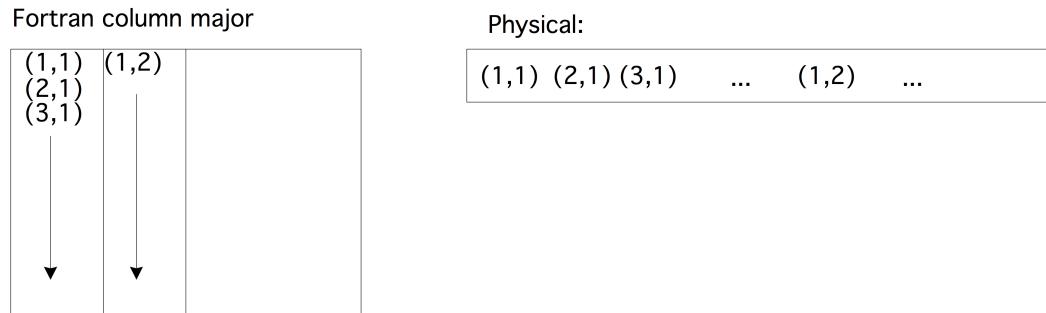


Figure 36.1: Column-major storage in Fortran

To traverse the elements as they are stored in memory, you would need the following code:

```
|| do col=1, size(A, 2)
||   do row=1, size(A, 1)
||     .... A(row, col) ....
||   end do
|| end do
```

This is sometimes described as ‘First index varies quickest’.

Exercise 36.3. Can you describe in words how memory elements are accessed if you would write

```
|| do row=1, size(A, 1)
||   do col=1, size(A, 2)
||     .... A(row, col) ....
||   end do
|| end do
```

?

You can make sections in multi-dimensional arrays: you need to indicate a range in all dimensions.

Array sections in multi-D

```
|| real(8), dimension(10) :: a,b
|| a(1:9) = b(2:10)
```

or

```
|| logical, dimension(25,3) :: a
|| logical, dimension(25)    :: b
|| a(:,2) = b
```

You can also use strides.

Array printing

Fill array by rows:

$$\begin{array}{cccc} 1 & 2 & \dots & N \\ N+1 & \dots & & \\ \dots & & & \\ & & & MN \end{array}$$

Code:

```
|| do i=1,M
  || do j=1,N
    || rect(i,j) = count
    || count = count+1
  || end do
|| end do
|| print *,rect
```

Output

[arrayf] printarray:

1.00000000	6.00000000	11.00000000
------------	------------	-------------

For the source of this example, see section [36.9.1](#)

36.2.1 Querying an array

We have the following properties of an array:

- The bounds are the lower and upper bound in each dimension. For instance, after

```
|| integer,dimension(-1:1,-2:2) :: symm
```

the array `symm` has a lower bound of `-1` in the first dimension and `-2` in the second. The functions `Lbound` and `Ubound` give these bounds as array or scalar:

```
|| array_of_lower = Lbound(symm)
|| upper_in_dim_2 = Ubound(symm,2)
```

Code:

```
|| real(8),dimension(2:N+1) :: Afrom2 = &
  || [1,2,3,4,5]
!! ...
lo = lbound(Afrom1,1)
hi = ubound(Afrom1,1)
print *,lo,hi
print '(i3,:",f5.3)', &
  (i,Afrom1(i),i=lo,hi)
```

Output

[arrayf] fsection2:

1	5
1:1.000	
2:2.000	
3:3.000	
4:4.000	
5:5.000	

For the source of this example, see section ??

- The `extent` is the number of elements in a certain dimension, and the `shape` is the array of extents.
- The `size` is the number of elements, either for the whole array, or for a specified dimension.

```
|| integer :: x(8), y(5,4)
|| size(x)
|| size(y,2)
```

36.2.2 Reshaping

RESHAPE

```
|| array = RESHAPE( list, shape )
```

Example:

```
|| square = reshape( (/ (i, i=1, 16) /), (/ 4, 4 /) )
```

SPREAD

```
|| array = SPREAD( old, dim, copies )
```

36.3 Arrays to subroutines

Subprogram needs to know the shape of an array, not the actual bounds:

Pass array: main program

Passing array as one symbol:

Code:

```
|| real(8), dimension(:) :: x(N) &
||   = [ (i, i=1, N) ]
|| real(8), dimension(:) :: y(0:N-1) &
||   = [ (i, i=1, N) ]
|| sx = arraysum(x)
|| sy = arraysum(y)
|| print'("Sum of one-based array:", //, 4x, f6.3)', sx
|| print'("Sum of zero-based array:", //, 4x, f6.3)', sy
```

Output

[arrayf] arraypass1d:	Sum of one-based array: 55.000
	Sum of zero-based array: 55.000

For the source of this example, see section 36.9.2

Pass array: subprogram

Note declaration as `dimension(:)`

actual size is queried

```
|| real(8) function arraysum(x)
|| implicit none
|| real(8), intent(in), dimension(:) :: x
|| real(8) :: tmp
|| integer i
|
|| tmp = 0.
|| do i=1, size(x)
||   tmp = tmp + x(i)
|| end do
|| arraysum = tmp
|| end function arraysum
```

The array inside the subroutine is known as a *assumed-shape array* or *automatic array*.

36.4 Allocatable arrays

Static arrays are fine at small sizes. However, there are two main arguments against using them at large sizes.

- Since the size is explicitly stated, it makes your program inflexible, requiring recompilation to run it with a different problem size.
- Since they are allocated on the so-called *stack*, making them too large can lead to *stack overflow*.

A better strategy is to indicate the shape of the array, and use `allocate` to specify the size later, presumably in terms of run-time program parameters.

Array allocation

```
|| real(8), dimension(:), allocatable :: x,y  
|| n = 100  
|| allocate(x(n), y(n))
```

You can `deallocate` the array when you don't need the space anymore.

If you are in danger of running out of memory, it can be a good idea to add a `stat=ierror` clause to the `allocate` statement:

```
|| integer :: ierr  
|| allocate( x(n), stat=ierr )  
|| if ( ierr/=0 ) ! report error
```

Has an array been allocated:

```
|| Allocated( x ) ! returns logical
```

Allocatable arrays are automatically deallocated when they go out of scope. This prevents the *memory leak* problems of C++.

Explicit deallocate:

```
|| deallocate(x)
```

36.5 Array output

Use implicit do-loops; section 29.3.

36.6 Operating on an array

36.6.1 Arithmetic operations

Between arrays of the same shape:

```
|| A = B+C  
|| D = D*E
```

(where the multiplication is by element).

36.6.2 Intrinsic functions

The following intrinsic functions are available for arrays:

Array intrinsics

- `Abs` creates the matrix of pointwise absolute values.
- `MaxVal` finds the maximum value in an array.
- `MinVal` finds the minimum value in an array.
- `Sum` returns the sum of all elements.
- `Product` returns the product of all elements.
- `MaxLoc` returns the index of the maximum element.
- `MinLoc` returns the index of the minimum element.
- `MatMul` returns the matrix product of two matrices.
- `Dot_Product` returns the dot product of two arrays.
- `Transpose` returns the transpose of a matrix.
- `Cshift` rotates elements through an array.

Multi-dimensional intrinsics

- Functions such as `Sum` operate on a whole array by default.
- To restrict such a function to one subdimension add a keyword parameter `DIM`:

$\parallel s = \text{Sum}(A, \text{DIM}=1)$

where the keyword is optional.

- Likewise, the operation can be restricted to a `MASK`:

$\parallel s = \text{Sum}(A, \text{MASK}=B)$

Exercise 36.4. The 1-norm of a matrix is defined as the maximum of all sums of absolute values in any column:

$$\|A\|_1 = \max_j \sum_i |A_{ij}|$$

while the infinity-norm is defined as the maximum row sum:

$$\|A\|_\infty = \max_i \sum_j |A_{ij}|$$

Compute these norms using array functions as much as possible, that is, try to avoid using loops.

For bonus points, write Fortran **Functions** that compute these norms.

Exercise 36.5. Compare implementations of the matrix-matrix product.

1. Write the regular `i, j, k` implementation, and store it as reference.
2. Use the `DOT_PRODUCT` function, which eliminates the `k` index. How does the timing change? Print the maximum absolute distance between this and the reference result.
3. Use the `MATMUL` function. Same questions.
4. Bonus question: investigate the `j, k, i` and `i, k, j` variants. Write them both with array sections and individual array elements. Is there a difference in timing?

Does the optimization level make a difference in timing?

36.6.3 Restricting with where

If an array operation should not apply to all elements, you can specify the ones it applies to with a `where` statement.

Operate where

```
|| where ( A<0 ) B = 0
```

Full form:

```
|| WHERE ( logical argument )
    sequence of array statements
ELSEWHERE
    sequence of array statements
END WHERE
```

36.6.4 Global condition tests

Reduction of a test on all array elements: `all`

```
|| REAL(8),dimension(N,N) :: A
LOGICAL :: positive,positive_row(N),positive_col(N)
positive = ALL( A>0 )
positive_row = ALL( A>0,1 )
positive_col = ALL( A>0,2 )
```

Exercise 36.6. Use array statements (that is, no loops) to fill a two-dimensional array `A` with random numbers between zero and one. Then fill two arrays `Abig` and `Asmall` with the elements of `A` that are great than 0.5, or less than 0.5 respectively:

$$A_{\text{big}}(i,j) = \begin{cases} A(i,j) & \text{if } A(i,j) \geq 0.5 \\ 0 & \text{otherwise} \end{cases}$$

$$A_{\text{small}}(i,j) = \begin{cases} 0 & \text{if } A(i,j) \geq 0.5 \\ A(i,j) & \text{otherwise} \end{cases}$$

Using more array statements, add `Abig` and `Asmall`, and test whether the sum is close enough to `A`.

Similar to `all`, there is a function `any` that tests if any array element satisfies the test.

```
|| if ( Any( Abs(A-B) >
```

36.7 Array operations

36.7.1 Loops without looping

In addition to ordinary do-loops, Fortran has mechanisms that save you typing, or can be more efficient in some circumstances.

36.7.1.1 Slicing

If your loop assigns to an array from another array, you can use section notation:

```
|| a(:) = b(:)
|| c(1:n) = d(2:n+1)
```

36.7.1.2 ‘forall’ keyword

The `forall` keyword also indicates an array assignment:

```
|| forall (i=1:n)
||   a(i) = b(i)
||   c(i) = d(i+1)
|| end forall
```

You can tell that this is for arrays only, because the loop index has to be part of the left-hand side of every assignment.

This mechanism is prone to misunderstanding and therefore now deprecated. It is not a parallel loop! For that, the following mechanism is preferred.

36.7.1.3 Do concurrent

Do concurrent

The `do concurrent` is a true do-loop. With the `concurrent` keyword the user specifies that the iterations of a loop are independent, and can therefore possibly be done in parallel:

```
|| do concurrent (i=1:n)
||   a(i) = b(i)
||   c(i) = d(i+1)
|| end do
```

(Do not use `for all`)

36.7.2 Loops without dependencies

Here are some illustrations of simple array copying with the above mechanisms.

```
|| do i=2,n
||   counted(i) = 2*counting(i-1)
|| end do

|| Original      1   2   3   4   5   6   7   8   9   10
|| Recursive     0   2   4   6   8   10  12  14  16  18

|| counted(2:n) = 2*counting(1:n-1)

|| Original      1   2   3   4   5   6   7   8   9   10
|| Section       0   2   4   6   8   10  12  14  16  18

|| forall (i=2:n)
||   counted(i) = 2*counting(i-1)
|| end forall
```

<i>Original</i>	1	2	3	4	5	6	7	8	9	10
Forall	0	2	4	6	8	10	12	14	16	18

```

|| do concurrent (i=2:n)
  counted(i) = 2*counting(i-1)
end do

```

<i>Original</i>	1	2	3	4	5	6	7	8	9	10
<i>Concurrent</i>	0	2	4	6	8	10	12	14	16	18

Exercise 36.7. Create arrays A, C of length $2N$, and B of length N . Now implement

$$B_i = (A_{2i} + A_{2i+1})/2, \quad i = 1, \dots, N$$

and

$$C_i = A_{i/2}, \quad i = 1, \dots, 2N$$

using all four mechanisms. Make sure you get the same result every time.

36.7.3 Loops with dependencies

For parallel execution of a loop, all iterations have to be independent. This is not the case if the loop has a *recurrence*, and in this case, the ‘do concurrent’ mechanism is not appropriate. Here are the above four constructs, but applied to a loop with a dependence.

```

|| do i=2,n
  counting(i) = 2*counting(i-1)
end do

```

<i>Original</i>	1	2	3	4	5	6	7	8	9	10
<i>Recursiv</i>	1	2	4	8	16	32	64	128	256	512

The slicing version of this:

```
|| counting(2:n) = 2*counting(1:n-1)
```

<i>Original</i>	1	2	3	4	5	6	7	8	9	10
<i>Section</i>	1	2	4	6	8	10	12	14	16	18

acts as if the right-hand side is saved in a temporary array, and subsequently assigned to the left-hand side.

Using ‘forall’ is equivalent to slicing:

```

|| forall (i=2:n)
  counting(i) = 2*counting(i-1)
end forall

```

<i>Original</i>	1	2	3	4	5	6	7	8	9	10
Forall	1	2	4	6	8	10	12	14	16	18

On the other hand, ‘do concurrent’ does not use temporaries, so it is more like the sequential version:

```
|| do concurrent (i=2:n)
  counting(i) = 2*counting(i-1)
|| end do

|| Original      1   2   3   4   5   6   7   8   9   10
|| Concurrent    1   2   4   8  16  32  64 128 256 512
```

Note that the result does not have to be equal to the sequential execution: the compiler is free to rearrange the iterations any way it sees fit.

36.8 Review questions

Exercise 36.8. Let the following declarations be given, and assume that all arrays are properly initialized:

```
|| real           :: x
|| real, dimension(10) :: a, b
|| real, dimension(10,10) :: c, d
```

Comment on the following lines: are they legal, if so what do they do?

1. $a = b$
2. $a = x$
3. $a(1:10) = c(1:10)$

How would you:

1. Set the second row of c to b ?
2. Set the second row of c to the elements of b , last-to-first?

36.9 Sources used in this chapter

36.9.1 Listing of code/arrayf/printarray

```
!*****
!***
!*** This file belongs with the course
!*** Introduction to Scientific Programming in C++/Fortran2003
!*** copyright 2017/8 Victor Eijkhout eijkhout@tacc.utexas.edu
!***
!*** shape.F90 : array reshaping
!***
!*****
```



```
Program ArrayPrint
  implicit none
  integer, parameter :: M=4, N=5
  integer :: i, j, count=1

  real(4), dimension(M,N) :: rect

  !!codesnippet printarray
  do i=1,M
    do j=1,N
```

```

    rect(i,j) = count
    count = count+1
  end do
end do
print *,rect
!!codesnippet end

End Program ArrayPrint

```

36.9.2 Listing of code/arrayf/arraypass1d

```

!*****
!*** This file belongs with the course
!*** Introduction to Scientific Programming in C++/Fortran2003
!*** copyright 2017-9 Victor Eijkhout eijkhout@tacc.utexas.edu
!***
!*** arraypass1d.F90 : passing a 1d array
!***
!*****
```

Module ArrayFunction
contains

```

!!codesnippet fpass1dsubr
real(8) function arraysuum(x)
  implicit none
  real(8),intent(in),dimension(:) :: x
  real(8) :: tmp
  integer i

  tmp = 0.
  do i=1,size(x)
    tmp = tmp+x(i)
  end do
  arraysuum = tmp
end function arraysuum
!!codesnippet end

End Module ArrayFunction
```

```

#define N 10
Program ArrayComputations1D
  use ArrayFunction
  implicit none

  integer :: i
  real(8) :: sx,sy

  !!codesnippet fpass1dmain
  real(8),dimension(:) :: x(N) &
    = [ (i,i=1,N) ]
  real(8),dimension(:) :: y(0:N-1) &
    = [ (i,i=1,N) ]

  sx = arraysuum(x)
  sy = arraysuum(y)

```

```
||      print'("Sum of one-based array:",/,4x,f6.3)', sx
||      print'("Sum of zero-based array:",/,4x,f6.3)', sy
||      !!codesnippet end
|| End Program ArrayComputations1D
```

Chapter 37

Pointers

Pointers in C/C++ are based on memory addresses; Fortran pointers on the other hand, are more abstract.

37.1 Basic pointer operations

Pointers are aliases

- Pointer points at an object
- Access object through pointer
- You can change what object the pointer points at.

```
|| real,pointer :: point_at_real
```

Pointers could also be called ‘aliases’: they act like an alias for an object of elementary or derived data type. You can access the object through the alias. The difference with actually using the object, is that you can decide what object the pointer points at.

Dereferencing

Fortran pointers are often automatically *dereferenced*: if you print a pointer you print the object it references, not some representation of the pointer.

The pointer definition

```
|| real,pointer :: point_at_real
```

defined a pointer that can point at a real variable.

Setting the pointer

- You have to declare that a variable is pointable:

```
|| real,target :: x
```

- Set the pointer with => notation:

```
|| point_at_real => x
```

- Now using point_at_real is the same as using x.

```
|| print *,point_at_real ! will print the value of x
```

Pointers can not just point at anything: the thing pointed at needs to be declared as target

```
|| real,target :: x
```

and you use the `=>` operator to let a pointer point at a target:

```
|| point_at_real => x
```

If you use a pointer, for instance to print it

```
|| print *,point_at_real
```

it behaves as if you were using the value of what it points at.

Pointer example

Code:

```
|| real,target :: x,y
|| real,pointer :: that_real

x = 1.2
y = 2.4
that_real => x
print *,that_real
that_real => y
print *,that_real
y = x
print *,that_real
```

Output
[pointerf] realp:

```
1.2000005
2.40000010
1.2000005
```

For the source of this example, see section [37.4.1](#)

1. The pointer points at `x`, so the value of `x` is printed.
2. The pointer is set to point at `y`, so its value is printed.
3. The value of `y` is changed, and since the pointer still points at `y`, this changed value is printed.

Assign pointer from other pointer

```
|| real,pointer :: point_at_real,also_point
|| point_at_real => x
|| also_point => point_at_real
```

Now you have two pointers that point at `x`.

Very important to use the `=>`, otherwise strange memory errors

If you have two pointers

```
|| real,pointer :: point_at_real,also_point
```

you can make the target of the one to also be the target of the other:

```
|| also_point => point_at_real
```

This is not a pointer to a pointer: it assigns the target of the right-hand side to be the target of the left-hand side.

Using ordinary assignment does not work, and will give strange memory errors.

Exercise 37.1. Write a routine that accepts an array and a pointer, and on return has that pointer pointing at the largest array element:

Code:

```

real,dimension(10),target :: array &
    = [1.1, 2.2, 3.3, 4.4, 5.5, &
       9.9, 8.8, 7.7, 6.6, 0.0]
real,pointer :: biggest_element

print '(10f5.2)',array
call SetPointer(array,biggest_element)
print *, "Biggest element is",biggest_element
biggest_element = 0
print '(10f5.2)',array

```

Pointer status

- Nullify: zero a pointer
- Associated: test whether assigned

Dynamic allocation

Associate unnamed memory:

```

|| Integer,Pointer,Dimension(:) :: array_point
|| Allocate( array_point(100) )

```

This is automatically deallocated when control leaves the scope.

Output**[pointerf] arpointf:**

```

1.10 2.20 3.30 4.40 5.50 9.90 8.80 7.70 6.60
Biggest element is 9.89999962
1.10 2.20 3.30 4.40 5.50 0.00 8.80 7.70 6.60

```

37.2 Pointers and arrays

You can set a pointer to an array element or a whole array.

```

|| real(8),dimension(10),target :: array
|| real(8),pointer           :: element_ptr
|| real(8),pointer,dimension(:) :: array_ptr

element_ptr => array(2)
array_ptr   => array

```

More surprising, you can set pointers to array slices:

```

|| array_ptr => array(2:)
|| array_ptr => array(1:size(array):2)

```

In case you're wondering, this does not create temporary arrays, but the compiler adds descriptions to the pointers, to translate code automatically to strided indexing.

37.3 Example: linked lists

For pictures of linked lists, see section [53.1.2](#).*Linked list*

- Linear data structure
- more flexible for insertion / deletion
- ... but slower in access

One of the standard examples of using pointers is the *linked list*. This is a dynamic one-dimensional structure that is more flexible than an array. Dynamically extending an array would require re-allocation, while in a list an element can be inserted.

Exercise 37.2. Using a linked list may be more flexible than using an array. On the other hand, accessing an element in a linked list is more expensive, both absolutely and as order-of-magnitude in the size of the list.
Make this argument precise.

Linked list datatypes

- Node: value field, and pointer to next node.
- List: pointer to head node.

```
type node
    integer :: value
    type(node),pointer :: next
end type node

type list
    type(node),pointer :: head
end type list

type(list) :: the_list
nullify(the_list%head)
```

A list is based on a simple data structure, a node, which contains a value field and a pointer to another node.

By way of example, we create a dynamic list of integers, sorted by size. To maintain the sortedness, we need to append or insert nodes, as required.

Here are the basic definitions of a node, and a list which is basically a repository for the head node:

```
type node
    integer :: value
    type(node),pointer :: next
end type node

type list
    type(node),pointer :: head
end type list

type(list) :: the_list
nullify(the_list%head)
```

List initialization

First element becomes the list head:

```
allocate(new_node)
new_node%value = value
nullify(new_node%next)
the_list%head => new_node
```

Initially, the list is empty, meaning that the ‘head’ pointer is un-associated. The first time we add an element to the list, we create a node and assign it as the head of the list:

```
|| allocate(new_node)
|| new_node%value = value
|| nullify(new_node%next)
|| the_list%head => new_node
```

Attaching a node

Keep the list sorted: new largest element attached at the end.

```
|| allocate(new_node)
|| new_node%value = value
|| nullify(new_node%next)
|| current%next => new_node
```

Exercise 37.3. Write function *attach* that takes an integer, and attaches a new node at the end of the list with that value.

Adding a value to a list can be done two ways. If the new element is larger than all elements in the list, a new node needs to be appended to the last one. Let's assume we have managed to let *current* point at the last node of the list, then here is how to attaching a new node from it:

```
|| allocate(new_node)
|| new_node%value = value
|| nullify(new_node%next)
|| current%next => new_node
```

Inserting 1

Find the insertion point:

```
|| current => the_list%head ; nullify(previous)
|| do while ( current%value < value &
|| .and. associated(current%next) )
||     previous => current
||     current => current%next
|| end do
```

Inserting an element in the list is harder. First of all, you need to find the two nodes, *previous* and *current*, between which to insert the new node:

```
|| current => the_list%head ; nullify(previous)
|| do while ( current%value < value &
|| .and. associated(current%next) )
||     previous => current
||     current => current%next
|| end do
```

Inserting 2

The actual insertion requires rerouting some pointers:

```
|| allocate(new_node)
|| new_node%value = value
|| new_node%next => current
|| previous%next => new_node
```

Exercise 37.4. Write a **print** function for the linked list.

For the simplest solution, print each element on a line by itself.

More sophisticated: use the **Write** function and the **advance** keyword:

```
|| write(*,' (i1",")',advance="no") current%value
```

Exercise 37.5. Write a *length* function for the linked list.

Try it both with a loop, and recursively.

37.4 Sources used in this chapter

37.4.1 Listing of code/pointerf/realp

```
!*****
!*** This file belongs with the course
!*** Introduction to Scientific Programming in C++/Fortran2003
!*** copyright 2017 Victor Eijkhout eijkhout@tacc.utexas.edu
!***
!*** real.F90 : pointer to real
!***
!*****
```



```
Program PointAtReal

implicit none

!!codesnippet pointatreal
real,target :: x,y
real,pointer :: that_real

x = 1.2
y = 2.4
that_real => x
print *,that_real
that_real => y
print *,that_real
y = x
print *,that_real
!!codesnippet end

end Program PointAtReal
```

Chapter 38

Input/output

38.1 Types of I/O

Fortran can deal with input/output in ASCII format, which is called *formatted I/O*, and binary, or *unformatted I/O*. Formatted I/O can use default formatting, but you can specify detailed formatting instructions, in the I/O statement itself, or separately in a Format statement.

Fortran I/O can be described as *list-directed I/O*: both input and output commands take a list of item, possibly with formatting specified.

I/O commands

- Print simple output to terminal
- Write output to terminal or file ('unit')
- Read input from terminal or file
- Open, Close for files and streams
- Format format specification that can be used in multiple statements.

Formatted and unformatted I/O

- Formatted: ascii output. This is good for reporting, but not for numeric data storage.
- Unformatted: binary output. Great for further processing of output data.
- Beware: binary data is machine-dependent. Use *hdf5* for portable binary.

38.2 Print to terminal

The simplest command for outputting data is `print`.

```
|| print *, "The result is", result
```

In its easiest form, you use the star to indicate that you don't care about formatting; after the comma you can then have any number of comma-separated strings and variables.

38.2.1 Print on one line

The statement

```
|| print *, item1, item2, item3
```

will print the items on one line, as far as the line length allows.

Implicit do loops

Parametrized printing with an *implicit do loop*:

```
|| print *, ( i*i, i=1, n)
```

All values will be printed on the same line.

38.2.2 Printing arrays

If you print a variable that is an array, all its elements will be printed, in *column-major* ordering if the array is multi-dimensional.

You can also control the printing of an array by using an *implicit do loop*:

```
|| print *, ( A(i), i=1, n)
```

38.2.3 Formats

The default formatting uses quite a few positions for what can be small numbers. To indicate explicitly the formatting, for instance limiting the number of positions used for a number, or the whole and fractional part of a real number, you can use a format string.

For instance, you can use a letter followed by a digit to control the formatting width:

Code:

<pre> i = 56 print *, i print '(i4)', i print '(i2)', i print '(i1)', i i = i*i print '("fit <", i0, "> ted")', i</pre>	Output [iof] i4: 56 56 * fit <3136> ted
--	--

For the source of this example, see section ??

(In the last line, the format specifier was not wide enough for the data, so an asterisk was used as output.)

If you want to display items of the same type, you can use a repeat count:

Code:

<pre> i = 12; j = 34 print *, i, j print '(2i4)', i, j print '(2i2)', i, j</pre>	Output [iof] ii: 12 34 1234
--	---

For the source of this example, see section ??

You can mix variables of different types, as well as literal string, by separating them with commas. And you can group them with parentheses, and put a repeat count on those groups again:

Code:

<pre> i = 23; j = 45; k = 67 print '(i2,1x,i2)', i, j print '("Numbers:",3(1x,i2,".")), i, j, k</pre>	Output [iof] ij: 23 45 Numbers: 23. 45. 67.
---	--

For the source of this example, see section ??

To be precise, the format specifier is inside single quotes and parentheses, and consists of comma-separated specifications for a single item:

- ‘*an*’ specifies a string of *n* characters. If the actual string is longer, it is truncated in the output.
- ‘*i**n*’ specifies an integer of up to *n* digits. If the actual number takes more digits, it is rendered with asterisks. To use the minimum number of digits, use *i*0.
- ‘*f**m.n*’ specifies a fixed point representation of a real number, with *m* total positions (including the decimal point) and *n* digits in the fractional part.
- ‘*e**m.n*’ Exponent representation.
- Strings can go into the format:

```
|| print ('Result:', 3f5.3)', x, y, z
• 'x' for a space, '/' for newline
```

Putting a number in front of a single specifier indicates that it is to be repeated.

If the data takes more positions than the format specifier allows, a string of asterisks is printed:

Code:

Code:	Output
<pre> do ipower=1,5 print '(i3)', number number = 10*number end do</pre>	[fio] asterisk: 1 10 100 *** ***

For the source of this example, see section [38.5.1](#)

If you find yourself using the same format a number of times, you can give it a *label*:

```
|| print 10,"result:",x,y,z
  10 format('(a6,3f5.3)')
```

<https://www.obliquity.com/computer/fortran/format.html>

Format repetitions

```
|| print '( 3i4 )', i1,i2,i3
  print '( 3(i2,:","f7.4) )', i1,r1,i2,r2,i3,r2
```

Repeats and line breaks

- If abc is a format string, then 10 (abc) gives 10 repetitions. There is no line break.
- If there is more data than specified in the format, the format is reused in a new print statement. This causes line breaks.
- The / (slash) specifier causes a line break.
- There may be a 80 character limit on output lines.

Exercise 38.1. Use formatted I/O to print the number 0 ··· 99 as follows:

```
|| 0  1  2  3  4  5  6  7  8  9
  10 11 12 13 14 15 16 17 18 19
  20 21 22 23 24 25 26 27 28 29
  30 31 32 33 34 35 36 37 38 39
  40 41 42 43 44 45 46 47 48 49
  50 51 52 53 54 55 56 57 58 59
  60 61 62 63 64 65 66 67 68 69
```

```
|| 70 71 72 73 74 75 76 77 78 79  
|| 80 81 82 83 84 85 86 87 88 89  
|| 90 91 92 93 94 95 96 97 98 99
```

38.3 File and stream I/O

If you want to send output anywhere else than the terminal screen, you need the `write` statement, which looks like:

```
|| write (unit,format) data
```

where `format` and `data` are as described above. The new element is the *unit*, which is a numerical indication of an output device, such as a file.

38.3.1 Units

```
|| Open(11)
```

will result in a file with a name typically `fort11`.

```
|| Open(11,FILE="filename")
```

Many other options for error handling, new vs old file, etc.

After this:

```
|| Write (11,fmt) data
```

Again options for errors and such.

38.3.2 Other write options

```
|| write(unit,fmt,ADVANCE="no") data
```

will not issue a newline.

open Close

38.4 Unformatted output

So far we have looked at ascii output, which is nice to look at for a human , but is not the right medium to communicate data to another program.

- Ascii output requires time-consuming conversion.
- Ascii rendering leads to loss of precision.

Therefore, if you want to output data that is later to be read by a program, it is best to use *binary output* or *unformatted output*, sometimes also called *raw output*.

Unformatted output

Indicated by lack of format specification:

```
|| write (*) data
```

Note: may not be portable between machines.

38.5 Sources used in this chapter

38.5.1 Listing of code/fio/asterisk

```
!*****
!*** This file belongs with the course
!*** Introduction to Scientific Programming in C++/Fortran2003
!*** copyright 2018 Victor Eijkhout eijkhout@tacc.utexas.edu
!***
!*** asterisk.cxx : Fortran I/O
!***
!*****
```

Program Asterisk
implicit none

integer :: ipower, number=1

!!codesnippet fasterisk
do ipower=1,5
 print '(i3)', number
 number = 10*number
end do
!!codesnippet end

end Program Asterisk

Chapter 39

Leftover topics

39.1 Random numbers

In this section we briefly discuss the Fortran *random number generator*. The basic mechanism is through the library subroutine `random_number`, which has a single argument of type `REAL` with `INTENT(OUT)`:

```
|| real(4) :: randomfraction
|| call random_number(randomfraction)
```

The result is a random number from the uniform distribution on $[0, 1]$.

Setting the *random seed* is slightly convoluted. The amount of storage needed to store the seed can be processor and implementation-dependent, so the routine `random_seed` can have three types of named argument, exactly one of which can be specified at any one time. The keyword can be:

- `SIZE` for querying the size of the seed;
- `PUT` for setting the seed; and
- `GET` for querying the seed.

A typical fragment for setting the seed would be:

```
|| integer :: seedsize
|| integer,dimension(:),allocatable :: seed

|| call random_seed(size=seedsize)
|| allocate(seed(seedsize))
|| seed(:) = ! your integer seed here
|| call random_seed(put=seed)
```

39.2 Timing

Timing is done with the `system_clock` routine.

- This call gives an integer, counting clock ticks.
- To convert to seconds, it can also tell you how many ticks per second it has: its *timer resolution*.

```
|| integer :: clockrate,clock_start,clock_end
|| call system_clock(count_rate=clockrate)
|| print *, "Ticks per second:",clockrate

|| call system_clock(clock_start)
|| ! code
```

```
||  call system_clock(clock_end)
||  print *, "Time:", (clock_end-clock_start)/REAL(clockrate)
```

Chapter 40

Fortran review questions

40.1 Fortran versus C++

Exercise 40.1. For each of C++, Fortran, Python:

- Give an example of an application or application area that the language is suited for, and
- Give an example of an application or application area that the language is not so suited for.

40.2 Arrays

Exercise 40.2. You are looking at historical temperature data, say a table of the high and low temperature at January 1st of every year between 1920 and now, so that is 100 years. Your program accepts data as follows:

```
|| Integer :: year, high, low  
||  
|| !! code omitted  
||  
|| read *,year,high,low
```

where the temperatures are rounded to the closest degree (Centigrade or Fahrenheit is up to you.)

Consider two scenarios. For both, give the lines of code for 1. the array in which you store the data, 2. the statement that inserts the values into the array.

- Store the raw temperature data.
- Suppose you are interested in knowing how often certain high/low temperatures occurred. For instance, ‘how many years had a high temperature of 32F /0 C’.

40.3 Subprograms

Exercise 40.3. Write the missing function pos_input that

- reads a number from the user
- returns it
- and returns whether the number is positive

in such a way to make this code work:

Code:

```
program looppo
implicit none
real(4) :: userinput
do while (pos_input(userinput))
print &
' ("Positive input:",f7.3)',&
userinput
end do
print &
' ("Negative input:",f7.3)',&
userinput
!! ...
end program looppo
```

Output

[funcf] **looppo:**

Running with the following inputs:

5
1
-7.3

/bin/sh: ./looppo: No such file or directory
make[3]: *** [run_looppo] Error 127

Hint: is pos_input a SUBROUTINE or FUNCTION? If the latter, what is the type of the function result? How many parameters does it have otherwise? Where does the variable user_input get its value? So what is the type of the parameter(s) of the function?

PART IV

EXERCISES AND PROJECTS

Chapter 41

Prime numbers

In this chapter you will do a number of exercises regarding prime numbers that build on each other. Each section lists the required prerequisites. Conversely, the exercises here are also referenced from the earlier chapters.

41.1 Arithmetic

Before doing this section, make sure you study section 4.5.

Exercise 41.1. Read two numbers and print out their modulus. Two ways:

- use the `cout` function to print the expression, or
- assign the expression to a variable, and print that variable.

41.2 Conditionals

Before doing this section, make sure you study section 5.1.

Exercise 41.2. Read two numbers and print a message like

3 is a divisor of 9

if the first is an exact divisor of the second, and another message

4 is not a divisor of 9

if it is not.

41.3 Looping

Before doing this section, make sure you study section 6.1.

Exercise 41.3. Read an integer and determine whether it is prime by testing for the smaller numbers whether they are a divisor of that number.

Print a final message

Your number is prime

or

Your number is not prime: it is divisible by

where you report just one found factor.

Exercise 41.4. Rewrite the previous exercise with a boolean variable to represent the primeness of the input number.

41.4 Functions

Before doing this section, make sure you study section 7.

Above you wrote several lines of code to test whether a number was prime.

Exercise 41.5. Write a function `test_if_prime` that has an integer parameter, and returns a boolean corresponding to whether the parameter was prime.

```
|| int main() {
  bool isprime;
  isprime = test_if_prime(13);
```

Read the number in, and print the value of the boolean.

Does your function have one or two `return` statements? Can you imagine what the other possibility looks like? Do you have an argument for or against it?

41.5 While loops

Before doing this section, make sure you study section 6.2.

Exercise 41.6. Take your prime number testing function `test_if_prime`, and use it to write a program that prints multiple primes:

- Read an integer `how_many` from the input, indicating how many (successive) prime numbers should be printed.
- Print that many successive primes, each on a separate line.
- (Hint: keep a variable `number_of_primes_found` that is increased whenever a new prime is found.)

41.6 Structures

Before doing this section, make sure you study section 9.1, 14.1.

A `struct` functions to bundle together a number of data item. We only discuss this as a preliminary to classes.

Exercise 41.7. Rewrite the exercise that found a predetermined number of primes, putting the `number_of_primes_found` and `last_number_tested` variables in a structure. Your main program should now look like:

```
|| cin >> nprimes;
struct primesequence sequence;
while (sequence.number_of_primes_found < nprimes) {
    int number = nextprime(sequence);
    cout << "Number " << number << " is prime" << endl;
}
```

Hint: the variable `last_number_tested` does not appear in the main program. Where does it get updated? Also, there is no update of `number_of_primes_found` in the main program. Where do you think it would happen?

41.7 Classes and objects

Before doing this section, make sure you study section 10.1.

In exercise 41.7 you made a structure that contains the data for a prime sequence, and you have separate functions that operate on that structure or on its members.

Exercise 41.8. Write a class `primegenerator` that contains

- members `how_many_primes_found` and `last_number_tested`,
- a method `nextprime`;
- Also write a function `isprime` that does not need to be in the class.

Your main program should look as follows:

```
|| cin >> nprimes;
|| primegenerator sequence;
|| while (sequence.number_of_primes_found() < nprimes) {
||   int number = sequence.nextprime();
||   cout << "Number " << number << " is prime" << endl;
|| }
```

In the previous exercise you defined the `primegenerator` class, and you made one object of that class:

```
|| primegenerator sequence;
```

But you can make multiple generators, that all have their own internal data and are therefore independent of each other.

Exercise 41.9. The *Goldbach conjecture* says that every even number, from 4 on, is the sum of two primes $p + q$. Write a program to test this for the even numbers up to a bound that you read in.

This is a great exercise for a top-down approach! Make an outer loop over the even numbers e . In each iteration, make a `primegenerator` object to generate p values. For each p test whether $e - p$ is prime.

For each even number e then print e, p, q , for instance:

```
The number 10 is 3+7
```

If multiple possibilities exist, only print the first one you find.

Exercise 41.10. The *Goldbach conjecture* says that every even number $2n$ (starting at 4), is the sum of two primes $p + q$:

$$2n = p + q.$$

Equivalently, every number n is equidistant from two primes:

$$n = \frac{p + q}{2} \quad \text{or} \quad q - n = n - p.$$

In particular this holds for each prime number:

$$\forall_{r \text{ prime}} \exists_{p,q \text{ prime}} : r = (p + q)/2 \text{ is prime.}$$

Write a program that tests this. You need at least one loop that tests all primes r ; for each r you then need to find the primes p, q that are equidistant to it. Do you use two generators for this, or is one enough?

For each r value, when the program finds the p, q values, print the q, p, r triple and move on to the next r .

Allocate an array where you record all the $p - q$ distances that you found. Print some elementary statistics, for instance: what is the average, do the distances increase or decrease with p ?

41.8 Eratosthenes sieve

The Eratosthenes sieve is an algorithm for prime numbers that step-by-step filters out the multiples of any prime it finds.

1. Start with the integers from 2: 2, 3, 4, 5, 6, ...
2. The first number, 2, is a prime: record it and remove all multiples, giving

3, 5, 7, 9, 11, 13, 15, 17 ...

3. The first remaining number, 3, is a prime: record it and remove all multiples, giving

5, 7, 11, 13, 17, 19, 23, 25, 29 ...

4. The first remaining number, 5, is a prime: record it and remove all multiples, giving

7, 11, 13, 17, 19, 23, 29, ...

41.8.1 Arrays implementation

The sieve is easily implemented with an array that stores all integers.

Exercise 41.11. Read in an integer that denotes the largest number you want to test. Make an array of integers that long. Set the elements to the successive integers.

41.8.2 Streams implementation

The disadvantage of using an array is that we need to allocate an array. What's more, the size is determined by how many integers we are going to test, not how many prime numbers we want to generate. We are going to take the idea above of having a generator object, and apply that to the sieve algorithm: we will now have multiple generator objects, each taking the previous as input and erasing certain multiples from it.

Exercise 41.12. Write a `stream` class that generates integers and use it through a pointer.

Code:

```
||| for (int i=0; i<7; i++)
    cout << "Next int: "
        << the_ints->next() << endl;
|||
```

Output
[sieve] ints:
Next int: 2
Next int: 3
Next int: 4
Next int: 5
Next int: 6
Next int: 7
Next int: 8

Next, we need a stream that takes another stream as input, and filters out values from it.

Exercise 41.13. Write a class `filtered_stream` with a constructor

```
|| filtered_stream(int filter, shared_ptr<stream> input);
```

that

1. Implements `next`, giving filtered values,
2. by calling the `next` method of the input stream and filtering out values.

Code:

```
||| auto integers =
    make_shared<stream>();
auto odds =
    shared_ptr<stream>
    ( new filtered_stream(2, integers) );
for (int step=0; step<5; step++)
    cout << "next odd: "
        << odds->next() << endl;
|||
```

Output
[sieve] odds:
next odd: 3
next odd: 5
next odd: 7
next odd: 9
next odd: 11

Now you can implement the Eratosthenes sieve by making a `filtered_stream` for each prime number.

Exercise 41.14. Write a program that generates prime numbers as follows.

- Maintain a `current` stream, that is initially the stream of prime numbers.
- Repeatedly:
 - Record the first item from the current stream, which is a new prime number;
 - and set `current` to a new stream that takes `current` as input, filtering out multiples of the prime number just found.

41.9 Range implementation

Before doing this section, make sure you study section 24.2.

Exercise 41.15. Make a `primes` class that can be ranged:

Code:

```
|| primegenerator allprimes;
for ( auto p : allprimes ) {
    cout << p << ", ";
    if (p>100) break;
}
cout << endl;
```

Output
[primes] range:
2, 3, 5, 7, 11, 13, 17, 19, 23, 29, 31, 37, 41

Chapter 42

Geometry

In this set of exercises you will write a small ‘geometry’ package: code that manipulates points, lines, shapes. These exercises mostly use the material of section 10.

42.1 Basic functions

Exercise 42.1. Write a function with (float or double) inputs x, y that returns the distance of point (x, y) to the origin.

Test the following pairs: 1, 0; 0, 1; 1, 1; 3, 4.

Exercise 42.2. Write a function with inputs x, y, θ that alters x and y corresponding to rotating the point (x, y) over an angle θ .

$$\begin{pmatrix} x' \\ y' \end{pmatrix} = \begin{pmatrix} \cos \theta & -\sin \theta \\ \sin \theta & \cos \theta \end{pmatrix} \begin{pmatrix} x \\ y \end{pmatrix}$$

Your code should behave like:

Code:

```
const float pi = 2*acos(0.0);
float x{1.}, y{0.};
rotate(x, y, pi/4);
cout << "Rotated halfway: (" 
    << x << "," << y << ")" << endl;
rotate(x, y, pi/4);
cout << "Rotated to the y-axis: (" 
    << x << "," << y << ")" << endl;
```

Output

[geom] rotate:

Rotated halfway: (0.707107,0.707107)
Rotated to the y-axis: (0,1)

42.2 Point class

Before doing this section, make sure you study section 10.1.

A class can contain elementary data. In this section you will make a `Point` class that models cartesian coordinates and functions defined on coordinates.

Exercise 42.3. Make class `Point` with a constructor

```
|| Point( float xcoordinate, float ycoordinate );
```

Write the following methods:

- `distance_to_origin` returns a float.
- `printout` uses `cout` to display the point.
- `angle` computes the angle of vector (x, y) with the x -axis.

Exercise 42.4. Extend the `Point` class of the previous exercise with a method: `distance` that computes the distance between this point and another: if `p, q` are `Point` objects,

```
|| p.distance(q)
```

computes the distance between them.

Hint: remember the ‘dot’ notation for members.

Exercise 42.5. Write a method `halfway_point` that, given two `Point` objects `p, q`, construct the `Point` `halfway`, that is, $(p + q)/2$.

You can write this function directly, or you could write functions `Add` and `Scale` and combine these.

(Later you will learn about operator overloading.)

Exercise 42.6. Make a default constructor for the `point` class:

```
|| Point() { /* default code */ }
```

which you can use as:

```
|| Point p;
```

but which gives an indication that it is undefined:

Code:

```
|| Point p3;
cout << "Uninitialized point:"
     << endl;
p3.printout();
cout << "Using uninitialized point:"
     << endl;
auto p4 = Point(4,5)+p3;
p4.printout();
```

Output

[geom] linearnan:

Uninitialized point:

Point: nan,nan

Using uninitialized point:

Point: nan,nan

Hint: see section 4.6.2.

Exercise 42.7. Revisit exercise 42.2 using the `Point` class. Your code should now look like:

```
|| newpoint = point.rotate(alpha);
```

Exercise 42.8. Advanced. Can you make a `Point` class that can accomodate any number of space dimensions? Hint: use a `vector`; section 11.3. Can you make a constructor where you do not specify the space dimension explicitly?

42.3 Using one class in another

Before doing this section, make sure you study section 10.2.

Exercise 42.9. Make a class `LinearFunction` with a constructor:

```
|| LinearFunction( Point input_p1, Point input_p2 );
```

and a member function

```
|| float evaluate_at( float x );
```

which you can use as:

```
|| LinearFunction line(p1,p2);  
|| cout << "Value at 4.0: " << line.evaluate_at(4.0) << endl;
```

Exercise 42.10. Make a class `LinearFunction` with two constructors:

```
|| LinearFunction( Point input_p2 );  
|| LinearFunction( Point input_p1,Point input_p2 );
```

where the first stands for a line through the origin.

Implement again the `evaluate` function so that

```
|| LinearFunction line(p1,p2);  
|| cout << "Value at 4.0: " << line.evaluate_at(4.0) << endl;
```

Exercise 42.11. Revisit exercises 42.2 and 42.7, introducing a `Matrix` class. Your code can now look like

```
|| newpoint = point.apply(rotation_matrix);
```

or

```
|| newpoint = rotation_matrix.apply(point);
```

Can you argue in favour of either one?

Suppose you want to write a `Rectangle` class, which could have methods such as `float Rectangle::area()` or `bool Rectangle::contains(Point)`. Since rectangle has four corners, you could store four `Point` objects in each `Rectangle` object. However, there is redundancy there: you only need three points to infer the fourth. Let's consider the case of a rectangle with sides that are horizontal and vertical; then you need only two points.

Axi-parallel rectangle class

Intended API:

```
|| float Rectangle::area();
```

It would be convenient to store width and height; for

```
|| bool Rectangle::contains(Point);
```

it would be convenient to store bottomleft/topright points.

Exercise 42.12.

- Make a class `Rectangle` (sides parallel to axes) with a constructor:

```
|| Rectangle(Point bl,float w,float h);
```

The logical implementation is to store these quantities. Implement methods

```
|| float area(); float rightedge(); float topedge();
```

- Add a second constructor

```
|| Rectangle(Point bl,Point tr);
```

Can you figure out how to use member initializer lists for the constructors?

- Write another version of your class so that it stores two `Point` objects.

The previous exercise illustrates an important point: for well designed classes you can change the implementation (for instance motivated by efficiency) while the program that uses the class does not change.

42.4 Is-a relationship

Before doing this section, make sure you study section 10.3.

Exercise 42.13. Take your code where a Rectangle was defined from one point, width, and height.

Make a class Square that inherits from Rectangle. It should have the function area defined, inherited from Rectangle.

First ask yourself: what should the constructor of a Square look like?

Exercise 42.14. Revisit the LinearFunction class. Add methods slope and intercept.

Now generalize LinearFunction to StraightLine class. These two are almost the same except for vertical lines. The slope and intercept do not apply to vertical lines, so design StraightLine so that it stores the defining points internally. Let LinearFunction inherit.

42.5 More stuff

Before doing this section, make sure you study section 14.3.

The Rectangle class stores at most one corner, but may be convenient to sometimes have an array of all four corners.

Exercise 42.15. Add a method

```
|| const vector<Point> &corners()
```

to the Rectangle class. The result is an array of all four corners, not in any order.

Show by a compiler error that the array can not be altered.

Chapter 43

Infectuous disease simulation

This section contains a sequence of exercises that builds up to a somewhat realistic simulation of the spread of infectious diseases.

43.1 Model design

It is possible to model disease propagation statistically, but here we will build an explicit simulation: we will maintain an explicit description of all the people in the population, and track for each of them their status.

We will use a simple model where a person can be:

- sick: when they are sick, they can infect other people;
- susceptible: they are healthy, but can be infected;
- recovered: they have been sick, but no longer carry the disease, and can not be infected for a second time;
- vaccinated: they are healthy, do not carry the disease, and can not be infected.

In more complicated models a person could be infectious during only part of their illness, or there could be secondary infections with other diseases, et cetera. We keep it simple here: any sick person is can infect others while they are sick.

In the exercises below we will gradually develop a somewhat realistic model of how the disease spreads from an infectious person. We always start with just one person infected. The program will then track the population from day to day, running indefinitely until none of the population is sick. Since there is no re-infection, the run will always end.

43.1.1 Other ways of modeling

Instead of capturing every single person in code, a ‘contact network’ model, it is possible to use an Ordinary Differential Equation (ODE) approach to disease modeling. You would then model the percentage of infected persons by a single scalar, and derive relations for that and other scalars [2].

<http://mathworld.wolfram.com/Kermack-McKendrickModel.html>

This is known as a ‘compartamental model’. Both the contact network and the compartmental model capture part of the truth. In fact, they can be combined. We can consider a country as a set of cities, where people travel between any pair of cities. We then use a compartmental model inside a city, and a contact network between cities.

43.2 Coding up the basics

Before doing this section, make sure you study section 10.

We start by writing code that models a single person. The main methods serve to infect a person, and to track their state. We need to have some methods for inspecting that state.

The intended output looks something like:

```
On day 10, Joe is susceptible
On day 11, Joe is susceptible
On day 12, Joe is susceptible
On day 13, Joe is susceptible
On day 14, Joe is sick (5 to go)
On day 15, Joe is sick (4 to go)
On day 16, Joe is sick (3 to go)
On day 17, Joe is sick (2 to go)
On day 18, Joe is sick (1 to go)
On day 19, Joe is recovered
```

Exercise 43.1. Write a `Person` class with methods:

- `status_string()` : returns a description of the person's state as a `string`;
- `update()` : update the person's status to the next day;
- `infect(n)` : infect a person, with the disease to run for n days;
- `is_stable()` : return a `bool` indicating whether the person has been sick and is recovered.

Your main program could for instance look like:

```
Person joe;

int step = 1;
for ( ; ; step++) {

    joe.update();
    float bad_luck = (float) rand() / (float) RAND_MAX;
    if (bad_luck > .95)
        joe.infect(5);

    cout << "On day " << step << ", Joe is "
        << joe.status_string() << endl;
    if (joe.is_stable())
        break;
}
```

Here is a suggestion how you can model disease status. Use a single integer with the following interpretation:

- healthy but not vaccinated, value 0,
- recovered, value -1 ,
- vaccinated, value -2 ,
- and sick, with n days to go before recovery, modeled by value n .

The `Person::update` method then updates this integer.

43.3 Population

Before doing this section, make sure you study section 11.

Next we need a `Population` class. Implement a population as a vector consisting of `Person` objects. Initially we only infect one person, and there is no transmission of the disease.

The trace output should look something like:

```
Size of
population?
In step 1 #sick: 1 : ? ? ? ? ? ? ? ? ? + ? ? ? ? ? ? ? ? ?
In step 2 #sick: 1 : ? ? ? ? ? ? ? ? ? + ? ? ? ? ? ? ? ? ?
In step 3 #sick: 1 : ? ? ? ? ? ? ? ? ? + ? ? ? ? ? ? ? ? ?
In step 4 #sick: 1 : ? ? ? ? ? ? ? ? ? + ? ? ? ? ? ? ? ? ?
In step 5 #sick: 1 : ? ? ? ? ? ? ? ? ? + ? ? ? ? ? ? ? ? ?
In step 6 #sick: 0 : ? ? ? ? ? ? ? ? ? - ? ? ? ? ? ? ? ? ?
Disease ran its course by step 6
```

Exercise 43.2. Program a population without infection.

- Write the `Population` class. The constructor takes the number of people:

```
||Population population(npeople);
```

- Write a method that infects a random person:

```
||population.random_infection();
```

- Write a method `count_infected` that counts how many people are infected.
- Write an `update` method that updates all persons in the population.
- Loop the `update` method until no people are infected: the `Population::update` method should apply `Person::update` to all person in the population.

Write a routine that displays the state of the popular, using for instance: ? for susceptible, + for infected, – for recovered.

43.4 Contagion

This past exercise was too simplistic: the original patient zero was the only one who ever got sick. Now let's incorporate contagion, and investigate the spread of the disease from a single infected person.

We start with a very simple model of infection.

Exercise 43.3. Read in a number $0 \leq p \leq 1$ representing the probability of disease transmission upon contact. Incorporate this into the program: in each step the direct neighbours of an infected person can now get sick themselves.

```
||population.set_probability_of_transfer(probability);
```

Run a number of simulations with population sizes and contagion probabilities. Are there cases where people escape getting sick?

Exercise 43.4. Incorporate inoculation: read another number representing the percentage of people that has been vaccinated. Choose those members of the population randomly. Describe the effect of vaccinated people on the spread of the disease. Why is this model unrealistic?

43.5 Spreading

To make the simulation more realistic, we let every sick person come into contact with a fixed number of random people every day. This gives us more or less the *SIR model*; https://en.wikipedia.org/wiki/Epidemic_model.

Set the number of people that a person comes into contact with, per day, to 6 or so. (You can also let this be an upper bound for a random value, but that does not essentially change the simulation.) You have already programmed the probability that a person who comes in contact with an infected person gets sick themselves. Again start the simulation with a single infected person.

Exercise 43.5. Code the random interactions. Now run a number of simulations varying

- The percentage of people inoculated, and
- the chance the disease is transmitted on contact.

Record how long the disease runs through the population. With a fixed number of contacts and probability of transmission, how is this number of function of the percentage that is vaccinated?

Investigate the matter of ‘herd immunity’: if enough people are vaccinated, then some people who are not vaccinated will still never get sick. Let’s say you want to have this probability over 95 percent. Investigate the percentage of inoculation that is needed for this as a function of the contagiousness of the disease.

43.6 Project writeup and submission

43.6.1 Program files

In the course of this project you have written more than one main program, but some code is shared between the multiple programs. Organize your code with one file for each main program, and a single ‘library’ file with the class methods. This requires you to use *separate compilation* for building the program, and you need a *header* file; section 18.1.2.

Submit all source files with instructions on how to build all the main programs. You can put these instructions in a file with a descriptive name such as README or INSTALL, or you can use a *makefile*.

43.6.2 Writeup

In the writeup, describe the ‘experiments’ you have performed and the conclusions you draw from them. The exercises above give you a number of questions to address.

For each main program, include some sample output, but note that this is no substitute for writing out your conclusions in full sentences.

The last exercise asks you to explore the program behaviour as a function of one or more parameters. Include a table to report on the behaviour you found. You can use Matlab or Matplotlib in Python (or even Excell) to plot your data, but that is not required.

Chapter 44

PageRank

44.1 Basic ideas

We are going to simulate the Internet. In particular, we are going to simulate the *Pagerank* algorithm by which *Google* determines the importance of web pages.

Let's start with some basic classes:

- A `Page` contains some information such as its title and a global numbering in Google's data-center. It also contains a collection of links.
- We represent a link with a pointer to a `Page`. Conceivably we could have a `Link` class, containing further information such as probability of being clicked, or number of times clicked, but for now a pointer will do.
- Ultimately we want to have a class `Web` which contains a number of pages and their links. The `web` object will ultimately also contain information such as relative importance of the pages.

This application is a natural one for using pointers. When you click on a link on a web page you go from looking at one page in your browser to looking at another. You could implement this by having a pointer to a page, and clicking updates the value of this pointer.

Exercise 44.1. Make a class `Page` which initially just contains the name of the page. Write a method to display the page. Since we will be using pointers quite a bit, let this be the intended code for testing:

```
|| auto homepage = make_shared<Page>("My Home Page");
  || cout << "Homepage has no links yet:" << endl;
  || cout << homepage->as_string() << endl;
```

Next, add links to the page. A link is a pointer to another page, and since there can be any number of them, you will need a `vector` of them. Write a method `click` that follows the link. Intended code:

```
|| auto utexas = make_shared<Page>("University Home Page");
  || homepage->add_link(utexas);
  || auto searchpage = make_shared<Page>("google");
  || homepage->add_link(searchpage);
  || cout << homepage->as_string() << endl;
```

Exercise 44.2. Add some more links to your homepage. Write a method `random_click` for the `Page` class. Intended code:

```
    || for (int iclick=0; iclick<20; iclick++) {  
    ||     auto newpage = homepage->random_click();  
    ||     cout << "To: " << newpage->as_string() << endl;  
    || }
```

How do you handle the case of a page without links?

44.2 Clicking around

Exercise 44.3. Now make a class `Web` which foremost contains a bunch (technically: a `vector`) of pages. Or rather: of pointers to pages. Since we don't want to build a whole internet by hand, let's have a method `create_random_links` which makes a random number of links to random pages. Intended code:

```
|| Web internet(netsize);  
|| internet.create_random_links(avglinks);
```

Now we can start our simulation. Write a method `Web::random_walk` that takes a page, and the length of the walk, and simulates the result of randomly clicking that many times on the current page. (Current page. Not the starting page.)

Let's start working towards PageRank. First we see if there are pages that are more popular than others. You can do that by starting a random walk once on each page. Or maybe a couple of times.

Exercise 44.4. Apart from the size of your internet, what other design parameters are there for your tests? Can you give a back-of-the-envelope estimation of their effect?

Exercise 44.5. Your first simulation is to start on each page a number of times, and counts where that lands you. Intended code:

```
|| vector<int> landing_counts(internet.number_of_pages(), 0);  
|| for (auto page : internet.all_pages() ) {  
||     for (int iwalk=0; iwalk<5; iwalk++) {  
||         auto endpage = internet.random_walk(page, 2*avglinks, tracing);  
||         landing_counts.at(endpage->global_ID())++;  
||     }  
|| }
```

Display the results and analyze. You may find that you finish on certain pages too many times. What's happening? Fix that.

44.3 Graph algorithms

There are many algorithms that rely on gradually traversing the web. For instance, any graph can be connected. You test that by

- Take an arbitrary vertex v . Make a ‘reachable set’ $R \leftarrow \{v\}$.
- Now see where you can get from your reachable set:

$$\forall_{v \in V} \forall_w \text{neighbour of } v : R \leftarrow R \cup \{w\}$$

- Repeat the previous step until R does not change anymore.

After this algorithm concludes, is R equal to your set of vertices? If so, your graph is called (fully) connected. If not, your graph has multiple *connected components*.

Exercise 44.6. Code the above algorithm, keeping track of how many steps it takes to reach each vertex w . This is the *Single Source Shortest Path* algorithm (for unweighted graphs).

The *diameter* is defined as the maximal shortest path. Code this.

44.4 Page ranking

The Pagerank algorithm now asks, if you keep clicking randomly, what is the distribution of how likely you are to wind up on a certain page. The way we calculate that is with a probability distribution: we assign a probability to each page so that the sum of all probabilities is one. We start with a random distribution:

Code:

<pre> ProbabilityDistribution random_state(internet.number_of_pages()); random_state.set_random(); cout << "Initial distribution: " << random_state.as_string() << endl;</pre>	Output [google] pdfsetup: <pre>Initial distribution: 0:0.00, 1:0.02, 2:0.07,</pre>
--	--

For the source of this example, see section ??

Exercise 44.7. Implement a class `ProbabilityDistribution`, which stores a vector of floating point numbers. Write methods for:

- accessing a specific element,
- setting the whole distribution to random, and
- normalizing so that the sum of the probabilities is 1.
- a method rendering the distribution as string could be useful too.

Next we need a method that given a probability distribution, gives you the new distribution corresponding to performing a single click.

Exercise 44.8. Write the method

```
|| ProbabilityDistribution Web::globalclick
  ( ProbabilityDistribution currentstate );
```

Test it by

- start with a distribution that is nonzero in exactly one page;
- print the new distribution corresponding to one click;
- do this for several pages and inspect the result visually.

Then start with a random distribution and run a couple of iterations. How fast does the process converge? Compare the result to the random walk exercise above.

Exercise 44.9. In the random walk exercise you had to deal with the fact that some pages have no outgoing links. In that case you transitioned to a random page. That mechanism is lacking in the `globalclick` method. Figure out a way to incorporate this.

Let's simulate some simple ‘search engine optimization’ trick.

Exercise 44.10. Add a page that you will artificially make look important: add a number of pages (for instance four times the average number of links) that all link to this page,

but no one links to them. (Because of the random clicking they will still sometimes be reached.)

Compute the rank of the artificially hyped page. Did you manage to trick Google into ranking this page high?

44.5 Graphs and linear algebra

The probability distribution is essentially a vector. You can also represent the web as a matrix W with $w_{ij} = 1$ if page i links to page j . How can you interpret the `globalclick` method in these terms?

Exercise 44.11. Add the matrix representation of the `Web` object and reimplement the `globalclick` method. Test for correctness.

Do a timing comparison.

The iteration you did above to find a stable probability distribution corresponds to the ‘power method’ in linear algebra. Look up the Perron-Frobenius theory and see what it implies for page ranking.

44.6 Sources used in this chapter

Chapter 45

Redistricting

In this project you can explore ‘gerrymandering’, the strategic drawing of districts to give a minority population a majority of districts¹.

45.1 Basic concepts

We are dealing with the following concepts:

- A state is divided into census districts, which are given. Based on census data (income, ethnicity, median age) one can usually make a good guess as to the overall voting in such a district.
- There is a predetermined number of congressional districts, each of which consists of census districts. A congressional district is not a random collection: the census districts have to be contiguous.
- Every couple of years, to account for changing populations, the district boundaries are redrawn. This is known as redistricting.

There is considerable freedom in how redistricting is done: by shifting the boundaries of the (congressional) districts it is possible to give a population that is in the overall minority a majority of districts. This is known as *gerrymandering*.

To do a small-scale computer simulation of gerrymandering, we make some simplifying assumption.

- First of all, we dispense with census district: we assume that a district consists directly of voters, and that we know their affiliation. In practice one relies on proxy measures (such as income and education level) to predict affiliation.
- Next, we assume a one-dimensional state. This is enough to construct examples that bring out the essence of the problem:

Consider a state of five voters, and we designate their votes as AAABB. Assigning them to three (contiguous) districts can be done as AAA | B | B, which has one ‘A’ district and two ‘B’ districts.

- We also allow districts to be any positive size, as long as the number of districts is fixed.

1. This project is obviously based on the Northern American political system. Hopefully the explanations here are clear enough. Please contact the author if you know of other countries that have a similar system.

45.2 Basic functions

45.2.1 Voters

We dispense with census districts, expressing everything in terms of voters, for which we assume a known voting behaviour. Hence, we need a `Voter` class, which will record the voter ID and party affiliation. We assume two parties, and leave an option for being undecided.

Exercise 45.1. Implement a `Voter` class. You could for instance let ± 1 stand for A/B, and 0 for undecided.

Code:

```
cout << "Voter 5 is positive:" << endl;
Voter nr5(5,+1);
cout << nr5.print() << endl;
/* ... */
cout << "Voter 6 is negative:" << endl;
Voter nr6(6,-1);
cout << nr6.print() << endl;
/* ... */
cout << "Voter 7 is weird:" << endl;
Voter nr7(7,3);
cout << nr7.print() << endl;
```

missing snippet voterneg missing snippet voterwrong

Output

[gerry] voters:

Voter 5 is positive:
5:+

Voter 6 is negative:
6:-

Voter 7 is weird:
Illegal affiliation value: 3
Error in creating voter 7

45.2.2 Populations

Exercise 45.2. Implement a `District` class that models a group of voters.

- You probably want to create a district out of a single voter, or a vector of them.
Having a constructor that accepts a string representation would be nice too.
- Write methods `majority` to give the exact majority or minority, and `lean` that evaluates whether the district overall counts as A part or B party.
- Write a `sub` method to creates subsets.

```
|| District District::sub(int first,int last);
```

- For debugging and reporting it may be a good idea to have a method

```
|| string District::print();
```

Code:

```
cout << "Making district with one B voter" << endl;
Voter nr5(5,+1);
District nine( nr5 );
cout << "... size: " << nine.size() << endl;... lean: 1
cout << "... lean: " << nine.lean() << endl;
/* ... */
cout << "Making district ABA" << endl;
District nine( vector<Voter>
                { {1,-1},{2,+1},{3,-1} } );
cout << "... size: " << nine.size() << endl;
cout << "... lean: " << nine.lean() << endl;
```

Output

[gerry] district:

Making district with one B voter

.. size: 1

Making district ABA

.. size: 3

.. lean: -1

Exercise 45.3. Implement a `Population` class that will initially model a whole state.

Code:

```

string pns( "----" );
Population some(pns);
cout << "Population from string " << pns << endl;
cout << "... size: " << some.size() << endl;
cout << "... lean: " << some.lean() << endl;
Population group=some.sub(1,3);
cout << "sub population 1--3" << endl;
cout << "... size: " << group.size() << endl;
cout << "... lean: " << group.lean() << endl;

```

Output

[gerry] population:
Population from string ----
size: 5
.. lean: -1
sub population 1--3
.. size: 2
.. lean: 1

In addition to an explicit creation, also write a constructor that specifies how many people and what the majority is:

```
|| Population( int population_size, int majority, bool trace=false )
```

Use a random number generator to achieve precisely the indicated majority.

45.2.3 Districting

The next level of complication is to have a set of districts. Since we will be creating this incrementally, we need some methods for extending it.

Exercise 45.4. Write a class `Districting` that stores a vector of `District` objects.

Write `size` and `lean` methods:

Code:

```

cout << "Making single voter population B" << endl;
Population people( vector<Voter>{ Voter(0,+1) } );
cout << "... size: " << people.size() << endl;
cout << "... lean: " << people.lean() << endl;
Districting gerry;
cout << "Start with empty districting:" << endl;
cout << "... number of districts: " << gerry.size() << endl;

```

Output

[gerry] gerryempty:
Making single voter population B
size: 1
lean: 1
Start with empty districting:
number of districts: 0

Exercise 45.5. Write methods to extend a `Districting`:

```

cout << "Add one B voter:" << endl;
gerry = gerry.extend_with_new_district( people.at(0) );
cout << "... number of districts: " << gerry.size() << endl;
cout << "... lean: " << gerry.lean() << endl;
cout << "add A A:" << endl;
gerry = gerry.extend_last_district( Voter(1,-1) );
gerry = gerry.extend_last_district( Voter(2,-1) );
cout << "... number of districts: " << gerry.size() << endl;
cout << "... lean: " << gerry.lean() << endl;

cout << "Add two B districts:" << endl;
gerry = gerry.extend_with_new_district( Voter(3,+1) );
gerry = gerry.extend_with_new_district( Voter(4,+1) );
cout << "... number of districts: " << gerry.size() << endl;
cout << "... lean: " << gerry.lean() << endl;

```

45. Redistricting

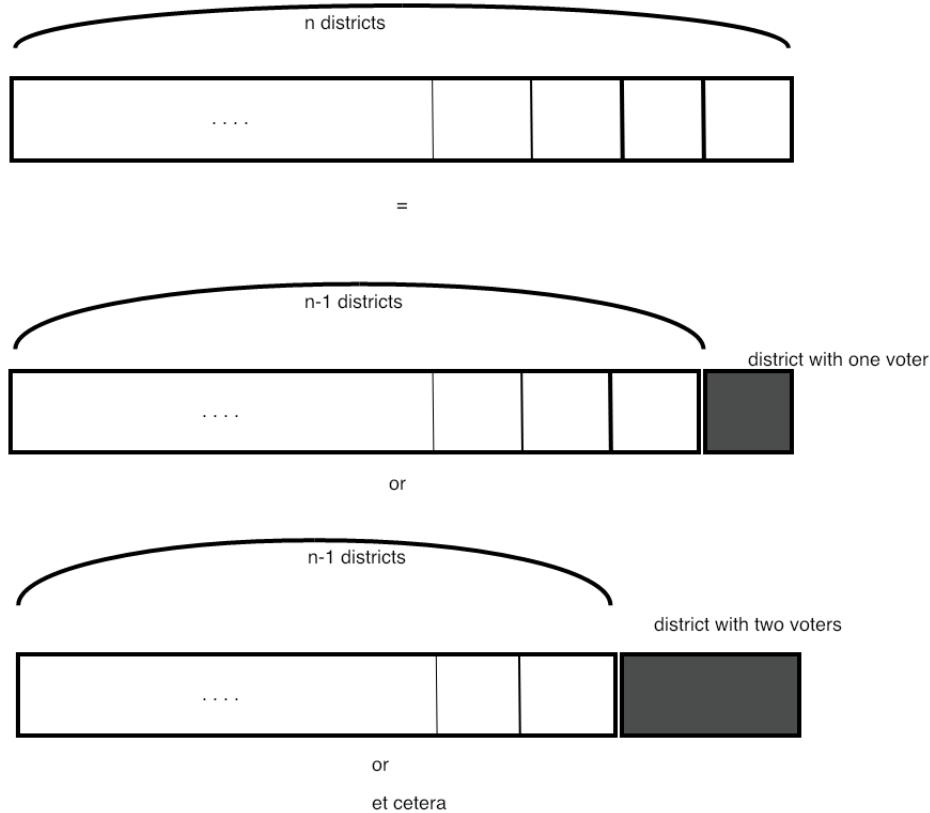


Figure 45.1: Multiple ways of splitting a population

45.3 Strategy

Now we need a method for districting a population:

```
|| Districting Population::minority_rules( int ndistricts );
```

Rather than generating all possible partitions of the population, we take an incremental approach (this is related to the solution strategy called *dynamic programming*):

- The basic question is to divide a population optimally over n districts;
- We do this recursively by first solving a division of a subpopulation over $n - 1$ districts,
- and extending that with the remaining population as one district.

This means that you need to consider all the ways of having the ‘remaining’ population into one district, and that means that you will have a loop over all ways of splitting the population, outside of your recursion; see figure 45.1.

- For all $p = 0, \dots, n - 1$ considering splitting the state into $0, \dots, p - 1$ and $p, \dots, n - 1$.
- Use the best districting of the first group, and make the last group into a single district.
- Keep the districting that gives the strongest minority rule, over all values of p .

You can now realize the above simple example:

AAABB => AAA | B | B

Exercise 45.6. Implement the above scheme.

Code:

<pre> Population five("-----"); cout << "Redistricting population: " << endl << five.print() << endl; cout << "... majority rule: " << five.rule() << endl; int ndistricts{3}; auto gerry = five.minority_rules(ndistricts); cout << gerry.print() << endl; cout << "... minority rule: " << gerry.rule() << endl; </pre>	Output [gerry] district5: <pre> Redistricting population: [0:+,1:+,2:+,3:-,4:-,] .. majority rule: 1 [3[0:+,1:+,2:+,], [3:-,], [4:-,],] .. minority rule: -1 </pre>
---	--

Note: the range for p given above is not quite correct: for instance, the initial part of the population needs to be big enough to accomodate $n - 1$ voters.

Exercise 45.7. Test multiple population sizes; how much majority can you give party B while still giving party A a majority.

45.4 Efficiency: dynamic programming

If you think about the algorithm you just implemented, you may notice that the districtings of the initial parts get recomputed quite a bit. A strategy for optimizing for this is called *memoization*.

Exercise 45.8. Improve your implementation by storing and reusing results for the initial sub-populations.

In a way, we solved the program backward: we looked at making a district out of the last so-many voters, and then recursively solving a smaller problem for the first however-many voters. But in that process, we decided what is the best way to assign districts to the first 1 voter, first 2, first 3, et cetera. Actually, for more than one voter, say five voters, we found the result on the best attainable minority rule assigning these five voters to one, two, three, four districts.

The process of computing the ‘best’ districting forward, is known as *dynamic programming*. The fundamental assumption here is that you can use intermediate results and extend them, without having to reconsider the earlier problems.

Consider for instance that you’ve considered districting ten voters over up to five districts. Now the majority for eleven voters and five districts is the minimum of

- ten voters and five districts, and the new voter is added to the last district; or
- ten voters and four districts, and the new voter becomes a new district.

Exercise 45.9. Code a dynamic programming solution to the redistricting problem.

45.5 Extensions

The project so far has several simplifying assumptions.

- Congressional districts need to be approximately the same size. Can you put a limit on the ratio between sizes? Can the minority still gain a majority?

Exercise 45.10. The biggest assumption is of course that we considered a one-dimensional state. With two dimensions you have more degrees of freedom of shaping the districts. Implement a two-dimensional scheme; use a completely square state, where the census districts form a regular grid. Limit the shape of the congressional districts to be convex.

The *efficiency gap* is a measure of how ‘fair’ a districting of a state is.

Exercise 45.11. Look up the definition of efficiency gap (and ‘wasted votes’), and implement it in your code.

Chapter 46

Amazon delivery truck scheduling

This section contains a sequence of exercises that builds up to a simulation of delivery truck scheduling.

46.1 Problem statement

Scheduling the route of a delivery truck is a well-studied problem. For instance, minimizing the total distance that the truck has to travel corresponds to the *Traveling Salesman Problem (TSP)*. However, in the case of *Amazon delivery truck* scheduling the problem has some new aspects:

- A customer is promised a window of days when delivery can take place. Thus, the truck can split the list of places into sublists, with a shorter total distance than going through the list in one sweep.
- Except that *Amazon prime* customers need their deliveries guaranteed the next day.

46.2 Coding up the basics

Before we try finding the best route, let's put the basics in place to have any sort of route at all.

46.2.1 Address list

You probably need a class `Address` that describes the location of a house where a delivery has to be made.

- For simplicity, let give a house (i, j) coordinates.
- We probably need a `distance` function between two addresses. We can either assume that we can travel in a straight line between two houses, or that the city is build on a grid, and you can apply the so-called *Manhattan distance*.
- The address may also require a field recording the last possible delivery date.

Exercise 46.1. Code a class `Address` with the above functionality, and test it.

Code:

```

Address one(1.,1.),
two(2.,2.);
cerr << "Distance: "
<< one.distance(two)
<< "\n";

```

Output

[amazon] address:

```

Address
Distance: 1.41421
.. address
Address 1 should be closest to the depot. Check

```

```

Route from depot to depot: (0,0) (2,0) (1,0)
has length 8: 8
Greedy scheduling: (0,0) (1,0) (2,0) (3,0) (0,
should have length 6: 6

```

Square5

```

Travel in order: 24.1421
Square route: (0,0) (0,5) (5,5) (5,0) (0,0)
has length 20
.. square5

```

```

Original list: (0,0) (-2,0) (-1,0) (1,0) (2,0)
length=8
flip middle two addresses: (0,0) (-2,0) (1,0)
length=12
better: (0,0) (1,0) (-2,0) (-1,0) (2,0) (0,0)
length=10

```

Hundred houses

```

Route in order has length 25852.6
TSP based on mere listing has length: 2751.99
Single route has length: 2078.43
.. new route accepted with length 2076.65
Final route has length 2076.65 over initial 2078.43
TSP route has length 1899.4 over initial 2078.43

```

Two routes

```

Route1: (0,0) (2,0) (3,2) (2,3) (0,2) (0,0)
route2: (0,0) (3,1) (2,1) (1,2) (1,3) (0,0)
total length 19.6251
start with 9.88635,9.73877
Pass 0
.. down to 9.81256,8.57649
Pass 1
Pass 2
Pass 3
Pass 4
TSP Route1: (0,0) (3,1) (3,2) (2,3) (0,2) (0,0)
route2: (0,0) (2,0) (2,1) (1,2) (1,3) (0,0)
total length 18.389

```

Two routes

```

Total route has greedy length 2677.46 and TSP 1817.21
greedy routes have length 1817.21, 1932.43
start with 1817.21,1932.43

```

```

Pass 0
.. down to 1813.43,1926.55
.. down to 1811.74,1924.52
.. down to 1803.16,1893.5
.. down to 1786.61,1890.77
.. down to 1784.83,1888.22
.. down to 1779.53,1885.13
.. down to 1779.1,1884.69
.. down to 1774.08,1849.38
.. down to 1763.01,1849.15
.. down to 1759.65,1835.71
.. down to 1750.57,1830.57
.. down to 1748.53,1827.73
.. down to 1747.9,1814.22
.. down to 1744.81,1808.56

```

Next we need a class *AddressList* that contains a list of addresses.

Exercise 46.2. Implement a class *AddressList*; it probably needs the following methods:

- *add_address* for constructing the list;
- *length* to give the distance one has to travel to visit all addresses in order;
- *index_closest_to* that gives you the address on the list closest to another address, presumably not on the list.

46.2.2 Add a depot

Next, we model the fact that the route needs to start and end at the depot, which we put arbitrarily at coordinates (0, 0). We could construct an *AddressList* that has the depot as first and last element, but that may run into problems:

- If we reorder the list to minimize the driving distance, the first and last elements may not stay in place.
- We may want elements of a list to be unique: having an address twice means two deliveries at the same address, so the *add_address* method would check that an address is not already in the list.

We can solve this by making a class *Route*, which inherits from *AddressList*, but the methods of which leave the first and last element of the list in place.

46.2.3 Greedy construction of a route

Next we need to construct a route. Rather than solving the full TSP, we start by employing a *greedy* search strategy:

Given a point, find the next point by some local optimality test, such as shortest distance. Never look back to revisit the route you have constructed so far.

Such a strategy is likely to give an improvement, but most likely will not give the optimal route.

Let's write a method

```
|| Route:::Route greedy_route();
```

that constructs a new address list, containing the same addresses, but arranged to give a shorter length to travel.

Exercise 46.3. Write the *greedy_route* method for the *AddressList* class.

1. Assume that the route starts at the depot, which is located at (0, 0). Then incrementally construct a new list by:
2. Maintain an *Address* variable *we_are_here* of the current location;
3. repeatedly find the address closest to *we_are_here*.

Extend this to a method for the *Route* class by working on the subvector that does not contain the final element.

Test it on this example:

Code:

```

Route deliveries;
deliveries.add_address( Address(0,5) );
deliveries.add_address( Address(5,0) );
deliveries.add_address( Address(5,5) );
cerr << "Travel in order: " << deliveries.length() << "\n";
assert( deliveries.size()==5 );
auto route = deliveries.greedy_route();
assert( route.size()==5 );
auto len = route.length();
cerr << "Square route: " << route.as_string()
<< "\n has length " << len << "\n";
    
```

Output

[amazon] square5:

Travel in order: 24.1421
Square route: (0,0) (0,5) (5,5) (5,0) (0,0)
has length 20

Reorganizing a list can be done in a number of ways.

- First of all, you can try to make the changes in place. This runs into the objection that maybe you want to save the original list; also, while swapping two elements can be done with the `insert` and `erase` methods, more complicated operations are tricky.
- Alternatively, you can incrementally construct a new list. Now the main problem is to keep track of which elements of the original have been processed. You could do this by giving each address a boolean field `done`, but you could also make a copy of the input list, and remove the elements that have been processed. For this, study the `erase` method for `vector` objects.

46.3 Optimizing the route

The above suggestion of each time finding the closest address is known as a *greedy search* strategy. It does not give you the optimal solution of the TSP. Finding the optimal solution of the TSP is hard to program – you could do it recursively – and takes a lot of time as the number of addresses grows. In fact, the TSP is probably the most famous of the class of *NP-hard* problems, which are generally believed to have a running time that grows faster than polynomial in the problem size.

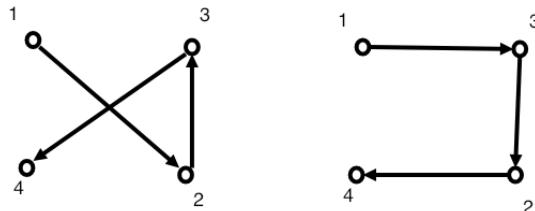


Figure 46.1: Illustration of the ‘opt2’ idea of reversing part of a path

However, you can approximate the solution heuristically. One method, the Kernighan-Lin algorithm [10], is based on the *opt2* idea: if you have a path that ‘crosses itself’, you can make it shorter by reversing part of it. Figure 46.1 shows that the path 1 – 2 – 3 – 4 can be made shorter by reversing part of it, giving 1 – 3 – 2 – 4. Since recognizing where a path crosses itself can be hard, or even impossible for graphs that don’t have Cartesian coordinates associated, we adopt a scheme:

```

for all nodes m<n on the path [1..N] :
    make a new route from
        [1..m-1] + [m--n].reversed + [n+1..N]
    
```

if the new route is shorter, keep it

Exercise 46.4. Code the opt2 heuristic: write a method to reverse part of the route, and write the loop that tries this with multiple starting and ending points. Try it out on some simple test cases to convince you that your code works as intended.

Exercise 46.5. What is the runtime complexity of this heuristic solution?

Exercise 46.6. Earlier you had programmed the greedy heuristic. Compare the improvement you get from the opt2 heuristic, starting both with the given list of addresses, and with a greedy traversal of it.

46.4 Multiple trucks

If we introduce multiple delivery trucks, we get the ‘Multiple Traveling Salesman Problem’ [5]. With this we can module both the cases of multiple trucks being out on delivery on the same day, or one truck spreading deliveries over multiple days. For now we don’t distinguish between the two.

The first question is how to divide up the addresses.

1. We could split the list in two, using some geometric test. This is a good model for the case where multiple trucks are out on the same day. However, if we use this as a model for the same truck being out on multiple days, we are missing the fact that new addresses can be added on the first day, messing up the neatly separated routes.
2. Thus it may in fact be reasonable to assume that all trucks get an essentially random list of addresses.

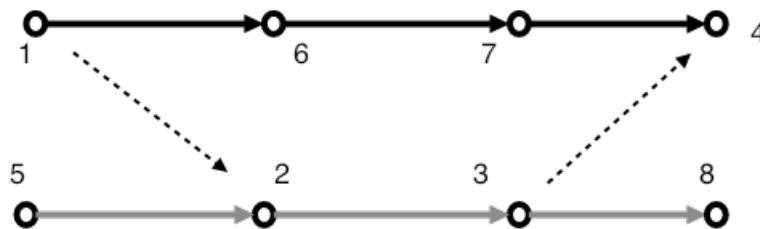
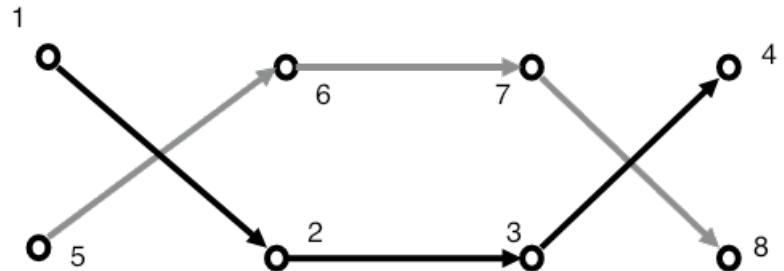


Figure 46.2: Extending the ‘opt2’ idea to multiple paths

Can we extend the opt2 heuristic to the case of multiple paths? For inspiration take a look at figure 46.2: instead of modifying one path, we could switch bits out bits between one path and another. When you

write the code, take into account that the other path may be running backwards! This means that based on split points in the first and second path you know have four resulting modified paths to consider.

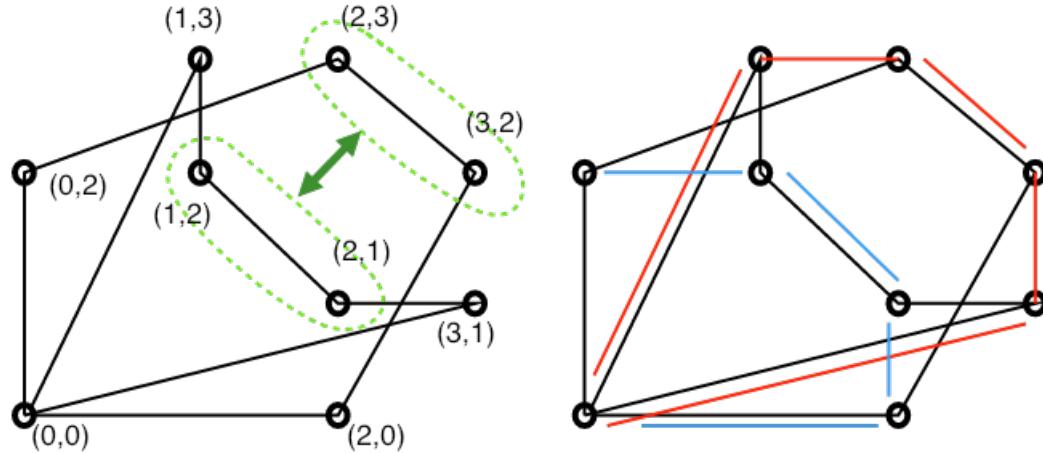


Figure 46.3: Multiple paths test case

Exercise 46.7. Write a function that optimizes two paths simultaneously using the multi-path version of the opt2 heuristic. For a test case, see figure 46.3.

Based on the above description there will be a lot of code duplication. Make sure to introduce functions and methods for various operations.

46.5 Amazon prime

In section ?? you made the assumption that it doesn't matter on what day a package is delivered. This changes with *Amazon prime*, where a package has to be delivered guaranteed on the next day.

Exercise 46.8. Explore a scenario where there are two trucks, and each have a number of addresses that can not be exchanged with the other route. How much longer is the total distance? Experiment with the ratio of prime to non-prime addresses.

46.6 Dynamicism

So far we have assumed that the list of addresses to be delivered to is given. This is of course not true: new deliveries will need to be scheduled continuously.

Exercise 46.9. Implement a scenario where every day a random number of new deliveries is added to the list. Explore strategies and design choices.

46.7 Sources used in this chapter

Chapter 47

High performance linear algebra

Linear algebra operations such as the matrix-matrix product are easy to code in a naive way. However, this does not lead to high performance. In these exercises you will explore the basics of a strategy for high performance.

47.1 Mathematical preliminaries

The matrix-matrix product $C \leftarrow A \cdot B$ is defined as

$$\forall_{ij} : c_{ij} \leftarrow \sum_k a_{ik} b_{kj}.$$

Straightforward code for this would be:

```
|| for (i=0; i<a.m; i++)
||   for (j=0; j<b.n; j++)
||     s = 0;
||     for (k=0; k<a.n; k++)
||       s += a[i,k] * b[k,j];
||     c[i,j] = s;
```

However, this is not the only way to code this operation. The loops can be permuted, giving a total of six implementations.

Exercise 47.1. Code one of the permuted algorithms and test its correctness. If the reference algorithm above can be said to be ‘inner-product based’, how would you describe your variant?

Yet another implementation is based on a block partitioning. Let A, B, C be split on 2×2 block form:

$$A = \begin{pmatrix} A_{11} & A_{12} \\ A_{21} & A_{22} \end{pmatrix}, \quad B = \begin{pmatrix} B_{11} & B_{12} \\ B_{21} & B_{22} \end{pmatrix}, \quad C = \begin{pmatrix} C_{11} & C_{12} \\ C_{21} & C_{22} \end{pmatrix}$$

Then

$$\begin{aligned} C_{11} &= A_{11}B_{11} + A_{12}B_{21}, \\ C_{12} &= A_{11}B_{12} + A_{12}B_{22}, \\ C_{21} &= A_{21}B_{11} + A_{22}B_{21}, \\ C_{22} &= A_{21}B_{12} + A_{22}B_{22} \end{aligned} \tag{47.1}$$

(Convince yourself that this actually computes the same product $C = A \cdot B$.)

47.2 Matrix storage

The simplest way to store an $M \times N$ matrix is as an array of length MN . Inside this array we can decide to store the rows end-to-end, or the columns. Historically, linear algebra software has used columnwise storage, meaning that the location of an element (i, j) is computed as $j + i \cdot M$ (we will use zero-based indexing throughout this project, both for code and mathematical expressions.)

Above, you saw the idea of block algorithms, which requires taking submatrices. For efficiency, we don't want to copy elements into a new array, so we want the submatrix to correspond to a subarray.

Now we have a problem: only a submatrix that consists of a sequence of columns is contiguous. For this reason, linear algebra software treats each matrix like a submatrix, described by three parameters M, N, LDA , where 'LDA' stands for 'leading dimension of A ' (see Basic Linear Algebra Subprograms (BLAS) [8], and Lapack [1]). This is illustrated in figure 47.1.

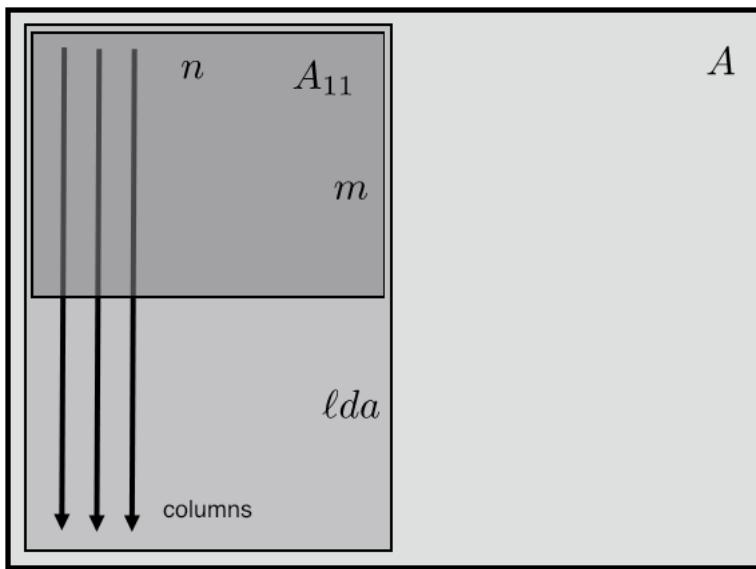


Figure 47.1: Submatrix out of a matrix, with m, n, lda of the submatrix indicated

Exercise 47.2. In terms of M, N, LDA , what is the location of the (i, j) element?

Implementationwise we also have a problem. If we use `std::vector` for storage, it is not possible to take subarrays, since C++ insists that a vector has its own storage. The solution is to use `span`; section 11.8.5.

We could have two types of matrices: top level matrices that store a `vector<double>`, and submatrices that store a `span<double>`, but that is a lot of complication. It could be done using `std::variant` (section 23.5.3), but let's not.

Instead, let's adopt the following idiom, where we create a vector at the top level, and then create matrices from its memory.

```
// example values for M,LDA,N
M = 2; LDA = M+2; N = 3;
// create a vector to contain the data
vector<double> one_data(LDA*N, 1.);
// create a matrix using the vector data
Matrix one(M, LDA, N, one_data.data());
```

(If you have not previously programmed in C, you need to get used to the `double*` mechanism. Read up on section 11.8.2.)

Exercise 47.3. Start implementing the `Matrix` class with a constructor

```
|| Matrix::Matrix(int m, int lda, int n, double *data)
```

and private data members:

```
|| private:
||     int m, n, lda;
||     span<double> data;
```

Write a method

```
|| double& Matrix::at(int i, int j);
```

that you can use as a safe way of accessing elements.

Let's start with simple operations.

Exercise 47.4. Write a method for adding matrices. Test it on matrices that have the same M, N , but different LDA .

Use of the `at` method is great for debugging, but it is not efficient. Use the preprocessor (chapter 20) to introduce alternatives:

```
|| #ifdef DEBUG
||     c.at(i, j) += a.at(i, k) * b.at(k, j)
|| #else
||     cdata[ /* expression with i, j */ ] += adata[ ... ] * bdata[ ... ]
|| #endif
```

where you access the data directly with

```
|| auto get_double_data() {
||     double *adata;
||     adata = data.data();
||     return adata;
|| };
```

Exercise 47.5. Implement this. Use a cpp `#define` macro for the optimized indexing expression. (See section 20.2.)

47.2.1 Submatrices

Next we need to support constructing actual submatrices. Since we will mostly aim for decomposition in 2×2 block form, it is enough to write four methods:

```
|| Matrix Left(int j);
|| Matrix Right(int j);
|| Matrix Top(int i);
|| Matrix Bot(int i);
```

where, for instance, `Left(5)` gives the columns with $j < 5$.

Exercise 47.6. Implement these methods and test them.

47.3 Multiplication

You can now write a first multiplication routine, for instance with a prototype

```
|| void Matrix::MatMult( Matrix& other, Matrix& out );
```

Alternatively, you could write

```
|| Matrix Matrix::MatMult( Matrix& other );
```

but we want to keep the amount of creation/destruction of objects to a minimum.

47.3.1 One level of blocking

Next, write

```
|| void Matrix::BlockedMatMult( Matrix& other, Matrix& out );
```

which uses the 2×2 form above.

47.3.2 Recursive blocking

The final step is to make the blocking recursive.

Exercise 47.7. Write a method

```
|| void RecursiveMatMult( Matrix& other, Matrix& out );
```

which

- Executes the 2×2 block product, using again `RecursiveMatMult` for the blocks.
- When the block is small enough, use the regular `MatMult` product.

47.4 Performance issues

If you experiment a little with the cutoff between the regular and recursive matrix-matrix product, you see that you can get good factor of performance improvement. Why is this?

The matrix-matrix product is a basic operation in scientific computations, and much effort has been put into optimizing it. One interesting fact is that it is just about the most optimizable operation under the sun. The reason for this is, in a nutshell, that it involves $O(N^3)$ operations on $O(N^2)$ data. This means that, in principle each element fetched will be used multiple times, thereby overcoming the *memory bottleneck*.

Exercise 47.8. Read up on cache memory, and argue that the naive matrix-matrix product implementation is unlikely actually to reuse data.

Explain why the recursive strategy does lead to data reuse.

Above, you set a cutoff point for when to switch from the recursive to the regular product.

Exercise 47.9. Argue that continuing to recurse will not have much benefit once the product is contained in the cache. What are the cache sizes of your processor?

Do experiments with various cutoff points. Can you relate this to the cache sizes?

47.4.1 Parallelism (optional)

The four clauses of equation 47.1 target independent areas in the C matrix, so they could be executed in parallel on any processor that has at least four cores.

Explore the OpenMP library to parallelize the `BlockedMatMult`.

47.4.2 Comparison (optional)

The final question is: how close are you getting to the best possible speed? Unfortunately you are still a way off. You can explore that as follows.

Your computer is likely to have an optimized implementation, accessible through:

```
#include <cblas.h>

cblas_dgemm
( CblasColMajor, CblasNoTrans, CblasNoTrans,
  m, other.n, n, alpha, adata, lda,
  bdata, other lda,
  beta, cdata, out.lda);
```

which computes $C \leftarrow \alpha A \cdot B + \beta C$.

Exercise 47.10. Use another cpp conditional to implement `MatMult` through a call to `cblas_dgemm`.

What performance do you now get?

You see that your recursive implementation is faster than the naive one, but not nearly as fast as the CBlas one. This is because

- the CBlas implementation is probably based on an entirely different strategy [7], and
- it probably involves a certain amount of assembly coding.

Chapter 48

Memory allocation

This project is not yet ready

<https://www.youtube.com/watch?v=R3cBbvIFqFk>

Monotonic allocator

- base and free pointer,
- always allocate from the free location
- only release when everything has been freed.

appropriate:

- video processing: release everything used for one frame
- event processing: release everything used for handling the event

Stack allocator

Chapter 49

DNA Sequencing

In this set of exercises you will write mechanisms for DNA sequencing.

49.1 Basic functions

Refer to section [23.4](#).

First we set up some basic mechanisms.

Exercise 49.1. There are four bases, A, C, G, T, and each has a complement: A \leftrightarrow T, C \leftrightarrow G.

Implement this through a map, and write a function

```
char BaseComplement(char);
```

Exercise 49.2. Write code to read a *Fasta* file into a `string`. The first line, starting with `>`, is a comment; all other lines should be concatenated into a single string denoting the genome.

Read the virus genome in the file `lambda_virus.fa`.

Count the four bases in the genome two different ways. First use a map. Time how long this takes. Then do the same thing using an array of length four, and a conditional statement.

Bonus: try to come up with a faster way of counting. Use a vector of length 4, and find a way of computing the index directly from the letters A, C, G, T. Hint: research ascii codes and possibly bit operations.

A ‘read’ is a short fragment of DNA, that we want to match against a genome. We first explore a naive matching algorithm: for each location in the genome, see if the read matches up.

```
ATACTGACCAAGAACGTGATTACTTCATGCAGCGTTACCAT
ACCAAGAACGTG
^ mismatch
```

```
ATACTGACCAAGAACGTGATTACTTCATGCAGCGTTACCAT
ACCAAGAACGTG
total match
```

Exercise 49.3. Code up the naive algorithm for matching a read. Test it on fake reads obtained by copying a substring from the genome. Use the genome in `phix.fa`.

Now read the *Fastq* file `ERR266411_1.first1000.fastq`. Fastq files contains groups of four lines: the second line in each group contains the reads. How many of these reads are matched to the genome?

Reads are not necessarily a perfect match; in fact, each fourth line in the fastq file gives an indication of the ‘quality’ of the corresponding read. How many matches do you get if you take a substring of the first 30 or so characters of each read?

Chapter 50

Cryptography

50.1 Basic ideas

https://simple.wikipedia.org/wiki/RSA_algorithm

https://simple.wikipedia.org/wiki/Exponentiation_by_squaring

Chapter 51

Climate change

The climate has changed and it is always changing.

Raj Shah, White House Principal Deputy Press Secretary

The statement that climate always changes is far from a rigorous scientific claim. We can attach a meaning to it, if we interpret it as a statement about the statistical behaviour of the climate, in this case as measured by average global temperature. In this project you will work with real temperature data, and do some simple analysis on it. (The inspiration for this project came from [9].)

Ideally, we would use data sets from various measuring stations around the world. Fortran is then a great language because of its array operations (see chapter 36): you can process all independent measurements in a single line. To keep things simple we will use a single data file here that contains data for each month in a time period 1880–2018. We will then use the individual months as ‘pretend’ independent measurements.

51.1 Reading the data

In the repository you find two text files

`GLB.Ts+dsst.txt` `GLB.Ts.txt`

that contain temperature deviations from the 1951–1980 average. Deviations are given for each month of each year 1880–2018. These data files and more can be found at <https://data.giss.nasa.gov/gistemp/>.

Exercise 51.1. Start by making a listing of the available years, and an array `monthly_deviation` of size $12 \times \text{nyears}$, where `nyears` is the number of full years in the file. Use formats and array notation.

The text files contain lines that do not concern you. Do you filter them out in your program, or are you using a shell script? Hint: a judicious use of `grep` will make the Fortran code much easier.

51.2 Statistical hypothesis

We assume that Mr Shah was really saying that climate has a ‘stationary distribution’, meaning that highs and lows have a probability distribution that is independent of time. This means that in n data points,

each point has a chance of $1/n$ to be a record high. Since over $n + 1$ years each year has a chance of $1/(n + 1)$, the $n + 1$ st year has a chance $1/(n + 1)$ of being a record.

We conclude that, as a function of n , the chance of a record high (or low, but let's stick with highs) goes down as $1/n$, and that the gap between successive highs is approximately a linear function of the year¹.

This is something we can test.

Exercise 51.2. Make an array `previous_record` of the same shape as `monthly_deviation`.

This array records (for each month, which, remember, we treat like independent measurements) whether that year was a record, or, if not, when the previous record occurred:

$$\text{PrevRec}(m, y) = \begin{cases} y & \text{if } \text{MonDev}(m, y) = \max_{m'}(\text{MonDev}(m', y)) \\ y' & \text{if } \text{MonDev}(m, y) < \text{MonDev}(m, y') \\ & \text{and } \text{MonDev}(m, y') = \max_{m'' < m'}(\text{MonDev}(m'', y)) \end{cases}$$

Again, use array notation. This is also a great place to use the `Where` clause.

Exercise 51.3. Now take each month, and find the gaps between records. This gives you two arrays: `gapyears` for the years where a gap between record highs starts, and `gapsizes` for the length of that gap.

This function, since it is applied individually to each month, uses no array notation.

The hypothesis is now that the `gapsizes` are a linear function of the year, for instance measured as distance from the starting year. Of course they are not exactly a linear function, but maybe we can fit a linear function through it by *linear regression*.

Exercise 51.4. Copy the code from <http://www.aip.de/groups/soe/local/numres/bookfpdf/f15-2.pdf> and adapt for our purposes: find the best fit for the slope and intercept for a linear function describing the gaps between records.

You'll find that the gaps are decidedly not linearly increasing. So is this negative result the end of the story, or can we do more?

Exercise 51.5. Can you turn this exercise into a test of global warming? Can you interpret the deviations as the sum of a yearly increase in temperature plus a stationary distribution, rather than a stationary distribution by itself?

1. Technically, we are dealing with a uniform distribution of temperatures, which makes the maxima and minima have a beta-distribution.

PART V

ADVANCED TOPICS

Chapter 52

Programming strategies

52.1 A philosophy of programming

Code for the reader, not the writer

Yes, your code will be executed by the computer, but:

- You need to be able to understand your code a month or year from now.
- Someone else may need to understand your code.
- ⇒ make your code readable, not just efficient

High level and low level

- Don't waste time on making your code efficient, until you know that that time will actually pay off.
- Knuth: 'premature optimization is the root of all evil'.
- ⇒ first make your code correct, then worry about efficiency

Abstraction

- Variables, functions, objects, form a new 'language':
code in the language of the application.
- ⇒ your code should look like it talks about the application, not about memory.
- Levels of abstraction: implementation of a language should not be visible on the use level of that language.

52.2 Programming: top-down versus bottom up

The exercises in chapter 41 were in order of increasing complexity. You can imagine writing a program that way, which is formally known as *bottom-up* programming.

However, to write a sophisticated program this way you really need to have an overall conception of the structure of the whole program.

Maybe it makes more sense to go about it the other way: start with the highest level description and gradually refine it to the lowest level building blocks. This is known as *top-down* programming.

<https://www.cs.fsu.edu/~myers/c++/notes/stepwise.html>

Example:

Run a simulation

becomes

Run a simulation:

 Set up data and parameters

 Until convergence:

 Do a time step

becomes

Run a simulation:

 Set up data and parameters:

 Allocate data structures

 Set all values

 Until convergence:

 Do a time step:

 Calculate Jacobian

 Compute time step

 Update

You could do these refinement steps on paper and wind up with the finished program, but every step that is refined could also be a subprogram.

We already did some top-down programming, when the prime number exercises asked you to write functions and classes to implement a given program structure; see for instance exercise 41.8.

A problem with top-down programming is that you can not start testing until you have made your way down to the basic bits of code. With bottom-up it's easier to start testing. Which brings us to...

52.2.1 Worked out example

Take a look at exercise 6.10. We will solve this in steps.

1. State the problem:

```
// find the longest sequence
```

2. Refine by introducing a loop

```
// find the longest sequence:
```

```
// Try all starting points
```

```
// If it gives a longer sequence report
```

3. Introduce the actual loop:

```
// Try all starting points
```

```
for (int starting=2; starting<1000; starting++) {
```

```
// If it gives a longer sequence report
```

```
}
```

4. Record the length:

```
// Try all starting points
```

```
int maximum_length=-1;
```

```
for (int starting=2; starting<1000; starting++) {
    // If the sequence from 'start' gives a longer sequence report:
    int length=0;
    // compute the sequence from 'start'
    if (length>maximum_length) {
        // Report this sequence as the longest
    }
}
```

5. Refine computing the sequence:

```
// compute the sequence from 'start'
int current=starting;
while (current!=1) {
    // update current value
    length++;
}
```

6. Refine the update of the current value:

```
// update current value
if (current%2==0)
    current /= 2;
else
    current = 3*current+1;
```

52.3 Coding style

After you write your code there is the issue of *code maintainance*: you may in the future have to update your code or fix something. You may even have to fix someone else's code or someone will have to work on your code. So it's a good idea to code cleanly.

Naming Use meaningful variable names: `record_number` instead `rn` or `n`. This is sometimes called 'self-documenting code'.

Comments Insert comments to explain non-trivial parts of code.

Reuse Do not write the same bit of code twice: use macros, functions, classes.

52.4 Documentation

Take a look at Doxygen.

52.5 Testing

If you write your program modularly, it is easy (or at least: easier) to test the components without having to wait for an all-or-nothing test of the whole program. In an extreme form of this you would write your

code by *test-driven development*: for each part of the program you would first write the test that it would satisfy.

In a more moderate approach you would use *unit testing*: you write a test for each program bit, from the lowest to the highest level.

And always remember the old truism that ‘by testing you can only prove the presence of errors, never the absence.

52.6 Best practices: C++ Core Guidelines

The C++ language is big, and some combinations of features are not advisable. Around 2015 a number of *Core Guidelines* were drawn up that will greatly increase code quality. Note that this is not about performance: the guidelines have basically no performance implications, but lead to better code.

For instance, the guidelines recommend to use default values as much as possible when dealing with multiple constructors:

```
class Point { // not this way
private:
    double d;
public:
    Point( double x, double y, double fudge ) {
        auto d = ( x*x + y*y ) * (1+fudge); };
    Point( double x, double y ) {
        auto d = ( x*x + y*y ); };
};
```

This is bad because of code duplication. Slightly better:

```
class Point { // not this way
private:
    double d;
public:
    Point( double x, double y, double fudge ) {
        auto d = ( x*x + y*y ) * (1+fudge); };
    Point( double x, double y ) : Point(x,y,0.) {};
};
```

which wastes a couple of cycles if fudge is zero. Best:

```
class Point { // not this way
private:
    double d;
public:
    Point( double x, double y, double fudge=0. ) {
        auto d = ( x*x + y*y ) * (1+fudge); };
};
```

Chapter 53

Tiniest of introductions to algorithms and data structures

53.1 Data structures

The main data structure you have seen so far is the array. In this section we briefly sketch some more complicated data structures.

53.1.1 Stack

A *stack* is a data structure that is a bit like an array, except that you can only see the last element:

- You can inspect the last element;
- You can remove the last element; and
- You can add a new element that then becomes the last element; the previous last element becomes invisible: it becomes visible again as the last element if the new last element is removed.

The actions of adding and removing the last element are known as *push* and *pop* respectively.

Exercise 53.1. Write a class that implements a stack of integers. It should have methods

```
void push(int value);  
int pop();
```

53.1.2 Linked lists

Before doing this section, make sure you study section 15.

Arrays are not flexible: you can not insert an element in the middle. Instead:

- Allocate a larger array,
- copy data over (with insertion),
- delete old array storage

This is expensive. (It's what happens in a C++ `vector`; section 11.3.2.)

If you need to do lots of insertions, make a *linked list*. The basic data structure is a `Node`, which contains

1. Information, which can be anything; and
2. A pointer (sometimes called ‘link’) to the next node. If there is no next node, the pointer will be *null*. Every language has its own way of denoting a *null pointer*; C++ has the `nullptr`, while C uses the `NULL` which is no more than a synonym for the value zero.

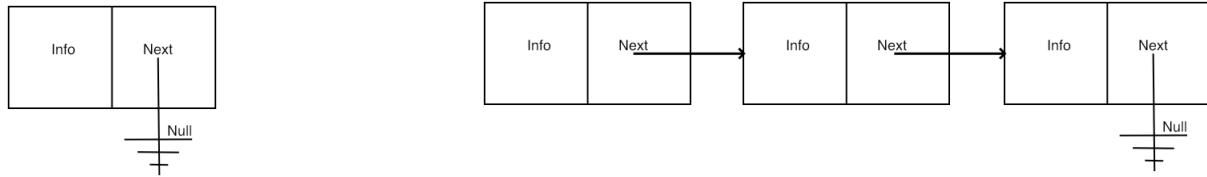


Figure 53.1: Node data structure and linked list of nodes

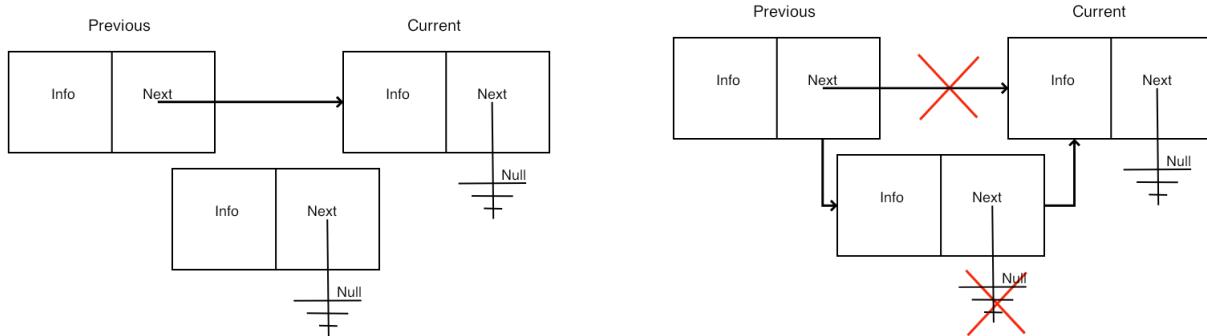


Figure 53.2: Insertion in a linked list

We illustrate this in figure 53.1.

Our main concern will be to implement operations that report some statistic of the list, such as its length, that test for the presence of information in the list, or that alter the list, for instance by inserting a new node. See figure 53.2.

53.1.2.1 Data definitions

In C++ you have a choice of pointer types. Conceptually we can say that the list object owns the first node, and each node owns the next. Therefore we use the `unique_ptr`; however, you can also use `shared_ptr` throughout, at slight overhead cost.

We declare the basic classes.

Definition of List class

A linked list has as its only member a pointer to a node:

```
|| class List {
| private:
|   unique_ptr<Node> head{nullptr};
| public:
|   List() {};
```

Initially null for empty list.

Definition of Node class

A node has information fields, and a link to another node:

```
|| class Node {
|   friend class List;
| private:
```

```

    int datavalue{0}, datacount{0};
    unique_ptr<Node> next=nullptr;
public:
    friend class List;
    Node() {}
    Node(int value,unique_ptr<Node> tail=nullptr)
        : datavalue(value), datacount(1), next(move(tail)) {};
    ~Node() { cout << "deleting node " << datavalue << endl; };

```

A Null pointer indicates the tail of the list.

53.1.2.2 Simple functions

For many algorithms we have the choice between an iterative and a recursive version. The recursive version is easier to formulate, but the iterative solution is probably more efficient.

Recursive computation of the list length

```

int recursive_length() {
    if (head==nullptr)
        return 0;
    else
        return head->listlength();
};

int listlength_recursive() {
    if (!has_next()) return 1;
    else return 1+next->listlength();
};

```

The structure of an iterative version is intuitively clear: we have a pointer that goes down the list, incrementing a counter at every step. There is one complication: with C++ smart pointers, the variable that contains the current element can not be a unique pointer.

Iterative computation of the list length

Use a *bare pointer*, which is appropriate here because it doesn't own the node.

```

int listlength_iterative() {
    int count = 0;
    Node *current_node = head.get();
    while (current_node!=nullptr) {
        current_node = current_node->next.get(); count += 1;
    }
    return count;
};

```

(You will get a compiler error if you try to make `current_node` a smart pointer: you can not copy a unique pointer.)

Exercise 53.2. Write a function

```
bool List::contains_value(int v);
```

to test whether a value is present in the list.

Try both recursive and iterative.

53.1.2.3 Modification functions

The interesting methods are of course those that alter the list. Inserting a new value in the list has basically two cases:

1. If the list is empty, create a new node, and set the head of the list to that node.
2. If the list is not empty, we have several more cases, depending on whether the value goes at the head of the list, the tail, somewhere in the middle. And we need to check whether the value is already in the list.

Our choice of using unique pointers dictates a certain design.


Insert routine design

We will write functions

```
void List::insert(int value);
void Node::insert(int value);
```

that add the value to the list. The `List::insert` value can put a new node in front of the first one; the `Node::insert` assumes the the value is on the current node, or gets inserted after it.


There are a lot of cases here. You can try this by an approach called Test-Driven Development (TDD): first you decide on a test, then you write the code that covers that case.



Step 1: dealing with an empty list

Exercise 53.3. Write a `List::length` method, so that this code gives the right output:

```
|| List mylist;
|| cout << "Empty list has length: "
||     << mylist.listlength_iterative() << endl;
|| cout << endl;
```

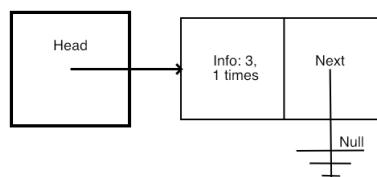

Step 2: insert the first element


Exercise 53.4. Next write the case of `Node::insert` that handles the empty list. You also need a method `List::contains` that tests if an item is in the list.

```
|| mylist.insert(3);
|| cout << "After one insertion the length is: "
||     << mylist.listlength_iterative() << endl;
|| if (mylist.contains_value(3))
||     cout << "Indeed: contains 3" << endl;
|| else
||     cout << "Hm. Should contain 3" << endl;
```

```

if (mylist.contains_value(4))
    cout << "Hm. Should not contain 4" << endl;
else
    cout << "Indeed: does not contain 4" << endl;
cout << endl;

```

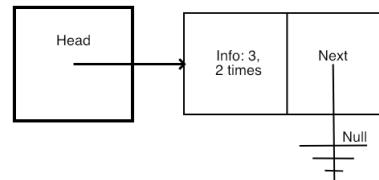


Step 3: inserting an element that already exists

Exercise 53.5. Inserting a value that is already in the list means that the `count` value of a node needs to be increased. Update your `insert` method to make this code work:

```

mylist.insert(3);
cout << "Inserting the same item gives length: "
     << mylist.listlength_iterative() << endl;
if (mylist.contains_value(3)) {
    cout << "Indeed: contains 3" << endl;
    auto headnode = mylist.headnode();
    cout << "head node has value " << headnode->value()
        << " and count " << headnode->count() << endl;
} else
    cout << "Hm. Should contain 3" << endl;
cout << endl;

```

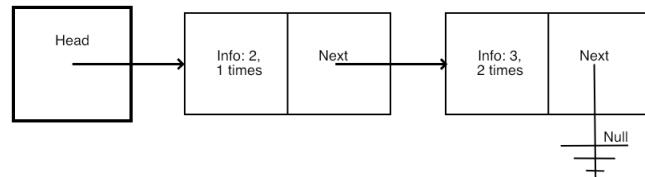

Step 4: inserting an element before another


Exercise 53.6. One of the remaining cases is inserting an element that goes at the head.

Update your `insert` method to get this to work:

```

mylist.insert(2);
cout << "Inserting 2 goes at the head; now the length is: "
     << mylist.listlength_iterative() << endl;
if (mylist.contains_value(2))
    cout << "Indeed: contains 2" << endl;
else
    cout << "Hm. Should contain 2" << endl;
if (mylist.contains_value(3))
    cout << "Indeed: contains 3" << endl;
else
    cout << "Hm. Should contain 3" << endl;
cout << endl;

```

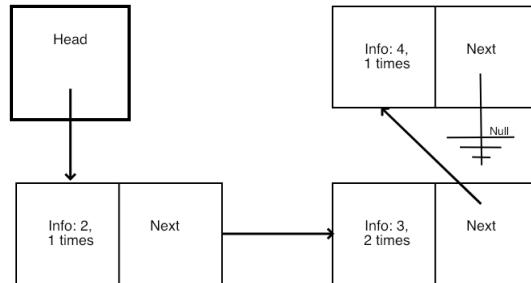

Step 5: inserting an element at the end

Exercise 53.7. Finally, if an item goes at the end of the list:

```

mylist.insert(4);
cout << "Inserting 4 goes at the tail; now the length is: "
     << mylist.listlength_iterative() << endl;
if (mylist.contains_value(4))
    cout << "Indeed: contains 4" << endl;
else
    cout << "Hm. Should contain 4" << endl;
if (mylist.contains_value(3))
    cout << "Indeed: contains 3" << endl;
else
    cout << "Hm. Should contain 3" << endl;
cout << endl;

```

53.1.3 Trees

Before doing this section, make sure you study section 15.

A tree can be defined recursively:

- A tree is empty, or
- a tree is a node with some number of children trees.

Let's design a tree that stores and counts integers: each node has a label, namely an integer, and a count value that records how often we have seen that integer.

Our basic data structure is the node, and we define it recursively to have up to two children. This is a problem: you can not write

```

class Node {
private:
    Node left, right;
}

```

because that would recursively need infinite memory. So instead we use pointers.

```

class Node {
private:
    int key{0}, count{0};
    shared_ptr<Node> left, right;
    bool hasleft{false}, hasright{false};
public:
    Node() {}
    Node(int i, int init=1) { key = i; count = 1; }
    void addleft( int value) {

```

```

    left = make_shared<Node>(value);
    hasleft = true;
};

void addright( int value ) {
    right = make_shared<Node>(value);
    hasright = true;
};
/* ... */
};

```

and we record that we have seen the integer zero zero times.

Algorithms on a tree are typically recursive. For instance, the total number of nodes is computed from the root. At any given node, the number of nodes of that attached subtree is one plus the number of nodes of the left and right subtrees.

```

int number_of_nodes() {
    int count = 1;
    if (hasleft)
        count += left->number_of_nodes();
    if (hasright)
        count += right->number_of_nodes();
    return count;
};

```

Likewise, the depth of a tree is computed as a recursive max over the left and right subtrees:

```

int depth() {
    int d = 1, dl=0, dr=0;
    if (hasleft)
        dl = left->depth();
    if (hasright)
        dr = right->depth();
    d = max(d+dl, d+dr);
    return d;
};

```

Now we need to consider how actually to insert nodes. We write a function that inserts an item at a node. If the key of that node is the item, we increase the value of the counter. Otherwise we determine whether to add the item in the left or right subtree. If no such subtree exists, we create it; otherwise we descend in the appropriate subtree, and do a recursive insert call.

```

void insert(int value) {
    if (key==value)
        count++;
    else if (value<key) {
        if (hasleft)
            left->insert(value);
        else
            addleft(value);
    } else if (value>key) {
        if (hasright)
            right->insert(value);
        else
            addright(value);
    } else throw(1); // should not happen
};

```

53.2 Algorithms

This *really really* goes beyond this book.

- Simple ones: numerical
- Connected to a data structure: search

53.2.1 Sorting

Unlike the tree algorithms above, which used a non-obvious data structure, sorting algorithms are a good example of the combination of very simple data structures (mostly just an array), and sophisticated analysis of the algorithm behaviour. We very briefly discuss two algorithms.

53.2.1.1 Bubble sort

An array a of length n is sorted if

$$\forall_{i < n-1} : a_i \leq a_{i+1}.$$

A simple sorting algorithm suggests itself immediately: if i is such that $a_i > a_{i+1}$, then reverse the i and $i + 1$ locations in the array.

```
void swapij( vector<int> &array, int i ) {
    int t = array[i];
    array[i] = array[i+1];
    array[i+1] = t;
}
```

(Why is the array argument passed by reference?)

If you go through the array once, swapping elements, the result is not sorted, but at least the largest element is at the end. You can now do another pass, putting the next-largest element in place, and so on.

This algorithm is known as *bubble sort*. It is generally not considered a good algorithm, because it has a time complexity (section 54.1.1) of $n^2/2$ swap operations. Sorting can be shown to need $O(n \log n)$ operations, and bubble sort is far above this limit.

53.2.1.2 Quicksort

A popular algorithm that can attain the optimal complexity (but need not; see below) is *quicksort*:

- Find an element, called the pivot, that is approximately equal to the median value.
- Rearrange the array elements to give three sets, consecutively stored: all elements less than, equal, and greater than the pivot respectively.
- Apply the quicksort algorithm to the first and third subarrays.

This algorithm is best programmed recursively, and you can even make a case for its parallel execution: every time you find a pivot you can double the number of active processors.

Exercise 53.8. Suppose that, by bad luck, your pivot turns out to be the smallest array element every time. What is the time complexity of the resulting algorithm?

53.3 Programming techniques

53.3.1 Memoization

In section 7.5 you saw some examples of recursion. The factorial example could be written in a loop, and there are both arguments for and against doing so.

The Fibonacci example is more subtle: it can not immediately be converted to an iterative formulation, but there is a clear need for eliminating some waste that comes with the simple recursive formulation. The technique we can use for this is known as *memoization*: store intermediate results to prevent them from being recomputed.

Here is an outline.

```
int fibonacci(int n) {
    vector<int> fibo_values(n);
    for (int i=0; i<n; i++)
        fibo_values[i] = 0;
    fibonacci_memoized(fibo_values, n-1);
    return fibo_values[n-1];
}
int fibonacci_memoized( vector<int> &values, int top ) {
    int minus1 = top-1, minus2 = top-2;
    if (top<2)
        return 1;
    if (values[minus1]==0)
        values[minus1] = fibonacci_memoized(values, minus1);
    if (values[minus2]==0)
        values[minus2] = fibonacci_memoized(values, minus2);
    values[top] = values[minus1]+values[minus2];
    //cout << "set f(" << top << ") to " << values[top] << endl;
    return values[top];
}
```


Chapter 54

Complexity

54.1 Order of complexity

54.1.1 Time complexity

Exercise 54.1. For each number n from 1 to 100, print the sum of all numbers 1 through n .

There are several possible solutions to this exercise. Let's assume you don't know the formula for the sum of the numbers $1 \dots n$. You can have a solution that keeps a running sum, and a solution with an inner loop.

Exercise 54.2. How many operations, as a function of n , are performed in these two solutions?

54.1.2 Space complexity

Exercise 54.3. Read numbers that the user inputs; when the user inputs zero or negative, stop reading. Add up all the positive numbers and print their average.

This exercise can be solved by storing the numbers in a `std::vector`, but one can also keep a running sum and count.

Exercise 54.4. How much space do the two solutions require?

PART VI

INDEX AND SUCH

Chapter 55

Index

#ifndef, 241
#define, 239, 413
#ifdef, 241
#ifndef, 241
#once, 241
#pack, 241
__FILE__, 250
__LINE__, 250

Abs (Fortran keyword), 354
abs, 44
abstraction, 65
advance (Fortran keyword), 365
algorithm, 44, 112, 260, 277
all (Fortran keyword), 355
all_of, 260
allocate (Fortran keyword), 353

Amazon
 delivery truck, 405
 prime, 405, 410

Amazon Prime, 29

any (Fortran keyword), 355
any_of, 260, 275, 277

Apple, 25

argument
 actual, 327
 default, 75
 dummy, 327

array, 129
 associative, 254
 assumed-shape, 352
 automatic, 347, 352
 bounds
 checking, 130
 index, 130

initialization, 130, 348
rank, 349
static, 347
subscript, 130

array, 144
assert, 248
assignment, 38
Associated (Fortran keyword), 363

asterisk
 in Fortran formatted I/O, 368

auto, 131, 285
auto_ptr, 284, 285

bad_alloc, 250
bad_exception, 250
basic_ios, 174
begin, 274
bit_size (Fortran keyword), 307
Boost, 161
bottom-up, 427
break, 59
bubble sort, 145, 438
bug, 18

C
 parameter passing, 209–212
 pointer, 205–212, 294
 preprocessor, 303
 string, 161, 294

C preprocessor, see preprocessor

C++, 283
 20, 250
 C++11, 221, 276, 285
 C++14, 45, 221, 285
 C++17, 35, 53, 161, 221, 257, 259, 285

C++20, 144, 221, 244, 286
C++98, 284
Core Guidelines, 430
standard, 144
`c_sizeof` (Fortran keyword), 307
Caesar cypher, 159
calendars, 286
`call` (Fortran keyword), 324
call-back, 281
calling environment, 183
capture, 276
case sensitive, 37
cast, 43, 278
 lexical, 161
`cblas_dgemm`, 415
`cerr`, 173, 293
`char`, 157
Character (Fortran keyword), 306
`charconv`, 161
`cin`, 39, 42, 293
`clang++`, 33
class
 abstract, 108
 base, 106
 derived, 106
 iteratable, 273
class (Fortran keyword), 344
`Close` (Fortran keyword), 367, 370
closure, 83
`cmath`, 42, 44, 276
code
 duplication, 67
 maintainance, 429
code duplication, 65
code reuse, 67
Collatz conjecture, 62
column-major, 350, 368
Common (Fortran keyword), 322
compilation
 separate, 230, 340, 392
compile-time constant, 347
compiler, 26, 33
 and preprocessor, 239
 one pass, 69
compiling, 26
`Complex` (Fortran keyword), 306
complex numbers, 39, 253
concept, 245
concepts, 286
conditional, 49
connected components, see graph, connected
const
 reference, 215
`const`, 215, 217, 221
`const_cast`, 220, 281
`constexpr`, 221, 221, 285
constructor, 98, 199, 295
 copy, 112, 216
 range, 293
container, 253
`Contains` (Fortran keyword), 322, 323
contains
 for class functions, 343
 in modules, 340
contains (Fortran keyword), 329
continuation character, 305
`continue`, 60
coroutines, 286
`cout`, 41, 293
`Cshift` (Fortran keyword), 354
datatype, 36
`deallocate` (Fortran keyword), 353
debugger, 251
`decltype`, 273
define, see `#pragma define`, see `#pragma define`
definition vs use, 81
`delete`, 285
dereference, 206
derefencing, 141
destructor, 85, 113
 at end of scope, 84
`DIM` (Fortran keyword), 354
dimension (Fortran keyword), 347
do
 concurrent, 61
`do` (Fortran keyword), 317
do concurrent, 356
do loop
 implicit, 368
 and array initialization, 348

implied, 318
Dot_Product (Fortran keyword), 354
dynamic
 programming, 403
dynamic_cast, 279
efficiency gap, 404
Eigen, 139
emacs, 25, 25, 35, 304
encoding
 extendible, 161
end, 274, 304
endl, 172
EOF, 174
eof, 174
erase, 255
errno, 250
error
 compile-time, 36
 run-time, 36
 syntax, 36
exception
 catch, 248
 throwing, 248
exception, 250
executable, 26, 34, 340
exit, 318
expression, 38
extent
 of array dimension, 351
external (Fortran keyword), 329
F90, 303
false, 40, 42
Fasta, 419
Fastq, 420
file
 binary, 33, 36
 executable, 230
 handle, 113
 include, 97
 object, 230, 340
 source, 33
floating point, 40
flush, 172
fmtlib, 293
for
 indexed, 132
 range-based, 131
for_each, 260
forall (Fortran keyword), 356
Format (Fortran keyword), 367
Fortran
 90, 303
 case ignores, 304
 comments, 305
 forward declaration, 229
 of classes, 83
 of functions, 83
 friend, 109
 from_chars, 161
function, 65, 325, 325
 argument, 68
 arguments, 68
 body, 68
 call, 66, 67
 defines scope, 69
 definition, 66
 header, 69
 parameter, 68
 parameters, 68
 prototype, 69
 result type, 68
 standard, 69
function, 276
function try block, 249
functional programming, 70, 183
functor, 112

g++, 33
gdb, 251
gerrymandering, 399
get, 195
get_if, 259
getline, 173, 174
gfortran, 304
glyph, 161
GNU, 33
Goldbach conjecture, 381
Google, 395
graph
 connected, 396
 diameter, 397

greedy search, see search, greedy
has-a relation, 104
has_value, 259
hdf5, 367
header, 392
header file, 231, 239
 and global variables, 233
 treatment by preprocessor, 233
 vs modules, 286
heap, 143, 144
 fragmentation, 143
hexadecimal, 205
Holmes
 Sherlock, 159
homebrew, 25
host association, 322

I/O
 formatted, 367
 list-directed, 367
 unformatted, 367

icpc, 33
icpc, 33
if, 53
if (Fortran keyword), 313
ifdef, see #pragma ifdef
ifndef, see #pragma ifndef
ifort, 304
index
 section, 348
Inf, 45, 260
inheritance, 106
initialization
 variable, 37
initializer list, 100, 130, 131
inline, 328
insert, 255
int, 40
Integer (Fortran keyword), 306
Interface (Fortran keyword), 323
interface (Fortran keyword), 326, 329, 329
intptr_t, 281
is-a relation, 106
is_eof, 174
is_open, 174
isinf, 260

isnan, 249, 260
iso_c_binding (Fortran keyword), 307
iteration
 of a loop, see loop, iteration
iterator, 140, 254, 285
iterator, 254
itoa, 160

keywords, 36
kind (Fortran keyword), 306, 307

label, 369
lambda, see closure, 281
 expression, 276
 generic, 277
 make mutable, 278

lamda
 const by default, 278

Lbound (Fortran keyword), 351
len (Fortran keyword), 335
lexicographic ordering, 58
limits, 260
limits.h, 260
linear regression, 424
linker, 230, 340
Linux, 25
list
 linked, 431–436
 in Fortran, 363–366

logging, 173
Logical (Fortran keyword), 306, 314
long, 261
long long, 261
longjmp, 250
loop, 55
 body, 55
 counter, 55
 for, 55
 header, 55
 inner, 58
 iteration, 55
 nest, 58
 outer, 58
 variable, 56
 while, 55

lvalue, 282

macports, 25
Make, 230
makefile, 231, 392
malloc, 144, 199, 208, 211, 212, 293–295
Manhattan distance, 405
map, 254
MASK (Fortran keyword), 354
MatMul (Fortran keyword), 354
max, 44
MAX_INT, 260
MaxLoc (Fortran keyword), 354
MaxVal (Fortran keyword), 354
member
 initializer list, 98
 of struct, 89
members, see object, members
memoization, 403, 439
memory
 bottleneck, 414
 leak, 113, 144, 210, 210, 353
memory leak, 194
memory leaking, 212
method, 100
 abstract, 108
 overriding, 107
methods, see object, methods
Microsoft
 Windows, 25
 Word, 18
MinLoc (Fortran keyword), 354
MinVal (Fortran keyword), 354
Module (Fortran keyword), 322, 323
module (Fortran keyword), 338
modules, 286
monostate, 259
move semantics, 283
mutable, 220, 278

namespace, 235
NaN, 45, 260
NDEBUG, 248
new, 138, 194, 196, 210–212, 285
Newton’s method, 71
noexcept, 250
NP-hard, 408
NULL, 197
NULL, 161, 431
null terminator, 294
Nullify (Fortran keyword), 363
nullptr, 197, 199, 279, 431
nullptr_t, 197
numeric_limits, 260

object
 members, 97
 methods, 97
 state of, 102
object file, see file, object
once, see #pragma once
Open (Fortran keyword), 367
open, 173
open (Fortran keyword), 370
OpenFrameworks, 284
operator
 bitwise, 51
 comparison, 51
 logic, 51
 overloading, 111
 and copies, 284
 of parentheses, 112
 precedence, 51
 short-circuit, 51
 shortcut, 42
 spaceship, 286
opt2, 408
Optional (Fortran keyword), 329
optional, 259
output
 binary, 370
 raw, 370
 unformatted, 370
override, 108

pack, see #pragma pack
package manager, 25
Pagerank, 395
parameter, see also function, parameter
 formal, 328
 input, 73
 output, 73, 257
 pass by value, 71
 passing, 70
 by reference, 183, 199, 295

by value, 183
passing by reference, 70, 72, 91
 in C, 72
passing by value, 70, 91
throughput, 73
Pascal’s triangle, 145
pass by reference, see parameter, passing by reference
pass by value, see parameter, passing by value
PETSc, 250
pointer, 115
 and heap, 143
 arithmetic, 141, 208
 bare, 196, 295, 433
 dereference, 255
 derefencing, 361
 null, 197, 431
 opaque
 in C++, 198
 smart, 144, 191
 unique, 196
 void, 281
 weak, 194, 197
pointer (Fortran keyword), 361
polymorphism, 111
pop, 431
preprocessor
 and header files, 233
 conditionals, 240–241
 macro
 parametrized, 240
 macros, 239–240
Present (Fortran keyword), 329
Print (Fortran keyword), 367
print, 367
printf, 293
private, 98, 101–103
private (Fortran keyword), 341
procedure
 internal, 322
procedure (Fortran keyword), 344
procedures
 internal, 328
 module, 328
Product (Fortran keyword), 354
program
statements, 34
programming
 dynamic, 402
 parallel, 61
protected, 106
protected (Fortran keyword), 341
prototype, 229
public, 98, 102, 103
public (Fortran keyword), 341
punch cards, 303
push, 431
 push_back, 134
putty, 25
python, 23
quicksort, 438
RAII, 294
rand, 77
RAND_MAX, 77
random
 seed, 373
random number
 generator, 76, 261
 Fortran, 373
 seed, 77
random_number (Fortran keyword), 373
random_seed (Fortran keyword), 373
range-based for loop, see for, range-based
ranges, 286
rbegin, 272
Read (Fortran keyword), 367
Real (Fortran keyword), 306
recurrence, 357
recursion, see function, recursive
 depth, 76
 mutual, 75
Recursive (Fortran keyword), 325
reduction, 255
reference, 72, 183
 argument, 199, 295
 const, 136, 183, 187
 to class member, 184
 to class member, 184
reference count, 196
regex, 256
regular expression, 256

reinterpret_cast, 278, 281
rend, 272
reserved words, 37
RESHAPE (Fortran keyword), 352
result (Fortran keyword), 325
return, 68
 code, 36
 makes copy, 187
 statement, 36
return (Fortran keyword), 324
root finding, 62
roundoff error analysis, 45
runtime error, 247
rvalue, 282
 reference, 283

Save (Fortran keyword), 322
scanf, 293
scope, 68, 81
 and stack, 143
 dynamic, 84
 in conditional branches, 52
 lexical, 81, 84
 of function body, 69
search
 greedy, 407, 408
segmentation fault, 130
select (Fortran keyword), 314
selected_int_kind (Fortran keyword), 306
selected_real_kind (Fortran keyword), 306
setjmp, 250
shape
 of array, 351
shared_ptr, 295, 432
shell
 inspect return code, 36
side-effects, 217
Single Source Shortest Path, 397
SIR model, 392
size (Fortran keyword), 351
size_t, 129, 279
sizeof, 211
smartphone, 18
source
 format
 fixed, 303
 free, 303
source code, 26
source_location, 250
span, 144, 144, 286, 293, 412
SPREAD (Fortran keyword), 352
sprintf, 160
srand, 77
stack, 76, 85, 143, 144, 353, 431
 overflow, 76, 144, 353
Standard Template Library, 253
statement functions, 328
static_cast, 279, 280
std::any, 198
stop (Fortran keyword), 304
storage_size (Fortran keyword), 307
string, 157
 concatenation, 158
 null-terminated, 161
 size, 158
 stream, 160
 string, 294
 stringstream, 160
struct
 denotation, 92
struct, 89, 257
structured binding, 258
subprogram, see function
Sum (Fortran keyword), 354
swap, 283
switch, 52, 53
syntax
 error, 247
system_clock (Fortran keyword), 373

target (Fortran keyword), 361
templates
 and separate compilation, 232
Terminal, 25
test-driven development, 430
testing, 429
text
 formatting, 286
this, 115, 196
time zones, 286
timer
 resolution, 373

to_chars, 161
to_string, 160
top-down, 427
Transpose (Fortran keyword), 354
trim (Fortran keyword), 335
true, 40, 42
tuple, 257
 denotation, 257
type
 derived, 337
type (Fortran keyword), 337
Ubound (Fortran keyword), 351
Unicode, 161
union, 259
unique_ptr, 196, 295, 432
unit, 370
unit testing, 430
Unix, 25
use (Fortran keyword), 339, 340
UTF8, 161

valgrind, 251
value, 259
value_or, 259
values
 boolean, 40
variable, 36
 assignment, 37

declaration, 37, 37
global, 233
 in header file, 233
initialization, 41
lifetime, 82
numerical, 39
shadowing, 82
static, 84, 321
variant, 259
vector, 235
 methods, 134
 subvector, 256
vector, 129, 133, 144, 256, 293, 431
vi, 25
Virtualbox, 25
Visual Studio, 25
VMware, 25
void, 69, 69

weak_ptr, 197
where (Fortran keyword), 355
while, 60
Write (Fortran keyword), 365, 367
write (Fortran keyword), 370

X windows, 25
Xcode, 25
XQuartz, 25

Chapter 56

Bibliography

- [1] E. Anderson, Z. Bai, C. Bischof, J. Demmel, J. Dongarra, J. Du Croz, A. Greenbaum, S. Hammarling, A. McKenney, and D. Sorensen. LAPACK: A portable linear algebra library for high-performance computers. In *Proceedings Supercomputing '90*, pages 2–11. IEEE Computer Society Press, Los Alamitos, California, 1990.
- [2] Roy M. Anderson and Robert M. May. Population biology of infectious diseases: Part I. *Nature*, 280:361–367, 1979. doi:10.1038/280361a0.
- [3] Satish Balay, William D. Gropp, Lois Curfman McInnes, and Barry F. Smith. Efficient management of parallelism in object oriented numerical software libraries. In E. Arge, A. M. Bruaset, and H. P. Langtangen, editors, *Modern Software Tools in Scientific Computing*, pages 163–202. Birkhäuser Press, 1997.
- [4] Satish Balay, William D. Gropp, Lois Curfman McInnes, and Barry F. Smith. PETSc webpage. <http://www.mcs.anl.gov/petsc>, 2011.
- [5] Tolga Bektas. The multiple traveling salesman problem: an overview of formulations and solution procedures. *Omega*, 34(3):209 – 219, 2006.
- [6] Yen-Lin Chen, Chuan-Yen Chiang, Yo-Ping Huang, and Shyan-Ming Yuan. A project-based curriculum for teaching c++ object-oriented programming. In *Proceedings of the 2012 9th International Conference on Ubiquitous Intelligence and Computing and 9th International Conference on Autonomic and Trusted Computing*, UIC-ATC ’12, pages 667–672, Washington, DC, USA, 2012. IEEE Computer Society.
- [7] Kazushige Goto and Robert A. van de Geijn. Anatomy of high-performance matrix multiplication. *ACM Trans. Math. Softw.*, 34(3):1–25, 2008.
- [8] C. L. Lawson, R. J. Hanson, D. R. Kincaid, and F. T. Krogh. Basic linear algebra subprograms for fortran usage. *ACM Trans. Math. Softw.*, 5(3):308–323, September 1979.
- [9] Juan M. Restrepo, , and Michael E. Mann. This is how ‘climate is always changing’. *APS Physics, GPS newsletter*, February 2018.
- [10] Lin S. and Kernighan B. An effective heuristic algorithm for the traveling salesman problem. *Operations Research*, 21:498–516, 1973.