

ECLIR Rhapsody configuration - Sanitized



ECLIR

Locker

Summary	
Sub-folder (1)	
Locker Contents	Page
 Route__ECLIR.....	Folder 2



Route__ECLIR

Folder

Full Path /ECLIR/Route__ECLIR

Summary		
Sub-folders (5)		
Folder Contents		Page
ECLIR_DR.....	Folder	3
ECLIR_Sink.....	Folder	10
ECLIR_Timer.....	Folder	15
eCR.....	Folder	22
ELR.....	Folder	156



ECLIR_DR

Folder

Full Path /ECLIR/Route__ECLIR/ECLIR_DR

Summary

Communication Points (6)

Folder Contents**Page**

ECLIR - eCR Errors In.....Dynamic Router	4
ECLIR - eCR Msgs In.....Dynamic Router	5
ECLIR - ELR Errors In.....Dynamic Router	6
ECLIR - ELR Msgs In.....Dynamic Router	7
ECLIR - ELR Subscriptions In.....Dynamic Router	8
ECLIR - ELR Transformed Msgs In.....Dynamic Router	9



ECLIR - eCR Errors In Dynamic Router (Input Mode)

Communication Point

Notes

Purpose: This Dynamic Router communication point is the entry point for all eCR errors being received into the ECLIR ELR processing routes. The existing ██████ routes that send errors to this dynamic router are .

Configuration Properties

Target Name	ECLIR - eCR Errors In
Unique Target Name	true
Used on Routes	
 ECLIR - eCR Errors.....Route	
Page	
23	

Details

Retries

Retry Type	Linear
Number of Retries	5
Retries before Notification	5
Retry Delay (ms)	5000

Properties

Idle Timeout (ms)	0
Number of Connections	1
Startup State	Startup Last
Input Message Encoding	Unknown / Not Set



ECLIR - eCR Msgs In

Dynamic Router (Input Mode)

Communication Point

Notes

Purpose: This Dynamic Router communication point is the entry point for all eCR messages (eICR - Initial Case Report, RR - Reportability Response) in their original format being received into the ECLIR eCR processing routes. The existing ██████ route that sends messages to this dynamic router is *eICR -RR Route – Processing*.

Configuration Properties

Target Name	ECLIR - eCR Msgs In
Unique Target Name	true

Used on Routes

Page

ECLIR - eCR Messages In.....	Route	35
------------------------------	-------	----

Details

Retries

Retry Type	Linear
Number of Retries	5
Retries before Notification	5
Retry Delay (ms)	5000

Properties

Idle Timeout (ms)	0
Number of Connections	1
Startup State	Startup Last
Input Message Encoding	Unknown / Not Set



ECLIR - ELR Errors In Dynamic Router (Input Mode)

Communication Point

Notes

Purpose: This Dynamic Router communication point is the entry point for all ELR errors being received into the ECLIR ELR processing routes. The existing XXXX routes that send errors to this dynamic router are *1-ELR*, *3-Spreadsheet*, *4-HL7* and *5 - Msg Splitters*.

Configuration Properties

Target Name	ECLIR - ELR Errors In
Unique Target Name	true

Used on Routes

Page

 ECLIR - ELR Legacy Route Errors.....	Route	169
--	-------	-----

Details

Retries

Retry Type	Linear
Number of Retries	5
Retries before Notification	5
Retry Delay (ms)	5000

Properties

Idle Timeout (ms)	0
Number of Connections	1
Startup State	Startup Last
Input Message Encoding	Unknown / Not Set



ECLIR - ELR Msgs In

Dynamic Router (Input Mode)

Communication Point

Notes

Purpose: This Dynamic Router communication point is the entry point for all ELR messages in their original format being received into the ECLIR ELR processing routes. The existing XXXX routes that send messages to this dynamic router are *1-ELR* and *3-Spreadsheet*.

Configuration Properties

Target Name	ECLIR - ELR Msgs In
Unique Target Name	true

Used on Routes

Page

 ECLIR - ELR Message Parsing.....Route	286
---	---------------------

Details

Retries

Retry Type	Linear
Number of Retries	5
Retries before Notification	5
Retry Delay (ms)	5000

Properties

Idle Timeout (ms)	0
Number of Connections	1
Startup State	Startup Last
Input Message Encoding	Unknown / Not Set



ECLIR - ELR Subscriptions In

Dynamic Router (Input Mode)

Communication Point

Notes

Purpose: This Dynamic Router communication point is the entry point for all ELR messages that are subscribed to be sent to a non-NBS system by the existing [REDACTED] routes. The ELR messages are received into the ECLIR ELR processing routes from the existing [REDACTED] 8-Subscriptions route.

Configuration Properties

Target Name	ECLIR - ELR Subscriptions In
Unique Target Name	true

Used on Routes

Page

 ECLIR - ELR non-NBS Subscriptions.....Route	185
---	-----

Details

Retries

Retry Type	Linear
Number of Retries	5
Retries before Notification	5
Retry Delay (ms)	5000

Properties

Idle Timeout (ms)	0
Number of Connections	1
Startup State	Startup Last
Input Message Encoding	Unknown / Not Set



ECLIR - ELR Transformed Msgs In

Dynamic Router (Input Mode)

Communication Point

Notes

Purpose: This Dynamic Router communication point is the entry point for all ELR messages that have been transformed by the existing [REDACTED] routes. The transformed messages are received into the ECLIR ELR processing routes from the existing [REDACTED] 4-HL7 route.

Configuration Properties

Target Name	ECLIR - ELR Transformed Msgs In
Unique Target Name	true

Used on Routes

Page

 ECLIR - ELR Transformed Messages.....	Route	298
---	-------	---------------------

Details

Retries

Retry Type	Linear
Number of Retries	5
Retries before Notification	5
Retry Delay (ms)	5000

Properties

Idle Timeout (ms)	0
Number of Connections	1
Startup State	Startup Last
Input Message Encoding	Unknown / Not Set



ECLIR_Sink

Folder

Full Path /ECLIR/Route__ECLIR/ECLIR_Sink

Summary	
Communication Points (4)	
Folder Contents	Page
ECLIR - eCR Route Error Handler Sink.....Sink	11
ECLIR - eCR Sink.....Sink	12
ECLIR - ELR Route Error Handler Sink.....Sink	13
ECLIR - ELR Sink.....Sink	14



ECLIR - eCR Route Error Handler Sink

Sink (Output Mode)

Communication Point

Notes

Purpose: This Sink communication point is the end point for all messages that are no longer relevant to the Route Error Handler.

Used on Routes

	Page
ECLIR - eCR Condition Checks.....Route	101
ECLIR - eCR Errors.....Route	23
ECLIR - eCR Messages In.....Route	35
ECLIR - eCR Polling Data Quality.....Route	53
ECLIR - eCR Polling NBS First Pass.....Route	65
ECLIR - eCR Polling NBS Patient.....Route	87
ECLIR - eCR Message Parsing.....Route	115

Details

Retries

Retry Type	Linear
Number of Retries	5
Retries before Notification	5
Retry Delay (ms)	5000

Properties

Idle Timeout (ms)	0
Number of Connections	1
Startup State	Startup Last
Continue Routing Enabled	False



ECLIR - eCR Sink

Sink (Output Mode)

Communication Point

Notes

Purpose: This Sink communication point is the end point for all messages that are no longer relevant to the message processing.

Used on Routes

Page

ECLIR - eCR Errors.....Route	23
ECLIR - eCR Messages In.....Route	35
ECLIR - eCR Polling Data Quality.....Route	53
ECLIR - eCR Polling NBS First Pass.....Route	65
ECLIR - eCR Polling NBS Patient.....Route	87
ECLIR - eCR Message Parsing.....Route	115

Details

Retries

Retry Type	Linear
Number of Retries	5
Retries before Notification	5
Retry Delay (ms)	5000

Properties

Idle Timeout (ms)	0
Number of Connections	1
Startup State	Startup Last
Continue Routing Enabled	False



ECLIR - ELR Route Error Handler Sink

Sink (Output Mode)

Communication Point

Notes

Purpose: This Sink communication point is the end point for all messages that are no longer relevant to the Route Error Handler.

Used on Routes

	Page
ECLIR - ELR 2.3.1 Message Parsing.....Route	195
ECLIR - ELR 2.3.1 Message Validation.....Route	353
ECLIR - ELR 2.5.1 Message Parsing.....Route	233
ECLIR - ELR 2.5.1 Message Validation.....Route	407
ECLIR - ELR Errors.....Route	157
ECLIR - ELR Legacy Route Errors.....Route	169
ECLIR - ELR Message Parsing.....Route	286
ECLIR - ELR non-NBS Subscriptions.....Route	185
ECLIR - ELR Polling NBS First Pass.....Route	303
ECLIR - ELR Polling NBS Patient.....Route	321
ECLIR - ELR Polling NBS Updates.....Route	334

Details

Retries

Retry Type	Linear
Number of Retries	5
Retries before Notification	5
Retry Delay (ms)	5000

Properties

Idle Timeout (ms)	0
Number of Connections	1
Startup State	Startup Last
Continue Routing Enabled	False



ECLIR - ELR Sink

Sink (Output Mode)

Communication Point

Notes

Purpose: This Sink communication point is the end point for all messages that are no longer relevant to the message processing.

Used on Routes

Page

ECLIR - ELR 2.3.1 Message Validation.....	Route	353
ECLIR - ELR 2.5.1 Message Validation.....	Route	407
ECLIR - ELR Errors.....	Route	157
ECLIR - ELR Legacy Route Errors.....	Route	169
ECLIR - ELR Message Parsing.....	Route	286
ECLIR - ELR non-NBS Subscriptions.....	Route	185
ECLIR - ELR Polling NBS First Pass.....	Route	303
ECLIR - ELR Polling NBS Patient.....	Route	321
ECLIR - ELR Polling NBS Updates.....	Route	334
ECLIR - ELR Transformed Messages.....	Route	298

Details

Retries

Retry Type	Linear
Number of Retries	5
Retries before Notification	5
Retry Delay (ms)	5000

Properties

Idle Timeout (ms)	0
Number of Connections	1
Startup State	Startup Last
Continue Routing Enabled	False



ECLIR_Timer

Folder

Full Path /ECLIR/Route__ECLIR/ECLIR_Timer

Summary		
Communication Points (6)		
Folder Contents		Page
ECLIR - eCR DQ Polling.....	Timer	16
ECLIR - eCR NBS Patient.....	Timer	17
ECLIR - eCR NBS Polling.....	Timer	18
ECLIR - ELR NBS Check for Updates.....	Timer	19
ECLIR - ELR NBS Patient.....	Timer	20
ECLIR - ELR NBS Polling.....	Timer	21



ECLIR - eCR DQ Polling Timer (Input Mode)

Communication Point

Notes

Purpose: This Timer communication point triggers the polling of eCR Data Quality tables to query for the eCR record_ID to link eCR messages back to corresponding records in the ECLIR database. Polling happens every 2 hours beginning at 5 minutes past the hour.

Configuration Properties

Body Template File	
Refresh Rate	3600000

Used on Routes

Page

 ECLIR - eCR Polling Data Quality.....Route	53
--	----

Details

Retries

Retry Type	Linear
Number of Retries	5
Retries before Notification	5
Retry Delay (ms)	5000

Properties

Idle Timeout (ms)	0
Number of Connections	1
Startup State	Startup Last
Input Message Encoding	Unknown / Not Set

Schedule

Start at 0 5 0,2,4,6,8,10,12,14,16,18,20,22 * * ?	Poll every 2 hours at 5 minutes after the hour.
Stop at 4 5 0,2,4,6,8,10,12,14,16,18,20,22 * * ?	Stop before refresh rate sends another message.



ECLIR - eCR NBS Patient Timer (Input Mode)

Communication Point

Notes

Purpose: This Timer communication point triggers the polling of NBS tables to query for patient key identifiers to link eCR messages back to corresponding records in the ECLIR database. Polling happens every 2 hours beginning at 20 minutes past the hour.

Configuration Properties

Body Template File	
Refresh Rate	3600000

Used on Routes

Page

 ECLIR - eCR Polling NBS Patient.....Route [87](#)

Details

Retries

Retry Type	Linear
Number of Retries	5
Retries before Notification	5
Retry Delay (ms)	5000

Properties

Idle Timeout (ms)	0
Number of Connections	1
Startup State	Startup Last
Input Message Encoding	Unknown / Not Set

Schedule

Start at 0 20 0,2,4,6,8,10,12,14,16,18,20,22 * * ?	Poll every 2 hours at 20 minutes after the hour.
Stop at 4 20 0,2,4,6,8,10,12,14,16,18,20,22 * * ?	Stop before refresh rate sends another message.



ECLIR - eCR NBS Polling Timer (Input Mode)

Communication Point

Notes

Purpose: This Timer communication point triggers the polling of NBS tables to query for key identifiers to link eCR messages back to corresponding records in the ECLIR database. Polling happens every 30 minutes beginning at 10 minutes past the hour.

Configuration Properties

Body Template File	
Refresh Rate	450000

Used on Routes

Page

ECLIR - eCR Polling NBS First Pass.....Route	65
--	----

Details

Retries

Retry Type	Linear
Number of Retries	5
Retries before Notification	5
Retry Delay (ms)	5000

Properties

Idle Timeout (ms)	0
Number of Connections	1
Startup State	Startup Last
Input Message Encoding	Unknown / Not Set

Schedule

Start at 0 10 * * * ?	Poll every hour at 10 minutes after the hour.
Stop at 4 10 * * * ?	Stop before refresh rate sends another message.
Start at 0 40 * * * ?	Poll every hour at 40 minutes after the hour.
Stop at 4 40 * * * ?	Stop before refresh rate sends another message.



ECLIR - ELR NBS Check for Updates Timer (Input Mode)

Communication Point

Notes

Purpose: This Timer communication point:
Triggers the polling of NBS tables to query for updates to any statuses that were not successful the first time.

Configuration Properties

Body Template File	
Refresh Rate	3600000

Used on Routes

Page

ECLIR - ELR Polling NBS Updates.....Route	334
---	-----

Details

Retries

Retry Type	Linear
Number of Retries	5
Retries before Notification	5
Retry Delay (ms)	5000

Properties

Idle Timeout (ms)	0
Number of Connections	1
Startup State	Startup Last
Input Message Encoding	Unknown / Not Set

Schedule

Start at 0 28 0,2,4,6,8,10,12,14,16,18,20,22 * * ?	Poll every 2 hours at 28 minutes after the hour.
Stop at 4 28 0,2,4,6,8,10,12,14,16,18,20,22 * * ?	Stop before refresh rate sends another message.



ECLIR - ELR NBS Patient Timer (Input Mode)

Communication Point

Notes

Purpose: This Timer communication point:

Triggers the polling of NBS tables to query for key patient identifiers to link ELR messages back to corresponding records in the ECLIR database.

Configuration Properties

Body Template File	
Refresh Rate	3600000

Used on Routes

Page

 ECLIR - ELR Polling NBS Patient.....	Route	321
--	-------	-----

Details

Retries

Retry Type	Linear
Number of Retries	5
Retries before Notification	5
Retry Delay (ms)	5000

Properties

Idle Timeout (ms)	0
Number of Connections	1
Startup State	Startup Last
Input Message Encoding	Unknown / Not Set

Schedule

Start at 0 42 0,2,4,6,8,10,12,14,16,18,20,22 * * ?	Poll every 2 hours at 42 minutes after the hour.
Stop at 4 42 0,2,4,6,8,10,12,14,16,18,20,22 * * ?	Stop before refresh rate sends another message.



ECLIR - ELR NBS Polling Timer (Input Mode)

Communication Point

Notes

Purpose: This Timer communication point:

Triggers the polling of NBS tables to query for key identifiers to link ELR messages back to corresponding records in the ECLIR database.

Polling happens every 15 minutes beginning at 8 minutes past the hour.

Configuration Properties

Body Template File	
Refresh Rate	450000

Used on Routes

Page

ECLIR - ELR Polling NBS First Pass.....	Route	303
---	-------	-----

Details

Retries

Retry Type	Linear
Number of Retries	5
Retries before Notification	5
Retry Delay (ms)	5000

Properties

Idle Timeout (ms)	0
Number of Connections	1
Startup State	Startup Last
Input Message Encoding	Unknown / Not Set

Schedule

Start at 0 8 *** ?	Poll every hour at 8 minutes after the hour.
Stop at 4 8 *** ?	Stop before refresh rate sends another message.
Start at 0 23 *** ?	Poll every hour at 23 minutes after the hour.
Stop at 4 23 *** ?	Stop before refresh rate sends another message.
Start at 0 38 *** ?	Poll every hour at 38 minutes after the hour.
Stop at 4 38 *** ?	Stop before refresh rate sends another message.
Start at 0 53 *** ?	Poll every hour at 53 minutes after the hour.
Stop at 4 53 *** ?	Stop before refresh rate sends another message.



eCR

Folder


Full Path /ECLIR/Route__ECLIR/eCR

Summary		
Routes (2)		
Sub-folders (2)		
Folder Contents		Page
 ECLIR - eCR Errors.....	Route	23
 ECLIR - eCR Messages In.....	Route	35
 ECLIR - eCR Polling.....	Folder	52
 ECLIR - eICR Parsing.....	Folder	100



ECLIR - eCR Errors

Route

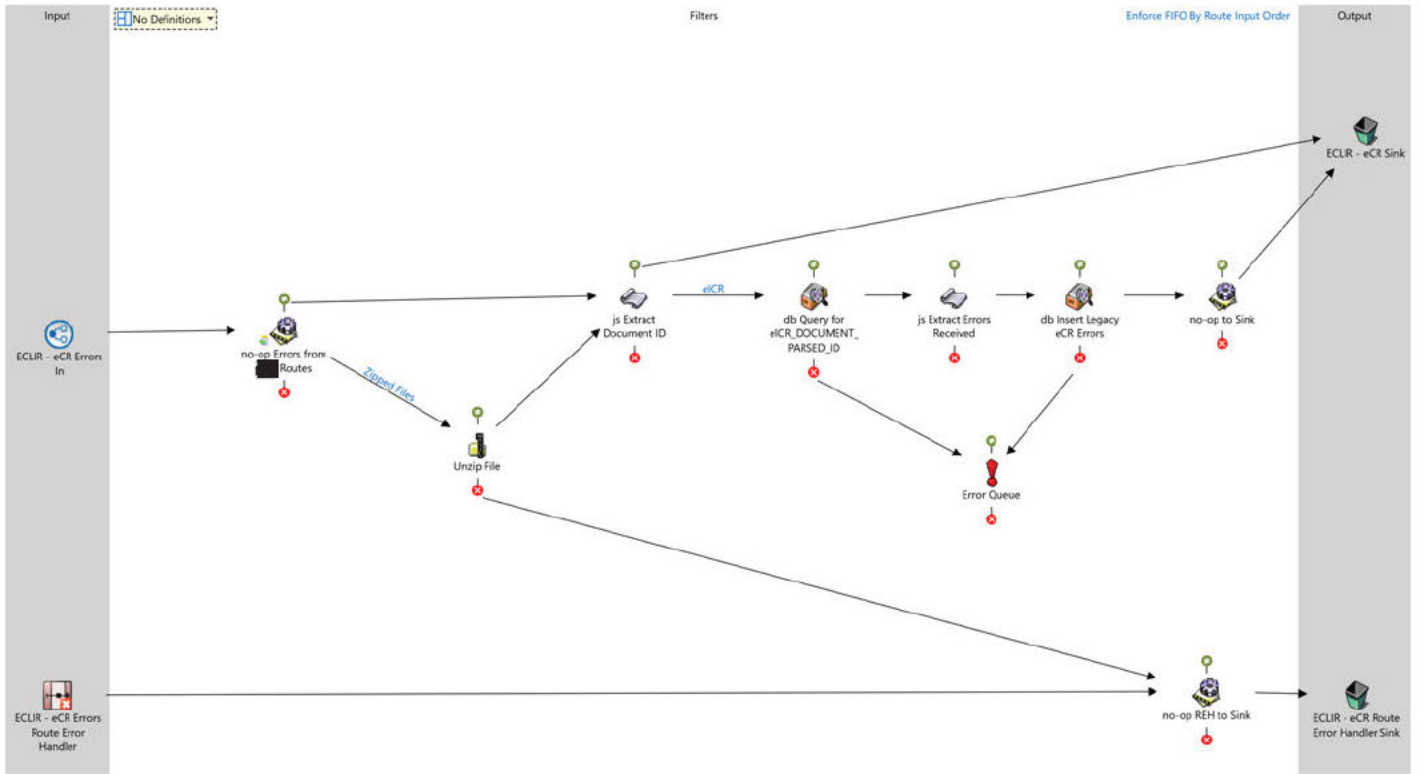

Notes

Purpose: This route receives errors from legacy routes to be recorded in the eICR_ERROR table in ECLIR.

Inputs

Inputs	Page
ECLIR - eCR Errors In.....Dynamic Router	4

Outputs

Outputs	Page
ECLIR - eCR Sink.....Sink	12
ECLIR - eCR Route Error Handler Sink.....Sink	11

Filters

Name	Page
db Insert Legacy eCR Errors.....Database LookUp	28
db Query for eICR_DOCUMENT_PARSED_ID.....Database LookUp	32
Error Queue.....Error Queue	32
js Extract Document ID.....JavaScript (v.1)	25
js Extract Errors Received.....JavaScript (v.1)	29
no-op Errors from Routes.....No-operation	27

Name		Page
 no-op REH to Sink.....	No-operation	25
 no-op to Sink.....	No-operation	29
 Unzip File.....	Zip / Unzip	32

Details

General	
Priority	Normal
Startup State	Startup Third
FIFO Mode	Enforce FIFO By Route Input Order
Stop route on error message	False



no-op REH to Sink

No-operation

On ECLIR - eCR Errors route

[Filter](#)

Notes

Purpose: This No-operation filter sends messages from the *ECLIR - eCR Errors Route Error Handler* to the *ECLIR - eCR Route Error Handler Sink* if any unhandled exceptions occur on the route. Nothing can be recorded

Destinations

Name

Page

ECLIR - eCR Route Error Handler Sink.....Sink [11](#)



js Extract Document ID

JavaScript (v.1)

On ECLIR - eCR Errors route

[Filter](#)

Notes

Purpose: This JavaScript filter sets the message property DOCUMENT_OID to be used in the *db Query for eICR_DOCUMENT_PARSED_ID* Database Lookup filter.

Javascript

```
//
=====
// _____ INITIAL VARIABLES (start
)
//
=====

var next = output.append(input[0]);
var docType = '';
var DOCUMENT_OID = '';
var DOC_ID_ROOT = '';
var DOC_ID_EXTENSION = '';

//
=====
// _____ INITIAL VARIABLES (end
)
//
=====
```

Javascript

```

//
=====
// _____ SET DOCUMENT_OID PROPERTY (start
// _____
=====

// Determine document type and set property.  Either eICR or RR.
if (next.getProperty('ZipSuffix') == '.xml') {
  if (next.getField('/ClinicalDocument/code/@code') == "55751-2") {
    docType = 'eicr';
  }
  else if (next.getField('/ClinicalDocument/code/@code') == "88085-6") {
    docType = 'rr';
  }
}
next.setProperty('docType', docType);

//Document Id Root
if (docType == 'eicr') {
  var indexIDBegin = next.text.indexOf('<!--<id ');
  if (indexIDBegin != -1) {
    indexIDBegin = indexIDBegin + 8;
    var indexRootBegin = next.text.indexOf('root="', indexIDBegin);
    if (indexRootBegin != -1) {
      indexRootBegin = indexRootBegin + 6;
      var indexRootEnd = next.text.indexOf('"', indexRootBegin);
      var lengthRoot = indexRootEnd - indexRootBegin;
      DOC_ID_ROOT = next.text.substr(indexRootBegin, lengthRoot);
      DOCUMENT_OID = DOC_ID_ROOT;
    }
  }

  //Document Id Extension
  var indexIDEnd = next.text.indexOf('/>-->');
  var indexExtensionBegin = next.text.indexOf('extension="', indexIDBegin);
  if (indexExtensionBegin != -1 && indexExtensionBegin < indexIDEnd) {
    indexExtensionBegin = indexExtensionBegin + 11;
    var indexExtensionEnd = next.text.indexOf('"', indexExtensionBegin);
    var lengthExtension = indexExtensionEnd - indexExtensionBegin;
    DOC_ID_EXTENSION = next.text.substr(indexExtensionBegin, lengthExtension);
  }
  if (DOC_ID_EXTENSION != '') {DOCUMENT_OID += '&' + DOC_ID_EXTENSION;}
}
else {
  if (next.getField('/ClinicalDocument/id/@root') != null) {
    DOC_ID_ROOT = next.getField('/ClinicalDocument/id/@root');
    DOCUMENT_OID = next.getField('/ClinicalDocument/id/@root');
  }
  if (next.getField('/ClinicalDocument/id/@extension') != null) {
    DOC_ID_EXTENSION = next.getField('/ClinicalDocument/id/@extension');
  }
  if (DOC_ID_EXTENSION != '' && DOC_ID_EXTENSION != null) {DOCUMENT_OID += '&' + DOC_ID_EXT
ENSION;}
}

```

Javascript

```

next.setProperty('DOCUMENT_OID', DOCUMENT_OID);
}

//Set property for 'DOCUMENT_SOURCE_BUCKET' column based on the input comm point.
var DOCUMENT_SOURCE_BUCKET = next.getProperty('rhapsody:InputCommunicationPoint');
if (DOCUMENT_SOURCE_BUCKET == 'AIMS Platform') {
    DOCUMENT_SOURCE_BUCKET = '██_PROD';
}
else {
    DOCUMENT_SOURCE_BUCKET = '██_TEST';
}
next.setProperty('DOCUMENT_SOURCE_BUCKET', DOCUMENT_SOURCE_BUCKET);

//
=====
//_____ SET DOCUMENT_OID PROPERTY (end
)_____
//
=====

```

Destinations

Name	Page
Output Condition: eICR	
docType = 'eicr' ignoring case	
 db Query for eICR_DOCUMENT_PARSED_ID.....Database LookUp	32
Error Connector	Page
 ECLIR - eCR Sink.....Sink	12

**no-op Errors from TDH Routes**

Filter

No-operation

On ECLIR - eCR Errors route

Notes

Purpose: This No-operation filter receives eICR documents that have erred from the existing █ routes to be recorded in the ECLIR database. There is a timed hold of 5 minutes to prevent "race" conditions for documents to insure a unique document key ID has been created in the eICR_DOCUMENT_PARSED table for that message in the ECLIR database.

Message Collector: Timed Hold

Message Set Timeout	5
Timeout Units	Minutes
Timeout Destination	Process as Usual

Destinations

Name	Page
Output Condition: Zipped Files	
ZipSuffix does not exist	
Unzip File.....Zip / Unzip	32
Error Connector	Page
js Extract Document ID.....JavaScript (v.1)	25



db Insert Legacy eCR Errors

Filter

Database LookUp

On ECLIR - eCR Errors route

Notes

Purpose: This Database Lookup filter inserts an error record into the eICR_ERROR table in the ECLIR database by looping through an XML representation of the error record created in the previous route.

Configuration Properties

Maximum Concurrency	1	
Database	[REDACTED]	
Host	[REDACTED]	[REDACTED]
Port	[REDACTED]	[REDACTED]
Database Name	[REDACTED]	[REDACTED]
Username	[REDACTED]	[REDACTED]
Password	[REDACTED]	
Additional Connection Properties	Property Name	Property Value
	[REDACTED]	[REDACTED]
Configuration File	[REDACTED]	
Message Type	XML	
Definition		
Query Timeout		
Deadlock Retry Attempts	5	
Deadlock Retry Delay	100	
Socket Timeout	0	
Configuration File:	[REDACTED]	
[REDACTED]		
[REDACTED]		
[REDACTED]		
[REDACTED]		

Configuration File:

```

<statement name="Insert into eICR_ERROR table" ide:type="executeSql" iterate="errorRecord"
test="NotNull($eICR_DOCUMENT_PARSED_ID)" ide:summary="Add error record to the eICR_ERROR
table." ide:allowCompoundStatements="true" user:iterationRootMessagePath="message">
  <sql>INSERT INTO eICR_ERROR (
eICR_DOCUMENT_PARSED_ID
,DOCUMENT_OID
,ERROR_CATEGORY
,ERROR_TYPE
,PROCESSING_STEP
,ERROR_MSG
,INSERT_DATE
)
VALUES (
~/message/errorRecord/eICR_DOCUMENT_PARSED_ID~
~/message/errorRecord/DOCUMENT_OID~
~/message/errorRecord/ERROR_CATEGORY~
,'LEGACY CONFORMANCE'
~/message/errorRecord/PROCESSING_STEP~
~/message/errorRecord/ERROR_MSG~
,SYSDATETIME()
)</sql>
</statement>
</config>

```

Destinations

Name	Page
 no-op to Sink..... No-operation	29
Error Connector	Page
 Error Queue..... Error Queue	32



no-op to Sink

No-operation

On ECLIR - eCR Errors route

Filter

Notes

Purpose: This No-operation filter sends all messages to the *ECLIR - eCR Sink* after queries are completed.

Destinations

Name	Page
 ECLIR - eCR Sink.....Sink	12



js Extract Errors Received

JavaScript (v.1)

Filter

On ECLIR - eCR Errors route

Notes

Purpose: This JavaScript filter outputs an XML file that follows the ECLIR - Error.xsd format for use to write these errors to the ECLIR database in the *db Insert Legacy eCR Errors Database Lookup* filter. These are errors received from the legacy  eCR routes:

eICR -RR Route - Processing

PHDCConverter

Javascript

```
//
=====
//_____INITIAL VARIABLES (start
)
//
=====

var next = output.append(input[0]);
var eICR_DOCUMENT_PARSED_ID = next.getProperty('eICR_DOCUMENT_PARSED_ID');

//
=====
//_____INITIAL VARIABLES (end
)
//
=====


//
=====
//_____BUILD ERROR XML (start
)
//
=====

if (eICR_DOCUMENT_PARSED_ID != null) {

    next.text = '<message></message>';

    next.setField('/message/errorRecord/eICR_DOCUMENT_PARSED_ID', eICR_DOCUMENT_PARSED_ID);
    next.setField('/message/errorRecord/DOCUMENT_OID', next.getProperty('DOCUMENT_OID'));
    if (next.getProperty('filtDisp') == 'SINK') {
        next.setField('/message/errorRecord/ERROR_CATEGORY', 'INFO');
        next.setField('/message/errorRecord/PROCESSING_STEP', 'From Legacy Route: eICR -RR Route -
Input');
        next.setField('/message/errorRecord/ERROR_MSG', 'Message sent to sink because a match was not
found in the PHDCfilter_input lookup table.');
```

Javascript

```

    next.setField('/message/errorRecord/PROCESSING_STEP', 'From Legacy Route: eICR -RR Route -
Input');
    next.setField('/message/errorRecord/ERROR_MSG', 'Message sent to sink because it was a dup
licate message.');
```

```

    }
    else if (next.getProperty('testName') == 'Y') {
        next.setField('/message/errorRecord/ERROR_CATEGORY', 'INFO');
        next.setField('/message/errorRecord/PROCESSING_STEP', 'From Legacy Route: eICR -RR Route -
Processing');
        next.setField('/message/errorRecord/ERROR_MSG', 'Message sent to sink because a match was
found in the PHDCTest_Name lookup table.');
```

```

    }
    else if (next.getProperty('NBS_PROCESS') == 'N') {
        next.setField('/message/errorRecord/ERROR_CATEGORY', 'INFO');
        next.setField('/message/errorRecord/PROCESSING_STEP', 'From Legacy Route: eICR -RR Route -
Processing');
        next.setField('/message/errorRecord/ERROR_MSG', 'Message sent to sink because it is not going
to NBS for processing.');
```

```

    }
    else if (next.getProperty('BaseFilename').indexOf('InterPartner~') != -1 || next.getProperty
('rhapsody:InputCommunicationPoint') == 'PHDCSourceMapper') {
        next.setField('/message/errorRecord/ERROR_CATEGORY', 'FATAL');
        next.setField('/message/errorRecord/PROCESSING_STEP', 'From Legacy Route: PHDCConverter');
        next.setField('/message/errorRecord/ERROR_MSG', 'Mapping issue in the PHDCConverter route.
This message is in the Rhapsody Error Queue.');
```

```

    }
    else if (next.getProperty('sendToNbs') == null) {
        next.setField('/message/errorRecord/ERROR_CATEGORY', 'INFO');
        next.setField('/message/errorRecord/PROCESSING_STEP', 'From Legacy Route: eICR -RR Route -
Processing');
        next.setField('/message/errorRecord/ERROR_MSG', 'Message sent to sink because the sending fac
ility was not found in the PHDCfacilities lookup table.');
```

```

    }
    else if (next.getProperty('em_BodyText') != null) {
        var em_BodyText = next.getProperty('em_BodyText');
        em_BodyText = em_BodyText.substr(em_BodyText.indexOf(',')+5);
        em_BodyText = em_BodyText.replace(/\x0d\x0a/g, '');

        next.setField('/message/errorRecord/ERROR_CATEGORY', 'FATAL');
        next.setField('/message/errorRecord/PROCESSING_STEP', 'From Legacy Route: eICR -RR Route -
Processing');
        next.setField('/message/errorRecord/ERROR_MSG', em_BodyText);
    }
    else {
        next.setField('/message/errorRecord/ERROR_CATEGORY', 'INFO');
        next.setField('/message/errorRecord/PROCESSING_STEP', 'From Legacy Route: eICR -RR Route -
Processing');
        next.setField('/message/errorRecord/ERROR_MSG', 'Unknown error. More information is needed
from the legacy route to categorize this error.');
```

```

    }
} // (END) if (eICR_DOCUMENT_PARSED_ID != null) (END)

//
=====
// _____ BUILD ERROR XML (end
)

```

Javascript

//

Destinations

Name	Page
 db Insert Legacy eCR Errors.....Database LookUp	28

**Error Queue**

Filter

Error Queue

On ECLIR - eCR Errors route

Configuration Properties

Error Message	Sent from error filter
---------------	------------------------

**Unzip File**

Filter

Zip / Unzip

On ECLIR - eCR Errors route

Notes

Purpose: This Zip/Unzip filter unzips eCR files received from existing  routes.

Configuration Properties

Mode	Unzip
On Non-zip File Receipt	Send to error connector
On Empty Zip File Receipt	Send to error connector
Filename Encoding	Default platform encoding

Destinations

Name	Page
 js Extract Document ID.....JavaScript (v.1)	25
Error Connector	
 no-op REH to Sink.....No-operation	25

**db Query for
eICR_DOCUMENT_PARSED_ID**

Filter

Database LookUp

On ECLIR - eCR Errors route

Notes

Purpose: This Database Lookup filter queries the eICR_DOCUMENT_PARSED table in the ECLIR database to find the ID based on the document id of the document received.

Configuration Properties

Maximum Concurrency	1	
Database	[REDACTED]	
Host	[REDACTED]	[REDACTED]
Port	[REDACTED]	[REDACTED]
Database Name	[REDACTED]	[REDACTED]
Username	[REDACTED]	[REDACTED]
Password	[REDACTED]	
Additional Connection Properties	Property Name	Property Value
	[REDACTED]	[REDACTED]
Configuration File	[REDACTED]	
Message Type	Plain text	
Definition		
Query Timeout		
Deadlock Retry Attempts	5	
Deadlock Retry Delay	100	
Socket Timeout	0	

Configuration File:

```

<statement name="MsgID" ide:type="executeSql" ide:summary="Lookup eICR_DOCUMENT_PARSED.ID for
the message based on the document id element." ide:allowCompoundStatements="true">
  <sql>SELECT TOP(1) ID, DOCUMENT_OID
FROM eICR_DOCUMENT_PARSED
WHERE DOCUMENT_OID = $DOCUMENT_OID</sql>
  <substituteColumn name="ID">$eICR_DOCUMENT_PARSED_ID</substituteColumn>
  <resultSet>AllowNullResultSet</resultSet>
</statement>
<statement name="Create New eICR_DOCUMENT_ID" ide:type="executeSql" test="Null(@ID)" ide:sum
mary="If the eICR_DOCUMENT_ID was not returned from the previous query, create it." ide:allow
CompoundStatements="true">
  <sql>INSERT INTO eICR_DOCUMENT_PARSED (
DOCUMENT_OID
,PLANNED_ORDERS_FL
,DOCUMENT_SOURCE_BUCKET
,NBS_POLLING_ATTEMPTS
,INSERT_DATE

```

Configuration File:

```

)
VALUES (
  $DOCUMENT_OID
  ,0
  , $DOCUMENT_SOURCE_BUCKET
  ,100
  ,SYSDATETIME()
) </sql>
  <statement ide:type="compoundSqlStatement">
    <sql>SELECT \@ \@IDENTITY AS eICR_DOCUMENT_PARSED_ID</sql>
    <substituteColumn name="eICR_DOCUMENT_PARSED_ID">$eICR_DOCUMENT_PARSED_ID</substitute
Column>
  </statement>
</statement>
  <statement name="Max out NBS Polling Attempts" ide:type="executeSql" test="NotNull(@ID) AND
&#xD;&#xA;NotEqualIgnoreCase($rhapsody:DuplicateMessageOutputProperty, 'true')" ide:summary
="Set the NBS_POLLING_ATTEMPTS column to 100 so these messages will not be attempted in the
polling routes." ide:allowCompoundStatements="true">
  <sql>UPDATE eICR_DOCUMENT_PARSED
SET NBS_POLLING_ATTEMPTS = 100
WHERE ID = @ID</sql>
  </statement>
</config>

```

Destinations

Name	Page
 js Extract Errors Received..... JavaScript (v.1)	29
Error Connector	Page
 Error Queue..... Error Queue	32