

Notes

Sets the property ERROR_MSG with the Rhapsody generated errors to be stored in the ERROR_MSG column in the ELR_ERROR table.

Sets the property [REDACTED]_ENVIRONMENT with the Rhapsody Variable ECLIR_[REDACTED]_ENVIRONMENT to be stored in the [REDACTED]_ENVIRONMENT column in the ELR_MESSAGE table.

Sets the content of the message back to the original to be stored in the ORIGINAL_MESSAGE column in the ELR_MESSAGE table if needed by loading the SnapShot if the id is not null.

Javascript

```
//
=====
//_____INITIAL VARIABLES (start
)
//
=====

var next = output.append(input[0]);

//
=====
//_____INITIAL VARIABLES (end
)
//
=====

//
=====
//_____SET MESSAGE PROPERTIES FOR DB INSERT (start
)
//
=====

next.setProperty('VALIDATION_TYPE', 'Rhapsody');
next.setProperty('ERROR_CATEGORY', 'FATAL');
next.setProperty('ERROR_TYPE', 'Rhapsody');
next.setProperty('PROCESSING_STEP', 'Error Inserts to DB: ' + next.getProperty('rhapsody:Error
Route') + ' (Route) ->' + next.getProperty('rhapsody:ErrorFilterName' + ' (Filter)'));
//next.setProperty('ERROR_MSG', 'Internal Rhapsody Route Error. Message processing could not
continue: ' + next.getErrors());
var ERROR_MSG = 'Internal Rhapsody Route Error. Message processing could not continue: ' + next
.getErrors();
next.setProperty('ERROR_MSG', ERROR_MSG);

//Send the message to the Error Queue if it was caused by a database connectivity issue.
if (ERROR_MSG.indexOf('The connection is broken and recovery is not possible.') != -1 || ERROR
_MSG == 'Internal Rhapsody Route Error. Message processing could not continue: ') {
    next.setProperty('SendToErrorQueue', true);
}

//This is a Rhapsody variable that should be set up during configuration.
var [REDACTED]_ENVIRONMENT = getVariable("ECLIR_[REDACTED]_ENVIRONMENT");
if ([REDACTED]_ENVIRONMENT == null || [REDACTED]_ENVIRONMENT == "") {
    [REDACTED]_ENVIRONMENT = "VARIABLE NOT SETUP IN RHAPSODY";
}
```

Javascript

```

}
next.setProperty('█_ENVIRONMENT', █_ENVIRONMENT);

// Load the snapshot back into the message.
if (next.getProperty("SnapshotIDofOrigMsg") != null) {
    next.text = next.loadMessageSnapshotForId(next.getProperty("SnapshotIDofOrigMsg")).text;
}

//
=====
//_____ SET MESSAGE PROPERTIES FOR DB INSERT (end
//_____
//

```

Destinations

Name	Page
Output Condition SendToErrorQueue = 'true' ignoring case	
 Error Queue..... Error Queue	176
Error Connector	Page
 db ELR Errors Route Errors..... Database LookUp	180



Error Queue

Filter

Error Queue

On ECLIR - ELR Legacy Route Errors route

Configuration Properties	
Error Message	Sent from error filter



db Add Field Descriptions

Filter

Database Message Extraction

On ECLIR - ELR Legacy Route Errors route

Configuration Properties	
Maximum Concurrency	1
Database	
Host	
Port	
Database Name	
Username	
Password	

Configuration Properties		
Additional Connection Properties	Property Name	Property Value
Configuration File		
Message Body Column		
Message Type	XML	
Definition		
Query Timeout		
Deadlock Retry Attempts	5	
Deadlock Retry Delay	100	
Socket Timeout	0	
Configuration File: Database Message Extraction.xml		
<pre><statement name="errorRecord" ide:type="executeSql" iterate="errorRecord" ide:summary="Adds the field description to each errorRecord node from the prior validations." ide:allowCompound Statements="true"> <sql>SELECT `~/message/errorRecord/ELR_MESSAGE_ID` AS ELR_MESSAGE_ID ,~/message/errorRecord/ERROR_CATEGORY` AS ERROR_CATEGORY ,~/message/errorRecord/PROCESSING_STEP` AS PROCESSING_STEP ,~/message/errorRecord/FIELD` AS FIELD ,COALESCE( ( SELECT TOP(1) COLUMN_DESCRIPTION FROM ELR_HL7_FIELD_DESCRIPTIONS WHERE HL7_FIELD_NOTATION = `~/message/errorRecord/FIELD` OR HL7_FIELD_NOTATION = LEFT(`~/message/errorRecord/FIELD`, LEN(`~/message/errorRecord/ FIELD`) - charindex('.', reverse(`~/message/errorRecord/FIELD`))) OR HL7_FIELD_NOTATION = LEFT(`~/message/errorRecord/FIELD`, LEN(`~/message/errorRecord/ FIELD`) - (charindex('.', reverse(`~/message/errorRecord/FIELD`), charindex('.', reverse(`mes age/errorRecord/FIELD`))+1))) ORDER BY HL7_FIELD_NOTATION DESC ), NULL) AS FIELD_DESCRIPTION ,~/message/errorRecord/FIELD_VALUE` AS FIELD_VALUE ,~/message/errorRecord/ERROR_MSG` AS ERROR_MSG ,~/message/errorRecord/ERROR_TYPE_DETAIL` AS ERROR_TYPE_DETAIL</sql> </statement> </config></pre>		

Destinations

Name	Page
 db Insert Legacy ELR Errors..... Database LookUp	182



db Query for ELR_MESSAGE_ID

Database LookUp

Filter

On ECLIR - ELR Legacy Route Errors route

Notes

Purpose: This Database Lookup filter queries the ELR_MESSAGE table in the ECLIR database to find the ID based on the MSH-10 and MSH-4.2 of the message received. The ID returned is then set to the message property ELR_MESSAGE_ID.

Configuration Properties

Maximum Concurrency	1	
Database	[REDACTED]	
Host	[REDACTED]	
Port	[REDACTED]	
Database Name	[REDACTED]	
Username	[REDACTED]	
Password	[REDACTED]	
Additional Connection Properties	Property Name	Property Value
	[REDACTED]	[REDACTED]
Configuration File	[REDACTED]	
Definition	ECLIR_ELRL_ORU_2.5.1_Parsing.s3d	
Query Timeout		
Deadlock Retry Attempts	5	
Deadlock Retry Delay	100	
Socket Timeout	0	

Configuration File: db Query for ELR_MESSAGE_ID.xml

```

<statement name="MsgID" ide:type="executeSql" ide:summary="Lookup ELR_MESSAGE.ID for the
message based on the MSH-10 and MSH-4.2 values." ide:allowCompoundStatements="true">
  <sql>SELECT TOP(1) ID
FROM ELR_MESSAGE
WHERE MSH_10 = @MSH.MessageControlID AND MSH_4_2 = @MSH.SendingFacility.UniversalID</sql>
  <substituteColumn name="ID">$ELR_MESSAGE_ID</substituteColumn>
  <resultSet>AllowNullResultSet</resultSet>
  <statement name="ELR_MESSAGE ID Does Not exist" ide:type="executeSql" test="Null(@ID)" ide
:summary="The ELR_MESSAGE ID does not exist in the ELR_MESSAGE table. Create an entry in that
table to create an ID." ide:allowCompoundStatements="true">
    <sql>INSERT INTO ELR_MESSAGE (
ORIGINAL_MESSAGE
, [REDACTED] ENVIRONMENT
, SUCCESS_FL
, INSERT_DATE
)
VALUES (
  $messageContent
, $[REDACTED] ENVIRONMENT
, 0

```

Configuration File: db Query for ELR_MESSAGE_ID.xml

```

,SYSDATETIME()
)</sql>
  <statement ide:type="compoundSqlStatement">
    <sql>SELECT \@ \@IDENTITY AS ELR_MESSAGE_ID</sql>
    <substituteColumn name="ELR_MESSAGE_ID">$ELR_MESSAGE_ID</substituteColumn>
  </statement>
</statement>
</statement>
</config>

```

Destinations

Name	Page
 js Extract Errors Received..... JavaScript (v.1)	171

**no-op to Sink**

Filter

No-operation

On ECLIR - ELR Legacy Route Errors route

Notes

Purpose: This No-operation filter sends all messages to the *ECLIR - ELR Sink* after queries are completed or if empty result sets are received.

Destinations

Name	Page
 ECLIR - ELR Sink..... Sink	14

**js Set Environment Property**

Filter

JavaScript (v.1)

On ECLIR - ELR Legacy Route Errors route

Notes

Purpose: This JavaScript filter sets the property  ENVIRONMENT with the Rhapsody Variable ECLIR_  ENVIRONMENT to be stored in the  ENVIRONMENT column in the ELR_MESSAGE table if needed.

Javascript

```
//
=====
```

Javascript

```
// _____ INITIAL VARIABLES (start
)
//
=====

var next = output.append(input[0]);

//
=====
// _____ INITIAL VARIABLES (end
)
//
=====

//
=====
// _____ SET MESSAGE PROPERTIES FOR DB INSERT (start
)
//
=====

//This is a Rhapsody variable that should be set up during configuration.
var _____ENVIRONMENT = getVariable("ECLIR _____ENVIRONMENT");
if (_____ENVIRONMENT == null || _____ENVIRONMENT == "") {
  _____ENVIRONMENT = "VARIABLE NOT SETUP IN RHAPSODY";
}
next.setProperty('_____ENVIRONMENT', _____ENVIRONMENT);

//
=====
// _____ SET MESSAGE PROPERTIES FOR DB INSERT (end
)
//
=====
```

Destinations

Name	Page
 db Query for ELR_MESSAGE_ID..... Database LookUp	177



db ELR Errors Route Errors

Database LookUp

On ECLIR - ELR Legacy Route Errors route

Filter

Notes

Purpose: This Database Lookup filter inserts an error record into the ELR_ERROR table in the ECLIR database in the event an unhandled error is caught by the *ECLIR - ELR Errors Error Handler*.

Notes

Configuration Properties

Maximum Concurrency	1	
Database	[REDACTED]	
Host	[REDACTED]	
Port	[REDACTED]	
Database Name	[REDACTED]	
Username	[REDACTED]	
Password	[REDACTED]	
Additional Connection Properties	Property Name	Property Value
	[REDACTED]	[REDACTED]
Configuration File	[REDACTED]	
Message Type	Plain text	
Definition		
Query Timeout		
Deadlock Retry Attempts	5	
Deadlock Retry Delay	100	
Socket Timeout	0	

Configuration File: Database LookUp 2.xml

```

<statement name="ELR_MESSAGE ID Does Not exist" ide:type="executeSql" test="Null($ELR_MESSAGE_ID)" ide:summary="The ELR_MESSAGE ID does not exist in the ELR_MESSAGE table. Create an entry in that table to create an ID." ide:allowCompoundStatements="true">
  <sql>INSERT INTO ELR_MESSAGE (
    ORIGINAL_MESSAGE
  ,  ENVIRONMENT
  , SUCCESS_FL
  , INSERT_DATE
  )
  VALUES (
    $messageContent
  ,  ENVIRONMENT
  , 0
  , SYSDATETIME()
  )</sql>
  <statement ide:type="compoundSqlStatement">
    <sql>SELECT \@@IDENTITY AS ELR_MESSAGE_ID</sql>
    <substituteColumn name="ELR_MESSAGE_ID">$ELR_MESSAGE_ID</substituteColumn>
  </statement>
  <statement name="Insert into ELR_ERROR table" ide:type="executeSql" test="NotNull(@ELR_MESSAGE_ID)" ide:summary="Add error record to the ELR_ERROR table." ide:allowCompoundStatements="true">
    <sql>INSERT INTO ELR_ERROR (
      ELR_MESSAGE_ID
    , VALIDATION_TYPE
    , ERROR_CATEGORY

```

Configuration File: Database LookUp 2.xml

```
,ERROR_TYPE
,PROCESSING_STEP
,ERROR_MSG
,INSERT_DATE
)
VALUES (
  @ELR_MESSAGE_ID
  ,$VALIDATION_TYPE
  ,$ERROR_CATEGORY
  ,$ERROR_TYPE
  ,$PROCESSING_STEP
  ,$ERROR_MSG
  ,SYSDATETIME()
)
</sql>
</statement>
</statement>
<statement name="Insert into ELR_ERROR table" ide:type="executeSql" test="NotNull($ELR_MESSAGE_ID)" ide:summary="Add error record to the ELR_ERROR table." ide:allowCompoundStatements="true">
  <sql>INSERT INTO ELR_ERROR (
    ELR_MESSAGE_ID
    ,VALIDATION_TYPE
    ,ERROR_CATEGORY
    ,ERROR_TYPE
    ,PROCESSING_STEP
    ,ERROR_MSG
    ,INSERT_DATE
  )
  VALUES (
    $ELR_MESSAGE_ID
    ,$VALIDATION_TYPE
    ,$ERROR_CATEGORY
    ,$ERROR_TYPE
    ,$PROCESSING_STEP
    ,$ERROR_MSG
    ,SYSDATETIME()
  )
</sql>
</statement>
</config>
```

Destinations

Name	Page
 no-op REH to Sink..... No-operation	174



db Insert Legacy ELR Errors

Filter

Database LookUp

On ECLIR - ELR Legacy Route Errors route

Notes

Purpose: This Database Lookup filter inserts an error record into the ELR_ERROR table in the ECLIR database by looping through an XML representation of the error record from the  ELR legacy routes.

Notes**Configuration Properties**

Maximum Concurrency	1	
Database	[REDACTED]	
Host	[REDACTED]	
Port	[REDACTED]	
Database Name	[REDACTED]	
Username	[REDACTED]	
Password	[REDACTED]	
Additional Connection Properties	Property Name	Property Value
	[REDACTED]	[REDACTED]
Configuration File	[REDACTED]	
Message Type	XML	
Definition		
Query Timeout		
Deadlock Retry Attempts	5	
Deadlock Retry Delay	100	
Socket Timeout	0	

Configuration File: Database LookUp 2.xml

```

<statement name="Insert into ELR_ERROR table" ide:type="executeSql" iterate="errorRecord"
test="NotNull($ELR_MESSAGE_ID)" ide:summary="Add error record to the ELR_ERROR table." ide
:allowCompoundStatements="true" user:iterationRootMessagePath="message">
  <sql>INSERT INTO ELR_ERROR (
    ELR_MESSAGE_ID
    ,VALIDATION_TYPE
    ,ERROR_CATEGORY
    ,ERROR_TYPE
    ,ERROR_TYPE_DETAIL
    ,PROCESSING_STEP
    ,FIELD
    ,FIELD_DESCRIPTION
    ,FIELD_VALUE
    ,ERROR_MSG
    ,INSERT_DATE
  )
VALUES (
  ~/message/errorRecord/ELR_MESSAGE_ID~
  , 'LEGACY'
  , ~/message/errorRecord/ERROR_CATEGORY~
  , 'LEGACY CONFORMANCE'
  , ~/message/errorRecord/ERROR_TYPE_DETAIL~
  , ~/message/errorRecord/PROCESSING_STEP~
  , ~/message/errorRecord/FIELD~
  , ~/message/errorRecord/FIELD_DESCRIPTION~

```

Configuration File: Database LookUp 2.xml

```

,`/message/errorRecord/FIELD_VALUE`
,`/message/errorRecord/ERROR_MSG`
,SYSDATETIME()
)</sql>
  <statement name="Update SUCCESS_FL" ide:type="executeSql" test="Equals(`/message/error
Record/ERROR_CATEGORY`, 'FATAL')\" ide:summary="Updates the SUCCESS_FL column in the ELR_MESSAGE
table if a FATAL error was recorded." ide:allowCompoundStatements="true">
    <sql>UPDATE ELR_MESSAGE SET
      SUCCESS_FL = 0,
      NBS_POLLING_ATTEMPTS = 100
    WHERE ID = `/message/errorRecord/ELR_MESSAGE_ID`</sql>
  </statement>
</statement>
</config>

```


Destinations

Name	Page
 no-op to Sink..... No-operation	179



ECLIR - ELR non-NBS Subscriptions

Route

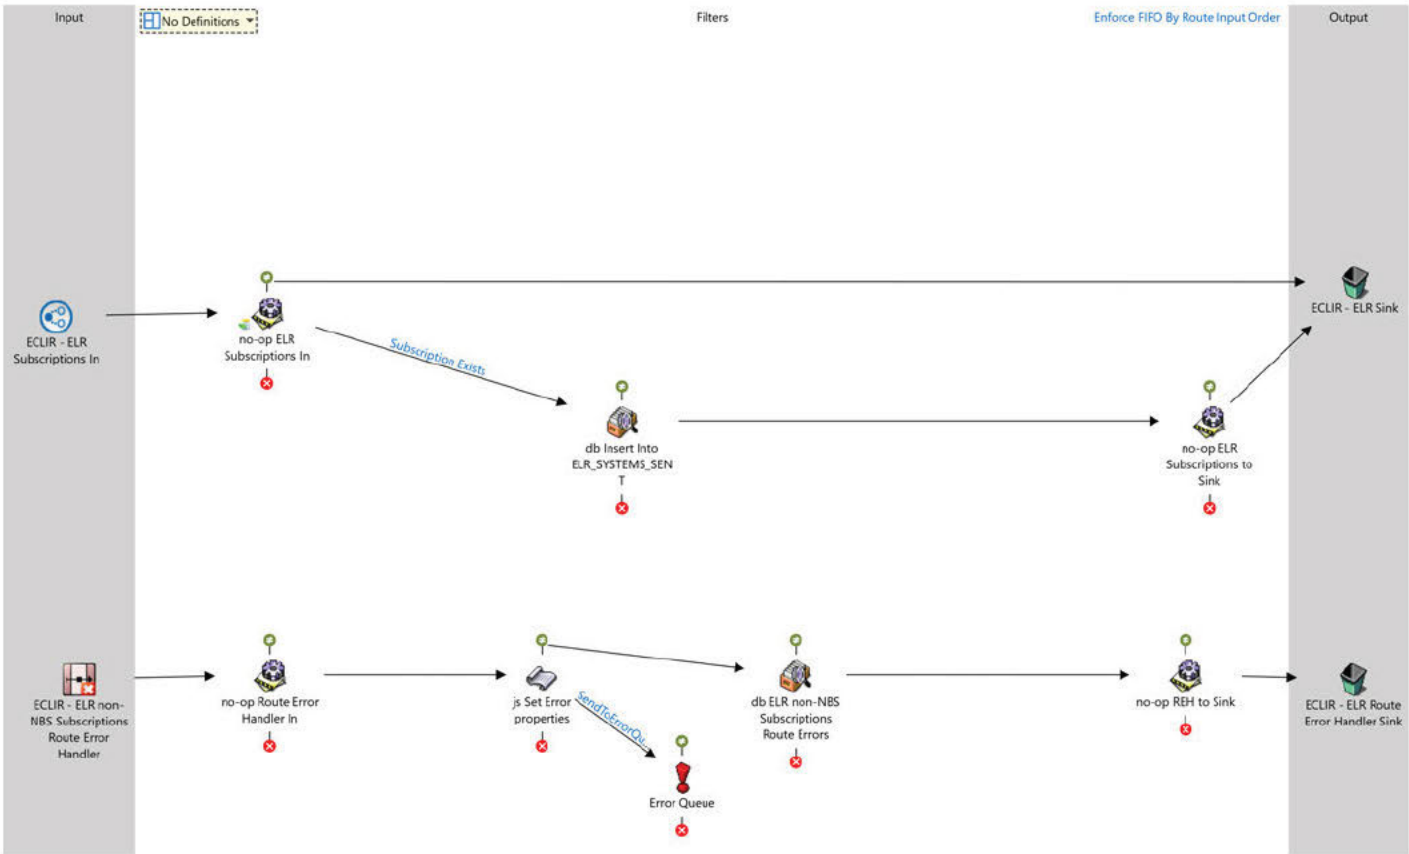

Notes

Purpose: This route receives ELR messages from the 8 -Subscriptions route in the legacy ELR configuration. A JavaScript filter extracts the subscription type from the message property 'subscribed' from the legacy route 8 - Subscriptions and writes it to the property nonNBSSystem to be used in the database update query. The Database Lookup filter inserts a record into the ELR_SYSTEMS_SENT table in the ECLIR database for messages sent to non-NBS systems.

Inputs

Inputs	Page
ECLIR - ELR Subscriptions In..... Dynamic Router	8

Outputs

Outputs	Page
ECLIR - ELR Sink..... Sink	14
ECLIR - ELR Route Error Handler Sink..... Sink	13

Filters

Name	Page
db ELR non-NBS Subscriptions Route Errors..... Database LookUp	190
db Insert Into ELR_SYSTEMS_SENT..... Database LookUp	192

Name	Page
 Error Queue..... Error Queue	192
 js Set Error properties..... JavaScript (v.1)	187
 no-op ELR Subscriptions In..... No-operation	189
 no-op ELR Subscriptions to Sink..... No-operation	188
 no-op REH to Sink..... No-operation	189
 no-op Route Error Handler In..... No-operation	192

Details

General	
Priority	Normal
Startup State	Startup Third
FIFO Mode	Enforce FIFO By Route Input Order
Stop route on error message	False



js Set Error properties

JavaScript (v.1)

On ECLIR - ELR non-NBS Subscriptions route

Filter

Notes**Purpose:** This JavaScript filter

Sets the property VALIDATION_TYPE with the type of validation error to be stored in the VALIDATION_TYPE column in the ELR_ERROR table. The type is set to 'Rhapsody' because the error is an internal Rhapsody error.

Sets the property ERROR_CATEGORY with the category of the error to be stored in the ERROR_CATEGORY column in the ELR_ERROR table. The category is set to 'FATAL' because the message stops processing.

Sets the property ERROR_TYPE with the type of error to be stored in the ERROR_TYPE column in the ELR_ERROR table. The type is set to 'Rhapsody' because the error is an internal Rhapsody error.

Sets the property PROCESSING_STEP with the Rhapsody route name and filter name to be stored in the PROCESSING_STEP column in the ELR_ERROR table.

Sets the property ERROR_MSG with the Rhapsody generated errors to be stored in the ERROR_MSG column in the ELR_ERROR table.

Sets the property [REDACTED] ENVIRONMENT with the Rhapsody Variable ECLIR_[REDACTED] ENVIRONMENT to be stored in the [REDACTED] ENVIRONMENT column in the ELR_MESSAGE table.

Javascript

```
//
=====
// _____ INITIAL VARIABLES (start
)
//
=====

var next = output.append(input[0]);

//
=====
// _____ INITIAL VARIABLES (end
)
//
=====

//
=====
// _____ SET MESSAGE PROPERTIES FOR DB INSERT (start
)
//
=====

next.setProperty('VALIDATION_TYPE', 'Rhapsody');
next.setProperty('ERROR_CATEGORY', 'FATAL');
next.setProperty('ERROR_TYPE', 'Rhapsody');
next.setProperty('PROCESSING_STEP', 'Parsing: ECLIR - ELR non-NBS Subscriptions (Route) ->' +
  next.getProperty('rhapsody:ErrorFilterName') + ' (Filter)');
```

Javascript

```
//next.setProperty('ERROR_MSG', 'Internal Rhapsody Route Error. Message processing could not
continue: ' + next.getErrors());
var ERROR_MSG = 'Internal Rhapsody Route Error. Message processing could not continue: ' + next
.getErrors();
next.setProperty('ERROR_MSG', ERROR_MSG);

//Send the message to the Error Queue if it was caused by a database connectivity issue.
if (ERROR_MSG.indexOf('The connection is broken and recovery is not possible.') != -1 || ERROR
_MSG == 'Internal Rhapsody Route Error. Message processing could not continue: ') {
    next.setProperty('SendToErrorQueue', true);
}

//This is a Rhapsody variable that should be set up during configuration.
var █████_ENVIRONMENT = getVariable("ECLIR_████_ENVIRONMENT");
if (████_ENVIRONMENT == null || █████_ENVIRONMENT == "") {
    █████_ENVIRONMENT = "VARIABLE NOT SETUP IN RHAPSODY";
}
next.setProperty('████_ENVIRONMENT', █████_ENVIRONMENT);

//
=====
//_____ SET MESSAGE PROPERTIES FOR DB INSERT (end
)
//
=====
```

Destinations

Name	Page
Output Condition	
SendToErrorQueue = 'true' ignoring case	
🔗 Error Queue..... Error Queue	192
Error Connector	Page
🔗 db ELR non-NBS Subscriptions Route Errors..... Database LookUp	190



no-op ELR Subscriptions to Sink

Filter

No-operation

On ECLIR - ELR non-NBS Subscriptions route

Notes

Purpose: This No-operation filter sends messages to the *ECLIR - ELR Sink* after the messages have been updated in the ELR_MESSAGE table in the ECLIR database.

Destinations

Name	Page
 ECLIR - ELR Sink..... Sink	14



no-op ELR Subscriptions In

Filter

No-operation

On ECLIR - ELR non-NBS Subscriptions route

Notes

Purpose: This No-operation filter receives ELR messages from the *8 -Subscriptions* route in the legacy  ELR configuration. There is a 3 minute timed hold on this filter to prevent "race" conditions for messages to insure a unique message key ID has been created in the ELR_MESSAGE table for that message in the ECLIR database.

Message Collector: Timed Hold

Message Set Timeout	3
Timeout Units	Minutes
Timeout Destination	Process as Usual

Destinations

Name	Page
Output Condition: Subscription Exists	
subscribed != '' ignoring case	
 db Insert Into ELR_SYSTEMS_SENT..... Database LookUp	192
Error Connector	Page
 ECLIR - ELR Sink..... Sink	14



no-op REH to Sink

Filter

No-operation

On ECLIR - ELR non-NBS Subscriptions route

Notes

Purpose: This No-operation filter sends messages from the *ECLIR - ELR non-NBS Subscriptions Route Error Handler* to the *ECLIR - ELR Route Error Handler Sink* after the errors have been stored into the ELR_ERROR table in the ECLIR database.

Destinations

Name	Page
 ECLIR - ELR Route Error Handler Sink..... Sink	13



db ELR non-NBS Subscriptions Route Errors

Filter

Database LookUp

On ECLIR - ELR non-NBS Subscriptions route

Notes

Purpose: This Database Lookup filter inserts an error record into the ELR_ERROR table in the ECLIR database in the event an unhandled error is caught by the *ECLIR - ELR non-NBS Reconcile Route Error Handler*.

Configuration Properties

Maximum Concurrency	1	
Database	[REDACTED]	
Host	[REDACTED]	
Port	[REDACTED]	
Database Name	[REDACTED]	
Username	[REDACTED]	
Password	[REDACTED]	
Additional Connection Properties	Property Name	Property Value
	[REDACTED]	[REDACTED]
Configuration File	[REDACTED]	
Message Type	Plain text	
Definition		
Query Timeout		
Deadlock Retry Attempts	5	
Deadlock Retry Delay	100	
Socket Timeout	0	

Configuration File: Database LookUp 2.xml

```
<statement name="ELR_MESSAGE ID Does Not exist" ide:type="executeSql" test="Null($ELR_MESSAGE_ID)" ide:summary="The ELR_MESSAGE ID does not exist in the ELR_MESSAGE table. Create an entry in that table to create an ID." ide:allowCompoundStatements="true">
  <sql>INSERT INTO ELR_MESSAGE (
    ORIGINAL_MESSAGE
  , [REDACTED]_ENVIRONMENT
```

Configuration File: Database LookUp 2.xml

```

,SUCCESS_FL
,INSERT_DATE
)
VALUES (
  $messageContent
, [REDACTED] ENVIRONMENT
, 0
, SYSDATETIME()
) </sql>
  <statement ide:type="compoundSqlStatement">
    <sql>SELECT \@ \@IDENTITY AS ELR_MESSAGE_ID</sql>
    <substituteColumn name="ELR_MESSAGE_ID">$ELR_MESSAGE_ID</substituteColumn>
  </statement>
  <statement name="Insert into ELR_ERROR table" ide:type="executeSql" test="NotNull(@ELR_MESSAGE_ID)" ide:summary="Add error record to the ELR_ERROR table." ide:allowCompoundStatements="true">
    <sql>INSERT INTO ELR_ERROR (
      ELR_MESSAGE_ID
      , VALIDATION_TYPE
      , ERROR_CATEGORY
      , ERROR_TYPE
      , PROCESSING_STEP
      , ERROR_MSG
      , INSERT_DATE
    )
    VALUES (
      @ELR_MESSAGE_ID
      , $VALIDATION_TYPE
      , $ERROR_CATEGORY
      , $ERROR_TYPE
      , $PROCESSING_STEP
      , $ERROR_MSG
      , SYSDATETIME()
    ) </sql>
  </statement>
  </statement>
  <statement name="Insert into ELR_ERROR table" ide:type="executeSql" test="NotNull($ELR_MESSAGE_ID)" ide:summary="Add error record to the ELR_ERROR table." ide:allowCompoundStatements="true">
    <sql>INSERT INTO ELR_ERROR (
      ELR_MESSAGE_ID
      , VALIDATION_TYPE
      , ERROR_CATEGORY
      , ERROR_TYPE
      , PROCESSING_STEP
      , ERROR_MSG
      , INSERT_DATE
    )
    VALUES (
      $ELR_MESSAGE_ID
      , $VALIDATION_TYPE
      , $ERROR_CATEGORY
      , $ERROR_TYPE
      , $PROCESSING_STEP
      , $ERROR_MSG
      , SYSDATETIME()
    ) </sql>
  </statement>

```

Configuration File: Database LookUp 2.xml

</config>

Destinations

Name	Page
 no-op REH to Sink..... No-operation	189

**Error Queue**

Filter

Error Queue

On ECLIR - ELR non-NBS Subscriptions route

Configuration Properties

Error Message	Sent from error filter
---------------	------------------------

**no-op Route Error Handler In**

Filter

No-operation

On ECLIR - ELR non-NBS Subscriptions route

Notes

Purpose: This No-operation filter receives messages from the *ECLIR - ELR non-NBS Subscriptions Route Error Handler* when an unhandled error occurs anywhere in the route.

Destinations

Name	Page
 js Set Error properties..... JavaScript (v.1)	187

**db Insert Into ELR_SYSTEMS_SENT**

Filter

Database LookUp

On ECLIR - ELR non-NBS Subscriptions route

Notes

Purpose: This Database Lookup filter first queries the ELR_MESSAGE table to retrieve the message's unique ID based on the MSH-10 and MSH-4.2 values. It then inserts a record in the ELR_SYSTEMS_SENT table in the ECLIR database for messages sent to non-NBS systems.

Configuration Properties		
Maximum Concurrency	1	
Database	[REDACTED]	
Host	[REDACTED]	
Port	[REDACTED]	
Database Name	[REDACTED]	
Username	[REDACTED]	
Password	[REDACTED]	
Additional Connection Properties	Property Name	Property Value
	[REDACTED]	[REDACTED]
Configuration File	[REDACTED]	
Definition	ECLIR_ELOR_ORU_2.5.1_Parsing.s3d	
Query Timeout		
Deadlock Retry Attempts	5	
Deadlock Retry Delay	100	
Socket Timeout	0	
Configuration File: Database LookUp.xml		
[REDACTED]		
<pre><statement name="Query for ELR_MESSAGE_ID" ide:type="executeSql" ide:summary="Query for the ELR_MESSAGE_ID to be used to insert into the ELR_SYSTEMS_SENT table in ECLIR." ide:allowComp oundStatements="true"> <sql>SELECT TOP(1) ID AS ELR_MESSAGE_ID FROM ELR_MESSAGE WHERE MSH_10 = @MSH.MessageControlID AND MSH_4_2 = @MSH.SendingFacility.UniversalID</sql> <resultSet>AllowNullResultSet</resultSet> <statement name="Insert Into ELR_SYSTEMS_SENT" ide:type="executeSql" test="NotNull(@ELR_MES SAGE_ID)" ide:summary="Updates the ELR_MESSAGE record based on the MSH-10 and MSH-4.2 for mes sages sent to non-NBS systems." ide:allowCompoundStatements="true"> <sql>INSERT INTO ELR_SYSTEMS_SENT (ELR_MESSAGE_ID ,SYSTEM_SENT ,SYSTEM_SENT_DATE) VALUES (@ELR_MESSAGE_ID ,\$subscribed ,SYSDATETIME())</sql> </statement> </statement> </config></pre>		

Destinations

Name	Page
 no-op ELR Subscriptions to Sink..... No-operation	188



ECLIR - ELR Parsing

Folder


Full Path /ECLIR/Route__ECLIR/ELR/ECLIR - ELR Parsing

Summary	
Routes (4)	
Folder Contents	Page
ECLIR - ELR 2.3.1 Message Parsing.....Route	195
ECLIR - ELR 2.5.1 Message Parsing.....Route	233
ECLIR - ELR Message Parsing.....Route	286
ECLIR - ELR Transformed Messages.....Route	298



ECLIR - ELR 2.3.1 Message Parsing

Route

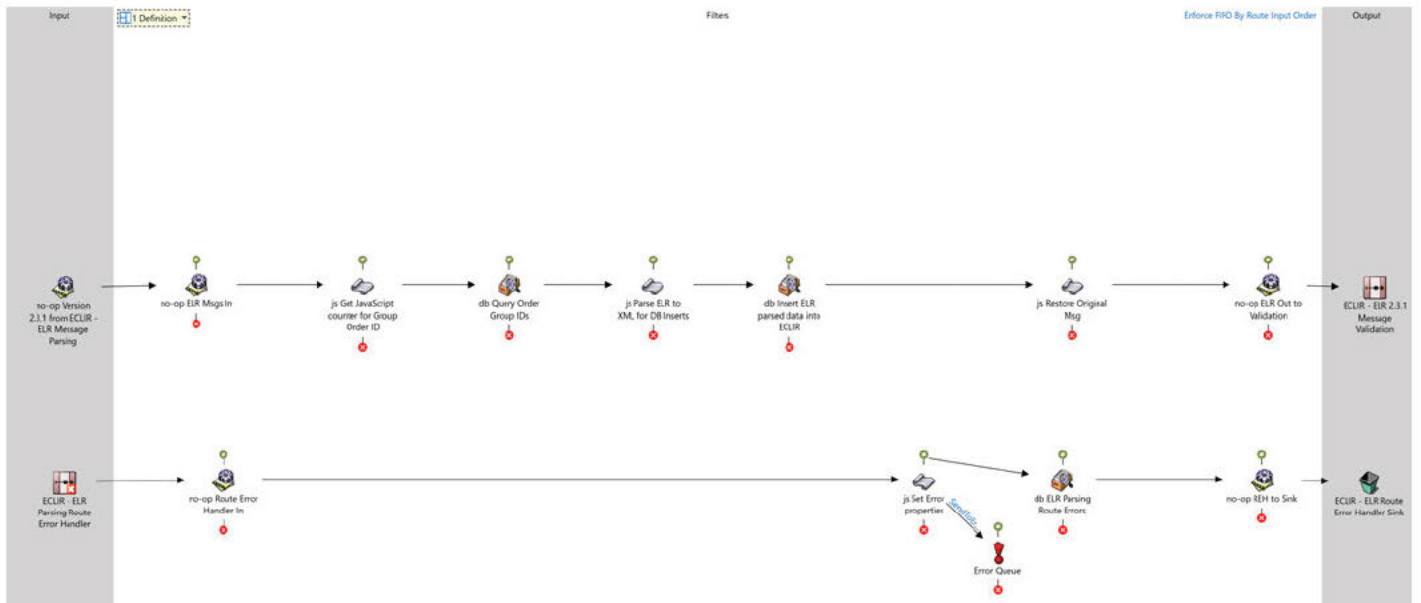

Notes

Purpose: This route receives HL7 v2.3.1 messages from the *ECLIR - ELR Message Parsing* route. The data in the messages is parsed out and inserted into the relevant ELR tables in the ECLIR database.

Inputs

no-op Version 2.3.1 (filter from "ECLIR - ELR Message Parsing")..... No-operation [296](#)

Outputs

ECLIR - ELR 2.3.1 Message Validation..... Route [353](#)

ECLIR - ELR Route Error Handler Sink..... Sink [13](#)

Filters

Name

Page

db ELR Parsing Route Errors..... Database Lookup	215
db Insert ELR parsed data into ECLIR..... Database Lookup	200
db Query Order Group IDs..... Database Lookup	197
Error Queue..... Error Queue	212
js Get JavaScript counter for Group Order ID..... JavaScript (v.1)	212
js Parse ELR to XML for DB Inserts..... JavaScript (v.1)	217
js Restore Original Msg..... JavaScript (v.1)	214
js Set Error properties..... JavaScript (v.1)	198
no-op ELR Msgs In..... No-operation	211

Name		Page
 no-op ELR Out to Validation.....	No-operation	232
 no-op REH to Sink.....	No-operation	213
 no-op Route Error Handler In.....	No-operation	211

Details

General	
Priority	Normal
Startup State	Startup Third
FIFO Mode	Enforce FIFO By Route Input Order
Stop route on error message	False



db Query Order Group IDs

Filter

Database LookUp

On ECLIR - ELR 2.3.1 Message Parsing route

Notes

Purpose: In this Database Lookup filter:

A SELECT query searches for an existing order group ID from the ELR_ORDER_GROUP table based on the Filler Order Number (OBR-3.1) and the Facility ID (MSH-4.2).

If the ID is found, the following concatenated string is assigned to the Rhapsody variable list ORDER_GROUP_IDs[].

Filler Order Number (OBR-3.1) + "==" + ORDER_GROUP_ID (field)

If the ID is not found, a new one is created using the message property newOrderGroupId as the new ORDER_GROUP_ID field. The new ID is used to create the following concatenated string and is assigned to the Rhapsody variable list ORDER_GROUP_IDs[].

Filler Order Number (OBR-3.1) + "==" + ORDER_GROUP_ID (field)

Configuration Properties

Maximum Concurrency	1	
Database		
Host		
Port		
Database Name		
Username		
Password		
Additional Connection Properties	Property Name	Property Value
Configuration File		
Definition	ECLIR_ELORU_2.3.1_Parsing.s3d	
Query Timeout		
Deadlock Retry Attempts	5	
Deadlock Retry Delay	100	
Socket Timeout	0	

Configuration File: Database LookUp.xml

```

<statement name="PATIENT_RESULT_GROUP" ide:type="executeSql" iterate="PATIENT_RESULT" ide
:summary="Second pass through the message to add/update Order Group IDs." ide:allowCompoundStat
ements="true" user:iterationRootMessagePath="ORUR01">
  <statement name="Get Order Group ID if it exists" ide:type="executeSql" iterate="PAT
IENT_RESULT.ORDER_OBSERVATION" ide:summary="Get the Order Group ID based on the MSH-4.2 and
the OBR-3.1 if it exists." ide:allowCompoundStatements="true" user:iterationRootMessagePath
="ORUR01">
    <sql>SELECT TOP (1) ORDER_GROUP_ID AS OrderGroupID, RELATED_FILLER_ORDER_NUMBER,
CONCAT(RELATED_FILLER_ORDER_NUMBER, '==', ORDER_GROUP_ID) AS ORDER_ID_PAIR

```

Configuration File: Database LookUp.xml

```

FROM ELR_ORDER_GROUP
WHERE RELATED_SENDING_FACILITY = @MSH.SendingFacility.UniversalID
  AND RELATED_FILLER_ORDER_NUMBER = @PATIENT_RESULT.ORDER_OBSERVATION.OBR.FillerOrderNumber
.EntityIdentifier</sql>
  <statement id:type="resultSubstitution" test="NotNull(@ORDER_ID_PAIR)">
    <substituteColumn name="ORDER_ID_PAIR">$ORDER_GROUP_IDS[]</substituteColumn>
  </statement>
  <statement id:type="resultSubstitution" test="NotNull(@OrderGroupId)">
    <substituteColumn name="OrderGroupId">$newOrderGroupId</substituteColumn>
  </statement>
  <resultSet>AllowNullResultSet</resultSet>
  <statement name="Order Group ID not found" id:type="executeSql" test="Null(@ORDER_ID_PAIR)" id:summary="Executes if the Order Group ID was not found." id:allowCompoundStatements="true">
    <statement name="Create ORDER_GROUP_ID" id:type="executeSql" iterate="PATIENT_RESULT.ORDER_OBSERVATION" id:summary="If ORDER_GROUP_ID was not found in the previous query, insert a new record in ELR_ORDER_GROUP for the order group." id:allowCompoundStatements="true" user:iterationRootMessagePath="ORUR01">
      <sql>INSERT INTO ELR_ORDER_GROUP (
ORDER_GROUP_ID
,RELATED_FILLER_ORDER_NUMBER
,RELATED_SENDING_FACILITY
)
VALUES (
  $newOrderGroupId
  ,@PATIENT_RESULT.ORDER_OBSERVATION.OBR.FillerOrderNumber.EntityIdentifier
  ,@MSH.SendingFacility.UniversalID
)</sql>
      <statement id:type="compoundSqlStatement">
        <sql>SELECT CONCAT(@PATIENT_RESULT.ORDER_OBSERVATION.OBR.FillerOrderNumber.EntityIdentifier, '==', $newOrderGroupId)
AS ORDER_ID_PAIR_new</sql>
        <statement id:type="resultSubstitution" test="NotNull(@ORDER_ID_PAIR_new)">
          <substituteColumn name="ORDER_ID_PAIR_new">$ORDER_GROUP_IDS[]</substituteColumn>
        </statement>
      </statement>
    </statement>
  </statement>
</statement>
</config>

```

Destinations

Name	Page
js Parse ELR to XML for DB Inserts..... JavaScript (v.1)	217

**js Set Error properties****JavaScript (v.1)**

On ECLIR - ELR 2.3.1 Message Parsing route

Filter

Notes

Notes

Purpose: This JavaScript filter

Sets the property `VALIDATION_TYPE` with the type of validation error to be stored in the `VALIDATION_TYPE` column in the `ELR_ERROR` table. The type is set to 'Rhapsody' because the error is an internal Rhapsody error.

Sets the property `ERROR_CATEGORY` with the category of the error to be stored in the `ERROR_CATEGORY` column in the `ELR_ERROR` table. The category is set to 'FATAL' because the message stops processing.

Sets the property `ERROR_TYPE` with the type of error to be stored in the `ERROR_TYPE` column in the `ELR_ERROR` table. The type is set to 'Rhapsody' because the error is an internal Rhapsody error.

Sets the property `PROCESSING_STEP` with the Rhapsody route name and filter name to be stored in the `PROCESSING_STEP` column in the `ELR_ERROR` table.

Sets the property `ERROR_MSG` with the Rhapsody generated errors to be stored in the `ERROR_MSG` column in the `ELR_ERROR` table.

Sets the property `ENVIRONMENT` with the Rhapsody Variable `ECLIR_ENVIRONMENT` to be stored in the `ENVIRONMENT` column in the `ELR_MESSAGE` table.

Sets the content of the message back to the original to be stored in the `ORIGINAL_MESSAGE` column in the `ELR_MESSAGE` table if needed.

Javascript

```
//
=====
// _____ INITIAL VARIABLES (start
)
//
=====

var next = output.append(input[0]);

//
=====
// _____ INITIAL VARIABLES (end
)
//
=====

//
=====
// _____ SET MESSAGE PROPERTIES FOR DB INSERT (start
)
//
=====

next.setProperty('VALIDATION_TYPE', 'Rhapsody');
next.setProperty('ERROR_CATEGORY', 'FATAL');
next.setProperty('ERROR_TYPE', 'Rhapsody');
next.setProperty('PROCESSING_STEP', 'Parsing: ECLIR - ELR 2.3.1 Message Parsing (Route) ->' +
  next.getProperty('rhapsody:ErrorFilterName') + ' (Filter)');
//next.setProperty('ERROR_MSG', 'Internal Rhapsody Route Error. Message processing could not
  continue: ' + next.getErrors());
var ERROR_MSG = 'Internal Rhapsody Route Error. Message processing could not continue: ' + next
  .getErrors();
next.setProperty('ERROR_MSG', ERROR_MSG);
```

Javascript

```
//Send the message to the Error Queue if it was caused by a database connectivity issue.
if (ERROR_MSG.indexOf('The connection is broken and recovery is not possible.') != -1 || ERROR
_MSG == 'Internal Rhapsody Route Error. Message processing could not continue: ') {
    next.setProperty('SendToErrorQueue', true);
}

//This is a Rhapsody variable that should be set up during configuration.
var [REDACTED]_ENVIRONMENT = getVariable("ECLIR [REDACTED] ENVIRONMENT");
if ([REDACTED]_ENVIRONMENT == null || [REDACTED]_ENVIRONMENT == "") {
    [REDACTED]_ENVIRONMENT = "VARIABLE NOT SETUP IN RHAPSODY";
}
next.setProperty('[REDACTED]_ENVIRONMENT', [REDACTED]_ENVIRONMENT);

// Load the snapshot back into the message.
if (next.getProperty("SnapshotIDofOrigMsg") != null) {
    next.text = next.loadMessageSnapshotForId(next.getProperty("SnapshotIDofOrigMsg")).text;
}

//
=====
// _____ SET MESSAGE PROPERTIES FOR DB INSERT (end
//
=====
```

Destinations

Name	Page
Output Condition	
SendToErrorQueue = 'true' ignoring case	
🔔 Error Queue..... Error Queue	212
Error Connector	Page
🔗 db ELR Parsing Route Errors..... Database Lookup	215

**db Insert ELR parsed data into ECLIR**

Filter

Database Lookup

On ECLIR - ELR 2.3.1 Message Parsing route

Notes

Purpose: This Database Lookup filter loops through the XML flat file created in the *js Parse ELR to XML for DB Inserts* JavaScript filter. The parsed message data is written to the corresponding ELR tables in the ECLIR database.

Configuration Properties

Maximum Concurrency	1
Database	[REDACTED]

Configuration Properties		
Host	[REDACTED]	
Port	[REDACTED]	
Database Name	[REDACTED]	
Username	[REDACTED]	
Password	[REDACTED]	
Additional Connection Properties	Property Name	Property Value
	[REDACTED]	[REDACTED]
Configuration File	[REDACTED]	
Message Type	XML	
Definition		
Query Timeout		
Deadlock Retry Attempts	5	
Deadlock Retry Delay	100	
Socket Timeout	0	
Configuration File: Database LookUp.xml		

```
<statement name="Insert Into ELR_MESSAGE Table" ide:type="executeSql" ide:summary="Insert
data into the ELR_MESSAGE table. One record per ELR message." ide:allowCompoundStatements
="true">
```

```
<sql>INSERT INTO ELR_MESSAGE (
ORIGINAL_MESSAGE_FORMAT
,ORIGINAL_MESSAGE
,BASE_FILENAME
,[REDACTED] ENVIRONMENT
,SUCCESS_FL
,MSH_1
,MSH_2
,MSH_3_1
,MSH_3_2
,MSH_3_3
,MSH_4_1
,MSH_4_2
,MSH_4_3
,MSH_5_1
,MSH_5_2
,MSH_5_3
,MSH_6_1
,MSH_6_2
,MSH_6_3
,MSH_7
,MSH_7_CONVERTED
,MSH_9_1
,MSH_9_2
,MSH_9_3
,MSH_10
,MSH_11
,MSH_12_1
,MSH_15
```

Configuration File: Database LookUp.xml

```

    ,MSH_16
    ,INSERT_DATE
)
VALUES (
  ~/message/rowELR_MESSAGE/ORIGINAL_MESSAGE_FORMAT~
  ,$$$OriginalMsg
  ,LEFT($FullFilename,1000)
  ,~/message/rowELR_MESSAGE/██████ ENVIRONMENT~
  ,~/message/rowELR_MESSAGE/SUCCESS_FL~
  ,~/message/rowELR_MESSAGE/MSH_1~
  ,~/message/rowELR_MESSAGE/MSH_2~
  ,~/message/rowELR_MESSAGE/MSH_3_1~
  ,~/message/rowELR_MESSAGE/MSH_3_2~
  ,~/message/rowELR_MESSAGE/MSH_3_3~
  ,~/message/rowELR_MESSAGE/MSH_4_1~
  ,~/message/rowELR_MESSAGE/MSH_4_2~
  ,~/message/rowELR_MESSAGE/MSH_4_3~
  ,~/message/rowELR_MESSAGE/MSH_5_1~
  ,~/message/rowELR_MESSAGE/MSH_5_2~
  ,~/message/rowELR_MESSAGE/MSH_5_3~
  ,~/message/rowELR_MESSAGE/MSH_6_1~
  ,~/message/rowELR_MESSAGE/MSH_6_2~
  ,~/message/rowELR_MESSAGE/MSH_6_3~
  ,~/message/rowELR_MESSAGE/MSH_7~
  ,~/message/rowELR_MESSAGE/MSH_7_CONVERTED~
  ,~/message/rowELR_MESSAGE/MSH_9_1~
  ,~/message/rowELR_MESSAGE/MSH_9_2~
  ,~/message/rowELR_MESSAGE/MSH_9_3~
  ,~/message/rowELR_MESSAGE/MSH_10~
  ,~/message/rowELR_MESSAGE/MSH_11~
  ,~/message/rowELR_MESSAGE/MSH_12_1~
  ,~/message/rowELR_MESSAGE/MSH_15~
  ,~/message/rowELR_MESSAGE/MSH_16~
  ,SYSDATETIME()
)
</sql>
<statement ide:type="compoundSqlStatement">
  <sql>SELECT \@\@IDENTITY AS ELR_MESSAGE_ID</sql>
  <substituteColumn name="ELR_MESSAGE_ID">$ELR_MESSAGE_ID</substituteColumn>
</statement>
<statement name="PATIENT_RESULT_GROUP" ide:type="executeSql" iterate="PATIENT_RESULT_GROUP"
ide:allowCompoundStatements="true" user:iterationRootMessagePath="message">
  <statement name="Insert Into ELR_MESSAGE_PID Table" ide:type="executeSql" ide:summary
="Insert data into the ELR_MESSAGE_PID table. One PID segment to one PATIENT_RESULT group."
ide:allowCompoundStatements="true">
    <sql>INSERT INTO ELR_MESSAGE_PID (
ELR_MESSAGE_ID
,PID_1
,PID_3
,PID_3_1_RE1
,PID_3_5_RE1
,PID_3_1_RE2
,PID_3_5_RE2
,PID_3_1_RE3
,PID_3_5_RE3
,PID_5
,PID_6_1_1
,PID_7
,PID_7_CONVERTED

```

Configuration File: Database LookUp.xml

```

,PID_8
,PID_10
,PID_10_1_LIST
,PID_10_2_LIST
,PID_10_3_LIST
,PID_10_MULTI_FL
,PID_11
,PID_11_PRIMARY_STATE
,PID_11_PRIMARY_COUNTY
,PID_13
,PID_14
,PID_15
,PID_16
,PID_17
,PID_18_1
,PID_21_1_LIST
,PID_22
,PID_22_1_LIST
,PID_22_2_LIST
,PID_22_3_LIST
,PID_22_MULTI_FL
,PID_23
,PID_24
,PID_25
,PID_26
,PID_27
,PID_29
,PID_29_CONVERTED
,PID_30
,NTE_INCLUDED_FL
,PV1_1
,PV1_2
,PV1_4
,PV1_14
,PV1_44
,PV1_44_CONVERTED
,PV1_45
,PV1_45_CONVERTED
,INSERT_DATE
)
VALUES (
@ELR_MESSAGE_ID
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_1~
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_3~
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_3_1_RE1~
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_3_5_RE1~
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_3_1_RE2~
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_3_5_RE2~
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_3_1_RE3~
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_3_5_RE3~
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_5~
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_6_1_1~
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_7~
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_7_CONVERTED~
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_8~
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_10~
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_10_1_LIST~
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_10_2_LIST~

```

Configuration File: Database LookUp.xml

```

,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_10_3_LIST`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_10_MULTI_FL`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_11`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_11_PRIMARY_STATE`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_11_PRIMARY_COUNTY`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_13`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_14`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_15`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_16`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_17`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_18_1`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_21_1_LIST`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_22`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_22_1_LIST`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_22_2_LIST`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_22_3_LIST`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_22_MULTI_FL`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_23`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_24`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_25`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_26`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_27`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_29`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_29_CONVERTED`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PID_30`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/NTE_INCLUDED_FL`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PV1_1`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PV1_2`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PV1_4`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PV1_14`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PV1_44`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PV1_44_CONVERTED`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PV1_45`
,~/message/PATIENT_RESULT_GROUP/PATIENT/rowELR_MESSAGE_PID/PV1_45_CONVERTED`
,SYSDATETIME()
) </sql>

<statement ide:type="compoundSqlStatement">
  <sql>SELECT \@ \@IDENTITY AS ELR_MESSAGE_PID_ID</sql>
</statement>
</statement>
<statement name="Insert Into ELR_MESSAGE_NK1 Table" ide:type="executeSql" iterate="PATIENT_RESULT_GROUP/PATIENT/NK1_GROUP/rowELR_MESSAGE_NK1" ide:summary="Insert data into the ELR_MESSAGE_NK1 table. Many NK1 segments to PATIENT group." ide:allowCompoundStatements="true" user:iterationRootMessagePath="message">
  <sql>INSERT INTO ELR_MESSAGE_NK1 (
    ELR_MESSAGE_ID
    ,ELR_MESSAGE_PID_ID
    ,NK1_1
    ,NK1_2
    ,NK1_3_1
    ,NK1_3_2
    ,NK1_3_3
    ,NK1_4
    ,NK1_5
    ,NK1_13
    ,NK1_20
    ,NK1_30
    ,NK1_31

```

Configuration File: Database LookUp.xml

```

,NK1_32
,INSERT_DATE
)
VALUES (
  @ELR_MESSAGE_ID
  ,@ELR_MESSAGE_PID_ID
  ,~/message/PATIENT_RESULT_GROUP/PATIENT/NK1_GROUP/rowELR_MESSAGE_NK1/NK1_1`
  ,~/message/PATIENT_RESULT_GROUP/PATIENT/NK1_GROUP/rowELR_MESSAGE_NK1/NK1_2`
  ,~/message/PATIENT_RESULT_GROUP/PATIENT/NK1_GROUP/rowELR_MESSAGE_NK1/NK1_3_1`
  ,~/message/PATIENT_RESULT_GROUP/PATIENT/NK1_GROUP/rowELR_MESSAGE_NK1/NK1_3_2`
  ,~/message/PATIENT_RESULT_GROUP/PATIENT/NK1_GROUP/rowELR_MESSAGE_NK1/NK1_3_3`
  ,~/message/PATIENT_RESULT_GROUP/PATIENT/NK1_GROUP/rowELR_MESSAGE_NK1/NK1_4`
  ,~/message/PATIENT_RESULT_GROUP/PATIENT/NK1_GROUP/rowELR_MESSAGE_NK1/NK1_5`
  ,~/message/PATIENT_RESULT_GROUP/PATIENT/NK1_GROUP/rowELR_MESSAGE_NK1/NK1_13`
  ,~/message/PATIENT_RESULT_GROUP/PATIENT/NK1_GROUP/rowELR_MESSAGE_NK1/NK1_20`
  ,~/message/PATIENT_RESULT_GROUP/PATIENT/NK1_GROUP/rowELR_MESSAGE_NK1/NK1_30`
  ,~/message/PATIENT_RESULT_GROUP/PATIENT/NK1_GROUP/rowELR_MESSAGE_NK1/NK1_31`
  ,~/message/PATIENT_RESULT_GROUP/PATIENT/NK1_GROUP/rowELR_MESSAGE_NK1/NK1_32`
  ,SYSDATETIME()
)
</sql>
</statement>
<statement name="ORDER_OBSERVATION_GROUP" ide:type="executeSql" iterate="PATIENT_RESULT
_GROUP/ORDER_OBSERVATION_GROUP" ide:allowCompoundStatements="true" user:iterationRootMessage
Path="message">
  <statement name="Insert Into ELR_MESSAGE_OBR Table" ide:type="executeSql" ide:summary
="Insert data into the ELR_MESSAGE_OBR table. Many OBR segments to PATIENT_RESULT.ORDER_OBS
ERVATION group." ide:allowCompoundStatements="true">
    <sql>INSERT INTO ELR_MESSAGE_OBR (
      ELR_MESSAGE_ID
      ,ELR_MESSAGE_PID_ID
      ,FILLER_ORDER_NUMBER
      ,ORDER_GROUP_ID
      ,ORC_1
      ,ORC_2_1
      ,ORC_2_2
      ,ORC_2_3
      ,ORC_2_4
      ,ORC_3_1
      ,ORC_3_2
      ,ORC_3_3
      ,ORC_3_4
      ,ORC_4_1
      ,ORC_5
      ,ORC_6
      ,ORC_8
      ,ORC_9
      ,ORC_10
      ,ORC_11
      ,ORC_12
      ,ORC_13
      ,ORC_14
      ,ORC_15
      ,ORC_16
      ,ORC_17
      ,ORC_18
      ,ORC_19
      ,ORC_21
      ,ORC_22

```

Configuration File: Database LookUp.xml

```

,ORC_23
,ORC_24
,OBR_1
,OBR_2_1
,OBR_2_2
,OBR_2_3
,OBR_2_4
,OBR_3_1
,OBR_3_2
,OBR_3_3
,OBR_3_4
,OBR_4_1
,OBR_4_2
,OBR_4_3
,OBR_4_4
,OBR_4_5
,OBR_4_6
,OBR_7
,OBR_7_CONVERTED
,OBR_8
,OBR_10
,OBR_11
,OBR_12_1
,OBR_12_2
,OBR_13
,OBR_15
,OBR_15_1_1
,OBR_15_1_2
,OBR_15_1_3
,OBR_15_4_1
,OBR_15_4_2
,OBR_15_4_3
,OBR_16
,OBR_17
,OBR_18
,OBR_19
,OBR_20
,OBR_21
,OBR_22
,OBR_22_CONVERTED
,OBR_24
,OBR_25
,OBR_26_1_1
,OBR_26_1_2
,OBR_26_1_3
,OBR_26_1_4
,OBR_26_1_5
,OBR_26_1_6
,OBR_26_2
,OBR_26_3
,OBR_28
,OBR_29_2_1
,OBR_31
,OBR_32_1_1
,OBR_32_1_2
,OBR_32_1_3
,OBR_32_1_4
,OBR_32_1_5

```

Configuration File: Database LookUp.xml

```

,OBR_32_1_6
,OBR_32_1_9
,OBR_32_1_10
,OBR_32_1_11
,OBR_33
,OBR_34
,OBR_35
,OBR_36
,OBR_39
,OBR_44
,OBR_45
,NTE_INCLUDED_FL
,INSERT_DATE
)
VALUES (
  @ELR_MESSAGE_ID
  ,@ELR_MESSAGE_PID_ID
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/FILLER_ORDER
  _NUMBER`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORDER_GROUP_ID`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_1`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_2_1`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_2_2`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_2_3`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_2_4`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_3_1`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_3_2`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_3_3`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_3_4`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_4_1`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_5`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_6`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_8`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_9`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_10`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_11`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_12`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_13`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_14`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_15`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_16`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_17`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_18`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_19`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_21`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_22`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_23`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/ORC_24`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/OBR_1`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/OBR_2_1`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/OBR_2_2`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/OBR_2_3`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/OBR_2_4`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/OBR_3_1`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/OBR_3_2`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/OBR_3_3`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/OBR_3_4`
  ,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/rowELR_MESSAGE_OBR/OBR_4_1`

```

Configuration File: Database LookUp.xml

[illegible]

Configuration File: Database LookUp.xml

```

,SYSDATETIME()
)/sql>
    <statement ide:type="compoundSqlStatement">
        <sql>SELECT \@ \@IDENTITY AS ELR_MESSAGE_OBR_ID</sql>
    </statement>
</statement>
<statement name="OBSERVATION group" ide:type="executeSql" iterate="PATIENT_RESULT_GROUP
/ORDER_OBSERVATION_GROUP/OBSERVATION_GROUP" ide:allowCompoundStatements="true" user:iteration
RootMessagePath="message">
    <statement name="Insert Into ELR_MESSAGE_OBX Table" ide:type="executeSql" ide:summary
="Insert data into the ELR_MESSAGE_OBX table. Many OBX segments to PATIENT_RESULT.ORDER_OBS
ERVATION.OBSERVATION group." ide:allowCompoundStatements="true">
        <sql>INSERT INTO ELR_MESSAGE_OBX (
ELR_MESSAGE_ID
,ELR_MESSAGE_OBR_ID
,PARENT_SEGMENT_TYPE
,OBX_1
,OBX_2
,OBX_3_1
,OBX_3_2
,OBX_3_3
,OBX_3_4
,OBX_3_5
,OBX_3_6
,OBX_4
,OBX_5
,OBX_6_1
,OBX_6_2
,OBX_6_3
,OBX_7
,OBX_8
,OBX_9
,OBX_10
,OBX_11
,OBX_12
,OBX_13
,OBX_14
,OBX_14_CONVERTED
,OBX_15_1
,OBX_15_2
,OBX_15_3
,OBX_16
,OBX_17
,NTE_INCLUDED_FL
,INSERT_DATE
)
VALUES (
@ELR_MESSAGE_ID
,@ELR_MESSAGE_OBR_ID
,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/OBSERVATION_GROUP/rowELR_MESSAGE_OBR
_OBX/PARENT_SEGMENT_TYPE`
,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/OBSERVATION_GROUP/rowELR_MESSAGE_OBR
_OBX/OBX_1`
,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/OBSERVATION_GROUP/rowELR_MESSAGE_OBR
_OBX/OBX_2`
,~/message/PATIENT_RESULT_GROUP/ORDER_OBSERVATION_GROUP/OBSERVATION_GROUP/rowELR_MESSAGE_OBR
_OBX/OBX_3_1`

```