

Configuration File: Database Message Extraction.xml

```

        (CHARINDEX('/&gt;', ifc.original_payload, PATINDEX('%[^-]&lt;id root="%',
ifc.original_payload))-
        CHARINDEX('root=', ifc.original_payload, PATINDEX('%[^-]&lt;id root="%',
ifc.original_payload))-7)) as new_doc_id
    FROM [nbs_msgoute].[dbo].[NBS_interface] ifc with (nolock)
    WHERE ifc.doc_type_cd = 'PHC236' and ifc.record_status_cd in ('Success', 'Failure')
and DATEDIFF(dd,ifc.record_status_time, GETDATE()) between 0 and $pollingDR
        ) i
WHERE CONCAT(SUBSTRING(i.doc_elem, PATINDEX('%root="%', i.doc_elem)+6,
        CHARINDEX('"', i.doc_elem, PATINDEX('%root="%', i.doc_elem)+7)-(PATINDEX('%root="%', i.doc_elem)+6)),
        CASE WHEN i.doc_elem like '%extension="%' THEN CONCAT('&',
        SUBSTRING(i.doc_elem, PATINDEX('%extension="%', i.doc_elem)+11,
        CHARINDEX('"', i.doc_elem, PATINDEX('%extension="%', i.doc_elem)+12)-(PATINDEX('%extension="%', i.doc_elem)+11))) ELSE '' END)
IN (SELECT * FROM STRING_SPLIT($strDOCUMENT_OIDs, '|'))</sql>
    </statement>
</config>

```

Destinations

Name	Page
 no-op NBS_MSGOUTE Results.....No-operation	77
Error Connector	Page
 no-op NBS_MSGOUTE Results.....No-operation	77

**js Set Date Range****JavaScript (v.1)**

On ECLIR - eCR Polling NBS First Pass route

Filter

Notes

Purpose: This JavaScript filter sets the message property DateRange to be used in the Database Lookup filter *db ECLIR Query* to allow the query to only select records from the last 30 days for querying.

Javascript

```

//
=====
// _____ INITIAL VARIABLES (start
)
//
=====

var next = output.append(input[0]);
var pollingDR = getVariable('DR_ECR_FirstPass');
next.text = 'eICR NBS Polling';

```

Javascript

```
//
=====
//_____ INITIAL VARIABLES (end
)
//
=====

//
=====
//_____ FUNCTIONS (start
)
//
=====

//FUNCTION: fnPadZeros
//--- Function to pad a number with leading zero.
function fnPadZeros(num, size) {
    num = num.toString();
    while (num.length < size) num = "0" + num;
    return num;
}

//
=====
//_____ FUNCTIONS (end
)
//
=====

//
=====
//_____ SET MESSAGE PROPERTY DateRange (start
)
//
=====

var dateRange = new Date();
dateRange.setDate(dateRange.getDate() - pollingDR);
var fieldYear = dateRange.getFullYear();
var fieldMonth = fnPadZeros(dateRange.getMonth() + 1, 2);
var fieldDay = fnPadZeros(dateRange.getDate(), 2);
var fieldHours = fnPadZeros(dateRange.getHours(), 2);
var fieldMinutes = fnPadZeros(dateRange.getMinutes(), 2);
var fieldSeconds = fnPadZeros(dateRange.getSeconds(), 2);

var formatteddateRange = fieldYear+'-'+fieldMonth+'-'+fieldDay+' '+fieldHours+':'+fieldMinutes
+':'+fieldSeconds;

next.setProperty('DateRange', formatteddateRange);
next.setProperty('pollingDR', pollingDR);
```

Javascript

```
//
=====
// _____ SET MESSAGE PROPERTY DateRange (end
) _____
//
=====
```

Destinations

Name	Page
 db ECLIR Query..... Database Message Extraction	78

**no-op Route Error Handler In**[Filter](#)**No-operation**

On ECLIR - eCR Polling NBS First Pass route

Notes

Purpose: This No-operation filter receives messages from the *ECLIR - eCR Polling NBS First Pass Route Error Handler* when an unhandled error occurs anywhere in the route. These errors cannot be recorded in the eICR_ERROR table because there will be multiple messages and no way to know which message caused the error.

Destinations

Name	Page
 no-op REH to Sink..... No-operation	82

**db ECLIR Inserts**[Filter](#)**Database LookUp**

On ECLIR - eCR Polling NBS First Pass route

Notes

Purpose: This Database Lookup filter updates records in the eICR_NBS table with key NBS identifiers from the previous database filter responses.

Configuration Properties

Maximum Concurrency	1
Database	

Configuration Properties		
Host	[REDACTED]	
Port	[REDACTED]	
Database Name	[REDACTED]	
Username	[REDACTED]	
Password	[REDACTED]	
Additional Connection Properties	Property Name	Property Value
	[REDACTED]	[REDACTED]
Configuration File	[REDACTED]	
Message Type	XML	
Definition		
Query Timeout		
Deadlock Retry Attempts	5	
Deadlock Retry Delay	100	
Socket Timeout	0	

Configuration File: Database LookUp.xml

```

[REDACTED]
[REDACTED]
[REDACTED]
[REDACTED]
<statement name="eICR_NBS Insert" ide:type="executeSql" iterate="EDX_ACTIVITY_LOG_Record" ide
:summary="Insert result data into eICR_NBS table for the eICR_DOCUMENT_PARSED_ID." ide:allow
CompoundStatements="true">
  <sql>INSERT INTO eICR_NBS (
eICR_DOCUMENT_PARSED_ID
,DOCUMENT_OID
,NBS_GENERATED_ID
,INTERFACE_UID
,INTERFACE_IMPORT_STATUS
,INTERFACE_IMPORT_STATUS_TIME
,INTERFACE_ADDED_TIME
,INTERFACE_DOC_TYPE
,INTERFACE_SYSTEM_NAME
,INTERFACE_ORIG_DOC_TYPE
,MSG_CONTAINER_UID
,EDX_LOG_SOURCE_UID
,EDX_LOG_EXCEPTION
,EDX_LOG_ALGORITHM
,EDX_LOG_STATUS
,DOC_LOCAL_ID
,DOC_STATUS
,DOC_CODE
,DOC_VERSION_CONTROL_NUM
,DOC_SENDING_FACILITY
,INSERT_DATE
)
VALUES (
~/message/EDX_ACTIVITY_LOG_Record/eICR_DOCUMENT_PARSED_ID`
,~/message/EDX_ACTIVITY_LOG_Record/DOCUMENT_OID`
,~/message/EDX_ACTIVITY_LOG_Record/NBS_GENERATED_ID`
,~/message/EDX_ACTIVITY_LOG_Record/EDX_LOG_SOURCE_UID`
,~/message/EDX_ACTIVITY_LOG_Record/INTERFACE_IMPORT_STATUS`
,~/message/EDX_ACTIVITY_LOG_Record/INTERFACE_IMPORT_STATUS_TIME`

```

Configuration File: Database LookUp.xml

```
,~/message/EDX_ACTIVITY_LOG_Record/INTERFACE_ADDED_TIME`
,~/message/EDX_ACTIVITY_LOG_Record/INTERFACE_DOC_TYPE`
,~/message/EDX_ACTIVITY_LOG_Record/INTERFACE_SYSTEM_NAME`
,~/message/EDX_ACTIVITY_LOG_Record/INTERFACE_ORIG_DOC_TYPE`
,~/message/EDX_ACTIVITY_LOG_Record/MSG_CONTAINER_UID`
,~/message/EDX_ACTIVITY_LOG_Record/EDX_LOG_SOURCE_UID`
,~/message/EDX_ACTIVITY_LOG_Record/EDX_LOG_EXCEPTION`
,~/message/EDX_ACTIVITY_LOG_Record/EDX_LOG_ALGORITHM`
,~/message/EDX_ACTIVITY_LOG_Record/EDX_LOG_STATUS`
,~/message/EDX_ACTIVITY_LOG_Record/DOC_LOCAL_ID`
,~/message/EDX_ACTIVITY_LOG_Record/DOC_STATUS`
,~/message/EDX_ACTIVITY_LOG_Record/DOC_CODE`
,~/message/EDX_ACTIVITY_LOG_Record/DOC_VERSION_CONTROL_NUM`
,~/message/EDX_ACTIVITY_LOG_Record/DOC_SENDING_FACILITY`
,SYSDATETIME()
)</sql>
</statement>
</config>
```

Destinations

Name	Page
 no-op to Sink..... No-operation	84

 js Create strInterface_UIDs Property for NBS_ODSE

Filter

JavaScript (v.1)
On ECLIR - eCR Polling NBS First Pass route

Notes

Purpose: This JavaScript filter sets the message property strInterface_UIDs to be used in the Database Message Extraction filter *db NBS_ODSE Query* to query based on the Interface_UIDs returned from the *db NBS_MSGOUTE Query 2* filter.

Javascript

```
//
=====
//_____ INITIAL VARIABLES (start
)
//
=====

var dbNBS_MSGOUTE_Results_2 = output.append(input[0]);
var dbNBS_MSGOUTE_Results_1 = input[1];
var strInterface_UIDs = '';

dbNBS_MSGOUTE_Results_2.setProperty('NoResults', false);
```

Javascript

```

//
=====
//_____ INITIAL VARIABLES (end)
)
//
=====

//
=====
//_____ SET MESSAGE PROPERTY strInterface_UIDs AND PERSIST RESULTS FROM PREVIOUS QUERY (start)
)
//
=====

if (dbNBS_MSGOUTE_Results_2.text.indexOf('NBS_INTERFACE_Record_2') != -1) {
  for (var i=1; i <= dbNBS_MSGOUTE_Results_2.getRepeatCount('/message/NBS_INTERFACE_Record_2');
    i++) {
    if (strInterface_UIDs != '') {
      strInterface_UIDs += '|';
    }
    strInterface_UIDs += dbNBS_MSGOUTE_Results_2.getField('/message/NBS_INTERFACE_Record_2['+i
+']/NBS_Interface_UID');
    var INTERFACE_UID = dbNBS_MSGOUTE_Results_2.getField('/message/NBS_INTERFACE_Record_2['+i+']/
NBS_Interface_UID');

    dbNBS_MSGOUTE_Results_2.setField('/message/NBS_INTERFACE_Record_2['+i+']/eICR_DOCUMENT_PARSED
_ID', dbNBS_MSGOUTE_Results_1.getField("/message/NBS_Interface_Record[INTERFACE_UID='"+ INT
ERFACE_UID + "']/eICR_DOCUMENT_PARSED_ID"));
    dbNBS_MSGOUTE_Results_2.setField('/message/NBS_INTERFACE_Record_2['+i+']/DOC_ROOT', dbNBS_MSG
OUTE_Results_1.getField("/message/NBS_Interface_Record[INTERFACE_UID='"+ INTERFACE_UID + "']/
DOC_ROOT"));
    dbNBS_MSGOUTE_Results_2.setField('/message/NBS_INTERFACE_Record_2['+i+']/DOC_EXT', dbNBS_MSG
OUTE_Results_1.getField("/message/NBS_Interface_Record[INTERFACE_UID='"+ INTERFACE_UID + "']/
DOC_EXT"));
    dbNBS_MSGOUTE_Results_2.setField('/message/NBS_INTERFACE_Record_2['+i+']/NBS_GENERATED_ID',
dbNBS_MSGOUTE_Results_1.getField("/message/NBS_Interface_Record[INTERFACE_UID='"+ INTERFACE
_UID + "']/NBS_GENERATED_ID"));
  }

  dbNBS_MSGOUTE_Results_2.setProperty('strInterface_UIDs', strInterface_UIDs);
}
//If no results are returned from the NBS_ODSE query, send to Sink.
else {
  dbNBS_MSGOUTE_Results_2.setProperty('NoResults', true);
}

//
=====
//_____ SET MESSAGE PROPERTY strInterface_UIDs AND PERSIST RESULTS FROM PREVIOUS QUERY (end)
)
//
=====

```

Message Collector: Input Collation	
Collection Order	[ECLIR - eCR Polling NBS First Pass/beef70a0-ec9a-41cf-acef-808a9845e216 ,ECLIR - eCR Polling NBS First Pass/c57cf0e7-ac0d-4949-8d3f-466a24255 b95]
Match Property	InputTime
Message Set Timeout	10
Timeout Units	Minutes
Timeout Destination	Process as Usual

Destinations

Name	Page
Output Condition: Results Returned NoResults = 'false'	
 db NBS_ODSE Query..... Database Message Extraction	82
Output Condition: Results Returned NoResults = 'false'	
 js Combine Query Responses..... JavaScript (v.1)	84
Output Condition: No Results Returned NoResults = 'true'	
 no-op to Sink..... No-operation	84



js Create strDOCUMENT_OIDs Property for NBS_MSGOUTE query 1

JavaScript (v.1)

On ECLIR - eCR Polling NBS First Pass route

Filter

Notes
Purpose: This JavaScript filter sets the message property strDOCUMENT_OIDs to be used in the Database Lookup filter <i>db NBS_MSGOUTE Query 1</i> to query based on the DOCUMENT_OID of the documents.

Javascript
<pre>// ===== // _____ INITIAL VARIABLES (start) // ===== var next = output.append(input[0]);</pre>

Javascript

```
var strDOCUMENT_OIDs = '';

//
=====
// _____ INITIAL VARIABLES (end
)
//
=====

//
=====
// _____ SET MESSAGE PROPERTY strDOCUMENT_OIDs (start
)
//
=====

var arrDOCUMENT_OIDs = next.getFieldAsList('/message/eICR_NBS_Record/DOCUMENT_OID');
for (var i=0; i < arrDOCUMENT_OIDs.length; i++) {
    if (strDOCUMENT_OIDs != '') {
        strDOCUMENT_OIDs += '|';
    }
    strDOCUMENT_OIDs += arrDOCUMENT_OIDs[i];
}

next.setProperty('strDOCUMENT_OIDs', strDOCUMENT_OIDs);

//
=====
// _____ SET MESSAGE PROPERTY strDOCUMENT_OIDs (end
)
//
=====
```

Destinations

Name	Page
 db NBS_MSGOUTE Query 1..... Database Message Extraction	68
 js Create strInterface_UIDs Property for NBS_MSGOUTE query 2..... JavaScript (v.1)	80



no-op NBS_MSGOUTE Results

Filter

No-operation

On ECLIR - eCR Polling NBS First Pass route

Notes

Purpose: This No-operation filter receives query results from *db NBS_MSGOUTE Query 1* for both results found and empty results.

Notes
(4/14/2025) LP Created filter

Destinations

Name	Page
js Create strInterface_UIDs Property for NBS_MSGOUTE query 2.....JavaScript (v.1)	80



db ECLIR Query

Database Message Extraction

On ECLIR - eCR Polling NBS First Pass route

Filter

Notes
Purpose: This Database Message Extraction filter returns an XML list of records from the eICR_NBS table that do not yet have key NBS identifiers recorded. They query only looks for the top 100 records and excludes any records that have been tried more than 4 times according to the field NBS_POLLING_ATTEMPTS in the eICR_DOCUMENT_PARSED table.

Configuration Properties		
Maximum Concurrency	1	
Database	[REDACTED]	
Host	[REDACTED]	
Port	[REDACTED]	
Database Name	[REDACTED]	
Username	[REDACTED]	
Password	[REDACTED]	
Additional Connection Properties	Property Name	Property Value
	[REDACTED]	[REDACTED]
Configuration File	[REDACTED]	
Message Body Column		
Message Type	Plain text	
Definition		
Query Timeout		
Deadlock Retry Attempts	5	
Deadlock Retry Delay	100	
Socket Timeout	0	
Configuration File: Database Message Extraction.xml		
[REDACTED]		
[REDACTED]		
[REDACTED]		
[REDACTED]		

Configuration File: Database Message Extraction.xml

```

<statement name="eICR_NBS_Record" ide:type="executeSql" ide:summary="Query for all records in
the last 30 days that do not have an entry in the eICR_NBS table." ide:allowCompoundStatements
="true">
  <sql>SELECT TOP(100) MAX(eICR_DOCUMENT_PARSED.ID) AS eICR_DOCUMENT_PARSED_ID,
eICR_DOCUMENT_PARSED.DOCUMENT_OID AS DOCUMENT_OID
FROM eICR_DOCUMENT_PARSED
LEFT OUTER JOIN eICR_NBS ON eICR_DOCUMENT_PARSED.ID = eICR_NBS.eICR_DOCUMENT_PARSED_ID
WHERE eICR_DOCUMENT_PARSED.DOCUMENT_OID IS NOT NULL AND
eICR_NBS.NBS_GENERATED_ID IS NULL AND
eICR_DOCUMENT_PARSED.NBS_POLLING_ATTEMPTS < 5 AND
eICR_DOCUMENT_PARSED.INSERT_DATE >= $DateRange
GROUP BY eICR_DOCUMENT_PARSED.DOCUMENT_OID</sql>
  <statement name="Increment Polling Attempts" ide:type="executeSql" ide:summary="Increment
the number of attempts at polling for each record returned in the previous query." ide:allow
CompoundStatements="true">
    <sql>UPDATE eICR_DOCUMENT_PARSED
SET NBS_POLLING_ATTEMPTS = NBS_POLLING_ATTEMPTS + 1
WHERE ID = @eICR_DOCUMENT_PARSED_ID</sql>
  </statement>
</statement>
</config>

```

Destinations

Name	Page
 js Create strDOCUMENT_OIDs Property for NBS_MSGOUTE query 1..... JavaScript (v.1)	76
Error Connector	Page
 no-op to Sink..... No-operation	84

**no-op NBS_ODSE Results**

Filter

No-operation

On ECLIR - eCR Polling NBS First Pass route

Notes

Purpose: This No-operation filter receives query results from *db NBS_ODSE Query* for both results found and empty results.

Destinations

Name	Page
 js Combine Query Responses..... JavaScript (v.1)	84

**no-op NBS_MSGOUTE Results 2**

Filter

No-operation

On ECLIR - eCR Polling NBS First Pass route

Notes

Purpose: This No-operation filter receives query results from *db NBS_MSGOUTE Query 2* for both results found and empty results.

Destinations

Name	Page
 js Create strInterface_UIDs Property for NBS_ODSE.....JavaScript (v.1)	74



js Create strInterface_UIDs Property for NBS_MSGOUTE query 2

JavaScript (v.1)

On ECLIR - eCR Polling NBS First Pass route

Filter

Notes

Purpose: This JavaScript filter sets the message property strInterface_UIDs to be used in the Database Message Extraction filter *db NBS_MSGOUTE Query 2* to query based on the Interface_UIDs returned from the *db NBS_MSGOUTE Query 1* filter. It also persists the elements from the XML returned from the Database Message Extraction filter *db ECLIR Query*.

Javascript

```
//
=====
//_____ INITIAL VARIABLES (start
)_____
//
=====

var dbNBS_MSGOUTE_Results = output.append(input[0]);
var dbECLIR_Results = input[1];
var strInterface_UIDs = '';

dbNBS_MSGOUTE_Results.setProperty('NoResults', false);

//
=====
//_____ INITIAL VARIABLES (end
)_____
//
=====
```

Javascript

```
//
=====
//_____ SET MESSAGE PROPERTY strInterface_UIDs AND PERSIST RESULTS FROM PREVIOUS QUERY (start)
//
=====

if (dbNBS_MSGOUTE_Results.text.indexOf('NBS_Interface_Record') != -1) {
  for (var i=1; i <= dbNBS_MSGOUTE_Results.getRepeatCount('/message/NBS_Interface_Record'); i++)
  {
    if (strInterface_UIDs != '') {
      strInterface_UIDs += '|';
    }
    strInterface_UIDs += dbNBS_MSGOUTE_Results.getField('/message/NBS_Interface_Record['+i+']/INTERFACE_UID');
    var DOCUMENT_OID = dbNBS_MSGOUTE_Results.getField('/message/NBS_Interface_Record['+i+']/DOCUMENT_ROOT');
    if (dbNBS_MSGOUTE_Results.getField('/message/NBS_Interface_Record['+i+']/DOC_EXT') != null &&
    dbNBS_MSGOUTE_Results.getField('/message/NBS_Interface_Record['+i+']/DOC_EXT') != '') {
      DOCUMENT_OID += '&' + dbNBS_MSGOUTE_Results.getField('/message/NBS_Interface_Record['+i+']/DOC_EXT');
    }
    dbNBS_MSGOUTE_Results.setField('/message/NBS_Interface_Record['+i+']/eICR_DOCUMENT_PARSED_ID', dbECLIR_Results.getField("/message/eICR_NBS_Record[DOCUMENT_OID='"+ DOCUMENT_OID + "']/eICR_DOCUMENT_PARSED_ID"));
  }

  dbNBS_MSGOUTE_Results.setProperty('strInterface_UIDs', strInterface_UIDs);
}
//If no results are returned from the NBS_ODSE query, send to Sink.
else {
  dbNBS_MSGOUTE_Results.setProperty('NoResults', true);
}

//
=====
//_____ SET MESSAGE PROPERTY strInterface_UIDs AND PERSIST RESULTS FROM PREVIOUS QUERY (end)
//
=====
```

Message Collector: Input Collation

Collection Order	[ECLIR - eCR Polling NBS First Pass/90ab66f5-6629-48a2-b744-167b25a673f0,ECLIR - eCR Polling NBS First Pass/8d434d25-6a9e-4a8a-b6ff-7e44aa26e9cb]
Match Property	InputTime
Message Set Timeout	10
Timeout Units	Minutes
Timeout Destination	Process as Usual

Destinations

Name	Page
Output Condition: Results Returned NoResults = 'false'	
 db NBS_MSGOUTE Query 2..... Database Message Extraction	67
Output Condition: Results Returned NoResults = 'false'	
 js Create strInterface_UIDs Property for NBS_ODSE..... JavaScript (v.1)	74
Output Condition: No Results Returned NoResults = 'true'	
 no-op to Sink..... No-operation	84



no-op REH to Sink

No-operation

On ECLIR - eCR Polling NBS First Pass route

Filter

Notes
Purpose: This No-operation filter sends messages from the <i>ECLIR - eCR Polling NBS First Pass Route Error Handler</i> to the <i>ECLIR - eCR Route Error Handler Sink</i>.

Destinations

Name	Page
 ECLIR - eCR Route Error Handler Sink..... Sink	11



db NBS_ODSE Query

Database Message Extraction

On ECLIR - eCR Polling NBS First Pass route

Filter

Notes
Purpose: This Database Message Extraction filter returns an XML list of records with key identifiers from the NBS_ODSE.edx_activity_log table.

Configuration Properties		
Maximum Concurrency	1	
Database	[REDACTED]	
Host	[REDACTED]	
Port	[REDACTED]	
Database Name	[REDACTED]	
Username	[REDACTED]	
Password	[REDACTED]	
Additional Connection Properties	Property Name	Property Value
	[REDACTED]	[REDACTED]
Configuration File	[REDACTED]	
Message Body Column		
Message Type	Plain text	
Definition		
Query Timeout		
Deadlock Retry Attempts	5	
Deadlock Retry Delay	100	
Socket Timeout	0	
Configuration File: Database Message Extraction.xml		
<pre> [REDACTED] [REDACTED] [REDACTED] <statement name="EDX_ACTIVITY_LOG_Record" ide:type="executeSql" ide:summary="Query NBS_ODSE .EDX_activity_log table for key identifiers." ide:allowCompoundStatements="true"> <sql>SELECT * FROM (SELECT ROW_NUMBER() OVER (PARTITION BY elog.edx_activity_log_uid ORDER BY elog.edx_activity _log_uid DESC) as rn, elog.source_uid as EDX_LOG_SOURCE_UID, elog.exception_txt as EDX_LOG_EXCEPTION, elog.algorithm_name as EDX_LOG_ALGORITHM, elog.record_status_cd as EDX_LOG_STATUS, doc.local_id as DOC_LOCAL_ID, doc.record_status_cd as DOC_STATUS, doc.cd as DOC_CODE, doc.version_ctrl_nbr as DOC_VERSION_CONTROL_NUM, doc.sending_facility_nm as DOC_SENDING_FACILITY FROM [NBS_ODSE].[dbo].[EDX_activity_log] elog LEFT OUTER JOIN [NBS_ODSE].[dbo].[NBS_document] doc on elog.source_uid = doc.nbs_interface_uid WHERE elog.target_type_cd <> 'LAB' AND elog.record_status_time >= DATEADD(dd,-CAST(\$pollingDR AS INT), GETDATE()) AND elog.source_uid IN (SELECT * FROM STRING_SPLIT(\$strInterface_UIDs, ' '))) ecrds WHERE ecrds.rn = 1</sql> </statement> </config> </pre>		

Destinations

Name	Page
 no-op NBS_ODSE Results.....No-operation	79
Error Connector	Page
 no-op NBS_ODSE Results.....No-operation	79



no-op to Sink

Filter

No-operation

On ECLIR - eCR Polling NBS First Pass route

Notes

Purpose: This No-operation filter sends all messages to the *ECLIR - eCR Sink* after queries are completed or if empty result sets are received.

Destinations

Name	Page
 ECLIR - eCR Sink.....Sink	12



js Combine Query Responses

Filter

JavaScript (v.1)

On ECLIR - eCR Polling NBS First Pass route

Notes

Purpose: This JavaScript filter combines the results from the Database Message Extraction filters *db NBS_ODSE Query* and *db NBS_MSGOUTE Query 2* into an XML file that will be used in the Database Lookup filter *db ECLIR Inserts* to insert any result data received. If no results are returned from the filter, the values from the *db NBS_MSGOUTE Query 2* filter results are transferred over to an output XML in the same structure that would have been returned from the *db NBS_ODSE Query* filter if there had been results.

Javascript

```
//
=====
//_____ INITIAL VARIABLES (start
)_____
//
=====

var dbNBS_ODSE_Results = output.append(input[0]);
```

Javascript

```

var dbNBS_MSGOUTE_Results_2 = input[1];

//
=====
// _____ INITIAL VARIABLES (end
)
//
=====

//
=====
// _____ COMBINE QUERY RESPONSES FROM NBS_MSGOUTE AND NBS_ODSE (start
)
//
=====

var cntResults = 1;
if (dbNBS_ODSE_Results.text.indexOf('EDX_ACTIVITY_LOG_Record') != -1) {
    cntResults = dbNBS_ODSE_Results.getRepeatCount('/message/EDX_ACTIVITY_LOG_Record');
}
else {
    cntResults = dbNBS_MSGOUTE_Results_2.getRepeatCount('/message/NBS_INTERFACE_Record_2')
}

for (var i=1; i <= cntResults; i++) {
    var pathNBS_ODSE_results = '/message/EDX_ACTIVITY_LOG_Record[' + i + ']';

    if (dbNBS_ODSE_Results.text.indexOf('EDX_ACTIVITY_LOG_Record') != -1) {
        var EDX_LOG_SOURCE_UID = dbNBS_ODSE_Results.getField(pathNBS_ODSE_results + '/EDX_LOG_SOURCE_UID');
        var pathNBS_MSGOUTE_results = "/message/NBS_INTERFACE_Record_2[NBS_Interface_UID='"+ EDX_LOG_SOURCE_UID + "']";
    }
    else {
        dbNBS_ODSE_Results.text = '<message></message>';
        var pathNBS_MSGOUTE_results = '/message/NBS_INTERFACE_Record_2['+i+']';
        dbNBS_ODSE_Results.setField(pathNBS_ODSE_results + '/EDX_LOG_SOURCE_UID', dbNBS_MSGOUTE_Results_2.getField(pathNBS_MSGOUTE_results + '/NBS_Interface_UID'));
    }

    dbNBS_ODSE_Results.setField(pathNBS_ODSE_results + '/INTERFACE_IMPORT_STATUS', dbNBS_MSGOUTE_Results_2.getField(pathNBS_MSGOUTE_results + "/INTERFACE_IMPORT_STATUS"));
    dbNBS_ODSE_Results.setField(pathNBS_ODSE_results + '/INTERFACE_IMPORT_STATUS_TIME', dbNBS_MSGOUTE_Results_2.getField(pathNBS_MSGOUTE_results + "/INTERFACE_IMPORT_STATUS_TIME"));
    dbNBS_ODSE_Results.setField(pathNBS_ODSE_results + '/INTERFACE_ADDED_TIME', dbNBS_MSGOUTE_Results_2.getField(pathNBS_MSGOUTE_results + "/INTERFACE_ADDED_TIME"));
    dbNBS_ODSE_Results.setField(pathNBS_ODSE_results + '/INTERFACE_DOC_TYPE', dbNBS_MSGOUTE_Results_2.getField(pathNBS_MSGOUTE_results + "/INTERFACE_DOC_TYPE"));
    dbNBS_ODSE_Results.setField(pathNBS_ODSE_results + '/INTERFACE_SYSTEM_NAME', dbNBS_MSGOUTE_Results_2.getField(pathNBS_MSGOUTE_results + "/INTERFACE_SYSTEM_NAME"));
    dbNBS_ODSE_Results.setField(pathNBS_ODSE_results + '/INTERFACE_ORIG_DOC_TYPE', dbNBS_MSGOUTE_Results_2.getField(pathNBS_MSGOUTE_results + "/INTERFACE_ORIG_DOC_TYPE"));
    dbNBS_ODSE_Results.setField(pathNBS_ODSE_results + '/MSG_CONTAINER_UID', dbNBS_MSGOUTE_Results_2.getField(pathNBS_MSGOUTE_results + "/MSG_CONTAINER_UID"));
}

```

Javascript

```

dbNBS_ODSE_Results.setField(pathNBS_ODSE_results + '/eICR_DOCUMENT_PARSED_ID', dbNBS_MSGOUTE_Results_2.getField(pathNBS_MSGOUTE_results + "/eICR_DOCUMENT_PARSED_ID"));
var DOCUMENT_OID = dbNBS_MSGOUTE_Results_2.getField(pathNBS_MSGOUTE_results + "/DOC_ROOT");
if (dbNBS_MSGOUTE_Results_2.getField(pathNBS_MSGOUTE_results + "/DOC_EXT") != null && dbNBS_MSGOUTE_Results_2.getField(pathNBS_MSGOUTE_results + "/DOC_EXT") != '') {
    DOCUMENT_OID += '&' + dbNBS_MSGOUTE_Results_2.getField(pathNBS_MSGOUTE_results + "/DOC_EXT");
}
dbNBS_ODSE_Results.setField(pathNBS_ODSE_results + '/DOCUMENT_OID', DOCUMENT_OID);
dbNBS_ODSE_Results.setField(pathNBS_ODSE_results + '/NBS_GENERATED_ID', dbNBS_MSGOUTE_Results_2.getField(pathNBS_MSGOUTE_results + "/NBS_GENERATED_ID"));
}

//
=====
// _____ COMBINE QUERY RESPONSES FROM NBS_MSGOUTE AND NBS_ODSE (end
// _____
//
=====

```

Message Collector: Input Collation

Collection Order	[ECLIR - eCR Polling NBS First Pass/b00dc176-0415-4065-a56a-74de62f9febf ,ECLIR - eCR Polling NBS First Pass/848830ba-3772-4284-a78a-b22f12243c5a]
Match Property	InputTime
Message Set Timeout	10
Timeout Units	Minutes
Timeout Destination	Error connector


Destinations

Name	Page
 db ECLIR Inserts..... Database LookUp	72



ECLIR - eCR Polling NBS Patient

Route

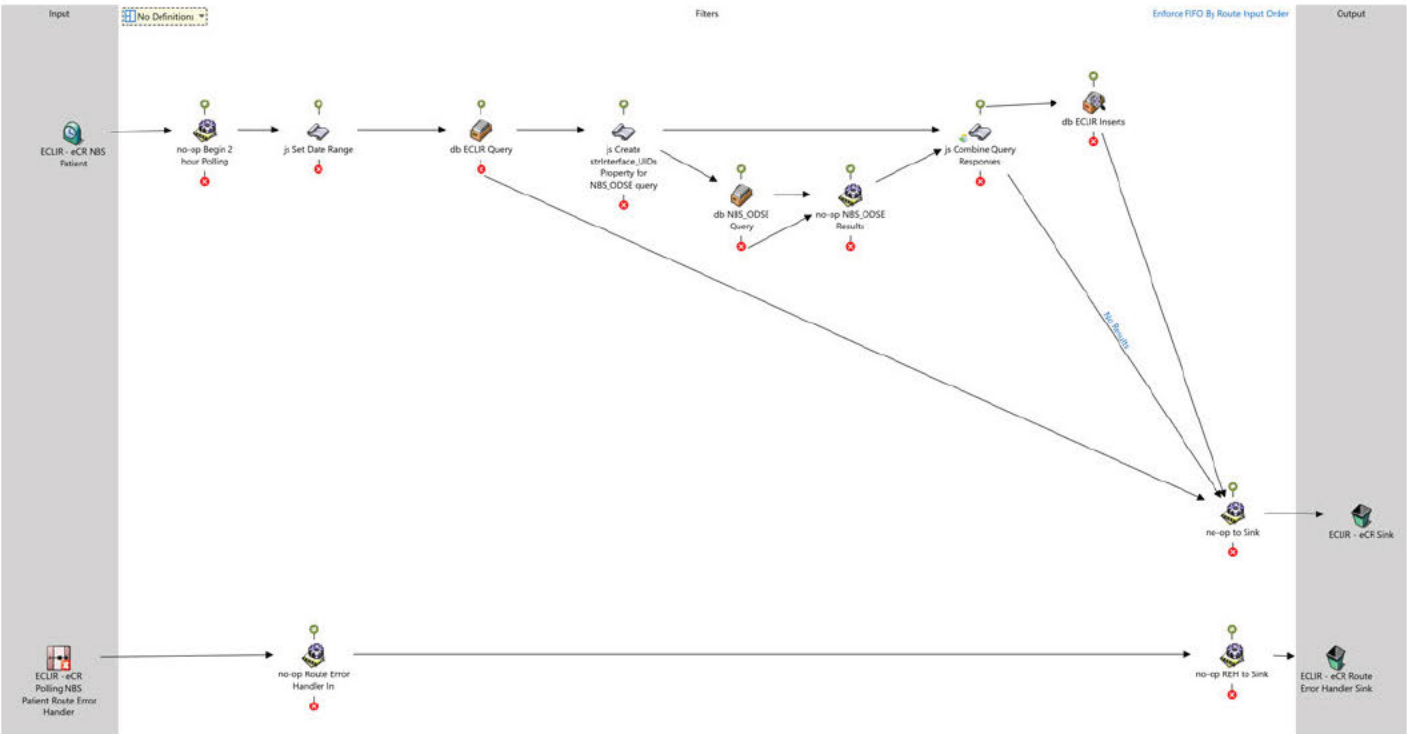

Notes

Purpose: This route triggers every 2 hours starting at 20 minutes past the hour to query NBS tables for key patient identifiers and stores them to the ECLIR database to allow messages to be linked together throughout the life of the message.

Inputs		Page
ECLIR - eCR NBS Patient.....	Timer	17
Outputs		Page
ECLIR - eCR Sink.....	Sink	12
ECLIR - eCR Route Error Handler Sink.....	Sink	11

Filters

Name	Page
db ECLIR Inserts.....	Database LookUp 89
db ECLIR Query.....	Database Message Extraction 92
db NBS_ODSE Query.....	Database Message Extraction 96
js Combine Query Responses.....	JavaScript (v.1) 93
js Create strInterface_UIDs Property for NBS_ODSE query.....	JavaScript (v.1) 95
js Set Date Range.....	JavaScript (v.1) 90

Name	Page
 no-op Begin 2 hour Polling..... No-operation	89
 no-op NBS_ODSE Results.....No-operation	98
 no-op REH to Sink..... No-operation	98
 no-op Route Error Handler In..... No-operation	92
 no-op to Sink..... No-operation	98

Details

General	
Priority	Normal
Startup State	Startup Third
FIFO Mode	Enforce FIFO By Route Input Order
Stop route on error message	False



no-op Begin 2 hour Polling

Filter

No-operation

On ECLIR - eCR Polling NBS Patient route

Notes

Purpose: This No-operation filter receives a trigger message every 2 hours from the *ECLIR - eCR NBS Patient* Timer to begin the polling process for eCR.

Destinations

Name	Page
js Set Date Range..... JavaScript (v.1)	90



db ECLIR Inserts

Filter

Database LookUp

On ECLIR - eCR Polling NBS Patient route

Notes

Purpose: This Database Lookup filter inserts records in the eICR_NBS_PATIENT table with key identifiers from NBS.

Configuration Properties

Maximum Concurrency	1	
Database	[REDACTED]	
Host	[REDACTED]	[REDACTED]
Port	[REDACTED]	[REDACTED]
Database Name	[REDACTED]	[REDACTED]
Username	[REDACTED]	[REDACTED]
Password	[REDACTED]	
Additional Connection Properties	Property Name	Property Value
	[REDACTED]	[REDACTED]
Configuration File	[REDACTED]	
Message Type	XML	
Definition		
Query Timeout		
Deadlock Retry Attempts	5	
Deadlock Retry Delay	100	
Socket Timeout	0	

Configuration File: Database LookUp.xml

```
<statement name="Insert into eICR_NBS_PATIENT" ide:type="executeSql" iterate="EDX_ACTIVITY_LOG_Patient_Record" ide:summary="Insert key identifiers in the eICR_NBS_PATIENT table." ide:allowCompoundStatements="true">
  <sql>INSERT INTO eICR_NBS_PATIENT (
    eICR_DOCUMENT_PARSED_ID
    ,DOC_LOCAL_ID
    ,PERSON_LOCAL_ID
    ,CASE_ID
    ,INSERT_DATE
  )
  VALUES (
    ~/message/EDX_ACTIVITY_LOG_Patient_Record/eICR_DOCUMENT_PARSED_ID~
    ,~/message/EDX_ACTIVITY_LOG_Patient_Record/doc_local_id~
    ,~/message/EDX_ACTIVITY_LOG_Patient_Record/person_local_id~
    ,~/message/EDX_ACTIVITY_LOG_Patient_Record/CASE_ID~
    ,SYSDATETIME()
  )</sql>
</statement>
</config>
```

Destinations

Name	Page
 no-op to Sink..... No-operation	98



js Set Date Range

Filter

JavaScript (v.1)
On ECLIR - eCR Polling NBS Patient route

Notes

Purpose: This JavaScript filter sets the message property DateRange to be used in the Database Lookup filter *db ECLIR Query* to allow the query to only select records from the last 30 days for querying.

Javascript

```
//
=====
//_____ INITIAL VARIABLES (start
)_____
//
=====

var next = output.append(input[0]);
var pollingDR = getVariable('DR_ECR_Patient');
next.text = 'eICR NBS Polling';
```

Javascript

```

//
=====
//_____ INITIAL VARIABLES (end
)
//
=====

//
=====
//_____ FUNCTIONS (start
)
//
=====

//FUNCTION: fnPadZeros
//--- Function to pad a number with leading zero.
function fnPadZeros(num, size) {
    num = num.toString();
    while (num.length < size) num = "0" + num;
    return num;
}

//
=====
//_____ FUNCTIONS (end
)
//
=====

//
=====
//_____ SET MESSAGE PROPERTY DateRange (start
)
//
=====

var dateRange = new Date();
dateRange.setDate(dateRange.getDate() - pollingDR);
var fieldYear = dateRange.getFullYear();
var fieldMonth = fnPadZeros(dateRange.getMonth() + 1, 2);
var fieldDay = fnPadZeros(dateRange.getDate(), 2);
var fieldHours = fnPadZeros(dateRange.getHours(), 2);
var fieldMinutes = fnPadZeros(dateRange.getMinutes(), 2);
var fieldSeconds = fnPadZeros(dateRange.getSeconds(), 2);

var formatteddateRange = fieldYear+'-'+fieldMonth+'-'+fieldDay+' '+fieldHours+':'+fieldMinutes
+':'+fieldSeconds;

next.setProperty('DateRange', formatteddateRange);
next.setProperty('pollingDR', pollingDR);

```

Javascript

```
//
=====
// _____ SET MESSAGE PROPERTY DateRange (end
) _____
//
=====
```

Destinations

Name	Page
 db ECLIR Query..... Database Message Extraction	92



no-op Route Error Handler In

Filter

No-operation
On ECLIR - eCR Polling NBS Patient route

Notes

Purpose: This No-operation filter receives messages from the *ECLIR - eCR Polling NBS Patient Route Error Handler* when an unhandled error occurs anywhere in the route. These errors cannot be recorded in the `eICR_ERROR` table because there will be multiple messages and no way to know which message caused the error.

Destinations

Name	Page
 no-op REH to Sink..... No-operation	98



db ECLIR Query

Database Message Extraction
On ECLIR - eCR Polling NBS Patient route

Filter

Notes

Purpose: This Database Message Extraction filter returns an XML list of records from the `eICR_NBS` table that do not have a corresponding `eICR_NBS_PATIENT` record yet in the last 30 days.

Configuration Properties

Maximum Concurrency	1
Database	

Configuration Properties		
Host		
Port		
Database Name		
Username		
Password		
Additional Connection Properties	Property Name	Property Value
Configuration File		
Message Body Column		
Message Type	Plain text	
Definition		
Query Timeout		
Deadlock Retry Attempts	5	
Deadlock Retry Delay	100	
Socket Timeout	0	
Configuration File: Database Message Extraction.xml		
<pre> <statement name="eICR_NBS_PATIENT_Record" ide:type="executeSql" ide:summary="Query for all eICR_NBS records that do not have a corresponding eICR_NBS_PATIENT record in the last 30 days." ide:allowCompoundStatements="true"> <sql>SELECT TOP(250) eICR_NBS.eICR_DOCUMENT_PARSED_ID as eICR_DOCUMENT_PARSED_ID, eICR_NBS.INTERFACE_UID as INTERFACE_UID FROM eICR_NBS LEFT OUTER JOIN eICR_NBS_PATIENT ON eICR_NBS.eICR_DOCUMENT_PARSED_ID = eICR_NBS_PATIENT.eICR DOCUMENT_PARSED_ID WHERE eICR_NBS_PATIENT.DOC_LOCAL_ID IS NULL AND eICR_NBS.INSERT_DATE >= \$DateRange</sql> </statement> </config> </pre>		

Destinations

Name	Page
 js Create strInterface_UIDs Property for NBS_ODSE query.....JavaScript (v.1)	95
Error Connector	Page
 no-op to Sink.....No-operation	98

js Combine Query Responses

JavaScript (v.1)

On ECLIR - eCR Polling NBS Patient route

Filter

Notes

Notes

Purpose: This JavaScript filter combines the results from the Database Message Extraction filters *db ECLIR Query* and *db NBS_ODSE Query* into an XML file that will be used in the Database Lookup filter *db ECLIR Inserts* to insert any result data received. If no results are returned from the *db NBS_ODSE Query* filter, the message is still sent to the *js Combine Query Responses* JavaScript filter to prevent a message collector error. However, the message will be sent to Sink after the *js Combine Query Responses* JavaScript filter.

Javascript

```
//
=====
//_____ INITIAL VARIABLES (start
)
//
=====

var dbNBS_ODSE_Results = output.append(input[0]);
var dbECLIR_PATIENT_Results = input[1];
dbNBS_ODSE_Results.setProperty('NoResults', false);

//
=====
//_____ INITIAL VARIABLES (end
)
//
=====

//
=====
//_____ COMBINE QUERY RESPONSES FROM ECLIR AND NBS_ODSE (start
)
//
=====

if (dbNBS_ODSE_Results.text.indexOf('EDX_ACTIVITY_LOG_Patient_Record') != -1) {
  for (var i=1; i <= dbNBS_ODSE_Results.getRepeatCount('/message/EDX_ACTIVITY_LOG_Patient_Record'); i++) {
    var INTERFACE_UID = dbNBS_ODSE_Results.getField('/message/EDX_ACTIVITY_LOG_Patient_Record[' + i + ']/nbs_interface_uid');
    var eICR_DOCUMENT_PARSED_ID = dbECLIR_PATIENT_Results.getField("/message/eICR_NBS_PATIENT_Record[INTERFACE_UID='"+ INTERFACE_UID + "'][1]/eICR_DOCUMENT_PARSED_ID");

    dbNBS_ODSE_Results.setField('/message/EDX_ACTIVITY_LOG_Patient_Record['+i+']/eICR_DOCUMENT_PARSED_ID', eICR_DOCUMENT_PARSED_ID);
  }
}
//If no results are returned from the NBS_ODSE query, create a message to only update from NBS_ODSE query results.
else {
  dbNBS_ODSE_Results.setProperty('NoResults', true);
}
```

Javascript

```
//
=====
// _____ COMBINE QUERY RESPONSES FROM ECLIR AND NBS_ODSE (end
)
//
=====
```

Message Collector: Input Collation

Collection Order	[ECLIR - eCR Polling NBS Patient/f69c90d7-6d19-449e-a506-7a263d5877d6 ,ECLIR - eCR Polling NBS Patient/8218624e-1116-46c1-9703-47cd99739067]
Match Property	InputTime
Message Set Timeout	10
Timeout Units	Minutes
Timeout Destination	Error connector

Destinations

NamePage

Output Condition: No Results	
NoResults = 'true' ignoring case	
no-op to Sink.....	No-operation 98

Error ConnectorPage

db ECLIR Inserts.....	Database LookUp 89
-----------------------	--------------------

js Create strInterface_UIDs Property for NBS_ODSE query

Filter

JavaScript (v.1)
On ECLIR - eCR Polling NBS Patient route

Notes

Purpose: This JavaScript filter sets the message property strInterface_UIDs to be used in the Database Lookup filters *db NBS_ODSE Query* to query based on the INTERFACE_UID of the documents in NBS.

Javascript

```
//
=====
// _____ INITIAL VARIABLES (start
)
//
=====

var next = output.append(input[0]);
var strInterface_UIDs = '';
```

Javascript

```
//
=====
// _____ INITIAL VARIABLES (end
)
//
=====

//
=====
// _____ SET MESSAGE PROPERTY strDOCUMENT_OIDs (start
)
//
=====

var arrInterface_UIDs = next.getFieldAsList('/message/eICR_NBS_PATIENT_Record/INTERFACE_UID');
for (var i=0; i < arrInterface_UIDs.length; i++) {
  if (strInterface_UIDs != '') {
    strInterface_UIDs += '|';
  }
  strInterface_UIDs += arrInterface_UIDs[i];
}

next.setProperty('strInterface_UIDs', strInterface_UIDs);

//
=====
// _____ SET MESSAGE PROPERTY strDOCUMENT_OIDs (end
)
//
=====
```

Destinations

Name	Page
 db NBS_ODSE Query..... Database Message Extraction	96
 js Combine Query Responses..... JavaScript (v.1)	93



db NBS_ODSE Query

Database Message Extraction

On ECLIR - eCR Polling NBS Patient route

Filter

Notes

Purpose: This Database Message Extraction filter returns an XML list of records with key patient identifiers from the NBS_ODSE.edx_activity_log table.

Configuration Properties		
Maximum Concurrency	1	
Database	[REDACTED]	
Host	[REDACTED]	
Port	[REDACTED]	
Database Name	[REDACTED]	
Username	[REDACTED]	
Password	[REDACTED]	
Additional Connection Properties	Property Name	Property Value
	[REDACTED]	[REDACTED]
Configuration File	[REDACTED]	
Message Body Column		
Message Type	XML	
Definition		
Query Timeout		
Deadlock Retry Attempts	5	
Deadlock Retry Delay	100	
Socket Timeout	0	
Configuration File: Database Message Extraction 2.xml		
<pre> <statement name="EDX_ACTIVITY_LOG_Patient_Record" ide:type="executeSql" ide:summary="Query NBS_ODSE.EDX_activity_log table for key identifiers." ide:allowCompoundStatements="true"> <sql>SELECT * FROM (SELECT ROW_NUMBER() OVER (PARTITION BY d.nbs_document_uid ORDER BY e.edx_activity_log_uid) AS rn, e.source_uid AS nbs_interface_uid, e.business_obj_localId AS doc_local_id, p.local_id AS person_local_id, phc.local_id AS CASE_ID FROM [nbs_odse].[dbo].EDX_activity_log e INNER JOIN [nbs_odse].[dbo].NBS_document d ON e.target_uid = d.nbs_interface_uid INNER JOIN [nbs_odse].[dbo].Participation par ON d.nbs_document_uid = par.act_uid INNER JOIN [nbs_odse].[dbo].person p ON p.person_uid = par.subject_entity_uid LEFT OUTER JOIN [nbs_odse].[dbo].Act_relationship a ON nbs_document_uid = a.source_act_uid LEFT OUTER JOIN [nbs_odse].[dbo].Public_health_case phc ON a.target_act_uid = phc.public _health_case_uid WHERE e.target_type_cd = 'DOC' AND par.type_cd = 'SubjOfDoc' AND e.record_status_time >= DATEADD(dd, -CAST(\$pollingDR AS INT), GETDATE()) AND e.source_uid IN (SELECT * FROM STRING_SPLIT(\$strInterface_UIDs, ' '))) ds WHERE ds.rn = 1</sql> </statement> </config> </pre>		

Destinations

Name	Page
 no-op NBS_ODSE Results.....No-operation	98
Error Connector	Page
 no-op NBS_ODSE Results.....No-operation	98



no-op to Sink

Filter

No-operation
On ECLIR - eCR Polling NBS Patient route

Notes
Purpose: This No-operation filter sends all messages to the <i>ECLIR - eCR Sink</i> after queries are completed or if empty result sets are received.

Destinations

Name	Page
 ECLIR - eCR Sink.....Sink	12



no-op REH to Sink

Filter

No-operation
On ECLIR - eCR Polling NBS Patient route

Notes
Purpose: This No-operation filter sends messages from the <i>ECLIR - eCR Polling NBS Patient Route Error Handler</i> to the <i>ECLIR - ELR Route Error Handler Sink</i>.

Destinations

Name	Page
 ECLIR - eCR Route Error Handler Sink.....Sink	11



no-op NBS_ODSE Results

Filter

No-operation

On ECLIR - eCR Polling NBS Patient route

Notes

Purpose: This No-operation filter receives query results from *db NBS_ODSE Query* for both results found and empty results.

Destinations

Name	Page
js Combine Query Responses.....	JavaScript (v.1) 93



ECLIR - eICR Parsing

Folder


Full Path /ECLIR/Route__ECLIR/eCR/ECLIR - eICR Parsing

Summary		
Routes (2)		
Folder Contents		Page
ECLIR - eCR Condition Checks.....	Route	101
ECLIR - eICR Message Parsing.....	Route	115



ECLIR - eCR Condition Checks

Route

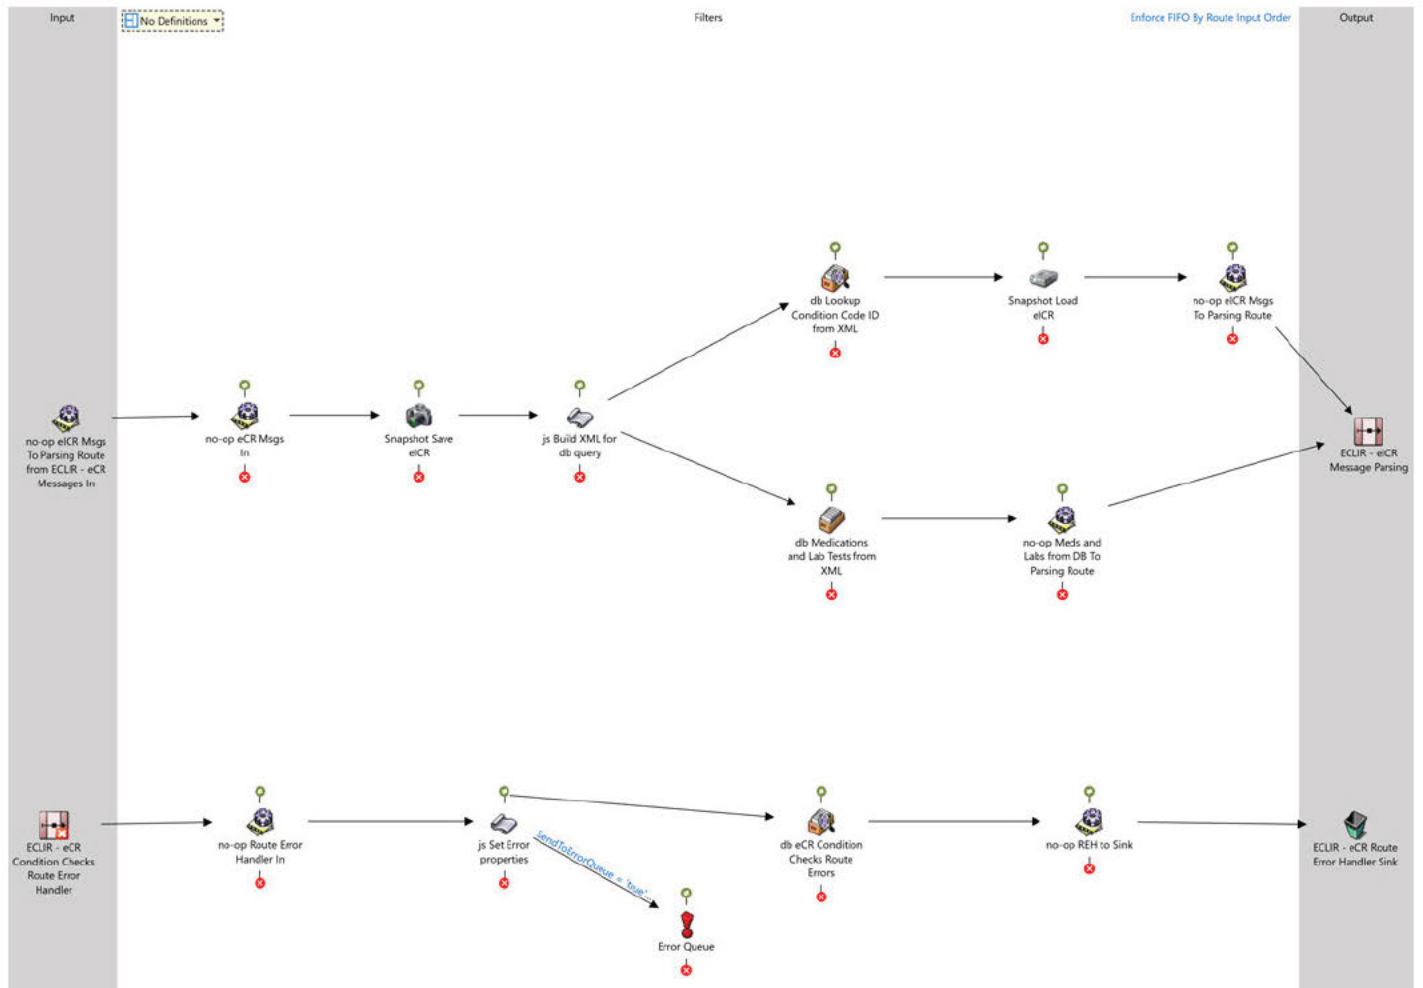

Notes

Purpose:

This route receives eICR (Initial Case Report) documents from the *ECLIR - eICR Messages In* route.

A Snapshot Save filter saves a copy of the eICR document to be restored later for use in the *ECLIR - eICR Message Parsing* route.

A database lookup is performed based on the triggered condition(s). The *db Lookup Condition Code ID from XML* Database Lookup filter queries the REPORTABLE_CONDITION table to find a match to an RCKMS condition code. If the condition code is found, the unique identity of the condition is set in the message property array Condition_ID_Pair to a concatenated value of the condition code + '==' + the reportable condition ID.

The *db Medications and Lab Tests from XML* Database Lookup filters query the MEDICATION_CODES and LABORATORY_TEST_CODES tables to extract a list of all medications and lab tests relevant to the condition(s) triggered. The output XML is used in the next route *ECLIR - eICR Message Parsing*.

Since the Database Message Extraction filter *db Lookup Condition Code ID from XML* returns an XML output, the eICR message

Snapshot Load eICR

ECLIR - eICR Message Parsing

Inputs	Page
no-op eICR Msgs To Parsing Route (filter from "ECLIR - eCR Messages In").....No-operation	38
Outputs	Page
ECLIR - eICR Message Parsing.....Route	115
ECLIR - eICR Message Parsing.....Route	115
ECLIR - eCR Route Error Handler Sink.....Sink	11

Filters

Name	Page
db eCR Condition Checks Route Errors.....Database LookUp	107
db Lookup Condition Code ID from XML..... Database LookUp	110
db Medications and Lab Tests from XML.....Database Message Extraction	105
Error Queue..... Error Queue	107
js Build XML for db query.....JavaScript (v.1)	103
js Set Error properties..... JavaScript (v.1)	112
no-op eCR Msgs In..... No-operation	112
no-op eICR Msgs To Parsing Route.....No-operation	105
no-op Meds and Labs from DB To Parsing Route..... No-operation	111
no-op REH to Sink..... No-operation	106
no-op Route Error Handler In..... No-operation	103
Snapshot Load eICR..... Snapshot Load	103
Snapshot Save eICR.....Snapshot Save	111

Details

General	
Priority	Normal
Startup State	Startup Third
FIFO Mode	Enforce FIFO By Route Input Order
Stop route on error message	False



no-op Route Error Handler In

Filter

No-operation

On ECLIR - eCR Condition Checks route

Notes

Purpose: This No-operation filter receives messages from the *ECLIR - eCR Condition Checks Route Error Handler* when an unhandled error occurs anywhere in the route.

Destinations

Name	Page
js Set Error properties..... JavaScript (v.1)	112



Snapshot Load eICR

Filter

Snapshot Load

On ECLIR - eCR Condition Checks route

Notes

Purpose: This Snapshot Load filter returns the copy of the eICR document to the route for use in the *ECLIR - eICR Message Parsing* route.

Configuration Properties

Fail on Processing Error	true
Fail on Missing Snapshot Properties	true

Destinations

Name	Page
no-op eICR Msgs To Parsing Route.....No-operation	105



js Build XML for db query

Filter

JavaScript (v.1)

On ECLIR - eCR Condition Checks route

Notes

Notes

Purpose: This JavaScript filter creates an XML output message with multiple condition code elements to be used to iterate through in the Database Lookup filter *db Lookup Condition Code ID from XML* and the Database Message Extraction filter *db Medications and Lab Tests from XML* to find information relevant to the condition code.

Javascript

```
//
=====
//_____INITIAL VARIABLES (start
)_____
//
=====

var next = output.append(input[0]);
var dbInsertsXML = new XML(<message></message>);
var conditionCode = next.getProperty('conditionCode');

//
=====
//_____INITIAL VARIABLES (end
)_____
//
=====

//
=====
//_____BUILD XML FOR DB QUERY (start
)_____
//
=====
//Build an XML output file used to iterate through for the database lookup.

var conditionCodes = conditionCode.split('^');
for (i=0; i < conditionCodes.length; i++) {
    dbColumnName = <{'conditionCode'}>{conditionCodes[i]}</{'conditionCode'}>;
    dbInsertsXML.appendChild(dbColumnName);
}

next.text = dbInsertsXML;

//
=====
//_____BUILD XML FOR DB QUERY (end
)_____
//
=====
```

Destinations

Name	Page
 db Lookup Condition Code ID from XML..... Database LookUp	110