TECHNOVA AI HUB

DOCUMENTATION

# TechNova AI Documentation

Complete guide to the platform and its API: getting started, integration, AI agents, knowledge, Registry, connections and going to production.

**Version 1.0**
Updated on November 11, 2026

www.technovaihub.com

# Contents


01 Quick start

02 Examples

03 Authentication

04 Chat completions

05 Available models

06 Credits & billing

07 Error codes

08 Limits

09 Topping up credits

10 AI agents

11 Knowledge bases

12 Registry

13 Connections

14 Where to use them

15 Use cases

16 Going to production

# 01 Quick start

Create an account, top up your Technova credits (Mobile Money or card), generate an API key in the API section of your dashboard, then send your first request from your server.

```
curl https://www.technovaihub.com/api/ai/chat \
  -H "Authorization: Bearer $TECHNOVA_API_KEY" \
  -H "Content-Type: application/json" \
  -d '{
    "model": "Gemini 2.5 Flash",
    "messages": [{ "role": "user", "content": "Hello Technova" }]
  }'
```

# 02 Examples

Your first request.

POST /api/ai/chat · JavaScript

```
const r = await fetch("https://www.technovaihub.com/api/ai/chat", {
  method: "POST",
  headers: {
    Authorization: `Bearer ${process.env.TECHNOVA_API_KEY}`,
    "Content-Type": "application/json",
  },
  body: JSON.stringify({
    model: "Gemini 2.5 Flash",
    messages: [{ role: "user", content: "Résume ce devis." }],
    idempotency_key: crypto.randomUUID(),
  }),
});
const data = await r.json();
```

POST /api/ai/chat · Python

```python
import os, uuid, requests

r = requests.post(
    "https://www.technovaihub.com/api/ai/chat",
    headers={"Authorization": f"Bearer {os.environ['TECHNOVA_API_KEY']}"},
    json={
        "model": "Claude Haiku 4.5",
        "messages": [{"role": "user", "content": "Traduis en fon."}],
        "idempotency_key": str(uuid.uuid4()),
    },
    timeout=60,
)
print(r.json())
```

POST /api/ai/chat · PHP

```php
$ch = curl_init("https://www.technovaihub.com/api/ai/chat");
curl_setopt_array($ch, [
  CURLOPT_HTTPHEADER => [
    "Authorization: Bearer " . getenv("TECHNOVA_API_KEY"),
    "Content-Type: application/json",
  ],
  CURLOPT_POST => true,
  CURLOPT_POSTFIELDS => json_encode([
    "model" => "GPT-4o Mini",
    "messages" => [["role" => "user", "content" => "Bonjour"]],
    "idempotency_key" => bin2hex(random_bytes(16)),
  ]),
  CURLOPT_RETURNTRANSFER => true,
]);
$response = curl_exec($ch);
```

POST /api/ai/chat · cURL

```bash
curl https://www.technovaihub.com/api/ai/chat \
  -H "Authorization: Bearer $TECHNOVA_API_KEY" \
  -H "Content-Type: application/json" \
  -d '{"model":"DeepSeek V3","messages":[{"role":"user","content":"Salut"}]}'
```

## 03 Authentication

Every call uses a bearer token. A key belongs to one account and spends that account's credits. It is shown only once, when created: keep it in an environment variable. Never expose it in a browser or mobile app: call the API from your server.

If a key leaks, delete it from the dashboard and create a new one.

```
Authorization: Bearer tn_live_xxxxxxxxxxxxxxx
```

## 04 Chat completions

One endpoint, POST /api/ai/chat, for every text model. Accepted fields: model, messages (system, user and assistant roles, 60 messages max), max_tokens (1 to 4,096), temperature (0 to 2) and idempotency_key.

The response follows the chat.completion format: the generated text in choices[0].message.content and, in usage, the tokens used and the exact credits charged. Repeating an idempotency_key returns the original response without charging again. Responses are returned in one piece (no streaming).

```
POST /api/ai/chat
{
  "model": "Claude Sonnet 5",
  "messages": [
    { "role": "system", "content": "You are a sales assistant." },
    { "role": "user", "content": "Write a follow-up email." }
  ],
  "temperature": 0.7,
  "max_tokens": 800,
  "idempotency_key": "<uuid>"
}

→ 200
{
  "object": "chat.completion",
  "choices": [{ "message": { "role": "assistant", "content": "…" } }],
  "usage": { "prompt_tokens": 42, "completion_tokens": 180, "credits": 3 }
}
```

## 05 Available models

The model field accepts the name shown on the Models page, for example "GPT-4o Mini", "Claude Sonnet 5", "Gemini 2.5 Flash" or "DeepSeek V3". An unknown model returns model_not_available with the list of accepted models.

The API covers text and code models. Images, videos and music are generated from the TechNova app.

## 06 Credits & billing

The billing unit is the Technova credit. Each response is charged for the tokens actually used at the model's rate; a failed request costs nothing.

- 1 credit ≈ 1 FCFA of usage value.
- Credits never expire and are shared across the whole platform.
- Every request is listed in the Usage section of the dashboard, with CSV export.

## 07 Error codes

Errors are returned as { "error": { "code", "message" } }. Handle them explicitly.

- invalid_api_key (401) — missing or invalid key.
- insufficient_credits (402) — balance too low, offer a top-up.
- model_not_available (400) — unknown model.
- invalid_request (400) — malformed request; the message names the field.
- rate_limited (429) — too many requests, retry after a pause.
- upstream_error (502) — the model could not answer, no credits charged.

## 08 Limits

By default: 60 requests per minute per account, 60 messages per request, 40,000 characters per message and 4,096 response tokens max. Need higher limits? Contact us.

## 09 Topping up credits

Top up from the dashboard with Mobile Money (MTN, Moov, Orange Money, Wave) or a bank card, through our secure payment partner. Credits are added only after the partner confirms the payment, never from the browser.

## 10 AI agents

An AI agent is an assistant you set up once for a specific job: customer service, writing, research, technical support… It keeps its role, tone and rules from one conversation to the next, so you don't explain everything again in each message.


You create it in the dashboard, under AI agents, then chat with it in the TechNova chat.

## What an agent is made of

**Instructions**
Its role, tone and rules (up to 8,000 characters).

**Memory**
What it must always keep in mind: your company, offers, contacts.

**Model**
TechNova Smart (the cheapest suitable one) or a specific model from the catalogue.




**Budget**
A credit ceiling per reply: the agent never spends more.

**Tools**
Web search, reading a web page… off until you tick them.

**Knowledge**
Your document bases, to answer from your own sources.

## What happens when you write to it

01 Your message

02 Agent instructions + memory

03 Allowed tools and passages from your knowledge

04 The model writes

05 Reply, within the budget

### How to use it

1. Create the agent: name, description, instructions, memory.
2. Pick the model and the budget per reply.
3. Tick the useful tools and attach your knowledge bases.
4. Click "Chat": the conversation opens in the chat with this agent.
5. Edit it any time: each change creates a new version.

### Tools

Active : ✓ Web search ✓ Read a web page ✓ Read files ✓ Read a database

Locked for safety : Run code Write to a database Send emails Payments

Read files: the agent reads the files you already added (in the chat or your knowledge) — the ones you name in the message, otherwise the most recent. Read a database: it looks, read-only, at the Supabase project connected in your Settings (Pro pack) — the list of tables and columns, and up to 20 rows of the tables you name. It never changes anything.

Agents come with the Creator pack and above; the budget per reply is free to set with the Pro pack (20 credits by default otherwise).

## 11 Knowledge bases

A knowledge base gathers your documents (catalogue, procedures, contracts, courses, FAQ…) so the AI answers from your information rather than its general knowledge.

You create it under Knowledge, add your files, and TechNova prepares them for search.

### What TechNova does with your files

01 Upload

You add your files to private storage.

02 Checks

Format, size and a security scan.

### 03 Extraction

The text is read, even in PDF and Word files.

### 04 Splitting

The text is cut into short passages.

### 05 Indexing

Each passage is indexed to be found by meaning, not only by words.

### 06 Answer

For each question, the most useful passages are given to the AI.

## How to use it

1. Create a base and give it a clear name (e.g. "2026 catalogue").
2. Add your documents; follow each file's status (processing, ready, error).
3. Try the search right on the page to see the passages found.
4. In the chat, pick the base when you write: the answer relies on your documents.
5. Or attach it to an agent: it checks it for every reply.


- Accepted formats: PDF, Word, Excel, CSV, PowerPoint, text, Markdown, HTML, JSON, code files, images, audio (MP3, WAV), video (MP4, MOV) and ZIP — up to 25 MB depending on the type.
- Your files stay private: only you can read them, and document content is treated as information to consult, never as orders given to the AI.
- Preparing documents is billed in credits at its real cost; deleting a source removes it from the base at once.

# 12 Registry

The Registry is a library of ready-to-use resources: full pages, consoles, UI kits, components, animations, fonts, prompts and workflows. It helps you start faster: instead of a blank page, you start from a proven resource.

It holds the official TechNova designs and your own resources, which you can keep private or share.

## What you will find

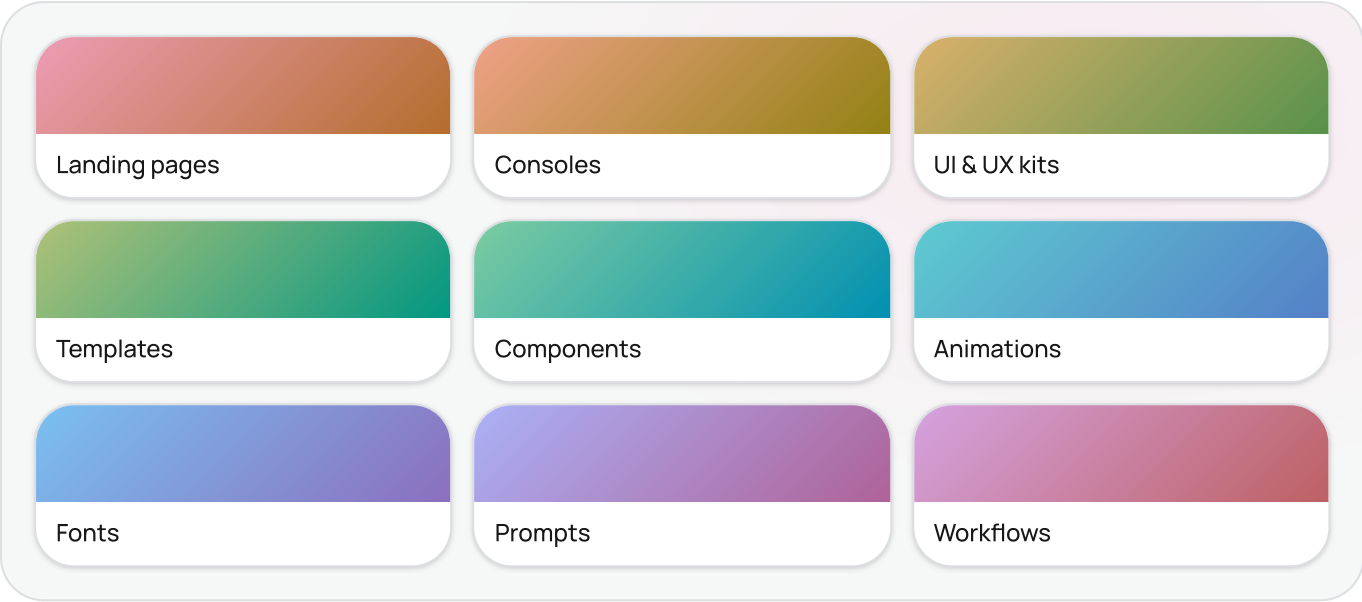


## What you can do with a resource

### Preview

See it live, on desktop or mobile, in an isolated, secure frame.

### Code

Read and copy its code or text.

### Download

Save the file to your computer.

### Use

Send it to the Studio (Create mode) to build your site from it, or use a prompt right in the chat.

### Remix

Make your own editable copy, if its license allows it.

### Favorites and sharing

Keep it as a favorite or copy a link to share it.

## Add your own resources


1. Click "Add": title, description, category and content (code, prompt, text…).
2. Pick the format (TXT, Markdown, HTML, CSS, JS, TSX, JSON, SQL) and the license (TechNova, CC0, MIT, CC BY, CC BY-SA, OFL or all rights reserved).
3. A resource is private by default. To make it public, its license must allow redistribution.

Official TechNova designs come with the Creator and Pro packs; Starter and Essential get the free "Halo" design and see the others as locked previews. Your own resources stay available with every pack.

# 13 Connections

Connections link your TechNova account to your own services, to send what you create where you already work. Each connection goes through the service's official window: you grant access without ever giving TechNova your password.

## Services

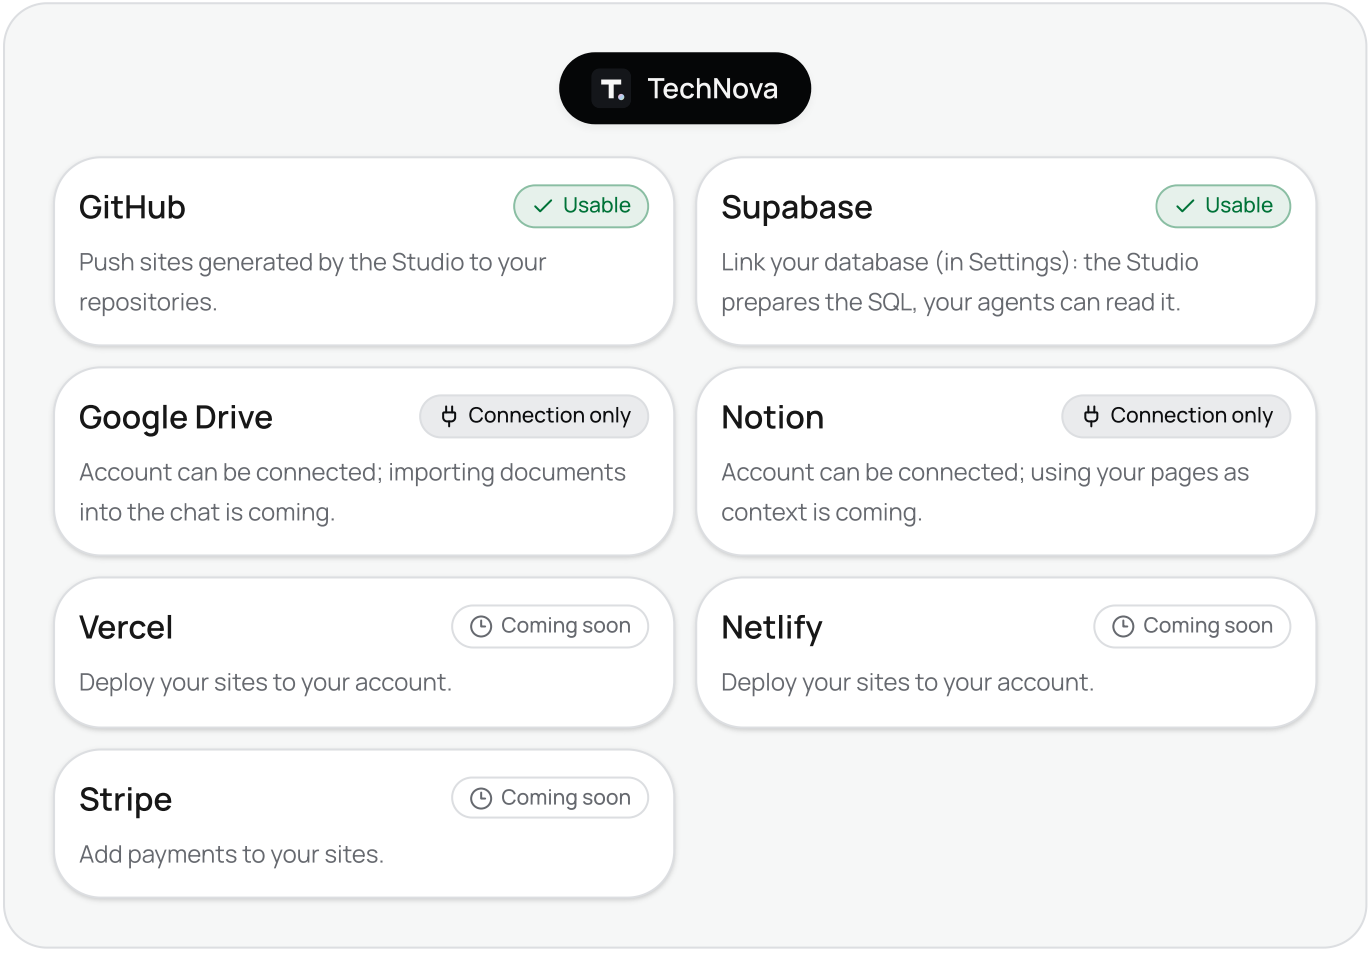


## How to connect a service

1. Open Connections in the dashboard (Supabase: in Settings).
2. Click "Connect": a window from the service opens (allow pop-ups).
3. Accept the requested access; the window closes and the service shows "Connected".
4. For Supabase, then choose the project to use.
5. Disconnect any time: access is removed at once.

### Supabase in detail

- The Studio generates your database SQL for you to review and copy: nothing runs automatically on your project.
- An agent with the "Read a database" tool looks at that project read-only: tables, columns and a few rows of the tables you name.

### Your published sites

- The Connections page also lists the sites you published from the Studio (technovaihub.com/s/… address) with their update date, and lets you unpublish a site in one click.
- Access tokens are encrypted and stored server-side; they are never readable from the browser. GitHub and Supabase need the Pro pack; site publishing, the Creator pack.

## 14 Where to use them

Today, agents and knowledge bases are used inside TechNova.

| | AI agents | Knowledge bases |
|---|---|---|
| In the TechNova chat | ✓ Available | ✓ Available |
| Attached to an agent | ✓ Available | ✓ Available |
| From the public API (another app) | ✕ Not yet | ✕ Not yet |
| Download / export | ✕ Not yet | ✕ Not yet |

- To reuse an agent elsewhere today, copy its instructions into the other tool; your original files remain yours.
- The public API already gives access to every text model: you can send your agent's instructions there as a system message.

## 15 Use cases

Copy-ready recipes.

### WhatsApp support assistant

Connect your WhatsApp webhook to /api/ai/chat and keep history server-side.

### Document summaries

Split text into 4,000-token chunks, summarise each, then merge the summaries.

### Code generation

Use a specialised model with temperature 0.2 for deterministic output.

### Local translation

French, English, Fon, Yoruba, Wolof: set the target language in the system message.

## 16 Going to production

Check before going to production.

- Call the API from your server, never from the browser.
- Send one idempotency_key per request so you never pay twice.
- Handle INSUFFICIENT_CREDITS by offering a Mobile Money top-up.
- Plan a fallback to a lighter model during outages.
- Monitor usage from the dashboard.