

Complete Collection API Flow (POST)

For API : <http://domain/merchantPay/oauth2/token> => Need Domain Also

Domain : <http://txn-upi-switch.boltpc.co.in/merchantPay/oauth2/token>

1. Generate Access Token(OAuth2)

Before calling any API, you must authenticate.

API: POST: </merchantPay/oauth2/token>

Authorization :

Username : my-client

Password : my-secret

Headers:

Select Check Box : Content-Type: [application/x-www-form-urlencoded](#)

Don't Select Check Box : Authorization: Basic <base64(client_id:client_secret)> ==> Client ID Not Needed Taken From Client

Body:

grant_type=client_credentials

scope=read

Output: Access Token (Bearer Token) In JSON Format

You send client credentials → system returns a token → used for further API calls.

Response Format :

```
{
  "access_token": "eyJhbGciOiJIUzI1NiIsInR5cCI6Ikpz...", ==> Save Access Token
  "token_type": "Bearer",
  "expires_in": 3600
}
```

Save Token

2. Prepare Transaction Request (Plain JSON)

Create a plain JSON payload with required fields:

```
{
  "merchantTxnId": "2026546994443400333", // Unique transaction ID generated by merchant
  "auth_id": "M000093", // Authorized ID
  "txn_timestamp": "2026-05-14 15:32:00", // Current Date and Timestamps
  "txn_type": "Intent", // Transaction type
  "txn_ver": "111", // Transaction version , if in case future any changes in version,
  // Anvitech provide the version number and kit will be updated accordingly
  "initiation_mode": "00",
  "checksum":
  "d2c2323ecfafdc12c5e5ca888adc9bccef08dc0a85c95b014e17991799c2e3bc",
  "purpose_code": "00",
  "note": "Payment for order",
  "callbackUrl": "https://merchant.com/callback",
}
```

```

"expiresIn": 10,
"amount": 500.00,
"reseller_auth_id": "000000",
"reseller_txn_id": "00000000000000",
"autoCapture": true,
"pay_key": "gatla_dpInQZ@paytm", // VPA Address => VPA Management System
=> alias + handleid
"description": "Payment via Intent", // Any Description of the transaction
"txn_medium": "WEB", // Transaction medium (e.g., WEB, APP)
"customer": {
  "name": "Tejas Jawale",
  "email": "tejas.jawale@example.com",
  "phone": "+917420871899"
}
}

```

Create request with transaction + customer + checksum

3. Create Checksum

Checksum ensures security + data integrity

checksum = SHA256(auth_id + merchantTxnId + amount + pay_key)

Logic: auth_id + merchantTxnId + amount + pay_key

Example: M000093 + 2026546994443400333 + 500.00 + gatla_dpInQZ@paytm

M0000932026546994443400333500.00gatla_dpInQZ@paytm

Apply:

SHA256 Hash

Link : <https://emn178.github.io/online-tools/sha256.html>

Output:

555bd8c3c9a621225d2bd301da40d180ffcb5b2b7e7a5bd55bb854c7573baff

Add to JSON in Step 2:

"checkSum": "generated_hash"

4. Encrypt Request (AES-256)

Encrypt the entire JSON request using: => **From Step No. 2**

AES-256 Encryption

Link : <https://encode-decode.com/aes256-encrypt-online/>

Shared Secret Key

Output: Encrypted Data (Encrypted_String)

zDK356eab47ptuAN1b/wx6r/+EM0EZsWmsTQzhr0YAUyGQ+LrP8IxiK8TyMAuWsU81mFAeV7I7r
micgw8JC62JNab64fEOSJquNGeRUa2ynakrKVvqPcDHjL5JVauUzBPWdv1qhYwHMfojGLV8RFx
JAAecVdLjGHGSUd4czBcHuDAEAawKQVSWMJQrHwhYI2BGCvsJ3g3P0+Y77HvTs1WeRjyV6k
oDx4cNFVfec1NfBmSyiTgpNlbzGEXADRIBpEbBN9AbgkGXufGAaJAK3Z0N9VAkvYUrsQfbIEFc0
0tv8lu5rJKXVVcmH46lzEKQiK6XO4lym1qfOpSvsF7+xM2qPUb7UVBP63ZImLTU0+a9u4Hett7Lp
4uYRveze0nJlxE3K5v/hCaNV/TRlzcYFnKn3Z6kRFjCaTw5rQ5ceJqz34iLRnSNH6ACjrDihID33HX
/pH5FYeiOfKzZhhOLR6WQPURvKs5WoiahloYlvJSjSWlqPxfEKUHjfHD5S8q6fYI0evi51wRIYxmdk
itAm6NcBv3zD8lkaHt97JPZ39mwP1TvbMODIH8L4J5sOYRkMIRGyy/y5zBZX/fZZJMx3UhF670+j
BwWmsnzm4SjySym7ckxlQe/DTqzYvPo4q29Te/yNWp+X9V5Hj4CrXznpfk21BU03DeELk7rEO88f
BLHKW49tvwkJLiWIBRFEOole6IVBs9huXetyKgn+CnU6MsX427nE7FfVfGXGmwoVWBACmIBpa
XJh+pg4peSNwQve1cn3BA9ZWND61GSYkEt0PkRp/kgp2mmf8/ynqDJEWO5N3Z0PwLVQC9YrP
7qzdvgUbKSx3hFb+MZdCWQWgdeiFijN2r0BgUUMRYAY7m+QavmckY7SSBum9Js4yNzHcDD
Q4V/Vz+NENWB2y/D/xO5Sn9uciz4KkNLrxlsO5LapuAF/VgLq/Rqy9766QTGBARfJz0hr+DECD6P
AZhzp0x8nqog==

5. Call Collection API (Initiate Payment)

API:

POST /merchantPay/payments/upi/initiate

Headers:

Content-Type: application/json

Authorization: Bearer <access_token> => **Receiver from Step no. 1**

Body:

```
{
  "encData": "Encrypted_String", => Receiver from Step no. 4
  "authId": "M0000109"
}
```

6. Merchant Transaction Key

Key : String MerchantTransactionKey = "zq7rA6Jp3go0TQ8nR8Ry4kz9Zb2vh4wT";

Path : **Merchant Login => My Account => Transaction Key**

7. Server Processing

1. Validate Bearer token
2. Decrypt encData
3. Validate checksum
4. Validate request fields
5. Process transaction

8. Response Handling

Success → Intent created (UPI app trigger)

Failure → Error response

Success Response :

```
{
  "status": "SUCCESS",
  "txnId": "TXN12345",
  "message": "Transaction Initiated"
}
```

9. Callback Handling (Async Flow)

Server sends response to: callbackUrl

Contains:

Transaction status

Reference IDs

Final Flow Summary

Client



Generate Token



Create Request JSON



Generate Checksum (SHA256)



Encrypt Payload (AES-256)



Call Payment API (Bearer Token + encData)



Server



Decrypt → Validate → Process



Response + Callback

Explanation :

1. Merchant sends request to Auth Server to generate token
2. Auth Server validates credentials and returns access token
3. Merchant creates checksum using transaction details
4. Merchant prepares transaction request in JSON format
5. Merchant encrypts the request using AES-256
6. Merchant sends encrypted request to Collection API (UPI Switch)
7. UPI Switch forwards payment request to PSP / UPI App
8. Customer receives payment request notification on UPI app
9. Customer approves or rejects the payment
10. UPI system processes the transaction through bank network
11. Final transaction status is generated (Success / Failure)
12. Callback response is sent back to Merchant

POSTMAN COLLECTION FLOW

STEP 1: GENERATE THE TOKEN

1. Open Postman

2. Click


New → HTTP Request

3. Set Method + URL

Method: **POST**

URL : <http://domain/merchantPay/oauth2/token>

4. Add Authorization

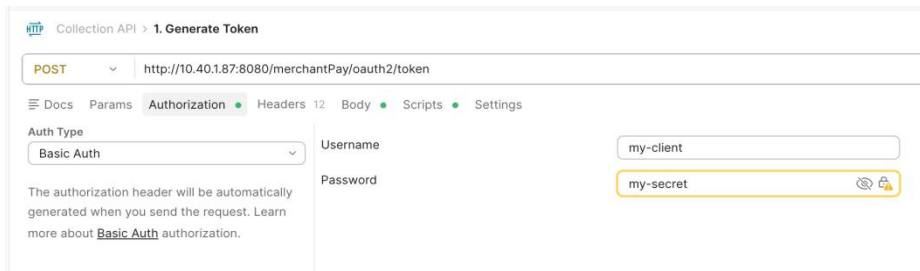

5. Add Headers

Go to Headers tab

add:


KEY

VALUE

Select Checkbox : Content-Type : **application/x-www-form-urlencoded**

Don't Select Checkbox: Authorization : **Basic <base64(client_id:client_secret)>** Client ID

Needed Taken From Client

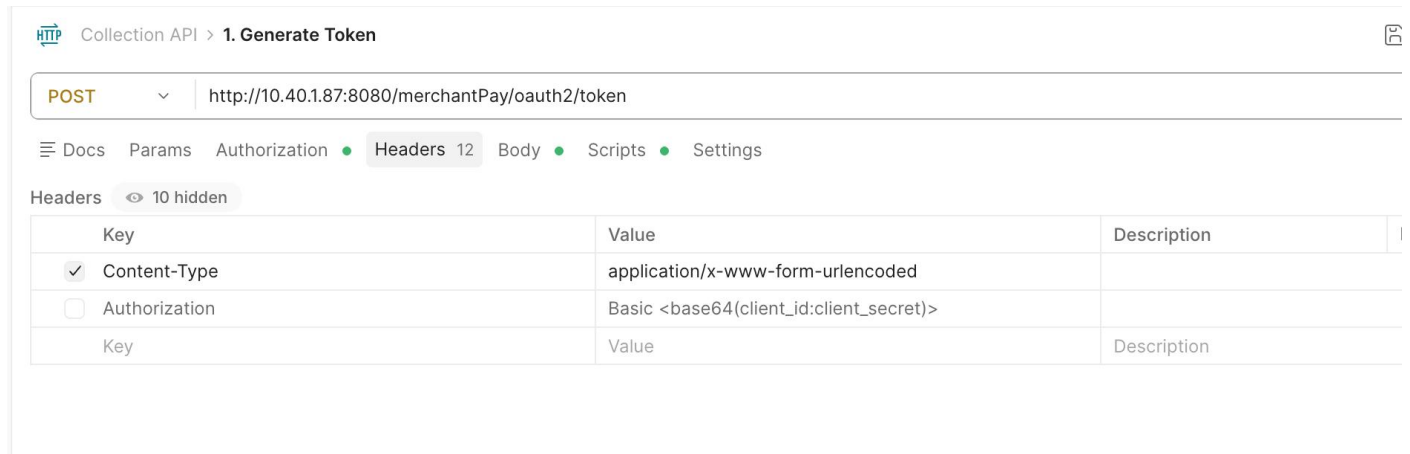

6. Add Body

Go to Body tab

Select: **x-www-form-urlencoded**

KEY

VALUE

grant_type = client_credentials

scope = read

POST http://domain/merchantPay/oauth2/token Send

Docs Params Authorization Headers 11 **Body** Scripts Settings Cookies

☐ none ☐ form-data ☒ x-www-form-urlencoded ☐ raw ☐ binary ☐ GraphQL

Key	Value	Description	Bulk Edit	...
✓ grant_type	client_credentials			
✓ scope	read			
Key	Value	Description		

7. Click Send

You will get JSON:

```
{
  "access_token": "your_token_here" ==> Save this Token
}
```

STEP 2: INITIATE PAYMENT UPI MANUALLY

1. Click

New → HTTP Request

Method: **POST**

URL : <http://domain/merchantPay/payments/upi/initiate>

2. Add Headers

KEY **VALUE**

Content-Type : **application/json**

Authorization : **Bearer <paste_access_token_here> => From Step 1st UPI take Token from 6th Steps**

POST http://domain/merchantPay/payments/upi/initiate Send

Docs Params Authorization **Headers** 11 Body Scripts Settings Cookies

Headers 9 hidden

Key	Value	Description	Bulk Edit	Presets	...
✓ Content-Type	application/json				
✓ Authorization	Bearer <paste_access_token_here>				
Key	Value	Description			

3. Add Body

Select: raw → JSON

```
{
  "encData": "<ENCRYPTED_DATA>", <!-- for Encrypted data You have to follow Step 2 to 5 in Collection Flow --->
  "authId": "M000062"
}
```

POST http://domain/merchantPay/payments/upi/initiate Send

Docs Params Authorization Headers 11 **Body** Scripts Settings Cookies

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary ☐ GraphQL **JSON** Schema Beautify

```
1 {
2   "encData": "<ENCRYPTED_DATA>",
3   "authId": "M000062"
4 }
```

CLICK SEND : Payment request will be initiated