

HALLIBURTON WORKWEAR & PPE CATALOGUE

For all inquiries contact:
halliburton@tess.no

REV. Aug 2026 MJ/TESS
Merethe.Jentoft@tess.no



TESS

– TEKNISK FAGHANDEL



EN 342

Clothing that is certified in accordance with EN 342:2017 is guaranteed to keep you well protected from the cold.



EN 343

Protective clothing certified according to EN 343 protect against precipitation as rain or snow, fog and ground humidity.

EN ISO20471



EN ISO 20471

This International standard specifies requirements for high visibility clothing which are capable of visually signaling the wearer's presence. The selection and use of high-visibility clothing should be based on a risk assessment of the conditions in which the wearer of the high-visibility clothing will be working. The number next to the pictogram indicates the class to which the item belongs

EN ISO11611



EN ISO 11611

Protective clothing certified according to EN ISO 11611 gives the wearer protection against small splashes of molten metal, and brief contact with flame. The garments certified to this standard are suitable for use in welding and allied processes. The garment is classified for the protection ability against different levels of welding technology, which cause more or less spatter and radiant heat.

Class 1 - Protects against less hazardous welding techniques and situations, causing lower spatter and radiant heat

Class 2 - Protects against riskier welding techniques and situations, which causes higher levels of spatter and radiant heat

(A1) Limited flame spread

(A2) Limited flame spread, hemmed specimens.

EN ISO 11612



EN ISO 11612

Protective clothing certified according to EN ISO 11612 gives the wearer protection against brief contact with heat and flame. The heat can be convective, radiant, molten material, or a combination thereof

IEC 61482-2



IEC 61482-2

Clothing that is certified in accordance with IEC 61482-2 protects against the thermal hazards associated with electric arcs

Method 1: Using an open arc determination of arc declaration values (ELIM, ATPV and / or EBT) of garment materials and protective clothing.

Method 2: Determination of arc protection class of material and clothing by using a constrained and directed arc (box test)

EN 1149-3/5



EN 1149-3:2004 - electric discharge

This standard specifies workwear that is tested for its ability to dissipate electrostatic charge from the surface of the clothing material. The standard explains that the safety apparel has been tested for its ability to discharge electrostatic charges to the air and therefore won't conduct it to the user of the clothing.

EN 1149-5:2008 - the design and performance of the material

This standard describes the requirements for electrostatic properties for safety apparel used in areas where there is a hazard of sudden electrostatic discharge. The test method specifies the requirements for materials and design of safety clothing with electrostatic properties, in order to protect the wearer as best possible.

EN 13034



EN13034

EN 13034/EN 13034+A1 offers limited protection against small quantities and splashes of liquid chemicals (Type 6 and Type PB [6] equipment). Safety apparel with this certification is suitable for use in areas where there is a risk of exposure to small splashes of chemicals, but where full body protection is not required. EN 13034 certified safety clothing is suitable for situations when you are in areas where you risk being exposed to small quantities of chemicals. **Quickly**

remove the safety apparel if it's exposed to chemicals.

Multinorm clothing 300 grams

AK2014936-STR Multinorm jacket red/yellow with zip

AK2014937-STR Female

Description

300 gram offshore jacket with hidden zip. All zips and buttons are in flame-retardant plastic. The garment is flame retardant, antistatic and arc approved. The fabric used has an ATPV value of 14 cal/cm2. .

Details:

- 50mm reflective tape over shoulders, around arms.
- Straps on the chest for gas meter or microphone for connection
- Breast pockets with plastic zips
- Sleeve adjustment with Velcro
- Pen pocket left arm
- Fold in the back for increased comfort and movement.

EN Standard:

* EN:11612:2015 A1-A2-B1-C1-F1

- EN:1149-5:2018
- EN:61482-2:2020 APC 1
- EN:61482-1:2014
- EN ISO:13688:2013

Fabric: 75% cot.24% pol.1% carbon fiber 300 grams.

Sizes Unisex: 44-70

Sizes Female: 34-44

Packaging: 1/10.



High visibility fluorescent yellow contrast color is approved According To EN:20471

GSA

Multinorm clothing 300 grams

AK1013675-STR Multinorm pants red/yellow with zip **AK1013676-STR Female**

Description

300 gram offshore pants. The garment is flame retardant, antistatic and arc approved. The fabric used has an ATPV value of 14 cal/cm2.

Details:

- 50mm reflective tape around legs.
- Pocket left thigh
- Lifted waist behind for added comfort

EN Standard:

* EN:11612:2015 A1-A2-B1-C1-F1

- EN:1149-5:2018
- EN:61482-2:2020 APC 1
- EN:61482-1:2014

Fabric: 75% cot.24% pol.1% carbon fiber 300 grams.

Sizes Unisex: 44-70

Sizes Female: 34-44

Packaging: 1/10.



High visibility fluorescent yellow contrast color is approved According To EN:20471

GSA



TESS

– TEKNISK FAGHANDEL

Multinorm clothing 300 grams

AK3010741-STR Multinorm CVC coverall red/yellow with zip **AK3010742-STR Female**

Description

300 gram offshore coverall with hidden zip. All zips and buttons are in flame-retardant plastic. The garment is flame retardant, antistatic and arc approved.

Fabric used has an ATPV value of 14 cal/cm2.

Details:

- 50mm reflective stripes over shoulders, around arms and legs.
- Straps on the chest for gas meter or microphone for connection
- Breast pockets with plastic zips
- Elastic waistband
- Thigh pocket left leg
- Knee pockets for kneepad insert
- Large inner pocket on the left side for iPad or documents
- Back pockets without flaps
- Pen pocket left arm
- Ruler pocket right leg.
- Side pockets with inside access
- Adjustable leg length - can increase leg length by 4 cm
- Fold in the back for increased comfort and movement.

EN Standard:

- EN:11612:2015 A1-A2-B1-C1-F1
- EN:1149-5:2018
- EN:61482-2:2020 APC 1
- EN:61482-1:2014
- EN ISO:13688:2013

Fabric: 75% cot.24% pol.1% carbon fiber 300 grams.

Sizes unisex: 44-70

Sizes Female: 34-44

Packaging: 1/10.



GSA

High visibility fluorescent yellow contrast color is approved According To EN:20471

Multinorm clothing 350 grams

AK3010768-STR Multinorm Overalls red with zip

Description

350 gram offshore coverall with hidden zip. All zips and buttons are in flame-retardant plastic. The garment is flame retardant, antistatic and arc approved. The fabric used is welding approved according to EN:11611 class 2 and has an ATPV value of 11cal/cm2.

Details:

- 50mm reflective stripes over shoulders, around arms and legs.
- Straps on the chest for gas meter or microphone for connection
- Breast pockets with plastic zips
- Sleeve adjustment with Velcro
- Elastic waistband
- Thigh pocket left leg
- Knee pockets for kneepad insert
- Large inner pocket on the left side for iPad or documents
- Back pockets without flaps
- Pen pocket left arm
- Ruler pocket right leg.
- Side pockets with inside access
- Adjustable leg length - can increase leg length by 4 cm
- Fold in the back for increased comfort and movement.

EN Standard:

- EN:11612:2015 A1-A2-B1-C1-E3-F1
- EN:1149-5:2018
- EN:61482-2:2020 APC 1
- EN:61482-1:2014

Fabric: 98% cot .2% carbon fiber 350 grams.

Sizes Unisex: 44-70

Sizes Female: 34-44



TOO BE APPROVED BY PSL

GSA



TESS

– TEKNISK FAGHANDEL

WORKWEAR

AK3010769-STR Winter coverall red-hi viz yellow

Durable, waterproof, flame-retardant winter coverall with quilted, insulating lining.

Adjustable and detachable hood, concealed 2-way zip at front, and several practical pockets. Adjustable waist, sleeve cuffs, and leg hems. This coverall is ideal for work outdoors or in cold environments, for which flame protection is required.

Color: Red/Fluorescent Yellow

Size: XS-4XL
Fabric: 99 % Polyester, 1% AST
Weight: 300 gr./m2
CE: EN 14116, EN 1149, EN 343

The Coverall has a slightly narrower neck opening than standard. Please let us know if an alternative is required.



GSA



TESS – TEKNISK FAGHANDEL

WORKWEAR

AK2012928-STR Multinorm Parka cl. 3

Description

Flame-retardant Hi-Vis Winter Rain Jacket in heavy tear-resistant quality

98% Polyester, 2% Carbon Grid, 240 g/m²

Lining: 100% Cotton

Breathable, wind and waterproof with taped seams

Waterproof: >8.000 MM / Breathability: 5.000 Mvp

FR-LR11300 can be zipped into the jacket

- Detachable hood with drawstring, hidden in collar
- Sleeves with velcro adjustments
- Hidden zipper under storm flap with velcro closure
- Loop for radio
- One chest pocket
- Two outside pockets with velcro
- Pocket on left arm with velcro
- Inside pocket with zipper
- Inside mobile pocket



Option: AK2012929-STR Jacket
Zip-in Antiflame

CE: EN ISO 20471 kl. 3
EN ISO 14116 Index 1
EN 1149-5
EN 343 2,3

Size: Fabric: S-5XL
Weight: 100% 300 D polyester/PU
260 gram/m²

AK2015029-STR Winter jacket GSA MULTINORM RØD-GUL

Description

- Waterproof outer fabric with taped seams
- Padded lining
- Stand-up collar with fleece lining
- Detachable hood with brim and adjustment
- Helmet-compatible hood with front hook-and-loop fastening
- Concealed two-way zipper under front storm flap
- Ribbed cuffs at sleeve ends
- Two chest pockets with zipper under flap
- One ID card pocket
- One sleeve pocket with flap
- Two front pockets with zipper under flap
- One map pocket with zipper
- One inner pocket
- One mobile phone pocket
- Reflective details on shoulders and sleeves

Material: 99% Polyester, 1% Carbon, 210 g/m² **Lining:** 100% Cotton

- EN ISO 13688:2013 + A1:2021 – General requirements for protective clothing
- EN ISO 14116:2018 – Index 1.3, limited flame spread
- EN 1149-5:2018 – Antistatic properties
- EN 343:2019 – Class 3.1, protection against rain

The jacket has a slightly narrower neck opening than standard. Please let us know if an alternative is required.



TESS

– TEKNISK FAGHANDEL

WORKWEAR

AK2015201-STR Softshell jacket PW3 Modaflame FR718 HV Y/B

The PW3 FR Modaflame Hi-Vis Softshell Jacket is made from a durable 3-layer protective softshell fabric. Combining modacrylic and carbon fiber, it provides flame resistance, chemical splash protection, anti-static properties, and high visibility. Features include segmented heat-applied reflective tape, flame-resistant zipper, extended back, radio loops, and multiple zip pockets.

The jacket is breathable, windproof, and water-resistant, with Acti-Reach™ panels for improved mobility and comfort. Suitable for ATEX environments, CE certified, and non-magnetic.



Size: S-3XL

Quality: Modaflame Softshell 100% Polyester, laminated for TPU FR-membran, tied with 60% Modakryl, 39% cot, 1% Carbon fiber 350g

- CE:
- EN ISO 11612 A1 B1 C2
 - EN ISO 11611 Klasse 2 A1
 - EN 1149 -5
 - IEC 61482-2 IEC 61482-1-2 APC 2
 - IEC 61482-2 IEC 61482-1-1 ELIM 11 CAL/CM², ATPV 16 CAL/CM²
 - EN 13034 Type B
 - EN ISO 20471 Klasse 2



WORKWEAR

AK5010471-STR Parkas Offshore Hi-Viz Yellow

Description

Flame-retardant Hi-Vis Winter Rain
Jacket in PU/PVC quality with quilted
lining
Lining: FR Quilted Cotton lining with
Polyester padding
Wind and
waterproof

Waterproof:
>13.000 MM

Size: S-4XL

Quality: 50% polyester, 50% polyurethane,
170 g/m2

CE: EN 343 , EN ISO 14116.
EN:20471 cl.3



WORKWEAR

AK5010518-STR Rain jacket Multinorm Hi-Viz Yellow

Flame-retardant Hi-Vis Rain Jacket in
heavy
PU/PVC quality
50% Polyester, 25% Polyurethane, 25%
PVC, 350 g/m²
Wind and waterproof
Waterproof: >13.000 MM

Size: S-5XL
Fabric: 50% polyester, 25% pu, 25%
pvc
Weight: 340 gram/m²
CE: EN 343 , EN 471 , EN
1149-5 , EN ISO
14116



AK5010520-STR Bib trousers «Multinorm» Hi-Viz Yellow

Flame-retardant Hi-Vis Rain Bib Trousers in
heavy PU/PVC quality
50% Polyester, 25% Polyurethane, 25% PVC, 350
g/m²
Wind and waterproof
Waterproof: >13.000 MM

Size: S-5XL
Fabric: 50% polyester, 25% pu, 25% pvc
Weight: 340 gram/m²
CE: EN 343 , EN 471 , EN
1149-5 , EN ISO
14116



WORKWEAR

AK5010704-STR Flame Retardant Hi-Vis Rain Jacket in PU quality, 135 cm long

Flame-retardant Hi-Vis long rain jacket Large hood to fit over hard hat.

Two patch pockets

100% Polyester, PU Coating,

210 g/m² Wind and

waterproof

Waterproof: >20.000 MM

Size: S-5XL

Fabric: 100% Polyester, PU

Coating, 210 g/m² Weight: 210 gram/m²

CE: EN 343 , EN 20471 KL.3
, EN 1149-5 , EN ISO
14116,EN:13034



WORK WEAR



AK4010528-str SAFETY VEST HOLMSUND EN-20471 YELLOW

Unisex reflective vest for work use. Sewn-on reflective bands around the waist and over the shoulders. Front zipper closure. Practical front pockets with zippers.

CE certified. EN 20471, Class 2.

Sizes: S, M, L, XL, XXL, 3XL

Color: Safety Yellow



AK4010284-XL REFLECTIVE VEST UPPSALA W/ ZIPPER YELLOW EN-471

Unisex reflective vest for work and leisure use. Sewn-on reflective stripes ensure high visibility in all surroundings. Front zipper closure. Comes with a practical safety storage pouch.

CE certified. EN 20471, Class 2.

Sizes: S, M, L, XL, XXL, 3XL, 4XL

Color: Safety Yellow

WORKWEAR



AK7012037-str T-SHIRT ALLENTOWN PRO BLACK-YELLOW

Extremely durable unisex PRO T-shirt made from cotton and 40% recycled polyester. Classic fit with safety yellow contrast panels on the sides and across the shoulders/sleeves. Reflective bands on each shoulder. Withstands heavy industrial washing and drying (60°C). The T-shirt is part of a new collection made from recycled polyester.

TOO BE APPROVED BY PSL



**NOT
FLAME
RETARDANT**



TESS

– TEKNISK FAGHANDEL

WORKWEAR

AK8010321-STR Janus Leggings Female

JanusPro Extra long underwear for women feels soft and comfortable against the skin. The long underwear provides good insulation, even when you are wet, thanks to the combination of merino wool and modacrylic. The JanusPro Extra collection is very durable and is perfect for those who work in varying climates and also need protection against flames, arc flashes, and in environments where there is a risk of explosion (ATEX environments).

Size: XXS-3XL
Fabric: 68% Merino Wool, 30% Modacrylic,
2% Antistatic Fiberviscose,
Weight: 225 gram/m2
CE: EN ISO 11612, 1149-5 , EN 61482-1



AK8010192-STR Janus Bra

Bra Wool, comforting and supporting bra with wide shoulder straps to ensure firm fit and comfort especially while carrying heavy backpacks. Soft elastic under the bust makes closing unnecessary. FR approved elastic. Flatlock seams.

Size: XXS-3XL
Fabric: 61% MERINO
WOOL / 37% MODACRYLIC / 2%
ANTISTAT
Weight: 315 gram/m2
CE: EN ISO 11612, 1149-5 , EN 61482-1



WORKWEAR

AK9010667 Janus pro tube neck warmer JanusPro Extra neck warmer is soft and comfortable against the skin and insulates well, even when wet, thanks to the combination of merino wool and modacrylic. As a wool product, the neck warmer is very durable and has been developed for professional use. It is perfect for those who work in varying climates and simultaneously need protection against flames, arc flashes, and explosive environments (ATEX environments). However, we shouldn't hide the fact that JanusPro is also popular among active outdoor enthusiasts, such as hunters.

Size: One size
Fabric: 68% Merino Wool, 30% Modacrylic, 2% Antistatic Fiberviscose,
Weight: 225 gram/m²
CE: EN ISO 11612, 1149-5 , EN 61482-1



AK9010669 Janus Pro Balaclava

JanusPro balaclava designed for professional use, but can of course also be used in your leisure time. The hat is perfect under a helmet, whether you are working at a smelter, cycling, riding a motorcycle, or skiing.

Size: One size
Fabric: 68% Merino Wool, 30% Modacrylic, 2% Antistatic Fiberviscose
Weight: 225 gram/m²
CE: EN ISO 11612, 1149-5 , EN 61482-1



WORKWEAR

AK8010316-STR Janus T-shirt

JanusPro® Extra wool t-shirt feels soft and comfortable against the skin and provides good insulation, even when wet, thanks to the combination of merino wool and modacrylic. The t-shirt is extremely durable and is perfect for those who work in varying climates and also need protection against flames, electric arcs, and where there is a risk of explosion (ATEX environments).

Size: XS-3XL

Fabric: 68% Merino Wool, 30%

Modacrylic, 2% Antistatic Fiberviscose,

Weight: 225 gram/m2

CE: EN ISO 11612, 1149-5 , EN 61482-1



AK8010317-STR Janus Longs Unisex

JanusPro Extra long underwear unisex feels soft and comfortable against the skin. The long underwear provides good insulation, even when you are wet, thanks to the combination of merino wool and modacrylic. The JanusPro Extra collection is very durable and is perfect for those who work in varying climates and also need protection against flames, arc flashes, and in environments where there is a risk of explosion (ATEX environments).

Size: XS-5XL

Fabric: 68% Merino Wool, 30% Modacrylic,
2% Antistatic Fiberviscose,

Weight: 225 gram/m2

CE: EN ISO 11612, 1149-5 , EN 61482-1



WORKWEAR

AK8010312-STR Janus Polo w/zip

JanusPro Extra feels soft and comfortable against the skin and insulates well, even when you are wet, thanks to the combination of merino wool and modacrylic. The collection is extremely durable and is perfect for those who work in varying climates and need protection against flames, arcs, and areas with explosion risks (ATEX environments). Merino wool combined with modacrylic ensures that the garments have a lasting built-in flame-retardant effect, without chemical after-treatment. On extra cold days, the clothing should be combined with our mid-layer series, JanusPro Plus.

Size: XXS-4XL

Fabric: 68% Merino Wool, 30%

Modacrylic, 2% Antistatic Fiberviscose,

Weight: 225 gram/m²

CE: EN ISO 11612, 1149-5 , EN 61482-1



AK8010318-STR Janus Shirt Unisex with round neck

JanusPro® Extra shirt with a round neck and thumbhole grip. The shirt is knitted with a strong interlock structure and a high proportion of merino wool (68%). Naturally flame retardant, antistatic, and arc protective throughout the garment's lifespan. JanusPro is a series of wool clothing from Janus designed for professional use and has increased durability. However, the clothes can, of course, also be used by those who have an active outdoor lifestyle and are particularly preferred among hunters, for example. Can be washed at 60 degrees.

Size: XS-3XL

Fabric: 79% Merino Wool, 19%

Modacrylic, 2% Antistatic Fibres

Weight: 390 gram/m²

CE: EN ISO 11612, 1149-5 , EN 61482-1



WORKWEAR

AK2013759-STR Jacket wool – JanusPro

JanusPro® Plus – the jacket is thick and warm, almost 400 g/m², and therefore insulates very well. The jacket can be worn as underwear directly against the skin, but is also well suited as an extra insulating layer over our thinner qualities, especially on the extra cold days. The garments are perfect for those who work in tough or varying climate zones and at the same time need flame retardant effects, protection against static electricity, or against arc flash. The high percentage of merino wool ensures good insulation even in wet conditions and keeps you warm and dry.

Size: XXS-3XL
Fabric: 79% Merino Wool, 19%
Modacrylic, 2% Antistatic Fibres
Weight: 390 gram/m²
CE: EN ISO 11612, 1149-5 , EN 61482-1



AK8010337-STR Longs wool – JanusPro

JanusPro® Plus – flame-retardant long johns are our thickest long johns and insulate very well with their 390 g/m². JanusPro Plus can be used as underwear directly against the skin, but is also well suited as an additional insulating layer over our thinner qualities, especially on the extra cold days. The garments are perfect for those who work in tough or varying climatic zones and at the same time need flame-retardant effects, protection against static electricity, or against arc flash. Merino wool insulates even when wet.

Size: XS-3XL
Fabric: 79% Merino Wool, 19%
Modacrylic, 2% Antistatic Fibres
Weight: 390 gram/m²
CE: EN ISO 11612, 1149-5 , EN 61482-



WORKWEAR

AK2013600-STR FR Modaflame Anti Statisk Fleece - MØRKEBLÅ

Constructed with double-sided anti-pill fleece. Features include two side pockets with concealed zippers to keep belongings secure, comfortable elastic cuffs, and an adjustable drawcord at the waist.

Details:

- Inherent flame-resistant properties that do not diminish with washing
- Protects against radiant and convective heat
- Front zipper for easy access
- Adjustable waist drawcord
- Elasticated cuffs for improved fit
- Zippered pockets
- Chin guard for added comfort and stability
- High cotton content for superior comfort
- Anti-static
- Two pockets
- Interactive zipper for added functionality
- 40+ UPF-rated fabric to block 98% of UV rays
- Suitable for use in ATEX environments
- CE-CAT III
- CE certified



Shell Fabric:

Modaflame Fleece: 60% Modacrylic, 39% Cotton, 1% Carbon Fiber, 280g

- EN ISO 11612 A1, B1, C2
- EN 1149 -5
- IEC 61482-2 IEC 61482-1-1 ELIM 5.9 CAL/CM², EBT 6.4 CAL/CM²
- IEC 61482-2 IEC 61482-1-2 APC 1



AK9010028-4047 Thick raggsocks wool –JanusPro

JanusProwool socks and wool crew socks are all flame-resistant and will keep your feet warm at work, both indoors and outdoors.

The socks have a high wool fibercontent. Other fibershave been blended with the wool to increase strength and provide a perfect fit. JanusPro7105 is a thick wool sock with a regular length.

Size: 35-39 – 40/47

Fabric: 80% Wool, 18% Polyamide, 2% elasthan

CE: EN ISO 11612 A1B2C2

WORKWEAR

AK6012625-STR Polo Multinorm Unisex

Warm and comfortable underwear. Polo has a high zip neck, long sleeves and extended back. The underwear is ideal when you have to be outdoors or in generally cold environments.

Size: S-3XL
Fabric: 50% cot, 39% acryl, 10% viscose, 1% antistat
Weight: 210 gram/m2
CE: EN ISO 11612 A1
B1 C1 F1 , EN 1149-5 , EN 61482
ATPV 4 cal/cm2



AK9011174 BALACLAVA GSA MULTINORM SORT

Warm and comfortable balaclava . Size: One size

Fabric: 50% cot, 39% acryl, 10% viscose, 1% antistat
Weight: 210 gram/m2
CE: EN ISO 11612 A1 B1 C1 F1 ,
EN 1149-5 , EN 61482
ATPV 4 cal/cm2



GSA

WORKWEAR

AK8010430-L LONGS GSA MULTINORM SORT

Warm and comfortable underwear. Long johns have a knitted waist and fly at the front. The set is ideal when you have to be outdoors or in generally cold environments.

Size: S-3XL
Fabric: 50% cot, 39% acryl, 10%
viscose, 1% antistat
Weight: 210 gram/m2
CE: EN ISO 11612 A1 B1 C1 F1 ,
EN 1149-5 , EN 61482
ATPV 4 cal/cm2



AK9011173 HEADOVER-HALS GSA MULTINORM SORT

Warm and comfortable
headover Size: One size

Fabric: 50% cot, 39% acryl, 10%
viscose, 1% antistat
Weight: 210 gram/m2
CE: EN ISO 11612 A1 B1 C1 F1 ,
EN 1149-5 , EN 61482
ATPV 4 cal/cm2



GSA

WORKWEAR

AK2014952-STR Multinorm thermal mid layer jacket

A warm and comfortable mid layer thermal jacket. Full zip in front.
Extended back for more comfort. Ribbing in sleeves and standing safety collar.

Fabric: 60% Modacryl, 39% cotton, 1% antistat. 280 gsm

EN ISO 11612 A1 B1 C1

EN 1149-5

EN:61482.2.KLASSE 1

Size: XS-3XL



GSA

Standards safety footwear

SAFETY FOOTWEAR TABLE ACCORDING TO STANDARD EN ISO 20345:2022												
CLASS		Protective toe cap	Mandatory slip resistance (similar to SRA)	Closed seat region (fully enclosed heel)	A Electrical resistance (0.1-1000 MΩ)	E Energy absorption under the heel	Anti-puncture protection			WPA Water-penetration and absorption	Cleated outsole	WR
							P Metal insert Type P	PL Non-metal insert Type PL	PS Non-metal insert Type PS			
NEW	I, II	SB	●	●								
	I	S1	●	●	●	●						
	I	S1P	●	●	●	●	●					
	I	S1PL	●	●	●	●		●				
	I	S1PS	●	●	●	●			●			
NEW	I	S2	●	●	●	●				●		
	I	S3	●	●	●	●	●			●	●	
	I	S3L	●	●	●	●		●		●	●	
	I	S3S	●	●	●	●			●	●	●	
NEW	II	S4	●	●	●	●						
	II	S5	●	●	●	●	●				●	
	II	S5L	●	●	●	●		●			●	
	II	S5S	●	●	●	●			●		●	
	I	S6	●	●	●	●				●		●
	I	S7	●	●	●	●	●			●	●	●
	I	S7L	●	●	●	●		●		●	●	●
	I	S7S	●	●	●	●			●	●	●	●

Codes and requirements:

PL - Perforation resistance (non metal insert)

PS - Perforation resistance (non metal insert)

C - Partly conductive footwear

A - Anti-static footwear

HI - Heat insulation of outsole complex

CI - Cold insulation of outsole complex

E - Energy absorption of seat region

WR - Water resistance

M - Metatarsal protection

AN - Ankle protection

CR - Cut resistance

SC - Scuff cap abrasion

SR - Slip resistance (ceramic tile floor with glycerine)

WPA - Water penetration and absorption

HRO - Resistance to hot contact

FO - Resistance to fuel oil

LG - Ladder grip



TESS

– TEKNISK FAGHANDEL

Standards safety footwear



ESD- APPROVED SAFETY FOOTWEAR

All approved safety shoes have antistatic properties. ESD provides extra antistatic characteristics, and constantly dissipates static electricity evenly through the sole in a controlled and safe way. ESD-approved safety shoes and safety boots can prevent you from damaging sensitive electronic components and equipment.

EN ISO 20345



EN ISO 20345

EN ISO 20345 certified safety shoes and boots are slip resistant (SRC) and have an ergonomic fit. Safety footwear from MASCOT is certified in accordance with safety classes S1P or S3, which indicate the requirements for protection. The safety classes S1P and S3 cover safety shoes, boots and sandals with full safety, i.e. shoes and boots with midsoles and toe caps for people who need particularly sturdy safety footwear. Footwear in safety class S3 is also water-repellent and heat-resistant up to 300 °C (HRO)

EN ISO 20345	BASIC TOE PROTECTION	SLIP RESISTANT	CLOSED HEEL	ANTISTATIC	OIL & FUEL RESISTANCE	HEEL ENERGY ABSORPTION	WATER REPELLENT UPPERS	PUNCTURE RESISTANCE	CLEATED OUTSOLE
CODE	B	SRA / SRB / SRC	/	A	FO	E	WRU	P	/
S1P									
S2									
S3									



SLIP RESISTANT

SRA: Slip-resistance - Work shoes with SRA certification provide slip resistance on a ceramic tile floor with lauryl sulphate.

SRB: Slip-resistance - Safety shoes with SRB certification provide slip resistance on a steel surface with glycerol.

SRC: Slip-resistance - Work shoes with SRC certification combine the slip resistance of SRA and SRB. This safety footwear therefore offers the highest slip resistance.



FUEL/OIL RESISTANT SOLE.



AS1011457-STR Grisport BOA boot

For outdoor use in the oil and gas industry, construction, etc. Upper made of black Dakar cowhide, minimal seams. Waterproof membrane. Boa M3 lacing system, easy to put on and take off the shoe. PU midsole. Outsole made of Vibram Super Safety TPU/PU, oil-resistant and antistatic. Slip-resistant properties on ceramic tiles and steel surfaces (SRC). Toe reinforcement in PU. Removable antistatic insole. Weight 793 grams (1 pair size 42). Steel toe cap, perforated for better ventilation. Composite puncture-resistant insole.

Size: 36-47

CE: EN ISO 20345 S3 WR SRC

PPE



AS1011500-STR SIR RESPONDER MAIA

Low shoe with an ultra-dynamic design, featuring aluminium toecap and composite midsole, PS type, with constant thickness. Fitted with Action Nubuck leather upper equipped with "Faster" quick lacing system and reflective inserts. E-TPU Responder/rubber outsole provides an excellent elasticity and cushioning effect: the midsole made of expanded thermoplastic polyurethane spans the entire sole of the foot, offering flexibility and full responsive cushioning. The rubber outsole, thanks to its deep longitudinal grooves, accentuates the flexibility of the sole and ensures excellent grip on all types of surfaces. SRC slip-resistant.

The RESPONDER insole is composed of a compound that bounds together thousands of E-TPU beads with high elasticity and resilience properties. Lined and perforated in the plantar area with outstanding anti-shock properties. Antistatic.

The polyester mesh lining features excellent draining capacity thanks to its fabric and structure with high absorbing capacity.

Size:
36-48

CE: EN ISO 20345 S1P S1PS FO SR, EN 61340 ESD





AS1011450-STR Tellus BOA boot Nordic last

Protective boot with BOA lacing system.

Produced in Supremoil top full-grain water-repellent quality leather with a waterproof and breathable membrane.

The shoe has a wide Nordic last (Mondopoint 11).

The outer sole is in PU/TPU with the highest level of slip resistance SRC. HYBRID - PU DOUBLE DENSITY construction for best cushioning in the sole. Comfort and ergonomics in the top class.

Toe cap in steel and nail tread protection in soft fiber membrane.

The shoe also has an additional protection in TPU ensures maximum protection from impact, friction and liquids.

Art nr: 920J

Size: 39-47

CE: EN ISO 20345 S3 WR SRC

JALAS – Too be approved by PSL:



AS1010983-str JALAS Exalter 9988 GTX

A mid-cut safety shoe, now with GORE-TEX

A light, comfortable, safety shoe with side-mounted BOA®. Waterproof due to GORE-TEX. Its Microfiber upper and sock-like construction provides great comfort and fit and has anti-static properties. The nitrile outer sole is heat and oil resistant for outstanding grip. It features also our JALAS® aluminium toe cap, plasma-treated textile puncture protection and double impact protection zones in PORON® XRD®.

EN ISO 20345:2011

S3, SRC, WR, HRO

Size: 35-47



AS1011324-str JALAS Exalter 9995

New sustainable generation -Replaces Exalter 9965

Exalter's new generation is upgraded with several recycled and bio-based materials without compromising the superior combination of durability, comfort, and lightness that users have relied on for years. Bio-based microfiber water repellent upper keeps the feet dry. BOA® Fit System (from recycled material) on the side eliminates pressure points. Aluminum toe cap and recycled metal-free nail protection insert with high-grip Vibram® recycled nitrile rubber outsole.

EN ISO 20345:2022

S3S, HRO, FO, SC

Size:35-47



AS5010353-str JALAS Exalter 9998 GTX

A GORE-TEX boot for medium cold winters.

A waterproof safety boot with GORE-TEX, ideal for a wet and medium cold season. Uppers in highly protective full grain leather and functional textile for support and protection. Medium cold insulation lining keeps feet warm and comfortable. BOA® and high grip Vibram® Nitril rubber outsole. aluminium toe cap and soft textile nail protection insert.

EN ISO 20345:2011

S3, SRC, WR, HRO

Size: 35-47



AS5010495-STR Techno Troya ULTRAGRIP PU S5

The world's most comfortable and versatile fully waterproof working boot for all activities

- SRC outsole - strong grip for the best safety even on wet surfaces
- Manufactured with the best BASF polyurethane raw material
- Outsole designed for stability and grip in all terrains
- Including 1 free pair of orthopedic, washable, antibacterial, removable footbeds with arch support and a shock absorbing heel cushioning effect
- Antistatic
- Antibacterial inner liner
- No braking or cracking in cold temperatures or with extreme temperature changes
- Abrasion resistant outsole
- Extra light : energizes your feet – all day wearer comfort
- Flexible soft touch material : perfect fit
- Easy to clean
- CI : cold insulation certificate - 30°C / -22°F
- 100 % waterproof for warm and dry feet
- Kick-off spur : take your boots off with ease

Size: 37-48

CE: EN ISO 20345 S5

Alternative: AS5010375-str STØVEL VERN TOTAL FW95 S5 GRØNN

PORTWEST



AS1011501-STR MB 3015 Mid cut safety shoe SIR Responder

– By order only

Ankle-high shoe with an ultra-dynamic design, featuring aluminium toecap and composite midsole with constant 4 mm thickness. Fitted with Nubuck leather upper equipped with "Faster" quick lacing system. The patented RESPONDER technology used in the midsole and insole provides outstanding responsive cushioning, extreme lightweightness and flexibility over the entire surface of the foot.

Assuring excellent performance even after prolonged and intense use.

Art no: MB3015

Size: 35-48

CE: EN ISO 20345 S3 WR SRC



AS1011517-STR U-POWER FACE – By order only

ORL20144

Safety shoes low, light and comfortable U-Power of the Red Lion range, performance fit with BOA® Fit System, with upper in natural nubuck leather, aluminum toecap, ultra-breathable, water-repellent, anti-puncture, anti-slip and PU / PU infinergy sole.

SIZE:

35-48

CE: EN ISO 20345 S3S CI FO SR ESD



AS9010191-STR Megacomfort Ergo Anti-Static insole is made from patented 100% HD memory foam, providing optimal stability, cushioning, and superior user comfort. The Ergo Anti-Static delivers maximum comfort and performance in footwear, making them far more effective than standard floor mats in reducing muscle strain and improving balance reactions. The insole features two layers and is specially designed for use in safety and work shoes — perfect for footwear with toe protection, as the memory foam compresses to ensure safe clearance at the front.

However, it also works exceptionally well in most casual shoes. Ideal for both stationery and mobile work, indoors or outdoors. It contains antibacterial agents that help prevent foot odor and sweat. Features:

- ESD-approved
- Maximum comfort and shock absorption
- Patented 100% dual-layer memory foam
- Ergonomically designed
- Soft Contoured Arch Support for balance, comfort, and cushioning
- Silver-ion antimicrobial technology
- Anti-bacterial, anti-sweat, and odor-resistant
- Temperature-regulating ventilation holes
- Machine washable

Size: 36-38, 39-40, 41-42, 43-44, 45-46, 47-48



AS9010137-STR JALAS Neutralizer 8711L LOW ARCH Perfect for your low arches

The insole for low arches makes your JALAS shoes more comfortable and safer. Poron® XRD® material in the forefoot and heel absorbs up to 90% of impact energy, providing outstanding shock absorption. This reduces injury risk and increases comfort. The insole is anatomically designed, ESD approved, and fits all JALAS safety shoes. Available in 17 sizes. Remove the original insoles before use. The JALAS FootStopService (FSS) scanner helps you choose the best insoles for your feet.



AS9010136-STR JALAS Neutralizer 8710M MEDIUM ARCH Makes your medium-high arches happy

The insole for medium arches makes your JALAS shoes more comfortable and safer. Poron® XRD® material in the forefoot and heel absorbs up to 90% of impact energy, providing outstanding shock absorption. This reduces injury risk and increases comfort. The insole is anatomically designed, ESD approved, and fits all JALAS safety shoes. Available in 17 sizes. Remove the original insoles before use. The JALAS FootStopService (FSS) scanner helps you choose the best insoles for your feet.



AS9010135-str JALAS Neutralizer 8709H HIGH ARCH Makes your JALAS even more comfortable

The insole for high arches makes your JALAS shoes more comfortable and safer. Poron® XRD® material in the forefoot and heel absorbs up to 90% of impact energy, providing outstanding shock absorption. This reduces injury risk and increases comfort. The insole is anatomically designed, ESD approved, and fits all JALAS safety shoes. Available in 17 sizes. Remove the original insoles before use. The JALAS FootStopService (FSS) scanner helps you choose the best insoles for your feet.

Standard Gloves

1. Abrasion

The protection level is on a scale of 1 to 4. The higher the number is, the better the resistance to abrasion

2. Cut Resistance Coup Test

The protection level is given by a number between 1 and 5, where 5 indicates the highest cut protection

3. Tearing strength

The protection level is indicated by a number between 1 and 4, where 4 indicates the strongest material.

4. Puncture resistance

The protection function is indicated by a number between 1 and 4, where 4 indicates the strongest material.

5. Cut resistance – TDM test ISO 13997

If the knife gets dull during the coup test, this test shall be performed instead. The result is given by a letter, A to F, where F indicates the highest level of protection. If any of these letters is given, this method determines the glove protection level instead of the coup test.

6. Impact protection

If the glove has an impact protection, this information is given by the letter P as the 6th and last sign. If no P sign, no impact protection is claimed.



1. ABRASION RESISTANCE

2. CUT RESISTANCE COUP TEST

3. TEAR STRENGTH

4. PUNCTURE RESISTANCE

5. CUT RESISTANCE ISO 13997

6. IMPACT PROTECTION



EN 407:2004

This standard specifies demands and test methods for protective gloves that shall protect against heat and/or fire. The numbers given besides the pictogram indicates the gloves performance for each test in the standard. The higher number the better performance level.

1. FIRE PROPERTIES OF THE MATERIAL

The ignition time and how long the material glows or burns after ignition is measured in this test. If the seam comes apart after an ignition time of 15 seconds, the glove has failed the test.

2. CONTACT HEAT

The glove is exposed to temperatures between + 100°C to + 500°C. Then it is measured how long it takes for the inner side of the glove to become 10°C warmer than it was from the beginning (about 25 ° C degrees). The glove must withstand the increasing temperature of maximum 10°C for at least 15 seconds for an approval.

3. CONVECTIVE HEAT

Here it is measured how long it takes to increase the inside temperature of the glove with 24°C, using a gas lubrication (80kW / m2).

4. RADIANT HEAT

The average time is measured for a heat permeation of 2.5kW / m2.

5. SMALL SPLASHES OF MOLTEN METAL

The test is based on the number of drops of molten metal that generates a temperature increase between the glove material and the skin with 40°C.

6. LARGE QUANTITIES OF MOLTEN METAL

A PVC film is attached to the back of the glove material. Molten iron is poured onto the material. The measurement consists of how many grams of molten iron required to damage the PVC film.



- 1. FIRE PROPERTIES OF THE MATERIAL
- 2. CONTACT HEAT
- 3. CONVECTIVE HEAT
- 4. RADIANT HEAT
- 5. SMALL SPLASHES OF MOLTEN METAL
- 6. LARGE QUANTITIES OF MOLTEN METAL

PPE



AH1011093-STR LEATHER GLOVE 513 VELCRO

Leather glove, unlined, pigskin leather, cotton, Cat. II, reinforced index finger, reinforced fingertips, for fine assembly work.

Size: 6-7-8-9-10-11-12

CE: EN: 388:2016+A1:2018, 407:2020

Packing: 1/12/120



AH1011760-str GSA-514 Max Touch Assembly gloves

For handling small objects in a dirty environment Nitrile foam withstands oil and grease, knitted nylon, flexible and durable, semi-dipped microporous nitrile, rib

Str.: 6-7-8-9-10-11-12

CE: EN: 388:2018 4121X

Packing: 1/12/120



AH1011756-str GSA-510 Lite Touch Assembly gloves

For handling small objects in a dirty environment Nitrile foam withstands oil and grease, knitted nylon, flexible and durable, dipped PU.

Str.: 6-7-8-9-10-11-12

CE: EN: EN: 388:2018 4131X

Alternative glove options are available, please refer to the glove guide.



AH1011830-11 TEGERA® 10

Leather glove, winter-lined, full grain goatskin, artificial fur, Cat. II, water repellent leather, for heavy work

Size: 11

CE: EN: 388:2018 2322X, EN:511 22X

Packing: 1/12/120



AH1011381-str TEGERA® 8840 Innergloves

Very thin and dexterous cut protection glove (cut B) made with the new advanced CRF®Omni technology, nylon and spandex. For inspection work or to be used as an inner glove. Comfortable 18 gg knitted glove with no dipping. The glove has high-visibility cuff for glove recognition and use approved for food handling.

EN: 388:2018 1X4XB

Packing: 1/12/120



AW9910103 GLOVE CLIP LOOP



AH1011043-str TEGERA® 4640 Innergloves

A warm, thin, and comfortable textile glove with touchscreen functionality and approved for food handling. 15 gg knitted with a mix of Merino wool and nylon, without any seams. Perfect to wear inside other gloves for extra warmth when working in cold environments.

Str.: 6-7-8-9-10-11
CE: EN: EN: 388:2018 214XX
Packing: 1/12/60



AH1011844-STR TEGERA® 803 ESD gloves

A very thin ESD glove with cut resistance level B using TEGERA® CRF® Technology fibre, for electronic work for ESD-protected work areas where maximum dexterity in combination with cut protection is needed.

Size: 5-6-7-8-9-10-11-12
CE: EN: 388:2018 4X42B EN:407 X1XXXX
Packing: 1/6/120



AH1011263-str TEGERA® PRO 9183

Glove with Vibrothan® anti-vibration foam technology combined with an extra wrist support. For professional heavy work where an extra protection is needed. Excellent durability and grip performance thanks to Microthan®+ synthetic leather. Reinforced fingertips, chrome free, windproof back and extra dense against dirt and particles.

Size: 9-10-11-12-13

CE: EN:
388:2018 2112X EN:407 X1XXXX
Packing: 1/6/120



AH1011327-str TEGERA® PRO 9195

Glove in synthetic Microthan® leather, for fine assembly work. With Tegera WristControl for professional work that requires extra ergonomic support for the wrist. Extremely good fingertip sensitivity. Ergonomic functions such as reinforced index finger, reinforced seams, pre-curved fingers, and specially designed thumb. Extra-long, chrome free and elastic.

Str.: 5-6-7-8-9-10-11
CE: EN: 388:2018 1111X
Packing: 1/6/60PPW



AH1011845-STR TEGERA® PRO 9295

Ergonomic glove in strong synthetic Macrothan®+ leather. With Tegera WristControl for professional work that requires extra wrist support. Excellent grip and fit.

Ergonomic functions such as reinforced index finger, reinforced seams, pre-curved fingers, and specially designed thumb. Extra-long, chrome free and moisture resistant.

Str.: 8-9-10-11
CE: EN: 388:2018 2131X EN 10819:2013/A1:
ISO 2019 TRM: 0,75
Packing: 1/6/6 TRH: 0,56



AH1011545-STR TEGERA 8846 CUT RESISTANT F

The world's thinnest cut F/ANSI Cut A7 glove has 21 gg knitting. Perfect for high precision work with very small and very sharp objects. Made with the new advanced CRF®Omni technology with a reinforced HPPE cut protection fibre. The glove has touch screen functionality, it is dipped in PU for good grip in dry/moist and slightly oily environments and has a reinforcement between thumb and index finger.

Size.: 5-6-7-8-9-10-11-12
CE: EN: 388:2018 2X42F
Packing: 6/120



AH1011085-STR TEGERA 8814 INFINITY CUT RESISTANT

Cut F

Dexterous cut resistant glove with highest cut level F and touchscreen function, suitable for all-round work. 13 gg knitted with CRF® cut resistant technology. Palm dipped with super soft nitrile foam that provides excellent grip in dry and slightly moist environments.

Size.: 5-6-7-8-9-10-11
CE: EN: 388:2018 4X43F
Packing: 6/120



AH1011757-STR GSA-511 Assembly gloves Protector

Cut E

Flexible impact glove with cut level E. Fantastic grip and good dexterity.
Long safety cuff

Size.: 6-7-8-9-10-11-12
CE: EN: 388:2018 4X43E
Packing: 1/12/120





AH1011769-STR Granberg impact winter

MicroSkin Shield® material with PROTEX membrane, polyester /spandex back of hand. TM



High-cut protection on the palm and fingers, approved according to EN 388:2016 cut level E. Strong, yet soft and flexible TPR impact design on the back of the hand for comfort and mobility. Waterproof ProTex membrane with excellent breathability. Warm and soft lining keeps hands comfortable. Palm and thumb reinforcement provides better grip and abrasion resistance. Reflective cuff binding for improved visibility.

Size: 6-7-8-9-10-11-12
CE: EN: 388:2018 2X42EP EN:511
Packing: 1/6/36



AH1011759-STR GSA-513 Assembly gloves SAFE TOUCH

Cut resistant level E

Flexible impact glove with cut level E. Fantastic grip and good dexterity.
Long safety cuff

Size.: 6-7-8-9-10-11-12
CE: EN: 388:2018 4X42EP
Packing: 1/12/120





AK1011098-STR GRANBERG 1190 Cut and Impact Resistant Gloves, Goatskin, fully Kevlar® lined.

Soft and strong goatskin leather gives good dexterity and touch sensitivity.

Impact protection on the back of the hand.

Full Kevlar® lining protects hands from cuts.

Impact protective details in bright color for increased safety.

Sewn with Kevlar® threads.

Comfortable and fitted.

Arc flash approved to level 2, with an Arc Thermal Performance value (ATPV) of 13 cal/cm2.

Size.: 7-8-9-10-11-12

CE: EN: 388:2018 2X22DP

Packing: 1/6/60

AH1011758-str GSA-512 Waterproof impact gloves SAFE TOUCH WET Cut resistant level D

Premium cut resistant gloves with impact protection.

Cut level D The gloves are double dipped nitrile. This makes the gloves waterproof and Ideal for damp and greasy environments, thanks to the full nitrile coating.

Abrasion-resistant sandy nitrile palm for superior grip. The gloves are Touchscreen compatible

Extremely flexible and comfortable, suitable for both heavy-duty tasks and precision work.

Size.: 6-7-8-9-10-11-12

CE: EN: 388:2018 4X42DP

Packing: 1/6/60



AH1011676-str GLOVE CHEMICAL-IMPACT GRANBERG 6060 NITRILE

Nitrile with heavy granules on the palm and fingers. Sweat-absorbing cotton liner inside.

Provides protection against chemicals and oil-based muds.

Soft and flexible, yet highly durable and long-lasting.

Enhanced oil grip with special nitrile granules on the palm and fingers.

Comfortable cotton liner absorbs perspiration, preventing sweaty hands.

Ergonomically designed impact protection on the back is powerful and very flexible.

High dexterity increases operational efficiency and reduces hand fatigue.

Size.: 8-9-10-11-12

CE: EN: 388:2018 3121XP EN:374 AJKLMNOT

Packing: 1/6/



**AH1011078-str TEGERA 7350 WINTER CHEMICAL GLOVES**

Super soft, winter lined nitrile glove for freezer rooms or outdoor use. The sandy finish gives a perfect grip on slippery tools. The chemical protection layer is 0,3 mm. The glove is waterproof, oil and grease resistant and approved for handling foodstuffs. It has a good fit and is warm and comfortable.

Size.: 8-9-10-11

CE: EN: 388:2018 3121X EN:374:JKOPT

Packing: 1/5/60

For size 7 alternative option available:
AH1010199-7 HANSKE KJEMI VINTER
CHEMSTAR 114.0630W NITRIL 7

**AH1011079-str TEGERA 7351 CHEMICAL GLOVE**

Multipurpose nitrile glove with good grip for work in wet and dry environments. The chemical protection layer is 0,3 mm/11,8 mil. Knitted lining in interlock and cotton for extra comfort. The glove is oil and grease resistant, water and oil repellent and approved for handling foodstuffs. Latex-free.

Size.: 7-8-9-10-11

CE: EN: 388:2018 3121X EN:374:JKOPT

Packing: 1/10/120

**AH1011477-10 ANSELL 09-430 CHEMICAL GLOVE**

AlphaTec® 09-430 industrial gloves' high-grade neoprene compound and smooth finish can withstand various mechanical and chemical hazards, including acids, oils, caustics, alcohols, and solvents

Size.: 8-9-10-11

CE:EN: 388:2018 :3121B EN:374:AKLMPT

Packing: 1/12



AH1011704-str 53003 Ansell Alphatec Barrier gloves

Extreme Chemical protection: AlphaTec® 53-003 gloves achieving 17 out of 18 chemicals on EN 374:2016 with 16 being at class 6 >480 minutes and 16 out of 18 > class 2 against ASTM F739 with a 10x lower limit to pass.

Elevated comfort and dexterity: unique manufacturing process for optimized fit with raised diamond grip for secure performance in a wide range of scenarios.

Improved durability: They also possess EN 388-compliant abrasion resistance for better mechanical protection.

Size: 7-8-9-10-11

CE: EN 374 ABCEFGHIJKLMNOPST

Packing: 1/36



AH1011035-str 93-260 Ansell Micro Flex

MICROFLEX® 93-360 antistatic cleanroom gloves feature a three-layer design, offering superb protection from harsh chemicals, including acids, bases and various solvents

Elevated comfort: Their extra-soft proprietary formulation combines comfort, tactility and dexterity

Size: XS (5.5 - 6), S (6.5 - 7), M (7.5 - 8), L (8.5 - 9), XL (9.5 - 10), 2XL

(10.5-11)

CE: EN 374 JKLOPST

Packing: 1/50



AH1010035-str 92-600 Ansell Touch`n Tuff

Made with TNT Chemical Splash Resistance Technology, these gloves effectively safeguard hands from exposure to harmful chemicals

Elevated comfort: Super soft nitrile provides a comfortable feel during extended wear

Robust durability: EN388 certified, meeting level 1 abrasion to prevent ripping and tearing during heavy-duty work

Prevents surface defects: Silicone-free, they prevent contaminant transfer that causes flaws in paints, coatings and finishes

Size: XS (5.5 - 6), S (6.5 - 7), M (7.5 - 8), L (8.5 - 9), XL (9.5 - 10), XXL(10.5 - 11)

CE: EN 374 JKPT Packing: 1 box a 100/10 box in carton (1000 pc)



AH1011418-str Ansell 58-535 Chemical gloves

Enhanced grip: Thanks to their ANSELL GRIP™

coating, AlphaTec® 58-535W safety gloves minimize the force required to handle oily or wet components

Advanced defenses: AlphaTec® 58-535W work gloves' bonded construction, featuring a coating polymer that doesn't penetrate the liner in manufacture, limits liquid and chemical leakage

Sizes 7-8-9-10-11

CE: EN: 388:3131A EN:374 AJKLOPT

Packing:1/6/72



AH1011738-str Ansell 58-835 Chemical gloves CUT F

Specialized protection: AlphaTec® 58-835 chemical gloves' nitrile barrier protects against common chemicals Enhanced features: Their orange visible inner liner indicates when the shell is compromised, warning users. Heightened defenses: AlphaTec® 58-835 safety gloves' INTERCEPT™ Cut Resistance liner ensures EN ISO CUT F & ANSI/ISEA 105-2024 CUT A6 protection

Tightened grip: ANSELL GRIP™ nitrile shell treatment delivers better grip for handling both wet and oily components

Sizes 6-7-8-9-10-11

CE: EN: 388: 4X43F EN:374 AJKLMNOPT

Packing:1/6



AH1011511-STR Ansell 37-185 Chemical gloves

Solvex® 37-185 chemical-resistant gloves present lower lint contamination risks

Specialized protection: Their high-performance nitrile compound composition grants them EN 374 Type A chemical protection, shielding up to the elbow Improved durability, making them suitable for heavy-duty cleaning

Sizes 7-8-9-10-11

CE: EN: 388: 4X32C EN:374 AJKLMNOPT

Packing:1/12/144

Not approved for Chemicals

AH1010436-str Showa 377 nitrile gloves

The 377 is a durable glove with a double layer of nitrile foam on the palm. The foam coating helps to disperse oil and improve the grip in wet, dry, or oily conditions.

The nitrile foam coating allows you to handle the most challenging tasks with ease, even in the slipperiest situations.

The glove has a seamless liner and an elastic cuff that prevent dirt and debris from entering the glove while keeping your hands warm and safe.

Sizes 6-7-8-9-10

CE: EN: 388:4121X

Packing:1/12/120



Not approved for Chemicals

AH1010617-str Showa 477 Winter gloves nitrile

Designed to keep hands warm and dry in the most extreme environments, the 477 cold-resistant glove combines thermal insulation with tactical grip.

Foam grip and dual nitrile coating ensure precision in wet and oily environments, whilst the acrylic liner provides protection from cold weather. The 477 remains flexible down to -50°C.

Sizes 7-8-9-10

CE: EN: 388: 4131X EN:511

Packing:1/6/60



PPE



AA3010488 GSA-101-CL SIRIUS Safety glasses clear

A super low weight safety spectacle in polycarbonate with clear, anti scratch and anti fog lens. UV protection. Highest mechanical protection (F), highest optical class (1). CE:EN 166 F

Packing: 1/10/300



AA3010489 GSA-101-SM SIRIUS Safety glasses dark lens

A super low weight safety spectacle in polycarbonate with clear, anti scratch and anti fog lens. UV protection. Highest mechanical protection (F), highest optical class (1).

CE: EN 166 F


Packing: 1/10/300



AA3010490 GSA-101-SM SIRIUS Safety glasses yellow lens

A super low weight safety spectacle in polycarbonate with clear, anti scratch and anti fog lens. UV protection. Highest mechanical protection (F), highest optical class (1). CE:EN 166 F

Packing: 1/10/300

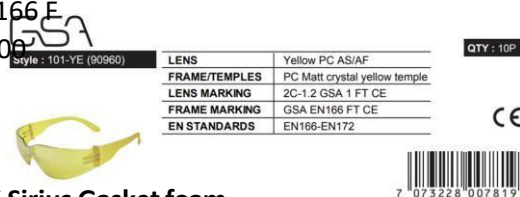


AA3010491 GSA 101-RX Sirius Gasket foam

Removable insert/gasket for all GSA-101 safety glasses. Made in comfortable EVA foam. To prevent dust and particles.

CE: EN 166 F

Packing: 1/40/1

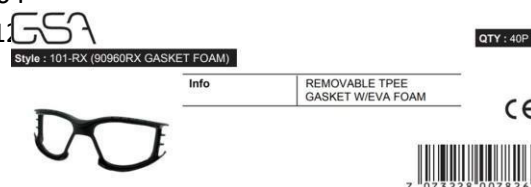

PPE



AA3010492 GSA-102-CL PEGASUS Safety glasses clear

Safety specs with templates and headband clear, anti scratch and anti fog lens. UV protection.

Highest mechanical protection (F), highest optical class (1). Gasket foam to prevent dust and or wet particles.

CE: EN 166 F

Packing: 1/10/30

GSA Style : 102-CL (92290SR-X)		QTY : 10P
LENS	Clear PC AS/AF	 CE
FRAME/TEMPLES	Black PC + Red TPR +Tpee Gasket +EVA Foam +Elastic band	
LENS MARKING	2C-1.2 GSA 1 FT CE	
FRAME MARKING	GSA EN166 FT CE	
EN STANDARDS	EN166-EN172	



AA3010493 GSA-102-SM PEGASUS Safety glasses

DARK

Safety specs with templates and headband clear, anti scratch and anti fog lens. UV protection.

Highest mechanical protection (F), highest optical class (1). Gasket foam to prevent dust and or wet particles.

CE: EN 166 F

Packing: 1/10/300

GSA Style : 102-SM (92290SR-X)		QTY : 10P
LENS	Smoke PC AS/AF	 CE
FRAME/TEMPLES	Black PC + Red TPR +Tpee Gasket +EVA Foam +Elastic band	
LENS MARKING	5-3.1 GSA 1 FT CE	
FRAME MARKING	GSA EN166 FT CE	
EN STANDARDS	EN166-EN172	



AA3010494 GSA ORION CLEAR

Safety specs with templates and removeable headband clear, anti scratch and anti fog lens. UV protection.

Highest mechanical protection (F), highest optical class (1).

Gasket foam to prevent dust and or wet particles.

CE: EN 166 F

Packing: 1/10/300

GSA Style : 103-CL (92218)		QTY : 10P
LENS	Clear PC AS/AF	 CE
FRAME/TEMPLES	Black PC Ratchet-action temple+ Red tip +EVA Foam + Elastic band	
LENS MARKING	2C-1.2 GSA 1 F CE	
FRAME MARKING	GSA EN166 F CE	
EN STANDARDS	EN166-EN172	



GSA



TESS – TEKNISK FAGHANDEL



AA3010099 Bollé Contour clear lens -CONTPSI Contour is an ultra-light protective eyewear weighing only 21 grams. It combines strength, protection, comfort, and style. The glasses have a non-slip nose bridge and thin TIPGRIP temples that provide a secure and stable fit. The lenses are treated with the advanced PLATINUM coating, which offers double protection against both scratches and fogging, ensuring clear vision under all working conditions.

CE: EN 166 F

Packing: 1/10/240



AA3010104 Bollé Contour dark lens -

Contour is an ultra-light protective eyewear weighing only 21 grams. It combines strength, protection, comfort, and style. The glasses have a non-slip nose bridge and thin TIPGRIP temples that provide a secure and stable fit. The lenses are treated with the advanced PLATINUM coating, which offers double protection against both scratches and fogging, ensuring clear vision under all working conditions

CE: EN 166 F

Packing: 1/10/240



AA3010498 SAFETY GLASSES CONTOUR copper lens CSP

Contour is an ultra-light protective eyewear weighing only 21 grams. It combines strength, protection, comfort, and style. The glasses have a non-slip nose bridge and thin TIPGRIP temples that provide a secure and stable fit. The lenses are treated with the advanced PLATINUM coating, which offers double protection against both scratches and fogging, ensuring clear vision under all working conditions. Ideal for all activities requiring exposure to alternating high and low light. Adapted to environments with extreme temperatures. Blue light filtration and combination with the exclusive PLATINUM

CE: EN 166 F

Packing: 1/10/240

bollé
SAFETY



Bollè IRIS-S READER

AA3010499 SAFETY GLASSES BOLLE IRIDPSI1,5

AA3010500 SAFETY GLASSES BOLLE IRIDPSI2,0

AA3010501 SAFETY GLASSES BOLLE IRIDPSI2,5

AA3010502 SAFETY GLASSES BOLLE IRIDPSI3,0

Glasses with optical diopters. Anti-scratch, anti-fog. Nose bridge that can be height adjusted in 3 levels for perfect fitting of the reading field. Temples that can be tilted.

Adjustable glasses strap is included.

CE: EN 166 F

Packing: 1/10/240



VE9302240 Uvex Ultrasonic clear

The combination of hard and soft material components with the uvex ultrasonic combines high mechanical rigidity with maximum wearer comfort – These goggles never press or pinch even when worn continuously. Flexible soft component adapts to the wearer's face and ensures full side protection for the eye area, including for those who wear glasses. The uvex ultrasonic has excellent ventilation, making sure that the climate around the eyes is pleasant and non-irritant. A sporty design, a wide panoramic field of vision, and quickly and easily replaceable lenses further underline the advantages of these top spectacles.

CE: EN 166 B

Packing: 1/4/72

AA3010442 OTG Safety specs over the glasses



Portwest Lightweight and designed to be worn over prescription glasses. Its wide panoramic lens with molded side shields and brow guard offers superior protection to the wearer. The adjustable and extendable arms ensure a comfortable and secure fit.

Art.PS30CLR

Packing: 1/10/100

VE2800 SPECTACLES PROTECTION COMFORT LINE CLEAR 3M 2800

Wider option



3M™ 2800 Series Over glasses are safety glasses designed to be worn over regular prescription eyewear. They feature adjustable lenses that can be tilted, low-profile temples adjustable to four different lengths, and a robust polycarbonate lens with a scratch-resistant coating.



AA3010503 Bollè B410 Cleaning station

Cleaning station for cleaning glasses and goggles. Complete and effective solution. Box with 250 ml of water-based and alcohol- and silicone-free lens cleaner and 400 cleaning wipes.

Packing: 1/20



AT1010479 Uvex clear lens cleaning towelettes

Suitable for all uvex safety spectacles
Silicone-free Individually wrapped 100 units pr.box.

Packing: 1 box/10 box



AA3010210 Universal cord for glasses

Adjustable cord for
glasses. Black. Packing

12/120



AX1010070 G3000NUV 3M Peltor hard hat

Protective helmet made of UV-stabilised ABS with UVicator and ventilation, Wheel ratchet, option for a three-point chin strap.

Colour:

Size: 54-62 cm.

Weight:: 310 gram

CE: EN 397

Packing 1/20

AX1010033 G2N Spare harness for 3M Peltor hardhat (SCREW)

Harness 4 point screw fastening G2N with plastic comfort strap. The adjustment system with a knob allows for quick and safe size adjustment while wearing the helmet. It easily snaps into place and has the same comfort and simple adjustment as the original system. Fits 3M helmets for head sizes from 54 to 62 cm.

Art.G2N

Packing: 1/10

AX1010030 G2C Spare harness for 3M Peltor hardhat (PIN)

Harness 4 point pin fastening.
3M helmets fits for head sizes from 54 to 62 cm.

Art.G2C

Packing: 1/10

AX1010037 GH4 Chin strap 3-points

3-point chin strap for
hard hat G3000 series.

Art: GH4

Packing:1/1





AX1010043 HYG3 Sweat band

Replacement sweat band for G3000 hard hats

Art: HYG3

Packing:1/10



AT1010478 SCS2 Sweat band TERRY cloth

Black

Replacement sweat band in soft terry for G3000 hard hats

Art: SCS2

Packing:1/10



AA3010298 3M Peltor safety lens insert for hard hat

V9C clear lens

V9A yellow lens

V6G Tinted/grey lens

CE: EN 166 F

Packing: 1/20



3M



TESS

– TEKNISK FAGHANDEL



AA1010188 3M VISOR 5F-11 Polycarb. for 3M hard hat

Visor 3M 5F-11 is a robust and clear polycarbonate visor designed to provide effective impact protection against high-velocity particles and other industrial hazards. Anti-fog coated and optical class 1 for optimal clarity. Thickness: 2 mm. Dimensions: 169x223 mm. Must be used with visor holder FH1 (0-6-95000-98) designed for 3M protective helmets.

Packing: 1/20



AA1010192 3M VISOR 5C1 MESH for 3M hard hat

Mesh visor in stainless steel with a black matte finish. The snap lock makes it quick and easy to attach the visor to the visor holder. Good stability after long periods of use. Must be used with visor holder FH1 (0-6-95000-98) which is designed for 3M safety helmets.

Packing: 1/20



AT1010527 3M VISOR HOLDER FH1 for 3M hard hat

Visor holder for helmet from 3M. Quick and easy installation on 3M's helmet-mounted ear protection or on helmet adapter P3EV2 (0-6-90007-98). Fits all 3M helmets, helmet-mounted 3M ear protection, and visors in the WP and 5 series from 3M.

Art: **FH1**

Packing: 1/20



Too be approved by PSL



Options:

AX1010285 Green

AX1010279 White

Size: 53-63 cm.

CE: EN: 397

EN:12492

AX1010281 PETZL Vertex Vent – hard hat Red

By order only

The VERTEX VENT helmet is very comfortable, thanks to its six-point textile suspension and CENTERFIT and FLIP&FIT systems, which guarantee that the helmet fits securely on the head. The adjustable-strength chinstrap makes it ideal for both work at height and on the ground. It has ventilation holes with sliding shutters to allow airflow through the helmet. With its potential for integration of a Petzl headlamp, hearing protection, and multiple accessories, it is an entirely modular helmet, thus responding to the specific additional needs of professionals.



AX1010288 PETZL Vertex Vent –Hi-viz hard hat: **By order only**

The high visibility version features a fluorescent outer shell with phosphorescent clips and reflective bands, for optimal visibility of the worker, day or night.

Size: 53-63 cm. EN: 397

CE:
EN:12492



AX1010302 VISIR VERTEX 2019



AX1010304 VISIR VERTEX VIZEN 1000V 2019

All MSA products by order/request only



AX1010322 MSA-V520 Hard hat White

Unventilated 1000-Volt helmet from V-Gard. 4-point Fas- Trac® III suspension with comfort band in PVC. Integrated brim and water channel. Protects against lateral deformation (LD). Size 52-63 cm.

Size: 52-63 cm.

CE: EN 397

Options:

AX1010323 Yellow

AX1010324 Red

AX1010325 Green



VE2016WS IRIS 2 Hard hat w/spec

Ventilated helmet, with ventilation that can be opened and closed. 6-point screw adjustment. Integrated clear polycarbonate visor that can be flipped up into the helmet. Space for prescription glasses under the visor. Padded comfort band made of synthetic leather. 30 mm slot for mounting accessories. Size 52-64 cm..

Size: 52-63 cm.

CE: EN 397

All MSA products by order/request only



AA1010288 MSA VISOR Polycarb. For MSA hard hat Clear polycarbonate visor. Protects against impacts. Optical class 1. **Thickness 1 mm.**

203x432 mm. Weight 90 g. Must be combined with MSA visor holder and attached in 30 mm slot on helmet, or on earmuffs.

Art:

Packing: 1/10



AA1010276 MSA VISOR Polycarb. For MSA hard hat

Clear polycarbonate visor. Protects against impact, liquid splashes, molten metal, and arc light. **Thickness 1.5 mm.** 203x432 mm. Weight 145 g. Must be combined with MSA visor holder, and attaches in a 30 mm slot on the helmet, or on earmuffs.

Art:

Packing: 1/10



AA1010287 MESH VISOR MSA V-GARD

Mesh visor for use in combination with MSA V-Gard helmets with visor holders or directly on headgear. Wide face-covering netting visor made of stainless steel with excellent visibility and visual light transmission of 74% (light reduction is only ~26%). Brown-colored to reduce light reflection. Can be used with helmet-mounted ear muffs.

Art:

Packing: 1/10



AA1010292 MSA VISOR holder/attachment

Visor holder, with particle protection, for attaching visor to helmet. Metal-free. Fits all MSA visors. Attaches to 30 mm slot on helmet, or on hearing protection.

Art:

Packing: 1/10



AT1010353 FAS-TRACK III Spare harness -Screw

Spare screw harness for MSA hard hat. Fas-Trac III with PVC comfort band, for MSA V-Gard, V-Gard 200, 500 and 520 helmets

Size: 52-63 cm.

CE: EN 397

Packing: 1/20



AT1010350 MSA 4-point chin strap

4-point universal chin strap for MSA V-Gard helmets. Metal-free. Compatible with hearing protection.

Art:

CE: EN 397

Packing: 1/20



AD237060 Dispenser Moldex earplugs

Wall mounted bracket for plug stations.

Art: AD237060

Packing: 1



VE251136 Laser lite ear plugs

Howard Leight Laser Lite earplugs, visibility colored yellow and magenta for easy identification, and that expand softly in the ear canal, providing a good fit over time. T-shaped for easy insertion and removal. One pair individually packaged in a bag.

Packing: 1=200/10=2000



AV1010431 Spark Plugs earplugs box a 200 pcs

– **TOO REPLACE LASER LITE**

SparkPlugs earplugs are made of extra-soft, extra light foam. Their tapered shape fits easily in the ear canal, and seals gently and snugly. They're so comfortable you'll forget you're wearing earplugs.

Packing: 1=200/10=2000



AV1010390 Dispenser Bilsom 303 SMALL ear plugsDispenser HL400 Full Frame with 400 pairs of Bilsom 303S earplugs included. Earplug, small size, lightly conical and rounded top that simplifies insertion into the ear canal. Soft foam that provides user comfort over long periods. Very good performance. The dispenser can be mounted on a wall or table or used freestanding. Simple rotary knob with 180° access makes it easy to retrieve the earplugs. Plate prevents earplugs from falling on the ground.

Packing: 1/20



AV1010396 Refill Bilsom 303 SMALL ear plugsEarplug Bilsom 303S, small size, in refill bag, lightly conical and rounded top that simplifies insertion into the ear canal. Soft foam that provides user comfort over a long period, and very good performance. Box: 10 bags of 200 pairs.

Packing: 1=200/10=2000



Dispenser Laser lite MEDIUM ear plugsDispenser HL400-AM with 400 pairs of Laser Lite earplugs. The earplug is in visible yellow and magenta colors. It expands softly in the ear canal, providing a good fit over time. The dispenser can be mounted on a wall or table. Antimicrobial protected dispenser.

Packing: 1/20



Refill Laser lite MEDIUM ear plugs Howard Light Laser Lite earplugs in a refill bag, visibility-colored yellow and magenta for easy identification, and that expands softly in the ear canal, providing a good fit over time. T-shape for easy insertion and removal.

Packing: 1=200/10=2000



AV1010389 Dispenser Max lite LARGE ear plugs

Dispenser HL400 Full Frame with 400 pairs of Howard Light Max earplugs included. The earplug is bell-shaped, making it easy to insert into the ear, minimizes pressure, and provides good comfort without slipping out of the ear canal. Smooth surface prevents dirt and other elements from sticking to the earplug, which could then end up in the ear canal. The dispenser can be mounted on a wall or table, or used freestanding. Simple rotary switch with 180° access makes it easy to retrieve the earplugs.

Packing: 1/20



AV1010395 Refill Max Leight LARGE ear plugs

Low pressure polyurethane foam expands gently for comfort and long-term wear. Corded earplug has contoured T-shape for easy handling. Smooth, soil-resistant closed cell-foam skin prevents dirt build-up. Noise Reduction Rating, NRR 30. Individually packaged.

Packing: 1=200/10=2000

TOO REPLACE BILSOM – BY ORDER ONLY

Refill Moldex Contour **SMALL** earplugs

Contours® earplugs offer the highest possible degree of comfort for the wearer. With an anatomically contoured shape and soft foam formula, they adapt to the shape of a small ear canal and sit comfortably and securely in even the narrowest of spaces

Art: 746301

Packing: Refill bag of 500 pair

745301 Plug station Contour (500 pair)



AV1010436 Refill Spark Plug **MEDIUM** earplugs

SparkPlugs earplugs are made of extra-soft, extra light foam. Their tapered shape fits easily in the ear canal, and seals gently and snugly. They're so comfortable you'll forget you're wearing earplugs.

Art: AV1010436

Packing: Refill bag of 500 pair

AV1010350 Plug station Spark plug (500 pair)



Refill Pura Fit **LARGE** earplugs

Thanks to their specially developed foam formula, these classic Pura-Fit® earplugs offer the optimal combination of stability and softness. They are easy to roll and, upon insertion, expand to fill the ear canal at exactly the right moment. There, they maintain a secure, sealed fit, without exerting pressure on the ear.

Art: 776001

Packing: Refill bag of 500 pair

AV1010350 Plug station Pura Fit (500 pair)




VE1310 BANDED EAR PLUGS50/CASE



The 3M™ E-A-R™ 1310 Banded Earplugs are designed with a patented flexible headband that adjusts to the movements of the jaw and head, ensuring a comfortable and secure fit with consistently low pressure in the ear. The blue, durable acetal plastic band can be worn behind the head or under the chin, making it ideal for users who are intermittently exposed to noise.

Get comfortable and reliable hearing protection with the 3M™ E-A-R™ 1310 Banded Earplugs. They reduce noise levels by up to 26 dB, providing effective protection in moderately noisy environments. The patented flexible headband design adapts to head and jaw movements for a secure fit with constant low ear pressure and a reliable seal. The optimized band shape minimizes contact with clothing, helping to reduce noise transmission.

The earplugs can be worn behind the head or under the chin, maintaining consistent and comfortable pressure regardless of head size. The banded design allows the earplugs to be kept conveniently close at hand, which is especially practical for users who frequently move in and out of noisy areas.



VE1311 EAR PLUG BANDED REPLACEMENT TIP 3M

Replacement foam ear tips for 3M™ E-A-RCaps™, 3M™ E-A-R™ Caboflex™, and 3M™ E-A-R™ 1310 Banded Earplugs.

AV1010273 Moldex Waveband Ear plugs – Alternative option



The anatomical shape of the WaveBand® banded earplugs mimic the shape of the lower jaw. This, in turn, reduces contact with clothing and the transmission of resulting noise to the ear. With soft foam plugs and well balanced contact pressure, the banded earplugs offer a high level of wearing comfort and dependable noise reduction.

The WaveBand®, which is worn under the chin, can be quickly and easily positioned and removed. This is particularly useful when exposed to fluctuating noise levels that require intermittent use of hearing protection. The foam plugs are available as an accessory product and can be replaced as required.

Art:681001

Packing: 1/8/80



Moldex waveband Replacement pods

These comfortable earplugs made from Moldex comfort foam fit. Regular replacement of the earplugs extend the product life of the hearing protection. The old plugs can be simply removed and the new ones put on.

Art: 682501

Packing: 50 pairs



AV1010044 Headset Twincup ATEX helmet att.

Hearing protection (MT72H540P3E50) with helmet attachment (P3E). Twin shell for extra high damping. ATEX approved. Quick positioning integrated microphone boom for easy handling. J11 connector for connection to adapter or radio. Suitable for work environments with high noise levels. Hygiene kit HY13 can be purchased separately.

Art: **MT72H540P3E-50** Packing: 1/10



AV1010009 H540A 3M Peltor with headband

Passive hearing protection **Optime III** with headband. Black and red color. The large internal space in the cups helps to reduce heat and moisture buildup, and the soft and wide cushions help to reduce pressure around the ears, making them comfortable to wear for long periods. It reduces noise levels by up to 35 dB and is suitable for work environments with very high noise levels such as airports, engine rooms on ships, power plants, and printing houses. The cushions and foam inserts are available as hygiene sets, are easy to replace if they become worn or damaged, which increases the product's lifespan.

Packing: 1/20



AV1010010 H540P3E 3M Peltor for hard hat

Passive hearing protection **Optime III** with P3E 30 mm helmet attachment. Black and red color. The large internal space in the cups helps reduce the buildup of heat and moisture, and the soft and wide cushions help reduce pressure around the ears, making them comfortable to wear for long periods. It reduces noise levels by up to 35 dB and is suitable for work environments with extremely high noise levels such as airports, engine rooms on ships, power plants, and printing houses. The cushions and foam inserts are available as hygiene sets, are easy to replace if worn or damaged, which increases the product's lifespan. Packing: 1/20

Too be approved by PSL



AV1010231 3M™ PELTOR™ LiteCom Plus toveis radio headset

The 3M™ PELTOR™ LiteCom Plus headset is a robust hearing protector with a built-in analog two-way communication radio, noise-cancelling dynamic microphone, Lithium-Ion battery, and level-dependent ambient listening functionality. Available with headband or helmet attachment.

The headset features a built-in analog two-way radio, available in a PMR version with 16 channels and 121 sub-channels, enabling efficient communication in noisy environments. The noise-cancelling dynamic microphone supports voice-operated transmission (VOX) for hands-free communication, while the external connection allows integration with a mobile device or another two-way radio.

The level-dependent function helps maintain situational awareness by allowing ambient sounds and nearby conversations to be heard when noise levels are lower, while automatically protecting hearing when hazardous noise returns. LiteCom Plus also includes a clear battery status indicator and an automatic power-off function to conserve energy.



AT1010455 Helmet attachment Peltor P3EGF2 with friction sleeve

Helmet attachment/accessory for ATEX communication headset

*** Recommended to change out every second year if regular used.**

Change out hygiene kit every second year if used regularly



AV9010003 HY54 Replacement kit **PASSIVE ear defenders**

Hygiene kit for 3M **Optime 3 earmuffs**. It consists of cushioning pads and sealing rings. The kit should be replaced before the sealing rings have become hard or cracked.

Packing: 1/10



AV9010008 HY79 Replacement kit **ACTIVE ear defenders**

Hygiene set for 3M **communication/active hearing** protection. It consists of cushioning pads and sealing rings. The set should be replaced before the sealing rings have become hard or cracked

Packing: 1/10



AV9010016 HY13 Replacement kit **PASSIVE ear defenders**

Hygiene set for 3M **Twin Cup hearing protection**. It consists of dampening cushions and sealing rings. The set should be replaced before the sealing rings become hard or cracked.

Packing: 1/10



AV9010025 HYM1000 **Mic-Protecting tape**

Microphone protection tape in blue color to keep dust and other contaminants away from the microphone. It fits around the microphone. Comes in a 5 m roll for single use.

Packing: 1/10



AW553300021 H01-2012 Half mask SR100

The SR 100 half mask is made of silicone in three sizes, i.e. S/M, M/L and L/XL. The mask is equipped with two exhalation valves, which ensures very low exhalation resistance. The valve covers with partitions effectively protect the exhalation membrane against dust and paint mist. The material and pigment of the mask body are approved by FDA and BGA for foods, which minimizes the risk of contact allergies. The easily adjustable elastic head harness straps of the mask are designed as a V-shaped loop and have a large dished crown plate, which contributes towards a comfortable and safe fit. The mask is used either as a filtering device in combination with filters from the Sundström range of filters.

Size: H01-2112 SR 00 S/M AW553300039
H01-2012 SR 100 M/L AW553300021
H01-2812 SR 100 L/XL AW553300021-L/XL
CE: EN 140:1998



AW553300104 Storage box Half mask SR100

SR 230 Storage box intended for a half mask with filter



R01-0607 bag Half mask SR100

Plastic storage bag for half mask with filter.



AA2010470 SR 602 HOOD ORANGE

Our SR 600 System offers excellent fit with adjustable head harness. All our hoods provide head and shoulder coverage together with top-of-the-line breathing protection. The user can use the same head harness and air channel with different hoods for their every need. SR 602 Hood; Manufactured from a strong laminated fabric that offering an excellent barrier against organic and inorganic chemicals.

Article: H06-5512

CE: EN 12941:1998 + A2:2008

PPE



AA2010477 2202 FFP2 Disposable mask w/valve

Comfortable disposable
mask FFP2. All masks
single packed in plastic.

Packing: 20/200

CE: EN 149:2001 + A1:2009.



AA2010478 2203 FFP3 Disposable mask w/valve

Comfortable Disposable
mask FFP3. All masks
single packed in plastic.

Packing: 10/100

CE: EN 149:2001 + A1:2009.

Alternative product 3M – IN STOCK:



VE8833

STØVMASKE 8833 P3 M/VENTIL (10)



VE9332

STØVMASKE 9332+ P3 M/VENTIL (10)



VE8822

STØVMASKE 8822 P2 M/VENTIL (10)





AA553323015 H02-1312 Particle filter SR510-3

The SR 510, P3 R* particle filter is designed for use in Sundström half masks, full face masks and the SR 500/ SR 500 EX/SR 700 fan. The filter provides protection against all types of particulate pollutants. The particle filter can easily be combined with gas filters from the Sundström filter range in order to provide protection also against gases and vapours, e.g. during spray painting. The particle filter should be combined with pre-filter SR 221, which will thereby extend the life of the particle filter.



AA2010430 Pre-filter SR221

Pre-filter SR 221 is a disc that is meant to catch coarse particles and by that extend the lifetime of the particle filters SR 510 P3 R and SR 710 P3 R, combined filter SR 299-2 ABEK1-Hg-P3 R and SR 599 A1BE2K1-Hg-P3 R. The pre-filter is placed in the prefilter holder and then snapped on to the particle filter or combined filter.



AW553300377 Combi gas filter SR297 ABEK1

Gas filter SR 297, Class 1, is designed for use together with Sundström half masks and full face masks. The filter is of type ABEK and provides protection against the following types of gases and vapours: Type A protects against organic gases and vapours, such as solvents, with boiling points > +65 °C. Type B protects against inorganic gases and vapours, such as chlorine, hydrogen sulphide and hydrogen cyanide. Type E protects against acidic gases and vapours, such as sulphur dioxide and hydrogen fluoride. Type K protects against ammonia and certain amines, such as ethylene diamine. The gas filter can easily be combined with particle filter SR 510 P3 R in order to obtain protection also against aerosols (particles), e.g. during spray painting.



AA2010245 combi filter SR299 ABK1-Hg-P3

The SR 299-2 is a combined filter consisting of a Class 1 gas filter and Class 3 particle filter. The filter is designed for use in Sundström full face masks and half masks. The filter is of type ABK1-Hg-P3 R and provides protection against the following types of gases, vapours and particles: Type A protects against organic gases and vapours, such as solvents, with boiling points >

+65 °C. Type B protects against inorganic gases and vapours, such as chlorine, hydrogen sulphide and hydrogen cyanide. Type E protects against acidic gases and vapours, such as sulphur dioxide and hydrogen fluoride. Type K protects against ammonia and certain amines, such as ethylene diamine. Type Hg protects against mercury vapour. Warning. Maximum use time 50 hours. Type P3 R* protects against all types of particulate pollutants,

e.g. dust, mist and smoke. *R (Re-useable): The filter is intended to be used for more than a single shift.



AT1010596 SR 99-1 Compressed air filter

The SR 99-1 compressed air filter is used for producing clean breathing air from ordinary compressed air. The unit consists of a regulator, pre-collector and main filter (SR 292), all of which are mounted in an enclosing steel sheet stand. The unit can be placed on the floor or mounted on a wall. The pre-separator has automatic drainage, separates coarser particles, water and oil. The SR 292 main filter consists of a carbon filter part (500g), surrounded by two P3 particulate filters. The air is cleaned to remove any remaining particles/gases/vapours/odours. A Y coupling that increases the number of outlets is available as accessory.

Article :**H03-2810**



AA2010431 Filter for compressed air filter SR 99-1

The SR 292 filter element is intended for use together with Sundström compressed air filter. Type A protects against oils, organic gases and vapours, such as solvents, with boiling points > +65 °C. Type P3 protects against all types of particulate pollutants, e.g. dust, mist and smoke.

Article: **R03-2001**



AD553327008 SR 507 Compressed air attachment

The SR 507 compressed air attachment is designed for connection to Sundström hoods SR 520/ SR 530/ SR 561/ SR 562, visors SR 570/ SR 540 EX, half mask SR 900, welding shield SR 590, helmet with visor SR 580 and welding shield/helmet with visor SR 584/ SR 580. This combination forms a breathing apparatus designed for continuous air flow, for connection to a compressed air supply. The SR 507 is an accessory that enables a given face piece to be used as either a protective device supplied with compressed air or a powered air purifying respirator (PAPR). The compressed air attachment is especially intended for applications involving heavy and sustained work in environments in which the pollutants have poor warning properties or are particularly toxic. The SR 507 is made of materials which are not liable to give rise to friction sparking, which enables the attachment to be used in an explosive or flammable environment. The flow meter and warning whistle for temporary and continuous monitoring of the air flow rate are included. Control valve mounted on the user's belt is included.

Article: **H03-0612**



AT1010600 Storage bag SR505

Practical bag
(shoulder/carrying strap)
for safe storage of
SR500/SR500 EX with
accessories and face piece.



AA2010289 fan unit SR500 EX

The SR 500 EX fan is explosion-proof and specially adapted for use in an explosive atmosphere. The SR 500 EX is included together with filters and head-tops in Sundström fan-assisted respiratory protective devices. The SR 500 EX can be used as an alternative to filter protections in all situations in which the latter are recommended. This applies particularly to situations in which the work is intensive, hot or of long-duration. The fan is equipped with filters and the filtered air is supplied through a breathing hose to the head-top. The latter is then pressurized, which prevents the surrounding pollutants from being admitted.



AT1010597 SR 502 EX Li-ion battery, 18 V, 3.0 Ah.

Replacement battery for

sR-500 EX fan Article: **R06-2070**



Battery charger for SR 500 EX.

Battery charger for fan

unit SR 500 EX

Article: **R06-2013**



Battery charger EX, (Li-ion) . For battery 502 EX.

Battery charger for fan unit SR 500 EX. For SR 502 EX battery (Li-Ion)

Article: **R06-2081**



AA2010290 Battery fan unit SR500

The SR 500 is a battery-powered fan that, together with a filter and an approved head top, is included in the Sundström fan- assisted respiratory protective device systems. The SR 500 can be used as an alternative to filter respirators in all situations in which these are recommended. This applies particularly to work that is hard, warm or of long duration. The human interface may consist of a hood, face shield, half mask or full face mask. The fan is equipped with a filter, and the filtered air is fed through a hose to the human interface.



SR 501 battery EX 2,1 Ah (NiMh)

Battery for fan unit SR 500

Article:R06-2002



AT1010506 SR 502 Battery HD, 3,5 Ah

Heavy Duty-battery of lithium-ion for fan unit SR 500. 3,5 Ah

Article:T06-0101



At1010551 Battery charger SR 500 / SR 700 Article:R06-0433



SR 506 Charger stand [EU]

For charging 1-5 batteries of the fan unit SR 500, SR 700 and SR 500 EX. Chargers not included.

Article :**T06-0108**



AT1010595 SR 550 Breathing hose

Sundström breathing hose are tested and approved together with the following products, and are intended for use with Sundström SR 500, SR 500 EX and SR 700 battery-powered fan units. • SR 200 Full face mask • SR 200 Airline compressed air-fed mask. SR 550 Plastic hose made of PU with durable spring steel spiral. Chemical-resistant. The hose are delivered complete with couplings.

Article :**T01-1216**



AT1010601 SR 552 Harness

Soft, durable and lightweight. Ergonomic design reduces hip load, enabling comfortable use in various environments. Adjustable for lower back or shoulder blade wear, enhancing freedom of movement. Back plate with three size adjustments accommodates different workers and fan unit positions.

Compatible with SR 500 and SR

700 fan unit.



SR 552 Harness EX

Soft, durable and lightweight. Ergonomic design reduces hip load, enabling comfortable use in various environments. Adjustable for lower back or shoulder blade wear, enhancing freedom of movement. Back plate with three size adjustments accommodates different workers and fan unit positions.

Compatible with SR

500 EX fan unit.

Article : **T06-2002**



Pre-filter holder SR 500.

Pre filter holder for SR 500 Article : R06-0106



AA2010252 SR 599 Combi filter

The Combined filter SR 599 is intended for use in the SR 500/SR 500 EX fan. The filter is of type A1BE2K1-Hg-P3 R and provides protection against the following types of gases and vapours: Type A protects against organic gases and vapours, such as solvents, with boiling points > +65 °C. Type B protects against inorganic gases and vapours, such as chlorine, hydrogen sulphide and hydrogen cyanide. Type E protects against acidic gases and vapours, such as sulphur dioxide and hydrogen fluoride. Type K protects against ammonia and certain amines, such as ethylene diamine. Type Hg protects against mercury vapour. Warning. Maximum use time 50 hours. Type P3 R* protects against all types of particulate pollutants, e.g. dust, mist and smoke. *R (Re-useable): The filter is intended to be used for more than a single shift.

Article : **H02-7312**



AA2010469 SR 530 Head top – HOOD

The hood together with the battery-powered SR 500, SR 500 EX or SR 700 fan and approved filters are included in the Sundström fan-assisted respiratory protection device systems. The breathing hose of the hood is connected to the fan, equipped with a filter. The pressure generated in the hood prevents particles and other pollutants from entering the hood. The hoods can also be used with the SR 507 compressed air equipment. This combination forms a breathing apparatus designed for continuous air flow, for connection to a compressed air supply. The equipment can be used as an alternative to filter respirators in all situations for which filter respirators are recommended. This applies particularly to work that is hard, warm or of long duration.



AA2010471 SR 575 Head top – hard hat/visor

The SR 575 together with the battery-powered SR 500, SR 500 EX or SR 700 fan and approved filters are included in the Sundström fan-assisted respirator protection device systems. The breathing hose of the helmet with visor is to be connected to the fan, equipped with filters. The pressure generated in the visor prevents particles and other pollutants from entering the breathing zone.

The equipment can be used as an alternative to filter respirators in all situations for which filter respirators are recommended. This applies particularly to work that is hard, warm or of long duration.

Disposable garments

KAT. III



Category III

Description of the design of protective clothing intended to protect against serious or fatal risks. The suits must be type-approved.

TYPE 1



Type 1

Gas-proof suits: Fully sealed suits, EN 943.

EN 943-1 "Protective clothing against dangerous solid, liquid and gaseous chemicals, including liquid and solid aerosols – Part 1: Performance requirements for Type 1 (gas-tight) chemical protective suits"

EN 943-2 "Protective clothing against dangerous solid, liquid and gaseous chemicals, including liquid and solid aerosols – Part 2: Performance requirements for Type 1 (gas-tight) chemical protective suits for emergency teams (ET)"

TYPE 2



Type 2

Limited gas-tightness. Suits prevent dust, liquids and vapours from penetrating at overpressure, EN 943.

TYPE 3



Types 3 & 3B

Liquid-proof protection: Suits are approved to withstand compressed fluids e.g. from hoses and nozzles. The suits must have welded seams. Penetration testing has to be conducted according to EN 369 to provide information on protection in relation to individual chemicals, EN 14605. Type 3B protects against biologically contaminated particles, EN 14126.

TYPE 4



Types 4 & 4B

Splash-proof protection: Suits are approved for the saturation of a liquid that can condense on the suit. The suits must have welded seams. Penetration testing has to be conducted according to EN 369 to provide information on protection in relation to individual chemicals, EN 14605. Type 4B protects against biologically contaminated particles, EN 14126.

TYPE 5



Types 5 & 5B

Protect against harmful substances, EN 13982
Type 5B protects against biologically contaminated particles, EN 14126.

TYPE 6



Types 6 & 6B

Limited splash-proof protection. Protect when there is a risk of splashing on the suit, EN 13034. Type 6B protects against biologically contaminated particles, EN 14126.



AB1010185-STR Disposable coverall type 4/5/6

The Microporous Coverall offers excellent chemical, biological and dust protection. With taped seams, an extremely effective barrier to various chemicals. Ergonomical design for unrestricted movement, comfort and breathability. Taped seams for extra protection.

EN:

EN ISO:13688.2013

EN:14605:2005+A1:2009 type 4B

EN ISO: 13982-1:2004+A1:2010

TYPE 5B EN:13034:2005+A1:2009

TYPE 6B EN:1073-2:2002 Class 2

EN:14126:2003+AC:2004 class

6/6/3/3 EN:1149-5:2018

GSA

Alternative: AB1010155-STR COVERALL BIZTEX MICRO ST60 T 4/5/6 WHITE

The Microporous Coverall offers excellent chemical, biological and dust protection. Ultra low linting with bound tape seams, an extremely effective barrier to chemicals. Ergonomical design for unrestricted movement, comfort and breathability.

Features

- Side elastic waist for ultimate wearer comfort
- CE certified
- Retail bag which aids presentation for retail sales
- Two-way zip for quick and easy access
- Ergonomically shaped hood for a perfect fit
- CE-CAT III
- Elasticated hood, ankles, cuffs and waist
- Ergonomically designed for unrestricted movement, comfort and breathability
- Anti-static
- Low linting construction for minimal contamination
- Leading design made from microporous material



PORTWEST



TESS – TEKNISK FAGHANDEL



AB1010184-STR Disposable coverall type 5/6

The Microporous Coverall offers excellent chemical, biological and dust protection. With taped seams, an extremely effective barrier to various chemicals. Ergonomical design for unrestricted movement, comfort and breathability.

EN:

EN ISO:13688:2013

EN:14605:2005+A1:2009 type 4B

EN ISO: 13982-1:2004+A1:2010

TYPE 5B EN:13034:2005+A1:2009

TYPE 6B EN:1073-2:2002 Class 2

EN:14126:2003+AC:2004

class 6/6/3/3 EN:1149-5:2018

GSA



AB1010186-str Chemical coverall type 3/4/5/6

Polyethylene coated chemical
suit Liquid tight
protects against chemicals,
radioactive particles and
biological substances

Type 3- 4-5-6

EN ISO 13688:2013 EN 14605 TYPE 3B

4B EN 13034:2005+A1:2009 TYPE 6B

EN ISO 13982-1:2004 +A1:2010 TYPE 5B

EN 1073-2:2002 CLASS 2

EN 14126:2003 +AC:2004 CLASS 3

EN 1149-5:2018

GSA



AB1010026- STR Alphatec 4000 Chemical coverall 3/4/5

Specialized protection: The AlphaTec® 4000 Ultrasonically Welded & Taped - Model 130 is a robust chemical protective suit, permeation-tested to withstand more than 200 hazardous chemicals, including chemical warfare agents

Increased strength: This full body protection suit comes with taped and welded seams to grant users added strength and chemical barrier defense

Heightened visibility: Designed with orange-colored material, it ensures better visibility which can reduce the risk of workplace injuries

Improved practicality: It also possesses a chinstrap and a thumb loop, which are compatible with a range of respirators and hand protection products

Optimized fit: Its elasticated two-piece hood, waist, cuffs and ankles simplify the donning and doffing process

Certified anti-static capabilities: In addition, this anti-static suit complies with EN 1149-5.

S-3XL

CE CATEGORY III (Type 3-B, Type 4-B, Type 5-B, EN 1073-2, EN 14126, EN 1149-5, EN 14605)

Ansell



AB1010182-4246 406 Alphatec Chemical boot cover

A unique multi-layer barrier fabric renowned for its lightweight, yet robust textile feel and exceptional barrier to organic & inorganic chemicals.

ULTRASONICALLY WELDED SEAMS

Provides a strong liquid and particle barrier, made from the same fabric as the suit to maintain the same chemical resistance.

One size.



AB1010187 Shoe cover

Shoe cover one size pce plastic
1000 pcs in one box



AW9910363 Offshore backpack 01

Practical bag (shoulder/carrying strap)
for offshore personell.

Black waterproof tarpaulin

Size:60X30X30.



AW9910362 Offshore bag 02

Practical bag offshore bag for
offshore personell.

Black

waterproof

tarpaulin

Size:60X30X30

For requests outside of PPE catalogue
contact Leif Inge Eie for approval.

Leifinge.eie@halliburton.com