



# KPI Metrics Data Dictionary

## An Open Source Asset for use with TIBCO® Data Virtualization

**TIBCO Software** empowers executives, developers, and business users with Fast Data solutions that make the right data available in real time for faster answers, better decisions, and smarter action. Over the past 15 years, thousands of businesses across the globe have relied on TIBCO technology to integrate their applications and ecosystems, analyze their data, and create real-time solutions. Learn how TIBCO turns data—big or small—into differentiation at [www.tibco.com](http://www.tibco.com).

|                          |   |
|--------------------------|---|
| <b>Project Name</b>      | AS Assets KPI Metrics   |
| <b>Document Location</b> | This document is only valid on the day it was printed.<br>The source of the document will be found in the<br>ASAssets_KPI folder<br>( <a href="https://github.com/TIBCOSoftware">https://github.com/TIBCOSoftware</a> ) |
| <b>Purpose</b>           | Self-paced instructional  |



[www.tibco.com](http://www.tibco.com)

Global Headquarters  
3303 Hillview Avenue  
Palo Alto, CA 94304

**Tel:** +1 650-846-1000  
+1 800-420-8450  
**Fax:** +1 650-846-1005

## Revision History

| Version        | Date        | Author      | Comments  |
|----------------|-------------|-------------|---|
| 1.0            | Jan 20 2020 | Mike Tinius | Initial revision  |
| 1.2            | Feb 25 2020 | Mike Tinius | Added views vJobDeleteCheck, vMetadataSysAllResources. Added annotation to vMetadataDatasource[Arch],vMetadataResource[Arch], vMetadataResourceColumns[Arch]. Added layertype to vMetadataPrivilege[Arch]. Added message to vPolicyAssignment[Arch]                                     |
| 1.3            | Apr 6 2020  | Mike Tinius | Added views reportMetadataAllCount[Arch], metrics_requests_groupby_date, metrics_requests_groupby_nodehost_nodeport, metrics_resources_usage_groupby_date, metrics_resources_usage_groupby_nodehost_nodeport, metrics_sessions_groupby_date, metrics_sessions_groupby_nodehost_nodeport |
| 1.4 – 2020.202 | May 1 2020  | Mike Tinius | Removed Archive views by adding partitioning to hold current and history in the same table.   |
| 1.5 – 2020.203 | Jun 24 2020 | Mike Tinius | Added "partition" column to each view that has been modified to use "daily" or "interval" partitioning.   |
| 1.6 – 2020.300 | Aug 17 2020 | Mike Tinius | Added notificationstatus to vEventRegLog  |
| 1.7 – 2021.101 | Mar 11 2021 | Mike Tinius | Added metrics collection roll-up section.   |
| 1.8 – 2022.100 | Feb 23 2022 | Mike Tinius | Added metrics_requests_hist_sqlplan and metrics_all_kpimetrics_table_counts   |

# Table of Contents

|          |  |           |
|----------|--|-----------|
| <b>1</b> | <b>Introduction .....</b>  | <b>7</b>  |
|          | Purpose .....  | 7         |
|          | Audience.....  | 7         |
|          | References .....   | 7         |
|          | Overview.....  | 7         |
| <b>2</b> | <b>Table Relationship Diagrams.....</b>                                    | <b>8</b>  |
|          | KPImetrics “Metrics” Table Relationship Diagram .....                      | 8         |
|          | KPImetrics “Metrics” Supporting Table Relationship Diagram .....           | 9         |
|          | KPI Metrics “Metrics” Tables Partitioning Strategy (w/leap year).....      | 9         |
|          | KPI Metrics “Metrics” Tables Partitioning Strategy (w/no leap year).....   | 10        |
|          | KPImetrics “Metadata” Table Relationship Diagram .....                     | 10        |
|          | KPI Metrics “Metadata” Tables Partitioning Strategy (w/leap year) .....    | 11        |
|          | KPI Metrics “Metadata” Tables Partitioning Strategy (w/no leap year) ..... | 11        |
| <b>3</b> | <b>KPImetrics Data Dictionary.....</b>                                     | <b>12</b> |
|          | Table Definitions.....   | 12        |
|          | Column Definitions .....   | 12        |
|          | metrics_history – History Definitions .....                                | 12        |
|          | metrics_requests_hist (History) Table.....                                 | 12        |
|          | metrics_requests_hist_sqlplan (History) Table .....                        | 13        |
|          | metrics_resources_usage_hist (History) Table .....                         | 13        |
|          | metrics_sessions_hist (History) Table.....                                 | 15        |
|          | metrics history roll-up tables.....  | 15        |
|          | metrics_count – Count Definitions .....                                    | 17        |
|          | metrics_tables_row_distribution Table .....                                | 17        |
|          | metrics_all_kpimetrics_table_countsTable .....                             | 17        |
|          | metrics_collection – Collection Definitions .....                          | 18        |
|          | metrics_requests (Collection) Table.....                                   | 18        |
|          | metrics_resources_usage (Collection) Table .....                           | 18        |
|          | metrics_sessions (Collection) Table.....                                   | 19        |
|          | metrics collection roll-up tables .....                                    | 19        |
|          | AllCustomReports Definitions.....  | 20        |
|          | AccessByUserOvertime [RT] Table.....                                       | 20        |
|          | ActiveResourcesOverPeriodOfTime [RT] Table .....                           | 21        |
|          | ResourceAccessByUsers [RT] Table .....                                     | 22        |
|          | ResourceCount_Details [RT] Table.....                                      | 23        |
|          | ResourceCount_Total [RT] Table.....  | 24        |
|          | SystemCPUandMemoryStatus Table.....  | 24        |
|          | vEventRequestSqlColumns Table.....   | 25        |
|          | vEventRequestSqlResources Table.....                                       | 25        |
|          | vResourceUsage Table .....   | 26        |
|          | vResourceUsagePublished Table .....  | 28        |
|          | cache Definitions .....  | 28        |
|          | vCache Table .....   | 28        |
|          | vCacheActive Table.....  | 29        |
|          | vCacheDisabled Table .....   | 30        |
|          | vCacheIssues Table .....   | 31        |
|          | vCacheSchedule Table .....   | 32        |

|  |    |
|--|----|
| configurations Definitions .....                                 | 33 |
| pMetricsEventRegistrationList Procedure .....                    | 33 |
| pMetricsEventRegistrationSubscribe Procedure .....               | 33 |
| pMetricsEventRegistrationUnsubscribe Procedure .....             | 33 |
| metadata Definitions .....                                       | 34 |
| metadata_tables_row_distribution Table .....                     | 34 |
| reportMetadataAllCount Table .....                               | 34 |
| reportMetadataDatasource Table .....                             | 35 |
| reportMetadataNonCompliantColumns Table .....                    | 35 |
| reportMetadataNonCompliantLayers Table .....                     | 36 |
| reportMetadataPrivilegeUsers Table .....                         | 37 |
| reportNumResourcesByLayer Table .....                            | 38 |
| reportResourceColumns Table .....                                | 38 |
| reportResourceDatasourceLineage Table .....                      | 39 |
| vMetadataAllPrivileges Table .....                               | 39 |
| vMetadataAllResources Table .....                                | 40 |
| vMetadataAllUsersGroups Table .....                              | 41 |
| vMetadataConstLayers Table .....                                 | 42 |
| vMetadataConstName Table .....                                   | 42 |
| vMetadataConstPaths Table .....                                  | 43 |
| vMetadataConstValidate Table .....                               | 43 |
| vMetadataDatasource Table .....                                  | 44 |
| vMetadataNonCompliant Table .....                                | 45 |
| vMetadataPolicy Table .....                                      | 45 |
| vMetadataPolicyAssignmnt Table .....                             | 46 |
| vMetadataPrivilege Table .....                                   | 46 |
| vMetadataPrivilegeUser Table .....                               | 47 |
| vMetadataResource Table .....                                    | 47 |
| vMetadataResourceColumn Table .....                              | 48 |
| vMetadataResourceLineage Table .....                             | 48 |
| requests Definitions .....                                       | 49 |
| vEventRegLog Table .....   | 49 |
| vEventRegLogLineage Table .....                                  | 50 |
| vEventRequestSqlColumns Table .....                              | 51 |
| vEventRequestSqlResources Table .....                            | 52 |
| vEventRequestSqlResourcesAllErrors Table .....                   | 54 |
| vEventRequestSqlResourcesCount Table .....                       | 55 |
| vExceededMemoryPercentRequests Table .....                       | 55 |
| vGetSystemInformation Table .....                                | 56 |
| vLongRunningRequests Table .....                                 | 56 |
| vMetricsSqlColumns Table .....                                   | 57 |
| vMetricsSqlRequest Table .....                                   | 58 |
| vMetricsSqlRequestLineage Table .....                            | 59 |
| vMetricsSqlRequestUniqueSqlTemplates Table .....                 | 60 |
| vMetricsSqlRequestUniqueSqlTemplatesByUser Table .....           | 60 |
| vMetricsSqlRequestUniqueSqlTemplatesByUserByDate Table .....     | 61 |
| vMetricsSqlRequestUniqueSqlTemplatesClob Table .....             | 61 |
| vMetricsSqlRequestUniqueSqlTemplatesClobByUser Table .....       | 62 |
| vMetricsSqlRequestUniqueSqlTemplatesClobByUserByDate Table ..... | 62 |
| vMetricsSqlResource Table .....                                  | 63 |
| vMetricsSqlResourceLineage Table .....                           | 63 |
| vMetricsSqlResourceLineageCountReport Table .....                | 64 |
| vPublishedResourcePerRequest Table .....                         | 65 |
| vRequestDurationSqlTemplates Table .....                         | 65 |

|  |    |
|--|----|
| vRequestExpandedAll Table .....                    | 67 |
| vRequestExpandedUD Table .....                     | 68 |
| vRequestDurationSqlTemplates Table .....           | 69 |
| vRequestsCountsByUser Table .....                  | 70 |
| vSessions Table .....                              | 71 |
| vSessionvUserRequests Table .....                  | 71 |
| resource Definitions .....                         | 72 |
| vAllResources_GroupBy_NodehostNodeport Table ..... | 72 |
| vAllResources Table .....                          | 72 |
| vResourceCount Table .....                         | 73 |
| vResourceCountDate Table .....                     | 74 |
| vResourceCountUsers Table .....                    | 75 |
| vResourceCountUsersDate Table .....                | 75 |
| vResourceDistinctPublishedDatabases Table .....    | 76 |
| vResourceDistinctPublishedResources Table .....    | 77 |
| vResourceDistinctPublishedWebServices Table .....  | 77 |
| vResourceDistinctResources Table .....             | 78 |
| vResourcesPublishedNotUsed Table .....             | 78 |
| vResourceUsageAll Table .....                      | 79 |
| vResourceUsageUD Table .....                       | 80 |
| resourceDataCount Definitions .....                | 81 |
| getResourceDataCount Procedure .....               | 81 |
| resourceMetadata Definitions .....                 | 82 |
| vResourceListAllPublishedResources Table .....     | 82 |
| systemUsage Definitions .....                      | 83 |
| vCpuMemUtilization Table .....                     | 83 |
| vDatasourceConnectionChanges Table .....           | 83 |
| vDatasourceCurrentStatusChanges Table .....        | 85 |
| vDatasourceStatusChanges Table .....               | 86 |
| vDatasourceUsage Table .....                       | 87 |
| vDatasourceUsageCurrent Table .....                | 89 |
| vLogDisk Table .....                               | 90 |
| vLogIO Table .....                                 | 91 |
| vLogMemory Table .....                             | 91 |
| vSystemResources Table .....                       | 91 |
| users Definitions .....                            | 92 |
| vAllUsers Table .....                              | 92 |
| vLdapPerson Table .....                            | 92 |
| workflow Definitions .....                         | 94 |
| vCISWorkflow Table .....                           | 94 |
| vCISWorkflowStatus Table .....                     | 94 |
| vEventRegistration Table .....                     | 94 |
| vJobDeleteCheck Table .....                        | 95 |
| vJobDetails Table .....                            | 95 |
| vJobDetailsReport Table .....                      | 97 |
| vJobDetailsStatusSummary Table .....               | 98 |
| vJobEnvironments Table .....                       | 99 |
| vJobFilters Table .....                            | 99 |
| vSqlControl Table .....                            | 99 |
| vSqlControlLog Table .....                         | 99 |

#### **4 Release Notes ..... 101**

|   |     |
|---|-----|
| Added or Modified in this Release ..... | 101 |
|---|-----|

Release 2022Q100 [Feb 10 2022] ..... 101

Release 2020Q300 [Aug 17 2020] ..... 101

Release 2020Q203 [Jun 24 2020] ..... 101

Release 2020Q202 [May 1 2020] ..... 101

Release 2020Q201 [Apr 6 2020] ..... 101

Release 2020Q101 [Feb 18 2020] ..... 101

Release 2020Q100 [Jan 14 2020] ..... 102

# 1 Introduction

## Purpose

The purpose of this document is to provide a data dictionary for AS Assets KPI Metrics.

## Audience

This document is intended to provide guidance for the following users:

- Data Virtualization Administrators – provides a guide for installation.
- Architects – provides the KPImetrics architecture.
- Data professionals – provides background on the published views and usage.
- Operations users – provides insight into triggers and procedures that are executed.
- Project Managers – provides general information on KPImetrics.

## References

Product references are shown below. Any references to CIS or DV refer to the current TIBCO® Data Virtualization.

- TIBCO® Data Virtualization was formerly known as
  - Cisco Data Virtualization (DV)
  - Composite Information Server (CIS)

## Overview


Please review the document “**KPImetrics Overview.pdf**”.

## 2 Table Relationship Diagrams

The following is the table relationship diagram for KPI metrics:


- The diagrams contain the following information:
  - KPImetrics **Metrics** table relationship diagram
    - KPImetrics **Supporting** table relationship diagram
    - Metrics Partitioning Strategy (w/leap year)
    - Metrics Partitioning Strategy (w/no leap year)
  - KPImetrics **Metadata** table relationship diagram
    - Metadata Partitioning Strategy (w/leap year)
    - Metadata Partitioning Strategy (w/no leap year)

### KPImetrics “Metrics” Table Relationship Diagram

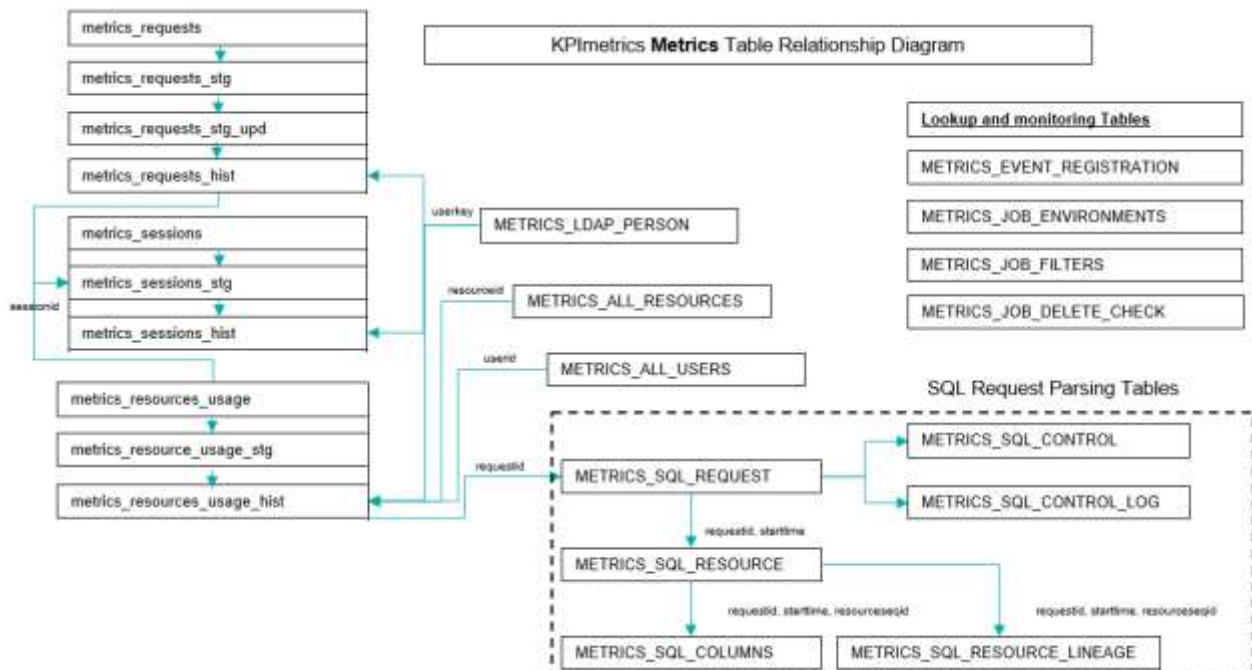



## KPImetrics “Metrics” Supporting Table Relationship Diagram

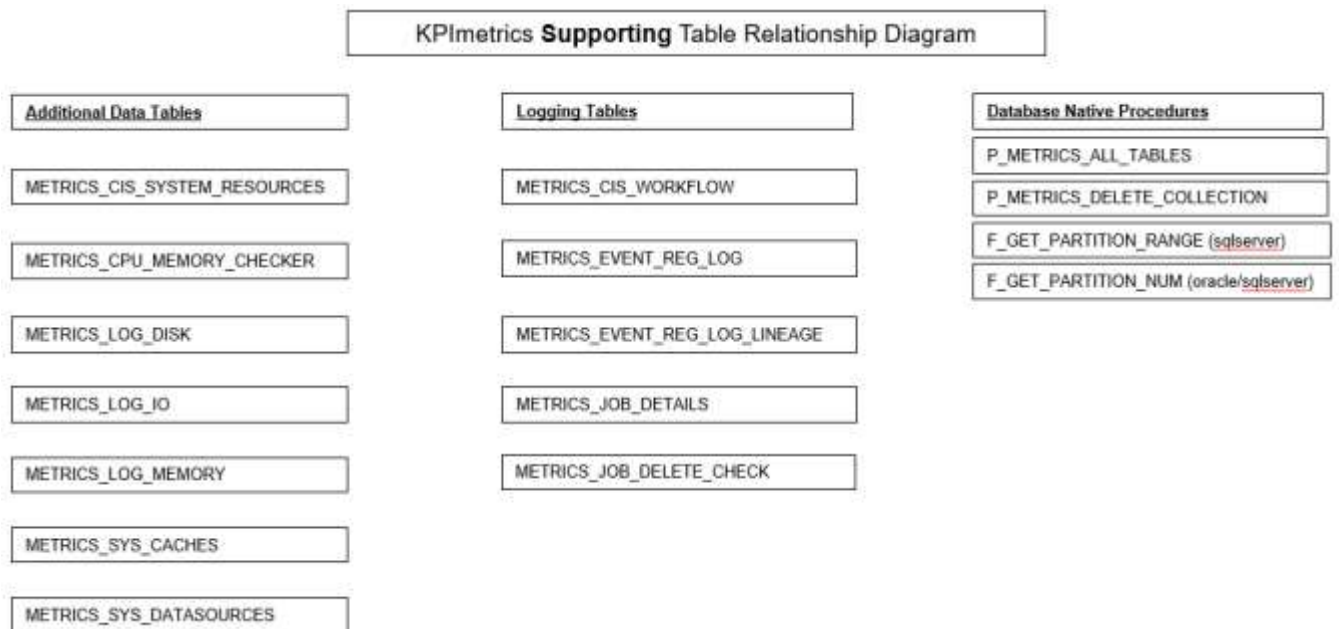

## KPI Metrics “Metrics” Tables Partitioning Strategy (w/leap year)

### Leap year:

When it is leap year, the P60 partition is used and will contain data for Feb 29. To remain consistent with non-leap years, the partitions numbers remain constant. This allows the query analyst to perform a query consistently. Additionally, if the metadata is archived after 1 year, the partition number will also be consistent.

| Note: 366-day interval accounts for leap year. Partition 60 is used in leap years. |  | 2020 (leap year) |      |     |      |      |      |      |       |       |  |
|--|--|------------------|------|-----|------|------|------|------|-------|-------|--|
| Lookup Tables (no partitioning)  | Partitioned Tables   | 1/1              | 2/29 | 3/1 | 5/1  | 7/1  | 9/1  | 11/1 | 12/30 | 12/31 |  |
| METRICS_ALL_RESOURCES  | metrics_requests_hist  | P1               | P60  | P61 | P122 | P163 | P245 | P306 | P365  | P366  |  |
| METRICS_ALL_USERS  | metrics_resources_usage_hist   | P1               | P60  | P61 | P122 | P163 | P245 | P306 | P365  | P366  |  |
| METRICS_LDAP_PERSON  | metrics_sessions_hist  | P1               | P60  | P61 | P122 | P163 | P245 | P306 | P365  | P366  |  |
| METRICS_EVENT_REGISTRATION   | METRICS_CIS_SYSTEM_RESOURCES +<br>CPU_MEMORY_CHECKER + LOG_DISK +<br>LOG_IO + LOG_MEMORY | P1               | P60  | P61 | P122 | P163 | P245 | P306 | P365  | P366  |  |
| METRICS_JOB_ENVIRONMENTS   | METRICS_SYS_CACHES +<br>SYS_DATASOURCES  | P1               | P60  | P61 | P122 | P163 | P245 | P306 | P365  | P366  |  |
| METRICS_JOB_FILTERS  | METRICS_SQL_REQUEST +<br>SQL_RESOURCE + SQL_COLUMNS                                      | P1               | P60  | P61 | P122 | P163 | P245 | P306 | P365  | P366  |  |
| METRICS_SQL_CONTROL  | METRICS_SQL_RESOURCE_LINEAGE   | P1               | P60  | P61 | P122 | P163 | P245 | P306 | P365  | P366  |  |
|  | METRICS_CIS_WORKFLOW +<br>METRICS_JOB_DETAILS  | P1               | P60  | P61 | P122 | P163 | P245 | P306 | P365  | P366  |  |
|  | METRICS_JOB_DELETE_CHECK +<br>METRICS_SQL_CONTROL_LOG                                    | P1               | P60  | P61 | P122 | P163 | P245 | P306 | P365  | P366  |  |
|  | METRICS_EVENT_REG_LOG +<br>METRICS_EVENT_REG_LOG_LINEAGE                                 | P1               | P60  | P61 | P122 | P163 | P245 | P306 | P365  | P366  |  |

**Leap year:**  
When it is leap year, the P60 partition is used and will contain data for Feb 29. To remain consistent with non-leap years, the partitions numbers remain constant. This allows the query analyst to perform a query consistently. Additionally, if the metadata is archived after 1 year, the partition number will also be consistent.

KPI Metrics “Metrics” Tables Partitioning Strategy (w/no leap year)


No Leap year:

When it is not leap year, the P60 partition is not used. To remain consistent with leap years, the partitions numbers remain constant. This allows the query analyst to perform a query consistently. Additionally, if the metadata is archived after 1 year, the partition number will also be consistent.

|   |  |                     |                |     |      |      |      |      |       |       |  |
|---|--|---------------------|----------------|-----|------|------|------|------|-------|-------|--|
| Note: 366-day interval accounts for leap year. Partition 60 is <u>not</u> used in non-leap years. |  | 2021 (no leap year) |                |     |      |      |      |      |       |       |  |
| Lookup Tables (no partitioning)   | Partitioned Tables   | 1/1                 | 2/29           | 3/1 | 5/1  | 7/1  | 9/1  | 11/1 | 12/30 | 12/31 |  |
| METRICS_ALL_RESOURCES   | metrics_requests_hist  | P1                  | <del>P60</del> | P61 | P122 | P183 | P245 | P308 | P368  | P390  |  |
| METRICS_ALL_USERS   | metrics_resources_usage_hist   | P1                  | <del>P60</del> | P61 | P122 | P183 | P245 | P308 | P368  | P390  |  |
| METRICS_LDAP_PERSON   | metrics_sessions_hist  | P1                  | <del>P60</del> | P61 | P122 | P183 | P245 | P308 | P368  | P390  |  |
| METRICS_EVENT_REGISTRATION  | METRICS_CIS_SYSTEM_RESOURCES + CPU_MEMORY_CHECKER + LOG_DISK + LOG_ID + LOG_MEMORY | P1                  | <del>P60</del> | P61 | P122 | P183 | P245 | P308 | P368  | P390  |  |
| METRICS_JOB_ENVIRONMENTS  | METRICS_SYS_CACHES + SYS_DATASOURCES   | P1                  | <del>P60</del> | P61 | P122 | P183 | P245 | P308 | P368  | P390  |  |
| METRICS_JOB_FILTERS   | METRICS_SQL_REQUEST + SQL_RESOURCE + SQL_COLUMNS                                   | P1                  | <del>P60</del> | P61 | P122 | P183 | P245 | P308 | P368  | P390  |  |
| METRICS_SQL_CONTROL   | METRICS_SQL_RESOURCE_LINEAGE   | P1                  | <del>P60</del> | P61 | P122 | P183 | P245 | P308 | P368  | P390  |  |
|   | METRICS_CIS_WORKFLOW + METRICS_JOB_DETAILS   | P1                  | <del>P60</del> | P61 | P122 | P183 | P245 | P308 | P368  | P390  |  |
|   | METRICS_JOB_DELETE_CHECK + METRICS_SQL_CONTROL_LOG                                 | P1                  | <del>P60</del> | P61 | P122 | P183 | P245 | P308 | P368  | P390  |  |
|   | METRICS_EVENT_REG_LOG + METRICS_EVENT_REG_LOG_LINEAGE                              | P1                  | <del>P60</del> | P61 | P122 | P183 | P245 | P308 | P368  | P390  |  |

**No Leap year**  
When it is not leap year, the P60 partition is not used. To remain consistent with leap years, the partitions numbers remain constant. This allows the query analyst to perform a query consistently. Additionally, if the metadata is archived after 1 year, the partition number will also be consistent.

KPImetrics “Metadata” Table Relationship Diagram

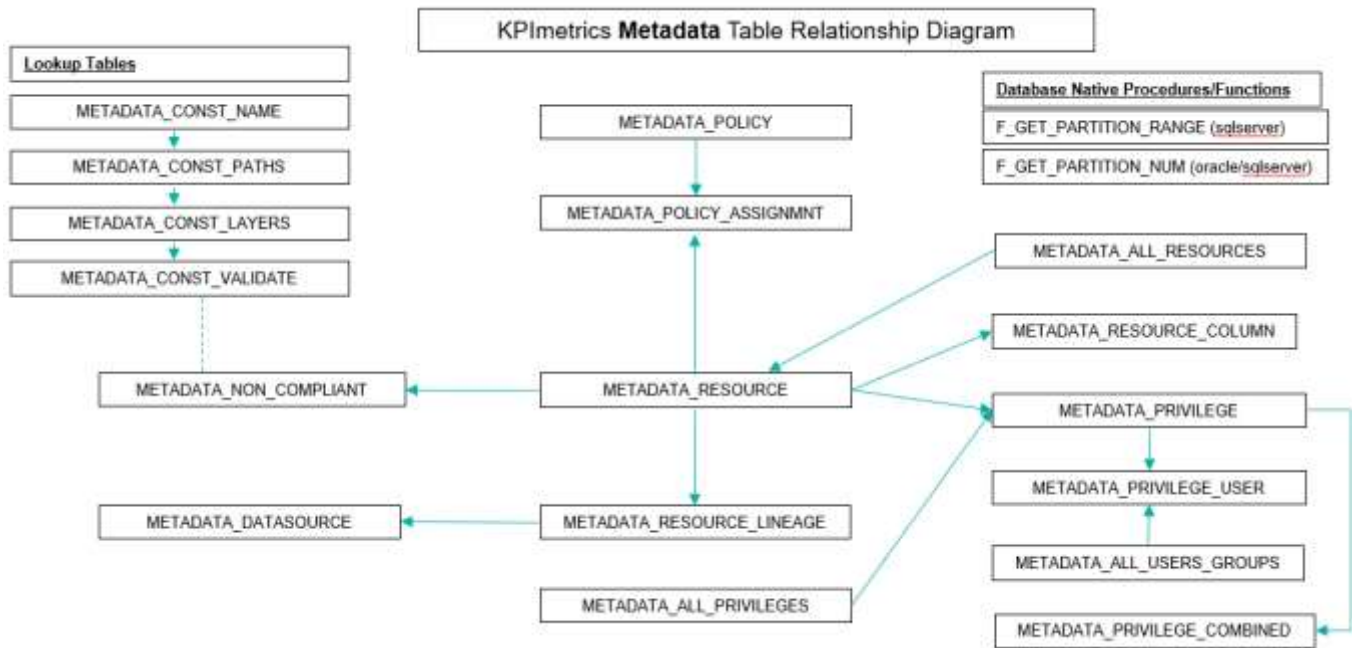

## KPI Metrics “Metadata” Tables Partitioning Strategy (w/leap year)

### Leap year:

When it is leap year, the P60 partition is used and will contain data for Feb 29. To remain consistent with non-leap years, the partitions numbers remain constant. This allows the query analyst to perform a query consistently. Additionally, if the metadata is archived after 1 year, the partition number will also be consistent.

|  |                           |                  |      |     |      |      |      |      |       |       |  |
|--|---------------------------|------------------|------|-----|------|------|------|------|-------|-------|--|
| Note: 366-day interval accounts for leap year. Partition 60 is used in leap years. |                           | 2020 (leap year) |      |     |      |      |      |      |       |       |  |
| <b>Lookup Tables</b>   | <b>Partitioned Tables</b> | 1/1              | 2/29 | 3/1 | 5/1  | 7/1  | 9/1  | 11/1 | 12/30 | 12/31 |  |
| METADATA_ALL_RESOURCES   | METADATA_ALL_USERS_GROUPS | P1               | P60  | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
| METADATA_ALL_PRIVILEGES  | METADATA_CONST_NAME       | P1               | P60  | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
|  | METADATA_CONST_PATHS      | P1               | P60  | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
| <b>Staging Tables</b>  | METADATA_CONST_LAYERS     | P1               | P60  | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
| METADATA_PRIVILEGES_COMBINED   | METADATA_CONST_VALIDATE   | P1               | P60  | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
|  | METADATA_DATASOURCE       | P1               | P60  | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
|  | METADATA_RESOURCE         | P1               | P60  | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
|  | METADATA_RESOURCE_COLUMN  | P1               | P60  | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
|  | METADATA_RESOURCE_LINEAGE | P1               | P60  | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
|  | METADATA_POLICY           | P1               | P60  | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
|  | METADATA_POLICY_ASSIGNMNT | P1               | P60  | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
|  | METADATA_NON_COMPLIANT    | P1               | P60  | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
|  | METADATA_PRIVILEGE        | P1               | P60  | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
|  | METADATA_PRIVILEGE_USER   | P1               | P60  | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |

#### Leap year

When it is leap year, the P60 partition is used and will contain data for Feb 29. To remain consistent with non-leap years, the partitions numbers remain constant. This allows the query analyst to perform a query consistently. Additionally, if the metadata is archived after 1 year, the partition number will also be consistent.

## KPI Metrics “Metadata” Tables Partitioning Strategy (w/no leap year)

### No Leap year:

When it is not leap year, the P60 partition is not used. To remain consistent with leap years, the partitions numbers remain constant. This allows the query analyst to perform a query consistently. Additionally, if the metadata is archived after 1 year, the partition number will also be consistent.

|  |                           |                     |                |     |      |      |      |      |       |       |  |
|--|---------------------------|---------------------|----------------|-----|------|------|------|------|-------|-------|--|
| Note: 366-day interval accounts for leap year. Partition 60 is not used in non-leap years. |                           | 2021 (no leap year) |                |     |      |      |      |      |       |       |  |
| <b>Lookup Tables</b>   | <b>Partitioned Tables</b> | 1/1                 | 2/29           | 3/1 | 5/1  | 7/1  | 8/1  | 11/1 | 12/30 | 12/31 |  |
| METADATA_ALL_RESOURCES   | METADATA_ALL_USERS_GROUPS | P1                  | <del>P60</del> | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
| METADATA_ALL_PRIVILEGES  | METADATA_CONST_NAME       | P1                  | <del>P60</del> | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
|  | METADATA_CONST_PATHS      | P1                  | <del>P60</del> | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
| <b>Staging Tables</b>  | METADATA_CONST_LAYERS     | P1                  | <del>P60</del> | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
| METADATA_PRIVILEGES_COMBINED   | METADATA_CONST_VALIDATE   | P1                  | <del>P60</del> | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
|  | METADATA_DATASOURCE       | P1                  | <del>P60</del> | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
|  | METADATA_RESOURCE         | P1                  | <del>P60</del> | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
|  | METADATA_RESOURCE_COLUMN  | P1                  | <del>P60</del> | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
|  | METADATA_RESOURCE_LINEAGE | P1                  | <del>P60</del> | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
|  | METADATA_POLICY           | P1                  | <del>P60</del> | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
|  | METADATA_POLICY_ASSIGNMNT | P1                  | <del>P60</del> | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
|  | METADATA_NON_COMPLIANT    | P1                  | <del>P60</del> | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
|  | METADATA_PRIVILEGE        | P1                  | <del>P60</del> | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |
|  | METADATA_PRIVILEGE_USER   | P1                  | <del>P60</del> | P61 | P122 | P183 | P245 | P306 | P365  | P366  |  |

#### No Leap year

When it is not leap year, the P60 partition is not used. To remain consistent with leap years, the partitions numbers remain constant. This allows the query analyst to perform a query consistently. Additionally, if the metadata is archived after 1 year, the partition number will also be consistent.

### 3 KPImetrics Data Dictionary

#### Table Definitions

This section provides information on the table definitions. This section provides table information regarding the ASAssets published database and KPImetrics catalog which is found at this location: /services/databases/ASAssets/KPImetrics

#### Column Definitions

This section provides information on the column definitions. This section provides column information regarding the ASAssets published database and KPImetrics catalog which is found at this location: /services/databases/ASAssets/KPImetrics. Any column with the [k] designation indicates that the field is part of a key which makes a row in that table unique. Any column with the [fk] designation indicates that the field is a foreign key to another table.

#### metrics\_history – History Definitions

##### metrics\_requests\_hist (History) Table

Historical metrics requests table. Derived from metrics\_requests\_hist and metrics\_resources\_usage\_hist. Expanded with user information and resourcekind and dataservicename.

| Column Name    | Column Type   | Definition   |
|----------------|---------------|--|
| partition [k]  | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.                        |
| cluster        | VARCHAR(255)  | The name of the cluster or null if no cluster.   |
| nodehost [k]   | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]   | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |
| requestid [k]  | DECIMAL(19,0) | The unique request id that is the primary key of this table.   |
| parentid [fk]  | DECIMAL(19,0) | A foreign key back to the requestid within this table. Contains -1 when no parent reference.   |
| sessionid [fk] | DECIMAL(19,0) | A unique session id and foreign key to metrics_sessions_hist.  |
| requesttype    | VARCHAR(255)  | The type of request that is stored in the description field. "SQL"=select statement, "SQL Script"=call statement executed, "XSLT, Basic, or Streaming Transformation", "Java Procedure (built-in)", etc. |
| description    | CLOB          | The actual client request or internal DV request.  |
| starttime [k]  | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867  |
| endtime        | TIMESTAMP     | The timestamp of when the request completed. E.g. 2020-01-06 10:19:36.899  |
| totalduration  | DECIMAL(19,0) | The total duration of the request measured in milli-seconds. Divide by 1000 to get minutes.  |
| serverduration | DECIMAL(19,0) | The duration of the request within the server measured in milli-seconds. Divide by 1000 to get minutes.  |
| rowsAffected   | DECIMAL(19,0) | The number of rows affected or returned. The value may be -1.  |
| maxmemory      | DECIMAL(19,0) | The maximum amount of memory used by the request.  |
| maxdisk        | DECIMAL(19,0) | The maximum amount of disk used by the request. It is not good for a request to use disk.  |
| message        | CLOB          | The exception message if a request was not successful.   |



|                     |               |  |
|---------------------|---------------|--|
| status              | VARCHAR(20)   | The status of the request [SUCCESS, FAILED].                             |
| resourcekind        | VARCHAR(20)   | The type of resource that executed [system, user defined].               |
| dataservicename     | VARCHAR(255)  | The published data service name.   |
| userid              | DECIMAL(19,0) | The DV userid from the system.ALL_USERS tables.                          |
| user                | VARCHAR(255)  | The user name who connected for this session.                            |
| domain              | VARCHAR(255)  | The domain of the user who connected.                                    |
| group               | VARCHAR(255)  | The group of the user who connected.                                     |
| userkey [fk]        | VARCHAR(255)  | The normalized user key which is a foreign key to METRICS_LDAP_PERSON.   |
| domainkey [fk]      | VARCHAR(255)  | The normalized domain key which is a foreign key to METRICS_LDAP_PERSON. |
| fullname            | VARCHAR(255)  | The full name of the user who connected.                                 |
| lastname            | VARCHAR(255)  | The last name of the user who connected.                                 |
| firstname           | VARCHAR(255)  | The first name of the user who connected.                                |
| mail                | VARCHAR(255)  | The email of the user who connected.                                     |
| employeenumber      | VARCHAR(255)  | The employee number of the user who connected.                           |
| employeeid          | VARCHAR(255)  | The employee id of the user who connected.                               |
| telephonenumber     | VARCHAR(255)  | The primary telephone number of the user who connected.                  |
| friendlycountryname | VARCHAR(255)  | The friendly country name of the user who connected.                     |

### metrics\_requests\_hist\_sqlplan (History) Table

Historical metrics requests SQL Plan table. Derived from metrics\_requests\_hist and metrics\_resources\_usage\_hist. Provides details about whether the SQL Plan is being pushed down to the database or not.

| Column Name      | Column Type   | Definition  |
|------------------|---------------|---|
| partition [k]    | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.   |
| starttime [k]    | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867   |
| requestid [k]    | DECIMAL(19,0) | The unique request id that is the primary key of this table.  |
| nodehost [k]     | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]     | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |
| planstatus       | VARCHAR(20)   | A foreign key back to the requestid within this table. Contains -1 when no parent reference.  |
| message          | VARCHAR(4000) | The exception message if a request was not successful.  |
| rootnodetitle    | VARCHAR(255)  | The root node title is derived from the source query resource names with a "-" separator if there is more than one resource involved in the query but not to exceed 255 characters. |
| ispusheddown     | VARCHAR(5)    | true/false – specifies whether the query plan is pushed down to the database or not.  |
| formattedsqlplan | CLOB          | The formatted SQL Plan is generated and stored similar to the way it would be seen in TDV Studio by a developer.  |
| description      | CLOB          | The actual client request or internal TDV request.  |

### metrics\_resources\_usage\_hist (History) Table

Historical metrics resources usage table. Derived from metrics\_resources\_usage\_hist.

| Column Name   | Column Type | Definition  |
|---------------|-------------|---|
| partition [k] | SMALLINT    | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |

|                 |               |   |
|-----------------|---------------|---|
| cluster         | VARCHAR(255)  | The name of the cluster or null if no cluster.  |
| nodehost [k]    | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]    | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |
| sessionid [fk]  | DECIMAL(19,0) | A unique session id and foreign key to metrics_sessions_hist.   |
| user            | VARCHAR(255)  | The user name who connected for this session.   |
| domain          | VARCHAR(255)  | The domain of the user who connected.   |
| group           | VARCHAR(255)  | The group of the user who connected.  |
| requestid [k]   | DECIMAL(19,0) | The unique request id that is the primary key of this table.  |
| parentid [fk]   | DECIMAL(19,0) | A foreign key back to the requestid within this table. Contains -1 when no parent reference.  |
| datasourcepath  | VARCHAR(255)  | The DV path to the published datasource/dataservice [/services/databases/<name>, /services/webservices/<path>name>]   |
| datasourcetype  | VARCHAR(255)  | The type of published datasource [VirtualRelational   VirtualWsdI   CompositeWebService].   |
| resourcepath    | VARCHAR(4000) | The DV path to the resource.  |
| resourcetype    | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| resourceguid    | VARCHAR(40)   | The guid of the resource path. Eg. cff5fe78-c3c5-4a81-b134-d497cea5351e   |
| resourcekind    | VARCHAR(20)   | The type of resource that executed [system, user defined].  |
| starttime [k]   | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867   |
| endtime         | TIMESTAMP     | The timestamp of when the request completed. E.g. 2020-01-06 10:19:36.899   |
| resourceorigin  | VARCHAR(30)   | The original DV system table in which the resource originated from.<br>[ALL_TABLES  ALL_PROCEDURES ALL_WSDL_OPERATIONS ALL_RESOURCES  ALL_COLUMNS ALL_PARAMETERS]   |
| resourceid [k]  | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".  |
| dataservicename | VARCHAR(255)  | The published data service name.  |
| resourcenname   | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.   |
| parentname      | VARCHAR(255)  | The parent name of the resource. A.k.a. schema name if from published database.   |
| grandparentname | VARCHAR(255)  | The grand-parent name of the resource. A.k.a. catalog name if from published database.  |
| categoryname    | VARCHAR(255)  | The category name of the resource. A normalized name from either the resource name, parent name or grand-parent name.<br><br>ALL_TABLES: TABLE_NAME or SCHEMA_NAME if not null<br>ALL_COLUMNS: TABLE_NAME or SCHEMA_NAME if not null<br>ALL_PROCEDURES: PROCEDURE_NAME or SCHEMA_NAME if not null<br>ALL_PARAMETERS: PROCEDURE_NAME or SCHEMA_NAME if not null<br>ALL_WSDL_OPERATIONS: If legacy web service then it is the service name otherwise it is the parent folder name of the web service. If no parent folder name then it is the web service datasource name.<br><br>e.g. Legacy: /services/webservices/system/admin/ <b>resource</b> /operations/getUsedResources<br>e.g. Non-Legacy: /services/webservices/GrandParent/ <b>Parent</b> /CustomerWS/LookupProduct<br>e.g. Non-Legacy: /services/webservices/ <b>CustomerWS</b> /LookupProduct<br>ALL_RESOURCES: null |
| parentpath      | VARCHAR(4000) | The parent path of the resource.  |
| userid          | DECIMAL(19,0) | The DV userid from the system.ALL_USERS tables.   |
| userkey [fk]    | VARCHAR(255)  | The normalized user key which is a foreign key to METRICS_LDAP_PERSON.  |
| domainkey [fk]  | VARCHAR(255)  | The normalized domain key which is a foreign key to METRICS_LDAP_PERSON.  |
| fullname        | VARCHAR(255)  | The full name of the user who connected.  |
| lastname        | VARCHAR(255)  | The last name of the user who connected.  |
| firstname       | VARCHAR(255)  | The first name of the user who connected.   |

|                     |              |   |
|---------------------|--------------|---|
| mail                | VARCHAR(255) | The email of the user who connected.                    |
| employeenumber      | VARCHAR(255) | The employee number of the user who connected.          |
| employeeid          | VARCHAR(255) | The employee id of the user who connected.              |
| telephonenumber     | VARCHAR(255) | The primary telephone number of the user who connected. |
| friendlycountryname | VARCHAR(255) | The friendly country name of the user who connected.    |

### metrics\_sessions\_hist (History) Table

Historical metrics sessions table. Derived from metrics\_sessions\_hist and metrics\_resources\_usage\_hist. Expanded with user information if found.

| Column Name         | Column Type   | Definition  |
|---------------------|---------------|---|
| partition [k]       | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| cluster             | VARCHAR(255)  | The name of the cluster or null if no cluster.  |
| nodehost [k]        | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]        | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |
| sessionid [k]       | DECIMAL(19,0) | A unique session id and primary identifier of this table.   |
| sessiontype         | VARCHAR(40)   | Designates the type session connection [JDBC, HTTP, TASK, etc.].  |
| clienthost          | VARCHAR(255)  | Designates the client host name that connected to DV.   |
| type [k]            | VARCHAR(20)   | Indicates whether the session is of type 'begin' or 'end'.  |
| logintime [k]       | TIMESTAMP     | The timestamp of when the session started.  |
| logouttime          | TIMESTAMP     | The timestamp of when the session ended   |
| status              | VARCHAR(20)   | The status of the session [ACTIVE, CLOSING].  |
| totalduration       | DECIMAL(19,0) | The total session duration in milli-seconds. Only on row of type='end' where status='CLOSING'.  |
| totalRequests       | DECIMAL(19,0) | The total number of requests [metrics_requests_hist] executed for this session.   |
| bytestoclient       | DECIMAL(19,0) | The total number of bytes sent to the client host during this session.  |
| bytesfromclient     | DECIMAL(19,0) | The total number of bytes received from the client host during this session.  |
| userid              | DECIMAL(19,0) | The DV userid from the system.ALL_USERS tables.   |
| user                | VARCHAR(255)  | The user name who connected for this session.   |
| domain              | VARCHAR(255)  | The domain of the user who connected.   |
| group               | VARCHAR(255)  | The group of the user who connected.  |
| userkey [fk]        | VARCHAR(255)  | The normalized user key which is a foreign key to METRICS_LDAP_PERSON.  |
| domainkey [fk]      | VARCHAR(255)  | The normalized domain key which is a foreign key to METRICS_LDAP_PERSON.  |
| fullname            | VARCHAR(255)  | The full name of the user who connected.  |
| lastname            | VARCHAR(255)  | The last name of the user who connected.  |
| firstname           | VARCHAR(255)  | The first name of the user who connected.   |
| mail                | VARCHAR(255)  | The email of the user who connected.  |
| employeenumber      | VARCHAR(255)  | The employee number of the user who connected.  |
| employeeid          | VARCHAR(255)  | The employee id of the user who connected.  |
| telephonenumber     | VARCHAR(255)  | The primary telephone number of the user who connected.   |
| friendlycountryname | VARCHAR(255)  | The friendly country name of the user who connected.  |

### metrics history roll-up tables

| Resource (Resource Type) | Description |
|--------------------------|-------------|
|--------------------------|-------------|

|  |   |
|--|---|
| <b>Metrics Roll-up Counts</b>  |   |
| metrics_all_kpimetrics_table_counts (TABLE)  | Provides a rollup of all counts by nodehost and nodeport for all metrics tables.  |
| metrics_all_min_max_starttime_count (TABLE)  | Provides a rollup of the min/max starttime/logintime, min/max requestid/sessionid and the total count of rows for each of the 6 metrics collection and historical tables. |
| metrics_history_tables_row_distribution (TABLE)  | Provides a partition distribution for each partition month for each metrics history table.  |
| metrics_history_other_tables_row_distribution (TABLE)  | Provides a partition distribution for each partition month for each metrics non-history tables.   |
| <b>Metrics Requests History Roll-up</b>  |   |
| metrics_requests_hist_groupby_date (TABLE)   | Provides a rollup row count of the metrics_requests_hist table grouped by date.   |
| metrics_requests_hist_groupby_date_month (TABLE)   | Provides a rollup row count of the metrics_requests_hist table grouped by month.  |
| metrics_requests_hist_groupby_date_month_nodehost_nodeport (TABLE)                               | Provides a rollup row count of the metrics_requests_hist table grouped by month, nodehost and nodeport.   |
| metrics_requests_hist_groupby_date_nodehost_nodeport (TABLE)                                     | Provides a rollup row count of the metrics_requests_hist table grouped by date, nodehost and nodeport.  |
| metrics_requests_hist_groupby_date_user_domain (TABLE)   | Provides a rollup row count of the metrics_requests_hist table grouped by date, user and domain.  |
| metrics_requests_hist_groupby_date_user_domain_resourcekind (TABLE)                              | Provides a rollup row count of the metrics_requests_hist table grouped by date, user, domain and resourcekind [system, user defined].                                     |
| metrics_requests_hist_groupby_date_user_domain_resourcekind_dataservicename (TABLE)              | Provides a rollup row count of the metrics_requests_hist table grouped by date, user, domain and resourcekind [system, user defined] and dataservicename.                 |
| metrics_requests_hist_groupby_nodehost_nodeport (TABLE)  | Provides a rollup row count of the metrics_requests_hist table grouped by nodehost and nodeport.  |
| metrics_requests_hist_groupby_user_domain_nodehost_nodeport (TABLE)                              | Provides a rollup row count of the metrics_requests_hist table grouped by user, domain, nodehost and nodeport.  |
| metrics_requests_hist_groupby_user_domain_resourcekind_dataservicename (TABLE)                   | Provides a rollup row count of the metrics_requests_hist table grouped by user, domain, resourcekind [system, user defined] and dataservicename.                          |
| metrics_requests_hist_groupby_user_domain_resourcekind_dataservicename_nodehost_nodeport (TABLE) | Provides a rollup row count of the metrics_requests_hist table grouped by user, domain, resourcekind [system, user defined], dataservicename, nodehost and nodeport.      |
| <b>Metrics Resources Usage History Roll-Up</b>   |   |
| metrics_resources_usage_hist_groupby_date (TABLE)  | Provides a rollup row count of the metrics_resources_usage_hist table grouped by date.  |
| metrics_resources_usage_hist_groupby_date_month (TABLE)  | Provides a rollup row count of the metrics_resources_usage_hist table grouped by month.   |
| metrics_resources_usage_hist_groupby_date_month_nodehost_nodeport (TABLE)                        | Provides a rollup row count of the metrics_resources_usage_hist table grouped by month, nodehost and nodeport.  |
| metrics_resources_usage_hist_groupby_date_nodehost_nodeport (TABLE)                              | Provides a rollup row count of the metrics_resources_usage_hist table grouped by date, nodehost and nodeport.   |
| metrics_resources_usage_hist_groupby_date_user_domain_resourcekind (TABLE)                       | Provides a rollup row count of the metrics_resources_usage_hist table grouped by date, user, domain and resourcekind [system, user defined].                              |
| metrics_resources_usage_hist_groupby_nodehost_nodeport (TABLE)                                   | Provides a rollup row count of the metrics_resources_usage_hist table grouped by nodehost and nodeport.   |
| metrics_resources_usage_hist_groupby_user_domain_resourcekind (TABLE)                            | Provides a rollup row count of the metrics_resources_usage_hist table grouped by user, domain and resourcekind [system, user defined].                                    |



|   |   |
|---|---|
| metrics_resources_usage_hist_groupby_user_domain_resourcekind_dataservicename | Provides a rollup row count of the metrics_resources_usage_hist table grouped by user, domain, resourcekind [system, user defined] and dataservicename. |
| <b>Metrics Sessions History Roll-up</b>                                       |   |
| metrics_sessions_hist_groupby_clienthost_nodehost_nodeport (TABLE)            | Provides a rollup row count of the metrics_sessions_hist table grouped by clienthost, nodehost and nodeport.  |
| metrics_sessions_hist_groupby_date (TABLE)                                    | Provides a rollup row count of the metrics_sessions_hist table grouped by date.   |
| metrics_sessions_hist_groupby_date_nodehost_nodeport (TABLE)                  | Provides a rollup row count of the metrics_sessions_hist table grouped by date, nodehost and nodeport.  |
| metrics_sessions_hist_groupby_date_type (TABLE)                               | Provides a rollup row count of the metrics_sessions_hist table grouped by date and type='end'   |
| metrics_sessions_hist_groupby_month (TABLE)                                   | Provides a rollup row count of the metrics_sessions_hist table grouped by month.  |
| metrics_sessions_hist_groupby_month_nodehost_nodeport (TABLE)                 | Provides a rollup row count of the metrics_sessions_hist table grouped by month, nodehost and nodeport.   |
| metrics_sessions_hist_groupby_month_type (TABLE)                              | Provides a rollup row count of the metrics_sessions_hist table grouped by month and type='end'  |
| metrics_sessions_hist_groupby_nodehost_nodeport (TABLE)                       | Provides a rollup row count of the metrics_sessions_hist table grouped by nodehost and nodeport.  |
| metrics_sessions_hist_groupby_sessiontype (TABLE)                             | Provides a rollup row count of the metrics_sessions_hist table grouped by session type [TASK,INTERNAL,JDBC, etc].                                       |

## metrics\_count – Count Definitions

### metrics\_tables\_row\_distribution Table

Provides a metrics table row distribution for each table and partition.

| Column Name         | Column Type  | Definition  |
|---------------------|--------------|---|
| table_name          | BIGINT       | The name of the table   |
| partition_name      | VARCHAR(255) | The name of the partition. Also known as the partition window.  |
| boundary_definition | VARCHAR(255) | The date of the boundary high value.  |
| range_type          | TIMESTAMP    | The range associated with the boundary: LEFT or RIGHT. If LEFT then rows are contained to the LEFT of the boundary definition.  |
| partition_number    | INTEGER      | The partition number is associated with an interval integer representing the day of the year and is a value between 1 and 366. 366 days in a year accounts for leap year. |
| num_rows            | INTEGER      | The number of rows in the partition.  |

### metrics\_all\_kpimetrics\_table\_countsTable

Provides a metadata table row distribution for each table and partition.

| Column Name    | Column Type  | Definition   |
|----------------|--------------|--|
| table_name     | BIGINT       | The name of the table  |
| type           | VARCHAR(255) | The description specifying the row type of GROUPBY or TOTAL.   |
| countformatted | VARCHAR(255) | A formatted count with commas.                                 |
| min_date       | VARCHAR(255) | The minimum timestamp found in the table.                      |
| max_date       | VARCHAR(255) | The maximum timestamp found in the table.                      |
| nodehost [k]   | VARCHAR(255) | The host name which comes from GetProperty('SERVER_HOSTNAME'). |

|              |         |   |
|--------------|---------|---|
| nodeport [k] | INTEGER | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1. |
|--------------|---------|---|

## metrics\_collection – Collection Definitions

### metrics\_requests (Collection) Table

Native DV out-of-the-box metrics requests collection table. Derived from metrics\_requests.

| Column Name    | Column Type   | Definition   |
|----------------|---------------|--|
| cluster        | VARCHAR(255)  | The name of the cluster or null if no cluster.   |
| nodehost [k]   | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]   | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |
| requestid [k]  | DECIMAL(19,0) | The unique request id that is the primary key of this table.   |
| parentid [fk]  | DECIMAL(19,0) | A foreign key back to the requestid within this table. Contains -1 when no parent reference.   |
| sessionid [fk] | DECIMAL(19,0) | A unique session id and foreign key to metrics_sessions.   |
| requesttype    | VARCHAR(255)  | The type of request that is stored in the description field. "SQL"=select statement, "SQL Script"=call statement executed, "XSLT, Basic, or Streaming Transformation", "Java Procedure (built-in)", etc. |
| description    | CLOB          | The actual client request or internal DV request.  |
| starttime [k]  | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867  |
| endtime        | TIMESTAMP     | The timestamp of when the request completed. E.g. 2020-01-06 10:19:36.899  |
| totalduration  | DECIMAL(19,0) | The total duration of the request measured in milli-seconds. Divide by 1000 to get minutes.  |
| serverduration | DECIMAL(19,0) | The duration of the request within the server measured in milli-seconds. Divide by 1000 to get minutes.  |
| rowsAffected   | DECIMAL(19,0) | The number of rows affected or returned. The value may be -1.  |
| maxmemory      | DECIMAL(19,0) | The maximum amount of memory used by the request.  |
| maxdisk        | DECIMAL(19,0) | The maximum amount of disk used by the request. It is not good for a request to use disk.  |
| message        | CLOB          | The exception message if a request was not successful.   |
| status         | VARCHAR(20)   | The status of the request [SUCCESS, FAILED].   |

### metrics\_resources\_usage (Collection) Table

Native DV out-of-the-box metrics resources usage collection table. Derived from metrics\_resources\_usage.

| Column Name    | Column Type   | Definition  |
|----------------|---------------|---|
| cluster        | VARCHAR(255)  | The name of the cluster or null if no cluster.  |
| nodehost [k]   | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]   | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.                                       |
| sessionid [fk] | DECIMAL(19,0) | A unique session id and foreign key to metrics_sessions.  |
| user           | VARCHAR(255)  | The user name who connected for this session.   |
| domain         | VARCHAR(255)  | The domain of the user who connected.   |
| group          | VARCHAR(255)  | The group of the user who connected.  |
| requestid [k]  | DECIMAL(19,0) | The unique request id that is the primary key of this table.  |
| parentid [fk]  | DECIMAL(19,0) | A foreign key back to the requestid within this table. Contains -1 when no parent reference.                        |
| datasourcepath | VARCHAR(255)  | The DV path to the published datasource/dataservice [/services/databases/<name>, /services/webservices/<path name>] |

|                  |               |   |
|------------------|---------------|---|
| datasourcetype   | VARCHAR(255)  | The type of published datasource [VirtualRelational   VirtualWsdI   CompositeWebService]. |
| resourcepath [k] | VARCHAR(4000) | The DV path to the resource.  |
| resourcetype [k] | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.                                 |
| resourceguid     | VARCHAR(40)   | The guid of the resource path. Eg. cff5fe78-c3c5-4a81-b134-d497cea5351e                   |
| resourcekind     | VARCHAR(20)   | The type of resource that executed [system, user defined].                                |
| starttime [k]    | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867               |
| endtime          | TIMESTAMP     | The timestamp of when the request completed. E.g. 2020-01-06 10:19:36.899                 |

### metrics\_sessions (Collection) Table

Native DV out-of-the-box metrics sessions collection table. Derived from metrics\_sessions.

| Column Name     | Column Type   | Definition  |
|-----------------|---------------|---|
| cluster         | VARCHAR(255)  | The name of the cluster or null if no cluster.  |
| nodehost [k]    | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]    | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |
| sessionid [k]   | DECIMAL(19,0) | A unique session id and primary identifier of this table.   |
| sessiontype     | VARCHAR(40)   | Designates the type session connection [JDBC, HTTP, TASK, INTERNAL, etc.].  |
| clienthost      | VARCHAR(255)  | Designates the client host name that connected to DV.   |
| type [k]        | VARCHAR(20)   | Indicates whether the session is of type 'begin' or 'end'.  |
| logintime [k]   | TIMESTAMP     | The timestamp of when the session started.  |
| logouttime      | TIMESTAMP     | The timestamp of when the session ended   |
| status          | VARCHAR(20)   | The status of the session [ACTIVE, CLOSING].  |
| totalduration   | DECIMAL(19,0) | The total session duration in milli-seconds. Only on row of type='end' where status='CLOSING'. Divide by 1000 to get minutes. |
| totalRequests   | DECIMAL(19,0) | The total number of requests [metrics_requests_hist] executed for this session.   |
| bytestoclient   | DECIMAL(19,0) | The total number of bytes sent to the client host during this session.  |
| bytesfromclient | DECIMAL(19,0) | The total number of bytes received from the client host during this session.  |

### metrics collection roll-up tables

| Resource (Resource Type)                                  | Description  |
|---|--|
| <b>Metrics Requests Collection Roll-up</b>                |  |
| metrics_requests_groupby_date (TABLE)                     | Rollup of metrics_requests collection data grouped by date. This can be useful to validate that metrics data is being written to the tables and how many records exist per day. Derived from metrics_requests  |
| metrics_requests_groupby_nodehost_nodeport (TABLE)        | Rollup of metrics_requests collection grouped by hostname and port. This can be useful to validate that metrics data is being written by each node in the cluster. It can also be used to detect data from other nodes that do not exist indicating that the database is being shared by another environment. Derived from metrics_requests. |
| <b>Metrics Resources Usage Collection Roll-Up</b>         |  |
| metrics_resources_usage_groupby_date (TABLE)              | Provides a rollup row count of the metrics_resources_usage table grouped by date. This can be useful to validate that metrics data is being written to the tables and how many records exist per day. Derived from metrics_requests.   |
| metrics_resources_usage_groupby_nodehost_nodeport (TABLE) | Provides a rollup row count of the metrics_resources_usage table grouped by nodehost and nodeport. This can be useful to validate that metrics data is being written by each node in the cluster. It can also be used to detect  |

|   |  |
|---|--|
|   | data from other nodes that do not exist indicating that the database is being shared by another environment. Derived from metrics_requests.  |
| metrics_resources_usage_groupby_resourcekind (TABLE)          | Provides a rollup row count of the metrics_resources_usage table grouped by resourcekind [system, user defined].   |
| metrics_resources_usage_groupby_user_domain                   | Provides a rollup row count of the metrics_resources_usage table grouped by user and domain.   |
| <b>Metrics Sessions Collection Roll-up</b>                    |  |
| metrics_sessions_groupby_clienthost_nodehost_nodeport (TABLE) | Provides a rollup row count of the metrics_sessions table grouped by clienthost, nodehost and nodeport.  |
| metrics_sessions_groupby_date (TABLE)                         | Provides a rollup row count of the metrics_sessions table grouped by date.   |
| metrics_sessions_groupby_date_type (TABLE)                    | Provides a rollup row count of the metrics_sessions table grouped by date and type='end'. This can be useful to validate that metrics data is being written to the tables and how many records exist per day. Derived from metrics_requests.   |
| metrics_sessions_groupby_month (TABLE)                        | Provides a rollup row count of the metrics_sessions table grouped by month and type='end'.   |
| metrics_sessions_groupby_month_type (TABLE)                   | Provides a rollup row count of the metrics_sessions table grouped by month and type='end'.   |
| metrics_sessions_groupby_nodehost_nodeport (TABLE)            | Provides a rollup row count of the metrics_sessions table grouped by nodehost and nodeport. This can be useful to validate that metrics data is being written by each node in the cluster. It can also be used to detect data from other nodes that do not exist indicating that the database is being shared by another environment. Derived from metrics_requests. |
| metrics_sessions_groupby_sessiontype (TABLE)                  | Provides a rollup row count of the metrics_sessions table grouped by session type [TASK,INTERNAL,JDBC, etc] and type='end'.  |

## AllCustomReports Definitions

### AccessByUserOvertime [RT] Table

AccessByUserOvertimeRT – real time

Real-time report of the most active resources by a user over time. Sorted resource count, user and date. The algorithm for this report is shown below. The group by is the key to this report. The key grouping is on the user first and then the resource.

SELECT

"user", "domain", fullname, email, requestdate, resourcepath, resourcename, resourcetype, parentpath, resourcekind, datasourcetype, dataservicename, categoryname, nodehost, nodeport, COUNT(resourceid) countname,

CAST(ROUND(MONTHS\_BETWEEN(CURRENT\_DATE, requestdate),2) AS

DECIMAL(19,2)) requestdatemonths,

CAST(DAYS\_BETWEEN(CURRENT\_DATE, requestdate) AS DECIMAL(19,0))

requestdatedays

FROM

/shared/ASAssets/KPImetrics/Business/Logical/resourceUsage/vResourceUsage

GROUP BY "user", "domain", fullname, email, requestdate, resourceid, resourcepath, resourcename, resourcetype, parentpath, resourcekind, datasourcetype, dataservicename, categoryname, nodehost, nodeport

Derived from the following tables: vResourceCountUsersDate (group by clause) ?

vResourceUsage ? metrics\_resources\_usage\_hist {pm}

| Column Name       | Column Type   | Definition   |
|-------------------|---------------|--|
| partition [k]     | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.  |
| user              | VARCHAR(255)  | The user name who connected for this session.  |
| domain            | VARCHAR(255)  | The domain of the user who connected.  |
| fullname          | VARCHAR(255)  | The group of the user who connected.   |
| mail              | VARCHAR(255)  | The email of the user who connected.   |
| resourceid        | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in “resourceorigin”.   |
| resourcepath [k]  | VARCHAR(4000) | The DV path to the resource.   |
| resourcetype [k]  | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.  |
| resourcenname     | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.  |
| parentpath        | VARCHAR(4000) | The parent path of the resource.   |
| dataservicename   | VARCHAR(255)  | The published data service name.   |
| categoryname      | VARCHAR(255)  | The category name of the resource. A normalized name from either the resource name, parent name or grand-parent name.<br><br>ALL_TABLES: TABLE_NAME or SCHEMA_NAME if not null<br>ALL_COLUMNS: TABLE_NAME or SCHEMA_NAME if not null<br>ALL_PROCEDURES: PROCEDURE_NAME or SCHEMA_NAME if not null<br>ALL_PARAMETERS: PROCEDURE_NAME or SCHEMA_NAME if not null<br>ALL_WSDL_OPERATIONS: If legacy web service then it is the service name otherwise it is the parent folder name of the web service. If no parent folder name then it is the web service dataservice name.<br><br>e.g. Legacy: /services/webservices/system/admin/ <b>resource</b> /operations/getUsedResources<br>e.g. Non-Legacy: /services/webservices/GrandParent/ <b>Parent</b> /CustomerWS/LookupProduct<br>e.g. Non-Legacy: /services/webservices/ <b>CustomerWS</b> /LookupProduct<br>ALL_RESOURCES: null |
| countname         | INTEGER       | The number of resources for a given resource name.   |
| requestdate       | DATE          | The date [YYYY-MM-DD] of the request.  |
| requestdatemonths | DECIMAL(19,2) | The number of months difference between the request date and the current date.   |
| requestdatedays   | DECIMAL(19,0) | The number of days difference between the request date and the current date.   |
| nodehost [k]      | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]      | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |

### ActiveResourcesOverPeriodOfTime [RT] Table

ActiveResourcesOverPeriodOfTimeRT – real time

Real-time report of the most active resources over time. Sorted by resource count and date.

```

SELECT
requestdate, resourcepath, resourcenname, resourcetype, parentpath, resourcekind, datasourcetype,
dataservicename, categoryname, nodehost, nodeport,
COUNT(resourceid) countname,
CAST(ROUND(MONTHS_BETWEEN(CURRENT_DATE, requestdate),2) AS DECIMAL(19,2))
requestdatemonths,
CAST(DAYS_BETWEEN(CURRENT_DATE, requestdate) AS DECIMAL(19,0))
requestdatedays
FROM
```

/shared/ASAssets/KPImetrics/Business/Logical/resourceUsage/vResourceUsage

GROUP BY requestdate, resourceid, resourcepath, resourcename, resourcectype, parentpath, resourcekind, datasourcetype, dataservicename, categoryname, nodehost, nodeport

Derived from the following tables: vResourceCountDate (group by clause) → vResourceUsage → metrics\_resources\_usage\_hist {pm}

| Column Name       | Column Type   | Definition   |
|-------------------|---------------|--|
| partition [k]     | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.  |
| resourceid        | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".   |
| resourcepath [k]  | VARCHAR(4000) | The DV path to the resource.   |
| resourcename      | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.  |
| resourcectype [k] | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.  |
| parentpath        | VARCHAR(4000) | The parent path of the resource.   |
| dataservicename   | VARCHAR(255)  | The published data service name.   |
| categoryname      | VARCHAR(255)  | The category name of the resource. A normalized name from either the resource name, parent name or grand-parent name.<br><br>ALL_TABLES: TABLE_NAME or SCHEMA_NAME if not null<br>ALL_COLUMNS: TABLE_NAME or SCHEMA_NAME if not null<br>ALL_PROCEDURES: PROCEDURE_NAME or SCHEMA_NAME if not null<br>ALL_PARAMETERS: PROCEDURE_NAME or SCHEMA_NAME if not null<br>ALL_WSDL_OPERATIONS: If legacy web service then it is the service name otherwise it is the parent folder name of the web service. If no parent folder name then it is the web service dataservice name.<br><br>e.g. Legacy: /services/webservices/system/admin/ <b>resource</b> /operations/getUsedResources<br>e.g. Non-Legacy: /services/webservices/GrandParent/ <b>Parent</b> /CustomerWS/LookupProduct<br>e.g. Non-Legacy: /services/webservices/ <b>CustomerWS</b> /LookupProduct<br>ALL_RESOURCES: null |
| countname         | INTEGER       | The number of resources for a given resource name.   |
| requestdate       | DATE          | The date [YYYY-MM-DD] of the request.  |
| requestdatemonths | DECIMAL(19,2) | The number of months difference between the request date and the current date.   |
| requestdatedays   | DECIMAL(19,0) | The number of days difference between the request date and the current date.   |
| nodehost [k]      | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]      | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |

## ResourceAccessByUsers [RT] Table

ResourceAccessByUsersRT – real time

Real-time report of the most used resources by a user with no time period. Derived from the following tables: vResourceCountUsers (group by clause) → vResourceUsage → metrics\_resources\_usage\_hist {pm}

| Column Name       | Column Type   | Definition   |
|-------------------|---------------|--|
| resourceid        | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin". |
| resourcename      | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.                                |
| resourcepath [k]  | VARCHAR(4000) | The DV path to the resource.   |
| resourcectype [k] | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.                                |

|                 |               |  |
|-----------------|---------------|--|
| parentpath      | VARCHAR(4000) | The parent path of the resource.   |
| dataservicename | VARCHAR(255)  | The published data service name.   |
| categoryname    | VARCHAR(255)  | The category name of the resource. A normalized name from either the resource name, parent name or grand-parent name.<br><br>ALL_TABLES: TABLE_NAME or SCHEMA_NAME if not null<br>ALL_COLUMNS: TABLE_NAME or SCHEMA_NAME if not null<br>ALL_PROCEDURES: PROCEDURE_NAME or SCHEMA_NAME if not null<br>ALL_PARAMETERS: PROCEDURE_NAME or SCHEMA_NAME if not null<br>ALL_WSDL_OPERATIONS: If legacy web service then it is the service name otherwise it is the parent folder name of the web service. If no parent folder name then it is the web service dataservice name.<br><br>e.g. Legacy: /services/webservices/system/admin/ <b>resource</b> /operations/getUsedResources<br>e.g. Non-Legacy: /services/webservices/GrandParent/ <b>Parent</b> /CustomerWS/LookupProduct<br>e.g. Non-Legacy: /services/webservices/ <b>CustomerWS</b> /LookupProduct<br>ALL_RESOURCES: null |
| user            | VARCHAR(255)  | The user name who connected for this session.  |
| domain          | VARCHAR(255)  | The domain of the user who connected.  |
| fullname        | VARCHAR(255)  | The full name of the user who connected.   |
| totalusagecount | BIGINT        | The count of (resourceid) grouped by "user", "domain", fullname, mail, resourceid, resourcepath, resourcename, resourcetype, parentpath, resourcekind, datasourcetype, dataservicename, categoryname, nodehost, nodeport   |
| nodehost [k]    | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]    | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |

## ResourceCount\_Details [RT] Table

ResourceCount\_DetailsRT – real time

Real-time detail report of resource count by date. Derived from the following tables:

vResourceUsage → metrics\_resources\_usage\_hist {pm}

| Column Name      | Column Type   | Definition   |
|------------------|---------------|--|
| partition [k]    | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.  |
| loaddate         | TIMESTAMP     | The timestamp of when the record was inserted or loaded.   |
| month            | VARCHAR(255)  | A month string indicating the month of the request.  |
| resourceid       | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".   |
| resourcepath [k] | VARCHAR(4000) | The DV path to the resource.   |
| resourcename     | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.  |
| resourcetype [k] | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.  |
| parentpath       | VARCHAR(4000) | The parent path of the resource.   |
| dataservicename  | VARCHAR(255)  | The published data service name.   |
| categoryname     | VARCHAR(255)  | The category name of the resource. A normalized name from either the resource name, parent name or grand-parent name.<br><br>ALL_TABLES: TABLE_NAME or SCHEMA_NAME if not null<br>ALL_COLUMNS: TABLE_NAME or SCHEMA_NAME if not null<br>ALL_PROCEDURES: PROCEDURE_NAME or SCHEMA_NAME if not null<br>ALL_PARAMETERS: PROCEDURE_NAME or SCHEMA_NAME if not null |



|              |              |   |
|--------------|--------------|---|
|              |              | <p>ALL_WSDL_OPERATIONS: If legacy web service then it is the service name otherwise it is the parent folder name of the web service. If no parent folder name then it is the web service dataservice name.</p> <p>e.g. Legacy: /services/webservices/system/admin/<b>resource</b>/operations/getUsedResources</p> <p>e.g. Non-Legacy: /services/webservices/GrandParent/<b>Parent</b>/CustomerWS/LookupProduct</p> <p>e.g. Non-Legacy: /services/webservices/<b>CustomerWS</b>/LookupProduct</p> <p>ALL_RESOURCES: null</p> |
| countname    | INTEGER      | The number of resources for a given resource name.  |
| fromdate     | DATE         | The from date range.  |
| todate       | DATE         | The to date range.  |
| nodehost [k] | VARCHAR(255) | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k] | INTEGER      | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |

### ResourceCount\_Total [RT] Table

ResourceCount\_TotalRT – real time Real-time roll-up report of resource count by month.  
 Derived from the following tables: vResourceUsage → metrics\_resources\_usage\_hist {pm}

| Column Name   | Column Type  | Definition  |
|---------------|--------------|---|
| partition [k] | SMALLINT     | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| loaddate      | TIMESTAMP    | The timestamp of when the record was inserted or loaded.  |
| month         | VARCHAR(255) | A month string indicating the month of the request.   |
| fromdate      | DATE         | The from date range.  |
| todate        | DATE         | The to date range.  |
| resourcecount | INTEGER      | The total number of resources matching the criteria.  |
| nodehost [k]  | VARCHAR(255) | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]  | INTEGER      | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |

### SystemCPUandMemoryStatus Table

Report of system CPU and memory utilization and DV memory over time. Derived from the following tables: vSystemResources → METRICS\_CIS\_SYSTEM\_RESOURCES {pm}

| Column Name        | Column Type   | Definition   |
|--------------------|---------------|--|
| partition [k]      | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.  |
| eventtime          | TIMESTAMP     | The timestamp of when the row was recorded in the metrics tables.  |
| avgmembytes        | DECIMAL(19,0) | The average amount of memory in bytes currently being used.  |
| avgmanagedmembytes | DECIMAL(19,0) | The average managed memory bytes currently in DV.  |
| avgmemmax          | DECIMAL(19,0) | The average maximum memory in bytes configured in DV.  |
| avgmanagedmemmax   | DECIMAL(19,0) | The average managed maximum memory in bytes configured in DV.  |
| cpuutilization     | DECIMAL(24,4) | The system CPU utilization (used) percent.   |
| sysavailablememory | DECIMAL(24,4) | The system memory used in MB. This will always be showing high since DV takes the configured amount of memory at startup time. This is only a good gauge of potential other processes running on the same server as DV if a large fluctuation is detected. |
| sysusedmemory      | DECIMAL(24,4) | The system memory available in MB. Counterpart to the above statement.   |
| nodehost [k]       | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |



|              |         |   |
|--------------|---------|---|
| nodeport [k] | INTEGER | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1. |
|--------------|---------|---|

### vEventRequestSqlColumns Table

Report of the columns accessed by a SQL request query. Derived from the following tables:  
[METRICS\_SQL\_COLUMNS{pm}, METRICS\_SQL\_RESOURCE{pm}, RequestExpanded -->  
[metrics\_requests\_hist{pm}, metrics\_sessions\_hist{pm}]]

| Column Name         | Column Type   | Definition  |
|---------------------|---------------|---|
| requestid [k]       | DECIMAL(19,0) | The unique request id that is the primary key of this table.  |
| starttime [k]       | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867   |
| requestdatemonths   | DECIMAL(19,2) | The number of months difference between the request date and the current date.  |
| requestdatedays     | DECIMAL(19,0) | The number of days difference between the request date and the current date.  |
| resourceeqid        | DECIMAL(19,0) | The resource sequence id is a foreign key back to vMetricsSqlResource.  |
| resourceorder       | DECIMAL(10,0) | The resource order.   |
| columnposition      | NUMERIC(10,2) | The ordinal position of the column and derived column. 1.0=1st column, 1.1=1st column of a derived field 1.2=2nd column of derived field.                 |
| columnorigtype      | VARCHAR(20)   | Column origination type determines the type of SQL the column came from. CALL, PRIMARY, COMPLEX, SUBQUERY   |
| columnalias         | VARCHAR(255)  | The logical column (alias) name from the SQL statement. If not present then "columnName" is the alias.  |
| columnname          | VARCHAR(255)  | The projected column name from the SQL statement. If * used, then same as actual column name  |
| columnactual        | VARCHAR(255)  | The physical/source column name from the metadata table.  |
| columntype          | VARCHAR(4000) | The type of column.   |
| columnndirection    | VARCHAR(10)   | The direction of the column. For TABLE types it is always OUT. For PROCEDURE types it may be IN, OUT, INOUT, RESULT, RETURN.                              |
| columnnderived      | VARCHAR(10)   | Determine whether this column is derived or not [true/false].   |
| columnnexpression   | CLOB          | The complete column expression.   |
| columnnfunctionlist | VARCHAR(4000) | A list of functions and occurrences that are used in the column expression. UPPER[3] would indicate that UPPER was used 3 times in the column expression. |
| columnnodelist      | VARCHAR(4000) | A list of column names that make up the column expression   |
| nodehost [k]        | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]        | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |

### vEventRequestSqlResources Table

Report of the resources accessed by a SQL request query. Derived from the following tables:  
[METRICS\_SQL\_REQUEST{pm}, METRICS\_SQL\_RESOURCE{pm}, RequestExpanded →  
[metrics\_requests\_hist{pm}, metrics\_sessions\_hist{pm}]]

| Column Name       | Column Type   | Definition  |
|-------------------|---------------|---|
| partition [k]     | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| requestid [k]     | DECIMAL(19,0) | The unique request id that is the primary key of this table.  |
| starttime [k]     | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867   |
| endtime           | TIMESTAMP     | The timestamp of when the request completed. E.g. 2020-01-06 10:19:36.899   |
| requestdatemonths | DECIMAL(19,2) | The number of months difference between the request date and the current date.  |

|                      |               |  |
|----------------------|---------------|--|
| requestdatedays      | DECIMAL(19,0) | The number of days difference between the request date and the current date.                                   |
| totalduration        | DECIMAL(19,0) | The total duration of the request measured in milli-seconds. Divide by 1000 to get minutes.                    |
| totaldurationdisplay | VARCHAR(25)   | The total duration formatted for display using the format 0 00:00:00.000.                                      |
| status               | VARCHAR(25)   | The status of the request [SUCCESS, FAILED].   |
| message              | VARCHAR(4000) | The exception message if a request was not successful.   |
| kpistatus            | VARCHAR(25)   | The KPImetrics SQL request processing status [SUCCESS, FAIL]   |
| kpimessage           | VARCHAR(4000) | An exception message that could occur during the processing of the SQL or null if no exception.                |
| user                 | VARCHAR(255)  | The user name who connected for this session.  |
| domain               | VARCHAR(255)  | The domain of the user who connected.  |
| fullname             | VARCHAR(255)  | The full name of the user who connected.   |
| mail                 | VARCHAR(255)  | The email of the user who connected.   |
| sessionid [fk]       | DECIMAL(19,0) | A unique session id and foreign key to metrics_sessions_hist.  |
| clienthost           | VARCHAR(255)  | Designates the client host name that connected to DV.  |
| bytesfromclient      | DECIMAL(19,0) | The total number of bytes received from the client host during this session.                                   |
| bytestoclient        | DECIMAL(19,0) | The total number of bytes sent to the client host during this session.   |
| rowsAffected         | DECIMAL(19,0) | The number of rows affected or returned. The value may be -1.  |
| sessiontype          | VARCHAR(40)   | Designates the type session connection [JDBC, HTTP, TASK, etc.].   |
| sqlinvocationtype    | VARCHAR(20)   | The SQL invocation type indicates the type of request [SELECT, CALL, INSERT, UPDATE, DELETE, PROCEDURE, WITH]. |
| description          | CLOB          | The actual client request or internal DV request.  |
| resourceeqid         | DECIMAL(19,0) | The resource sequence id is a foreign key back to vMetricsSqlResource.   |
| resourceid           | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".                       |
| resourcepath [k]     | VARCHAR(4000) | The DV path to the resource.   |
| resourcetype [k]     | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.  |
| frompath             | VARCHAR(4000) | The from path is the database URL such as catalog.schema.table.  |
| fromalias            | VARCHAR(255)  | The from path alias if applicable.   |
| dataservicename      | VARCHAR(255)  | The published data service name.   |
| catalogname          | VARCHAR(255)  | The name of the published catalog or null if not applicable.   |
| schemaname           | VARCHAR(255)  | The name of the published schema or null if not applicable.  |
| resourcenname        | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.  |
| nodehost [k]         | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]         | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.                                  |

### vResourceUsage Table

A raw report of all user defined resources. Derived from the following tables:  
metrics\_resources\_usage\_hist {pm}

| Column Name   | Column Type   | Definition  |
|---------------|---------------|---|
| partition [k] | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| cluster       | VARCHAR(255)  | The name of the cluster or null if no cluster.  |
| nodehost [k]  | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]  | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |
| parentid [fk] | DECIMAL(19,0) | A foreign key back to the requestid within this table. Contains -1 when no parent reference.  |

|                     |               |   |
|---------------------|---------------|---|
| requestid [k]       | DECIMAL(19,0) | The unique request id that is the primary key of this table.  |
| sessionid [fk]      | DECIMAL(19,0) | A unique session id and foreign key to metrics_sessions_hist.   |
| requestdate         | DATE          | The date [YYYY-MM-DD] of the request.   |
| starttime [k]       | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867   |
| endtime             | TIMESTAMP     | The timestamp of when the request completed. E.g. 2020-01-06 10:19:36.899   |
| requestdatemonths   | DECIMAL(19,2) | The number of months difference between the request date and the current date.  |
| requestdatedays     | DECIMAL(19,0) | The number of days difference between the request date and the current date.  |
| categoryname        | VARCHAR(255)  | <p>The category name of the resource. A normalized name from either the resource name, parent name or grand-parent name.</p> <p>ALL_TABLES: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_COLUMNS: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PROCEDURES: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PARAMETERS: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_WSDL_OPERATIONS: If legacy web service then it is the service name otherwise it is the parent folder name of the web service. If no parent folder name then it is the web service dataservice name.</p> <p>e.g. Legacy: /services/webservices/system/admin/<b>resource</b>/operations/getUsedResources</p> <p>e.g. Non-Legacy: /services/webservices/GrandParent/<b>Parent</b>/CustomerWS/LookupProduct</p> <p>e.g. Non-Legacy: /services/webservices/<b>CustomerWS</b>/LookupProduct</p> <p>ALL_RESOURCES: null</p> |
| dataservicename     | VARCHAR(255)  | The published data service name.  |
| datasourcepath      | VARCHAR(255)  | The DV path to the published datasource/dataservice [/services/databases/<name>, /services/webservices/<path name>]   |
| datasourcetype      | VARCHAR(255)  | The type of published datasource [VirtualRelational   VirtualWsdI   CompositeWebService].   |
| resourcekind        | VARCHAR(20)   | The type of resource that executed [system, user defined].  |
| resourceguid        | VARCHAR(40)   | The guid of the resource path. Eg. cff5fe78-c3c5-4a81-b134-d497cea5351e   |
| resourceid          | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".  |
| resourcetype [k]    | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| resourcenname       | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.   |
| parentname          | VARCHAR(255)  | The parent name of the resource. A.k.a. schema name if from published database.   |
| grandparentname     | VARCHAR(255)  | The grand-parent name of the resource. A.k.a. catalog name if from published database.  |
| resourcepath [k]    | VARCHAR(4000) | The DV path to the resource.  |
| parentpath          | VARCHAR(4000) | The parent path of the resource.  |
| userid              | DECIMAL(19,0) | The DV userid from the system.ALL_USERS tables.   |
| user                | VARCHAR(255)  | The user name who connected for this session.   |
| domain              | VARCHAR(255)  | The domain of the user who connected.   |
| group               | VARCHAR(255)  | The group of the user who connected.  |
| fullname            | VARCHAR(255)  | The full name of the user who connected.  |
| lastname            | VARCHAR(255)  | The last name of the user who connected.  |
| firstname           | VARCHAR(255)  | The first name of the user who connected.   |
| mail                | VARCHAR(255)  | The email of the user who connected.  |
| employeenumber      | VARCHAR(255)  | The employee number of the user who connected.  |
| telephonenumber     | VARCHAR(255)  | The primary telephone number of the user who connected.   |
| friendlycountryname | VARCHAR(255)  | The friendly country name of the user who connected.  |

## vResourceUsagePublished Table

A raw report of published user defined resources accessed over time where the resourcekind='user defined' and resourcetype='LINK'. Derived from the following tables: vResourceUsage → metrics\_resources\_usage\_hist {pm}

| Column Name      | Column Type   | Definition   |
|------------------|---------------|--|
| partition [k]    | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.  |
| requestdate      | DATE          | The date [YYYY-MM-DD] of the request.  |
| starttime [k]    | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867  |
| requestid [k]    | DECIMAL(19,0) | The unique request id that is the primary key of this table.   |
| parentid [fk]    | DECIMAL(19,0) | A foreign key back to the requestid within this table. Contains -1 when no parent reference.   |
| userid           | DECIMAL(19,0) | The DV userid from the system.ALL_USERS tables.  |
| user             | VARCHAR(255)  | The user name who connected for this session.  |
| domain           | VARCHAR(255)  | The domain of the user who connected.  |
| resourceid       | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".   |
| resourcetype [k] | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.  |
| resource name    | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.  |
| resourcepath [k] | VARCHAR(4000) | The DV path to the resource.   |
| parentpath       | VARCHAR(4000) | The parent path of the resource.   |
| dataservice name | VARCHAR(255)  | The published data service name.   |
| category name    | VARCHAR(255)  | The category name of the resource. A normalized name from either the resource name, parent name or grand-parent name.<br>ALL_TABLES: TABLE_NAME or SCHEMA_NAME if not null<br>ALL_COLUMNS: TABLE_NAME or SCHEMA_NAME if not null<br>ALL_PROCEDURES: PROCEDURE_NAME or SCHEMA_NAME if not null<br>ALL_PARAMETERS: PROCEDURE_NAME or SCHEMA_NAME if not null<br>ALL_WSDL_OPERATIONS: If legacy web service then it is the service name otherwise it is the parent folder name of the web service. If no parent folder name then it is the web service dataservice name.<br>e.g. Legacy: /services/webservices/system/admin/ <b>resource</b> /operations/getUsedResources<br>e.g. Non-Legacy: /services/webservices/GrandParent/ <b>Parent</b> /CustomerWS/LookupProduct<br>e.g. Non-Legacy: /services/webservices/ <b>CustomerWS</b> /LookupProduct<br>ALL_RESOURCES: null |
| nodehost [k]     | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]     | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |

## cache Definitions

### vCache Table

Report of the KPImetrics cache\_status table. Displays all records in the table. Derived from METRICS\_SYS\_CACHES {pm}.

| Column Name   | Column Type | Definition  |
|---------------|-------------|---|
| partition [k] | SMALLINT    | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |

|                     |               |  |
|---------------------|---------------|--|
| eventtime           | TIMESTAMP     | The timestamp of when the row was recorded in system.SYS_CACHE.                          |
| resourceid          | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in “resourceorigin”. |
| resourcename        | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.                                |
| resourcetype [k]    | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.                                |
| parentpath          | VARCHAR(4000) | The parent path of the resource.   |
| resourcepath [k]    | VARCHAR(4000) | The DV path to the resource.   |
| ownerid             | DECIMAL(19,0) | The resource owner unique id.  |
| owner               | VARCHAR(60)   | The resource owner name.   |
| status              | VARCHAR(24)   | The status of the SYS_CACHE [NOT LOADED, DISABLED, UP]                                   |
| Variant [k]         | VARCHAR(255)  | The variant provides values for a procedure cache.                                       |
| lastrefreshend      | TIMESTAMP     | The timestamp the cache was last refreshed.  |
| lastsuccessend      | TIMESTAMP     | The timestamp of the last successful refresh.  |
| lastfailend         | TIMESTAMP     | The timestamp of the last refresh failure.   |
| lastaccess          | TIMESTAMP     | The timestamp of the last cache access.  |
| lastsuccessduration | DECIMAL(19,0) | The duration of the last cache refresh.  |
| lastfailduration    | DECIMAL(19,0) | The duration of the last cache refresh failure.  |
| numsuccess          | DECIMAL(19,0) | The number of cache refresh successes.   |
| numfail             | DECIMAL(19,0) | The number of cache refresh failures.  |
| numaccess           | DECIMAL(19,0) | The number of accesses.  |
| storageused         | DECIMAL(19,0) | The amount of storage used in bytes.   |
| message             | CLOB          | The exception message if a request was not successful.                                   |
| initialtime         | TIMESTAMP     | The timestamp of the initial time the cache was refreshed.                               |
| nexttime            | TIMESTAMP     | The timestamp of the next time the cache will be refreshed.                              |
| frequency           | VARCHAR(255)  | The frequency of cache refresh such as [Every day at time].                              |
| currentrefreshstart | TIMESTAMP     | The timestamp of the current refresh start.  |
| currentduration     | DECIMAL(19,0) | The duration of the current refresh.   |
| currentstorage      | DECIMAL(19,0) | The amount of storage in bytes of the current refresh.                                   |
| currentcause        | VARCHAR(20)   | The current cause/exception of the refresh.  |

### vCacheActive Table

Report of the KPImetrics cache\_status table. Displays all “**active**” records in the table no matter if the cache is up or down or has a configuration error. Derived from vCache  
→METRICS\_SYS\_CACHES{pm}.

| Column Name      | Column Type   | Definition  |
|------------------|---------------|---|
| partition [k]    | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| eventtime        | TIMESTAMP     | The timestamp of when the row was recorded in system.SYS_CACHE.   |
| resourceid       | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in “resourceorigin”.  |
| resourcename     | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.   |
| resourcetype [k] | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| parentpath       | VARCHAR(4000) | The parent path of the resource.  |
| resourcepath [k] | VARCHAR(4000) | The DV path to the resource.  |
| ownerid          | DECIMAL(19,0) | The resource owner unique id.   |
| owner            | VARCHAR(255)  | The resource owner name.  |

|                     |               |   |
|---------------------|---------------|---|
| status              | VARCHAR(24)   | The status of the SYS_CACHE [NOT LOADED, DISABLED, UP]      |
| Variant [k]         | VARCHAR(255)  | The variant provides values for a procedure cache.          |
| lastrefreshend      | TIMESTAMP     | The timestamp the cache was last refreshed.                 |
| lastsuccessend      | TIMESTAMP     | The timestamp of the last successful refresh.               |
| lastfailend         | TIMESTAMP     | The timestamp of the last refresh failure.                  |
| lastaccess          | TIMESTAMP     | The timestamp of the last cache access.                     |
| lastsuccessduration | DECIMAL(19,0) | The duration of the last cache refresh.                     |
| lastfailduration    | DECIMAL(19,0) | The duration of the last cache refresh failure.             |
| numsuccess          | DECIMAL(19,0) | The number of cache refresh successes.                      |
| numfail             | DECIMAL(19,0) | The number of cache refresh failures.                       |
| numaccess           | DECIMAL(19,0) | The number of accesses.                                     |
| storageused         | DECIMAL(19,0) | The amount of storage used in bytes.                        |
| message             | CLOB          | The exception message if a request was not successful.      |
| initialtime         | TIMESTAMP     | The timestamp of the initial time the cache was refreshed.  |
| nexttime            | TIMESTAMP     | The timestamp of the next time the cache will be refreshed. |
| frequency           | VARCHAR(255)  | The frequency of cache refresh such as [Every day at time]. |
| currentrefreshstart | TIMESTAMP     | The timestamp of the current refresh start.                 |
| currentduration     | DECIMAL(19,0) | The duration of the current refresh.                        |
| currentstorage      | DECIMAL(19,0) | The amount of storage in bytes of the current refresh.      |
| currentcause        | VARCHAR(20)   | The current cause/exception of the refresh.                 |

### vCacheDisabled Table

Report of the KPImetrics cache\_status table. Displays all “disabled” records in the table. Derived from vCache → METRICS\_SYS\_CACHES{pm}.

| Column Name         | Column Type   | Definition  |
|---------------------|---------------|---|
| partition [k]       | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| eventtime           | TIMESTAMP     | The timestamp of when the row was recorded in system.SYS_CACHE.   |
| resourceid          | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in “resourceorigin”.  |
| resourcename        | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.   |
| resourcetype [k]    | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| parentpath          | VARCHAR(4000) | The parent path of the resource.  |
| resourcepath [k]    | VARCHAR(4000) | The DV path to the resource.  |
| ownerid             | DECIMAL(19,0) | The resource owner unique id.   |
| owner               | VARCHAR(255)  | The resource owner name.  |
| status              | VARCHAR(24)   | The status of the SYS_CACHE [NOT LOADED, DISABLED, UP]  |
| Variant [k]         | VARCHAR(255)  | The variant provides values for a procedure cache.  |
| lastrefreshend      | TIMESTAMP     | The timestamp the cache was last refreshed.   |
| lastsuccessend      | TIMESTAMP     | The timestamp of the last successful refresh.   |
| lastfailend         | TIMESTAMP     | The timestamp of the last refresh failure.  |
| lastaccess          | TIMESTAMP     | The timestamp of the last cache access.   |
| lastsuccessduration | DECIMAL(19,0) | The duration of the last cache refresh.   |
| lastfailduration    | DECIMAL(19,0) | The duration of the last cache refresh failure.   |
| numsuccess          | DECIMAL(19,0) | The number of cache refresh successes.  |

|                     |               |   |
|---------------------|---------------|---|
| numfail             | DECIMAL(19,0) | The number of cache refresh failures.                       |
| numaccess           | DECIMAL(19,0) | The number of accesses.                                     |
| storageused         | DECIMAL(19,0) | The amount of storage used in bytes.                        |
| message             | CLOB          | The exception message if a request was not successful.      |
| initialtime         | TIMESTAMP     | The timestamp of the initial time the cache was refreshed.  |
| nexttime            | TIMESTAMP     | The timestamp of the next time the cache will be refreshed. |
| frequency           | VARCHAR(255)  | The frequency of cache refresh such as [Every day at time]. |
| currentrefreshstart | TIMESTAMP     | The timestamp of the current refresh start.                 |
| currentduration     | DECIMAL(19,0) | The duration of the current refresh.                        |
| currentstorage      | DECIMAL(19,0) | The amount of storage in bytes of the current refresh.      |
| currentcause        | VARCHAR(20)   | The current cause/exception of the refresh.                 |

### vCacheIssues Table

Report of the KPImetrics cache\_status table. Displays all records with “**issues**” in the table that have an error state such as DOWN, CONFIG ERROR and NOT LOADED. Derived from vCache →METRICS\_SYS\_CACHES{pm}.

| Column Name         | Column Type   | Definition  |
|---------------------|---------------|---|
| partition [k]       | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| eventtime           | TIMESTAMP     | The timestamp of when the row was recorded in system.SYS_CACHE.   |
| resourceid          | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in “resourceorigin”.  |
| resourcename        | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.   |
| resourcetype [k]    | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| parentpath          | VARCHAR(4000) | The parent path of the resource.  |
| resourcepath [k]    | VARCHAR(4000) | The DV path to the resource.  |
| ownerid             | DECIMAL(19,0) | The resource owner unique id.   |
| owner               | VARCHAR(255)  | The resource owner name.  |
| status              | VARCHAR(24)   | The status of the SYS_CACHE [NOT LOADED, DISABLED, UP]  |
| Variant [k]         | VARCHAR(255)  | The variant provides values for a procedure cache.  |
| lastrefreshend      | TIMESTAMP     | The timestamp the cache was last refreshed.   |
| lastsuccessend      | TIMESTAMP     | The timestamp of the last successful refresh.   |
| lastfailend         | TIMESTAMP     | The timestamp of the last refresh failure.  |
| lastaccess          | TIMESTAMP     | The timestamp of the last cache access.   |
| lastsuccessduration | DECIMAL(19,0) | The duration of the last cache refresh.   |
| lastfailduration    | DECIMAL(19,0) | The duration of the last cache refresh failure.   |
| numsuccess          | DECIMAL(19,0) | The number of cache refresh successes.  |
| numfail             | DECIMAL(19,0) | The number of cache refresh failures.   |
| numaccess           | DECIMAL(19,0) | The number of accesses.   |
| storageused         | DECIMAL(19,0) | The amount of storage used in bytes.  |
| message             | CLOB          | The exception message if a request was not successful.  |
| initialtime         | TIMESTAMP     | The timestamp of the initial time the cache was refreshed.  |
| nexttime            | TIMESTAMP     | The timestamp of the next time the cache will be refreshed.   |
| frequency           | VARCHAR(255)  | The frequency of cache refresh such as [Every day at time].   |
| currentrefreshstart | TIMESTAMP     | The timestamp of the current refresh start.   |



|                 |               |  |
|-----------------|---------------|--|
| currentduration | DECIMAL(19,0) | The duration of the current refresh.                   |
| currentstorage  | DECIMAL(19,0) | The amount of storage in bytes of the current refresh. |
| currentcause    | VARCHAR(20)   | The current cause/exception of the refresh.            |

### vCacheSchedule Table

Report of the KPImetrics cache\_status table. Displays all active records in the table with a cache schedule and potential cache schedule dependency. It is ordered by their next schedule refresh time and dependencies upon other cached resources. Derived from vCache

→METRICS\_SYS\_CACHES{pm}. Executes getCacheScheduleDependenciesProc() to get dependent cache resources and used cache resources.

| Column Name             | Column Type         | Definition  |
|-------------------------|---------------------|---|
| partition [k]           | SMALLINT            | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| frequency               | VARCHAR(255)        | The frequency of cache refresh such as [Every day at time].   |
| nexttime                | TIMESTAMP           | The timestamp of the next time the cache will be refreshed.   |
| resourcename            | VARCHAR(255)        | The name of the resource. A.k.a. table or procedure name.   |
| resourcepath [k]        | VARCHAR(4000)       | The DV path to the resource.  |
| resourcetype [k]        | VARCHAR(40)         | The DV resource type. If published, then it will be LINK.   |
| resourceid              | DECIMAL(19,0)       | The unique resource id which comes from the DV system tables listed in "resourceorigin".  |
| ownerid                 | DECIMAL(19,0)       | The resource owner unique id.   |
| owner                   | VARCHAR(255)        | The resource owner name.  |
| status                  | VARCHAR(20)         | The status of the SYS_CACHE [NOT LOADED, DISABLED, UP]  |
| Variant [k]             | VARCHAR(255)        | The variant provides values for a procedure cache.  |
| lastrefreshend          | TIMESTAMP           | The timestamp the cache was last refreshed.   |
| lastsuccessend          | TIMESTAMP           | The timestamp of the last successful refresh.   |
| lastfailend             | TIMESTAMP           | The timestamp of the last refresh failure.  |
| lastaccess              | TIMESTAMP           | The timestamp of the last cache access.   |
| lastsuccessduration     | DECIMAL(19,0)       | The duration of the last cache refresh.   |
| lastfailduration        | DECIMAL(19,0)       | The duration of the last cache refresh failure.   |
| numsuccess              | DECIMAL(19,0)       | The number of cache refresh successes.  |
| numfail                 | DECIMAL(19,0)       | The number of cache refresh failures.   |
| numaccess               | DECIMAL(19,0)       | The number of accesses.   |
| storageused             | DECIMAL(19,0)       | The amount of storage used in bytes.  |
| message                 | CLOB                | The exception message if a request was not successful.  |
| initialtime             | TIMESTAMP           | The timestamp of the initial time the cache was refreshed.  |
| currentrefreshstart     | TIMESTAMP           | The timestamp of the current refresh start.   |
| currentduration         | DECIMAL(19,0)       | The duration of the current refresh.  |
| currentstorage          | DECIMAL(19,0)       | The amount of storage in bytes of the current refresh.  |
| currentcause            | VARCHAR(20)         | The current cause/exception of the refresh.   |
| dependentcacheresources | VARCHAR(2147483647) | A list of dependent cache resources or null.  |
| usedcacheresources      | VARCHAR(2147483647) | A list of used cache resources or null.   |



## configurations Definitions

### pMetricsEventRegistrationList Procedure

Provides the ability to list the subscriptions for the metrics event registration programmatically.

| Column Name        | Column Type   | Definition  |
|--------------------|---------------|---|
| debug              | CHAR(1)       | IN – Y=debug on. N=debug off.   |
| requesterEmail     | VARCHAR(255)  | IN – the requestor’s email to use to search for event subscriptions.  |
| subscriberEmail    | VARCHAR(255)  | OUT - Subscriber email. The email alias where alerts will be sent.  |
| groupName          | VARCHAR(255)  | OUT - The CIS group name to monitor.  |
| environment        | VARCHAR(255)  | OUT - The CIS environment nickname to monitor.  |
| eventType          | VARCHAR(255)  | OUT - The KPImetrics event type to monitor.   |
| requesterEmail     | VARCHAR(255)  | OUT - Primary requester contact. The person requesting the subscription.  |
| requesterFirstName | VARCHAR(255)  | OUT - Primary requester contact first name.   |
| requesterLastName  | VARCHAR(255)  | OUT - Primary requester contact last name.  |
| excludeText        | VARCHAR(4000) | OUT - Pipe separated list of text phrases that would appear in the SYS_REQUESTS SQL description field and signify exclusion of this event. If the text is found in the SQL description. |

### pMetricsEventRegistrationSubscribe Procedure

Provides the ability to subscribe to a metrics event registration programmatically.

| Column Name     | Column Type   | Definition   |
|-----------------|---------------|--|
| debug           | CHAR(1)       | IN - Y=debug on, N=debug off   |
| requesterEmail  | VARCHAR(255)  | IN - Primary requester contact. The person requesting the subscription.  |
| subscriberEmail | VARCHAR(255)  | IN - Subscriber email. The email alias where alerts will be sent.  |
| groupName       | VARCHAR(255)  | IN - The CIS group name to monitor.  |
| environment     | VARCHAR(255)  | IN - The CIS environment nickname to monitor.  |
| eventType       | VARCHAR(255)  | IN - The KPImetrics event type to monitor.   |
| excludeText     | VARCHAR(4000) | IN - Pipe separated list of text phrases that would appear in the SYS_REQUESTS SQL description field and signify exclusion of this event. If the text is found in the SQL description. |

### pMetricsEventRegistrationUnsubscribe Procedure

Provides the ability to unsubscribe to a metrics event registration programmatically.

| Column Name     | Column Type  | Definition  |
|-----------------|--------------|---|
| debug           | CHAR(1)      | IN - Y=debug on, N=debug off  |
| requesterEmail  | VARCHAR(255) | IN - Primary requester contact. The person requesting the subscription. |
| subscriberEmail | VARCHAR(255) | IN - Subscriber email. The email alias where alerts will be sent.       |
| groupName       | VARCHAR(255) | IN - The CIS group name to monitor.                                     |
| environment     | VARCHAR(255) | IN - The CIS environment nickname to monitor.                           |
| eventType       | VARCHAR(255) | IN - The KPImetrics event type to monitor.                              |

## metadata Definitions

### metadata\_tables\_row\_distribution Table

Provides a metadata table row distribution for each table and partition.

| Column Name         | Column Type  | Definition  |
|---------------------|--------------|---|
| table_name          | BIGINT       | The name of the table   |
| partition_name      | VARCHAR(255) | The name of the partition. Also known as the partition window.  |
| boundary_definition | VARCHAR(255) | The date of the boundary high value.  |
| range_type          | TIMESTAMP    | The range associated with the boundary: LEFT or RIGHT. If LEFT then rows are contained to the LEFT of the boundary definition.  |
| partition_number    | INTEGER      | The partition number is associated with an interval integer representing the day of the year and is a value between 1 and 366. 366 days in a year accounts for leap year. |
| num_rows            | INTEGER      | The number of rows in the partition.  |

### reportMetadataAllCount Table

Report on how many rows exist in each table. Count various types including the following:

- project – Count the rows in each table for each project found in METADATA\_CONST\_NAME and nodehost and nodeport
  - GROUP BY loaddate, projectnameid, projectname, nodehost, nodeport
- subtotal – Count the subtotal of rows for each nodehost and nodeport.
  - GROUP BY loaddate, nodehost, nodeport
- total – Count the total rows in each table.

When this view is invoked externally, the invoking report should sort by the following:

ORDER BY viewname, loaddate DESC, counttype, nodehost, nodeport, projectnameid

| Column Name   | Column Type   | Definition   |
|---------------|---------------|--|
| cnt           | BIGINT        | The record count for the counttype.  |
| counttype     | VARCHAR(8)    | The type of count including [project, subtotal, total]<br><u>project</u> - Count the rows in each table for each project found in METADATA_CONST_NAME and nodehost and nodeport.<br>GROUP BY loaddate, projectnameid, projectname, nodehost, nodeport<br><u>subtotal</u> - Count the subtotal of rows for each nodehost and nodeport.<br>GROUP BY loaddate, nodehost, nodeport<br><u>total</u> - Count the total rows in each table. |
| viewname      | VARCHAR(24)   | The name of the view metadata view where the count was taken.  |
| loaddate      | TIMESTAMP     | The timestamp date the when the table was loaded.  |
| projectnameid | DECIMAL(19,0) | The project name id is a foreign key to the vMetadataConstName table.  |
| projectname   | VARCHAR(50)   | A unique project name.   |
| nodehost      | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport      | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |

## reportMetadataDatasource Table

Report on what datasource a view is using. Lineage from the view to the datasource. This can be joined with vMetadataDatasource to get additional datasource information. It may also be joined with vMetadataResource to get additional resource information.

| Column Name          | Column Type   | Definition  |
|----------------------|---------------|---|
| partition [k]        | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| loaddate [k]         | TIMESTAMP     | The timestamp date the when the table was loaded.   |
| projectnameid [fk]   | DECIMAL(19,0) | The project name id is a foreign key to the vMetadataConstName table.   |
| projectname [k]      | VARCHAR(50)   | A unique project name.  |
| environmentname      | VARCHAR(255)  | The environment name from commonValues.cisServerNickname.   |
| layertype            | VARCHAR(50)   | A custom tag specifying the name of the layer. [Published_DS, Application_views, Business_Logical, Physical_Formatting, Physical_Metadata, etc.]                                  |
| resourceid           | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".  |
| resourcetype [k]     | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| resourcepath [k]     | VARCHAR(4000) | The DV path to the resource.  |
| dataserviceName      | VARCHAR(255)  | The published data service name.  |
| catalogname          | VARCHAR(255)  | The name of the published catalog or null if not applicable.  |
| schemaname           | VARCHAR(255)  | The name of the published schema or null if not applicable.   |
| datasourceid         | DECIMAL(19,0) | The unique datasource id which comes from system.ALL_RESOURCES.   |
| datasourceadapertype | VARCHAR(50)   | The adapter type of the datasource such as Oracle, PostgreSQL, SqlServer, Composite, Rest, Wsdl, File, Netezza, MsExcel(POI), Ldap, MySql, XmlFile, Jdbc, DB2, etc.               |
| datasourcepath       | VARCHAR(255)  | The DV path to the published datasource/dataservice [/services/databases/<name>, /services/webservices/<path>name>]   |
| annotation           | CLOB          | The datasource annotation.  |

## reportMetadataNonCompliantColumns Table

Report of the non-compliant columns as configured by METADATA\_CONST\_VALIDATE.

| Column Name        | Column Type   | Definition  |
|--------------------|---------------|---|
| partition [k]      | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| loaddate [k]       | TIMESTAMP     | The timestamp date the when the table was loaded.   |
| projectnameid [fk] | DECIMAL(19,0) | The project name id is a foreign key to the vMetadataConstName table.   |
| projectname [k]    | VARCHAR(50)   | A unique project name.  |
| environmentname    | VARCHAR(255)  | The environment name from commonValues.cisServerNickname.   |
| layertype          | VARCHAR(50)   | A custom tag specifying the name of the layer. [Published_DS, Application_views, Business_Logical, Physical_Formatting, Physical_Metadata, etc.]                                  |
| resourceid         | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".  |
| resourcename       | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.   |
| resourcetype [k]   | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| resourcepath [k]   | VARCHAR(4000) | The DV path to the resource.  |
| noncompliantreason | VARCHAR(50)   | The non-compliant reason such as [MISSING_COLUMN]   |
| noncompliantdesc   | VARCHAR(4000) | The non-compliant description such as the column name when MISSING_COLUMN.  |

|                         |              |   |
|-------------------------|--------------|---|
| lastmodifieddate        | TIMESTAMP    | The last modified date (timestamp).   |
| lastmodifiedusername    | VARCHAR(50)  | The last modified user name.  |
| lastmodifieduserdomain  | VARCHAR(50)  | The last modified user domain.  |
| lastmodifieduserid [fk] | INTEGER      | The last modified user id which is a foreign key to system.ALL_USERS.         |
| nodehost [k]            | VARCHAR(255) | The host name which comes from GetProperty('SERVER_HOSTNAME').                |
| nodeport [k]            | INTEGER      | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1. |

### reportMetadataNonCompliantLayers Table

Report of the non-compliant columns as configured by METADATA\_CONST\_VALIDATE.

| Column Name         | Column Type   | Definition  |
|---------------------|---------------|---|
| partition [k]       | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.   |
| loaddate [k]        | TIMESTAMP     | The timestamp date the when the table was loaded.   |
| projectnameid [fk]  | DECIMAL(19,0) | The project name id is a foreign key to the vMetadataConstName table.   |
| projectname [k]     | VARCHAR(50)   | A unique project name.  |
| environmentname     | VARCHAR(255)  | The environment name from commonValues.cisServerNickname.   |
| layertype           | VARCHAR(50)   | A custom tag specifying the name of the layer. [Published_DS, Application_views, Business_Logical, Physical_Formatting, Physical_Metadata, etc.]  |
| resourceid          | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".  |
| lineageorder        | INTEGER       | The order from top to bottom in the layer hierarchy with respect to how the views traverse through the lineage.   |
| resourcename        | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.   |
| resourcetype [k]    | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| resourcepath [k]    | VARCHAR(4000) | The DV path to the resource.  |
| noncompliantreason  | VARCHAR(50)   | The non-compliant reason such as [NON_COMPLIANT_PATH].  |
| noncompliantdesc    | VARCHAR(4000) | The non-compliant description such as the resource path if NON_COMPLIANT_PATH FROM_LAYER_TYPE[Business_Business] DOES NOT INVOKE TO_LAYER_TYPE[Business_Business,Business_Logical] ACTUAL TO_LAYER_TYPE=[Physical_Formatting] TO_RESOURCE_ID=[971661] TO_RESOURCE_TYPE:PATH=[TABLE:/shared/labCommon/Physical/Formatting/ds_orders/tutorial/orderdetails] |
| fromlayertype       | VARCHAR(50)   | A custom tag specifying the name of the "from" layer. [Published_DS, Application_views, Business_Logical, Physical_Formatting, Physical_Metadata, etc.]   |
| fromresourceid      | DECIMAL(19,0) | The unique "from" resource id which comes from the DV system tables listed in "resourceorigin".   |
| fromresourcepath    | VARCHAR(4000) | The "from" resource path.   |
| fromresourcetype    | VARCHAR(40)   | The "from" resource type.   |
| fromresourcesubtype | VARCHAR(40)   | The DV resource subtype. The further qualifies the precise type of resource. E.g. NONE, SQL_TABLE (view), DATABASE_TABLE (datasource table), SQL_SCRIPT_PROCEDURE (DV procedure), OPERATION_PROCEDURE (web service procedure), plus many more.  |
| tolayertype         | VARCHAR(50)   | A custom tag specifying the name of the "to" layer. [Published_DS, Application_views, Business_Logical, Physical_Formatting, Physical_Metadata, etc.]   |
| toresourceid        | DECIMAL(19,0) | The unique "to" resource id which comes from the DV system tables listed in "resourceorigin".   |
| toresourcepath      | VARCHAR(4000) | The "to" resource path.   |

|                        |              |  |
|------------------------|--------------|--|
| toresourcetype         | VARCHAR(40)  | The “to” resource type.  |
| toresourcesubtype      | VARCHAR(40)  | The DV resource subtype. The further qualifies the precise type of resource. E.g. NONE, SQL_TABLE (view), DATABASE_TABLE (datasource table), SQL_SCRIPT_PROCEDURE (DV procedure), OPERATION_PROCEDURE (web service procedure), plus many more. |
| lastmodifieddate       | TIMESTAMP    | The last modified date (timestamp).  |
| lastmodifiedusername   | VARCHAR(50)  | The last modified user name.   |
| lastmodifieduserdomain | VARCHAR(50)  | The last modified user domain.   |
| lastmodifieduserid     | INTEGER      | The last modified user id which is a foreign key to system.ALL_USERS.  |
| nodehost [k]           | VARCHAR(255) | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]           | INTEGER      | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |

### reportMetadataPrivilegeUsers Table

Provides a listing of all group and user privileges for each resource for a given project path.

| Column Name         | Column Type   | Definition  |
|---------------------|---------------|---|
| partition [k]       | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| loaddate [k]        | TIMESTAMP     | The timestamp date the when the table was loaded.   |
| projectnameid [fk]  | DECIMAL(19,0) | The project name id is a foreign key to the vMetadataConstName table.   |
| layertype           | VARCHAR(50)   | A custom tag specifying the name of the layer. [Published_DS, Application_views, Business_Logical, Physical_Formatting, Physical_Metadata, etc.]                                  |
| resourceid          | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in “resourceorigin”.  |
| resourcepath [k]    | VARCHAR(4000) | The DV path to the resource.  |
| resourcetype [k]    | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| nametype            | VARCHAR(5)    | The name type specified whether name is a USER or GROUP.  |
| nameid              | DECIMAL(19,0) | The id of the name or group.  |
| name                | VARCHAR(50)   | The name of the user or group for the privilege.  |
| domainname          | VARCHAR(50)   | The domain name specifies which domain the name belongs to.   |
| actualprivileges    | VARCHAR(60)   | The actual privileges<br>[READ WRITE EXECUTE SELECT UPDATE INSERT DELETE GRANT]   |
| combinedprivileges  | VARCHAR(60)   | The combined privileges<br>[READ WRITE EXECUTE SELECT UPDATE INSERT DELETE GRANT]   |
| inheritedprivileges | VARCHAR(60)   | The inherited privileges<br>[READ WRITE EXECUTE SELECT UPDATE INSERT DELETE GRANT]  |
| userpk              | DECIMAL(19,0) | The unique sequence id  |
| userid              | DECIMAL(19,0) | The user id from system.ALL_USERS   |
| username            | VARCHAR(255)  | The name of the user.   |
| userdomain          | VARCHAR(255)  | The domain of the user.   |
| explicitrights      | VARCHAR(255)  | The studio rights that the user has.  |
| effectiverights     | VARCHAR(255)  | The effective rights are merged from effective and inherited.   |
| inheritedrights     | VARCHAR(255)  | The inherited rights that the user has based on membership in groups.   |
| annotation          | VARCHAR(1024) | The users annotation.   |
| islocked            | VARCHAR(10)   | Indicates whether the user is locked or not,  |
| nodehost [k]        | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]        | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |

### reportNumResourcesByLayer Table

Report of the number of resources in each layer.

| Column Name        | Column Type   | Definition   |
|--------------------|---------------|--|
| loaddate [k]       | TIMESTAMP     | The timestamp date the when the table was loaded.  |
| projectnameid [fk] | DECIMAL(19,0) | The project name id is a foreign key to the vMetadataConstName table.  |
| projectname [k]    | VARCHAR(50)   | A unique project name.   |
| environmentname    | VARCHAR(255)  | The environment name from commonValues.cisServerNickname.  |
| layertype          | VARCHAR(50)   | A custom tag specifying the name of the layer. [Published_DS, Application_views, Business_Logical, Physical_Formatting, Physical_Metadata, etc.] |
| catalogname        | VARCHAR(255)  | The name of the published catalog or null if not applicable.   |
| schemaname         | VARCHAR(255)  | The name of the published schema or null if not applicable.  |
| resourcetype [k]   | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.  |
| resourceCount      | BIGINT        | The number of resources at the specified layer.  |

### reportResourceColumns Table

Report of all the resources and their columns.

| Column Name        | Column Type   | Definition   |
|--------------------|---------------|--|
| partition [k]      | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.  |
| loaddate [k]       | TIMESTAMP     | The timestamp date the when the table was loaded.  |
| projectnameid [fk] | DECIMAL(19,0) | The project name id is a foreign key to the vMetadataConstName table.  |
| projectname [k]    | VARCHAR(50)   | A unique project name.   |
| environmentname    | VARCHAR(255)  | The environment name from commonValues.cisServerNickname.  |
| layertype          | VARCHAR(50)   | A custom tag specifying the name of the layer. [Published_DS, Application_views, Business_Logical, Physical_Formatting, Physical_Metadata, etc.]   |
| resourceid         | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".   |
| resourcenname      | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.  |
| resourcepath [k]   | VARCHAR(4000) | The DV path to the resource.   |
| resourcetype [k]   | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.  |
| resourcesubtype    | VARCHAR(40)   | The DV resource subtype. The further qualifies the precise type of resource. E.g. NONE, SQL_TABLE (view), DATABASE_TABLE (datasource table), SQL_SCRIPT_PROCEDURE (DV procedure), OPERATION_PROCEDURE (web service procedure), plus many more. |
| dataservicename    | VARCHAR(255)  | The published data service name.   |
| catalogname        | VARCHAR(255)  | The name of the published catalog or null if not applicable.   |
| schemaname         | VARCHAR(255)  | The name of the published schema or null if not applicable.  |
| columnname         | VARCHAR(255)  | The projected column name from the SQL statement. If * used, then same as actual column name   |
| columntype         | VARCHAR(40)   | The type of column.  |
| columnndirection   | VARCHAR(10)   | The direction of the column. For TABLE types it is always OUT. For PROCEDURE types it may be IN, OUT, INOUT, RESULT, RETURN.   |
| columnpos          | INTEGER       | The ordinal position of the column within the resource.  |
| annotation         | CLOB          | The column annotation.   |
| nodehost [k]       | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |

|              |         |   |
|--------------|---------|---|
| nodeport [k] | INTEGER | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1. |
|--------------|---------|---|

### reportResourceDatasourceLineage Table

Report of resources and their datasource lineage associations. A resource may have 0 or many data sources associated with it.

| Column Name            | Column Type   | Definition   |
|------------------------|---------------|--|
| partition [k]          | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.  |
| loaddate [k]           | TIMESTAMP     | The timestamp date the when the table was loaded.  |
| projectnameid [fk]     | DECIMAL(19,0) | The project name id is a foreign key to the vMetadataConstName table.  |
| layertype              | VARCHAR(50)   | A custom tag specifying the name of the layer. [Published_DS, Application_views, Business_Logical, Physical_Formatting, Physical_Metadata, etc.]   |
| resourceid             | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".   |
| resourcepath [k]       | VARCHAR(4000) | The DV path to the resource.   |
| resourcetype [k]       | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.  |
| resourcesubtype        | VARCHAR(40)   | The DV resource subtype. The further qualifies the precise type of resource. E.g. NONE, SQL_TABLE (view), DATABASE_TABLE (datasource table), SQL_SCRIPT_PROCEDURE (DV procedure), OPERATION_PROCEDURE (web service procedure), plus many more. |
| resourcelinktype       | VARCHAR(40)   | The type of resource the published "LINK" is pointing to such as [TABLE, PROCEDURE].   |
| dataservicename        | VARCHAR(255)  | The published data service name.   |
| catalogname            | VARCHAR(255)  | The name of the published catalog or null if not applicable.   |
| schemaname             | VARCHAR(255)  | The name of the published schema or null if not applicable.  |
| resourcenname          | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.  |
| datasourceid           | DECIMAL(19,0) | The unique datasource id which comes from system.ALL_RESOURCES.  |
| datasourcepath         | VARCHAR(255)  | The DV path to the published datasource/dataservice [/services/databases/<name>, /services/webservices/<path>name>]  |
| datasourcetype         | VARCHAR(255)  | The type of published datasource [VirtualRelational   VirtualWsdI   CompositeWebService].  |
| datasourcesubtype      | VARCHAR(40)   | The datasource subtype which further qualifies what type of datasource it is. E.g. RELATIONAL_DATA_SOURCE, XML_FILE_DATA_SOURCE.   |
| datasourceadaptertype  | VARCHAR(50)   | The adapter type of the datasource such as Oracle, PostgreSQL, SqlServer, Composite, Rest, WsdI, File, Netezza, MsExcel(POI), Ldap, MySQL, XmlFile, Jdbc, DB2, etc.  |
| datasourcehostname     | VARCHAR(255)  | The connection host name or ip address.  |
| datasourceport         | INTEGER       | The connection port.   |
| datasourcedatabasename | VARCHAR(100)  | The connection database name.  |
| datasourcelogin        | VARCHAR(255)  | The connection login name.   |
| datasourceurl          | VARCHAR(500)  | The connection URL. URL if relational.   |
| datasourcepatternstr   | VARCHAR(500)  | The connection URL pattern string.   |
| datasourceroot         | VARCHAR(500)  | The connection root. Root if file.   |
| nodehost [k]           | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]           | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |

### vMetadataAllPrivileges Table

This view provides the latest cache of the DV system ALL\_PRIVILEGES. This view provides a performance enhancement to Cache\_METADATA\_TABLES which needs to access this



information more than once during its processing. It is only refreshed when Cache\_METADATA\_TABLES is executed via the trigger or manually.

| Column Name      | Column Type   | Definition  |
|------------------|---------------|---|
| loaddate         | TIMESTAMP     | The timestamp of when the record was inserted or loaded.  |
| resourceid       | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in “resourceorigin”.  |
| resourceName     | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.   |
| resourcepath [k] | VARCHAR(4000) | The DV path to the resource.  |
| resourcetype [k] | VARCHAR(40)   | The DV resource type. If published, then it will be LINK. Also maybe TABLE or PRODEDURE.  |
| nametype         | VARCHAR(5)    | The name type is either USER or GROUP and defines the type of privilege.  |
| nameid           | DECIMAL(19,0) | The name id which can be a user or group id.  |
| name             | VARCHAR(255)  | The name is either a user or group name.  |
| ownerdomain      | VARCHAR(255)  | The domain of the user or group name.   |
| privilege        | INTEGER       | A bitmask representation of the privilege. NONE=0, READ=1, WRITE=2, EXECUTE=4, SELECT=8, UPDATE=16, INSERT=32, DELETE=64 and GRANT=128. The value can be 0-255 which represents all combinations of privileges. |
| actualprivilege  | VARCHAR(255)  | The actual privilege from the privilege bitmask represented in format of [READ WRITE EXECUTE SELECT UPDATE INSERT DELETE GRANT]   |
| nodehost [k]     | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]     | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |

### vMetadataAllResources Table

This view provides the latest cache of the DV system ALL\_RESOURCES, ALL\_COLUMNS, ALL\_PROCEDURES, ALL\_WSDL\_OPERATIONS, ALL\_PARAMETERS and joined with ALL\_USERS. This view provides a performance enhancement to Cache\_METADATA\_TABLES which needs to access this information more than once during its processing. It is only refreshed when Cache\_METADATA\_TABLES is executed via the trigger or manually.

| Column Name      | Column Type   | Definition   |
|------------------|---------------|--|
| loaddate         | TIMESTAMP     | The timestamp of when the record was inserted or loaded.   |
| resourceorigin   | VARCHAR(30)   | The original DV system table in which the resource originated from.<br>[ALL_TABLES  ALL_PROCEDURES ALL_WSDL_OPERATIONS ALL_RESOURCES  ALL_COLUMNS ALL_PARAMETERS]  |
| resourceid       | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in “resourceorigin”.   |
| resourceName     | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.  |
| parentpath       | VARCHAR(4000) | The parent path of the resource.   |
| resourcepath [k] | VARCHAR(4000) | The DV path to the resource.   |
| resourcetype [k] | VARCHAR(40)   | The DV resource type. If published, then it will be LINK. Also maybe TABLE or PRODEDURE.   |
| resourcesubtype  | VARCHAR(40)   | The DV resource subtype. The further qualifies the precise type of resource. E.g. NONE, SQL_TABLE (view), DATABASE_TABLE (datasource table), SQL_SCRIPT_PROCEDURE (DV procedure), OPERATION_PROCEDURE (web service procedure), plus many more. |
| resourceLinktype | VARCHAR(40)   | The type of resource the published “LINK” is pointing to such as [TABLE, PROCEDURE].   |
| ownerid          | DECIMAL(19,0) | The resource owner unique id.  |
| ownername        | VARCHAR(60)   | The resource owner name.   |



|                  |               |  |
|------------------|---------------|--|
| ownerdomain      | VARCHAR(255)  | The domain of the ownername  |
| guid             | VARCHAR(1024) | The guid of the resource path. Eg. cff5fe78-c3c5-4a81-b134-d497cea5351e  |
| datasourcetype   | VARCHAR(255)  | The type of published datasource [VirtualRelational   VirtualWsdI   CompositeWebService].  |
| dataservicename  | VARCHAR(255)  | The published data service name.   |
| catalogname      | VARCHAR(255)  | The name of the published catalog or null if not applicable.   |
| schemaname       | VARCHAR(255)  | The name of the published schema or null if not applicable.  |
| categoryname     | VARCHAR(255)  | The category name of the resource. A normalized name from either the resource name, parent name or grand-parent name.<br><br>ALL_TABLES: TABLE_NAME or SCHEMA_NAME if not null<br>ALL_COLUMNS: TABLE_NAME or SCHEMA_NAME if not null<br>ALL_PROCEDURES: PROCEDURE_NAME or SCHEMA_NAME if not null<br>ALL_PARAMETERS: PROCEDURE_NAME or SCHEMA_NAME if not null<br>ALL_WSDL_OPERATIONS: If legacy web service then it is the service name otherwise it is the parent folder name of the web service. If no parent folder name then it is the web service dataservice name.<br><br>e.g. Legacy: /services/webservices/system/admin/ <b>resource</b> /operations/getUsedResources<br>e.g. Non-Legacy: /services/webservices/GrandParent/ <b>Parent</b> /CustomerWS/LookupProduct<br>e.g. Non-Legacy: /services/webservices/ <b>CustomerWS</b> /LookupProduct<br>ALL_RESOURCES: null |
| columnid         | DECIMAL(19,0) | The DV column unique resource id.  |
| columnname       | VARCHAR(255)  | The name of the column.  |
| columntype       | VARCHAR(255)  | The column type base such as varchar, numeric, decimal.  |
| columnsize       | DECIMAL(19,0) | The column type size such as 255 if varchar(255) or 19 if decimal(19,2).   |
| columnscale      | DECIMAL(19,0) | The column type scale such as 2 if decimal(19,2).  |
| columnorder      | DECIMAL(9,0)  | The order in which the column appears in the resource.   |
| columnndirection | DECIMAL(9,0)  | The column direction such [4=OUT [table or scalar procedure, 1=IN, 3=CURSOR OUT]   |
| annotation       | CLOB          | The resource annotation.   |
| nodehost [k]     | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]     | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |

### vMetadataAllUsersGroups Table

This view provides the latest cache of the DV system ALL\_DOMAINS joined with ALL\_USERS to provide a representation of user, groups and domains. This view is joined with vMetadataPrivilegeUser to associate a privilege with a user., This view provides a performance enhancement to Cache\_METADATA\_TABLES which needs to access this information more than once during its processing. It is only refreshed when Cache\_METADATA\_TABLES is executed via the trigger or manually.

| Column Name   | Column Type   | Definition  |
|---------------|---------------|---|
| partition [k] | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| loaddate      | TIMESTAMP     | The timestamp of when the record was inserted or loaded.  |
| userpk        | DECIMAL(19,0) | The unique sequence id  |
| userid        | DECIMAL(19,0) | The user id from system.ALL_USERS   |
| username      | VARCHAR(255)  | The name of the user.   |
| userdomain    | VARCHAR(255)  | The domain of the user.   |

|                 |               |   |
|-----------------|---------------|---|
| explicitrights  | VARCHAR(255)  | The studio rights that the user has.  |
| effectiverights | VARCHAR(255)  | The effective rights are merged from effective and inherited.                 |
| inheritedrights | VARCHAR(255)  | The inherited rights that the user has based on membership in groups.         |
| annotation      | VARCHAR(1024) | The users annotation.   |
| islocked        | VARCHAR(10)   | Indicates whether the user is locked or not,                                  |
| groupid         | DECIMAL(19,0) | The group id of the group that the user belongs to.                           |
| groupname       | VARCHAR(255)  | The name of the group that the user belongs to.                               |
| groupdomain     | VARCHAR(255)  | The domain of the group tha the user belongs to.                              |
| nodehost [k]    | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').                |
| nodeport [k]    | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1. |

### vMetadataConstLayers Table

Provides a listing of all of the metadata layer types for each project path.

| Column Name        | Column Type   | Definition   |
|--------------------|---------------|--|
| partition [k]      | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.  |
| loaddate [k]       | TIMESTAMP     | The timestamp date the when the table was loaded.  |
| projectnameid [fk] | DECIMAL(19,0) | The project name id is a foreign key to the vMetadataConstName table.  |
| projectname [k]    | VARCHAR(50)   | A unique project name.   |
| projectpath        | VARCHAR(4000) | The DV resource path for the project name.   |
| layertype          | VARCHAR(50)   | A custom tag specifying the name of the layer. [Published_DS, Application_views, Business_Logical, Physical_Formatting, Physical_Metadata, etc.]   |
| parentpath         | VARCHAR(4000) | The parent path of the resource.   |
| generatelineage    | CHAR(1)       | Y=Generate lineage for this layer path. N=Do not generate lineage for this layer path.   |
| exclusionlist      | CLOB          | A comma-separated list of paths or partial paths ending in a / that are to be excluded from the lineage generation. If a comma exists within a path then escape the comma with "_002C". e.g. /shared/my.path1/path2/ --> /shared/my_002Cpath1/path2/   |
| assignprivileges   | VARCHAR(25)   | ASSIGN_PRIVILEGES: Provides the rules for assigning privileges on a per layer basis. <ul style="list-style-type: none"> <li>• NO_PRIVILEGES - Do not assign any privileges for this layer</li> <li>• ACTUAL_NO_USERS - Assign actual privileges but do not invoke the getResourcePrivileges() api to get COMBINED or INHERITED. Do not retrieve users associated with groups.</li> <li>• ACTUAL_WITH_USERS - [DEFAULT] Assign actual privileges but do not invoke the getResourcePrivileges() api to get COMBINED or INHERITED. Retrieve all users associated with a GROUP privilege.</li> <li>• COMBINED_NO_USERS - Invoke the getResourcePrivileges() api to get COMBINED and INHERITED privileges. Do not retrieve users associated with groups. Invoking the api will slow down the processing considerably.</li> <li>• COMBINED_WITH_USERS - Invoke the getResourcePrivileges() api to get COMBINED and INHERITED privileges. Retrieve all users associated with a GROUP privilege. Invoking the api will slow down the processing considerably.</li> </ul> |
| nodehost [k]       | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]       | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |

### vMetadataConstName Table

Provides a listing of all configured metadata constant name projects. This is the main driver table. It contains the project name, project name id, environment name, execute flag and archive flag.

| Column Name       | Column Type   | Definition  |
|-------------------|---------------|---|
| partition [k]     | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| loaddate [k]      | TIMESTAMP     | The timestamp date the when the table was loaded.   |
| projectnameid [k] | DECIMAL(19,0) | A unique project name id.   |
| projectname [k]   | VARCHAR(50)   | A unique project name.  |
| environmentname   | VARCHAR(255)  | The environment name from commonValues.cisServerNickname.   |
| executeflag       | CHAR(1)       | The execute flag indicates if this project gets executed. Y=execute this row. N=do not execute when triggered.  |
| projectdesc       | VARCHAR(255)  | A description of the project path.  |
| executestatus     | VARCHAR(4000) | The execution status. [IN_PROGRESS, SUCCESS, exception message].  |
| nodehost [k]      | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]      | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |

### vMetadataConstPaths Table

Provides a listing of all configured metadata constant name projects. This table controls the paths that are connected with the vMetadataConstName view.

| Column Name        | Column Type   | Definition  |
|--------------------|---------------|---|
| partition [k]      | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| loaddate [k]       | TIMESTAMP     | The timestamp date the when the table was loaded.   |
| projectnameid [fk] | DECIMAL(19,0) | The project name id is a foreign key to the vMetadataConstName table.   |
| projectname [k]    | VARCHAR(50)   | A unique project name.  |
| projectpath        | VARCHAR(4000) | The DV resource path for the project name.  |
| resourcetype [k]   | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| nodehost [k]       | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]       | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |

### vMetadataConstValidate Table

Provides a listing of all of the metadata layer validations for each project path.

| Column Name        | Column Type   | Definition  |
|--------------------|---------------|---|
| partition [k]      | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| loaddate [k]       | TIMESTAMP     | The timestamp date the when the table was loaded.   |
| projectnameid [fk] | DECIMAL(19,0) | The project name id is a foreign key to the vMetadataConstName table.   |
| projectname [k]    | VARCHAR(50)   | A unique project name.  |
| projectpath        | VARCHAR(4000) | The DV resource path for the project name.  |
| layertype          | VARCHAR(50)   | A custom tag specifying the name of the layer. [Published_DS, Application_views, Business_Logical, Physical_Formatting, Physical_Metadata, etc.]                                  |
| ruletype           | VARCHAR(50)   | Valid values=[ENFORCE_LAYER ENFORCE_COLUMN]   |
| ruledesc           | VARCHAR(4000) | Enforce the rule type.<br>When RULE_TYPE=ENFORCE_COLUMN   |

|              |              |  |
|--------------|--------------|--|
|              |              | <ul style="list-style-type: none"> <li>Enforces which columns must be present in all of the views for a given layer type. Comma-separated list of case-sensitive column names.</li> </ul> <p>When RULE_TYPE=ENFORCE_LAYER</p> <ul style="list-style-type: none"> <li>Enforces which source layer resource can invoke which target layer resource. Comma-separated list of valid LAYER_TYPES.</li> <li>If a resource can invoke another resource in the same layer then add its own layer to the list.</li> </ul> |
| nodehost [k] | VARCHAR(255) | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k] | INTEGER      | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |

### vMetadataDatasource Table

Provides a complete reference on the datasources that exist within the project paths referenced by vMetadataConstName.

| Column Name            | Column Type   | Definition  |
|------------------------|---------------|---|
| partition [k]          | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| loaddate [k]           | TIMESTAMP     | The timestamp date the when the table was loaded.   |
| projectnameid [fk]     | DECIMAL(19,0) | The project name id is a foreign key to the vMetadataConstName table.   |
| datasourceid           | DECIMAL(19,0) | The unique datasource id which comes from system.ALL_RESOURCES.   |
| datasourcepath         | VARCHAR(255)  | The DV path to the published datasource/dataservice [/services/databases/<name>, /services/webservices/<path name>]   |
| datasourcetype         | VARCHAR(255)  | The type of published datasource [VirtualRelational   VirtualWsd   CompositeWebService].  |
| datasourcesubtype      | VARCHAR(40)   | The datasource subtype which further qualifies what type of datasource it is. E.g. RELATIONAL_DATA_SOURCE, XML_FILE_DATA_SOURCE.  |
| datasourceadaptertype  | VARCHAR(50)   | The adapter type of the datasource such as Oracle, PostgreSQL, SqlServer, Composite, Rest, Wsd, File, Netezza, MsExcel(POI), Ldap, MySql, XmlFile, Jdbc, DB2, etc.                |
| datasourcehostname     | VARCHAR(255)  | The connection host name or ip address.   |
| datasourceport         | INTEGER       | The connection port.  |
| datasourcedatabasename | VARCHAR(100)  | The connection database name.   |
| datasourcelogin        | VARCHAR(255)  | The connection login name.  |
| datasourceurl          | VARCHAR(500)  | The connection URL. URL if relational.  |
| datasourcepatternstr   | VARCHAR(500)  | The connection URL pattern string.  |
| datasourceroot         | VARCHAR(500)  | The connection root. Root if file.  |
| ownername              | VARCHAR(50)   | The resource owner name.  |
| ownerdomain            | VARCHAR(50)   | The resource owner domain.  |
| ownerid                | INTEGER       | The resource owner unique id.   |
| creationdate           | TIMESTAMP     | The resource creation date (timestamp).   |
| creatorusername        | VARCHAR(50)   | The resource creation user name.  |
| creatoruserdomain      | VARCHAR(50)   | The resource creation user domain.  |
| creatoruserid          | INTEGER       | The resource creation user id which is a foreign key to system.ALL_USERS.   |
| lastmodifieddate       | TIMESTAMP     | The last modified date (timestamp).   |
| lastmodifiedusername   | VARCHAR(50)   | The last modified user name.  |
| lastmodifieduserdomain | VARCHAR(50)   | The last modified user domain.  |
| lastmodifieduserid     | INTEGER       | The last modified user id which is a foreign key to system.ALL_USERS.   |
| annotation             | CLOB          | The datasource annotation.  |

|              |              |   |
|--------------|--------------|---|
| nodehost [k] | VARCHAR(255) | The host name which comes from GetProperty('SERVER_HOSTNAME').                |
| nodeport [k] | INTEGER      | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1. |

### vMetadataNonCompliant Table

Provides information on all non-compliant resources for all layers.

| Column Name        | Column Type   | Definition   |
|--------------------|---------------|--|
| partition [k]      | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.  |
| loaddate [k]       | TIMESTAMP     | The timestamp date the when the table was loaded.  |
| projectnameid [fk] | DECIMAL(19,0) | The project name id is a foreign key to the vMetadataConstName table.  |
| resourceid         | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".   |
| lineageorder       | INTEGER       | The order from top to bottom in the layer hierarchy with respect to how the views traverse through the lineage.  |
| noncompliantreason | VARCHAR(50)   | The non-compliant reason such as [MISSING_COLUMN, NON_COMPLIANT_PATH].   |
| noncompliantdesc   | VARCHAR(4000) | The non-compliant description such as the column name when MISSING_COLUMN or the resource path if NON_COMPLIANT_PATH<br>FROM_LAYER_TYPE[Business_Business] DOES NOT INVOKE<br>TO_LAYER_TYPE[Business_Business,Business_Logical]<br>ACTUAL TO_LAYER_TYPE=[Physical_Formatting] TO_RESOURCE_ID=[971661]<br>TO_RESOURCE_TYPE:PATH=<br>[TABLE:/shared/labCommon/Physical/Formatting/ds_orders/tutorial/orderdetails] |
| nodehost [k]       | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]       | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |

### vMetadataPolicy Table

Provides information on all policies for RBS [rule-based security] and CBS [column-based security] rows for a given project path.

| Column Name        | Column Type   | Definition  |
|--------------------|---------------|---|
| partition [k]      | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| loaddate [k]       | TIMESTAMP     | The timestamp date the when the table was loaded.   |
| projectnameid [fk] | DECIMAL(19,0) | The project name id is a foreign key to the vMetadataConstName table.   |
| policyid [k]       | DECIMAL(19,0) | The unique policy id.   |
| policytype         | VARCHAR(10)   | The type of policy may be RBS (row-based security) or CBS (column-based security).  |
| resourcepath [k]   | VARCHAR(4000) | The DV path to the resource policy.   |
| resourcetype [k]   | VARCHAR(40)   | The DV resource type. [PROCEDURE]   |
| resourcesubtype    | VARCHAR(40)   | The policy subtype. [cbs_policy, rbs_policy]  |
| enabled            | VARCHAR(5)    | The policy is enabled (true) or not enabled (false).  |
| form               | VARCHAR(50)   | Refers to the form if created with "free-form".   |
| defaultrulefilter  | VARCHAR(50)   | The default rule may be [No Rows, All Rows, Predicate, or Procedure].   |
| defaultruledata    | VARCHAR(1000) | The default rule data may refer to the data or a path.  |
| nodehost [k]       | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]       | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |

### vMetadataPolicyAssignmnt Table

Provides the policy assignments for each policy.

| Column Name        | Column Type   | Definition  |
|--------------------|---------------|---|
| partition [k]      | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| loaddate [k]       | TIMESTAMP     | The timestamp date the when the table was loaded.   |
| projectnameid [fk] | DECIMAL(19,0) | The project name id is a foreign key to the vMetadataConstName table.   |
| resourceid         | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".  |
| policyid           | DECIMAL(19,0) | The unique policy id.   |
| policytype         | VARCHAR(10)   | The type of policy may be RBS (row-based security) or CBS (column-based security).  |
| columnname         | VARCHAR(255)  | The name of the column associated with the policy.  |
| message            | VARCHAR(4000) | Provides a way of logging a message. For example, if the policy assignment path no longer exists, then a message would be logged here.  |
| nodehost [k]       | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]       | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |

### vMetadataPrivilege Table

Provides a listing of all privileges for each resource for a given project path. The privilege may be for a nametype=[GROUP|USER]. The privilege

| Column Name         | Column Type   | Definition  |
|---------------------|---------------|---|
| partition [k]       | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| loaddate [k]        | TIMESTAMP     | The timestamp date the when the table was loaded.   |
| Projectnameid [fk]  | DECIMAL(19,0) | The project name id is a foreign key to the vMetadataConstName table.   |
| privilegeid [k]     | DECIMAL(19,0) | The privilege id generated sequence.  |
| layertype           | VARCHAR(50)   | A custom tag specifying the name of the layer. [Published_DS, Application_views, Business_Logical, Physical_Formatting, Physical_Metadata, etc.]                                  |
| resourceid [k]      | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".  |
| resourcepath        | VARCHAR(4000) | The DV path to the resource.  |
| resourcetype        | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| nametype [k]        | VARCHAR(5)    | The name type specified whether name is a USER or GROUP.  |
| nameid              | DECIMAL(19,0) | The id of the name or group.  |
| name [k]            | VARCHAR(50)   | The name of the user or group for the privilege.  |
| domainname [k]      | VARCHAR(50)   | The domain name specifies which domain the name belongs to.   |
| actualprivileges    | VARCHAR(60)   | The actual privileges<br>[READ WRITE EXECUTE SELECT UPDATE INSERT DELETE GRANT]   |
| combinedprivileges  | VARCHAR(60)   | The combined privileges<br>[READ WRITE EXECUTE SELECT UPDATE INSERT DELETE GRANT]   |
| inheritedprivileges | VARCHAR(60)   | The inherited privileges<br>[READ WRITE EXECUTE SELECT UPDATE INSERT DELETE GRANT]  |
| nodehost [k]        | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]        | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |

### vMetadataPrivilegeUser Table

This view provides a way to associate privileges with users. It is the many-to-many table that gets joined with vMetadataPrivilege and vMetadataAllUsersGroups.

| Column Name        | Column Type   | Definition  |
|--------------------|---------------|---|
| partition [k]      | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| loaddate [k]       | TIMESTAMP     | The timestamp of when the record was inserted or loaded.  |
| projectnameid [fk] | DECIMAL(19,0) | The project name id is a foreign key to the vMetadataConstName table.   |
| userpk [k]         | DECIMAL(19,0) | The user sequence primary key from vMetadataAllUsersGroups.   |
| privilegeid [k]    | DECIMAL(19,0) | The privilege id from vMetadataPrivilege  |
| nodehost [k]       | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]       | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |

### vMetadataResource Table

Provides a listing of all of the metadata resources for each project path. This is the core table that provides information about a resource.

| Column Name        | Column Type   | Definition   |
|--------------------|---------------|--|
| partition [k]      | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.  |
| loaddate [k]       | TIMESTAMP     | The timestamp date the when the table was loaded.  |
| projectnameid [fk] | DECIMAL(19,0) | The project name id is a foreign key to the vMetadataConstName table.  |
| layertype          | VARCHAR(50)   | A custom tag specifying the name of the layer. [Published_DS, Application_views, Business_Logical, Physical_Formatting, Physical_Metadata, etc.]   |
| resourceid         | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".   |
| resource name      | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.  |
| resourcepath [k]   | VARCHAR(4000) | The DV path to the resource.   |
| resourcetype [k]   | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.  |
| resourcesubtype    | VARCHAR(40)   | The DV resource subtype. The further qualifies the precise type of resource. E.g. NONE, SQL_TABLE (view), DATABASE_TABLE (datasource table), SQL_SCRIPT_PROCEDURE (DV procedure), OPERATION_PROCEDURE (web service procedure), plus many more. |
| resourcelinktype   | VARCHAR(40)   | The type of resource the published "LINK" is pointing to such as [TABLE, PROCEDURE].   |
| dataservice name   | VARCHAR(255)  | The published data service name.   |
| catalogname        | VARCHAR(255)  | The name of the published catalog or null if not applicable.   |
| schemaname         | VARCHAR(255)  | The name of the published schema or null if not applicable.  |
| compliant          | SMALLINT      | The resource is compliant when it meets the layer and column validations. 1=compliant. 0=non-compliant.  |
| ownername          | VARCHAR(50)   | The resource owner name.   |
| ownerdomain        | VARCHAR(50)   | The resource owner domain.   |
| ownerid            | INTEGER       | The resource owner unique id.  |
| creationdate       | TIMESTAMP     | The resource creation date (timestamp).  |
| creatorusername    | VARCHAR(50)   | The resource creation user name.   |
| creatoruserdomain  | VARCHAR(50)   | The resource creation user domain.   |
| creatoruserid      | INTEGER       | The resource creation user id which is a foreign key to system.ALL_USERS.  |



|                        |              |   |
|------------------------|--------------|---|
| lastmodifieddate       | TIMESTAMP    | The last modified date (timestamp).   |
| lastmodifiedusername   | VARCHAR(50)  | The last modified user name.  |
| lastmodifieduserdomain | VARCHAR(50)  | The last modified user domain.  |
| lastmodifieduserid     | INTEGER      | The last modified user id which is a foreign key to system.ALL_USERS.         |
| annotation             | CLOB         | The resource annotation.  |
| nodehost [k]           | VARCHAR(255) | The host name which comes from GetProperty('SERVER_HOSTNAME').                |
| nodeport [k]           | INTEGER      | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1. |

### vMetadataResourceColumn Table

Provides a listing of all of the metadata resource columns for each resource and project path. This is the core table that provides information about columns and their position.

| Column Name        | Column Type   | Definition  |
|--------------------|---------------|---|
| partition [k]      | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| loaddate [k]       | TIMESTAMP     | The timestamp date the when the table was loaded.   |
| projectnameid [fk] | DECIMAL(19,0) | The project name id is a foreign key to the vMetadataConstName table.   |
| resourceid         | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".  |
| columnname         | VARCHAR(255)  | The name of the column.   |
| columnstype        | VARCHAR(40)   | The type of column.   |
| columnndirection   | VARCHAR(10)   | The direction of the column. For TABLE types it is always OUT. For PROCEDURE types it may be IN, OUT, INOUT, RESULT, RETURN.  |
| columnpos          | INTEGER       | The ordinal position of the column within the resource.   |
| annotation         | CLOB          | The column annotation.  |
| nodehost [k]       | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]       | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |

### vMetadataResourceLineage Table

Provides a listing of the lineage for each resource at each layer. Lineage will be different based on which layer is referenced. Each record also references the datasource that is used.

| Column Name        | Column Type   | Definition  |
|--------------------|---------------|---|
| partition [k]      | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| loaddate [k]       | TIMESTAMP     | The timestamp date the when the table was loaded.   |
| projectnameid [fk] | DECIMAL(19,0) | The project name id is a foreign key to the vMetadataConstName table.   |
| layertype          | VARCHAR(50)   | A custom tag specifying the name of the layer. [Published_DS, Application_views, Business_Logical, Physical_Formatting, Physical_Metadata, etc.]                                  |
| resourceid         | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".  |
| lineageorder       | INTEGER       | The order from top to bottom in the layer hierarchy with respect to how the views traverse through the lineage.   |
| resourcepath [k]   | VARCHAR(4000) | The DV path to the resource.  |
| resourcetype [k]   | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| resourcesubtype    | VARCHAR(40)   | The DV resource subtype. The further qualifies the precise type of resource. E.g. NONE, SQL_TABLE (view), DATABASE_TABLE (datasource table),                                      |

|                     |               |  |
|---------------------|---------------|--|
|                     |               | SQL_SCRIPT_PROCEDURE (DV procedure), OPERATION_PROCEDURE (web service procedure), plus many more.  |
| resourcelinktype    | VARCHAR(40)   | The type of resource the published “LINK” is pointing to such as [TABLE, PROCEDURE].   |
| datasourceid        | DECIMAL(19,0) | The unique datasource id which comes from system.ALL_RESOURCES.  |
| fromlayertype       | VARCHAR(50)   | A custom tag specifying the name of the “from” layer. [Published_DS, Application_views, Business_Logical, Physical_Formatting, Physical_Metadata, etc.]  |
| fromresourceid      | DECIMAL(19,0) | The unique “from” resource id which comes from the DV system tables listed in “resourceorigin”.  |
| fromresourcepath    | VARCHAR(4000) | The “from” resource path.  |
| fromresourcetype    | VARCHAR(40)   | The “from” resource type.  |
| fromresourcesubtype | VARCHAR(40)   | The DV resource subtype. The further qualifies the precise type of resource. E.g. NONE, SQL_TABLE (view), DATABASE_TABLE (datasource table), SQL_SCRIPT_PROCEDURE (DV procedure), OPERATION_PROCEDURE (web service procedure), plus many more. |
| tolayertype         | VARCHAR(50)   | A custom tag specifying the name of the “to” layer. [Published_DS, Application_views, Business_Logical, Physical_Formatting, Physical_Metadata, etc.]  |
| toresourceid        | DECIMAL(19,0) | The unique “to” resource id which comes from the DV system tables listed in “resourceorigin”.  |
| toresourcepath      | VARCHAR(4000) | The “to” resource path.  |
| toresourcetype      | VARCHAR(40)   | The “to” resource type.  |
| toresourcesubtype   | VARCHAR(40)   | The DV resource subtype. The further qualifies the precise type of resource. E.g. NONE, SQL_TABLE (view), DATABASE_TABLE (datasource table), SQL_SCRIPT_PROCEDURE (DV procedure), OPERATION_PROCEDURE (web service procedure), plus many more. |
| message             | VARCHAR(4000) | The exception message if a request was not successful.   |
| nodehost [k]        | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]        | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |

## requests Definitions

### vEventRegLog Table

Derived from METRICS\_EVENT\_REG\_LOG. Details about the events that have occurred and the emails that have been sent out. An event is only logged if an email is sent. Events are registered in the METRICS\_EVENT\_REGISTRATION table and include: LONG\_RUNNING, EXCEEDED\_MEMORY, INACTIVITY, WORKFLOW\_FAILURE, DBMS\_SCHEDULER\_ERROR, and PURGE\_HISTORY.

| Column Name    | Column Type   | Definition   |
|----------------|---------------|--|
| partition [k]  | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.  |
| eventlogid [k] | DECIMAL(19,0) | A generated unique sequence id for this nodehost and nodeport.   |
| eventtime      | TIMESTAMP     | The timestamp of when the the event occurred in DV and was recorded in METRICS_EVENT_REG_LOG.  |
| eventtype      | VARCHAR(255)  | The event type describes what type of event occurred:<br><br>LONG_RUNNING – A long running process was triggered but only if DV is configured for 'Request Run Time'.<br><br>EXCEEDED_MEMORY – A running process has exceeded the allowed memory setting as configured by the administrator. 'Available Managed Memory' and 'Maximum Memory per Request' |

|                        |               |   |
|------------------------|---------------|---|
|                        |               | <p>INACTIVITY – No metrics table inserts have occurred consistently over a period of time.</p> <p>WORKFLOW_FAILURE – A KPImetrics triggered process has thrown an exception.</p> <p>DBMS_SCHEDULER_ERROR – A KPImetrics database-oriented process has thrown an exception.</p> <p>PURGE_HISTORY – A KPImetrics purge history process has thrown an exception.</p> |
| requestid [k]          | DECIMAL(19,0) | The unique request id that is the primary key of this table.  |
| sessionid [fk]         | DECIMAL(19,0) | A unique session id and foreign key to metrics_sessions_hist.   |
| starttime [k]          | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867   |
| datasourceid           | DECIMAL(19,0) | The unique datasource id which comes from system.ALL_RESOURCES.   |
| datasourcename         | VARCHAR(255)  | The datasource name.  |
| totalduration          | DECIMAL(19,0) | The total duration of the request measured in milli-seconds. Divide by 1000 to get minutes.   |
| totaldurationformatted | VARCHAR(20)   | A formatted total duration for display purposes.  |
| maxmemory              | DECIMAL(19,0) | The maximum memory in bytes.  |
| maxusedmemory          | DECIMAL(19,0) | The maximum memory used by the request in bytes.  |
| currentmemory          | DECIMAL(19,0) | The current memory in bytes.  |
| currentusedmemory      | DECIMAL(19,0) | The current memory used by the request in bytes.  |
| requesttype            | VARCHAR(255)  | The type of request that is stored in the description field. “SQL”=select statement, “SQL Script”=call statement executed, “XSLT, Basic, or Streaming Transformation”, “Java Procedure (built-in)”, etc.  |
| description            | CLOB          | The actual client request or internal DV request.   |
| ownerid                | DECIMAL(19,0) | The resource owner unique id.   |
| owner                  | VARCHAR(255)  | The resource owner name.  |
| ownerfirstname         | VARCHAR(255)  | The resource owner first name which comes from a METRICS_LDAP_PERSON lookup.  |
| ownerlastname          | VARCHAR(255)  | The resource owner last name which comes from a METRICS_LDAP_PERSON lookup.   |
| owneremail             | VARCHAR(255)  | The resource owner email which comes from a METRICS_LDAP_PERSON lookup.   |
| emailsendto            | VARCHAR(1000) | Derived from the email subscription or default configured sendto.   |
| emailsubject           | VARCHAR(1000) | Concatenated value of server environment, hostname and port.  |
| emailmessage           | CLOB          | The email message that was sent to the event requestor.   |
| notificationstatus     | VARCHAR(255)  | Indicates that a notification was emailed. NOTIFY_SUCCESS, NOTIFY_ERROR, NOTIFY_REQUIRED.   |
| nodehost [k]           | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]           | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |

### vEventRegLogLineage Table

Derived from METRICS\_EVENT\_REG\_LOG\_LINEAGE. Details about the data source lineage for a SQL description (request) that results from an event registered by METRICS\_EVENT\_REGISTRATION. Events that log data source lineage include: LONG\_RUNNING and EXCEEDED\_MEMORY because they have an associated SQL description that gets parsed in order to determine the lineage.

| Column Name        | Column Type   | Definition  |
|--------------------|---------------|---|
| partition [k]      | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| eventlineageid [k] | DECIMAL(19,0) | A generated unique sequence id for this nodehost and nodeport.  |
| eventlogid [fk]    | DECIMAL(19,0) | A foreign key to the vEventRegLog view.   |
| resourcepath [k]   | VARCHAR(4000) | The DV path to the resource.  |

|                   |               |   |
|-------------------|---------------|---|
| resourcetype [k]  | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| datasourcepath    | VARCHAR(255)  | The DV path to the published datasource/dataservice [/services/databases/<name>, /services/webservices/<path>name>]   |
| datasourcetype    | VARCHAR(255)  | The type of published datasource [VirtualRelational   VirtualWsdI   CompositeWebService].   |
| datasourcesubtype | VARCHAR(255)  | The datasource subtype which further qualifies what type of datasource it is. E.g. RELATIONAL_DATA_SOURCE, XML_FILE_DATA_SOURCE.                              |
| connhostname      | VARCHAR(4000) | The connection host name or ip address.   |
| connport          | INTEGER       | The connection port.  |
| connloginname     | VARCHAR(255)  | The connection login name.  |
| conn databasename | VARCHAR(255)  | The connection database name.   |
| conn databasetype | VARCHAR(255)  | The connection database type such as Oracle, PostgreSQL, SqlServer, Composite, Rest, WsdI, File, Netezza, MsExcel(POI), Ldap, MySql, XmlFile, Jdbc, DB2, etc. |
| connurlorroot     | VARCHAR(4000) | The connection URL or root. URL if relational. Root if file.  |
| nodehost [k]      | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]      | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |

### vEventRequestSqlColumns Table

Details about the column projection list from the metrics\_request description (SQL). These columns were parsed. Derived from the following tables: METRICS\_SQL\_REQUEST, METRICS\_SQL\_RESOURCE, METRICS\_SQL\_COLUMNS, metrics\_requests\_hist and metrics\_sessions\_hist

| Column Name            | Column Type   | Definition  |
|------------------------|---------------|---|
| partition [k]          | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| requestid [k]          | DECIMAL(19,0) | The unique request id that is the primary key of this table.  |
| starttime [k]          | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867   |
| requestdatemonths      | DECIMAL(19,2) | The number of months difference between the request date and the current date.  |
| requestdatedays        | DECIMAL(19,0) | The number of days difference between the request date and the current date.  |
| status                 | VARCHAR(20)   | The status of the request [SUCCESS, FAILED].  |
| sqlmessage             | VARCHAR(4000) | Provides a general informational message originating from vMetricsSqlRequest.   |
| message                | CLOB          | The exception message if a request was not successful.  |
| user                   | VARCHAR(255)  | The user name who connected for this session.   |
| domain                 | VARCHAR(255)  | The domain of the user who connected.   |
| clienthost             | VARCHAR(255)  | Designates the client host name that connected to DV.   |
| type                   | VARCHAR(20)   | The type of request [begin, end, null].   |
| bytesfromclient        | DECIMAL(19,0) | The total number of bytes received from the client host during this session.  |
| bytestoclient          | DECIMAL(19,0) | The total number of bytes sent to the client host during this session.  |
| rowsAffected           | DECIMAL(19,0) | The number of rows affected or returned. The value may be -1.   |
| sessiontype            | VARCHAR(40)   | Designates the type session connection [JDBC, HTTP, TASK, etc.].  |
| sqlinvocationtype      | VARCHAR(20)   | The SQL invocation type indicates the type of request [SELECT, CALL, INSERT, UPDATE, DELETE, PROCEDURE, WITH].  |
| kpirequestidmatch      | DECIMAL(19,0) | The requestid of a match to a similar request templated so that the SQL template can be copied instead of processed from the start.   |
| kpidescriptiontemplate | VARCHAR(4000) | The template of the actual client request or internal DV request. All literal values have been removed in order to normalize the SQL so it can be used to compare with other      |

|                            |               |  |
|----------------------------|---------------|--|
|                            |               | requests on a generic basis. The contents are 4000 characters or less which means that queries can be pushed down to the database.   |
| kpidescriptiontemplateclob | CLOB          | The template of the actual client request or internal DV request. All literal values have been removed in order to normalize the SQL so it can be used to compare with other requests on a generic basis. The contents are greater than 4000 characters. |
| description                | CLOB          | The actual client request or internal DV request.  |
| resourceeqid               | DECIMAL(19,0) | The resource sequence id is a foreign key back to vMetricsSqlResource.   |
| resourceorder              | DECIMAL(10,0) | The resource order.  |
| columnposition             | NUMERIC(10,2) | The ordinal position of the column and derived column. 1.0=1st column, 1.1=1st column of a derived field 1.2=2nd column of derived field.  |
| columnorigtype             | VARCHAR(20)   | Column origination type determines the type of SQL the column came from. CALL, PRIMARY, COMPLEX, SUBQUERY  |
| resourceid                 | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".   |
| resourcepath [k]           | VARCHAR(4000) | The DV path to the resource.   |
| resourcetype [k]           | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.  |
| frompath                   | VARCHAR(4000) | The from path is the database URL such as catalog.schema.table.  |
| fromalias                  | VARCHAR(255)  | The from path alias if applicable.   |
| dataservicename            | VARCHAR(255)  | The published data service name.   |
| catalogname                | VARCHAR(255)  | The name of the published catalog or null if not applicable.   |
| schemaname                 | VARCHAR(255)  | The name of the published schema or null if not applicable.  |
| resourcename               | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.  |
| columnalias                | VARCHAR(255)  | The logical column (alias) name from the SQL statement. If not present then "columnName" is the alias.   |
| columnname                 | VARCHAR(255)  | The projected column name from the SQL statement. If * used, then same as actual column name   |
| columnactual               | VARCHAR(255)  | The physical/source column name from the metadata table.   |
| columntype                 | VARCHAR(4000) | The type of column.  |
| columnndirection           | VARCHAR(10)   | The direction of the column. For TABLE types it is always OUT. For PROCEDURE types it may be IN, OUT, INOUT, RESULT, RETURN.   |
| columnnderived             | VARCHAR(10)   | Determine whether this column is derived or not [true/false].  |
| columnexpression           | CLOB          | The complete column expression.  |
| columnfunctionlist         | VARCHAR(4000) | A list of functions and occurrences that are used in the column expression. UPPER[3] would indicate that UPPER was used 3 times in the column expression.  |
| columnnamelist             | VARCHAR(4000) | A list of column names that make up the column expression  |
| nodehost [k]               | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]               | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |

### vEventRequestSqlResources Table

Details about the resources used from the metrics\_request description (SQL). These resources were parsed. Derived from the following tables: METRICS\_SQL\_REQUEST, METRICS\_SQL\_RESOURCE, metrics\_requests\_hist and metrics\_sessions\_hist

| Column Name   | Column Type   | Definition  |
|---------------|---------------|---|
| partition [k] | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| requestid [k] | DECIMAL(19,0) | The unique request id that is the primary key of this table.  |

|                            |               |   |
|----------------------------|---------------|---|
| starttime [k]              | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867   |
| endtime                    | TIMESTAMP     | The timestamp of when the request completed. E.g. 2020-01-06 10:19:36.899   |
| requestdatemonths          | DECIMAL(19,2) | The number of months difference between the request date and the current date.  |
| requestdatedays            | DECIMAL(19,0) | The number of days difference between the request date and the current date.  |
| totalduration              | DECIMAL(19,0) | The total duration of the request measured in milli-seconds. Divide by 1000 to get minutes.   |
| totaldurationdisplay       | VARCHAR(25)   | The total duration formatted for display using the format 0 00:00:00.000.   |
| status                     | VARCHAR(20)   | The status of the request [SUCCESS, FAILED].  |
| message                    | VARCHAR(4000) | The exception message if a request was not successful.  |
| kpistatus                  | VARCHAR(25)   | The KPImetrics SQL request processing status [SUCCESS, FAIL]  |
| kpiprocesstime             | TIMESTAMP     | The time the SQL request processing started.  |
| kpidurationseconds         | DECIMAL(19,3) | The number of seconds and fraction of seconds [5.102] the processing took.  |
| kpidurationinterval        | VARCHAR(25)   | A formatted duration interval of how long the processing took [0 00:00:02].   |
| kpimessage                 | VARCHAR(4000) | An exception message that could occur during the processing of the SQL or null if no exception.   |
| user                       | VARCHAR(255)  | The user name who connected for this session.   |
| domain                     | VARCHAR(255)  | The domain of the user who connected.   |
| fullname                   | VARCHAR(255)  | The full name of the user who connected.  |
| mail                       | VARCHAR(255)  | The email of the user who connected.  |
| sessionid [fk]             | DECIMAL(19,0) | A unique session id and foreign key to metrics_sessions_hist.   |
| clienthost                 | VARCHAR(255)  | Designates the client host name that connected to DV.   |
| type                       | VARCHAR(20)   | Indicates whether the session is of type 'begin' or 'end' or null.  |
| bytesfromclient            | DECIMAL(19,0) | The total number of bytes received from the client host during this session.  |
| bytetoclient               | DECIMAL(19,0) | The total number of bytes sent to the client host during this session.  |
| rowsAffected               | DECIMAL(19,0) | The number of rows affected or returned. The value may be -1.   |
| sessiontype                | VARCHAR(40)   | Designates the type session connection [JDBC, HTTP, TASK, etc.].  |
| sqlinvocationtype          | VARCHAR(20)   | The SQL invocation type indicates the type of request [SELECT, CALL, INSERT, UPDATE, DELETE, PROCEDURE, WITH].  |
| kpirequestidmatch          | DECIMAL(19,0) | The requestid of a match to a similar request templated so that the SQL template can be copied instead of processed from the start.   |
| kpidescriptiontemplate     | VARCHAR(4000) | The template of the actual client request or internal DV request. All literal values have been removed in order to normalize the SQL so it can be used to compare with other requests on a generic basis. The contents are 4000 characters or less which means that queries can be pushed down to the database. |
| kpidescriptiontemplateclob | CLOB          | The template of the actual client request or internal DV request. All literal values have been removed in order to normalize the SQL so it can be used to compare with other requests on a generic basis. The contents are greater than 4000 characters.  |
| description                | CLOB          | The actual client request or internal DV request.   |
| resourceeqid               | DECIMAL(19,0) | The resource sequence id is a foreign key back to vMetricsSqlResource.  |
| resourceid                 | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".  |
| resourcepath [k]           | VARCHAR(4000) | The DV path to the resource.  |
| resourcetype [k]           | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| frompath                   | VARCHAR(4000) | The from path is the database URL such as catalog.schema.table.   |
| fromalias                  | VARCHAR(255)  | The from path alias if applicable.  |
| dataservicename            | VARCHAR(255)  | The published data service name.  |
| catalogname                | VARCHAR(255)  | The name of the published catalog or null if not applicable.  |

|              |              |   |
|--------------|--------------|---|
| schemaname   | VARCHAR(255) | The name of the published schema or null if not applicable.                   |
| resourcename | VARCHAR(255) | The name of the resource. A.k.a. table or procedure name.                     |
| nodehost [k] | VARCHAR(255) | The host name which comes from GetProperty('SERVER_HOSTNAME').                |
| nodeport [k] | INTEGER      | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1. |

### vEventRequestSqlResourcesAllErrors Table

Details about errors produced during parsing of the metrics\_request description (SQL). This can be used to improve the SQL Parser code implemented by KPImetrics. These resources were parsed. Derived from the following tables: METRICS\_SQL\_REQUEST, METRICS\_SQL\_RESOURCE, metrics\_requests\_hist and metrics\_sessions\_hist

| Column Name          | Column Type   | Definition  |
|----------------------|---------------|---|
| partition [k]        | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| requestid [k]        | DECIMAL(19,0) | The unique request id that is the primary key of this table.  |
| starttime [k]        | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867   |
| endtime              | TIMESTAMP     | The timestamp of when the request completed. E.g. 2020-01-06 10:19:36.899   |
| requestdatemonths    | DECIMAL(19,2) | The number of months difference between the request date and the current date.  |
| requestdatedays      | DECIMAL(19,0) | The number of days difference between the request date and the current date.  |
| totalduration        | DECIMAL(19,0) | The total duration of the request measured in milli-seconds. Divide by 1000 to get minutes.   |
| totaldurationdisplay | VARCHAR(25)   | The total duration formatted for display using the format 0 00:00:00.000.   |
| status               | VARCHAR(20)   | The status of the request [SUCCESS, FAILED].  |
| message              | VARCHAR(4000) | The exception message if a request was not successful.  |
| kpistatus            | VARCHAR(25)   | The KPImetrics SQL request processing status [SUCCESS, FAIL]  |
| kpiprocesstime       | TIMESTAMP     | The time the SQL request processing started.  |
| kpidurationseconds   | DECIMAL(19,3) | The number of seconds and fraction of seconds [5.102] the processing took.  |
| kpidurationinterval  | VARCHAR(25)   | A formatted duration interval of how long the processing took [0 00:00:02].   |
| kpiexception         | VARCHAR(4000) | An exception message that could occur during the processing of the SQL or null if no exception.   |
| user                 | VARCHAR(255)  | The user name who connected for this session.   |
| domain               | VARCHAR(255)  | The domain of the user who connected.   |
| fullname             | VARCHAR(255)  | The full name of the user who connected.  |
| mail                 | VARCHAR(255)  | The email of the user who connected.  |
| sessionid [fk]       | DECIMAL(19,0) | A unique session id and foreign key to metrics_sessions_hist.   |
| clienthost           | VARCHAR(255)  | Designates the client host name that connected to DV.   |
| type                 | VARCHAR(20)   | Indicates whether the session is of type 'begin' or 'end' or null.  |
| bytesfromclient      | DECIMAL(19,0) | The total number of bytes received from the client host during this session.  |
| byttestoclient       | DECIMAL(19,0) | The total number of bytes sent to the client host during this session.  |
| rowsAffected         | DECIMAL(19,0) | The number of rows affected or returned. The value may be -1.   |
| sessiontype          | VARCHAR(40)   | Designates the type session connection [JDBC, HTTP, TASK, etc.].  |
| sqlinvocationtype    | VARCHAR(20)   | The SQL invocation type indicates the type of request [SELECT, CALL, INSERT, UPDATE, DELETE, PROCEDURE, WITH].  |
| kpirequestidmatch    | DECIMAL(19,0) | The requestid of a match to a similar request templated so that the SQL template can be copied instead of processed from the start.   |



|                            |               |   |
|----------------------------|---------------|---|
| kpidescriptiontemplate     | VARCHAR(4000) | The template of the actual client request or internal DV request. All literal values have been removed in order to normalize the SQL so it can be used to compare with other requests on a generic basis. The contents are 4000 characters or less which means that queries can be pushed down to the database. |
| kpidescriptiontemplateclob | CLOB          | The template of the actual client request or internal DV request. All literal values have been removed in order to normalize the SQL so it can be used to compare with other requests on a generic basis. The contents are greater than 4000 characters.  |
| description                | CLOB          | The actual client request or internal DV request.   |
| resourceeqid               | DECIMAL(19,0) | The resource sequence id is a foreign key back to vMetricsSqlResource.  |
| resourceid                 | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".  |
| resourcepath [k]           | VARCHAR(4000) | The DV path to the resource.  |
| resourcetype [k]           | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| frompath                   | VARCHAR(4000) | The from path is the database URL such as catalog.schema.table.   |
| fromalias                  | VARCHAR(255)  | The from path alias if applicable.  |
| dataservicename            | VARCHAR(255)  | The published data service name.  |
| catalogname                | VARCHAR(255)  | The name of the published catalog or null if not applicable.  |
| schemaname                 | VARCHAR(255)  | The name of the published schema or null if not applicable.   |
| resourcenname              | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.   |
| nodehost [k]               | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]               | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |

### vEventRequestSqlResourcesCount Table

Returns a count of the number of unique requestid rows parsed for each metrics\_request description (SQL). These resources were parsed. Derived from the following tables: METRICS\_SQL\_REQUEST, METRICS\_SQL\_RESOURCE, metrics\_requests\_hist and metrics\_sessions\_hist

| Column Name      | Column Type | Definition  |
|------------------|-------------|---|
| sqlresourcecount | BIGINT      | The total number of rows for the counttype.   |
| counttype        | VARCHAR(24) | The count type:<br>TOTAL ROWS – the total number of rows for all categories.<br>NUM TEMPLATE 4K ROWS – the number of rows in the varchar(4000) column.<br>NUM TEMPLATE CLOB ROWS – the number of rows in the clob column.<br>BOTH TEMPLATES NULL ROWS – the number of rows where both templates are null. |

### vExceededMemoryPercentRequests Table

Details on exceeded memory queries that are occurring at the time this resource is executed. Derived from the system catalog table SYS\_REQUESTS.

| Column Name    | Column Type   | Definition   |
|----------------|---------------|--|
| requestid [k]  | DECIMAL(19,0) | The unique request id that is the primary key of this table.                                 |
| parentid [fk]  | DECIMAL(19,0) | A foreign key back to the requestid within this table. Contains -1 when no parent reference. |
| sessionid [fk] | DECIMAL(19,0) | A unique session id and foreign key to metrics_sessions_hist.                                |
| transactionid  | BIGINT        | A reference to the DV transaction id.  |

|                         |                |  |
|-------------------------|----------------|--|
| ownerid                 | DECIMAL(19,0)  | The resource owner unique id.  |
| owner                   | VARCHAR(255)   | The resource owner name.   |
| domainname              | VARCHAR(255)   | The owner domain.  |
| requesttype             | VARCHAR(255)   | The type of request that is stored in the description field. "SQL"=select statement, "SQL Script"=call statement executed, "XSLT, Basic, or Streaming Transformation", "Java Procedure (built-in)", etc. |
| status                  | VARCHAR(20)    | The status of the request [READY, RUNNING, STARTED].   |
| description             | CLOB           | The actual client request or internal DV request.  |
| starttime [k]           | TIMESTAMP      | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867  |
| endtime                 | TIMESTAMP      | The timestamp of when the request completed. E.g. 2020-01-06 10:19:36.899  |
| totalduration           | BIGINT         | The total duration of the request measured in milli-seconds. Divide by 1000 to get minutes.  |
| totaldurationformatted  | VARCHAR(20)    | A formatted total duration for display purposes.   |
| serverduration          | BIGINT         | The server duration of the request measured in milli-seconds. Divide by 1000 to get minutes. How much time the request spent in the DV server being processed.   |
| rowsAffected            | BIGINT         | The number of rows affected or returned. The value may be -1.  |
| maxmemory               | BIGINT         | The maximum amount of memory used by the request.  |
| maxdisk                 | BIGINT         | The maximum amount of disk used by the request. It is not good for a request to used disk.   |
| currentmemory           | BIGINT         | The number of bytes of current memory used by the request.   |
| currentdisk             | BIGINT         | The number of bytes of disk used by the request.   |
| message                 | VARCHAR(65535) | The exception message if a request was not successful.   |
| maxusedmemory           | BIGINT         | The maximum number of memory bytes used by the request.  |
| currentusedmemory       | BIGINT         | The current number of memory bytes used by the request.  |
| cisattrmanagedmax       | BIGINT         | Comes from a server attribute defined by commonValues.cisAttrManagedMemoryMax  |
| cisattrrequestquotapct  | DECIMAL(10,6)  | Comes from a server attribute defined by commonValues.cisAttrRequestQuotaPercent   |
| maxmemallowedperrequest | BIGINT         | The maximum memory in bytes allowed for a request as determined by a DV configuration parameter set by the admin.  |
| datasourceid            | INTEGER        | The unique datasource id which comes from system.ALL_RESOURCES.  |
| datasourcenname         | VARCHAR(255)   | The datasource name.   |
| datasourceparentpath    | VARCHAR(4000)  | The datasource parent path.  |

### vGetSystemInformation Table

Returns nodehost and nodeport for a DV server. Derived from /System/Helpers/pGetSystemInformation() which in turn invokes /lib/util/GetProperty('SERVER\_HOSTNAME') and /lib/util/GetProperty('SERVER\_JDBC\_PORT')

| Column Name  | Column Type  | Definition  |
|--------------|--------------|---|
| nodehost [k] | VARCHAR(255) | The host name which comes from GetProperty('SERVER_HOSTNAME').                |
| nodeport [k] | INTEGER      | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1. |

### vLongRunningRequests Table

Details on long running queries that are occurring at the time this resource is executed. Derived from the system catalog table SYS\_REQUESTS.

| Column Name | Column Type | Definition |
|-------------|-------------|------------|
|-------------|-------------|------------|

|                        |                |  |
|------------------------|----------------|--|
| requestid [k]          | DECIMAL(19,0)  | The unique request id that is the primary key of this table.   |
| parentid [fk]          | DECIMAL(19,0)  | A foreign key back to the requestid within this table. Contains -1 when no parent reference.   |
| sessionid [fk]         | DECIMAL(19,0)  | A unique session id and foreign key to metrics_sessions_hist.  |
| transactionid          | BIGINT         | A reference to the DV transaction id.  |
| ownerid                | DECIMAL(19,0)  | The resource owner unique id.  |
| owner                  | VARCHAR(255)   | The resource owner name.   |
| domainname             | VARCHAR(255)   | The owner domain.  |
| requesttype            | VARCHAR(255)   | The type of request that is stored in the description field. "SQL"=select statement, "SQL Script"=call statement executed, "XSLT, Basic, or Streaming Transformation", "Java Procedure (built-in)", etc. |
| status                 | VARCHAR(20)    | The status of the request [READY, RUNNING, STARTED].   |
| description            | CLOB           | The actual client request or internal DV request.  |
| starttime [k]          | TIMESTAMP      | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867  |
| endtime                | TIMESTAMP      | The timestamp of when the request completed. E.g. 2020-01-06 10:19:36.899  |
| totalduration          | DECIMAL(19,0)  | The total duration of the request measured in milli-seconds. Divide by 1000 to get minutes.  |
| totaldurationformatted | VARCHAR(20)    | A formatted total duration for display purposes.   |
| serverduration         | BIGINT         | The server duration of the request measured in milli-seconds. Divide by 1000 to get minutes. How much time the request spent in the DV server being processed.   |
| rowsAffected           | BIGINT         | The number of rows affected or returned. The value may be -1.  |
| maxmemory              | BIGINT         | The maximum amount of memory used by the request.  |
| maxdisk                | BIGINT         | The maximum amount of disk used by the request. It is not good for a request to used disk.   |
| currentmemory          | BIGINT         | The number of bytes of current memory used by the request.   |
| currentdisk            | BIGINT         | The number of bytes of disk used by the request.   |
| message                | VARCHAR(65535) | The exception message if a request was not successful.   |
| maxusedmemory          | BIGINT         | The maximum number of memory bytes used by the request.  |
| currentusedmemory      | BIGINT         | The current number of memory bytes used by the request.  |
| cisrequestrunminutes   | INTEGER        | The number of minutes the request has been running.  |
| datasourceid           | INTEGER        | The unique datasource id which comes from system.ALL_RESOURCES.  |
| datasourcenname        | VARCHAR(255)   | The datasource name.   |
| datasourceparentpath   | VARCHAR(4000)  | The datasource parent path.  |

### vMetricsSqlColumns Table

Details of the parsed SQL columns for a user defined request. Derived from METRICS\_SQL\_COLUMNS with no other join.

| Column Name    | Column Type   | Definition  |
|----------------|---------------|---|
| partition [k]  | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| requestid [k]  | DECIMAL(19,0) | The unique request id that is the primary key of this table.  |
| starttime [k]  | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867   |
| resourceeqid   | DECIMAL(19,0) | The resource sequence id is a foreign key back to vMetricsSqlResource.  |
| resourceorder  | DECIMAL(10,0) | The order of the table or procedure resource within the context of the query.   |
| columnorigtype | VARCHAR(20)   | Column origination type determines the type of SQL the column came from. CALL, PRIMARY, COMPLEX, SUBQUERY   |
| columnposition | NUMERIC(10,2) | The ordinal position of the column and derived column. 1.0=1st column, 1.1=1st column of a derived field 1.2=2nd column of dervied field.   |

|                    |               |   |
|--------------------|---------------|---|
| columnalias        | VARCHAR(255)  | The logical column (alias) name from the SQL statement. If not present then "columnName" is the alias.  |
| columnName         | VARCHAR(255)  | The projected column name from the SQL statement. If * used, then same as actual column name  |
| columnactual       | VARCHAR(255)  | The physical/source column name from the metadata table.  |
| columnstype        | VARCHAR(4000) | The type of column.   |
| columnndirection   | VARCHAR(10)   | The direction of the column. For TABLE types it is always OUT. For PROCEDURE types it may be IN, OUT, INOUT, RESULT, RETURN.                              |
| columnnderived     | VARCHAR(10)   | Determine whether this column is derived or not [true/false].   |
| columnexpression   | CLOB          | The complete column expression.   |
| columnfunctionlist | VARCHAR(4000) | A list of functions and occurrences that are used in the column expression. UPPER[3] would indicate that UPPER was used 3 times in the column expression. |
| columnnamelist     | VARCHAR(4000) | A list of column names that make up the column expression.  |
| nodehost [k]       | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]       | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |

### vMetricsSqlRequest Table

Details of the parsed SQL for a user defined request. Derived from METRICS\_SQL\_REQUEST with no other join. Note the SQL Template is either stored in KPI\_DESCRIPTION\_TEMPLATE VARCHAR(4000) when the SQL statement is <= 4000 characters or KPI\_DESCRIPTION\_TEMPLATE\_CLOB [CLOB/TEXT] when it is greater than 4000. The vast majority of SQL will be less than 4000. Since the odds are in favor of smaller SQL statements, an index can be placed on KPI\_DESCRIPTION\_TEMPLATE allowing faster access. However, if it is determined that the application has both then the user interface must account for the CLOB field in its queries.

| Column Name          | Column Type   | Definition  |
|----------------------|---------------|---|
| partition [k]        | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| requestid [k]        | DECIMAL(19,0) | The unique request id that is the primary key of this table.  |
| starttime [k]        | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867   |
| endtime              | TIMESTAMP     | The timestamp of when the request completed. E.g. 2020-01-06 10:19:36.899   |
| totaldurationdisplay | VARCHAR(25)   | The total duration formatted for display using the format 0 00:00:00.000.   |
| dataservicename      | VARCHAR(255)  | The published data service name.  |
| status               | VARCHAR(20)   | The status of the request [SUCCESS, FAILED].  |
| message              | VARCHAR(4000) | The exception message if a request was not successful.  |
| kpiprocesstime       | TIMESTAMP     | The time the SQL request processing started.  |
| kpistatus            | VARCHAR(25)   | The KPImetrics SQL request processing status [SUCCESS, FAIL]  |
| kpimessage           | VARCHAR(4000) | An exception message that could occur during the processing of the SQL or null if no exception.   |
| kpidurationseconds   | DECIMAL(19,3) | The number of seconds and fraction of seconds [5.102] the processing took.  |
| kpidurationinterval  | VARCHAR(25)   | A formatted duration interval of how long the processing took [0 00:00:02].   |
| kpirequestidmatch    | DECIMAL(19,0) | The requestid of a match to a similar request templated so that the SQL template can be copied instead of processed from the start.   |
| kpisqlinvocationtype | VARCHAR(20)   | The SQL invocation type indicates the type of request [SELECT, CALL, INSERT, UPDATE, DELETE, PROCEDURE, WITH].  |

|                            |               |   |
|----------------------------|---------------|---|
| kpidescriptiontemplate     | VARCHAR(4000) | The template of the actual client request or internal DV request. All literal values have been removed in order to normalize the SQL so it can be used to compare with other requests on a generic basis. The contents are 4000 characters or less which means that queries can be pushed down to the database. |
| kpidescriptiontemplateclob | CLOB          | The template of the actual client request or internal DV request. All literal values have been removed in order to normalize the SQL so it can be used to compare with other requests on a generic basis. The contents are greater than 4000 characters.  |
| nodehost [k]               | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]               | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |
| processednodehost          | VARCHAR(255)  | The hostname (nodehost) of the DV server that is performing the processing. Due to locking issues [mainly] with SQL Server, the architecture dictates that only one node performs the processing for all the other nodes.   |
| processednodeport          | INTEGER       | The port (nodeport) of the DV server that is performing the processing.   |

### vMetricsSqlRequestLineage Table

Details of the parsed SQL for a user defined request with the addition of the data source resource lineage. A request may contain many published resources. Each published resource may result in many data source resources. Therefore, the result may contain 0 to many resources and 0 to many data source resources.

#### REQUEST → RESOURCES → DATASOURCE LINEAGE

| Column Name                | Column Type   | Definition  |
|----------------------------|---------------|---|
| partition [k]              | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.   |
| requestid [k]              | DECIMAL(19,0) | The unique request id that is the primary key of this table.  |
| starttime [k]              | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867   |
| dataservicename            | VARCHAR(255)  | The published data service name.  |
| kpidescriptiontemplate     | VARCHAR(4000) | The template of the actual client request or internal DV request. All literal values have been removed in order to normalize the SQL so it can be used to compare with other requests on a generic basis. The contents are 4000 characters or less which means that queries can be pushed down to the database. |
| kpidescriptiontemplateclob | CLOB          | The template of the actual client request or internal DV request. All literal values have been removed in order to normalize the SQL so it can be used to compare with other requests on a generic basis. The contents are greater than 4000 characters.  |
| resourceeqid [k]           | DECIMAL(19,0) | A generated unique id for this row.   |
| resourcename_pub           | VARCHAR(255)  | The published name for the resource associated with "resourcepath".   |
| resourcepath_pub           | VARCHAR(4000) | The published resource path for the resource associated with "resourcepath".  |
| resourcetype_pub           | VARCHAR(255)  | The published resource type for the resource associated with "resourcepath".  |
| catalogname                | VARCHAR(255)  | The name of the published catalog or null if not applicable.  |
| schemaname                 | VARCHAR(255)  | The name of the published schema or null if not applicable.   |
| id                         | DECIMAL(19,0) | The resource id of the published resource.  |
| resourcename               | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.   |
| resourcetype [k]           | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| resourcesubtype            | VARCHAR(40)   | The DV resource subtype. The further qualifies the precise type of resource. E.g. NONE, SQL_TABLE (view), DATABASE_TABLE (datasource table), SQL_SCRIPT_PROCEDURE (DV procedure), OPERATION_PROCEDURE (web service procedure), plus many more.  |

|                   |               |  |
|-------------------|---------------|--|
| resourcepath [k]  | VARCHAR(4000) | The DV path to the resource.   |
| datasourcename    | VARCHAR(255)  | The datasource name.   |
| datasourcetype    | VARCHAR(255)  | The type of published datasource [VirtualRelational   VirtualWsd   CompositeWebService].   |
| datasourcesubtype | VARCHAR(255)  | The datasource subtype which further qualifies what type of datasource it is. E.g. RELATIONAL_DATA_SOURCE, XML_FILE_DATA_SOURCE. |
| datasourcepath    | VARCHAR(255)  | The DV path to the published datasource/dataservice [/services/databases/<name>, /services/webservices/<path name>]              |
| nodehost [k]      | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]      | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |

### vMetricsSqlRequestUniqueSqlTemplates Table

A unique grouping of parsed SQL templates derived from parsing the request “description”. Since the description is stored as a VARCHAR(4000) field it allows push down on queries. Data is only stored in this field when <= 4000 characters. Derived from METRICS\_SQL\_REQUEST. KPI\_DESCRIPTION\_TEMPLATE.

| Column Name            | Column Type   | Definition  |
|------------------------|---------------|---|
| numDescriptions        | BIGINT        | The number of related varchar(4000) descriptions. Use this number to determine if searching kpidescriptiontemplate is required.   |
| dataservicename        | VARCHAR(255)  | The published data service name.  |
| kpisqlinvocationtype   | VARCHAR(20)   | The SQL invocation type indicates the type of request [SELECT, CALL, INSERT, UPDATE, DELETE, PROCEDURE, WITH].  |
| kpidescriptiontemplate | VARCHAR(4000) | The template of the actual client request or internal DV request. All literal values have been removed in order to normalize the SQL so it can be used to compare with other requests on a generic basis. The contents are 4000 characters or less which means that queries can be pushed down to the database. |
| nodehost [k]           | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]           | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |

### vMetricsSqlRequestUniqueSqlTemplatesByUser Table

A unique grouping of parsed SQL templates sorted by user and derived from parsing the request “description”. Since the description is stored as a VARCHAR(4000) field it allows push down on queries. Data is only stored in this field when <= 4000 characters. Derived from METRICS\_SQL\_REQUEST. KPI\_DESCRIPTION\_TEMPLATE and metrics\_resources\_usage\_hist.

| Column Name            | Column Type   | Definition   |
|------------------------|---------------|--|
| numDescriptions        | BIGINT        | The number of related varchar(4000) descriptions. Use this number to determine if searching kpidescriptiontemplate is required.  |
| user                   | VARCHAR(255)  | The user name who connected for this session.  |
| domain                 | VARCHAR(255)  | The domain of the user who connected.  |
| dataservicename        | VARCHAR(255)  | The published data service name.   |
| kpisqlinvocationtype   | VARCHAR(20)   | The SQL invocation type indicates the type of request [SELECT, CALL, INSERT, UPDATE, DELETE, PROCEDURE, WITH].   |
| kpidescriptiontemplate | VARCHAR(4000) | The template of the actual client request or internal DV request. All literal values have been removed in order to normalize the SQL so it can be used to compare with other |

|              |              |  |
|--------------|--------------|--|
|              |              | requests on a generic basis. The contents are 4000 characters or less which means that queries can be pushed down to the database. |
| nodehost [k] | VARCHAR(255) | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k] | INTEGER      | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |

### vMetricsSqlRequestUniqueSqlTemplatesByUserByDate Table

A unique grouping of parsed SQL templates sorted by user and request date and derived from parsing the request “description”. Since the description is stored as a VARCHAR(4000) field it allows push down on queries. Data is only stored in this field when <= 4000 characters. Derived from METRICS\_SQL\_REQUEST. KPI\_DESCRIPTION\_TEMPLATE and metrics\_resources\_usage\_hist.

| Column Name            | Column Type   | Definition  |
|------------------------|---------------|---|
| numDescriptions        | BIGINT        | The number of related varchar(4000) descriptions. Use this number to determine if searching kpidescriptiontemplate is required.   |
| user                   | VARCHAR(255)  | The user name who connected for this session.   |
| domain                 | VARCHAR(255)  | The domain of the user who connected.   |
| requestdate            | DATE          | The date [YYYY-MM-DD] of the request.   |
| requestdatemonths      | DECIMAL(19,2) | The number of months difference between the request date and the current date.  |
| requestdatedays        | DECIMAL(19,0) | The number of days difference between the request date and the current date.  |
| dataservicename        | VARCHAR(255)  | The published data service name.  |
| kpisqlinvocationtype   | VARCHAR(20)   | The SQL invocation type indicates the type of request [SELECT, CALL, INSERT, UPDATE, DELETE, PROCEDURE, WITH].  |
| kpidescriptiontemplate | VARCHAR(4000) | The template of the actual client request or internal DV request. All literal values have been removed in order to normalize the SQL so it can be used to compare with other requests on a generic basis. The contents are 4000 characters or less which means that queries can be pushed down to the database. |
| nodehost [k]           | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]           | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |

### vMetricsSqlRequestUniqueSqlTemplatesClob Table

A unique grouping of parsed SQL templates derived from parsing the request “description”.  
Warning. Since the description is stored as a CLOB field and push down on CLOB is not supported, this may cause high memory usage in CIS. Derived from METRICS\_SQL\_REQUEST. KPI\_DESCRIPTION\_TEMPLATE\_CLOB.

| Column Name                | Column Type  | Definition   |
|----------------------------|--------------|--|
| numDescriptions            | BIGINT       | The number of related varchar(4000) descriptions. Use this number to determine if searching kpidescriptiontemplate is required.  |
| connected                  | VARCHAR(255) | The published data service name.   |
| kpisqlinvocationtype       | VARCHAR(20)  | The SQL invocation type indicates the type of request [SELECT, CALL, INSERT, UPDATE, DELETE, PROCEDURE, WITH].   |
| kpidescriptiontemplateclob | CLOB         | The template of the actual client request or internal DV request. All literal values have been removed in order to normalize the SQL so it can be used to compare with other requests on a generic basis. The contents are greater than 4000 characters. |
| nodehost [k]               | VARCHAR(255) | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]               | INTEGER      | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |



### vMetricsSqlRequestUniqueSqlTemplatesClobByUser Table

A unique grouping of parsed SQL templates sorted by user and derived from parsing the request “description”. Warning. Since the description is stored as a CLOB field and push down on CLOB is not supported, this may cause high memory usage in CIS. Derived from METRICS\_SQL\_REQUEST. KPI\_DESCRIPTION\_TEMPLATE\_CLOB and metrics\_resources\_usage\_hist.

| Column Name                | Column Type  | Definition   |
|----------------------------|--------------|--|
| numDescriptions            | BIGINT       | The number of related varchar(4000) descriptions. Use this number to determine if searching kpidescriptiontemplate is required.  |
| user                       | VARCHAR(255) | The user name who connected for this session.  |
| domain                     | VARCHAR(255) | The domain of the user who connected.  |
| dataservicename            | VARCHAR(255) | The published data service name.   |
| kpisqlinvocationtype       | VARCHAR(20)  | The SQL invocation type indicates the type of request [SELECT, CALL, INSERT, UPDATE, DELETE, PROCEDURE, WITH].   |
| kpidescriptiontemplateclob | CLOB         | The template of the actual client request or internal DV request. All literal values have been removed in order to normalize the SQL so it can be used to compare with other requests on a generic basis. The contents are greater than 4000 characters. |
| Nodehost [k]               | VARCHAR(255) | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| Nodeport [k]               | INTEGER      | The http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |

### vMetricsSqlRequestUniqueSqlTemplatesClobByUserByDate Table

A unique grouping of parsed SQL templates sorted by user and request date and derived from parsing the request “description”. Warning. Since the description is stored as a CLOB field and push down on CLOB is not supported, this may cause high memory usage in CIS. Derived from METRICS\_SQL\_REQUEST. KPI\_DESCRIPTION\_TEMPLATE\_CLOB and metrics\_resources\_usage\_hist.

| Column Name                | Column Type   | Definition   |
|----------------------------|---------------|--|
| numDescriptions            | BIGINT        | The number of related varchar(4000) descriptions. Use this number to determine if searching kpidescriptiontemplate is required.  |
| user                       | VARCHAR(255)  | The user name who connected for this session.  |
| domain                     | VARCHAR(255)  | The domain of the user who connected.  |
| requestdate                | DATE          | The date [YYYY-MM-DD] of the request.  |
| requestdatemonths          | DECIMAL(19,2) | The number of months difference between the request date and the current date.   |
| requestdatedays            | DECIMAL(19,0) | The number of days difference between the request date and the current date.   |
| dataservicename            | VARCHAR(255)  | The published data service name.   |
| kpisqlinvocationtype       | VARCHAR(20)   | The SQL invocation type indicates the type of request [SELECT, CALL, INSERT, UPDATE, DELETE, PROCEDURE, WITH].   |
| kpidescriptiontemplateclob | CLOB          | The template of the actual client request or internal DV request. All literal values have been removed in order to normalize the SQL so it can be used to compare with other requests on a generic basis. The contents are greater than 4000 characters. |
| nodehost [k]               | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]               | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |

### vMetricsSqlResource Table

Details of the parsed SQL resources for a user defined request. Derived from METRICS\_SQL\_RESOURCE with no other joins.

| Column Name       | Column Type   | Definition  |
|-------------------|---------------|---|
| partition [k]     | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.   |
| requestid [k]     | DECIMAL(19,0) | The unique request id that is the primary key of this table.  |
| starttime [k]     | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867   |
| resourceeqid      | DECIMAL(19,0) | The resource sequence id.   |
| resourceid        | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".  |
| resourceorigin    | VARCHAR(30)   | The original DV system table in which the resource originated from.<br>[ALL_TABLES  ALL_PROCEDURES ALL_WSDL_OPERATIONS ALL_RESOURCES  ALL_COLUMNS ALL_PARAMETERS]   |
| resourcepath [k]  | VARCHAR(4000) | The DV path to the resource.  |
| resourcetype [k]  | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| sqlinvocationtype | VARCHAR(255)  | The SQL invocation type indicates the type of request [SELECT, CALL, INSERT, UPDATE, DELETE, PROCEDURE, WITH].  |
| frompath          | VARCHAR(4000) | The from path is the database URL such as catalog.schema.table.   |
| fromalias         | VARCHAR(255)  | The from path alias if applicable.  |
| dataservicename   | VARCHAR(255)  | The published data service name.  |
| catalogname       | VARCHAR(255)  | The name of the published catalog or null if not applicable.  |
| schemaname        | VARCHAR(255)  | The name of the published schema or null if not applicable.   |
| resourcenname     | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.   |
| messagetype       | VARCHAR(10)   | Typically null but if no lineage is found then [NO_LINEAGE].  |
| message           | VARCHAR(4000) | The informational message if no lineage was found such as [NO DATA SOURCE LINEAGE GENERATED].   |
| nodehost [k]      | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]      | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |
| processednodehost | VARCHAR(255)  | The hostname (nodehost) of the DV server that is performing the processing. Due to locking issues [mainly] with SQL Server, the architecture dictates that only one node performs the processing for all the other nodes. |
| processednodeport | INTEGER       | The port (nodeport) of the DV server that is performing the processing.   |

### vMetricsSqlResourceLineage Table

Details of the parsed SQL resources data source lineage for a user defined request. Derived from METRICS\_SQL\_RESOURCE\_LINEAGE with no other joins.

| Column Name   | Column Type   | Definition  |
|---------------|---------------|---|
| partition [k] | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| id            | DECIMAL(19,0) | A unique generated sequence id.   |
| requestid [k] | DECIMAL(19,0) | The unique request id that is the primary key of this table.  |
| starttime [k] | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867   |
| resourceeqid  | DECIMAL(19,0) | This field gets selected from vMetricsSqlResource table.  |
| status        | VARCHAR(20)   | C=copied from existing database records.  |

|                   |               |  |
|-------------------|---------------|--|
|                   |               | L=lineage generated from getResourceLineageDirectRecursive()   |
| resourceid        | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".   |
| resourceName      | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.  |
| resourcepath [k]  | VARCHAR(4000) | The DV path to the resource.   |
| resourcetype [k]  | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.  |
| resourcesubtype   | VARCHAR(40)   | The DV resource subtype. The further qualifies the precise type of resource. E.g. NONE, SQL_TABLE (view), DATABASE_TABLE (datasource table), SQL_SCRIPT_PROCEDURE (DV procedure), OPERATION_PROCEDURE (web service procedure), plus many more. |
| datasourceid      | DECIMAL(19,0) | The unique datasource id which comes from system.ALL_RESOURCES.  |
| datasourcename    | VARCHAR(255)  | The datasource name.   |
| datasourcepath    | VARCHAR(255)  | The DV path to the published datasource/dataservice [/services/databases/<name>, /services/webservices/<path name>]  |
| datasourcesubtype | VARCHAR(255)  | The datasource subtype which further qualifies what type of datasource it is. E.g. RELATIONAL_DATA_SOURCE, XML_FILE_DATA_SOURCE.   |
| datasourcetype    | VARCHAR(255)  | The type of published datasource [VirtualRelational   VirtualWsdI   CompositeWebService].  |
| nodehost [k]      | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]      | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |

### vMetricsSqlResourceLineageCountReport Table

Provides a count of METRICS\_SQL\_RESOURCE and METRICS\_SQL\_RESOURCE\_LINEAGE tables under different scenarios:

TOTAL METRICS\_SQL\_RESOURCE COUNT

TOTAL METRICS\_SQL\_RESOURCE COUNT AVAILABLE TO PROCESS

TOTAL METRICS\_SQL\_RESOURCE NOT PROCESSED

TOTAL METRICS\_SQL\_RESOURCE NOT PROCESSED BY NODE

TOTAL METRICS\_SQL\_RESOURCE\_LINEAGE PROCESSED

TOTAL METRICS\_SQL\_RESOURCE\_LINEAGE PROCESSED BY nodehost

TOTAL METRICS\_SQL\_RESOURCE\_LINEAGE PROCESSED BY STATUS=C=[C]opied lineage

TOTAL METRICS\_SQL\_RESOURCE\_LINEAGE PROCESSED BY STATUS=L=[L]ineage generated

TOTAL METRICS\_SQL\_RESOURCE\_LINEAGE PROCESSED BY nodehost, status=C=[C]opied lineage

TOTAL METRICS\_SQL\_RESOURCE\_LINEAGE PROCESSED BY nodehost, status=L=[L]ineage generated

TOTAL METRICS\_SQL\_RESOURCE\_LINEAGE PROCESSED BY nodehost, starttime, status=C=[C]opied lineage

TOTAL METRICS\_SQL\_RESOURCE\_LINEAGE PROCESSED BY nodehost, starttime, status=L=[L]ineage generated

| Column Name   | Column Type  | Definition  |
|---------------|--------------|---|
| SECTION       | CHAR(3)      | A section label used for sorting purposes: 1.1, 1.2, 1.3, 2.1, 2.2, 3.1, 3.2 etc. |
| nodehost [k]  | VARCHAR(255) | The host name which comes from GetProperty('SERVER_HOSTNAME').                    |
| nodeport [k]  | INTEGER      | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.     |
| starttime [k] | TIMESTAMP    | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867       |
| statusdesc    | VARCHAR(310) | A description of the count.   |
| cnt           | BIGINT       | A count of rows.  |

### vPublishedResourcePerRequest Table

Details on published requests correlated with user information. Derived from metrics\_resources\_usage\_hist, metrics\_sessions\_hist, metrics\_requests\_hist.

| Column Name      | Column Type   | Definition  |
|------------------|---------------|---|
| partition [k]    | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.   |
| requestid [k]    | DECIMAL(19,0) | The unique request id that is the primary key of this table.  |
| sessionid [fk]   | DECIMAL(19,0) | A unique session id and foreign key to metrics_sessions_hist.   |
| userid           | DECIMAL(19,0) | The DV userid from the system.ALL_USERS tables.   |
| user             | VARCHAR(255)  | The user name who connected for this session.   |
| domain           | VARCHAR(255)  | The domain of the user who connected.   |
| fullname         | VARCHAR(255)  | The full name of the user who connected.  |
| mail             | VARCHAR(255)  | The email of the user who connected.  |
| type             | VARCHAR(20)   | Indicates whether the session is of type 'begin' or 'end' or null.  |
| description      | CLOB          | The actual client request or internal DV request.   |
| dataservicename  | VARCHAR(255)  | The published data service name.  |
| resourcetype [k] | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| resourcenname    | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.   |
| resourcepath [k] | VARCHAR(4000) | The DV path to the resource.  |
| categoryname     | VARCHAR(255)  | <p>The category name of the resource. A normalized name from either the resource name, parent name or grand-parent name.</p> <p>ALL_TABLES: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_COLUMNS: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PROCEDURES: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PARAMETERS: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_WSDL_OPERATIONS: If legacy web service then it is the service name otherwise it is the parent folder name of the web service. If no parent folder name then it is the web service dataservice name.</p> <p>e.g. Legacy: /services/webservices/system/admin/<b>resource</b>/operations/getUsedResources</p> <p>e.g. Non-Legacy: /services/webservices/GrandParent/<b>Parent</b>/CustomerWS/LookupProduct</p> <p>e.g. Non-Legacy: /services/webservices/<b>CustomerWS</b>/LookupProduct</p> <p>ALL_RESOURCES: null</p> |
| rowsAffected     | DECIMAL(19,0) | The number of rows affected or returned. The value may be -1.   |
| bytesfromclient  | DECIMAL(19,0) | The total number of bytes received from the client host during this session.  |
| bytestoclient    | DECIMAL(19,0) | The total number of bytes sent to the client host during this session.  |
| starttime [k]    | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867   |
| endtime          | TIMESTAMP     | The timestamp of when the request completed. E.g. 2020-01-06 10:19:36.899   |
| totalduration    | DECIMAL(19,0) | The total duration of the request measured in milli-seconds. Divide by 1000 to get minutes.   |
| serverduration   | DECIMAL(19,0) | The duration of the request within the server measured in milli-seconds. Divide by 1000 to get minutes.   |
| nodehost [k]     | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]     | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |

### vRequestDurationSqlTemplates Table

| Column Name            | Column Type   | Definition  |
|------------------------|---------------|---|
| partition [k]          | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.   |
| cluster                | VARCHAR(255)  | The name of the cluster or null if no cluster.  |
| nodehost [k]           | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]           | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |
| requestid [k]          | DECIMAL(19,0) | The unique request id that is the primary key of this table.  |
| parentid [fk]          | DECIMAL(19,0) | A foreign key back to the requestid within this table. Contains -1 when no parent reference.  |
| sessionid [fk]         | DECIMAL(19,0) | A unique session id and foreign key to metrics_sessions_hist.   |
| requesttype            | VARCHAR(255)  | The type of request that is stored in the description field. "SQL"=select statement, "SQL Script"=call statement executed, "XSLT, Basic, or Streaming Transformation", "Java Procedure (built-in)", etc.  |
| starttime [k]          | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867   |
| endtime                | TIMESTAMP     | The timestamp of when the request completed. E.g. 2020-01-06 10:19:36.899   |
| totalduration          | DECIMAL(19,0) | The total duration of the request measured in milli-seconds. Divide by 1000 to get minutes.   |
| totaldurationStr       | VARCHAR(255)  | The total duration formatted string such as 0 01:02:4.032   |
| totaldurationDays      | DECIMAL(12,4) | The total duration number of days.  |
| totaldurationMinutes   | DECIMAL(12,4) | The total duration number of minutes.   |
| totaldurationHours     | DECIMAL(12,4) | The total duration number of hours.   |
| totaldurationSeconds   | DECIMAL(12,4) | The total duration number of seconds including fraction of a second such as 4.032.  |
| serverduration         | DECIMAL(19,0) | The duration of the request within the server measured in milli-seconds. Divide by 1000 to get minutes.   |
| rowsAffected           | DECIMAL(19,0) | The number of rows affected or returned. The value may be -1.   |
| maxmemory              | DECIMAL(19,0) | The maximum amount of memory used by the request.   |
| maxdisk                | DECIMAL(19,0) | The maximum amount of disk used by the request. It is not good for a request to used disk.  |
| message                | CLOB          | The exception message if a request was not successful.  |
| status                 | VARCHAR(20)   | The status of the request [SUCCESS, FAILED].  |
| resourcekind           | VARCHAR(20)   | The type of resource that executed [system, user defined].  |
| dataservicename        | VARCHAR(255)  | The published data service name.  |
| description            | CLOB          | The actual client request or internal DV request.   |
| user                   | VARCHAR(255)  | The user name who connected for this session.   |
| domain                 | VARCHAR(255)  | The domain of the user who connected.   |
| fullname               | VARCHAR(255)  | The full name of the user who connected.  |
| lastname               | VARCHAR(255)  | The last name of the user who connected.  |
| firstname              | VARCHAR(255)  | The first name of the user who connected.   |
| mail                   | VARCHAR(255)  | The email of the user who connected.  |
| kpistatus              | VARCHAR(25)   | The KPImetrics SQL request processing status [SUCCESS, FAIL]  |
| kpidescriptiontemplate | VARCHAR(4000) | The template of the actual client request or internal DV request. All literal values have been removed in order to normalize the SQL so it can be used to compare with other requests on a generic basis. The contents are 4000 characters or less which means that queries can be pushed down to the database. |
| numDescriptions        | BIGINT        | The number of related varchar(4000) descriptions. Use this number to determine if searching kpidescriptiontemplate is required.   |

|                            |        |   |
|----------------------------|--------|---|
| kpidescriptiontemplateclob | CLOB   | The processed SQL template where all literal values have been removed and the string is greater than 4000 characters. Does not allow for database push-down for searching. Strings are brought into DV for searching. |
| numDescriptionsClob        | BIGINT | The number of related CLOB descriptions. Use this number to determine if searching numDescriptionsClob is required.   |

### vRequestExpandedAll Table

Details of a request expanded with user information. All records are displayed. Derived from metrics\_requests\_hist and metrics\_sessions\_hist.

| Column Name     | Column Type   | Definition   |
|-----------------|---------------|--|
| partition [k]   | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.                        |
| cluster         | VARCHAR(255)  | The name of the cluster or null if no cluster.   |
| nodehost [k]    | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]    | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |
| requestid [k]   | DECIMAL(19,0) | The unique request id that is the primary key of this table.   |
| parentid [fk]   | DECIMAL(19,0) | A foreign key back to the requestid within this table. Contains -1 when no parent reference.   |
| status          | VARCHAR(20)   | The status of the request [SUCCESS, FAILED].   |
| dataservicename | VARCHAR(255)  | The published data service name.   |
| resourcekind    | VARCHAR(20)   | The type of resource that executed [system, user defined].   |
| starttime [k]   | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867  |
| endtime         | TIMESTAMP     | The timestamp of when the request completed. E.g. 2020-01-06 10:19:36.899  |
| totalduration   | DECIMAL(19,0) | The total duration of the request measured in milli-seconds. Divide by 1000 to get minutes.  |
| serverduration  | DECIMAL(19,0) | The duration of the request within the server measured in milli-seconds. Divide by 1000 to get minutes.  |
| maxmemory       | DECIMAL(19,0) | The maximum amount of memory used by the request.  |
| maxdisk         | DECIMAL(19,0) | The maximum amount of disk used by the request. It is not good for a request to used disk.   |
| message         | CLOB          | The exception message if a request was not successful.   |
| rowsAffected    | DECIMAL(19,0) | The number of rows affected or returned. The value may be -1.  |
| requesttype     | VARCHAR(255)  | The type of request that is stored in the description field. "SQL"=select statement, "SQL Script"=call statement executed, "XSLT, Basic, or Streaming Transformation", "Java Procedure (built-in)", etc. |
| description     | CLOB          | The actual client request or internal DV request.  |
| sessionid [fk]  | DECIMAL(19,0) | A unique session id and foreign key to metrics_sessions_hist.  |
| type [k]        | VARCHAR(20)   | Indicates whether the session is of type 'begin' or 'end'.   |
| clienthost      | VARCHAR(255)  | Designates the client host name that connected to DV.  |
| sessiontype     | VARCHAR(40)   | Designates the type session connection [JDBC, HTTP, TASK, etc.].   |
| bytesfromclient | DECIMAL(19,0) | The total number of bytes received from the client host during this session.   |
| bytstoclient    | DECIMAL(19,0) | The total number of bytes sent to the client host during this session.   |
| userid          | DECIMAL(19,0) | The DV userid from the system.ALL_USERS tables.  |
| user            | VARCHAR(255)  | The user name who connected for this session.  |
| domain          | VARCHAR(255)  | The domain of the user who connected.  |
| fullname        | VARCHAR(255)  | The full name of the user who connected.   |
| lastname        | VARCHAR(255)  | The last name of the user who connected.   |
| firstname       | VARCHAR(255)  | The first name of the user who connected.  |

|                     |              |   |
|---------------------|--------------|---|
| employeenumber      | VARCHAR(255) | The employee number of the user who connected.          |
| mail                | VARCHAR(255) | The email of the user who connected.                    |
| telephonenumber     | VARCHAR(255) | The primary telephone number of the user who connected. |
| friendlycountryname | VARCHAR(255) | The friendly country name of the user who connected.    |

### vRequestExpandedUD Table

Details of a request expanded with user information. Only records of resourcekind='user defined' are displayed. Derived from metrics\_requests\_hist and metrics\_sessions\_hist.

| Column Name       | Column Type   | Definition   |
|-------------------|---------------|--|
| partition [k]     | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.                        |
| cluster           | VARCHAR(255)  | The name of the cluster or null if no cluster.   |
| nodehost [k]      | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]      | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |
| requestid [k]     | DECIMAL(19,0) | The unique request id that is the primary key of this table.   |
| parentid [fk]     | DECIMAL(19,0) | A foreign key back to the requestid within this table. Contains -1 when no parent reference.   |
| status            | VARCHAR(20)   | The status of the request [SUCCESS, FAILED].   |
| dataservicename   | VARCHAR(255)  | The published data service name.   |
| resourcekind      | VARCHAR(20)   | The type of resource that executed [system, user defined].   |
| starttime [k]     | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867  |
| endtime           | TIMESTAMP     | The timestamp of when the request completed. E.g. 2020-01-06 10:19:36.899  |
| requestdatemonths | DECIMAL(19,2) | The number of months difference between the request date and the current date.   |
| requestdatedays   | DECIMAL(19,0) | The number of days difference between the request date and the current date.   |
| totalduration     | DECIMAL(19,0) | The total duration of the request measured in milli-seconds. Divide by 1000 to get minutes.  |
| serverduration    | DECIMAL(19,0) | The duration of the request within the server measured in milli-seconds. Divide by 1000 to get minutes.  |
| maxmemory         | DECIMAL(19,0) | The maximum amount of memory used by the request.  |
| maxdisk           | DECIMAL(19,0) | The maximum amount of disk used by the request. It is not good for a request to used disk.   |
| message           | CLOB          | The exception message if a request was not successful.   |
| rowsAffected      | DECIMAL(19,0) | The number of rows affected or returned. The value may be -1.  |
| requesttype       | VARCHAR(255)  | The type of request that is stored in the description field. "SQL"=select statement, "SQL Script"=call statement executed, "XSLT, Basic, or Streaming Transformation", "Java Procedure (built-in)", etc. |
| description       | CLOB          | The actual client request or internal DV request.  |
| sessionid [fk]    | DECIMAL(19,0) | A unique session id and foreign key to metrics_sessions_hist.  |
| type [k]          | VARCHAR(20)   | Indicates whether the session is of type 'begin' or 'end'.   |
| clienthost        | VARCHAR(255)  | Designates the client host name that connected to DV.  |
| sessiontype       | VARCHAR(40)   | Designates the type session connection [JDBC, HTTP, TASK, etc.].   |
| bytesfromclient   | DECIMAL(19,0) | The total number of bytes received from the client host during this session.   |
| bytestoclient     | DECIMAL(19,0) | The total number of bytes sent to the client host during this session.   |
| userid            | DECIMAL(19,0) | The DV userid from the system.ALL_USERS tables.  |
| user              | VARCHAR(255)  | The user name who connected for this session.  |
| domain            | VARCHAR(255)  | The domain of the user who connected.  |
| fullname          | VARCHAR(255)  | The full name of the user who connected.   |



|                     |              |   |
|---------------------|--------------|---|
| lastname            | VARCHAR(255) | The last name of the user who connected.                |
| firstname           | VARCHAR(255) | The first name of the user who connected.               |
| employeenumber      | VARCHAR(255) | The employee number of the user who connected.          |
| mail                | VARCHAR(255) | The email of the user who connected.                    |
| telephonenumber     | VARCHAR(255) | The primary telephone number of the user who connected. |
| friendlycountryname | VARCHAR(255) | The friendly country name of the user who connected.    |

### vRequestDurationSqlTemplates Table

This view provides a way to view each request with additional information such as user, augmented LDAP user information, duration brokend down into a formatted string, days, minutes, hours, seconds and a SQL template that can be used to find other requests that are like this request. A SQL template is a normalized string of the actual requests with all literal values removed.

| Column Name          | Column Type   | Definition   |
|----------------------|---------------|--|
| partition [k]        | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.                        |
| cluster              | VARCHAR(255)  | The name of the cluster or null if no cluster.   |
| nodehost [k]         | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]         | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |
| requestid [k]        | DECIMAL(19,0) | The unique request id that is the primary key of this table.   |
| parentid [fk]        | DECIMAL(19,0) | A foreign key back to the requestid within this table. Contains -1 when no parent reference.   |
| sessionid [fk]       | DECIMAL(19,0) | A unique session id and foreign key to metrics_sessions_hist.  |
| requesttype          | VARCHAR(255)  | The type of request that is stored in the description field. "SQL"=select statement, "SQL Script"=call statement executed, "XSLT, Basic, or Streaming Transformation", "Java Procedure (built-in)", etc. |
| starttime [k]        | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867  |
| endtime              | TIMESTAMP     | The timestamp of when the request completed. E.g. 2020-01-06 10:19:36.899  |
| totalduration        | DECIMAL(19,0) | The total duration of the request measured in milli-seconds. Divide by 1000 to get minutes.  |
| totaldurationStr     | VARCHAR(255)  | The total duration formatted string such as 0 01:02:4.032  |
| totaldurationDays    | DECIMAL(12,4) | The total duration number of days.   |
| totaldurationMinutes | DECIMAL(12,4) | The total duration number of minutes.  |
| totaldurationHours   | DECIMAL(12,4) | The total duration number of hours.  |
| totaldurationSeconds | DECIMAL(12,4) | The total duration number of seconds including fraction of a second such as 4.032.   |
| serverduration       | DECIMAL(19,0) | The duration of the request within the server measured in milli-seconds. Divide by 1000 to get minutes.  |
| rowsAffected         | DECIMAL(19,0) | The number of rows affected or returned. The value may be -1.  |
| maxmemory            | DECIMAL(19,0) | The maximum amount of memory used by the request.  |
| maxdisk              | DECIMAL(19,0) | The maximum amount of disk used by the request. It is not good for a request to used disk.   |
| message              | CLOB          | The exception message if a request was not successful.   |
| status               | VARCHAR(20)   | The status of the user requests [SUCCESS, FAILED].   |
| resourcekind         | VARCHAR(20)   | The type of resource that executed [system, user defined].   |
| dataservicename      | VARCHAR(255)  | The published data service name.   |
| description          | CLOB          | The actual client request or internal DV request.  |

|                            |               |   |
|----------------------------|---------------|---|
| user                       | VARCHAR(255)  | The user name who connected for this session.   |
| domain                     | VARCHAR(255)  | The domain of the user who connected.   |
| fullname                   | VARCHAR(255)  | The full name of the user who connected.  |
| lastname                   | VARCHAR(255)  | The last name of the user who connected.  |
| firstname                  | VARCHAR(255)  | The first name of the user who connected.   |
| mail                       | VARCHAR(255)  | The email of the user who connected.  |
| kpistatus                  | VARCHAR(25)   | The KPImetrics SQL request processing status [SUCCESS, FAIL]  |
| kpidescriptiontemplate     | VARCHAR(4000) | The processed SQL template where all literal values have been removed and the string is less than or equal to 4000 characters. Allows for database push-down for searching. This is more efficient than CLOB for searching. |
| numDescriptions            | BIGINT        | The number of related varchar(4000) descriptions. Use this number to determine if searching kpidescriptiontemplate is required.   |
| kpidescriptiontemplateclob | CLOB          | The processed SQL template where all literal values have been removed and the string is greater than 4000 characters. Does not allow for database push-down for searching. Strings are brought into DV for searching.       |
| numDescriptionsClob        | BIGINT        | The number of related CLOB descriptions. Use this number to determine if searching numDescriptionsClob is required.   |

### vRequestsCountsByUser Table

A count of requests by user and date along with the following per request: avg rows, avg bytes from client, avg bytes to client, min total duration, max total duration, min server duration and max server duration.

| Column Name        | Column Type   | Definition   |
|--------------------|---------------|--|
| userid             | DECIMAL(19,0) | The DV userid from the system.ALL_USERS tables.  |
| user               | VARCHAR(255)  | The user name who connected for this session.  |
| domain             | VARCHAR(255)  | The domain of the user who connected.  |
| fullname           | VARCHAR(255)  | The full name of the user who connected.   |
| mail               | VARCHAR(255)  | The email of the user who connected.   |
| dataservicename    | VARCHAR(255)  | The published data service name.   |
| requestdate        | DATE          | The date [YYYY-MM-DD] of the request.  |
| requestcount       | BIGINT        | The number of requests that match the group by criteria. GROUP BY userid, "user", "domain", fullname, mail, dataservicename, CAST(starttime AS DATE), nodehost, nodeport |
| avgrowsaffected    | DECIMAL(19,0) | The average number of rows affected or returned. The value may be -1.  |
| avgbytesfromclient | DECIMAL(19,0) | The average number of bytes received from the client host during this session.   |
| avgbytetestoclient | DECIMAL(19,0) | The average number of bytes sent to the client host during this session.   |
| mintotalduration   | DECIMAL(19,0) | The minimum total duration.  |
| maxtotalduration   | DECIMAL(19,0) | The maximum total duration.  |
| minServerDuration  | DECIMAL(19,0) | The minimum duration of the request within the server measured in milli-seconds. Divide by 1000 to get minutes.  |
| maxServerDuration  | DECIMAL(19,0) | The maximum duration of the request within the server measured in milli-seconds. Divide by 1000 to get minutes.  |
| nodehost [k]       | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]       | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |

## vSessions Table

Details for user sessions. Equivalent to metrics\_sessions\_hist.

| Column Name         | Column Type   | Definition  |
|---------------------|---------------|---|
| partition [k]       | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| cluster             | VARCHAR(255)  | The name of the cluster or null if no cluster.  |
| nodehost [k]        | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]        | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |
| sessionid [fk]      | DECIMAL(19,0) | A unique session id and foreign key to metrics_sessions_hist.   |
| sessiontype         | VARCHAR(40)   | Designates the type session connection [JDBC, HTTP, TASK, etc.].  |
| clienthost          | VARCHAR(255)  | Designates the client host name that connected to DV.   |
| type [k]            | VARCHAR(20)   | Indicates whether the session is of type 'begin' or 'end'.  |
| logindate           | DATE          | The date [YYYY-MM-DD] of when the session began. Derived from logintime.  |
| logoutdate          | DATE          | The date [YYYY-MM-DD] of when the session ended. Derived from logouttime.   |
| logintime [k]       | TIMESTAMP     | The timestamp of when the session started.  |
| logouttime          | TIMESTAMP     | The timestamp of when the session ended   |
| status              | VARCHAR(20)   | The status of the session [ACTIVE, CLOSING].  |
| totalduration       | DECIMAL(19,0) | The total duration of the request measured in milli-seconds. Divide by 1000 to get minutes.   |
| totalRequests       | DECIMAL(19,0) | The total number of requests [metrics_requests_hist] executed for this session.   |
| bytestoclient       | DECIMAL(19,0) | The total number of bytes sent to the client host during this session.  |
| bytesfromclient     | DECIMAL(19,0) | The total number of bytes received from the client host during this session.  |
| userid              | DECIMAL(19,0) | The DV userid from the system.ALL_USERS tables.   |
| user                | VARCHAR(255)  | The user name who connected for this session.   |
| domain              | VARCHAR(255)  | The domain of the user who connected.   |
| fullname            | VARCHAR(255)  | The full name of the user who connected.  |
| lastname            | VARCHAR(255)  | The last name of the user who connected.  |
| firstname           | VARCHAR(255)  | The first name of the user who connected.   |
| mail                | VARCHAR(255)  | The email of the user who connected.  |
| employeenumber      | VARCHAR(255)  | The employee number of the user who connected.  |
| telephonenumber     | VARCHAR(255)  | The primary telephone number of the user who connected.   |
| friendlycountryname | VARCHAR(255)  | The friendly country name of the user who connected.  |

## vSessionvUserRequests Table

Details on requests generated by each user session.

| Column Name   | Column Type  | Definition  |
|---------------|--------------|---|
| partition [k] | SMALLINT     | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| cluster       | VARCHAR(255) | The name of the cluster or null if no cluster.  |
| nodehost [k]  | VARCHAR(255) | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]  | INTEGER      | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |
| logindate     | DATE         | The date [YYYY-MM-DD] of when the session began. Derived from logintime.  |
| user          | VARCHAR(255) | The user name who connected for this session.   |
| domain        | VARCHAR(255) | The domain of the user who connected.   |

|                      |               |  |
|----------------------|---------------|--|
| clienthost           | VARCHAR(255)  | Designates the client host name that connected to DV.  |
| sessiontype          | VARCHAR(40)   | Designates the type session connection [JDBC, HTTP, TASK, etc.].   |
| sessioncount         | BIGINT        | The count of (sessionid) from metrics_sessions_hist where type='end' and grouped by cluster, nodehost, nodeport, logintime, user, domain, clienthost, sessiontype, lastname, firstname, fullname, employeeenumber, mail. |
| requestcount         | BIGINT        | The count of (requestid) from metrics_requests_hist where type='end' and grouped by cluster, nodehost, nodeport, logintime, user, domain, clienthost, sessiontype, lastname, firstname, fullname, employeeenumber, mail. |
| totalduration        | DECIMAL(25,0) | The total duration of the request measured in milli-seconds. Divide by 1000 to get minutes.  |
| totalbytetestclient  | DECIMAL(25,0) | The total number of bytes sent to the client host during this session.   |
| totalbytesfromclient | DECIMAL(25,0) | The total number of bytes received from the client host during this session.   |
| lastname             | VARCHAR(255)  | The full name of the user who connected.   |
| firstname            | VARCHAR(255)  | The last name of the user who connected.   |
| fullname             | VARCHAR(255)  | The first name of the user who connected.  |
| employeeenumber      | VARCHAR(255)  | The employee number of the user who connected.   |
| mail                 | VARCHAR(255)  | The email of the user who connected.   |

## resource Definitions

### vAllResources\_GroupBy\_NodehostNodeport Table

Report that provides a count by nodehost and nodeport for the resources that exist in METRICS\_ALL\_RESOURCES

| Column Name | Column Type  | Definition  |
|-------------|--------------|---|
| nodehost    | VARCHAR(255) | The host name which comes from GetProperty('SERVER_HOSTNAME').                |
| nodeport    | INTEGER      | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1. |
| cnt         | BIGINT       | The row count for the nodehost and nodeport.                                  |

### vAllResources Table

Report of all resources currently in the DV repository. Derived from METRICS\_ALL\_RESOURCES and is loaded full each time based on a trigger. The old copy is deleted.

| Column Name      | Column Type   | Definition  |
|------------------|---------------|---|
| loaddate         | TIMESTAMP     | The timestamp of when the record was inserted or loaded.  |
| resourceorigin   | VARCHAR(30)   | The original DV system table in which the resource originated from.<br>[ALL_TABLES  ALL_PROCEDURES ALL_WSDL_OPERATIONS ALL_RESOURCES  ALL_COLUMNS ALL_PARAMETERS] |
| resourceid       | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".  |
| resourcename     | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.   |
| parentpath       | VARCHAR(4000) | The parent path of the resource.  |
| resourcepath [k] | VARCHAR(4000) | The DV path to the resource.  |
| resourcetype [k] | VARCHAR(40)   | The DV resource type. If published, then it will be LINK. Also maybe TABLE or PRODEDURE.  |
| resourcesubtype  | VARCHAR(40)   | The DV resource subtype. The further qualifies the precise type of resource. E.g. NONE, SQL_TABLE (view), DATABASE_TABLE (datasource table),                      |

|                  |               |   |
|------------------|---------------|---|
|                  |               | SQL_SCRIPT_PROCEDURE (DV procedure), OPERATION_PROCEDURE (web service procedure), plus many more.   |
| resourcekindtype | VARCHAR(40)   | The type of resource the published "LINK" is pointing to such as [TABLE, PROCEDURE].  |
| ownerid          | DECIMAL(19,0) | The resource owner unique id.   |
| ownername        | VARCHAR(60)   | The resource owner name.  |
| ownerdomain      | VARCHAR(255)  | The domain of the ownername   |
| guid             | VARCHAR(1024) | The guid of the resource path. Eg. cff5fe78-c3c5-4a81-b134-d497cea5351e   |
| datasourcetype   | VARCHAR(255)  | The type of published datasource [VirtualRelational   VirtualWsdI   CompositeWebService].   |
| dataservicename  | VARCHAR(255)  | The published data service name.  |
| catalogname      | VARCHAR(255)  | The name of the published catalog or null if not applicable.  |
| schemaname       | VARCHAR(255)  | The name of the published schema or null if not applicable.   |
| categoryname     | VARCHAR(255)  | The category name of the resource. A normalized name from either the resource name, parent name or grand-parent name.<br>ALL_TABLES: TABLE_NAME or SCHEMA_NAME if not null<br>ALL_COLUMNS: TABLE_NAME or SCHEMA_NAME if not null<br>ALL_PROCEDURES: PROCEDURE_NAME or SCHEMA_NAME if not null<br>ALL_PARAMETERS: PROCEDURE_NAME or SCHEMA_NAME if not null<br>ALL_WSDL_OPERATIONS: If legacy web service then it is the service name otherwise it is the parent folder name of the web service. If no parent folder name then it is the web service datasource name.<br>e.g. Legacy: /services/webservices/system/admin/ <b>resource</b> /operations/getUsedResources<br>e.g. Non-Legacy: /services/webservices/GrandParent/ <b>Parent</b> /CustomerWS/LookupProduct<br>e.g. Non-Legacy: /services/webservices/ <b>CustomerWS</b> /LookupProduct<br>ALL_RESOURCES: null |
| columnid         | DECIMAL(19,0) | The DV column unique resource id.   |
| columnname       | VARCHAR(255)  | The name of the column.   |
| columnmtype      | VARCHAR(255)  | The column type base such as varchar, numeric, decimal.   |
| columnsize       | DECIMAL(19,0) | The column type size such as 255 if varchar(255) or 19 if decimal(19,2).  |
| columnscale      | DECIMAL(19,0) | The column type scale such as 2 if decimal(19,2).   |
| columnorder      | DECIMAL(9,0)  | The order in which the column appears in the resource.  |
| columnndirection | DECIMAL(9,0)  | The column direction such [4=OUT [table or scalar procedure, 1=IN, 3=CURSOR OUT]  |
| annotation       | CLOB          | The resource annotation.  |
| nodehost [k]     | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]     | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |

### vResourceCount Table

Report of the count of resources where resourcekind='user defined'. Derived from metrics\_resources\_usage\_hist.

| Column Name          | Column Type   | Definition  |
|----------------------|---------------|---|
| resourcepath [k]     | VARCHAR(4000) | The DV path to the resource.  |
| resourcekind         | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.                                 |
| resourcekindtype [k] | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.                                 |
| parentpath           | VARCHAR(4000) | The parent path of the resource.  |
| datasourcetype       | VARCHAR(255)  | The type of published datasource [VirtualRelational   VirtualWsdI   CompositeWebService]. |
| dataservicename      | VARCHAR(255)  | The published data service name.  |

|              |              |   |
|--------------|--------------|---|
| categoryname | VARCHAR(255) | <p>The category name of the resource. A normalized name from either the resource name, parent name or grand-parent name.</p> <p>ALL_TABLES: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_COLUMNS: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PROCEDURES: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PARAMETERS: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_WSDL_OPERATIONS: If legacy web service then it is the service name otherwise it is the parent folder name of the web service. If no parent folder name then it is the web service dataservice name.</p> <p>e.g. Legacy: /services/webservices/system/admin/<b>resource</b>/operations/getUsedResources</p> <p>e.g. Non-Legacy: /services/webservices/GrandParent/<b>Parent</b>/CustomerWS/LookupProduct</p> <p>e.g. Non-Legacy: /services/webservices/<b>CustomerWS</b>/LookupProduct</p> <p>ALL_RESOURCES: null</p> |
| nodehost [k] | VARCHAR(255) | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k] | INTEGER      | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |
| countname    | INTEGER      | The number of resources for a given resource name.  |

### vResourceCountDate Table

Report of the count of resources by date where resourcekind='user defined'. Derived from metrics\_resources\_usage\_hist.

| Column Name      | Column Type   | Definition  |
|------------------|---------------|---|
| partition [k]    | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.   |
| requestdate      | DATE          | The date [YYYY-MM-DD] of the request.   |
| resourceid       | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".  |
| resourcepath [k] | VARCHAR(4000) | The DV path to the resource.  |
| resourcename     | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.   |
| resourcetype [k] | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| parentpath       | VARCHAR(4000) | The parent path of the resource.  |
| resourcekind     | VARCHAR(20)   | The type of resource that executed [system, user defined].  |
| datasourcetype   | VARCHAR(255)  | The type of published datasource [VirtualRelational   VirtualWsd   CompositeWebService].  |
| dataservicename  | VARCHAR(255)  | The published data service name.  |
| categoryname     | VARCHAR(255)  | <p>The category name of the resource. A normalized name from either the resource name, parent name or grand-parent name.</p> <p>ALL_TABLES: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_COLUMNS: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PROCEDURES: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PARAMETERS: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_WSDL_OPERATIONS: If legacy web service then it is the service name otherwise it is the parent folder name of the web service. If no parent folder name then it is the web service dataservice name.</p> <p>e.g. Legacy: /services/webservices/system/admin/<b>resource</b>/operations/getUsedResources</p> <p>e.g. Non-Legacy: /services/webservices/GrandParent/<b>Parent</b>/CustomerWS/LookupProduct</p> <p>e.g. Non-Legacy: /services/webservices/<b>CustomerWS</b>/LookupProduct</p> <p>ALL_RESOURCES: null</p> |
| nodehost [k]     | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |

|                   |               |  |
|-------------------|---------------|--|
| nodeport [k]      | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |
| countname         | INTEGER       | The number of resources for a given resource name.                             |
| requestdatemonths | DECIMAL(19,2) | The number of months difference between the request date and the current date. |
| requestdatedays   | DECIMAL(19,0) | The number of days difference between the request date and the current date.   |

### vResourceCountUsers Table

Report of the count of resources by user where resourcekind='user defined'. Derived from metrics\_resources\_usage\_hist.

| Column Name      | Column Type   | Definition   |
|------------------|---------------|--|
| user             | VARCHAR(255)  | The user name who connected for this session.  |
| domain           | VARCHAR(255)  | The domain of the user who connected.  |
| fullname         | VARCHAR(255)  | The full name of the user who connected.   |
| mail             | VARCHAR(255)  | The email of the user who connected.   |
| resourceid       | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".   |
| resourcepath [k] | VARCHAR(4000) | The DV path to the resource.   |
| resourcecename   | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.  |
| resourcetype [k] | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.  |
| parentpath       | VARCHAR(4000) | The parent path of the resource.   |
| resourcekind     | VARCHAR(20)   | The type of resource that executed [system, user defined].   |
| datasourcetype   | VARCHAR(255)  | The type of published datasource [VirtualRelational   VirtualWsd   CompositeWebService].   |
| dataservicename  | VARCHAR(255)  | The published data service name.   |
| categoryname     | VARCHAR(255)  | The category name of the resource. A normalized name from either the resource name, parent name or grand-parent name.<br>ALL_TABLES: TABLE_NAME or SCHEMA_NAME if not null<br>ALL_COLUMNS: TABLE_NAME or SCHEMA_NAME if not null<br>ALL_PROCEDURES: PROCEDURE_NAME or SCHEMA_NAME if not null<br>ALL_PARAMETERS: PROCEDURE_NAME or SCHEMA_NAME if not null<br>ALL_WSDL_OPERATIONS: If legacy web service then it is the service name otherwise it is the parent folder name of the web service. If no parent folder name then it is the web service dataservice name.<br>e.g. Legacy: /services/webservices/system/admin/ <b>resource</b> /operations/getUsedResources<br>e.g. Non-Legacy: /services/webservices/GrandParent/ <b>Parent</b> /CustomerWS/LookupProduct<br>e.g. Non-Legacy: /services/webservices/ <b>CustomerWS</b> /LookupProduct<br>ALL_RESOURCES: null |
| nodehost [k]     | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]     | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |
| countname        | INTEGER       | The number of resources for a given resource name.   |

### vResourceCountUsersDate Table

Report of the count of resources by user and date where resourcekind='user defined'. Derived from metrics\_resources\_usage\_hist.

| Column Name   | Column Type | Definition  |
|---------------|-------------|---|
| partition [k] | SMALLINT    | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |



|                   |               |   |
|-------------------|---------------|---|
| user              | VARCHAR(255)  | The user name who connected for this session.   |
| domain            | VARCHAR(255)  | The domain of the user who connected.   |
| fullname          | VARCHAR(255)  | The full name of the user who connected.  |
| mail              | VARCHAR(255)  | The email of the user who connected.  |
| requestdate       | DATE          | The date [YYYY-MM-DD] of the request.   |
| resourceid        | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".  |
| resourcepath [k]  | VARCHAR(4000) | The DV path to the resource.  |
| resourcename      | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.   |
| resourcetype [k]  | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| parentpath        | VARCHAR(4000) | The parent path of the resource.  |
| resourcekind      | VARCHAR(20)   | The type of resource that executed [system, user defined].  |
| datasourcetype    | VARCHAR(255)  | The type of published datasource [VirtualRelational   VirtualWsdI   CompositeWebService].   |
| dataservicename   | VARCHAR(255)  | The published data service name.  |
| categoryname      | VARCHAR(255)  | <p>The category name of the resource. A normalized name from either the resource name, parent name or grand-parent name.</p> <p>ALL_TABLES: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_COLUMNS: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PROCEDURES: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PARAMETERS: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_WSDL_OPERATIONS: If legacy web service then it is the service name otherwise it is the parent folder name of the web service. If no parent folder name then it is the web service dataservice name.</p> <p>e.g. Legacy: /services/webservices/system/admin/<b>resource</b>/operations/getUsedResources</p> <p>e.g. Non-Legacy: /services/webservices/GrandParent/<b>Parent</b>/CustomerWS/LookupProduct</p> <p>e.g. Non-Legacy: /services/webservices/<b>CustomerWS</b>/LookupProduct</p> <p>ALL_RESOURCES: null</p> |
| nodehost [k]      | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]      | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |
| countname         | INTEGER       | The number of resources for a given resource name.  |
| requestdatemonths | DECIMAL(19,2) | The number of months difference between the request date and the current date.  |
| requestdatedays   | DECIMAL(19,0) | The number of days difference between the request date and the current date.  |

### vResourceDistinctPublishedDatabases Table

This table returns a list of all resources published under a database on the DV server derived from metrics\_resources\_usage\_hist.

| Column Name      | Column Type   | Definition  |
|------------------|---------------|---|
| resourcename     | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.   |
| resourcepath [k] | VARCHAR(4000) | The DV path to the resource.  |
| resourcetype [k] | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| datasourcetype   | VARCHAR(255)  | The type of published datasource [VirtualRelational   VirtualWsdI   CompositeWebService].   |
| dataservicename  | VARCHAR(255)  | The published data service name.  |
| categoryname     | VARCHAR(255)  | <p>The category name of the resource. A normalized name from either the resource name, parent name or grand-parent name.</p> <p>ALL_TABLES: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_COLUMNS: TABLE_NAME or SCHEMA_NAME if not null</p> |

|  |  |  |
|--|--|--|
|  |  | <p>ALL_PROCEEDURES: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PARAMETERS: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_WSDL_OPERATIONS: If legacy web service then it is the service name otherwise it is the parent folder name of the web service. If no parent folder name then it is the web service dataservice name.</p> <p>e.g. Legacy: /services/webservices/system/admin/<b>resource</b>/operations/getUsedResources</p> <p>e.g. Non-Legacy: /services/webservices/GrandParent/<b>Parent</b>/CustomerWS/LookupProduct</p> <p>e.g. Non-Legacy: /services/webservices/<b>CustomerWS</b>/LookupProduct</p> <p>ALL_RESOURCES: null</p> |
|--|--|--|

### vResourceDistinctPublishedResources Table

This table returns a list of all distinct resources published under a database on the DV server derived from metrics\_resources\_usage\_hist.

| Column Name      | Column Type   | Definition   |
|------------------|---------------|--|
| resourcename     | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.  |
| resourcepath [k] | VARCHAR(4000) | The DV path to the resource.   |
| resourcetype [k] | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.  |
| datasourcetype   | VARCHAR(255)  | The type of published datasource [VirtualRelational   VirtualWsdI   CompositeWebService].  |
| dataservicename  | VARCHAR(255)  | The published data service name.   |
| categoryname     | VARCHAR(255)  | <p>The category name of the resource. A normalized name from either the resource name, parent name or grand-parent name.</p> <p>ALL_TABLES: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_COLUMNS: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PROCEEDURES: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PARAMETERS: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_WSDL_OPERATIONS: If legacy web service then it is the service name otherwise it is the parent folder name of the web service. If no parent folder name then it is the web service dataservice name.</p> <p>e.g. Legacy: /services/webservices/system/admin/<b>resource</b>/operations/getUsedResources</p> <p>e.g. Non-Legacy: /services/webservices/GrandParent/<b>Parent</b>/CustomerWS/LookupProduct</p> <p>e.g. Non-Legacy: /services/webservices/<b>CustomerWS</b>/LookupProduct</p> <p>ALL_RESOURCES: null</p> |

### vResourceDistinctPublishedWebServices Table

This table returns a list of all resources published as a web service operation on the DV server derived from metrics\_resources\_usage\_hist.

| Column Name      | Column Type   | Definition  |
|------------------|---------------|---|
| resourcename     | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.   |
| resourcepath [k] | VARCHAR(4000) | The DV path to the resource.  |
| resourcetype [k] | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| datasourcetype   | VARCHAR(255)  | The type of published datasource [VirtualRelational   VirtualWsdI   CompositeWebService].                             |
| dataservicename  | VARCHAR(255)  | The published data service name.  |
| categoryname     | VARCHAR(255)  | The category name of the resource. A normalized name from either the resource name, parent name or grand-parent name. |

|  |  |  |
|--|--|--|
|  |  | <p>ALL_TABLES: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_COLUMNS: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PROCEDURES: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PARAMETERS: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_WSDL_OPERATIONS: If legacy web service then it is the service name otherwise it is the parent folder name of the web service. If no parent folder name then it is the web service dataservice name.</p> <p>e.g. Legacy: /services/webservices/system/admin/<b>resource</b>/operations/getUsedResources</p> <p>e.g. Non-Legacy: /services/webservices/GrandParent/<b>Parent</b>/CustomerWS/LookupProduct</p> <p>e.g. Non-Legacy: /services/webservices/<b>CustomerWS</b>/LookupProduct</p> <p>ALL_RESOURCES: null</p> |
|--|--|--|

### vResourceDistinctResources Table

This table returns a list of all distinct resources on the DV server derived from metrics\_resources\_usage\_hist.

| Column Name      | Column Type   | Definition  |
|------------------|---------------|---|
| resourcename     | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.   |
| resourcepath [k] | VARCHAR(4000) | The DV path to the resource.  |
| resourcetype [k] | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| datasourcetype   | VARCHAR(255)  | The type of published datasource [VirtualRelational   VirtualWsdI   CompositeWebService].   |
| dataservicename  | VARCHAR(255)  | The published data service name.  |
| categoryname     | VARCHAR(255)  | <p>The category name of the resource. A normalized name from either the resource name, parent name or grand-parent name.</p> <p>ALL_TABLES: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_COLUMNS: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PROCEDURES: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PARAMETERS: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_WSDL_OPERATIONS: If legacy web service then it is the service name otherwise it is the parent folder name of the web service. If no parent folder name then it is the web service dataservice name.</p> <p>e.g. Legacy: /services/webservices/system/admin/<b>resource</b>/operations/getUsedResources</p> <p>e.g. Non-Legacy: /services/webservices/GrandParent/<b>Parent</b>/CustomerWS/LookupProduct</p> <p>e.g. Non-Legacy: /services/webservices/<b>CustomerWS</b>/LookupProduct</p> <p>ALL_RESOURCES: null</p> |

### vResourcesPublishedNotUsed Table

Report of all published resources present on the DV server that have not been used derived from METRICS\_ALL\_RESOURCES, metrics\_resources\_usage\_hist.

| Column Name      | Column Type   | Definition  |
|------------------|---------------|---|
| resourcename     | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name. |
| resourcepath [k] | VARCHAR(4000) | The DV path to the resource.                              |
| resourcetype [k] | VARCHAR(40)   | The DV resource type. If published, then it will be LINK. |
| parentpath       | VARCHAR(4000) | The parent path of the resource.                          |
| dataservicename  | VARCHAR(255)  | The published data service name.                          |

|              |              |   |
|--------------|--------------|---|
| categoryname | VARCHAR(255) | <p>The category name of the resource. A normalized name from either the resource name, parent name or grand-parent name.</p> <p>ALL_TABLES: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_COLUMNS: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PROCEDURES: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PARAMETERS: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_WSDL_OPERATIONS: If legacy web service then it is the service name otherwise it is the parent folder name of the web service. If no parent folder name then it is the web service dataservice name.</p> <p>e.g. Legacy: /services/webservices/system/admin/<b>resource</b>/operations/getUsedResources</p> <p>e.g. Non-Legacy: /services/webservices/GrandParent/<b>Parent</b>/CustomerWS/LookupProduct</p> <p>e.g. Non-Legacy: /services/webservices/<b>CustomerWS</b>/LookupProduct</p> <p>ALL_RESOURCES: null</p> |
|--------------|--------------|---|

### vResourceUsageAll Table

Report of all resources historically where resourcekind='user defined' and 'system'. Derived from METRICS\_ALL\_RESOURCES, metrics\_resources\_usage\_hist.

| Column Name       | Column Type   | Definition  |
|-------------------|---------------|---|
| partition [k]     | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.   |
| cluster           | VARCHAR(255)  | The name of the cluster or null if no cluster.  |
| nodehost [k]      | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]      | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |
| parentid [fk]     | DECIMAL(19,0) | A foreign key back to the requestid within this table. Contains -1 when no parent reference.  |
| requestid [k]     | DECIMAL(19,0) | The unique request id that is the primary key of this table.  |
| sessionid [fk]    | DECIMAL(19,0) | A unique session id and foreign key to metrics_sessions_hist.   |
| requestdate       | DATE          | The date [YYYY-MM-DD] of the request.   |
| starttime [k]     | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867   |
| endtime           | TIMESTAMP     | The timestamp of when the request completed. E.g. 2020-01-06 10:19:36.899   |
| requestdatemonths | DECIMAL(19,2) | The number of months difference between the request date and the current date.  |
| requestdatedays   | DECIMAL(19,0) | The number of days difference between the request date and the current date.  |
| categoryname      | VARCHAR(255)  | <p>The category name of the resource. A normalized name from either the resource name, parent name or grand-parent name.</p> <p>ALL_TABLES: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_COLUMNS: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PROCEDURES: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PARAMETERS: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_WSDL_OPERATIONS: If legacy web service then it is the service name otherwise it is the parent folder name of the web service. If no parent folder name then it is the web service dataservice name.</p> <p>e.g. Legacy: /services/webservices/system/admin/<b>resource</b>/operations/getUsedResources</p> <p>e.g. Non-Legacy: /services/webservices/GrandParent/<b>Parent</b>/CustomerWS/LookupProduct</p> <p>e.g. Non-Legacy: /services/webservices/<b>CustomerWS</b>/LookupProduct</p> <p>ALL_RESOURCES: null</p> |
| dataservicename   | VARCHAR(255)  | The published data service name.  |

|                     |               |   |
|---------------------|---------------|---|
| datasourcepath      | VARCHAR(255)  | The DV path to the published datasource/dataservice [/services/databases/<name>, /services/webservices/<path name>] |
| datasourcetype      | VARCHAR(255)  | The type of published datasource [VirtualRelational   VirtualWsdI   CompositeWebService].                           |
| resourcekind        | VARCHAR(20)   | The type of resource that executed [system, user defined].  |
| resourceguid        | VARCHAR(40)   | The guid of the resource path. Eg. cff5fe78-c3c5-4a81-b134-d497cea5351e   |
| resourceid          | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".                            |
| resourcetype [k]    | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| resourcename        | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.   |
| parentname          | VARCHAR(255)  | The parent name of the resource. A.k.a. schema name if from published database.                                     |
| grandparentname     | VARCHAR(255)  | The grand-parent name of the resource. A.k.a. catalog name if from published database.                              |
| resourcepath [k]    | VARCHAR(4000) | The DV path to the resource.  |
| parentpath          | VARCHAR(4000) | The parent path of the resource.  |
| userid              | DECIMAL(19,0) | The DV userid from the system.ALL_USERS tables.   |
| user                | VARCHAR(255)  | The user name who connected for this session.   |
| domain              | VARCHAR(255)  | The domain of the user who connected.   |
| group               | VARCHAR(255)  | The group of the user who connected.  |
| fullname            | VARCHAR(255)  | The full name of the user who connected.  |
| lastname            | VARCHAR(255)  | The last name of the user who connected.  |
| firstname           | VARCHAR(255)  | The first name of the user who connected.   |
| mail                | VARCHAR(255)  | The email of the user who connected.  |
| employeenumber      | VARCHAR(255)  | The employee number of the user who connected.  |
| telephonenumber     | VARCHAR(255)  | The primary telephone number of the user who connected.   |
| friendlycountryname | VARCHAR(255)  | The friendly country name of the user who connected.  |

### vResourceUsageUD Table

Report of all resources where resourcekind='user defined'. Derived from metrics\_resources\_usage\_hist.

| Column Name       | Column Type   | Definition  |
|-------------------|---------------|---|
| partition [k]     | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| cluster           | VARCHAR(255)  | The name of the cluster or null if no cluster.  |
| nodehost [k]      | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]      | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |
| parentid [fk]     | DECIMAL(19,0) | A foreign key back to the requestid within this table. Contains -1 when no parent reference.  |
| requestid [k]     | DECIMAL(19,0) | The unique request id that is the primary key of this table.  |
| sessionid [fk]    | DECIMAL(19,0) | A unique session id and foreign key to metrics_sessions_hist.   |
| requestdate       | DATE          | The date [YYYY-MM-DD] of the request.   |
| starttime [k]     | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867   |
| endtime           | TIMESTAMP     | The timestamp of when the request completed. E.g. 2020-01-06 10:19:36.899   |
| requestdatemonths | DECIMAL(19,2) | The number of months difference between the request date and the current date.  |
| requestdatedays   | DECIMAL(19,0) | The number of days difference between the request date and the current date.  |
| categoryname      | VARCHAR(255)  | The category name of the resource. A normalized name from either the resource name, parent name or grand-parent name.<br>ALL_TABLES: TABLE_NAME or SCHEMA_NAME if not null        |

|                     |               |   |
|---------------------|---------------|---|
|                     |               | <p>ALL_COLUMNS: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PROCEDURES: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PARAMETERS: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_WSDL_OPERATIONS: If legacy web service then it is the service name otherwise it is the parent folder name of the web service. If no parent folder name then it is the web service dataservice name.</p> <p>e.g. Legacy: /services/webservices/system/admin/<b>resource</b>/operations/getUsedResources</p> <p>e.g. Non-Legacy: /services/webservices/GrandParent/<b>Parent</b>/CustomerWS/LookupProduct</p> <p>e.g. Non-Legacy: /services/webservices/<b>CustomerWS</b>/LookupProduct</p> <p>ALL_RESOURCES: null</p> |
| dataservicename     | VARCHAR(255)  | The published data service name.  |
| datasourcepath      | VARCHAR(255)  | The DV path to the published datasource/dataservice [/services/databases/<name>, /services/webservices/<path name>]   |
| datasourcetype      | VARCHAR(255)  | The type of published datasource [VirtualRelational   VirtualWsdI   CompositeWebService].   |
| resourcekind        | VARCHAR(20)   | The type of resource that executed [system, user defined].  |
| resourceguid        | VARCHAR(40)   | The guid of the resource path. Eg. cff5fe78-c3c5-4a81-b134-d497cea5351e   |
| resourceid          | DECIMAL(19,0) | The unique resource id which comes from the DV system tables listed in "resourceorigin".  |
| resourcetype [k]    | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| resourcename        | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.   |
| parentname          | VARCHAR(255)  | The parent name of the resource. A.k.a. schema name if from published database.   |
| grandparentname     | VARCHAR(255)  | The grand-parent name of the resource. A.k.a. catalog name if from published database.  |
| resourcepath [k]    | VARCHAR(4000) | The DV path to the resource.  |
| parentpath          | VARCHAR(4000) | The parent path of the resource.  |
| userid              | DECIMAL(19,0) | The DV userid from the system.ALL_USERS tables.   |
| user                | VARCHAR(255)  | The user name who connected for this session.   |
| domain              | VARCHAR(255)  | The domain of the user who connected.   |
| group               | VARCHAR(255)  | The group of the user who connected.  |
| fullname            | VARCHAR(255)  | The full name of the user who connected.  |
| lastname            | VARCHAR(255)  | The last name of the user who connected.  |
| firstname           | VARCHAR(255)  | The first name of the user who connected.   |
| mail                | VARCHAR(255)  | The email of the user who connected.  |
| employeenumber      | VARCHAR(255)  | The employee number of the user who connected.  |
| telephonenumber     | VARCHAR(255)  | The primary telephone number of the user who connected.   |
| friendlycountryname | VARCHAR(255)  | The friendly country name of the user who connected.  |

## resourceDataCount Definitions

### getResourceDataCount Procedure

This procedure returns a list of the top N most frequently accessed resources for the specified data range. Each row includes a count of the number of rows of data each resource contains.

| Column Name | Column Type | Definition                                |
|-------------|-------------|---|
| topN        | INTEGER     | IN – The top number of records to return. |
| fromdate    | DATE        | IN - The from date range.                 |
| todate      | DATE        | IN - The to date range.                   |

|                    |               |   |
|--------------------|---------------|---|
| resourcepath [k]   | VARCHAR(4000) | OUT - The DV path to the resource.  |
| resourcecename     | VARCHAR(255)  | OUT - The name of the resource. A.k.a. table or procedure name.   |
| resourcecetype [k] | VARCHAR(40)   | OUT - The DV resource type. If published, then it will be LINK.   |
| parentpath         | VARCHAR(4000) | OUT - The parent path of the resource.  |
| dataservicename    | VARCHAR(255)  | OUT - The published data service name.  |
| categoryname       | VARCHAR(255)  | <p>The category name of the resource. A normalized name from either the resource name, parent name or grand-parent name.</p> <p>ALL_TABLES: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_COLUMNS: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PROCEDURES: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PARAMETERS: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_WSDL_OPERATIONS: If legacy web service then it is the service name otherwise it is the parent folder name of the web service. If no parent folder name then it is the web service dataservice name.</p> <p>e.g. Legacy: /services/webservices/system/admin/<b>resource</b>/operations/getUsedResources</p> <p>e.g. Non-Legacy: /services/webservices/GrandParent/<b>Parent</b>/CustomerWS/LookupProduct</p> <p>e.g. Non-Legacy: /services/webservices/<b>CustomerWS</b>/LookupProduct</p> <p>ALL_RESOURCES: null</p> |
| resourceusagecount | BIGINT        | OUT – The number of resources.  |
| datarowcount       | BIGINT        | OUT – The data count for the resource.  |

## resourceMetadata Definitions

### vResourceListAllPublishedResources Table

This table returns a list of all published resources present on the DV server metadata catalog derived from the cached METRICS\_ALL\_RESOURCES.

| Column Name        | Column Type   | Definition  |
|--------------------|---------------|---|
| resourcecename     | VARCHAR(255)  | The name of the resource. A.k.a. table or procedure name.   |
| resourcepath [k]   | VARCHAR(4000) | The DV path to the resource.  |
| resourcecetype [k] | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.   |
| publishedtype      | VARCHAR(11)   | The type of datasource that the published resource belongs to [DATABASE WEB_SERVICE]  |
| datasourcetype     | VARCHAR(255)  | The type of published datasource [VirtualRelational   VirtualWsdI   CompositeWebService].   |
| dataservicename    | VARCHAR(255)  | The published data service name.  |
| categoryname       | VARCHAR(255)  | <p>The category name of the resource. A normalized name from either the resource name, parent name or grand-parent name.</p> <p>ALL_TABLES: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_COLUMNS: TABLE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PROCEDURES: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_PARAMETERS: PROCEDURE_NAME or SCHEMA_NAME if not null</p> <p>ALL_WSDL_OPERATIONS: If legacy web service then it is the service name otherwise it is the parent folder name of the web service. If no parent folder name then it is the web service dataservice name.</p> <p>e.g. Legacy: /services/webservices/system/admin/<b>resource</b>/operations/getUsedResources</p> <p>e.g. Non-Legacy: /services/webservices/GrandParent/<b>Parent</b>/CustomerWS/LookupProduct</p> <p>e.g. Non-Legacy: /services/webservices/<b>CustomerWS</b>/LookupProduct</p> <p>ALL_RESOURCES: null</p> |



## systemUsage Definitions

### vCpuMemUtilization Table

Details on system CPU and memory utilization. Derived from METRICS\_CPU\_MEMORY\_CHECKER.

| Column Name      | Column Type   | Definition   |
|------------------|---------------|--|
| partition [k]    | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.  |
| currenttimestamp | TIMESTAMP     | The current event timestamp.   |
| cpuusedpercent   | DECIMAL(10,2) | The system CPU utilization (used) percent.   |
| memoryusedmb     | DECIMAL(10,2) | The system memory used in MB. This will always be showing high since DV takes the configured amount of memory at startup time. This is only a good guage of potential other processes running on the same server as DV if a large fluctuation is detected. |
| memoryavailmb    | DECIMAL(10,2) | The system memory available in MB. Counterpart to the above statement.   |
| nodehost [k]     | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]     | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |

### vDatasourceConnectionChanges Table

Details on data sources connection changes. Derived from METRICS\_SYS\_DATASOURCES which was cached from /services/databases/system/SYS\_DATASOURCES.

| Column Name            | Column Type   | Definition   |
|------------------------|---------------|--|
| partition [k]          | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.          |
| historyid [pk]         | DECIMAL(19,0) | A unique generated id for this row.  |
| previoushistoryid [fk] | DECIMAL(19,0) | A foreign key back to the same table and the historyid which connects one record to another record in a sort of a lineage of history which allows the viewer to place the events in order. |
| iscurrent              | INTEGER       | Indicates the current datasource history record. 1=current. 0=not current.   |
| isdeleted              | INTEGER       | Indicates whether the datasource has been deleted since the last time the Cache_SYS_DATASOURCES was executed. 1=deleted. 0=not deleted.  |
| eventtime              | TIMESTAMP     | The timestamp of when the row was recorded to the table.   |
| sourceid               | DECIMAL(19,0) | The unique DV datasource id.   |
| sourcename             | VARCHAR(255)  | The DV datasource name.  |
| sourcetype             | VARCHAR(60)   | The adapter type of the datasource such as Oracle, PostgreSQL, SqlServer, Composite, Rest, Wsdl, File, Netezza, MsExcel(POI), Ldap, MySql, XmlFile, Jdbc, DB2, etc.                        |
| sourcecategory         | VARCHAR(60)   | The category of the datasource such as RELATIONAL, FILE, SERVICE, etc.   |
| ownerid                | DECIMAL(19,0) | The resource owner unique id.  |
| owner                  | VARCHAR(255)  | The resource owner name.   |
| parentpath             | VARCHAR(4000) | The parent path of the resource.   |
| resourcepath [k]       | VARCHAR(4000) | The DV path to the resource.   |
| status                 | VARCHAR(20)   | The status of the datasource [UP, DOWN, DISABLED].   |
| statuschangeflag       | DECIMAL(19,0) | The status change flag indicates if the datasource changed from the previous time. NULL if first entry. 0=no change, 1=changed since last record.  |
| connectionchangeflag   | DECIMAL(19,0) | The connection change flag indicates if the datasource connection information changed since the previous time. NULL if first entry. 0=no change. 1=changed since last record.              |
| connectionchangelist   | VARCHAR(255)  | The connection change list provides information on what changed.   |

|                   |               |  |
|-------------------|---------------|--|
|                   |               | <p>STATUS_CHANGE - The status of the datasource has changed such as UP to DOWN.</p> <p>CONN_HOST_NAME - The connection host name changed since the last record.</p> <p>CONN_PORT - The connection port changed since the last record.</p> <p>CONN_LOGIN_NAME - The connection login name changed since the last record.</p> <p>CONN_LOGIN_VALUE - The connection login value changed since the last record.</p> <p>CONN_DATABASE_NAME - The connection database name changed since the last record.</p> <p>CONN_DATABASE_TYPE - The connection dataase type changed since the last record.</p> <p>CONN_URL_OR_ROOT - The connection URL or root changed since the last record.</p> <p>CONN_CACHE_STATUS - The connection cache status resource path changed since the last record.</p> <p>CONN_CACHE_TRACKING - The connection cache tracking resource path changed since the last record.</p> <p>CONN_CREATED_BY - The connection created by name changed since the last record.</p> <p>CONN_CREATED_DATE - The connection created date changed since the last record.</p> <p>CONN_MODIFIED_DATE - The connection modified date changed since the last record.</p> <p>CONN_MODIFIED_BY - The connection modified by name changed since the last record.</p> |
| numrequests       | DECIMAL(19,0) | The numer of requests that have been executed during the datasource lifetime.  |
| activerequests    | DECIMAL(19,0) | The number of active requests being executed at this point in time (eventtime).  |
| maxconn           | DECIMAL(19,0) | The maximum configured connections on the advanced tab.  |
| numcurrentconn    | DECIMAL(19,0) | The number of current connections at this point in time (eventtime).   |
| numinuseconn      | DECIMAL(19,0) | The number of "in use" connections at this point in time (eventtime).  |
| numlogins         | DECIMAL(19,0) | The number of logins during the datasource lifetime.   |
| numlogouts        | DECIMAL(19,0) | The number of logouts during the datasource lifetime.  |
| bytesto           | DECIMAL(19,0) | The number of estimated bytes sent into the datasource.  |
| bytesfrom         | DECIMAL(19,0) | The numer of estimated bytes sent from the datasource.   |
| message           | VARCHAR(4000) | The exception message if a request was not successful.   |
| connhostname      | VARCHAR(4000) | The connection host name or ip address.  |
| connport          | INTEGER       | The connection port.   |
| connloginname     | VARCHAR(255)  | The connection login name.   |
| connloginvalue    | VARCHAR(255)  | The connection login value.  |
| conndatabasename  | VARCHAR(255)  | The connection database name.  |
| conndatabasetype  | VARCHAR(255)  | The connection database type such as Oracle, PostgreSQL, SqlServer, Composite, Rest, Wsdl, File, Netezza, MsExcel(POI), Ldap, MySql, XmlFile, Jdbc, DB2, etc.  |
| connurlorroot     | VARCHAR(4000) | The connection URL or root. URL if relational. Root if file.   |
| conncachestatus   | VARCHAR(4000) | The connection cache status table path or null if not applicable.  |
| conncachetracking | VARCHAR(4000) | The connection cache tracking table path or null if not applicable.  |
| conncreatedby     | VARCHAR(255)  | The connection created by user name.   |
| conncreateddate   | TIMESTAMP     | The connection created date (timestamp).   |
| connmodifiedby    | VARCHAR(255)  | The connection modified by user name.  |
| connmodifieddate  | TIMESTAMP     | The connection modified date (timestamp).  |
| nodehost [k]      | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]      | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |

### vDatasourceCurrentStatusChanges Table

Details on “current” data source status changes. Derived from METRICS\_SYS\_DATASOURCES WHERE ISCURRENT=1 which was cached from /services/databases/system/SYS\_DATASOURCES.

| Column Name                   | Column Type   | Definition  |
|-------------------------------|---------------|---|
| partition [k]                 | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.   |
| iscurrent                     | INTEGER       | Indicates the current datasource history record. 1=current. 0=not current.  |
| sourceid                      | DECIMAL(19,0) | The unique DV datasource id.  |
| sourcename                    | VARCHAR(255)  | The DV datasource name.   |
| resourcepath [k]              | VARCHAR(4000) | The DV path to the resource.  |
| historyid [pk]                | DECIMAL(19,0) | A unique generated id for this row.   |
| previoushistoryid [fk]        | DECIMAL(19,0) | A foreign key back to the same table and the historyid which connects one record to another record in a sort of a lineage of history which allows the viewer to place the events in order.  |
| new_status                    | VARCHAR(20)   | The new status change of the datasource [UP, DOWN, DISABLED].   |
| previous_status               | VARCHAR(20)   | The previous status of the datasource [UP, DOWN, DISABLED].   |
| new_eventtime                 | TIMESTAMP     | The new timestamp of when the row was recorded to the table.  |
| previous_eventtime            | TIMESTAMP     | The previous timestamp of when the row was recorded to the table.   |
| elapsed_time_minutes          | DECIMAL(18,2) | The elapsed time in minutes between the previous and new eventtime.   |
| status_change                 | SMALLINT      | The changed status of the datasource [UP, DOWN, DISABLED].  |
| new_message                   | VARCHAR(4000) | The new exception message or null if not applicable.  |
| previous_message              | VARCHAR(4000) | The previous exception message or null if not applicable.   |
| connectionchangeflag          | DECIMAL(19,0) | The connection change flag indicates if the datasource connection information changed since the previous time. NULL if first entry. 0=no change. 1=changed since last record.   |
| new_connectionchangelist      | VARCHAR(255)  | The “new” connection change list provides information on what changed.<br>STATUS_CHANGE - The status of the datasource has changed such as UP to DOWN.<br>CONN_HOST_NAME - The connection host name changed since the last record.<br>CONN_PORT - The connection port changed since the last record.<br>CONN_LOGIN_NAME - The connection login name changed since the last record.<br>CONN_LOGIN_VALUE - The connection login value changed since the last record.<br>CONN_DATABASE_NAME - The connection database name changed since the last record.<br>CONN_DATABASE_TYPE - The connection dataase type changed since the last record.<br>CONN_URL_OR_ROOT - The connection URL or root changed since the last record.<br>CONN_CACHE_STATUS - The connection cache status resource path changed since the last record.<br>CONN_CACHE_TRACKING - The connection cache tracking resource path changed since the last record.<br>CONN_CREATED_BY - The connection created by name changed since the last record.<br>CONN_CREATED_DATE - The connection created date changed since the last record.<br>CONN_MODIFIED_DATE - The connection modified date changed since the last record.<br>CONN_MODIFIED_BY - The connection modified by name changed since the last record. |
| previous_connectionchangelist | VARCHAR(255)  | The “previous” connection change list provides information on what happened previously.<br>STATUS_CHANGE - The status of the datasource has changed such as UP to DOWN.<br>CONN_HOST_NAME - The connection host name changed since the last record.   |

|  |  |  |
|--|--|--|
|  |  | <p>CONN_PORT - The connection port changed since the last record.</p> <p>CONN_LOGIN_NAME - The connection login name changed since the last record.</p> <p>CONN_LOGIN_VALUE - The connection login value changed since the last record.</p> <p>CONN_DATABASE_NAME - The connection database name changed since the last record.</p> <p>CONN_DATABASE_TYPE - The connection dataase type changed since the last record.</p> <p>CONN_URL_OR_ROOT - The connection URL or root changed since the last record.</p> <p>CONN_CACHE_STATUS - The connection cache status resource path changed since the last record.</p> <p>CONN_CACHE_TRACKING - The connection cache tracking resource path changed since the last record.</p> <p>CONN_CREATED_BY - The connection created by name changed since the last record.</p> <p>CONN_CREATED_DATE - The connection created date changed since the last record.</p> <p>CONN_MODIFIED_DATE - The connection modified date changed since the last record.</p> <p>CONN_MODIFIED_BY - The connection modified by name changed since the last record.</p> |
|--|--|--|

### vDatasourceStatusChanges Table

Details on “all” data source status changes. Derived from METRICS\_SYS\_DATASOURCES which was cached from /services/databases/system/SYS\_DATASOURCES.

| Column Name              | Column Type   | Definition  |
|--------------------------|---------------|---|
| partition [k]            | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.   |
| iscurrent                | INTEGER       | Indicates the current datasource history record. 1=current. 0=not current.  |
| sourceid                 | DECIMAL(19,0) | The unique DV datasource id.  |
| sourcename               | VARCHAR(255)  | The DV datasource name.   |
| resourcepath [k]         | VARCHAR(4000) | The DV path to the resource.  |
| historyid [pk]           | DECIMAL(19,0) | A unique generated id for this row.   |
| previoushistoryid [fk]   | DECIMAL(19,0) | A foreign key back to the same table and the historyid which connects one record to another record in a sort of a lineage of history which allows the viewer to place the events in order.  |
| new_status               | VARCHAR(20)   | The “new” changed status of the datasource [UP, DOWN, DISABLED].  |
| previous_status          | VARCHAR(20)   | The “previous” changed status of the datasource [UP, DOWN, DISABLED].   |
| new_eventtime            | TIMESTAMP     | The new timestamp of when the row was recorded to the table.  |
| previous_eventtime       | TIMESTAMP     | The previous timestamp of when the row was recorded to the table.   |
| elapsed_time_minutes     | DECIMAL(18,2) | The total elapsed time in minutes.  |
| status_change            | SMALLINT      | The changed status of the datasource [UP, DOWN, DISABLED].  |
| new_message              | VARCHAR(4000) | The new exception message or null if not applicable.  |
| previous_message         | VARCHAR(4000) | The previous exception message or null if not applicable.   |
| connectionchangeflag     | DECIMAL(19,0) | The connection change flag indicates if the datasource connection information changed since the previous time. NULL if first entry. 0=no change. 1=changed since last record.   |
| new_connectionchangelist | VARCHAR(255)  | <p>The “new” connection change list provides information on what changed.</p> <p>STATUS_CHANGE - The status of the datasource has changed such as UP to DOWN.</p> <p>CONN_HOST_NAME - The connection host name changed since the last record.</p> <p>CONN_PORT - The connection port changed since the last record.</p> <p>CONN_LOGIN_NAME - The connection login name changed since the last record.</p> <p>CONN_LOGIN_VALUE - The connection login value changed since the last record.</p> <p>CONN_DATABASE_NAME - The connection database name changed since the last record.</p> |

|                               |              |   |
|-------------------------------|--------------|---|
|                               |              | <p>CONN_DATABASE_TYPE - The connection dataase type changed since the last record.</p> <p>CONN_URL_OR_ROOT - The connection URL or root changed since the last record.</p> <p>CONN_CACHE_STATUS - The connection cache status resource path changed since the last record.</p> <p>CONN_CACHE_TRACKING - The connection cache tracking resource path changed since the last record.</p> <p>CONN_CREATED_BY - The connection created by name changed since the last record.</p> <p>CONN_CREATED_DATE - The connection created date changed since the last record.</p> <p>CONN_MODIFIED_DATE - The connection modified date changed since the last record.</p> <p>CONN_MODIFIED_BY - The connection modified by name changed since the last record.</p>  |
| previous_connectionchangelist | VARCHAR(255) | <p>The “previous” connection change list provides information on what happened previously.</p> <p>STATUS_CHANGE - The status of the datasource has changed such as UP to DOWN.</p> <p>CONN_HOST_NAME - The connection host name changed since the last record.</p> <p>CONN_PORT - The connection port changed since the last record.</p> <p>CONN_LOGIN_NAME - The connection login name changed since the last record.</p> <p>CONN_LOGIN_VALUE - The connection login value changed since the last record.</p> <p>CONN_DATABASE_NAME - The connection database name changed since the last record.</p> <p>CONN_DATABASE_TYPE - The connection dataase type changed since the last record.</p> <p>CONN_URL_OR_ROOT - The connection URL or root changed since the last record.</p> <p>CONN_CACHE_STATUS - The connection cache status resource path changed since the last record.</p> <p>CONN_CACHE_TRACKING - The connection cache tracking resource path changed since the last record.</p> <p>CONN_CREATED_BY - The connection created by name changed since the last record.</p> <p>CONN_CREATED_DATE - The connection created date changed since the last record.</p> <p>CONN_MODIFIED_DATE - The connection modified date changed since the last record.</p> <p>CONN_MODIFIED_BY - The connection modified by name changed since the last record.</p> |

### vDatasourceUsage Table

Details on data sources usage. Derived from METRICS\_SYS\_DATASOURCES which was cached from /services/databases/system/SYS\_DATASOURCES.

| Column Name            | Column Type   | Definition   |
|------------------------|---------------|--|
| partition [k]          | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.          |
| historyid [pk]         | DECIMAL(19,0) | A unique generated id for this row.  |
| previoushistoryid [fk] | DECIMAL(19,0) | A foreign key back to the same table and the historyid which connects one record to another record in a sort of a lineage of history which allows the viewer to place the events in order. |
| iscurrent              | INTEGER       | Indicates the current datasource history record. 1=current. 0=not current.   |
| isdeleted              | INTEGER       | Indicates whether the datasource has been deleted since the last time the Cache_SYS_DATASOURCES was executed. 1=deleted. 0=not deleted.  |
| eventtime              | TIMESTAMP     | The timestamp of when the row was recorded to the table.   |
| sourceid               | DECIMAL(19,0) | The unique DV datasource id.   |
| sourcename             | VARCHAR(255)  | The DV datasource name.  |
| sourcetype             | VARCHAR(60)   | The adapter type of the datasource such as Oracle, PostgreSQL, SqlServer, Composite, Rest, Wsdl, File, Netezza, MsExcel(POI), Ldap, MySQL, XmlFile, Jdbc, DB2, etc.                        |
| sourcecategory         | VARCHAR(60)   | The category of the datasource such as RELATIONAL, FILE, SERVICE, etc.   |
| ownerid                | DECIMAL(19,0) | The resource owner unique id.  |
| owner                  | VARCHAR(255)  | The resource owner name.   |

|                      |               |   |
|----------------------|---------------|---|
| parentpath           | VARCHAR(4000) | The parent path of the resource.  |
| resourcepath [k]     | VARCHAR(4000) | The DV path to the resource.  |
| status               | VARCHAR(20)   | The status of the datasource [UP, DOWN, DISABLED].  |
| statuschangeflag     | DECIMAL(19,0) | The status change flag indicates if the datasource changed from the previous time. NULL if first entry. 0=no change, 1=changed since last record.   |
| connectionchangeflag | DECIMAL(19,0) | The connection change flag indicates if the datasource connection information changed since the previous time. NULL if first entry. 0=no change. 1=changed since last record.   |
| connectionchangelist | VARCHAR(255)  | The connection change list provides information on what changed.<br>STATUS_CHANGE - The status of the datasource has changed such as UP to DOWN.<br>CONN_HOST_NAME - The connection host name changed since the last record.<br>CONN_PORT - The connection port changed since the last record.<br>CONN_LOGIN_NAME - The connection login name changed since the last record.<br>CONN_LOGIN_VALUE - The connection login value changed since the last record.<br>CONN_DATABASE_NAME - The connection database name changed since the last record.<br>CONN_DATABASE_TYPE - The connection dataase type changed since the last record.<br>CONN_URL_OR_ROOT - The connection URL or root changed since the last record.<br>CONN_CACHE_STATUS - The connection cache status resource path changed since the last record.<br>CONN_CACHE_TRACKING - The connection cache tracking resource path changed since the last record.<br>CONN_CREATED_BY - The connection created by name changed since the last record.<br>CONN_CREATED_DATE - The connection created date changed since the last record.<br>CONN_MODIFIED_DATE - The connection modified date changed since the last record.<br>CONN_MODIFIED_BY - The connection modified by name changed since the last record. |
| numrequests          | DECIMAL(19,0) | The numer of requests that have been executed during the datasource lifetime.   |
| activerequests       | DECIMAL(19,0) | The number of active requests being executed at this point in time (eventtime).   |
| maxconn              | DECIMAL(19,0) | The maximum configured connections on the advanced tab.   |
| numcurrentconn       | DECIMAL(19,0) | The number of current connections at this point in time (eventtime).  |
| numinuseconn         | DECIMAL(19,0) | The number of "in use" connections at this point in time (eventtime).   |
| numlogins            | DECIMAL(19,0) | The number of logins during the datasource lifetime.  |
| numlogouts           | DECIMAL(19,0) | The number of logouts during the datasource lifetime.   |
| bytesto              | DECIMAL(19,0) | The number of estimated bytes sent into the datasource.   |
| bytesfrom            | DECIMAL(19,0) | The numer of estimated bytes sent from the datasource.  |
| message              | VARCHAR(4000) | The exception message if a request was not successful.  |
| connhostname         | VARCHAR(4000) | The connection host name or ip address.   |
| connport             | INTEGER       | The connection port.  |
| connloginname        | VARCHAR(255)  | The connection login name.  |
| connloginvalue       | VARCHAR(255)  | The connection login value.   |
| conn databasename    | VARCHAR(255)  | The connection database name.   |
| conn databasetype    | VARCHAR(255)  | The connection database type such as Oracle, PostgreSQL, SqlServer, Composite, Rest, Wsdl, File, Netezza, MsExcel(POI), Ldap, MySql, XmlFile, Jdbc, DB2, etc.   |
| connurlorroot        | VARCHAR(4000) | The connection URL or root. URL if relational. Root if file.  |
| conn cachestatus     | VARCHAR(4000) | The connection cache status table path or null if not applicable.   |
| conn cachetracking   | VARCHAR(4000) | The connection cache tracking table path or null if not applicable.   |
| conncreatedby        | VARCHAR(255)  | The connection created by user name.  |
| conncreateddate      | TIMESTAMP     | The connection created date (timestamp).  |
| connmodifiedby       | VARCHAR(255)  | The connection modified by user name.   |
| connmodifieddate     | TIMESTAMP     | The connection modified date (timestamp).   |
| nodehost [k]         | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |

|              |         |   |
|--------------|---------|---|
| nodeport [k] | INTEGER | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1. |
|--------------|---------|---|

### vDatasourceUsageCurrent Table

Details on current data sources usage. Derived from METRICS\_SYS\_DATASOURCES which was cached from /services/databases/system/SYS\_DATASOURCES

| Column Name            | Column Type   | Definition  |
|------------------------|---------------|---|
| partition [k]          | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year.   |
| historyid [pk]         | DECIMAL(19,0) | A unique generated id for this row.   |
| previoushistoryid [fk] | DECIMAL(19,0) | A foreign key back to the same table and the historyid which connects one record to another record in a sort of a lineage of history which allows the viewer to place the events in order.  |
| iscurrent              | INTEGER       | Indicates the current datasource history record. 1=current. 0=not current.  |
| isdeleted              | INTEGER       | Indicates whether the datasource has been deleted since the last time the Cache_SYS_DATASOURCES was executed. 1=deleted. 0=not deleted.   |
| eventtime              | TIMESTAMP     | The timestamp of when the row was recorded to the table.  |
| sourceid               | DECIMAL(19,0) | The unique DV datasource id.  |
| sourcename             | VARCHAR(255)  | The DV datasource name.   |
| sourcetype             | VARCHAR(60)   | The adapter type of the datasource such as Oracle, PostgreSQL, SqlServer, Composite, Rest, Wsdl, File, Netezza, MsExcel(POI), Ldap, MySql, XmlFile, Jdbc, DB2, etc.   |
| sourcecategory         | VARCHAR(60)   | The category of the datasource such as RELATIONAL, FILE, SERVICE, etc.  |
| ownerid                | DECIMAL(19,0) | The resource owner unique id.   |
| owner                  | VARCHAR(255)  | The resource owner name.  |
| parentpath             | VARCHAR(4000) | The parent path of the resource.  |
| resourcepath [k]       | VARCHAR(4000) | The DV path to the resource.  |
| status                 | VARCHAR(20)   | The status of the datasource [UP, DOWN, DISABLED].  |
| statuschangeflag       | DECIMAL(19,0) | The status change flag indicates if the datasource changed from the previous time. NULL if first entry. 0=no change, 1=changed since last record.   |
| connectionchangeflag   | DECIMAL(19,0) | The connection change flag indicates if the datasource connection information changed since the previous time. NULL if first entry. 0=no change. 1=changed since last record.   |
| connectionchangelist   | VARCHAR(255)  | The connection change list provides information on what changed.<br>STATUS_CHANGE - The status of the datasource has changed such as UP to DOWN.<br>CONN_HOST_NAME - The connection host name changed since the last record.<br>CONN_PORT - The connection port changed since the last record.<br>CONN_LOGIN_NAME - The connection login name changed since the last record.<br>CONN_LOGIN_VALUE - The connection login value changed since the last record.<br>CONN_DATABASE_NAME - The connection database name changed since the last record.<br>CONN_DATABASE_TYPE - The connection dataase type changed since the last record.<br>CONN_URL_OR_ROOT - The connection URL or root changed since the last record.<br>CONN_CACHE_STATUS - The connection cache status resource path changed since the last record.<br>CONN_CACHE_TRACKING - The connection cache tracking resource path changed since the last record.<br>CONN_CREATED_BY - The connection created by name changed since the last record.<br>CONN_CREATED_DATE - The connection created date changed since the last record.<br>CONN_MODIFIED_DATE - The connection modified date changed since the last record.<br>CONN_MODIFIED_BY - The connection modified by name changed since the last record. |



|                   |               |   |
|-------------------|---------------|---|
| numrequests       | DECIMAL(19,0) | The number of requests that have been executed during the datasource lifetime.  |
| activerequests    | DECIMAL(19,0) | The number of active requests being executed at this point in time (eventtime).   |
| maxconn           | DECIMAL(19,0) | The maximum configured connections on the advanced tab.   |
| numcurrentconn    | DECIMAL(19,0) | The number of current connections at this point in time (eventtime).  |
| numinuseconn      | DECIMAL(19,0) | The number of “in use” connections at this point in time (eventtime).   |
| numlogins         | DECIMAL(19,0) | The number of logins during the datasource lifetime.  |
| numlogouts        | DECIMAL(19,0) | The number of logouts during the datasource lifetime.   |
| bytesto           | DECIMAL(19,0) | The number of estimated bytes sent into the datasource.   |
| bytesfrom         | DECIMAL(19,0) | The number of estimated bytes sent from the datasource.   |
| message           | VARCHAR(4000) | The exception message if a request was not successful.  |
| connhostname      | VARCHAR(4000) | The connection host name or ip address.   |
| connport          | INTEGER       | The connection port.  |
| connloginname     | VARCHAR(255)  | The connection login name.  |
| connloginvalue    | VARCHAR(255)  | The connection login value.   |
| connDATABASENAME  | VARCHAR(255)  | The connection database name.   |
| connDATABASETYPE  | VARCHAR(255)  | The connection database type such as Oracle, PostgreSQL, SqlServer, Composite, Rest, Wsdl, File, Netezza, MsExcel(POI), Ldap, MySQL, XmlFile, Jdbc, DB2, etc. |
| connurlorroot     | VARCHAR(4000) | The connection URL or root. URL if relational. Root if file.  |
| conncachestatus   | VARCHAR(4000) | The connection cache status table path or null if not applicable.   |
| conncachetracking | VARCHAR(4000) | The connection cache tracking table path or null if not applicable.   |
| conncreatedby     | VARCHAR(255)  | The connection created by user name.  |
| conncreateddate   | TIMESTAMP     | The connection created date (timestamp).  |
| connmodifiedby    | VARCHAR(255)  | The connection modified by user name.   |
| connmodifieddate  | TIMESTAMP     | The connection modified date (timestamp).   |
| nodehost [k]      | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]      | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |

### vLogDisk Table

This table returns DV server disk events derived from the cached METRICS\_LOG\_DISK which was cached from /services/databases/system/LOG\_DISK. The information includes configured disk size/used, temporary disk size/used and log disk size/used.

| Column Name     | Column Type   | Definition  |
|-----------------|---------------|---|
| partition [k]   | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| eventtime       | TIMESTAMP     | The timestamp of when the row was recorded in system.LOG_DISK.  |
| confdisksize    | DECIMAL(19,0) | The configured disk size on the DV server.  |
| confdiskused    | DECIMAL(19,0) | The configured disk used on the DV server.  |
| conffreepercent | DECIMAL(19,3) | The configured free percent on the DV server.   |
| tmpdisksize     | DECIMAL(19,0) | The temporary disk size on the DV server.   |
| tmpdiskused     | DECIMAL(19,0) | The temporary disk used on the DV server.   |
| tmpfreepercent  | DECIMAL(19,3) | The temporary free percent on the DV server.  |
| logdisksize     | DECIMAL(19,0) | The log disk size on the DV server.   |
| logdiskused     | DECIMAL(19,0) | The log disk used on the DV server.   |
| logfreepercent  | DECIMAL(19,3) | The log free percent on the DV server.  |

|              |              |   |
|--------------|--------------|---|
| nodehost [k] | VARCHAR(255) | The host name which comes from GetProperty('SERVER_HOSTNAME').                |
| nodeport [k] | INTEGER      | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1. |

### vLogIO Table

This table returns DV server disk events derived from the cached METRICS\_LOG\_IO which was cached from /services/databases/system/LOG\_IO. The information includes bytes from clients, bytes to clients, bytes from data sources and bytes to data sources.

| Column Name     | Column Type   | Definition  |
|-----------------|---------------|---|
| partition [k]   | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| eventtime       | TIMESTAMP     | The timestamp of when the row was recorded in system.LOG_IO.  |
| fromclients     | DECIMAL(19,0) | The number of bytes coming from clients into DV over the IO channel.  |
| toclients       | DECIMAL(19,0) | The number of bytes going to clients from DV over the IO channel.   |
| fromdatasources | DECIMAL(19,0) | The number of bytes coming from datasources to DV over the IO channel.  |
| todatasources   | DECIMAL(19,0) | The number of bytes going to datasources from DV over the IO channel.   |
| nodehost [k]    | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]    | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |

### vLogMemory Table

This table returns DV server disk events derived from the cached METRICS\_LOG\_MEMORY which was cached from /services/databases/system/LOG\_MEMORY. The information memory bytes, memory max, managed bytes and managed max which can also be found on the Studio tab and memory tab for a graphical display.

| Column Name   | Column Type   | Definition  |
|---------------|---------------|---|
| partition [k] | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| eventtime     | TIMESTAMP     | The timestamp of when the row was recorded in system.LOG_MEMORY.  |
| memorybytes   | DECIMAL(19,0) | The amount of memory in bytes currently being used.   |
| memorymax     | DECIMAL(19,0) | The maximum memory in bytes configured in DV.   |
| managedbytes  | DECIMAL(19,0) | The managed memory bytes currently in DV.   |
| managedmax    | DECIMAL(19,0) | The managed maximum memory in bytes configured in DV.   |
| nodehost [k]  | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]  | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |

### vSystemResources Table

Details on system resource usage. Derived from METRICS\_CIS\_SYSTEM\_RESOURCES. This table provides a correlation between vLogMemory, vLogDisk, vLogIO and vCpuMemUtilization.

| Column Name   | Column Type   | Definition  |
|---------------|---------------|---|
| partition [k] | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| eventtime     | TIMESTAMP     | The timestamp of when the row was recorded in the metrics tables.   |
| avgmembytes   | DECIMAL(19,0) | The average amount of memory in bytes currently being used.   |
| avgmemmax     | DECIMAL(19,0) | The average maximum memory in bytes configured in DV.   |

|                    |               |  |
|--------------------|---------------|--|
| avgmanagedmembytes | DECIMAL(19,0) | The average managed memory bytes currently in DV.  |
| avgmanagedmemmax   | DECIMAL(19,0) | The average managed maximum memory in bytes configured in DV.  |
| iofromclients      | DECIMAL(19,0) | The number of bytes coming from clients into DV over the IO channel.   |
| iotoclients        | DECIMAL(19,0) | The number of bytes going to clients from DV over the IO channel.  |
| iofromdatasources  | DECIMAL(19,0) | The number of bytes coming from datasources to DV over the IO channel.   |
| iotodatasources    | DECIMAL(19,0) | The number of bytes going to datasources from DV over the IO channel.  |
| confdisksize       | DECIMAL(19,0) | The configured disk size on the DV server.   |
| confdiskused       | DECIMAL(19,0) | The configured disk used on the DV server.   |
| tmpdisksize        | DECIMAL(19,0) | The temporary disk size on the DV server.  |
| tmpdiskused        | DECIMAL(19,0) | The temporary disk used on the DV server.  |
| logdisksize        | DECIMAL(19,0) | The log disk size on the DV server.  |
| logdiskused        | DECIMAL(19,0) | The log disk used on the DV server.  |
| cpuutilization     | DECIMAL(24,4) | The system CPU utilization (used) percent.   |
| sysavailablememory | DECIMAL(24,4) | The system memory used in MB. This will always be showing high since DV takes the configured amount of memory at startup time. This is only a good guage of potential other processes running on the same server as DV if a large fluctuation is detected. |
| sysusedmemory      | DECIMAL(24,4) | The system memory available in MB. Counterpart to the above statement.   |
| nodehost [k]       | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]       | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |

## users Definitions

### vAllUsers Table

Details on all current users derived from METRICS\_ALL\_USERS. It is loaded fully each time based on the trigger. The old copy is deleted.

| Column Name  | Column Type   | Definition  |
|--------------|---------------|---|
| loaddate     | TIMESTAMP     | The timestamp of when the record was inserted or loaded.                      |
| userid       | DECIMAL(19,0) | The DV userid from the system.ALL_USERS tables.                               |
| user         | VARCHAR(255)  | The user name who connected for this session.                                 |
| domainid     | DECIMAL(19,0) | The unique domain id.   |
| domain       | VARCHAR(255)  | The domain of the user who connected.   |
| annotation   | CLOB          | The annotation of the user.   |
| nodehost [k] | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').                |
| nodeport [k] | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1. |

### vLdapPerson Table

Details regarding an LDAP user derived from METRICS\_LDAP\_PERSON. It is fully loaded each time based on the trigger. The old copy is deleted.

| Column Name | Column Type   | Definition   |
|-------------|---------------|--|
| loaddate    | TIMESTAMP     | The timestamp of when the record was inserted or loaded.   |
| basedn      | VARCHAR(1024) | A <b>base dn</b> is the point from where a server will search for users. So I would try to simply use admin as a login name. If openca behaves like most ldap aware applications, this is what is going to happen : An ldap search for the user admin will be done by the server starting at the <b>base dn</b> ( dc=example,dc=com ). |

|   |               |  |
|---|---------------|--|
| relativedn                                | VARCHAR(1024) | a relativeDistinguishedName from <a href="https://tools.ietf.org/html/rfc4514">https://tools.ietf.org/html/rfc4514</a> . type <b>RelativeDN</b> struct { . Attributes []*AttributeTypeAndValue. }. |
| objectclass                               | VARCHAR(1024) | The object class.  |
| cn  | VARCHAR(255)  | The common name. In some environments, this may be the username.   |
| uid                                       | VARCHAR(255)  | The unique id.   |
| <b>userkey</b> [fk]x [mapped to DV]       | VARCHAR(255)  | The userkey which is a transformed value if required that matches the “user” column in metrics_resources_usage and metrics_resources_usage_hist.   |
| <b>domainkey</b> [fk] [mapped to DV]      | VARCHAR(255)  | The domainkey which is a transformed value if required that matches the “domain” column in metrics_resources_usage and metrics_resources_usage_hist.   |
| <b>mail</b> [mapped to DV]                | VARCHAR(255)  | The email of the user who connected.   |
| <b>fullname</b> [mapped to DV]            | VARCHAR(255)  | The full name of the user who connected.   |
| displayname                               | VARCHAR(255)  | The display name.  |
| <b>lastname</b> [mapped to DV]            | VARCHAR(255)  | The last name of the user who connected.   |
| <b>firstname</b> [mapped to DV]           | VARCHAR(255)  | The first name of the user who connected.  |
| middlename                                | VARCHAR(255)  | The middle name.   |
| initials                                  | VARCHAR(255)  | The initials.  |
| distinguishedname                         | VARCHAR(255)  | The distinguished name.  |
| description                               | CLOB          | The actual client request or internal DV request.  |
| title                                     | VARCHAR(255)  | The title.   |
| persontitle                               | VARCHAR(255)  | The person’s title.  |
| <b>employeeid</b> [mapped to DV]          | VARCHAR(255)  | The employee id  |
| <b>employeenumber</b> [mapped to DV]      | VARCHAR(255)  | The employee number of the user who connected.   |
| employeetype                              | VARCHAR(255)  | The employee type.   |
| <b>telephonenumber</b> [mapped to DV]     | VARCHAR(255)  | The primary telephone number of the user who connected.  |
| mobile                                    | VARCHAR(255)  | The mobile phone.  |
| homephone                                 | VARCHAR(255)  | The home phone number.   |
| othertelephone                            | VARCHAR(255)  | The other phone number.  |
| othermobile                               | VARCHAR(255)  | The other mobile number.   |
| countryname                               | VARCHAR(255)  | The country name.  |
| <b>friendlycountryname</b> [mapped to DV] | VARCHAR(255)  | The friendly country name of the user who connected.   |
| countrycode                               | VARCHAR(255)  | The country code.  |
| city                                      | VARCHAR(255)  | The city.  |
| state                                     | VARCHAR(255)  | The state  |
| street                                    | VARCHAR(1024) | The street address.  |
| organization                              | VARCHAR(1024) | The organization nae.  |
| organizationunit                          | VARCHAR(1024) | The organization unit.   |
| postaladdress                             | VARCHAR(1024) | The postal address.  |
| postofficebox                             | VARCHAR(255)  | The post office box.   |
| postalcode                                | VARCHAR(255)  | The postal code.   |
| company                                   | VARCHAR(255)  | The company name.  |
| department                                | VARCHAR(255)  | The department name.   |
| division                                  | VARCHAR(255)  | The division name.   |
| manager                                   | VARCHAR(255)  | The manager name.  |
| businessroles                             | VARCHAR(255)  | The business roles.  |
| comment                                   | VARCHAR(1024) | A comment.   |

## workflow Definitions

### vCISWorkflow Table

Report to view the status of the KPImetrics triggers derived from METRICS\_CIS\_WORKFLOW.

| Column Name          | Column Type   | Definition  |
|----------------------|---------------|---|
| partition [k]        | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| workflowid [k]       | DECIMAL(19,0) | The unique id for this record.  |
| workflowname         | VARCHAR(255)  | The workflow name.  |
| workflowstatus       | VARCHAR(10)   | The workflow status [S=success, F=fail, I=in progress].   |
| workflowstarttime    | TIMESTAMP     | The workflow start time.  |
| workflowendtime      | TIMESTAMP     | The workflow end time.  |
| resourcename         | VARCHAR(255)  | The resource name that started the workflow.  |
| message              | VARCHAR(4000) | An informational message about the workflow status.   |
| errormessage         | CLOB          | The exception message if a request was not successful   |
| nodehost [k]         | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]         | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |
| workflowstarttimestr | VARCHAR(30)   | The workflow start time in a string.  |

### vCISWorkflowStatus Table

Report to view the status of the KPImetrics triggers sort by workflowstatus ASC and derived from METRICS\_CIS\_WORKFLOW. Failure message come first. Workflowstatus=F, I, S. F=Fail, I=In process, S=Success. This view has an ORDER BY of workflowstatus ASC.

| Column Name          | Column Type   | Definition  |
|----------------------|---------------|---|
| partition [k]        | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| workflowid [k]       | DECIMAL(19,0) | The unique id for this record.  |
| workflowname         | VARCHAR(255)  | The workflow name.  |
| workflowstatus       | VARCHAR(10)   | The workflow status [S=success, F=fail, I=in progress].   |
| workflowstarttime    | TIMESTAMP     | The workflow start time.  |
| workflowendtime      | TIMESTAMP     | The workflow end time.  |
| resourcename         | VARCHAR(255)  | The resource name that started the workflow.  |
| message              | VARCHAR(4000) | An informational message about the workflow status.   |
| errormessage         | CLOB          | The exception message if a request was not successful   |
| nodehost [k]         | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]         | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |
| workflowstarttimestr | VARCHAR(30)   | The workflow start time in a string.  |

### vEventRegistration Table

Report to view the list of email event registration subscriptions that are currently configured. Derived from METRICS\_EVENT\_REGISTRATION.

| Column Name | Column Type | Definition |
|-------------|-------------|------------|
|-------------|-------------|------------|

|                    |               |  |
|--------------------|---------------|--|
| subscriberemail    | VARCHAR(255)  | The email of the person subscribing to this event.   |
| groupname          | VARCHAR(255)  | The DV or LDAP group the person belongs to.  |
| environmenttype    | VARCHAR(255)  | The environment name from commonValues.cisServerNickname or ALL for all environments.  |
| envtype            | VARCHAR(255)  | The event type [LONG_RUNNING, EXCEEDED_MEMORY, INACTIVITY, WORKFLOW_FAILURE, DBMS_SCHEDULER_ERROR, PURGE_HISTORY]  |
| requesteremail     | VARCHAR(255)  | The emails of the person requesting this event.  |
| requesterfirstname | VARCHAR(255)  | The first name of the person requesting this event.  |
| requesterlastname  | VARCHAR(255)  | The last name of the person requesting this event.   |
| Excludetext        | VARCHAR(4000) | A comma separate list of text that when found will signal exclusion and the email will not be sent. This is a way of filtering out emails based on text. |

### vJobDeleteCheck Table

Report to view the status of the METRICS\_JOB\_DELETE\_CHECK DBMS table. This table provides information about TDV metrics delete statement activity when trigger “kpimetricsTrig\_35\_DBMSDeleteCheck” is turned on. It will reveal when the delete statement was executed for each node and how many rows were deleted from the collection tables.

| Column Name   | Column Type   | Definition  |
|---------------|---------------|---|
| partition [k] | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| loaddate      | TIMESTAMP     | The timestamp of when the data was loaded.  |
| requestid [k] | DECIMAL(19,0) | The unique request id that is the primary key of this table.  |
| status        | VARCHAR(20)   | The status of the request (delete statement). E.g. SUCCESS, FAILED, TERMINATED  |
| requesttype   | VARCHAR(20)   | The request type is SQL.  |
| sqlcommand    | VARCHAR(20)   | The SQL command is DELETE.  |
| resourcename  | VARCHAR(255)  | The metrics collection table resource name being deleted. E.g. metrics_requests, metrics_resources_usage or metrics_sessions.   |
| description   | CLOB          | The SQL delete statement.   |
| starttime     | TIMESTAMP     | The timestamp when the delete statement started.  |
| endtime       | TIMESTAMP     | The timestamp of when the delete statement ended.   |
| totalduration | INTEGER       | The total duration of the delete statement in milliseconds.   |
| rowsaffected  | INTEGER       | The number of rows deleted.   |
| nodehost [k]  | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k]  | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |

### vJobDetails Table

Report to view the status of the METRICS\_JOB\_DETAILS DBMS Scheduler table. Provides a sorted status by most recent rows first. The information informs the user of the status of the data transfer from the collection tables to the history tables for each of the 3 metrics tables.

| Column Name   | Column Type | Definition  |
|---------------|-------------|---|
| partition [k] | SMALLINT    | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| reqstartdate  | TIMESTAMP   | The timestamp of when the request is started.   |
| reqenddate    | TIMESTAMP   | The timestamp of when the request ends.   |
| jobtablename  | VARCHAR(40) | The job table name which identifies the type of processing that is taking place.  |

|                    |               |  |
|--------------------|---------------|--|
|                    |               | <p>DBMS_SCHEDULER – An overall record that indicates processing for the metrics collection and history tables.</p> <p>metrics_sessions – process rows.</p> <p>metrics_resources_usage – process rows.</p> <p>metrics_requests – process rows.</p> <p>metrics_sessions_hist – process rows only if commonValues.partitionNumber=0.</p> <p>metrics_resources_usage_hist – process rows only if commonValues.partitionNumber=0.</p> <p>metrics_requests_hist – process rows only if commonValues.partitionNumber=0.</p> <p>DELETE_COLLECTION – An overall record that indicates processing for the metrics collection tables.</p> <p>metrics_resources_usage – delete rows.</p> <p>metrics_requests – delete rows.</p> <p>REBUILD_INDEXES – An overall record that indicates the various metrics tables indexes are being rebuilt or reorganized. This usually happens once a week.</p> <p>PARTITION_MANAGEMENT_ADD – An overall record indicating the status of the partition add command.</p> <p>PARTITION_MANAGEMENT_DROP – An overall record indicating the status of the partition drop command.</p> |
| correlationid      | DECIMAL(19,0) | A generated unique sequence that correlates different records together in a batch.   |
| nodehost [k]       | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]       | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |
| processednodehost  | VARCHAR(255)  | The hostname (nodehost) of the DV server that is performing the processing. Due to locking issues [mainly] with SQL Server, the architecture dictates that only one node performs the processing for all the other nodes.  |
| processednodeport  | INTEGER       | The port (nodeport) of the DV server that is performing the processing.  |
| processedstartdate | TIMESTAMP     | The timestamp of when the DV process started performing the processing. This timestamp will remain the same across all rows with the same correlationid.   |
| insertnumrows      | DECIMAL(19,0) | For DBMS_SCHEDULER, the number of rows inserted.   |
| deletenumrows      | DECIMAL(19,0) | For DBMS_SCHEDULER and DELETE_COLLECTION, the number of rows deleted.  |
| updatenumrows      | DECIMAL(19,0) | For DBMS_SCHEDULER, the number of rows updated.  |
| notinsertednumrows | DECIMAL(19,0) | For DBMS_SCHEDULER, the number of rows not inserted.   |
| maxstarttime       | TIMESTAMP     | The maximum starttime [metrics_requests, metrics_resources_usage] or logintime [metrics_sessions] found in the specified table being processed.  |
| maxid              | DECIMAL(19,0) | The maximum requestid [metrics_requests, metrics_resources_usage] or sessionid [metrics_sessions] found in the specified table being processed.  |
| status             | VARCHAR(100)  | <p>The job details status [COMPLETE=the table record, NO RECORDS FOUND=table record, SUCCESS=the overall record, FAILURE=the overall record.]</p> <p>Intermediate status for each stage in the workflow process:</p> <p>DELETE COMPLETE &lt;table name&gt;</p> <p>TABLE STATISTICS COMPLETE &lt;table name&gt;</p> <p>DELETE STAGE COMPLETE</p> <p>INSERT STAGE COMPLETE &lt;table name&gt;</p> <p>UPDATE COMPLETE</p> <p>INSERT HISTORY COMPLETE</p> <p>UPDATE STAGE WITH LDAP COMPLETE</p>   |
| currentoperation   | VARCHAR(150)  | The current operation being executed.  |
| insertduration     | VARCHAR(30)   | The duration of the insert.  |
| deletedduration    | VARCHAR(30)   | The duration of the delete.  |



|                |               |  |
|----------------|---------------|--|
| updateduration | VARCHAR(30)   | The duration of the update.  |
| totalduration  | VARCHAR(30)   | The total duration of the request measured in milli-seconds. Divide by 1000 to get minutes.  |
| additionalinfo | VARCHAR(4000) | The additional info provide informational message. For example, if batching is being used it might look like this:<br>[Total LDAP Update Batches(50000)=1] [Total resourcekind-user defined Update Batches(50000)=1] [Total resourcekind-system Update Batches(50000)=0] [Total Insert Batches(50000)=1] [Total Delete Batches(50000)=1] |
| errormessage   | CLOB          | The exception message if a request was not successful  |

### vJobDetailsReport Table

Report to summarize the results of METRICS\_JOB\_DETAILS grouped by the job table name, node host and node port. It provides various averages, min and max of duration and number of rows. It provides summation of rows inserted, updated, deleted and not inserted.

| Column Name  | Column Type            | Definition  |
|--------------|------------------------|---|
| jobtablename | VARCHAR(40)            | The job table name which identifies the type of processing that is taking place.<br>DBMS_SCHEDULER – An overall record that indicates processing for the metrics collection and history tables.<br>metrics_sessions – process rows.<br>metrics_resources_usage – process rows.<br>metrics_requests – process rows.<br>metrics_sessions_hist – process rows only if commonValues.partitionNumber=0.<br>metrics_resources_usage_hist – process rows only if commonValues.partitionNumber=0.<br>metrics_requests_hist – process rows only if commonValues.partitionNumber=0.<br>DELETE_COLLECTION – An overall record that indicates processing for the metrics collection tables.<br>metrics_resources_usage – delete rows.<br>metrics_requests – delete rows.<br>REBUILD_INDEXES – An overall record that indicates the various metrics tables indexes are being rebuilt or reorganized. This usually happens once a week.<br>PARTITION_MANAGEMENT_ADD – An overall record indicating the status of the partition add command.<br>PARTITION_MANAGEMENT_DROP – An overall record indicating the status of the partition drop command. |
| nodehost [k] | VARCHAR(255)           | The host name which comes from GetProperty('SERVER_HOSTNAME').  |
| nodeport [k] | INTEGER                | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.   |
| insert_avg   | INTERVAL DAY TO SECOND | The average insert duration.  |
| delete_avg   | INTERVAL DAY TO SECOND | The average delete duration.  |
| update_avg   | INTERVAL DAY TO SECOND | The average update duration.  |
| total_avg    | INTERVAL DAY TO SECOND | The average total time.   |
| total_min    | INTERVAL DAY TO SECOND | The minimum total minutes across all operations.  |
| total_max    | INTERVAL DAY TO SECOND | The maximum total minutes across all operations.  |

|                   |               |  |
|-------------------|---------------|--|
| insertrows_avg    | DECIMAL(19,0) | The average number of rows inserted.     |
| deleterows_avg    | DECIMAL(19,0) | The average number of rows deleted.      |
| updaterows_avg    | DECIMAL(19,0) | The average number of rows updated.      |
| notinsertrows_avg | DECIMAL(19,0) | The average number of rows not inserted. |
| insertrows_sum    | DECIMAL(25,0) | The total number of rows inserted.       |
| deleterows_sum    | DECIMAL(25,0) | The total number of rows deleted.        |
| updaterows_sum    | DECIMAL(25,0) | The total number of rows updated.        |
| notinsertrows_sum | DECIMAL(25,0) | The total number of rows not inserted.   |

### vJobDetailsStatusSummary Table

| Column Name  | Column Type  | Definition   |
|--------------|--------------|--|
| jobtablename | VARCHAR(40)  | <p>The job table name which identifies the type of processing that is taking place.</p> <p>DBMS_SCHEDULER – An overall record that indicates processing for the metrics collection and history tables.</p> <p>metrics_sessions – process rows.</p> <p>metrics_resources_usage – process rows.</p> <p>metrics_requests – process rows.</p> <p>metrics_sessions_hist – process rows only if commonValues.partitionNumber=0.</p> <p>metrics_resources_usage_hist – process rows only if commonValues.partitionNumber=0.</p> <p>metrics_requests_hist – process rows only if commonValues.partitionNumber=0.</p> <p>DELETE_COLLECTION – An overall record that indicates processing for the metrics collection tables.</p> <p>metrics_resources_usage – delete rows.</p> <p>metrics_requests – delete rows.</p> <p>REBUILD_INDEXES – An overall record that indicates the various metrics tables indexes are being rebuilt or reorganized. This usually happens once a week.</p> <p>PARTITION_MANAGEMENT_ADD – An overall record indicating the status of the partition add command.</p> <p>PARTITION_MANAGEMENT_DROP – An overall record indicating the status of the partition drop command.</p> |
| status       | VARCHAR(100) | <p>The job details status [COMPLETE=the table record, NO RECORDS FOUND=table record, SUCCESS=the overall record, FAILURE=the overall record.]</p> <p>Intermediate status for each stage in the workflow process:</p> <p>DELETE COMPLETE &lt;table name&gt;</p> <p>TABLE STATISTICS COMPLETE &lt;table name&gt;</p> <p>DELETE STAGE COMPLETE</p> <p>INSERT STAGE COMPLETE &lt;table name&gt;</p> <p>UPDATE COMPLETE</p> <p>INSERT HISTORY COMPLETE</p> <p>UPDATE STAGE WITH LDAP COMPLETE</p>   |
| nodehost [k] | VARCHAR(255) | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k] | INTEGER      | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |
| cnt          | BIGINT       | The count of records grouped by the columns in this view.  |

### vJobEnvironments Table

Report to view the list of valid environments derived from METRICS\_JOB\_ENVIRONMENTS

| Column Name | Column Type  | Definition   |
|-------------|--------------|--|
| envtype     | VARCHAR(255) | The environment type describes the type of environment such as DEV, UAT, TEST, PROD. |

### vJobFilters Table

Report to view the list of job filters that are currently configured derived METRICS\_JOB\_FILTERS.

| Column Name      | Column Type   | Definition   |
|------------------|---------------|--|
| envtype          | VARCHAR(255)  | The environment type describes the type of environment such as DEV, UAT, TEST, PROD.   |
| tablename        | VARCHAR(255)  | Currently always set to metrics_resources_usage.   |
| user             | VARCHAR(255)  | The DV user to be filtered out.  |
| domain           | VARCHAR(255)  | The DV user domain that the user belongs to.   |
| resourcekind     | VARCHAR(20)   | The type of resource that executed [system, user defined].   |
| resourcepath [k] | VARCHAR(4000) | The DV path to the resource.   |
| resourcetype [k] | VARCHAR(40)   | The DV resource type. If published, then it will be LINK.  |
| pathtype         | VARCHAR(10)   | The pathtype is either FULL=full DV path or PARTIAL=partial wild card path (resourcepath must contain a % at the end of the path indicating a wild card) |

### vSqlControl Table

Derived from METRICS\_SQL\_CONTROL. Normally has no rows unless Cache\_METRICS\_SQL\_REQUEST\_EXEC is executing. If it contains rows then they indicate that a particular node is performing the pre-processing for the METRICS\_SQL\_REQUEST table. Only only one node at a time can perform this processing due to the fact that any single node can process another nodes SQL requests in order to achieve parallel processing. This table acts as the control table to allow each node to select their requestids that they will process. This is why this part of the process is single-threaded and must be controlled.

| Column Name   | Column Type  | Definition  |
|---------------|--------------|---|
| starttime [k] | TIMESTAMP    | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867   |
| nodehost [k]  | VARCHAR(255) | The host name which comes from GetProperty('SERVER_HOSTNAME').                |
| nodeport [k]  | INTEGER      | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1. |

### vSqlControlLog Table

Derived from METRICS\_SQL\_CONTROL\_LOG. Contains a log of the Gatekeeper code block within Cache\_METRICS\_SQL\_REQUEST\_EXEC when debugGatekeeper = '1'. During normal operation, this will be turned off so that no rows are produced. It is only useful for debugging purposes to insure that in a clustered environment, the nodes are taking their turn initializing their own set of rows when doing parallel processing on one of the node's data.

| Column Name   | Column Type   | Definition  |
|---------------|---------------|---|
| partition [k] | SMALLINT      | The partition number is based on the day of the year. There can be 366 partitions which accounts for leap year. This interval partition will act like a sliding window of 1 year. |
| controllogid  | DECIMAL(19,0) | A unique generated sequence.  |

|                   |               |  |
|-------------------|---------------|--|
| starttime [k]     | TIMESTAMP     | The timestamp of when the request was started. E.g. 2020-01-06 10:19:36.867  |
| codeblock         | VARCHAR(255)  | <p>The block of code being processed to be used for debug if needed.</p> <p>1.00 Gatekeeper:[Rows exist to be processed.] Count=</p> <p>1.01 Gatekeeper:[Detect processing. Count=</p> <p>1.02 Gatekeeper:[Successfully inserted control row.]</p> <p>1.03 Gatekeeper:[Waiting for access.]</p> <p>1.04 Gatekeeper:[Construct the SQL statement.]</p> <p>1.05 Gatekeeper:[Perform pre-populate (insert rows).]</p> <p>1.06 Gatekeeper:[Replace ASCII Characaters &gt; 255]:</p> <p>1.07 Gatekeeper:[Insert successful. Row=</p> <p>1.08 Gatekeeper:[No insert was performed.] performInsert=</p> <p>1.09 Gatekeeper:[No insert was performed.] performInsert=</p> <p>1.10 Gatekeeper:[Total insert duration=</p> <p>1.11 Gatekeeper:[No rows to process.]</p> <p>1.12 Gatekeeper:[Delete control row]</p> <p>1.13 Gatekeeper:[Pre-processing timeout: Waiting for another node to finish.]</p> |
| trynum            | DECIMAL(9,0)  | The number of tries.   |
| processtime       | TIMESTAMP     | The timestamp of when the processing started.  |
| requestid [k]     | DECIMAL(19,0) | The unique request id that is the primary key of this table.   |
| nodehost [k]      | VARCHAR(255)  | The host name which comes from GetProperty('SERVER_HOSTNAME').   |
| nodeport [k]      | INTEGER       | The Http port (e.g. 9400) which comes from GetProperty('SERVER_JDBC_PORT')-1.  |
| processednodehost | VARCHAR(255)  | The hostname (nodehost) of the DV server that is performing the processing. Due to locking issues [mainly] with SQL Server, the architecture dictates that only one node performs the processing for all the other nodes.  |
| processednodeport | DECIMAL(9,0)  | The port (nodeport) of the DV server that is performing the processing.  |

## 4 Release Notes

This section provides information on what has changed in this release.

### Added or Modified in this Release

This section provides bullet points on what has been added or changed in this release.

#### Release 2022Q100 [Feb 10 2022]

- Added metrics\_all\_kpimetrics\_table\_counts and metrics\_requests\_hist\_sqlplan.
- Refactored the published metrics schema into metrics\_collection, metrics\_count and metrics\_history to make it easier to find view.

#### Release 2020Q300 [Aug 17 2020]

- Modified notificationstatus to vEventRegLog.

#### Release 2020Q203 [Jun 24 2020]

- Implemented daily (interval) Table Partitioning scheme for all tables. Changed monthly to daily for metrics history tables.

#### Release 2020Q202 [May 1 2020]

- Removed all [Arch] tables as partitioning for each table has been added so that the current and historical data will reside in the same table in an interval of 366 days.

#### Release 2020Q201 [Apr 6 2020]

- Added metadata.reportMetadataAllCount[Arch]
- Added metrics\_requests\_groupby\_date, metrics\_requests\_groupby\_nodehost\_nodeport
- Added metrics\_resources\_usage\_groupby\_date, metrics\_resources\_usage\_groupby\_nodehost\_nodeport
- Added metrics\_sessions\_groupby\_date, metrics\_sessions\_groupby\_nodehost\_nodeport

#### Release 2020Q101 [Feb 18 2020]

- Added metadata.reportMetadataPrivilegeUsers[Arch]
- Added metadata.vMetadataAllPrivileges
- Added metadata.vMetadataAllResources
- Added metadata.vMetadataAllUsersGroups[Arch]
- Added metadata.vMetadataPrivilegeUser[Arch]
- Removed vAllResourcesMax
- Renamed vAllResourcesHist to vAllResources
  - Added resourcelinktype, ownerdomain, annotation

- Renamed owner to ownername, loadtime to loaddate
  - Modified types for guid, resourcetype, resourcesubtype
- Removed vAllUsersMax
- Renamed vAllUsersHist to vAllUsers
- Change all references of loadtime to loaddate.
- vMetadataPrivilege[Arch]
  - Dropped username column
  - Added privilegeid, layertype, nameid

**Release 2020Q100 [Jan 14 2020]**

- Initial release of the KPImetrics Data Dictionary