

KPI Metrics Configuration Guide

An Open Source Asset for use with TIBCO® Data Virtualization

TIBCO Software empowers executives, developers, and business users with Fast Data solutions that make the right data available in real time for faster answers, better decisions, and smarter action. Over the past 15 years, thousands of businesses across the globe have relied on TIBCO technology to integrate their applications and ecosystems, analyze their data, and create real-time solutions. Learn how TIBCO turns data—big or small—into differentiation at www.tibco.com.

Project Name	AS Assets KPI Metrics
Document Location	This document is only valid on the day it was printed. The source of the document will be found in the ASAssets_KPI folder (https://github.com/TIBCOSoftware)
Purpose	Self-paced instructional



www.tibco.com

Global Headquarters 3303 Hillview Avenue Palo Alto, CA 94304 Tel: +1 650-846-1000 +1 800-420-8450

Fax: +1 650-846-1005

Revision History

Version	Date	Author	Comments
1.0	Oct 2012	Manny Bhatia	Initial revision
1.4	Nov 2012	Matthew Lee	Minor updates to deployment language to clarify steps
1.5	Nov 2012	Matthew Lee	Revised setup and configuration steps for clarification
1.6	Sep 2013	Matthew Lee	Revised document for KPImetrics version 2.0
1.7	Jan 2014	Matthew Lee	Migrated to Cisco documentation standards
1.8	Aug 2017	Mike Tinius	Upgraded to work with Data Virtualization metrics with Postgres. Add-on to DV metrics capability.
1.9 – 2017.4	Dec 2017	Mike Tinius	Add additional capabilities and migrated to Tibco documentation standards
2018.1	March 2018	Mike Tinius	Optimization of Oracle and SQL Server views to achieve better push-down. Improved installation scripts.
2018.101	March 30 2018	Mike Tinius	Fixed an issue with the installation scripts. Added KPImetrics_worksheet.xlsx.
2018.102	April 23 2018	Mike Tinius	Added Idap and metrics history "userkey" field to allow normalization of the join key. Fixed an issue with CPUMemChecker.
2018.103	May 2 2018	Mike Tinius	Modified data transfer procedure. Added column CURRENT_OPERATION to METRICS_JOB_DETAILS table. Deprecated cache_status and cache_tracking usage.
2018.3	Sep 18 2018	Mike Tinius	Modified to allow datasource names in the format of KPI_oracle_11g, KPI_oracle_12c, KPI_sqlserver_2012 or KPI_sqlserver_2014 in order to allow for adding a datasource.
			Modified sqlParserV1_2 to allow for parallel processing of SQL when a cluster is present. A node can process rows other than its own rows when it has no work to do. Modified tables: METRICS_ALL_RESOURCES, METRICS_SQL_REQUEST Added tables: METRICS_SQL_CONTROL, METRICS_SQL_CONTROL_LOG
			Modified the native SQL data transfer script to use stage tables resuling in only inserts to the history tables to improve efficiency.
			Modified /shared/ASAssets/KPImetrics/Business/Logical/metrics *_hist views to use where starttime > TO_TIMESTAMP('1900-01- 01 00:00:00.000') to force the use of parallel queries.
2018.301	Oct 2 2018	Mike Tinius	Modified parseSqlScriptComplex and parseSqlScriptTemplate to change template select from SELECT DISTINCT to SELECT TOP 1 to make it more efficient.
2018.302	Oct 12 2018	Mike Tinius	Fixed a collection table row volume problem by adding an independent delete trigger for the collection tables: metrics_requests and metrics_resources_usage.
2018.400	Dec 1 2018	Mike Tinius	Added processing for SQL request datasource lineage thus allowing reporting on what physical data source resources are related to which published resources. Requires Utilities 2018Q4.
2018.401	Dec 3 2018	Mike Tinius	Removed all reference and processing for METRICS_RESOURCES_USAGE_UD. This is essentially a copy of metrics_resources_usage_hist where resourcekind='user defined'. This is a simplification.
2019.100	Jan 7 2019	Mike Tinius	Fixed installation script. Added "domainkey" to METRICS_LDAP_PERSON and history tables to qualify the "user". The same user can be in multiple domains.
2019.101	Jan 30 2019	Mike Tinius	Added support for DV 8.0 as the out-of-the-box metrics tables [metrics_requests and metrics_sessions] added user, domain and

			group. KPI installation automatically checks for DV version 7.0 or 8.0 and executes the appropriate scripts to install KPImetrics.
2019.102	Mar 12 2019	Mike Tinius	Added upgrade scripts. Added "group" to metrics_requests and metrics_sessions for 7.0 to bring up to par with 8.0.
2019.200	Jun 17 2019	Mike Tinius	Migrated severl procedures to the Utilities. Requires Utilities 2019Q200. Put explicit BEGIN/END blocks around updates in pPurgeData. sqlParserV1_2 - Converted all VECTORS to XML as VECTOR parameters has been associated with memory leaks.
2019.300	August 5 2019	Mike Tinius	Fixed bug where pRebuildIndexes fails. Fixed with admin interface invocation. Added trigger kpimetricsTrig_24_ValidateUpdateStatusTables. Added procedure pValidateUpdateStatusTables.
2019.301	August 31 2019	Mike Tinius	Added KPI Metadata feature for capturing resource metadata and reporting. Fixed various bugs.
2019.400	October 24 2019	Mike Tinius	Fixed bugs with installation and SQL Server and Oracle DDL scripts.
2019.401	November 6, 2019	Mike Tinius	Various Metadata capability changes.
2019.402	December 23, 2019	Mike Tinius	Better debug and error handling. Data transfer script batching. Upgrade script modifications. Consolidated all customizable resources into /shared/ASAssets/KPImetrics/Customize.
2020.100	January 23, 2020	Mike Tinius	Created a data dictionary document "KPImetrics Data Dictionary v1.1.pdf". Added transaction blocks in pPARTITION_MANAGER_exec, pqPartition_metrics_history_tables_ADD, and pqPartition_metrics_history_tables_DROP
2020.101	February 25, 2020	Mike Tinius	KPI Metadata improvements. Purge concurrency improvements.
2020.200	March 12, 2020	Mike Tinius	Includes 2020.102 + Requires Utilities 2020Q200 to synchronize with migrated utilities required by KPImetrics.
2020.201	April 6, 2020	Mike Tinius	Cluster bug fixes. Metadata bug fixes.
2020.202	May 26 2020	Mike Tinius	Removed Archive views by adding partitioning to hold current and history in the same table. Supporting SQL Server 2016 or higher.
2020.203	June 25 2020	Mike Tinius	Converted all tables to daily/interval partitioning in order to eliminated delete statements and have one consistent partitioning strategy across metadata tables and metrics tables. Changed monthly to daily for metrics history tables
2020.300	Aug 17 2020	Mike Tinius	Fixed Oracle install issue w/ 32 char resource limit. Enhanced pCheckLongRunningRequests to only send 1 email per event and don't resend.
2020.301	Aug 28 2020	Mike Tinius	Fixed Installation process. Added support for Oracle 19c and SQL Server 2019.
2020.400	Nov 10 2020	Mike Tinius	Added transaction block in procedures mainly for SQL Server blocking issues. Modified when nodehost and nodeport are acquired to alleviate null in emails when the database is not available.
2020.401	Dec 14 2020	Mike Tinius	Modification to how table statistics are gathered. Added commonValue constants. Modification to collection table index. Modification to /metadata/reportMetadataPrivilegeUsers.
2021.100	Jan 15 2021	Mike Tinius	Documentation changes. Changes due to Utilities reintrospectDataSource. Replaced calls to BigintToTimestamp.
2021.101	Mar 24 2021	Mike Tinius	Updated KPImetrics installation and upgrade scripts. Added modify_comonValues automation script to KPImetrics Customize.
2021.200	Jun 14 2021	Mike Tinius	Modified installation/upgrade strategy backupCustomResources and 3_Post_Upgrade to always use

			KPImetrics_Backup/CurrentBackup folder for consistency and to simplify.
2021.300	Jul 13 2021	Mike Tinius	Fixed bug 'literal too long' when insert/update METRICS_JOB_DETAILS. Moved pMaintenanceUpdateHostnamePort to KPImetrics_installation. Fix upgrade issue.
2021.301	Aug 06 2021	Mike Tinius	Added SELECT {OPTION FORCE_DISK} to the INSERT/SELECT statement for views/procedures in /Metadata/System folder. Added "ignoreSysDatasourcePaths" to commonValues to ignore Sys Datasource Paths when executing Cache_SYS_DATASOURCES.
2021.400	Sep 10 2021	Mike Tinius	Deprecated support for TDV 7.x as it has been 1 year since TIBCO dropped support for TDV 7.x Fixes to pMETRICS_ALL_TABLES_exec and DDL in *data_xfer_script* w.r.t. references to sessionid and requestid as it may prevent data being transfered from collection to history on migrated data from a previous TDV Server into an upgraded TDV server due to resetting of sessionid and requestid values.
2021.401	Nov 22 2021	Mike Tinius	Fixed updates for Cache_AllCustom_AccessByUserOverTime and Cache_AllCustom_ActiveResourcesOverPeriodOfTime. For Oracle, it was not calculating requestdays correctly. Added ABS(ROUND(original_calculation,2)) to vRequestsExpandedUD, vResourceUsageAll and vResourceUsageUD. For Oracle, a fix for filtering rows from metrics_resources_usage into stage - 06_pqCreateDrop_KPI_PlsqI_oracle_data_xfer_script_800
2021.402	Nov 23 2021	Mike Tinius	Added the ability to generate the SQL Explain Plan for the metrics_requests_hist "description" field. Added a new table to hold the information, metrics_requests_hist_sqlplan. Requires ASAssets Utilities 2021Q402.
2022.100	Mar 02 2022	Mike Tinius	Fixed bug in Cache_METADATA_TABLES. Updated database specific analysis procedures. Added new Sql Server disk space analysis procedure. Added retry loops. Fixed null error and unique key errors. Improved code maintainability. Deprecated Cache_AllCustom*. Removed METRICA_ACR* tables.
2022.101	Mar 31 2022	Mike Tinius	Created modular invocations to various pMODEL procedures to break up the single big query for Cache_ALL_RESOURCES.
2022.200	Apr 26 2022	Mike Tinius	Added "updateEventRegLogParseSQL" to commonValues to enable/disable parsing SQL and getting data source lineage. Consolidated all update statistics to a single procedure which uses METRICS_SQL_CONTROL as the common registration point.
2022.201	May 25 2022	Mike Tinius	Removed LDAP integration from KPImetrics. Customers will have to migrate to their own custom LDAP. Dropped LDAP_PERSON tables. Dropped LDAP related columns from metrics_*_hist tables. Modified all code related to LDAP to remove. Updated documentation. Added tables METRICS_SYS_CLUSTER and METRICS_SYS_NODES along with corresponding procedures.
2022.202	July 06 2022	Mike Tinius	Fixed SQL Server blocking issue due to "SELECT 1" in 00_ExecuteDDL and Datasource connection validation query.

			Fixed issue with node maintenance for the tables METRICS_ALL_RESOURCES and METRICS_ALL_USERS which depends on the number of nodes in a cluster. Fixed issue with Cache_ALL_RESOURCES and Cache_ALL_USERS - failure for unknown reason. Fixed issue with deadlock in SQL Server when accessing METRICS_CIS_WORKFLOW and METRICS_JOB_DETAILS.
2022.300	July 12 2022	Mike Tinius	Rewrote the INSERT/SELECT into individual native INSERT transactions to catch and ignore "duplicate key" and to insert with correct PARTITION number based on actual EVENT_TIME. Replaced usage of METADATA_ALL_RESOURCES with direct access to METRICS_ALL_RESOURCES to reduce time and storage.
2022.301	Aug 08 2022	Mike Tinius	Removed "freeUnusedMemory" calls from Cache_ALL_RESOURCES and Cache_METADATA_TABLES and serialized privilege user code in Cache_METADATA_TABLES
2022.302	Sep 22 2022	Mike Tinius	Modified Cache_SQL_Plan to work with the updated Utilities getSqlPlan and added a new column to metrics_requests_hist_sqlplan.pusheddownsql which captures the resolved SQL that TDV pushes down to the datasource.
2022.400	Dec 19 2022	Mike Tinius	Relocated procedures to /shared/ASAssets/Utilities/model/Resources/procedures. Added commonValues.hostnameProperty and pMODEL_ALL_MAPPING and getSqlPlanRemoveStrings. Requires ASAssets Utilities 2022Q400. Fix for Cache_SQL_Plan. Added DisplaySqlPlan. Ability to excluded types when generating lineage for Cache_METADATA_TABLES.

Related Documents

Name	Version
How To Use Utilities.pdf	2022Q400
KPImetrics Overview.pdf	2022Q400
KPI Metrics Overview.pptx	2022Q400
KPImetadata Configuration Guide vX.Y.pdf	2022Q400
KPImetrics Data Dictionary vX.Y.pdf	2022Q400

Supported Versions

Name	Version
TIBCO® Data Virtualization	8.x or later
AS Assets Utilities open source	2022Q400 or later

Table of Contents

1	Introduction		10			
	Purpose		. 10			
	•					
2	Requirements		11			
3	New Installation	and Configuration	16			
_		latforms				
	• •					
	<u> </u>	ics				
		nport the KPImetrics components to your DV instance				
		rerview				
		e KPImetrics data source [mandatory]				
		[2.] Configuration Parameters [mandatory]				
	[3.] Configure Co	[3.] Configure Common Values [mandatory]				
		[4.] Configure Upgrade Common Values [mandatory]				
		ograde Default Triggers [mandatory]				
		etrics Job Lookup Tables [mandatory]				
		Plmetrics Triggers [mandatory]				
	[8.] Deploy CPU and Memory Checker shell scripts (Windows or UNIX) [mandatory].					
	[9.] Configure Data Source Capabilities File [mandatory]					
	[10.] Configure Metadata					
	Execute Post-Installation Script					
	Execute Installation Script					
	Deploy CPU and Memory Checker shell scripts (Windows)					
	Enable Triggers Configure DV Out-of-the-box Metrics					
	Configure DV Ot	JT-01-tne-dox Metrics	. 42			
4	Upgrading KPIme	etrics	46			
	Introduction		. 46			
	How to Upgrade KPIme	etrics	. 46			
	Requirements:		. 46			
	Migrating from 7.	x to 8.x:	. 46			
	1.	Turn off /policy/metrics	47			
		Turn off all triggers				
		Clear out the collection tables				
		mport the latest ASAssets Utilitiesf migrating from 7.x to 8.x				
	6.	Create "metrics_app_id" user if it does not exist	. 47			
		mport KPImetrics Installation				
	8. I	Backup existing customized resources [backup and export]	48			
		mport the latest KPImetrics car file				
		Execute "3_Post_Upgrade"				
		Configure the data source capabilities file				
		Review Triggers				
		Test data capture procedures				
		Furn on all triggers				
	16. l	Jpgrade is complete	58			

	17. Database server version upgrade	58
5	Export ASAssets Resources for Migration	59
	Export Source Environment .car file	59
6	Migrate a New KPImetrics Installation	63
O		
	Export Source Environment .car file	
	Import Target Environment .car file Configure KPImetrics Target Installation	
	Execute KPImetrics Installation script	
	Configure Data Source Capabilities File	
	Configure Data Source Capabilities File	
	Turn on KPImetrics triggers	
7	Migrate a KPImetrics Patch	77
8	Upgrading a Data Source Adapter	79
	Introduction	
	How to Upgrade a Data Source Adapter	
	Requirements:	
	Upgrade Instructions:	79
9	KPImetrics Administration Scenarios	85
	Turn KPI On/Off	85
	Turn Data Virtualization (DV) metrics On/Off	
	Modify Triggers	
	Perform Oracle Database Maintenance on Collection Tables	
	Perform SQL Server Database Maintenance on Collection Tables	
	Configure Third Party Tool Access	
	Get the Current Row Distribution for the History Tables/Partitions	
	Maintenance – Adding/removing a node in the cluster	
	Data ValidationFAQ 93	93
10	KPImetrics Resources	
	Configuration Resources	
	KPI Version Overview	
	Configuration Customize Folder OverviewConfiguration Folder Overview	
	KPImetrics_installation Folder Overview	
	Published Resources	
	KPImetricsAdmin Definitions	
	configurations.updateTriggers Procedure	
	Data Sources	
	Metadata Data Source for CPUAndMemChecker	99
	Metadata Data Source Tables and Procedures	
	KPImetrics "Metrics" Table Relationship Diagram	
	KPImetrics "Metrics" Supporting Table Relationship Diagram	
	KPI Metrics "Metrics" Tables Partitioning Strategy (w/leap year)	
	KPI Metrics "Metrics" Tables Partitioning Strategy (w/no leap year)	
	KPImetrics "Metadata" Table Relationship Diagram	103

	KPI Metrics "Metadata" Tables Partitioning Strategy (w/leap year)	103
	KPI Metrics "Metadata" Tables Partitioning Strategy (w/no leap year)	103
	KPI Metrics and Metadata Database Partitioning Strategy	104
	KPI Metrics Table and Procedure Definitions	
	KPImetrics System Triggers and Load Scripts	
	KPImetrics System Helpers Scripts	
	Baseline Table Load Architecture	
	Baseline Table Accessibilty and Parallel Table Load Architecture	
	Data Transfer Scripts	
	Physical Oracle Data Transfer Script	
	Physical Oracle Data Translet ScriptPhysical SQL Server Data Transfer Script	
	Priysical SQL Server Data Transfer Script	130
11	Release Notes	144
• •	Added or Modified in this Release	
	Release 2022Q400 [Dec 19 2022]	
	Release 2022Q302 [Sep 22 2022]	
	Release 2022Q301 [Aug 08 2022]	
	Release 2022Q300 [July 12 2022]	
	Release 2022Q202 [July 06 2022]	
	Release 2022Q201 [May 25 2022]	
	Release 2022Q200 [Apr 26 2022]	
	Release 2022Q101 [Mar 31 2022]	
	Release 2022Q100 [Mar 02 2022]	
	Release 2021Q402 [Nov 23 2021]	
	Release 2021Q401 [Nov 22 2021]	
	Release 2021Q400 [Sep 10 2021]	
	Release 2021Q301 [Aug 06 2021]	
	Release 2021Q300 [Jul 13 2021]	
	Release 2021Q200 [Jun 14 2021]	
	Release 2021Q101 [Mar 24 2021]	
	Release 2021Q100 [Jan 25 2021]	
	Release 2020Q401 [Dec 14 2020]	
	Release 2020Q400 [Nov 10 2020]	
	Release 2020Q300 [Aug 27 2020]	
	Release 2020Q203 [June 25 2020]	
	Release 2020Q202 [May 26 2020]	
	Release 2020Q201 [Apr 6 2020]	
	Release 2020Q200 [Mar 12 2020]	
	Release 2020Q101 [Feb 25 2020]	
	Release 2020Q100 [Jan 23 2020]	
	Release 2019Q402 [Dec 23 2019]	
	Release 2019Q401 [Nov 6 2019]	
	Release 2019Q400 [Oct 24 2019]	177
	Release 2019Q301 [Aug 31 2019]	178
	Release 2019Q300 [Aug 5 2019]	
	Release 2019Q200 [Jun 13 2019]	180
	Release 2019Q102 [Mar 12 2019]	181
	Release 2019Q101 [Jan 30 2019]	182
	Release 2019Q100 [Jan 7 2019]	183
	Release 2018Q401 [Dec 4 2018]	
	Release 2018Q400 [Dec 1 2018]	
	Release 2018Q302 [Oct 12 2018]	
	Release 2018Q301 [Oct 1 2018]	186
	Release 2018Q3 [Sep 2018]	

12	Post-Installation Background Information	189
	Information Only Section	189
	Create the KPImetrics storage tables for Oracle	190
	Create the KPImetrics storage tables for SQL Serer	192
	Common Configuration for all Databases	193

1 Introduction

Purpose

The purpose of this document is to provide guidance on how install, monitor and use the AS Assets KPI Metrics.

Audience

This document is intended to provide guidance for the following users:

- Data Virtualization Administrators provides a guide for installation.
- Architects provides the KPImetrics architecture.
- Data professionals provides background on the published views and usage.
- Operations users provides insight into triggers and procedures that are executed.
- Project Managers provides general information on KPImetrics.

References

Product references are shown below. Any references to CIS or DV refer to the current TIBCO® Data Virtualization.

- TIBCO® Data Virtualization was formerly known as
 - Cisco Data Virtualization (DV)
 - Composite Information Server (CIS)

Overview

Please review the document "KPImetrics Overview.pdf".

2 Requirements

The following requirements and pre-requisites must be met:

- Minimum of Data Virtualization (DV) 8.3.0.00 or higher is recommended.
- TIBCO Open Source ASAssets Utilities_2022Q400.zip is required as a baseline.
 However, it is recommended to download whatever the "latest release" is. Follow the instructions within the zip file for installation.
- Use <u>KPImetrics worksheet.xlsx</u> as a way to gather the required information for installation.
- A DV admin user will be created at installation time as "metrics_app_id@composite" so
 that resource ownership can be assigned to all /shared/ASAssets/KPImetrics and
 /services/databases/ASAssets/KPImetrics. Required for metrics data filter deletion.
 - Upon create the user studio rights are set as follows: ACCESS_TOOLS,
 READ_ALL_CONFIG, READ_ALL_RESOURCES, READ_ALL_STATUS,
 READ_ALL_USERS, MODIFY_ALL_CONFIG, MODIFY_ALL_RESOURCES
 - MODIFY_ALL_CONFIG and MODIFY_ALL_RESOURCES are required for Cache_METADATA_TABLES to read row-based security and columnbased security metadata.
- Database Requirements
 - A database is required for each TDV environment. A TDV cluster will share a single database. The application configuration does not support mixing environments in the same database.
 - Do not create environment names in the name of the database (catalog) or schema. This thwarts portability of code and ease-of-configuration when migrating the code to the next environment. Keep the names simple like DVKPI.
 - Oracle 11g, 12c or later (recommended due to better push-down capabilities)
 - Requires partitioning.
 - SQL Server 2016 or higher or SQL Server Azure

- Requires partitioning + syntax: truncate table <t> with(partitions(n))
- Previous implementations of KPImetrics using SQL Server 2012/2014 must migrate their database to SQL Server 2016.
- Data rention: The amount of time to retain the data before purging. The period suggestions are as follows:
 - Lower-level environments (LLE) 120 days for LLE.
 - Production (PROD) 366 days in production PROD.
 - All metrics tables and metadata tables use a 366-day interval partitioning strategy so it can be up to 366 days of retention and uses a sliding window where partitions are truncated but not dropped.
- Storage: Minimum of 100 GB to start with and be prepared to grow.
 - Oracle Tablespaces:
 - <u>Logging</u>: The objective is to keep logging to a minimum especially in LLE. As
 described below the collection tables [METRICS_DATA_COLL] should always be
 configured for NOLOGGING in all environments.
 - <u>Tablespace</u>=METRICS_DATA_COLL
 - This will contain the DV metrics collection tables [metrics_sessions, metrics requests, metrics resources usage]
 - Configured to be a **NOLOGGING** tablespace so that it is more efficient for providing insert/delete operations every 2 hours without impacting performance. Rows will be transferred via to the history tables which are stored in the tablespace METRICS_DATA_HIST.
 - o Initial 20 GB
 - <u>Tablespace</u>=METRICS_DATA_HIST
 - This will contain the KPImetrics tables.
 - Configured with logging and large enough to hold 100 GB and grow as needed.
 - o Initial 40 GB
 - <u>Tablespace</u>=METRICS_DATA_IDX
 - This will contain the KPImetrics indexes.

- Configured with logging and large enough to hold 100 GB and grow as needed.
- o Initial 40 GB

SQL Server File Groups:

- <u>Logging</u>: The objective is to keep logging to a minimum especially in LLE. For LLE
 environments the database should be set to "Recovery mode"=SIMPLE.
- <u>Filegroup</u>=METRICS_DATA_COLL
 - This will contain the DV metrics collection tables [metrics_sessions, metrics_requests, metrics_resources_usage]
 - Data will be processed every 2 hours. Rows will be transferred via to the history tables which are stored in the tablespace METRICS_DATA.
 - Initial 20 GB
- Filegroup=METRICS_DATA_HIST
 - o This will contain the KPImetrics tables.
 - Configured with logging and large enough to hold 100 GB and grow as needed.
 - o Initial 40 GB
- <u>Filegroup</u>=METRICS DATA IDX
 - o This will contain the KPImetrics indexes.
 - Configured with logging and large enough to hold 100 GB and grow as needed.
 - o Initial 40 GB
- Database and schema: A separate database for each environment is required. This is due to the "intensity" of collection and the amount of data that gets collected. Additionally, it makes it easier to migrate the TDV code from one environment to the next when upgrades are required.
 - A <u>database schema</u> is required <u>for each TDV environment</u> to store the Metrics data for a period of time specified by the user. **KPImetrics cannot** support 2 or more different TDV environment instances in the same schema. For a TDV cluster, the same database schema "must" be used.
 - It is highly recommended to use the same catalog (dbname) and shema for each environment to make TDV code migration easier.

- Recommended schema (user) or database name=DVKPI
- Oracle Privileges: Must be granted privileges for the schema user:
 - SELECT/INSERT/UPDATE/DELETE TABLE
 - CREATE/DROP/ALTER TABLE
 - CREATE/DROP/ALTER INDEX
 - EXECUTE/CREATE/DROP PROCEDURE
 - EXECUTE FUNCTION
 - SELECT/CREATE/DROP SEQUENCE
 - Oracle specific:
 - CREATE/ALTER SESSION
 - RESOURCE
 - EXECUTE SYS.DBMS_STATS.GATHER_TABLE_STATS
 - EXECUTE DBMS LOB.INSTR
 - EXECUTE DBMS LOB.GETLENGTH
 - CREATE/DROP/ALTER PARTITION
 - ALTER TABLE ADD PARTITION
 - ALTER TABLE DROP PARTITION
 - SELECT SYS.ALL TAB PARTITIONS
 - GRANT EXECUTE ON SYS.DBMS XMLGEN TO <role>
 - GRANT EXECUTE ON SYS.DBMS LOB TO <role>
 - GRANT EXECUTE ON SYS.DBMS STATS TO <role>
 - GRANT EXECUTE ON system catalog tables:
 - ALL_TABLES, ALL_INDEXES, ALL_VIEWS, ALL_TAB_COLUMNS, ALL_CONSTRAINTS, ALL_TAB_PARTITIONS, DATE_PARTITION, USER_SEQUENCES
- SQL Server Privileges: Must be granted privileges for the schema user:
 - Option 1 General access to the DV KPImetrics DB user:
 - Give the SQL Server user "dbadmin" +

GRANT EXECUTE ON SCHEMA:: [<schema>] TO <username>

- Option 2 Granular privileges:
 - SELECT/INSERT/UPDATE/DELETE TABLE
 - CREATE/DROP/ALTER TABLE
 - CREATE/DROP/ALTER INDEX
 - EXECUTE/CREATE/DROP PROCEDURE
 - EXECUTE FUNCTION
 - SELECT/CREATE/DROP SEQUENCE
 - SQL Server specific:
 - UPDATE STATISTICS
 - CREATE/DROP/ALTER PARTITION
 - CREATE PARTITION FUNCTION
 - CREATE PARTITION SCHEME
 - ALTER TABLE SWITCH PARTITION

- ALTER PARTITION SCHEME [NEXT USED]
- ALTER PARTITION FUNCTION [SPLIT RANGE | MERGE RANGE]
- TRUNCATE TABLE
- requires 2016: TRUNCATE TABLE [WITH(PARTITIONS(n))]
- GRANT EXECUTE ON system catalog tables:
 - sys.tables, sys.columns, sys.indexes, sys.views, sys.types, sys.objects, sys.key_constraints, sys.index_columns, sys.sequences, sys.partition_schemes, sys.partition_functions, sys.partitions, sys.partition_range_values
- Note: CHARINDEX will be executed on a where close on a TEXT field for metrics requests stg.description.
- Partition Query:
 - SELECT sys.tables, sys.indexes, sys.partition_schemes, sys.partition_functions, sys.partitions, sys.partition_range_values

Oracle Tuning:

- Increase the archiver timeout to 2 hours for each process.
- Increase the deletion of the archive logs to 1 hour if errors start occurring referencing rollback segments or archive space issues.
- Increase the UNDO tablespace to 50 GB or higher if errors start occurring regarding rollback segment too old.
- Calibrate the I/O (dbms_resource_manager.calibarate_io).

3 New Installation and Configuration

Supported Database Platforms

The majority of metrics discussed in the previous sections are generated using custom aggregation procedures. Because DV does not retain the system metrics data needed to generate KPImetrics data long enough for historical reporting, the KPImetrics module must store this cached data to a dedicated database in order to retain the generated results.

The KPImetrics module supports the following database platforms at this time as incremental caching targets.

- Oracle 11g, 12c or later (recommended due to better push-down capabilities)
- SQL Server 2016 or higher or SQL Server Azure
 - Previous implementations of KPImetrics using SQL Server 2012/2014 must migrate their database to SQL Server 2016.

Support for additional platforms would require customization of the KPImetrics module by a professional services consultant. Please contact TIBCO's professional service group for details.

Please note that it is strongly recommended that the database chosen to cache KPImetrics data have case sensitivity and ignore trailing space settings that match your DV server to maximize query pushdowns in order to minimize the amount of additional load the KPImetrics module adds to your DV environment.

Installing KPImetrics

Turn off DV metrics

Turn off DV metrics if it is running.

- 1. Use DV Studio and open /policy/metrics under the root folder at the bottom of Studio
- 2. If metrics is "enabled", uncheck the box to turn if off.

Download and Import the KPImetrics components to your DV instance

Deploy the KPImetrics components to your DV instance in order to use the KPImetrics module.

- 3. <u>Download</u> the latest ASAssets Utilities and KPImetrics from the TIBCO Open Source GIThub site
 - For TDV 8.5 and higher, enable CJP in the Configuration server attributes before

importing the Utilities. -- /sources/cjp/enableCJPs

- i. Data Sources Custom Java Procedure Sources Enable the ability to run Custom Java Procedures = true
- b. Utilities: Utilities 2022Q400.zip or later
 - Follow the Utilities documentation "How To Use Utilities.pdf" for installation.
 Do this first.
 - Create the ASAssets published datasource if it does not exist: /services/databases/ASAssets
 - 2. Right-click on Desktop (admin) and Import Utilities_YYYYQnnn.car
- c. KPImetrics: KPImetrics 2022Q400.zip or later
 - i. KPImetrics YYYYQnnn installation.car
 - ii. KPImetrics_YYYYQnnn.car
 - iii. KPImetrics Configuration Guide vx.y.pdf
 - iv. KPImetadata Configuration Guide vx.y.pdf
 - v. KPImetrics Table Relationship Diagram.pptx
 - vi. KPImetrics Overview.pdf
 - vii. KPImetrics worksheet.xlsx
 - viii. KPImetrics scripts directory

If <u>upgrading</u> an existing KPImetrics installation

1. Proceed to Section 4 "Upgrading KPImetrics"

If migrating a newly configured installation to the next environment

1. Proceed to Section 5 "Migrating a new KPImetrics Installation"

If **new installation**, complete the following steps to configure the KPImetrics components:

- 2. Login to DV Studio as "admin"
 - a. All configuration operations should be completed as DV "admin".
- 3. Import KPImetrics Installation CAR file:
 - a. In the Studio left resource panel tree, right click on "Desktop (admin)" or the root folder (/) icon and select Import.
 - Import the file KPImetrics_YYYYQnnn_installation.car with the overwrite checkbox enabled. The folders /shared/ASAssets/KPImetrics_installation and should appear after the import completes.
- 4. Import KPImetrics CAR File:
 - a. In the Studio left resource panel tree, right click on "Desktop (admin)" or the root folder (/) icon and select Import.
 - b. Import the file **KPImetrics_YYYYQnnn.car** with the overwrite checkbox enabled. The folders /shared/ASAssets/KPImetrics and

/services/databases/ASAssets/KPImetrics appear after the import completes.

c. Don't worry about any red-impacted resources. Installation will resolve those.

Configuration Overview

The following is an overview of resources to be configured prior to post-installation execution.

Recommended approach: Use **KPImetrics worksheet.xlsx** as a way to gather the required information for this section.

- 1. Configure KPImetrics Data Source
- 2. Configure DV Email
- 3. Configure Common Values Procedure
- 4. Configure Upgrade Common Values Procedure
- 5. Configure Upgrade Default Triggers
- 6. Configure KPIMetrics Job Lookup Tables
- 7. Configure KPImetrics Triggers
- 8. <u>Deploy CPU and Memory Checker shell scripts (Windows or UNIX)</u>
- 9. Configure Data Source Capabilities File
- 10. Configure Metadata

[1.] Configure the KPImetrics data source [mandatory]

The KPImetrics module makes use of several custom tables to store logging and metrics data. You must configure a data source connection in order to view KPImetrics data.

1. Configure KPImetrics data source:

- Locate and configure the appropriate data source for your KPImetrics database.
 - i. NOTE: The recommended user is DVKPI but any user will work fine.
 - ii. Oracle: Recommended schema (user)=DVKPI
 - 1. /shared/ASAssets/KPImetrics/Physical/Metadata/KPI_oracle_11g
 - 2. /shared/ASAssets/KPImetrics/Physical/Metadata/KPI_oracle_12c
 - /shared/ASAssets/KPImetrics/Physical/Metadata/KPI_oracle_19c TDV 8.3 or higher
 - iii. SQL Server: Recommended database name=DVKPI
 - 1. /shared/ASAssets/KPImetrics/Physical/Metadata/KPI sqlserver 2016
 - /shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_2019
 - TDV 8.3 or higher
 - iv. If SQL Server, go to the Advanced Tab and remove the "SELECT 1" from the connection validation query to prevent locking.

- b. Enable the data source that is required.
- c. Test the connection to make sure it is working properly.
- d. Disable the data sources not being used.
- e. If you used a schema name or database name different than DVKPI, the post installation script will automatically take care of this.

[2.] Configuration Parameters [mandatory]

1. Configure DV email: Used to send alerts and notifications

- a. Select Administration \rightarrow Configuration \rightarrow Server \rightarrow Configuration \rightarrow E-mail
 - i. From Address
 - ii. SMTP Host Name
 - iii. SMPT Port
 - iv. If required, provide user name and password
- b. Test sending an email using /lib/util/SendEMail
 - i. Do not put anything in the "from" address. Leave blank.
 - ii. Populate the following:
 - "to"=<your email>
 - 1. "subject"=test
 - 2. "contentType"=TEXT PLAIN
 - 3. "content"=test

2. Configure Weight of Time Keeper

- a. Select Administration → Configuration → Server → Configuration → Cluster
 → Cluster trigger distribution
 - Weight of time keeper: 0
 - Set this if time keeper needs special weight in weighted round robin trigger distribution. For most use cases this value need not be set.
 - 2. Set to 0 so that the timekeeper node does "not" participate in executing the triggers.

3. Configure Long Running Processes (Request Run Time)

- a. Select Administration → Configuration → Server → Events and Logging →
 Event Generation → Request Events → Request Run Time
 - i. This controls the period of time after which a request is considered to be long-running, resulting in the generation of a RequestRunForTooLong event, if request events are enabled. A value of 0 disables this feature.
 - ii. Typical value is 60 minutes.
 - iii. This event executes this trigger:

kpimetricsTrig 18 CheckLongRunningRequests

4. Postgres Repository Pool Settings


- a. Select Administratioin → Configuration → Server → Configuration → Repository Database → Connection Pools
 - i. System Pool
 - 1. Pool Maximum Size (On Server Restart): 200
 - 2. Default=50
 - 3. Maximum number of internal database connections opened for use by the Server metadata sub-system. Note that this number must be greater than the "Minimum". This value is locally defined. It will not be altered when restoring a backup and will not be replicated in a cluster.
 - ii. System Table Pool
 - 1. Pool Maximum Size (On Server Restart): 200
 - 2. Default=50
 - Maximum number of internal database connections opened for client access to system tables. Note that this number must be greater than the "Minimum". This value is locally defined. It will not be altered when restoring a backup and will not be replicated in a cluster.

5. For Microsoft SQL Server Data source target only

- a. Select Administratioin → Configuration → Data Sources → MS SQLServer Sources
 - i. <u>Microsoft BCP utility path</u>: The path on the TDV server where Microsoft BCP is installed.
 - 1. Default=<not set>
 - The absolute file path of the Microsoft BCP utility. This value is locally defined. It will not be altered when restoring a backup and will not be replicated in a cluster.
 - ii. Column Delimiter: |~|
 - 1. Default=<not set>
 - The column delimiter character to be used for the BCP utility while loading data. If not defined, the value in Configuration > Data Sources > Common to Multiple Source Types > Data Sources Data Transfer > Column Delimiter will be used.
 - 3. If SQL Server and BCP is configured, use "|~|" for the "MS SQL Server Sources" "Column Delimiter" instead of just a "|" symbol. This is because the data will contain pipe symbols "|". The "|~|" makes the delimiter more unique where the data should not contain this pattern. Search for "Column Delimiter" in Administration→Configuration.
- b. Select Administratioin → Configuration → Data Sources → Common to

Multiple Source Types

- i. Data Sources Data Transfer → Buffer Flush Threshold. The minimum value is 1000. Change to 50000
- ii. Default Commit Row Limit: Change to 50000
- c. Enable Native Loading on the datasource
 - i. Open KPI sqlserver 2016
 - 1. Click on the "Advanced" tab
 - 2. Enable Native Data Loading and save the datasource.



[3.] Configure Common Values [mandatory]

The KPImetrics module uses several constant values that are set in the procedure /shared/ASAssets/KPImetrics/Customize/**commonValues**. You will need to update some of these constants with values for your environment to ensure that KPImetrics functions correctly. Update the following minimum values for operation.

1. Configure Common Values:

- a. Open the procedure /shared/ASAssets/KPImetrics/Customize/commonValues and modify the following properties:
- b. cisServerNickname Configure with the DV server nickname for the instance of DV. E.g. DEV1, SIT1, UAT1, PROD1. This is used in email notifications to alert you of issues. You determine what your environment nicknames are. Be consistent. <u>Each DV server environment must be unique</u>. For a DV cluster, each node in the cluster will have the same nickname as it describes the environment and not the node.
 - ii. UNIX (Linux 7): '\$DV_HOME/bin/KPImetricsFreeMemCommand_linux7.sh'
- c. hostnameProperty Identifies the propery for hostname: (default) SERVER_HOSTNAME - retrieve hostname. SERVER_ID - extract hostname from the server id. If the SERVER_HOSTNAME does not return the proper or actual hostname then use SERVER_ID. Check the server attributes: "Host Name" and "Server ID" to determine what TDV will return.
- d. Data Source Configuration:
 - i. dataSourceName Provide the name of the data source used to store KPImetrics data. Valid values are KPI_oracle_11g, KPI oracle 12c, KPI sqlserver 2016
 - ii. **dataSourceCatalog** Identifies the data source catalog name if applicable [SQL Server]. Set to null if not applicable.
 - iii. **dataSourceSchema** Identifies the data source schema name [Oracle, SQL Server].
 - iv. collectionTablespaceName Identifies the Metrics collection tablespace name which will contain the DV out-of-the-box metrics

- tables. To use the default tablespace or no tablespace set this value to NULL. You should have already created a tablespace (with no logging if Oracle) or a filegroup if SQL Server.
- v. **historyTablespaceName** Identifies the Metrics history tablespace name which will contain all of the history and reporting tables. To use the default tablespace or no tablespace set this value to NULL. You should have already created a tablespace or a filegroup if SQL Server.
- vi. **indexTablespaceName** Identifies the Index tablespace name which will contain the indexes for the history tables. To use the default tablespace or no tablespace set this value to NULL. You should have already created a tablespace or a filegroup if SQL Server.
- **vii. Gather Statistics** Provides the ability to configure if TDV executes the dbms statistics or if it is controlled by the database team scripts.
 - 1. **executeStatisticsCollectionRule** Execute COLLECTION table statistics rule:
 - a. ON this is the setting where statistics will be gathered by TDV after each iteration of the load procedure.
 - OFF do not execute statistics. Use this setting if the database team has scripts to execute statistics every night.
 - c. LAST TDV will execute during the last trigger of the day before midnight of the current day.
 - 2. **executeStatisticsStageRule** Execute STAGE table statistics rule:
 - a. ON this is the setting where statistics will be gathered by TDV after each iteration of the load procedure.
 - OFF do not execute statistics. Use this setting if the database team has scripts to execute statistics every night.
 - 3. **executeStatisticsHistoryRule** Execute HISTORY table statistics rule:
 - a. ON this is the setting where statistics will be gathered by TDV after each iteration of the load procedure.
 - OFF do not execute statistics. Use this setting if the database team has scripts to execute statistics every night.
 - c. LAST TDV will execute during the last trigger of the day before midnight of the current day.
- viii. **indexOptions** Provides an interface to inject index rebuild options for pRebuildIndexes. Oracle only.
 - 4. NOLOGGING (default) reccommended.

- Conversely...LOGGING.
- 5. PARALLEL n where n represents the degree of parallelism
- 6. ONLINE Specify ONLINE to allow DML operations on the table or partition during rebuilding of the index.
- ix. **historyTableCompression** Identifies the type of compression that is allowed for the history tables [metrics_sessions_hist, metrics_resources_usage_hist, metrics_requests_hist]. Applied on table creation only.
 - 1. Oracle:
 - a. NOCOMPRESS used for an Oracle database that does not support compression
 - b. COMPRESS FOR QUERY HIGH used for an Oracle Exadata platform.
 - c. COMPRESS basic compression.
 - 2. SQL Server: parameters is ignored and should be set to null

e. Cluster Awareness Configuration:

- i. The following variables are used to designate a dedicated time keeper host and port. None of the ClusterSafeCache procedures should be executed on a dedicated time keeper node because general processing and work is never routed to this node. It's only job in the cluster is to service triggers and perform deployments. However, rule #4 is the exception to this recommendation. Execute the following procedure on the "dedicated" time keeper node to get the hostname and port:
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/pG etSystemInformation
- ii. Rules:
 - 1. SINGLE NODE: Set the hostname and port to null when this environment is a single node and not a cluster.
 - 2. CLUSTER NO TIMEKEEPER: Set the hostname and port to null when this environment is a cluster and any node in the cluster may be the timekeeper and all nodes do work.
 - CLUSTER WITH TIMEKEEPER: Set the hostname and port to the the dedicated timekeeper node and port when the environment is a cluster and the node has been dedicated as a timekeeper and does not do work.
 - 4. CLUSTER WITH TIMEKEEPR CAPTURE: Set the hostname and port to null when the environment is a cluster and metadata should be captured for the timekeeper even though it is dedicated and does not perform work. Note: Using this option will require running the KPImetrics procedures on this node thus requiring it do work.
- iii. **dedicatedTimeKeeperHostname** dediated time keeper host

iv. **dedicatedTimeKeeperPort** – dedicated time keeper port.

f. Purge History and Partitioning:

- i. This is used to purge various tables. A valid value must be between 1 day and 366 days. Anything else will throw an exception. For example, 4 months of data would be 120 days. One year of data would be 366 days. The exception the above rule is purgeMetadata. Due to the incredible amount of data that it collects, it should be tuned down do more like 30 days or less.
- ii. The procedures "pPurgeData" or "Cache_METADATA_TABLES" will always purge the current day prior to loading new data. The amount of data is always the current day + the history. To keep 3 days would be the current day 2 days of history. Example: To keep 3 days of metadata the value will be 3. The other partitions will be truncated as per the formula: [startDate=CURRENT_TIMESTAMP endDate=DATEADD('day', (366-3), CURRENT_TIMESTAMP)]. The startDate and endDate are passed into the P_METADATA_TRUNCATE_PARTITION function. All partitions are truncated from the current day until -3 days from current day within the 366-interval partitioning scheme. Therefore, there are 3 total days of data available to query.
- iii. **purgeWorkflowData** purge workflow, control and log tables.
 - 1. Purge tables: METRICS_CIS_WORKFLOW, METRICS_JOB_DETAILS, METRICS_EVENT_REG_LOG, METRICS_EVENT_REG_LOG_LINEAGE, METRICS JOB DELETE CHECK, METRICS SQL CONTROL LOG
 - 2. Rule executed by .../Metadata/System/ClusterSafeCache/pPurgeData().
- iv. **purgeSQLRequests** purge SQL requests and lineage tables.
 - 1. Purge tables: METRICS_SQL_REQUEST, METRICS_SQL_RESOURCE, METRICS SQL COLUMNS, METRICS SQL RESOURCE LINEAGE
 - 2. Rule executed by .../Metadata/System/ClusterSafeCache/pPurgeData().
- v. **purgeResourceUsage** purge the resource usage tables.
 - Purge tables: METRICS_CIS_SYSTEM_RESOURCES, METRICS_CPU_MEMORY_CHECKER, METRICS_LOG_DISK, METRICS_LOG_IO, METRICS_LOG_MEMORY, METRICS_SYS_CACHES, METRICS_SYS_DATASOURCES
 - 2. Rule executed by .../Metadata/System/ClusterSafeCache/pPurgeData().
- vi. **purgeHistory** purge the metrics history tables.
 - 1. Purge tables: metrics_sessions_hist, metrics_requests_hist, metrics resources usage hist
 - Rule executed by .../Metadata/System/ClusterSafeCache/pPurgeData().
- vii. **purgeMetadata** purge the metadata tables.
 - 1. Purge tables: All METADATA % tables.
 - Rule executed by
 - .../Metadata/System/ClusterSafeCache/Cache METADATA TABLES().
- viii. **partitionStartDate** [required] Identifies the starting date for the partitioning scheme in the format 'YYYY-MM-DD'.

- If the partition format is not correct and it cannot be cast to a DATE then an error is thrown. This should be the first day of the month in which metrics are turned on and capturing data.
- If metrics have been previously turned on and have been capturing data for a while then use the first of the month of the date they were turned on. Execute the following query against the current metrics table to determine the date: select min(starttime) starttime from metrics_requests

g. Email Configuration:

i. sendTo – Provide the comma separated list of email address to send notifications to. This setting is used as a fall back if there are no METRICS_EVENT_REGISTRATION rows configured and, in the event, that the database is completely down. Note: You must configure email in DV.

h. CPU and Memory Checker:

- CPUCheckerCommandPathWindows no changes required.
- ii. **CPUCheckerCommandPathUNIX** Only modify if linux6 is being used instead of linux7.
- iii. **memoryCheckerCommandPathWindows** no changes required.
- iv. memoryCheckerCommandPathUNIX Only modify if linux6 is being used instead of linux7.

i. Cache System Datasource Filters

- i. storeSysDatasourcePassword default=N. This is used to determine whether to store the datasource metadata password or not in the METRICS_SYS_DATASOURCES tables.
- ii. **ignoreSysDatasourcePaths** This is used to ignore gathering info on the list of pipe-separated datasources.
- j. dataTransferBatchInsertMax Identifies the insert batch maximum number for the P_METRICS_ALL_TABLES data transfer procedure. This identifies the insert batch size commit when transferring data from the metrics_requests collection table into the metrics_requests_stg stage table. For SQL Server, this value governs inserts into all 3 staging tables. Note: This is currently implemented for Oracle and SQL Server and defaults to 50000.
- k. dataTransferBatchDeleteMax Identifies the delete batch maximum number for the P_METRICS_ALL_TABLES and P_METRICS_DELETE_COLLECTION data transfer procedures. This identifies the delete batch size commit when deleting collection table data for metrics_sessions, metrics_requests and metrics_resources_usage and the staging tables. Note: This is currently only implemented for SQL Server and defaults to 50000.
- I. dataTransferBatchUpdateMax Identifies the batch maximum number for the P_METRICS_ALL_TABLES data transfer procedure. After the metrics requests collection table is transfered into the metrics requests hist

table, an update routine executes to correlate the resourcekind and dataservicename from the metrics_resources_usage_hist with the metrics_requests_hist table. This routine commits rows from the metrics_requests_stg table for the batch number specified here. Note: This is currently implemented for Oracle and SQL Server and defaults to 50000.

[4.] Configure Upgrade Common Values [mandatory]

The KPImetrics module provides a <u>mandatory</u> mechanism to modify specified commonValues during migration to a different environment by executing "upgrade_commonValues_KPI" during 3_Post_Upgrade migration. This modification should only be done once in the DEV environment where KPImetrics is initially setup. It will be required when migrating resources from DEV to other environments.

Modify the following procedure:

/shared/ASAssets/KPImetrics/Customize/upgrade_commonValues_KPI.

Specify only values that change from environment to environment. If a value in commonValues is common to all environments, then it should not be placed in "upgrade_commonValues_KPI".

- EnvironmentHostList The environment name:hostname(timekeeper) validation list.
 - a. Option 1: pipe-separated list of environment names: single host or timekeeper host in which to validate against. Use base hostname only with no domain qualifier.
 - b. Option 2: Leave the value as null instead of the setting a DEFAULT list to prevent validating the environment with a host name.
- 2. **commonValueList** Double-pipe delimited name/value pair format:

Name=Value||Name=Value||Name=Value

- a. Guidelines:
 - i. If the current value "commonValue" is on multiple-lines, it cannot be updated using this procedure. It must be done manually.
 - ii. If the current value is an actual null value and replacement value is a string then provide the following in the commonValueList:
 - iii. Place 2 single quotes around the value. This is not necessary if the value in commonValues already contains a string value with single quotes around it.
 - 1. constantName="value"||
- 3. The "CASE" statement is what gets modified.
 - a. Add a "WHEN" clause for each environment.
 - b. Example: WHEN envName = 'DEV' THEN SET commonValueList =

```
'cisServerNickname='||envName||'|| dedicatedTimeKeeperHostname=null||dedicatedTimeKeeperPort=null|| purgeWorkflowData=30||purgeSQLRequests=30||purgeResourceUsage=30||purgeHistory=30|| purgeMetadata=30|| partitionStartDate=2021-04-01|| sendTo=IT-Email@org.com||
```

[5.] Configure Upgrade Default Triggers [mandatory]

The KPImetrics module provides a <u>mandatory</u> mechanism to modify specified defaultTriggersToEnable during migration to a different environment by executing "upgrade_defaultTriggers_KPI" during 3_Post_Upgrade migration. This modification should only be done once in the DEV environment where KPImetrics is initially setup. It will be required when migrating resources from DEV to other environments.

Modify the following procedure:

/shared/ASAssets/KPImetrics/Customize/upgrade_defaultTriggers_KPI.

Specify only values that change from environment to environment. If a value in commonValues is common to all environments, then it should not be placed in "upgrade_commonValues_KPI".

- EnvironmentHostList The environment name:hostname(timekeeper) validation list.
 - a. Option 1: pipe-separated list of environment names: single host or timekeeper host in which to validate against. Use base hostname only with no domain qualifier.
 - b. Option 2: Leave the value as null instead of the setting a DEFAULT list to prevent validating the environment with a host name.
- 2. **defaultTriggerList** Linefeed delimited name/value pair format:

Name=Value Name=Value Name=Value

- a. Guidelines:
 - i. Each line consists of a trigger name = ON|OFF.
 - Each environment is specified as triggers may be different for a different environment.
- 3. The "CASE" statement is what gets modified.
 - a. Add a "WHEN" clause for each environment.
 - b. Example:

WHEN envName = 'DEV' THEN SET defaultTriggerList = 'kpimetricsTrig_00_CheckMetricsActivityDebug=OFF kpimetricsTrig_01_Cache_ALL_RESOURCES=ON

```
kpimetricsTrig 04 Cache CIS SYSTEM RESOURCES=ON
kpimetricsTrig 05 Cache CPU MEMORY CHECKER=ON
kpimetricsTrig_06_Cache_LOG_DISK=ON
kpimetricsTrig_07_Cache_LOG_IO=ON
kpimetricsTrig_08_Cache_LOG_MEMORY=ON
kpimetricsTrig 10 Cache METRICS SQL REQUEST=OFF
kpimetricsTrig 11 Cache METRICS SQL REQUEST REPROCESS=OFF
kpimetricsTrig_12_Cache_SYS_CACHES=ON
kpimetricsTrig_13_Cache_SYS_DATASOURCES=ON
kpimetricsTrig_14_CheckCISWorkflowStatusFail=ON
kpimetricsTrig_15_CheckMetricsActivity=ON
kpimetricsTrig 16 PurgeHistoryData=ON
kpimetricsTrig 17 CheckExceedMemoryPercentRequests=ON
kpimetricsTrig_18_CheckLongRunningRequests=ON
Deprecated: Triggers 19-22. Default=OFF
kpimetricsTrig_23_Cache_METRICS_SQL_RESOURCE_LINEAGE=OFF
kpimetricsTrig 24 ValidateUpdateStatusTables=ON
kpimetricsTrig 25 ExecuteMetricsSqlControl=ON
kpimetricsTrig 26 Cache SQL Plan=OFF
kpimetricsTrig_27_ExecuteUpdateStatistics=ON
kpimetricsTrig 28 Cache SYS CLUSTER=ON
kpimetricsTrig_29_DetectClusterBreak=ON
kpimetricsTrig 30 DBMSScheduler=ON
kpimetricsTrig_31_DBMSSchedulerError=ON
kpimetricsTrig_33_DeleteCollection=OFF
kpimetricsTrig_34_DBMSRebuildIndexes=ON
kpimetricsTrig 35 DBMSDeleteCheck=OFF
kpimetricsTrig 40 Cache METADATA TABLES=OFF
kpimetricsTrig 50 MetricsPersistenceFailure=ON
kpimetricsTrig_51_MetricsTruncateFailure=ON
kpimetricsTrig 52 MetricsBackupFailure=ON
kpimetricsTrig_53_MetricsRestoreFailure=ON
```

kpimetricsTrig 02 Cache ALL USERS=ON

[6.] Configure Metrics Job Lookup Tables [mandatory]

The KPImetrics contains several lookup tables that need to be pre-populated prior to the installation script running. The tables include:

- METRICS JOB ENVIRONMENTS
- METRICS JOB FILTERS
- METRICS_EVENT_REGISTRATION

1. Configure pqInsert_METRICS_JOB_tables

- a. Edit /shared/ASAssets/KPImetrics/Customize/pqInsert_METRICS_JOB_tables
 - i. Configure the **METRICS_JOB_ENVIRONMENTS**
 - 1. Add a unique row for each environment in your pipeline. Remove

- any example rows that you are not relevant. For multiple TDV instances per environment use the "site" name as the environment name. For example, 2 DEV instances would be DEV1 and DEV2.
- 2. Example: DEV1, SIT1, UAT, PROD
- ii. Configure the *METRICS_JOB_FILTERS* The job filters are used to filter out rows by the data transfer routine when transferring from the collection tables to the history tables. The objective is to identify potentially high-use, non-user defined requests that are of little or no value to the ultimate KPImetrics reporting. Since this feature is not built into DV metrics, it is "highly" recommended to filter out admin and other user accounts associated with deployment or non-query type of activity in DV. Additionally, rows can be filtered out based on the resource path and resource type.
 - 1. Example 1 would be for each environment:

```
ENV_TYPE TABLE_NAME USER DOMAIN RESOURCE_KIND 'UAT', 'metrics_resources_usage', 'admin', 'composite', 'system'
```

2. Example 2 would be any of the KPImetrics functionality that produces their own events. The assumption is that the KPImetrics folder resources were configured for resource ownership by metrics app id during installation:

```
ENV_TYPE TABLE_NAME USER DOMAIN RESOURCE_KIND 'UAT', 'metrics_resources_usage', 'metrics_app_id', 'composite', 'system'
```

3. Example 3 would be a deployment process that produces an inordinately high volume of events. Assume you have a deployment user called "deploy_app_id" that runs a deployment process but you don't want to log those events:

```
ENV_TYPE TABLE_NAME USER DOMAIN RESOURCE_KIND 'UAT', 'metrics_resources_usage', 'deploy_app_id', 'composite', 'system'
```

- 4. Add a unique row for each environment, user, domain and resourcekind combination.
- 5. Example 4: Suppose you had a particular resource path and type that you wanted to filter out. Insert a row for each environment like this:

'/lib/resource/GetColumnDependencies', 'PROCEDURE'

- b. Post-installation maintenance
 - This script can be executed by itself post-installation by simply executing it to reload what is configured.

2. Configure palnsert METRICS EVENT REGISTRATION

a. Edit

/shared/ASAssets/KPImetrics/Customize/pqInsert_METRICS_EVENT_REGISTRATION

- a. Configure the METRICS EVENT REGISTRATION
 - 1. This table contains the event registrations for sending emails based on the subscriptions to various events. This procedure is used for either initial load or maintenance. If a row already exists, it does not update it. It simply bypasses it. This means that you can run this procedure as many times as you want and not impact existing rows. It does not delete or unsubscribe requester events. To delete a subscription, invoke pMetricsEventRegistrationUnsubscribe(). A subscription in the METRICS_EVENT_REGISTRATION table consists of a unique record for the combination of SUBSCRIBER_EMAIL, GROUP_NAME, ENVIRONMENT_TYPE, EVENT_TYPE and REQUESTER_EMAIL.
 - Use Case 1 This provides a way to historically log Long Running Events and Memory Exceeded Events, amongst the other events.
 - 3. Edit a row to provide the subscription information. At a minimum, add a group subscriber email for the DV administration group for each event. If you don't have a group alias, then choose the DV administrator's email to receive alerts. A row includes the following:
 - a. REQUESTER_EMAIL [PK] Primary requester email.
 - SUBSCRIBER_EMAIL [PK] userid email or a group email alias. Who the email alert will be sent to.
 - c. GROUP_NAME [PK] Group name subscribing to. When an alert occurs for a user the groups will be checked and cross-referenced with this registered group. The group [all] is a composite group and a catch-all for any user belonging to this composite group.
 - d. ENVIRONMENT_TYPE [PK] Register for all environments

- [ALL] or a certain environment type [DEV1, CIT1, SIT1, UAT, TT, PROD]
- e. EVENT_TYPE [PK] –

 [LONG_RUNNING|EXCEEDED_MEMORY|INACTIVITY|WO

 RKFLOW_FAILURE|DBMS_SCHEDULER_ERROR|PURGE

 _HISTORY|METRICS_FAILURE|METRICS_PERSISTENT|M

 ETRICS_TRUNCATION|METRICS_BACKUP|METRICS_RE

 STORE]
- f. EXCLUDE_TEXT A comma separate list of text that when found will signal exclusion and the email will not be sent. This is a way of filtering out emails based on text.
- c. Post-installation maintenance
 - This script can be executed by itself post-installation by simply executing it and answering "Y" to the parameter to delete the rows and reload what is configured.

[7.] Configure KPImetrics Triggers [mandatory]

The KPImetrics module uses a series of triggers to cache various tables of information. The different triggers provide flexibility to turn on and off processing as required. If certain functionality and data is not required, the trigger can be turned off saving on database space and DV processing.

1. Configure default triggers for your use case

- a. Open/Edit the resource
 - /shared/ASAssets/KPImetrics/Customize/defaultTriggersToEnable
- b. Only modify the ON/OFF settings for each trigger. Leave all other settings alone.
 - i. Refer to the following sections for details on each trigger:
 - 1. Metadata System Triggers and Load Scripts
- c. The current triggers defaulted to OFF are as follows:
 - kpimetricsTrig_00_CheckMetricsActivityDebug Only turn this on if you suspect that DV metrics is not working properly and you want to debug the DV metrics every hour.
 - ii. kpimetricsTrig_10_Cache_METRICS_SQL_REQUEST This trigger is defaulted to OFF. If you wish to perform SQL parsing on the request description

SQL statement to parse out the table and column resources used in the SQL then turn this trigger on. There is quite a bit of overhead associated with this trigger. It will compete with regular user requests for CPU and memory. Consider tweaking the trigger to run after hours and before regular work hours sufh as 6pm to 8am.

- iii. **kpimetricsTrig_11_Cache_METRICS_SQL_REQUEST_REPROCESS** Only turn this on if you get a code update from the Open Source site and there were changes to the SQL Parser code.
- iv. kpimetricsTrig_17_CheckExceedMemoryPercentRequests You may choose to keep this off in lower-level environments but turn it on in PROD environments.
- v. **kpimetricsTrig_18_CheckLongRunningRequests** You may choose to keep this off in lower-level environments but turn it on in PROD environments.
 - 1. **Administration** configuration is required for this to work.
 - DV Server Attribute that sets the long running request limit in minutes.
 This is defined by the DV server attribute value found at '/server/event/generation/requests/requestRunMinutes'.
 - Search for 'Request Run Time' in Administration --> Configuration screen in DV Studio. This controls the period of time after which a request is considered to be long-running, resulting in the generation of a RequestRunForTooLong event, if request events are enabled. A value of 0 disables this feature.
 - 4. Typical value is 60 minutes.
- vi. **kpimetricsTrig_23_Cache_METRICS_SQL_RESOURCE_LINEAGE** This trigger is defaulted to OFF. If kpimetricsTrig_10_Cache_METRICS_SQL_REQUEST is turned off then turn this trigger off as it uses data produced by that trigger to produce lineage data. It will compete with regular user requests for CPU and memory. Consider tweaking the trigger to run after hours and before regular work hours sufh as 6pm to 8am.
- vii. **kpimetricsTrig_33_DeleteCollection [deprecated]** This trigger must remain OFF.
 - 1. 2020Q100: 2020-01-14: As of the 2020Q100 release this trigger "MUST" remain off. It is currently deprecated.
 - 2. Collection table clean-up is managed by DV out-of-the-box metrics based on the /policy/metrics advanced section settings. Those settings

should be set to [1 day] to keep metrics and [1 hour] to truncate rows.

- viii. kpimetricsTrig_35_DBMSDeleteCheck This trigger is used to monitor when TDV metrics executes the delete statements against the collection tables. It is optional but may provide value in terms of getting an idea what is being executed by TDV metrics.
- ix. **kpimetricsTrig_40_Cache_METADATA_TABLES** This trigger is defaulted to OFF. This trigger executes the KPI Metadata strategy. It is intensive which is why it only runs once a day. It could be set to run less often if metadata does not change that often. It should never run more than once a day as it will put load on the DV server. Refer to "KPImetadata Configuration Guide v1.3.pdf" for more information about configuration and usage. Before turning this on, the following procedure must be configured:

/shared/ASAssets/KPImetrics/Customize/pqInsert_METADATA_Constants.

- d. Trigger Category Essential
 - i. Provides baseline data for the data transfer and other processes
 - 1. kpimetricsTrig 01 Cache ALL RESOURCES
 - kpimetricsTrig_02_Cache_ALL_USERS
 - ii. Used to transfer data from collection tables into history tables
 - 1. kpimetricsTrig_30_DBMSScheduler
 - iii. Used to check for errors with the data transfer
 - 1. kpimetricsTrig 31 DBMSSchedulerError
 - iv. Provides clean-up/purge capability based on define schedule
 - 1. kpimetricsTrig_16_PurgeHistoryData
 - v. Provides monitoring capabilities
 - 1. kpimetricsTrig_14_CheckCISWorkflowStatusFail
 - 2. kpimetricsTrig_15_CheckMetricsActivity
 - vi. Provides status table maintenance for METRICS_CIS_WORKFLOW and METRICS_JOB_DETAILS
 - 1. kpimetricsTrig 24 ValidateUpdateStatusTables
 - 2. kpimetricsTrig_25_ExecuteMetricsSqlControl
 - 3. kpimetricsTrig 27 ExecuteUpdateStatistics
 - vii. Provides index rebuild capabilities
 - 1. kpimetricsTrig_34_DBMSRebuildIndexes [relies on kpimetricsTrig_24...]
 - viii. Metrics system event triggers monitor health of metrics
 - 1. kpimetricsTrig_50_MetricsPersistenceFailure
 - 2. kpimetricsTrig 51 MetricsTruncateFailure

- 3. kpimetricsTrig_52_MetricsBackupFailure
- 4. kpimetricsTrig 53 MetricsRestoreFailure
- 5. kpimetricsTrig 54 MetricsKpiPersistentStart
- 6. kpimetricsTrig_55_MetricsKpiPersistentEnd
- 7. kpimetricsTrig_56_MetricsKpiTruncationStart
- 8. kpimetricsTrig_57_MetricsKpiTruncationEnd
- kpimetricsTrig_58_MetricsKpiBackupStart
- 10. kpimetricsTrig 59 MetricsKpiBackupEnd
- 11. kpimetricsTrig 60 MetricsKpiRestoreStart
- 12. kpimetricsTrig 61 MetricsKpiRestoreEnd

e. Trigger Category - 2nd level processing (lite-weight)

- i. A series of value-added metrics that are an addition to the DV out-of-the-box metrics that are lite-weight in terms of processing. DV does not incur much overhead when these triggers execute.
 - 1. kpimetricsTrig_04_Cache_CIS_SYSTEM_RESOURCES
 - 2. kpimetricsTrig_05_Cache_CPU_MEMORY_CHECKER
 - kpimetricsTrig_06_Cache_LOG_DISK
 - 4. kpimetricsTrig_07_Cache_LOG_IO
 - 5. kpimetricsTrig_08_Cache_LOG_MEMORY
 - 6. kpimetricsTrig_12_Cache_SYS_CACHES
 - 7. kpimetricsTrig 13 Cache SYS DATASOURCES
 - kpimetricsTrig 17 CheckExceedMemoryPercentRequests
 - 9. kpimetricsTrig_18_CheckLongRunningRequests
 - 10. kpimetricsTrig 35 DBMSDeleteCheck
 - 11. kpimetricsTrig_36_DBMSInsertCheck
 - 12. kpimetricsTrig_28_Cache_SYS_CLUSTER
 - 13. kpimetricsTrig_29_DetectClusterBreak

f. Trigger Category - 3rd level processing (heavy-weight)

- i. Provides the ability to generate the SQL Query/Explain Plan for metrics_requests_hist.description. This may be an intensive operation so it should be monitored to determine how much TDV CPU/Memory are used.
 - 1. kpimetricsTrig_26_Cache_SQL_Plan=OFF
- ii. A series of value-added metrics that are an addition to the DV out-of-the-box metrics
 - 1. kpimetricsTrig 10 Cache METRICS SQL REQUEST
 - 2. kpimetricsTrig 23 Cache METRICS SQL RESOURCE LINEAGE
 - 3. kpimetricsTrig 40 Cache METADATA TABLES

[8.] Deploy CPU and Memory Checker shell scripts (Windows or UNIX) [mandatory]

Install CPU and Memory Checker scripts into the TDV Server file system for each node in the cluster.

- a. Copy the correct version based on your operating system of the CPU and Memory Checker scripts into the \$DV HOME/bin directory:
 - Windows Powershell
 - i. KPImetricsCpuUtilization.ps1
 - ii. KPImetricsMemUtilization.ps1
 - b. Linux6 scripts
 - i. KPImetricsFreeMemCommand linux6.sh
 - ii. KPImetricTopCommandGrepCpu linux6.sh
 - c. Linux7 scripts
 - i. KPImetricsFreeMemCommand linux7.sh
 - ii. KPImetricTopCommandGrepCpu_linux7.sh
- b. UNIX set permisions, groups and user
 - a. chmod Set the file permissions accordingly especially for UNIX such as [rwxr-xr-x]. The recommend location to deploy the scripts is \$DV_HOME/bin so that they can be executed by the user account that DV is running under.
 - b. chmod 755 KPImetrics*.sh
 - c. chown [owner]:[group] KPImetrics*.sh
- c. Note: The content of the scripts do not need to be modified.
- d. Take note of where the scripts have been deployed, you will need to provide the path to the scripts when configuring the KPImetrics "commonValues" script. The data source "/shared/ASAssets/KPImetrics/Physical/Metadata/CPUAndMemChecker" is used to execute the scripts.

[9.] Configure Data Source Capabilities File [mandatory]

Modify the data source capabilities file for each node in the cluster.

PART 1: IMPORTANT NOTE:

This section is used to make postgres repository queries more efficient.

- 1. Postgres 9.1 Instructions
 - a. These changes are required on each node of the cluster.
 - b. This entry is used to make the Cache_ALL_RESOURCES queries more efficient and push dow to the TDV posgres repository.
 - c. Add the following text to
 - i. DV_HOME/conf/adapters/system/postgresql_9_1/postgresql_9_1_values.x ml

- ii. They can be put directly after the first comment in the file
- iii. Note: These changes are permanent and will not be overwritten once a hotfix/patch is applied.
- iv. The postgresql_9_1 folder will not contain a data source adapter jar file nor does one need to be present for the capabilities file to take effect.

```
<common:attribute
vmlno:oommon="bttp://www.</pre>
```

xmlns:common="http://www.compositesw.com/services/system/util/common">

<common:name>/custom/TO_TIMESTAMP(~number)</common:name>

<common:type>STRING</common:type>

<common:value>TO_TIMESTAMP(\$1)</common:value>

<common:configID>TO_TIMESTAMP(~number)</common:configID>

</common:attribute>

PART 2: IMPORTANT NOTE:

This section is to get F_GET_PARTITION_NUM to push down.

When TDV imports a car file that contains a data source, it will overwrite the adapter jar files and .xml capabilities file in the /conf/adapters/system/<adapter_name> folder. Please review all entries in the .xml capabilities file to make sure the schema name is correct.

- 1. TDV Capabilities Files used to achieve push-down with F GET PARTTION NUM()
- 2. Example:

SELECT * from /shared/ASAssets/KPImetrics/Application/metadata/vMetadataResource where partition = F_GET_PARTITION_NUM(CURRENT_DATE-1)

- 3. Oracle Instructions:
 - a. Add the following text to the correct adapter that is being used:
 - i. DV HOME/conf/adapters/system/oracle 11g thin driver/ oracle 11g thin driver values.xml
 - ii. DV_HOME/conf/adapters/system/oracle_12c_thin_driver/ oracle_12c_thin_driver_values.xml
 - iii. DV HOME/conf/adapters/system/oracle 19c thin driver/ oracle 19c thin driver values.xml
 - iv. The lines can be put directly after the first comment in the file
 - v. Note: These changes are permanent and will not be overwritten once a hotfix/patch is applied.

```
<common:attribute
```

xmlns:common="http://www.compositesw.com/services/system/util/common">

<common:name>/custom/F_GET_PARTITION_NUM(~date)</common:name>

<common:type>STRING</common:type>

<common:value>DVKPI.F GET PARTITION NUM(\$1)/common:value>

<common:configID>F GET PARTITION NUM(~date)</common:configID>

</common:attribute>

<ns1:attribute xmlns:ns1="http://www.compositesw.com/services/system/util/common">

<ns1:name>/custom/F_GET_PARTITION_NUM(~string)</ns1:name>

```
<ns1:type>STRING</ns1:type>
<ns1:value>DVKPI.F_GET_PARTITION_NUM($1)</ns1:value>
<ns1:configID>F_GET_PARTITION_NUM(~string)</ns1:configID>
</ns1:attribute>
```

- b. Modify the schema name "DVKPI" to whatever your schema name is.
- c. Restart the TDV server
- 4. SQL Server Instructions:
 - a. Add the following text to
 - i. DV HOME/conf/adapters/system/microsoft sql server 2016/ microsoft sql server 2016 values.xml
 - ii. DV_HOME/conf/adapters/system/microsoft_sql_server_2019/ microsoft_sql_server_2019_values.xml
 - iii. They can be put directly after the first comment in the file
 - Note: These changes are permanent and will not be overwritten once a hotfix/patch is applied.

- b. Modify the schema name "dbo" to whatever your schema name is.
- c. Restart the TDV server

[10.] Configure Metadata

KPImetrics Metadata is a new feature that captures metadata from the Data Virtualization Server. There are four constants tables that require configuration data. This data is inserted based on the configuration of the procedure

/shared/ASAssets/KPImetrics/Customize/pqInsert METADATA Constants.

Refer to "KPImetadata Configuration Guide v1.x.pdf" for details on configuration of metadata.

Once completed decide whether this feature should be turned on by setting the triggerAction from OFF to ON for "kpimetricsTrig_40_Cache_METADATA_TABLES" in the following procedure: /KPImetrics/Customize/defaultTriggersToEnable.

Execute Post-Installation Script

The KPImetrics module provides an automated script to complete the installation. The "Information Only Section" below will describe in detail what the script is going to execute. When the installation is complete and there are no red/impacted resources then turn on the triggers to begin processing KPI metrics data.

Execute Installation Script

Perform the post-installation configuration.

1. Execute Post-Installation Script:

- a. WARNING: If you are executing an installation into an existing KPImetrics environment, this script <u>WILL DROP</u> existing tables and data. Do not use this script for upgrading an environment. We recommend using TIBCO Professional Services for doing upgrades.
- b. Execute "2_Post_Installation" and provide parameters:
 - i. Location: /shared/ASAssets/KPImetrics_installation/2_Post_Installation
 - ii. performInstallationAction
 - 1. **Y**=perform the installation which will drop and recreate KPImetrics tables/sequences/procedures.
 - N=Do nothing.

iii. destroyCIS_metrics_collection_Tables

- Y=destroy and recreate DV metrics collection tables including metrics_requests, metrics_resources_usage, and metrics_sessions.
- 2. N=do not destroy if they exist.

iv. metrics_app_id_password

 TDV password for the "metrics_app_id" user/owner of KPImetrics source code that will be created if it does not exist. The "metrics_app_id" user allows the ownership of the code to be set so that the triggers and procedures "run as" metrics_app_id.

v. inDebugSecondary

- Debug Secondary provides a deep debug with detailed debug output.
- 2. N or null=cursory, high-level debug. N or null is recommended unless there are issues.
- 3. Y=deep debug.

Deploy CPU and Memory Checker shell scripts (Windows)

IF ERROR ONLY

During post-installation, it was attempted to write the scripts to the \$DV HOME/bin directory.

- a. If <u>no error was returned</u> then all scripts were installed correctly into \$DV_HOME/bin and are able to be executed. Continue to the next major step/section.
- b. If the error message "INSTALL KPImetrics CpuAndMemoryChecker scripts manually." was received during post-installation, then you will need to install the scripts manually and set the file permissions accordingly especially for UNIX such as [rwxr-xr-x]. The recommend location to deploy the scripts is \$DV_HOME/bin so that they can be executed by the user account that DV is running under. Take note of where the scripts have been deployed, you will need to provide the path to the scripts when configuring the KPImetrics "commonValues" script. The data source "/shared/ASAssets/KPImetrics/Physical/Metadata/CPUAndMemChecker" is used to execute the scripts. The following details the scripts:
 - a. Windows Powershell
 - i. KPImetricsCpuUtilization.ps1
 - ii. KPImetricsMemUtilization.ps1
 - b. Linux6 scripts be sure to set permissions
 - i. KPImetricsFreeMemCommand linux6.sh
 - ii. KPImetricTopCommandGrepCpu_linux6.sh
 - c. Linux7_scripts be sure to set permissions
 - i. KPImetricsFreeMemCommand linux7.sh
 - ii. KPImetricTopCommandGrepCpu linux7.sh

Enable Triggers

Enabling triggers starts the processing of KPI metrics data. The KPImetrics module makes use of pure database tables in order to retain DV metrics for a longer period than supported by the base DV logging functionality.

Please note that executing this procedure will cache the minimum required tables: METRICS_ALL_RESOURCES, METRICS_ALL_USERS. Those 3 tables must be completed before any of the other triggers are allowed to run. The following concept is now being used:

Concept:

- a. A control record is added METRICS_SQL_CONTROL for Cache_ALL_RESOURCES and Cache_ALL_USERS for each node in the cluster.
 - i. A subsequent process wakes up on the trigger "kpimetricsTrig_25_ExecuteMetricsSqlControl" to execute these for each node.
 - ii. Depending on the timing of this trigger there are other dependent procedures that may also execute the one that they need based on this rule:


- 1. Cache_ALL_RESOURCES gets executed by dependents:
 - a. Cache_ALL_RESOURCES
 - b. Cache_METRICS_SQL_REQUEST_EXEC
 - c. Cache_METRICS_SQL_REQUEST_EXEC_ADHOC
 - d. Cache_METRICS_SQL_REQUEST_EXEC_REPROCESS
 - e. Cache METRICS SQL RESOURCE LINEAGE
 - f. pMETRICS_ALL_TABLES_exec
- 2. Cache_ALL_USERS gets executed by dependents:
 - a. Cache_ALL_USERS
 - b. pMETRICS_ALL_TABLES_exec

2. Enable Triggers:

- a. Execute the updateTriggers procedure
 - i. Location: /shared/ASAssets/KPImetrics/Configuration/updateTriggers
 - ii. enable 0=disable, 1=enable, 2=display trigger list
 - 1. Select 1 to enable all configured triggers.
 - iii. <u>includeList</u> Comma-separated list of trigger numbers to include in the (enable/disable) action. Leave null if the "defaultTriggersToEnable" are configured as desired.
 - iv. <u>excludeList</u> Comma-separated list of trigger numbers to exclude in the (enable/disable) action. The excludeList overrides includeList. Leave null if the "defaultTriggersToEnable" are configured as desired.
- b. Review the Studio Manager → Triggers tab and look for any "Failed" triggers
 - i. Keep checking this screen until you have verified that at least one of the triggers has executed successfully. If the trigger has fired there will be a timestamp in the "Last Time" column. If the trigger is red "Failed" then go then proceed to point ii. below. If the trigger is green "Ready" then it is executing without issues. The majority of the triggers will fire within an hour of turning them on.



- ii. If a trigger has failed
 - Unfortunately, double clicking on the trigger does not yield any additional insights as shown in the screen shot

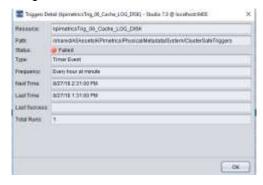

- Trigger failures will most likely show up in the "cs_server_events.log".
 It also may be necessary to check "cs_server.log".
- iii. The most common solution to a trigger failure will be permission problems on resources.
 - Make sure the privileges are set correctly on /shared/ASAssets/Utilities folder. It is recommended that /shared/ASAssets/Utilities be set to the composite group "all" with Read Execute Select.
 - Specifically, check privileges for /shared/ASAssets/Utilities/environment/getEnvName().
- iv. To verify the above issue and recommendation, check for the following in the "cs_server_events.log". There would be an entry in that log that looks similar to this:

2018-08-27 13:31:00.002 -0400 INFO START trigger name=/shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTrig gers/kpimetricsTrig 06 Cache LOG DISK type=TIMER action=PROCEDURE1

metrics_app_id composite 20400 6141564240009 6141564240009

/shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTrigg ers/kpimetricsTrig 06 Cache LOG DISK TIMER PROCEDURE 2018-08-27 13:31:00.112 -0400 **ERROR FAIL** trigger name=/shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTrig gers/kpimetricsTrig 06 Cache LOG DISK type=TIMER action=PROCEDURE, reason failed: User "metrics_app_id/composite" has insufficient privileges to execute "/shared/ASAssets/Utilities/environment/getEnvName", on line privileges for that resource. [repository-55, column 65. User has READ 1900321] metrics app id composite 20402 6141564240449 6141564240009

/shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTrigg ers/kpimetricsTrig_06_Cache_LOG_DISK TIMER PROCEDURE User "metrics_app_id/composite" has insufficient privileges to execute "/shared/ASAssets/Utilities/environment/getEnvName", on line 55, column 65. User has READ privileges for that resource. [repository-1900321]

v. Verify the trigger issue is resolved. The screen shot indicates that the previously failed trigger now has successfully executed identified by a timestamp in the "Last Success" field and a status of green "Ready".

Resource	Status	Type	Frequency	Next Time	Last Time	Last Success	Total Runs
kpimetricsTrig 10 Cache METRICS SQL REQUEST	(2 Ready	Timer Event	Every 30 minutes	8/27/18 2:45:00 PM	8/27/18 2:15:00 PM	8/27/18 2:15:00 PM	2

Configure DV Out-of-the-box Metrics


To enable DV metrics:

- 1. Locate and open /policy/metrics
- 2. Since the tables were created earlier, choose the option to configure the path to the tables without re-creating them.
- 3. Data Source browse and set the data source to the database you have configured.
- Select "Create or Bind Tables" or "Edit Tables" depending on the /policy/metrics context.
 - a. Never been configured: Create or Bind Tables


Create or Bind Tables

b. Previously configured: Edit Tables

Edit Tables

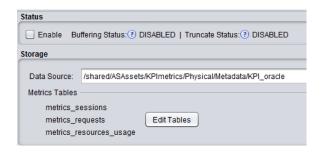


- 5. Browse to the schema path
 - a. Browse to the Sessions table: metrics sessions
 - b. Browse to the Requests table: metrics requests
 - c. Browse to the Usage table: metrics resources usage
 - d. DO NOT execute DDL
 - e. Click OK to finish

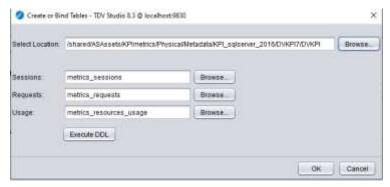

- f. Configure the Advanced Section
 - i. As of Release 2020Q100 and higher it is "REQUIRED" to set the following:
 - Request Count Threshold: Set to **10000**. Adjust accordingly for active servers. It may need a higher number so that the number of inserts is reduced.
 - How long do you want to keep the metrics data?: 1 Day(s)
 - KPImetrics is no long deleting collection data. It will rely on the DV server
 to execute delete commands to clean-up the collection tables. The clock
 starts ticking when metrics is enabled. A setting of 1 day means that
 there will be a minimum of 24 hours of data that will stay in the collection
 tables. This is a rolling 24 hours.
 - How often do you want to run truncate process on expired data?: 1 Hour(s)
 - It is a good idea to delete once an hour to keep the collection tables as small as possible. DV metrics will issue the delete command once an hour based on when DV metrics was enabled. This is what keeps the data at a rolling 24 hours when the above setting is set to "1 Day".
 - The KPImetrics "kpimetricsTrig_30_DBMSScheduler" trigger executes every 2 hours to process the collection data since the last execution and insert it into the history tables. It tracks min (last) values based on METRICS_JOB_DETAILS values. Always processes given a range of id's and timestamps.
 - Important: If you turn off the KPImetrics triggers but leave metrics running, you

will lose transactions because the data is no longer being processed into the history tables.

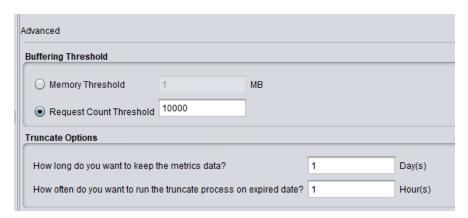

- g. Enable metrics and save.
 - ii. Make sure both radio button indicators are green.
- 6. Enable metrics and save



- a. DV metrics will issue delete statements when enabling metrics:
 - Delete statements are qualified by nodehost, nodeport and logintime for metrics_sessions or starttime for metrics_requests and metrics_resources_usage.

delete from

/shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_2016/DVKPI/dvkpi/metric s_sessions where nodehost='localhost' and nodeport=9800 and logintime < '2020-01-20 17:27:08.756'

delete from

/shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_2016/DVKPI/dvkpi/metric s_requests where nodehost='localhost' and nodeport=9800 and starttime < '2020-01-20 17:27:08.756'

delete from

/shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_2016/DVKPI/dvkpi/metric s_resources_usage where nodehost='localhost' and nodeport=9800 and starttime < '2020-01-20 17:27:19.975'

 DV metrics will issue insert statements when disabling metrics to flush the buffer to the collection tables.

insert into

/shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_2016/DVKPI/dvkpi/metric s_sessions select * from /system/datasources/system/SYS_METRICS_SESSIONS

insert into

/shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_2016/DVKPI/dvkpi/metric s_requests select * from /system/datasources/system/SYS_METRICS_REQUESTS

insert into

/shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_2016/DVKPI/dvkpi/metric s_requests select * from /system/datasources/system/SYS_METRICS_REQUESTS

- 7. If the Buffer Status shows RED then review the following:
 - a. Make sure the three collection tables exist in the database and metrics are properly configured to point to them.
 - b. Make sure the tables have the correct permissions for writing to them.
 - c. If Oracle, make sure the tablespace has the correct permissions for writing to it.
 - d. If SQL Server and BCP is configured, use "|~|" for the "MS SQL Server Sources" "Column Delimiter" instead of just a "|" symbol. This is because the data will contain pipe symbols "|". The "|~|" makes the delimiter more unique where the data should not contain this pattern. Search for "Column Delimiter" in Administration→Configuration.

KPImetrics Configuration is COMPLETE!

4 Upgrading KPImetrics

Introduction

This section describes how to upgrade KPImetrics from a previous version to the current version without data loss. The upgrade supports upgrading on the same TDV verision such as 7.x or upgrading the KPImetrics from TDV 7.x to 8.x. When upgrading from 7.x to 8.x, the collection tables will change. Specifically, metrics_requests and metrics_sessions add "user", "domain" and "group" columns.

How to Upgrade KPImetrics

Start with a few house-keeping activities described below such as turning off metrics and determining your current version.

Concept 1 – Upgrade the "Master" server.

 If "Master" TDV <u>does have</u> KPImetrics installed, follow this Section 4 "Upgrading KPImetrics"

Concept 2 – Upgrade/migrate the "Master" archive to other environments.

- Follow instructions in Section 5 "Export ASAssets Resources for Migration"
- If upper environment target TDV <u>does not have</u> KPImetrics installed, follow Section 6 "Migrate a New KPImetrics Installation"
- If upper environment target TDV <u>does have</u> KPImetrics installed, follow this Section 4 "Upgrading KPImetrics"

Requirements:

- 1. The upgrade script must be executed by the user admin or someone who has admin privileges.
- 2. Collection and staging tables will be dropped and recreated for both 7.x and 8.x upgrades.
- 3. Any version less than 2018.103 is not currently supported for upgrade. Contact Tibco Data Virtualization PSG if this use case comes up.
- 4. If using SQL Server 2014 or lower it "MUST" be upgraded to SQL Server 2016 or higher due to "partitioning" syntax requirements. Migrate the database prior to starting this migration. Review Chapter 7 "Upgrading a Data Source Adapter". It is recommended to perform these steps after upgrading the database and KPImetrics resources.

Migrating from 7.x to 8.x:

- 1. Upgrading will happen automatically in version 8.x
- 2. Simply export the KPImetrics from 7.x, import into 8.x and follow the upgrade steps below.
- 3. Collection and Staging tables will be dropped and recreated.

Current Version:

Turn off /policy/metrics

a. Do this so that no data is inserted into the metrics collection tables.

2. Turn off all triggers

a. /shared/ASAssets/KPImetrics/Configuration/updateTriggers(0)

3. Clear out the collection tables

- a. For any **KPImetrics** *version previous to 2019Q402*, execute the following script manually *on each node of the cluster* in order to clear the collection tables:
 - i. /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/ pMETRICS_ALL_TABLES_exec
- b. For version <u>2019Q402 and above</u>, execute the following script <u>once on one node</u> which will clear out the collection table for all nodes:
 - i. /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/ pMETRICS_ALL_TABLES_exec
- c. Execute this on 7.x prior to exporting for 8.x upgrade
- d. Note: collection and staging tables "WILL" be dropped and recreated during upgrade.

4. Import the latest ASAssets Utilities

a. Review Chaper 2 "Requirements" section.

5. If migrating from 7.x to 8.x

- a. Turn off /policy/metrics on 8.x
- b. Export KPImetrics from 7.x using Studio 7.x
 - i. /services/databases/ASAssets/KPImetrics
 - ii. /services/databases/ASAssets/KPImetricsAdmin
 - iii. /shared/ASAssets/KPImetrics
- c. Using Studio 8.x, Right-click on either Desktop (admin) or root hostname (/) and select "Import"
 - i. Click on the "Overwrite" option. Leave all other options as they are.
 - ii. Browse to the local file system for the car file specified in step a. above.
 - iii. Click on preview and review what will be imported.
 - iv. Click on Import and then click OK
- d. If using the "SAME" database as 7.x then continue to step 5, this is an upgrade.
- e. If using a "DIFFERENT" database, then this is "NOT" an upgrade, it is a "NEW" installation. Follow the steps for a new installation in the manual.

6. Create "metrics_app_id" user if it does not exist

- a. If upgrading versions of TDV and creating a new TDV environment, *create the user "metrics_app_id"* on each node of the new environment.
- b. This applies to either a new 7.x or 8.x environment.
- c. This must be done prior to import of the KPImetrics car file.

7. Import KPImetrics Installation

a. *** INSTALLATION .CAR ONLY ***

- b. File: KPImetrics YYYYQnnn installation.car
 - Example: KPImetrics 2021Q101 installation.car
- c. Using Studio, Right-click on either Desktop (admin) or root hostname (/) and select "Import"
 - i. Click on the "Overwrite" option. Leave all other options as they are.
 - ii. Browse to the local file system for the car file specified in step a. above.
 - iii. Click on preview and review what will be imported.
 - iv. If 8.x no .car file password is required as the .car file originated in 7.x.
 - v. Click on Import and then click OK
- d. For now, ignore any impacted resources in KPImetrics_installation folder until after KPImetrics YYYYQnnn.car has been imported in a few steps.
- 8. Backup existing customized resources [backup and export]
 - a. Execute /shared/ASAssets/KPImetrics_installation/backupCustomResources.
 - b. Export a backup [optional]
 - i. Provide a full path on the TDV server:
 - 1. Example:

/opt/TIBCO/master_files/Files/deploy_backup/KPImetricsBackup_YYYYMMDD.car

ii. If a TDV Server path is provided, a car file export is taken of the following resources:

> /services/databases/ASAssets/KPImetrics /services/databases/ASAssets/KPImetricsAdmin /shared/ASAssets/KPImetrics /services/databases/ASAssets/KPImetricsInstall /shared/ASAssets/KPImetrics installation

- c. Backup Customized resources [automatic]
 - i. Folder moved automatically: move /shared/ASAssets_Backup/KPImetrics_Backup/CurrentBackup to /shared/ASAssets_Backup/KPImetrics_Backup/v_YYYYQnnn where v_YYYYQnnn is derived from the resident getKPIVersion in the folder.
 - ii. Folder created automatically: /shared/ASAssets_Backup/KPImetrics_Backup/CurrentBackup Key resources to be copied from /Metadata folder:
 - The active datasource starting with one of [KPI oracle..., KPI sqlserver...]

Key resources to be copied from /Customize folder:

- commonValues
- defaultTriggersToEnable
- pqInsert METADATA Constants [formerly 07_pqInsert_KPI_Tables_METRICS_JOB_tables]
- pqInsert_METRICS_EVENT_REGISTRATION [formerly 08_pqInsert_KPI_Tables_METRICS_EVENT_REGISTRATION]
- pqInsert_METRICS_JOB_tables [formerly 08_pqInsert_KPI_Tables_METRICS_EVENT_REGISTRATION]

Key trigger metadata to be copied from /Metadata/System/ClusterSafeTriggers folder:

 All trigger metadata is captured and save into the backup folder as ../ClusterSafeTriggers/ClusterSafeTriggersView

9. Import the latest KPImetrics car file

**** STOP. READ. ****

- a. <u>DO NOT RUN</u> THE CONFIGURATION "2_Post_Installation" WHICH DROPS AND RECREATES TABLES OR DATA WILL BE LOST.
- b. File: KPImetrics YYYYQnnn.car e.g. KPImetrics 2019Q402.car
- c. Using Studio, Right-click on either Desktop (admin) or root hostname (/) and select "Import"
 - i. Click on the "Overwrite" option. Leave all other options as they are.
 - ii. Browse to the local file system for the car file specified in step a. above.
 - iii. Click on preview and review what will be imported.
 - iv. Click on Import and then click OK
- d. Import options checked:

X Caching X Data Source Connections Include Users Jars
X Include Cache Policies X Overwrite Merge Users Folder
Create Caching Tables Override Locks X Privileges

X Custom Jars Discovery Files

e. Ignore any impacted "red" resources at this point in the upgrade:

10. Execute "3 Post Upgrade"

This script is used to upgrade an existing installation and bring its resources up to the most current version.

[Required] - performUpgradeAction:

Y=perform the upgrade which will drop and recreate KPImetrics tables/sequences/procedures and migrate data.

N=Do nothing. When coupled with executeActionList=9, it will analyze what will be done and output a list of SQL statements to be executed but not execute them.

IN performUpgradeAction CHAR(1),

[Required] - restoreType:

Y=restore the "MASTER" environment.

- · Restore the backed-up version of
 - o upgrade commonValues KPI
 - upgrade_defaultTriggers_KPI
- Restore from /shared/ASAssets Backup/KPImetrics Backup/CurrentBackup/Customize
- If the backed-up version does not exist then skip it and keep going. Handles use case with older version of KPImetrics where upgrade * did not exist.

Reason: This option may be useful when upgrading a lower environment like a sandbox or DEV where the initial installation of KPImetrics begins from. This allows you to retain that original customized version.

Note: commonValues and defaultTriggersToEnable DO NOT get restored. This allows changes to be occur when upgrading a new release from TIBCO. It is via "executeUpgradeProcs" that the original values are restored to commonValues and defaultTriggersToEnable.

N/null (default)=do not restore. [Migrate to Upper environment].

• Use this option when migrating the upgrade to an upper environment.

Reason: The various resources in /Customize may be the resource that has changed which is why it is advisable not to restore the original backed-up version in the target environment. This allows changes to be migrated from DEV to upper environments. The following are "not" restored:

pgInsert METADATA Constants,

- $\circ \quad \mathsf{pqInsert_METRICS_EVENT_REGISTRATION},$
- o pqInsert_METRICS_JOB_tables
- upgrade_commonValues_KPI,
- upgrade_defaultTriggers_KPI,

IN restoreType CHAR(1),

[Required] - executeUpgradeProcs:

M=execute the "MASTER" environment customized upgrade procedures if exist.

- Only use this option when upgrading the MASTER environment such as a DEV or Sandbox.
- Execute <u>upgrade_commonValues_KPI</u> to update the commonValues procedure with the latest environmental changes [only if it exists in the backup folder].
- Execute <u>upgrade_defaultTriggers_KPI</u> to update defaultTriggersToEnable per the latest environmental changes [only if it exists in the backup folder].

Y=execute customized upgrade procedure [Migrate to Upper environment].

- Execute <u>upgrade_commonValues_KPI</u> to update the commonValues procedure with the latest environmental changes.
- Execute <u>upgrade_defaultTriggers_KPI</u> to update defaultTriggersToEnable per the latest environmental changes.
- When migrating to an upper environment, typically, it is recommended to set this to Y.

N=DO NOT execute upgrade procedures. [to retain original scripts and values]

- Do not execute <u>upgrade_commonValues_KPI</u>. Use the existing commonValues as is.
- Do not execute <u>upgrade_defaultTriggers_KPI</u>. Use the existing defaultTriggersToEnable as is.

IN executeUpgradeProcs CHAR(1),

[Required] - environmentName:

The environment name example: 1 of SB|DEV|SIT|UAT|PROD

IN environmentName VARCHAR,

[Optional] – executeActionList:

This is typically left null unless repeating an upgrade and you need to specify which steps to execute. A numerical, comma-separated list of actions to execute as it relates to #11 in the notes above. If the action list contains x-y such 8-31 then it gets expanded out to include the individual action items. The action list may contain 2-31. 1 is always executed. 31 is the final status message and is always executed. If null, all actions are executed.

IN executeActionList VARCHAR,

[Optional] - indebugSecondary:

This is typically left null unless a higher level of debug is needed.

Debug Secondary provides a deep debug with detailed debug output.

N=cursory, high-level debug. N is recommended unless there are issues.

Y=deep debug.

IN indebugSecondary CHAR(1),

[Optional] - inDebugDataMigration:

This is typically left null unless a higher level of debug is needed.

Debug Data Migration provides a deep (very verbose) debug with detailed debug output of the data migration and mapping scripts.

N=cursory, high-level debug. N is recommended unless there are issues.

Y=deep debug.

IN inDebugDataMigration CHAR(1),

Example Screen shot:

🦪 Input Values for 3_Post_Upgrade - TDV Studio 8.5 @ localhost:9850 Parameter Value and performUpgradeAction and restoreType executeUpgradeProcs ** environment/lame TEST and executeActionList V inDebugSecondary V inDebugDataMigration V OK Cancel

Typically, the last 5 parameters are null.

[Information Section Only] - AUTOMATED steps to be performed:

- 1. Validate backed up copy version from getKPIVersion with the version from getKPIInstallationVersion.
 - a. Don't proceed if return code = 0
- 2. Copy customized resources back to KPImetrics folder and enable datasources
 - a. Copy resources

if exist /CustomizeOld

Copy /shared/ASAssets/KPImetrics_backup/v_YYYY_MM_DD/CustomizeOld to /shared/ASAssets/KPImetrics/Customize

else

Copy /shared/ASAssets/KPImetrics_backup/v_YYYY_MM_DD/Customize to /shared/ASAssets/KPImetrics/Customize Copy /shared/ASAssets/KPImetrics_backup/v_YYYY_MM_DD/Metadata to /shared/ASAssets/KPImetrics/Physical/Metadata Copy /shared/ASAssets/KPImetrics_backup/v_YYYY_MM_DD/ClusterSafeTriggers to /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers

- b. Enable all copied datasources
- 3. Restore Common Values
 - a. /shared/ASAssets/KPImetrics installation/Helpers/Upgrade/modify commonValues
- 4. Execute Upgrade Common Values
 - a. /shared/ASAssets/KPImetrics/Customize/upgrade commonValues KPI
- 5. Get the data source configuration parameters from commonValues
- 6. Update impacted resources
- 7. Rebind physical "E" external packaged procedures to the datasource schema
 - a. /shared/ASAssets/KPImetrics_installation/Helpers/General/rebindInstallPackageProcedures('E')
- 8. Drop the indexes
- 9. Create KPImetrics "TEMP" tables, sequences, and functions
 - 8a. Create KPImetrics functions.
 - 8b. Create KPImetrics history "TEMP" tables.
 - 8c. Create KPImetrics main part 1 [kpi1] "TEMP" tables. 8d. Create KPImetrics metadata "TEMP" tables.
- 10. Execute the upgrade scripts going from version=YYYYQnnn to version=YYYYQnnn
 - a. Iterate over the "TEMP" tables and map current to temp performing various database statements. ORACLE:

SELECT count(*) CNT FROM "schema"."source_tablename";

TRUNCATE TABLE "schema". "temp_tablename";

INSERT INTO "schema". "temp tablename" SELECT [column projection mapping] FROM "schema"."source tablename";

SELECT count(*) CNT FROM "schema"."temp_tablename";

DROP TABLE "schema". "source tablename";

ALTER TABLE "schema"."temp_tablename" RENAME CONSTRAINT "PK_temp_pk" TO "PK source pk";

ALTER INDEX "schema". "PK_temp_idx" RENAME TO "PK_source_idx";

ALTER TABLE "schema". "temp_tablename" RENAME TO "source_tablename";

SELECT count(*) CNT FROM "schema". "source tablename";

SQL SERVER:

SELECT count(*) CNT FROM "schema". "source_tablename" WITH(NOLOCK);

TRUNCATE TABLE "schema". "temp tablename";

INSERT INTO "schema"."temp_tablename" SELECT [column_projection_mapping] FROM "schema"."source tablename":

SELECT count(*) CNT FROM "schema". "temp_tablename" WITH(NOLOCK);

DROP TABLE "schema". "METRICS LOG IO";

EXEC sp_rename 'schema.temp_tablename.PK_temp_pk', 'PK_source_pk';

EXEC sp_rename 'schema.temp_tablename', 'source_tablename';

SELECT count(*) CNT FROM "schema". "source tablename" WITH(NOLOCK);

- 11. Validate, Drop and Create KPImetrics collection and stage tables
 - 10a. Drop/Create KPImetrics collection tables
 - 10b. Drop/Create KPImetrics collection stage table.
- 12. Drop/Create KPImetrics remainder tables and procedures.
 - 11a. Drop KPImetrics metadata.
 - 11b. Drop KPImetrics history tables.
 - 11c. Drop KPImetrics main tables part 1.
 - 11d. Drop/Create KPImetrics part 2 [kpi2] lookup tables.
 - 11e. Create KPImetrics data transfer procedure.
- 13. Introspect the KPImetrics datasource procedureNames=[...] tables=[...]
- 14. Validate the columns for the procedureNames=[...]
- 15. Create the indexes
- 16. Reintrospect the KPImetrics datasource
- 17. Rebind physical "A" all database type tables to the datasource schema
- a. /shared/ASAssets/KPImetrics_installation/Helpers/rebindPhysicalDatabaseType('A')
- 18. Rebind the physical abstraction folder "/Physical/Abstraction" to the correct physical datasource folder "/Physical/KPI_[oracle|sqlserver]"
 - a. /shared/ASAssets/KPImetrics installation/Helpers/rebindPhysicalAbstraction
- 19. Restore Default Triggers
 - $a.\ / shared/ASAssets/KPI metrics_installation/Helpers/modify_defaultTriggersToEnable$
- 20. Modify upgrade_defaultTriggers_KPI to account for any new triggers coming from TIBCO
 - a. /shared/ASAssets/KPImetrics_installation/Helpers/Upgrade/modify_upgrade_defaultTriggers_KPI Note: Since defaultTriggersToEnable comes from TIBCO and is not restored, this is used as the baseline to search and add new triggers to upgrade_defaultTriggers_KPI.
- 21. Execute upgrade defaultTriggers KPI
- 22. Modify pqInsert_METRICS_JOB_tables
 - a. /shared/ASAssets/KPImetrics installation/Helpers/modify pqInsert METRICS JOB tables
- 23. Modify pgInsert METADATA Constants
 - a. /shared/ASAssets/KPImetrics_installation/Helpers/Upgrade/modify_pqInsert_METADATA_Constants
- 24. Modify pqInsert_METRICS_EVENT_REGISTRATION
 - a. /shared/ASAssets/KPImetrics_installation/Helpers/Upgrade/modify_pqInsert_METRICS_EVENT_REGISTRATION
- 25. Update impacted resources
- 26. Set resource privileges
- 27. Change resource ownership
- 28. Load the METRICS JOBS table
- 29. Load the METRICS EVENT REGISTRATION table
- 30. Remove DVKPI folder if not needed
- 31. Validate data source capabilities file
- 32. Validate the METRICS JOB ENVRIONMENTS table
- 33. Installation and Configuration is complete.
 - 1. Configure the DV Out-Of-The-Box Metrics located at /policy/metrics
 - 2. Execute: /shared/ASAssets/KPImetrics/Configuration/updateTriggers(1)

11. Configure the data source capabilities file

PART 1: IMPORTANT NOTE:

This section is used to make postgres repository queries more efficient.

- a. Postgres 9.1 Instructions
 - i. These changes are required on each node of the cluster.
 - ii. This entry is used to make the Cache_ALL_RESOURCES queries more efficient and push dow to the TDV posgres repository.
 - iii. Add the following text to
 - DV_HOME/conf/adapters/system/postgresql_9_1/postgresql_9_1_values.x
 - 2. They can be put directly after the first comment in the file
 - 3. Note: These changes are permanent and will not be overwritten once a hotfix/patch is applied.
 - 4. The postgresql_9_1 folder will not contain a data source adapter jar file nor does one need to be present for the capabilities file to take effect.

<common:attribute

xmlns:common="http://www.compositesw.com/services/system/util/common">

<common:name>/custom/TO_TIMESTAMP(~number)</common:name>

<common:type>STRING</common:type>

<common:value>TO_TIMESTAMP(\$1)</common:value>

<common:configID>TO_TIMESTAMP(~number)</common:configID>

</common:attribute>

PART 2: IMPORTANT NOTE:

This section is to get F_GET_PARTITION_NUM to push down.

When TDV imports a car file that contains a data source, it will overwrite the adapter jar files and .xml capabilities file in the /conf/adapters/system/<adapter_name> folder. Please review all entries in the .xml capabilities file to make sure the schema name is correct. This must be done on each node of the cluster.

- a. TDV Capabilities Files used to achieve push-down with F GET PARTTION NUM()
- b. Example:

SELECT * from /shared/ASAssets/KPImetrics/Application/metadata/vMetadataResource where partition = F_GET_PARTITION_NUM(CURRENT_DATE-1)

- c. Oracle Instructions:
 - i. These changes are required on each node of the cluster.
 - ii. Add the following text to the correct adapter that is being used:
 - DV_HOME/conf/adapters/system/oracle_11g_thin_driver/ oracle_11g_thin_driver_values.xml
 - 2. DV_HOME/conf/adapters/system/oracle_12c_thin_driver/oracle_12c_thin_driver_values.xml
 - DV_HOME/conf/adapters/system/oracle_19c_thin_driver/ oracle_19c_thin_driver_values.xml

- 4. The lines can be put directly after the first comment in the file
- 5. Note: These changes are permanent and will not be overwritten once a hotfix/patch is applied.

```
<common:attribute
```

- iii. Modify the schema name "DVKPI" to whatever your schema name is.
- iv. Restart the TDV server
- v. Repeat for each node in the cluster
- d. SQL Server Instructions:
 - i. These changes are required on each node of the cluster.
 - ii. Add the following text to
 - DV_HOME/conf/adapters/system/microsoft_sql_server_2016/ microsoft_sql_server_2016_values.xml
 - DV_HOME/conf/adapters/system/microsoft_sql_server_2019/ microsoft_sql_server_2019_values.xml
 - 3. They can be put directly after the first comment in the file
 - 4. Note: These changes are permanent and will not be overwritten once a hotfix/patch is applied.

<common:attribute

```
xmlns:common="http://www.compositesw.com/services/system/util/common">
    <common:name>/custom/F_GET_PARTITION_NUM(~date)</common:name>
    <common:type>STRING</common:type>
    <common:value>dbo.F_GET_PARTITION_NUM($1)</common:value>
    <common:configID>F_GET_PARTITION_NUM(~date)</common:configID>
    </common:attribute>
<ns1:attribute xmlns:ns1="http://www.compositesw.com/services/system/util/common">
    <ns1:name>/custom/F_GET_PARTITION_NUM(~string)</ns1:name>
    <ns1:type>STRING</ns1:type>
    <ns1:value>dbo.F_GET_PARTITION_NUM($1)</ns1:value>
    <ns1:configID>F_GET_PARTITION_NUM(~string)</ns1:configID>
    </ns1:attribute>
```

- iii. Modify the schema name "dbo" to whatever your schema name is.
- iv. Restart the TDV server
- v. Repeat for each node in the cluster

12. Review Triggers


- a. The following trigger schedules have been overridden from the original settings:
 - i. kpimetricsTrig_16_PurgeHistoryData once a day at 11:20 PM
 - ii. kpimetricsTrig 34 DBMSRebuildIndexes once a week SUN 3:00 AM
 - iii. kpimetricsTrig 01 Cache ALL RESOURCES every 2 hours at 1:00 AM
 - iv. kpimetricsTrig 02 Cache ALL USERS every 2 hours at 1:00 AM
 - v. kpimetricsTrig_30_DBMSScheduler every 2 hours at 1:30 AM
 - This should always be an odd hour on the half hour because it is depedent on kpimetricsTrig_01_Cache_ALL_RESOURCES which is every 2 hours on the top of the odd hour [1 am]. Therefore, this would follow 30 minutes after the latest METRICS_ALL_RESOURCE cache completion.
 - vi. kpimetricsTrig 31 DBMSSchedulerError every 2 hours a 2:00 am
 - 1. This should always be 30 min after kpimetricsTrig 30 DBMSScheduler
 - vii. kpimetricsTrig_40_Cache_METADATA_TABLES once a day at 11:30 PM
 - This should always be an odd hour on the half hour because it is depedent on kpimetricsTrig_01_Cache_ALL_RESOURCES which is every 2 hours on the top of the odd hour [1 am]. Therefore, this would follow 30 minutes after the latest METRICS_ALL_RESOURCE cache completion.

13. Turn on /policy/metrics

- a. Do this to start inserting rows into the metrics collection tables.
- b. If the prior version used KPI_oracle or KPI_sqlserver then you will have to reconfigure it to use one of [KPI_oracle_11g, KPI_oracle_12c, KPI_sqlserver_2016]
- c. Configure the Advanced Section
 - i. As of Release 2020Q100 it is "REQUIRED" to set the following:
 - Request Count Threshold: Set to **10000**. Adjust accordingly for active servers. It may need a higher number so that the number of inserts is reduced.
 - How long do you want to keep the metrics data?: 1 Day(s)
 - KPImetrics is no long deleting collection data. It will rely on the DV server
 to execute delete commands to clean-up the collection tables. The clock
 starts ticking when metrics is enabled. A setting of 1 day means that
 there will be a minimum of 24 hours of data that will stay in the collection
 tables. This is a rolling 24 hours.
 - How often do you want to run truncate process on expired data?: 1 Hour(s)
 - 1. It is a good idea to delete once an hour to keep the collection tables as

small as possible. DV metrics will issue the delete command once an hour based on when DV metrics was enabled. This is what keeps the data at a rolling 24 hours when the above setting is set to "1 Day".

- The KPImetrics "kpimetricsTrig_30_DBMSScheduler" trigger executes every 2 hours to process the collection data since the last execution and insert it into the history tables. It tracks min (last) values based on METRICS_JOB_DETAILS values. Always processes given a range of id's and timestamps.
- Important: If you turn off the KPImetrics triggers but leave metrics running, you will lose transactions because the data is no longer being processed into the history tables.

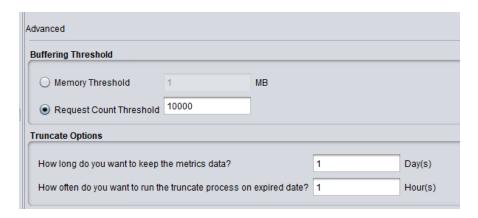

- d. Enable metrics and save.
 - i. Make sure both radio button indicators are green.



- ii. DV metrics will issue **delete** statements when **enabling** metrics:
 - Delete statements are qualified by nodehost, nodeport and logintime for metrics_sessions or starttime for metrics_requests and metrics_resources_usage.

delete from

/shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_2016/DVKPI/dvkpi/metrics_s essions where nodehost='localhost' and nodeport=9800 and logintime < '2020-01-20 17:27:08.756'

delete from

/shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_2016/DVKPI/dvkpi/metrics_r equests where nodehost='localhost' and nodeport=9800 and starttime < '2020-01-20 17:27:08.756'

delete from

/shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_2016/DVKPI/dvkpi/metrics_r esources_usage where nodehost='localhost' and nodeport=9800 and starttime < '2020-01-20 17:27:19.975'

 DV metrics will issue insert statements when disabling metrics to flush the buffer to the collection tables.

insert into

/shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_2016/DVKPI/dvkpi/metrics_ses sions select * from /system/datasources/system/SYS_METRICS_SESSIONS

insert into

/shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_2016/DVKPI/dvkpi/metrics_req uests select * from /system/datasources/system/SYS_METRICS_REQUESTS

insert into

/shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_2016/DVKPI/dvkpi/metrics_req uests select * from /system/datasources/system/SYS_METRICS_REQUESTS

- e. If the Buffer Status shows RED then review the following:
 - i. Make sure the three collection tables exist in the database and metrics are properly configured to point to them.
 - ii. Make sure the tables have the correct permissions for writing to them.
 - iii. If the problem persists, then check cs server.log for errors.
 - iv. If Oracle, make sure the tablespace has the correct permissions for writing to it.
 - v. If SQL Server and BCP is configured, use "|~|" for the "MS SQL Server Sources" "Column Delimiter" instead of just a "|" symbol. This is because the data will contain pipe symbols "|". The "|~|" makes the delimiter more unique where the data should not contain this pattern. Search for "Column Delimiter" in Administration -> Configuration.

14. Test data capture procedures

- a. Test each of the following scripts manually and in order shown to determine that there were no issues.
- b. Enter 'Y' for turn debug on while testing.
- c. Examine the result output and "console" debug output to determine if it is working properly.
- d. Scripts are located here: /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache
- e. Validation views are located here:
 - i. /shared/ASAssets/KPImetrics/Application/workflow/vCISWorkflowStatus
 - ii. /shared/ASAssets/KPImetrics/Application/workflow/vJobDetails

SCRIPT Validation View
-- Must do these three first to establish base line resources used by other scripts.

1. Cache_ALL_RESOURCES vCISWorkflowStatus
2. Cache_ALL_USERS vCISWorkflowStatus

- -- Execute some external test queries to generate the proper requests.
- -- To force /policy/metrics to write data to the collection tables, disable it and then enable it.
- -- These scripts rely on data from collection tables
- 4. pMETRICS_ALL_TABLES_exec

vJobDetails

15. Turn on all triggers

/shared/ASAssets/KPImetrics/Configuration/updateTriggers(1)

16. Upgrade is complete

17. Database server version upgrade

 If the Dabase was upgraded then follow Chapter 7 "Upgrading a Data Source Adapter"

5 Export ASAssets Resources for Migration

The following instructions will demonstrate how to export "Master" ASAssets resources in preparation for migrating to a different environment. Section 4 "Upgrading KPImetrics" discussed how to perform the upgrade. Those steps can be used for upgrading the "Master" and upper environments. What is different, is the TIBCO archive file export.

- When upgrading the "Master" environment, the archive "car" file comes from TIBCO.
- When migrating to another environment, it is a best practice to export "configured" resources from "Master" and migrate to the other environments.

This section describes how to export the customized, "configured" resources from the "Master" environment. The reason this is advantageous over a completely new install is that the effort of configuring most of the required resources has already been done. With a few minor tweaks after importing into the target environment, KPImetrics will be up and running in no time.

Perform the following steps in the source environment from which you will migrate from.

Export Source Environment .car file

- 1. Sign into the TDV "Master" environment with Studio as a user with administrator access.
 - a. This is the environment that contains the "master" KPImetrics configuration and has been configured for the customer environment.
- 2. Modify the master "upgrade commonValues KPI"
 - a. This step is optional. If you are considering executing a deployment/migration of the KPImetrics car file to the next environment using deployment automation scripts then this will help to automate the modification of the commonValues which contains unique values for each environment.
 - b. For "<u>commonValues</u>" changes, review the following resources to see how to automate the migration:
 - i. /shared/ASAssets/KPImetrics/Customize/upgrade_commonValues_KPI
 - ii. <u>upgrade commonValues KPI</u> This procedure is used during the migration process to modify the commonValues and optionally execute pqInsert_METRICS_EVENT_REGISTRATION and/or pqInsert_METRICS_JOB_tables.

- c. Note: This procedure may be invoked during deployment using the CoE deployProject.sh -runAfter -o "option_file" deployment options. The -o "option_file" is used to automatically modify the KPImetrics data source connection information for the target environment during import of the .car file. The -runAfter command executes "upgrade_commonValues_KPI" to change the commonValues for that environment.
- 3. Modify the master "upgrade_defaultTriggers_KPI"
 - a. This step is optional. If you are considering executing a deployment/migration of the KPImetrics car file to the next environment using deployment automation scripts then this will help to automate the modification of the defaultTriggersToEnable which contains unique values for each environment.
 - b. For "defaultTriggersToEnable" changes, review the following resources to see how to automate the migration:
 - /shared/ASAssets/KPImetrics/Customize/upgrade_defaultTriggers_KPI
 - ii. <u>upgrade defaultTriggers KPI</u> This procedure is used during the migration process to modify the defaultTriggersToEnable and optionally execute.
 - c. Note: This procedure may be invoked during deployment using the CoE deployProject.sh -runAfter -o "option_file" deployment options. The -o "option_file" is used to automatically modify the KPImetrics data source connection information for the target environment during import of the .car file. The -runAfter command executes "upgrade_defaultTriggers_KPI" to change the defaultTriggersToEnable for that environment.
- 4. [Automated] Export ASAssets and KPImetrics car files.
 - Execute the following from within TDV Studio to export the car files to a directory on the TDV server. They can be transferred to other servers from there.
 - b. This procedure will automatically turn off the triggers before exporting.
 - This procedure will turn triggers back on after exporting.
 - d. /shared/ASAssets/KPImetrics installation/ Release/export package CAR files
 - i. debug CHAR(1), Y=debug on. N=debug off.
 - ii. tdv_file_system_directory VARCHAR(4000), [required] the TDV server base path to export the car files into.
 - 1. Example: c:\tmp or /tmp

- 2. What gets created by this procedure is c:\tmp\<CoE version: YYYYQnnn>
 - a. Example: c:\tmp\2022Q100 or /tmp/2022Q100
- 3. The 5 car files are exported to this folder:
 - a. TIBCO ASAssets Full.car
 - i. /services/databases/ASAssets
 - ii. /shared/ASAssets
 - TIBCO ASAssets BackupRestore.car
 - i. /shared/ASAssets/BestPractices_v81/_Installation
 - c. TIBCO KPImetrics.car
 - i. /services/databases/ASAssets/KPImetrics
 - ii. /services/databases/ASAssets/KPImetricsAdmin
 - iii. /shared/ASAssets/KPImetrics
 - d. TIBCO KPImetrics Installation.car
 - i. /services/databases/ASAssets/KPImetricsInstall
 - ii. /shared/ASAssets/KPImetrics_installation
 - e. TIBCO_Utilities.car
 - i. /services/databases/ASAssets/Utilities
 - ii. /shared/ASAssets/Utilities
- iii. encryption_password VARCHAR, [optional] if left null, tibco1 is used
- iv. disableRelationalDatasources CHAR(1), Disable the CoE and KPImetrics (if exist) relational datasources: KPImetrics-KPI*. NULL or anything other than "y or Y" does not disable the data source.
- [Manually] Export KPImetrics shared and database into a single .car file.
 - a. Turn off the KPImetrics triggers using the following script:
 - i. /shared/ASAssets/KPImetrics/Configuration/updateTriggers(0)



- b. <u>Click on one folder</u> and then <u>Control-Click on the remaining</u> to select all
 - i. Option 1 only ASAssets
 - 1. /services/databases/KPImetrics
 - 2. /services/databases/ASAssets/KPImetricsAdmin
 - 3. /services/databases/ASAssets/KPImetricsInstall
 - 4. /shared/ASAssets/KPImetrics
 - 5. /shared/ASAssets/KPImetrics installation

- ii. Option 2 All of ASAssets published and shared
 - 1. /services/databases/ASAssets
 - 2. /shared/ASAssets
- c. The screen shot below shows what this will look like:
 - i. Option 1: only KPImetrics

Option2: All ASAssets published and shared





- d. Use option 2 if the target server has not yet been deployed with ASAssets.
- e. Right-click on one of the highlighted folders and select "Export".
- f. Uncheck "Dependencies" but leave the other boxes checked.
- g. Navigate to a path to create the .car file and give it a name such as KPImetrics_<yyyymmdd>_<env>.car so that you know which environment it came from and what date it was exported.
- h. Provide an encryption password.
- Click OK to export.





6 Migrate a New KPImetrics Installation

The following instructions will demonstrate how to migrate a currently installed KPImetrics configuration from one TDV server environment to another. The new installation in the target environment **does not have any data collected**. If any data has been collected, it will get wiped out during this process.

The reason this is advantageous over a completely new install is that the effort of configuring most of the required resources has already been done. With a few minor tweaks after importing into the target environment, KPImetrics will be up and running in no time.


Perform the following steps in the source environment from which you will migrate from.

Export Source Environment .car file

1. Execute the steps in Section 5 "Export ASAssets Resources for Migration"

Import Target Environment .car file

- 1. Sign into the TDV *target* environment with Studio as a user with administrator access.
- 2. Create the published database "ASAssets" if it does not exist.
 - a. Location: /services/databases/ASAssets
 - b. Note: It should already exist because the Utilities require it and the Utilities are a baseline for KPImetrics.
 - c. If you chose option 2 during export then skip this step as it will automatically be created upon import of the .car file.
 - d. If it is not there, then you will need to create it and reimport the Utilities Read the Utilities instructions as it clearly states what to do.
- Import KPImetrics <yyyymmdd> <env>.car file into the target environment
 - a. Right-click on the root < hostname > (/) and select import.
 - b. All check boxes should remain checked
 - c. In addition, click on "Overwrite"
 - d. Enter the encryption password used during export
 - e. See screen shot below:

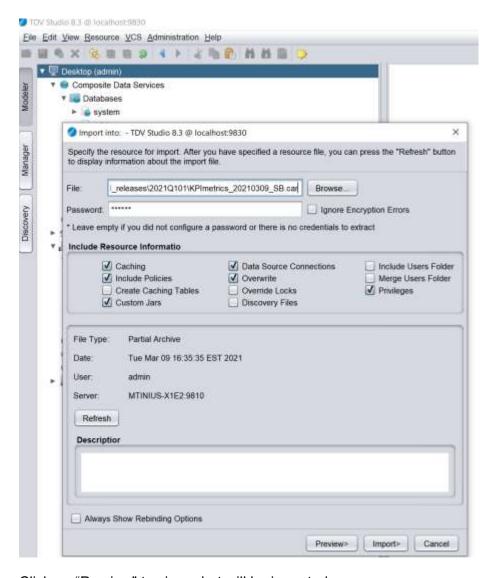

- f. Click on "Preview" to view what will be imported.
- g. Click on "Import" to import the resources.
- h. Click "OK" when it is finished.

Configure KPImetrics Target Installation

- 1. Sign into the TDV target environment with Studio as a user with administrator access.
- 2. Configuration Parameters
 - a. Configure DV email: Used to send alerts and notifications
 - a. Select Administration \rightarrow Configuration \rightarrow Server \rightarrow Configuration \rightarrow E-mail

- iii. From Address
- iv. SMTP Host Name
- v. SMPT Port
- vi. If required, provide user name and password
- b. Test sending an email using /lib/util/SendEMail
 - i. Do not put anything in the "from" address. Leave blank.
 - ii. Populate the following:
 - "to"=<your email>
 - 3. "subject"=test
 - 4. "contentType"=TEXT PLAIN
 - 5. "content"=test

b. Configure Weight of Time Keeper

- a. Select Administration → Configuration → Server → Configuration → Cluster → Cluster trigger distribution
 - i. Weight of time keeper: 0
 - Set this if time keeper needs special weight in weighted round robin trigger distribution. For most use cases this value need not be set.
 - 7. Set to 0 so that the timekeeper node does "not" participate in executing the triggers.
 - 8. Configure Long Running Processes (Request Run Time)
- b. Select Administration → Configuration → Server → Events and Logging →
 Event Generation → Request Events → Request Run Time
 - This controls the period of time after which a request is considered to be long-running, resulting in the generation of a RequestRunForTooLong event, if request events are enabled. A value of 0 disables this feature.
 - ii. Typical value is 60 minutes.
 - iii. This event executes this trigger:kpimetricsTrig_18_CheckLongRunningRequests

c. Postgres Repository Pool Settings

- a. Select Administratioin → Configuration → Server → Configuration →
 Repository Database → Connection Pools
 - System Pool
 - 1. Pool Maximum Size (On Server Restart): 200
 - 2. Default=50
 - 3. Maximum number of internal database connections opened for


use by the Server metadata sub-system. Note that this number must be greater than the "Minimum". This value is locally defined. It will not be altered when restoring a backup and will not be replicated in a cluster.

- ii. System Table Pool
 - 1. Pool Maximum Size (On Server Restart): 200
 - 2. Default=50
 - Maximum number of internal database connections opened for client access to system tables. Note that this number must be greater than the "Minimum". This value is locally defined. It will not be altered when restoring a backup and will not be replicated in a cluster.

d. For Microsoft SQL Server Data source target only

- a. Select Administratioin → Configuration → Data Sources → MS SQLServer
 Sources
 - Microsoft BCP utility path: The path on the TDV server where Microsoft BCP is installed.
 - 1. Default=<not set>
 - The absolute file path of the Microsoft BCP utility. This value is locally defined. It will not be altered when restoring a backup and will not be replicated in a cluster.
 - ii. Column Delimiter: |~|
 - 1. Default=<not set>
 - The column delimiter character to be used for the BCP utility while loading data. If not defined, the value in Configuration > Data Sources > Common to Multiple Source Types > Data Sources Data Transfer > Column Delimiter will be used.
 - 3. If SQL Server and BCP is configured, use "|~|" for the "MS SQL Server Sources" "Column Delimiter" instead of just a "|" symbol. This is because the data will contain pipe symbols "|". The "|~|" makes the delimiter more unique where the data should not contain this pattern. Search for "Column Delimiter" in Administration→Configuration.
- b. Select Administratioin → Configuration → Data Sources → Common to Multiple Source Types
 - i. Data Sources Data Transfer → Buffer Flush Threshold. The minimum value is 1000. Change to 50000
 - ii. Default Commit Row Limit: Change to 50000
- c. Enable Native Loading on the datasource
 - i. Open KPI sqlserver 2016
 - 1. Click on the "Advanced" tab

2. Enable Native Data Loading and save the datasource.



- 3. Configure *commonValues*
 - a. *** BYPASS *** this step if you chose to deploy and execute "upgrade_commonValues_KPI"
 - b. Location: /shared/ASAssets/KPImetrics/Customize/commonValues
 - c. Modify "cisServerNickname" for this environment
 - d. Modify "hostnameProperty" for this environment if applicable.
 - i. dentifies the propery for hostname: (default) SERVER_HOSTNAME retrieve hostname. SERVER_ID - extract hostname from the server id. If the SERVER_HOSTNAME does not return the proper or actual hostname then use SERVER_ID. Check the server attributes: "Host Name" and "Server ID" to determine what TDV will return.
 - e. Modify Data Source variables
 - i. If the catalog or schema is different than the environment you imported from then modify the following:
 - dataSourceCatalog null if Oracle. Requires catalog for SQL Server. [Case Sensitive]
 - 2. dataSourceSchema requires schema name [Case Sensitive]
 - ii. If the tablespaces/filegroups are different in this database environment than the environment you imported from then modify the following. Leave null to use the primary tablespace or filegroup.
 - 1. collectionTablespaceName
 - 2. historyTablespaceName
 - 3. indexTablespaceName
 - f. Modify Cluster Awareness Configuration:
 - i. The following variables are used to designate a dedicated time keeper host and port. None of the ClusterSafeCache procedures should be executed on a dedicated time keeper node because general processing and work is never routed to this node. It's only job in the cluster is to service triggers and perform deployments. Execute the following


procedure on the "dedicated" time keeper node to get the hostname and port: /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/pGetSystemInformation

- ii. The "Rules" are as follows:
 - 1. They both should be set to null when this environment is not a cluster (a.k.a. single node).
 - They both should be set to null when this environment is a cluster and, any node in the cluster may be the timekeeper and all nodes do work.
 - 3. Set the hostname and port to the the dedicated timekeeper node when the environment is a cluster and the node has been dedicated as a timekeeper and does not do work.
- iii. dedicatedTimeKeeperHostname dediated time keeper host
- iv. **dedicatedTimeKeeperPort** dedicated time keeper port.
- g. Determine how long the data for this environment will be retained. Example: For LLE it is typically 4 months / 120 days. For PROD it is typically 12 months / 366 days. Daily/Interval partitioning is in affect for all tables with a 366-day maximum interval which accounts for leap year.
 - i. purgeWorkflowData: LLE=120, PROD=366
 - ii. purgeSQLRequests: LLE=120, PROD=366
 - iii. purgeResourceUsage: LLE=120, PROD=366
 - iv. purgeHistory: LLE=120, PROD=366
 - v. **purgeMetadata**: LLE=30, PROD=30 Due to the amount of data, the values are a lot lower for this setting.
- h. Modify "partitionStartDate" this is always the first day of the month in which you are doing the configuration.
- 4. Modify the database data source
 - a. *** BYPASS *** this step if you chose to deploy and execute using an option file to automatically update the KPImetrics data source.
 - b. For Oracle modify one of KPI_oracle_[11g|12c|19c]
 - c. For SQL Server modify one of KPI sqlserver [2016]2019]
 - d. Modify to point to the correct database host and port
 - e. Modify catalog and schema if necessary


- f. Modify user and password if necessary
- 5. Validate the database data source connection
 - a. Open the KPImetrics data source and insure the connection information is correct for the environment you are in.
 - b. Test the connection.
- 6. Install CPU_MEMORY_CHECKER scripts
 - a. Do this for each node in the cluster.
 - b. Copy KPImetrics*.* scripts from the source TDV_HOME/bin folder to the target environment TDV_HOME/bin folder
 - c. For Linux, set the permissions properly
 - i. chmod 755 KPImetrics*
 - ii. chown <owner> KPImetrics*
 - iii. chgrp <group> KPImetrics*

Execute KPImetrics Installation script

- 1. Execute the Installation to create the database tables
 - a. WARNING: DO NOT RUN THIS IN AN EXISTING ENVIRONMENT. IT WILL DROP ALL KPIMETRICS TABLES.
 - b. /shared/ASAssets/KPImetrics installation/2 Post Installation

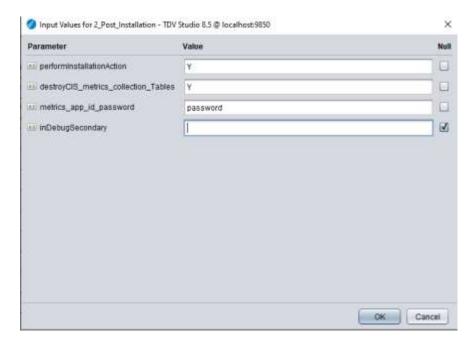

- c. Click OK
- d. The status should be "SUCCESS"

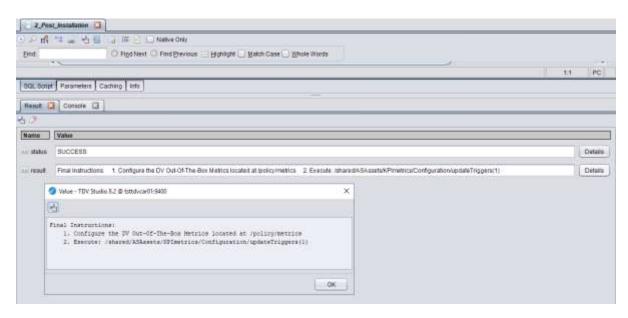

Configure Data Source Capabilities File

PART 1: IMPORTANT NOTE:

This section is used to make postgres repository queries more efficient.

1. Postgres 9.1 Instructions

- d. These changes are required on each node of the cluster.
- e. This entry is used to make the Cache_ALL_RESOURCES queries more efficient and push dow to the TDV posgres repository.
- f. Add the following text to
 - i. DV_HOME/conf/adapters/system/postgresql_9_1/postgresql_9_1_values.xml
 - ii. They can be put directly after the first comment in the file
 - iii. Note: These changes are permanent and will not be overwritten once a hotfix/patch is applied.
 - iv. The postgresql_9_1 folder will not contain a data source adapter jar file nor does one need to be present for the capabilities file to take effect.

```
<common:attribute
```

xmlns:common="http://www.compositesw.com/services/system/util/common">

<common:name>/custom/TO TIMESTAMP(~number)</common:name>

<common:type>STRING</common:type>

<common:value>TO_TIMESTAMP(\$1)</common:value>

<common:configID>TO TIMESTAMP(~number)</common:configID>

</common:attribute>

PART 2: IMPORTANT NOTE:

This section is to get F_GET_PARTITION_NUM to push down.

When TDV imports a car file that contains a data source, it will overwrite the adapter jar files and .xml capabilities file in the /conf/adapters/system/<adapter_name> folder. Please review all entries in the .xml capabilities file to make sure the schema name is correct.

Since the car file would have been exported from an "already" configured environment, the "customer's" data source jar file and .XML file would have been automatically installed in the target environment exactly as it is supposed to be configured. The steps below are more of a validation that both the jar file and .XML file are present and correct.

A restart of the TDV server would be required for each node in order to pick up the driver and configuration.

- 1. TDV Capabilities Files used to achieve push-down with F_GET_PARTTION_NUM()
 - a. Example: SELECT * from /shared/ASAssets/KPImetrics/Application/metadata/vMetadataResource where partition = F_GET_PARTITION_NUM(CURRENT_DATE-1)
- 2. Oracle Instructions:
 - a. Add the following text to the correct adapter that is being used:
 - i. DV_HOME/conf/adapters/system/oracle_11g_thin_driver/ oracle 11g thin driver values.xml

- ii. DV_HOME/conf/adapters/system/oracle_12c_thin_driver/ oracle_12c_thin_driver_values.xml
- iii. DV_HOME/conf/adapters/system/oracle_19c_thin_driver/ oracle 19c thin driver values.xml
- iv. The lines can be put directly after the first comment in the file
- v. Note: These changes are permanent and will not be overwritten once a hotfix/patch is applied.

- b. Modify the schema name "DVKPI" to whatever your schema name is.
- c. Restart the TDV server
- d. Repeat for each node in the cluster
- 3. SQL Server Instructions:
 - a. Add the following text to
 - DV_HOME/conf/adapters/system/microsoft_sql_server_2016/ microsoft_sql_server_2016_values.xml
 - ii. DV_HOME/conf/adapters/system/microsoft_sql_server_2019/ microsoft_sql_server_2019_values.xml
 - iii. They can be put directly after the first comment in the file
 - Note: These changes are permanent and will not be overwritten once a hotfix/patch is applied.


```
<common:attribute
xmlns:common="http://www.compositesw.com/services/system/util/common">
        <common:name>/custom/F_GET_PARTITION_NUM(~date)</common:name>
        <common:type>STRING</common:type>
        <common:value>dbo.F_GET_PARTITION_NUM($1)</common:value>
        <common:configID>F_GET_PARTITION_NUM(~date)</common:configID>
        </common:attribute>
<ns1:attribute xmlns:ns1="http://www.compositesw.com/services/system/util/common"></ns1:attribute xm
```

```
<ns1:name>/custom/F_GET_PARTITION_NUM(~string)</ns1:name>
<ns1:type>STRING</ns1:type>
<ns1:value>dbo.F_GET_PARTITION_NUM($1)</ns1:value>
<ns1:configID>F_GET_PARTITION_NUM(~string)</ns1:configID>
</ns1:attribute>
```

- b. Modify the schema name "dbo" to whatever your schema name is.
- c. Restart the TDV server
- d. Repeat for each node in the cluster

Configure TDV Metrics [/policy/metrics]

- 1. Configure the DV Out-Of-The-Box Metrics located at /policy/metrics
 - a. Point to the correctly configured datasource in the Metadata folder:
 - i. /shared/ASAssets/KPImetrics/Physical/Metadata
- 2. Select "Create or Bind Tables" or "Edit Tables" depending on the /policy/metrics context.
 - a. Never been configured: Create or Bind Tables




b. Previously configured: Edit Tables







- 3. Browse to the schema path
 - a. Browse to the Sessions table: metrics sessions
 - b. Browse to the Requests table: metrics_requests
 - c. Browse to the Usage table: metrics_resources_usage
 - d. DO NOT execute DDL
 - e. Click OK to finish

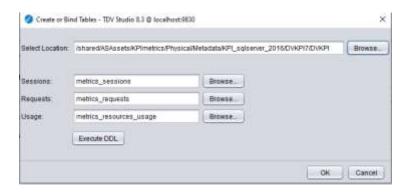

- f. Configure the Advanced Section
 - iii. As of Release 2020Q100 and higher it is "REQUIRED" to set the following:
 - Request Count Threshold: Set to 10000. Adjust accordingly for active servers. It may need a higher number so that the number of inserts is reduced.
 - How long do you want to keep the metrics data?: 1 Day(s)
 - KPImetrics is no long deleting collection data. It will rely on the DV server
 to execute delete commands to clean-up the collection tables. The clock
 starts ticking when metrics is enabled. A setting of 1 day means that
 there will be a minimum of 24 hours of data that will stay in the collection
 tables. This is a rolling 24 hours.
 - How often do you want to run truncate process on expired data?: 1 Hour(s)
 - It is a good idea to delete once an hour to keep the collection tables as small as possible. DV metrics will issue the delete command once an hour based on when DV metrics was enabled. This is what keeps the data at a rolling 24 hours when the above setting is set to "1 Day".
 - The KPImetrics "kpimetricsTrig_30_DBMSScheduler" trigger executes every 2 hours to process the collection data since the last execution and insert it into the history tables. It tracks min (last) values based on METRICS_JOB_DETAILS values. Always processes given a range of id's and timestamps.
 - Important: If you turn off the KPImetrics triggers but leave metrics running, you will lose transactions because the data is no longer being processed into the history tables.

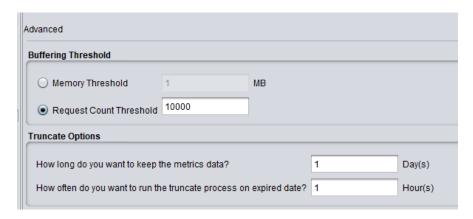

8. Enable metrics and save



- a. DV metrics will issue delete statements when enabling metrics:
 - Delete statements are qualified by nodehost, nodeport and logintime for metrics_sessions or starttime for metrics_requests and metrics resources usage.

delete from

/shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_2016/DVKPI/dvkpi/metric s_sessions where nodehost='localhost' and nodeport=9800 and logintime < '2020-01-20 17:27:08.756'

delete from

/shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_2016/DVKPI/dvkpi/metric s_requests where nodehost='localhost' and nodeport=9800 and starttime < '2020-01-20 17:27:08.756'

delete from

/shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_2016/DVKPI/dvkpi/metric s_resources_usage where nodehost='localhost' and nodeport=9800 and starttime < '2020-01-20 17:27:19.975'

b. DV metrics will issue **insert** statements when **disabling** metrics to flush the buffer to the collection tables.

insert into

/shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_2016/DVKPI/dvkpi/metric s_sessions select * from /system/datasources/system/SYS_METRICS_SESSIONS

insert into

/shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_2016/DVKPI/dvkpi/metric s_requests select * from /system/datasources/system/SYS_METRICS_REQUESTS

insert into

/shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_2016/DVKPI/dvkpi/metric s_requests select * from /system/datasources/system/SYS_METRICS_REQUESTS

- 9. If the Buffer Status shows RED then review the following:
 - a. Make sure the three collection tables exist in the database and metrics are properly configured to point to them.
 - b. Make sure the tables have the correct permissions for writing to them.
 - c. If Oracle, make sure the tablespace has the correct permissions for writing to it.

If SQL Server and BCP is configured, use "|~|" for the "MS SQL Server Sources" "Column Delimiter" instead of just a "|" symbol. This is because the data will contain pipe symbols "|". The "|~|" makes the delimiter more unique where the data should not contain this pattern. Search for "Column Delimiter" in Administration→Configuration.

Turn on KPImetrics triggers

1. Execute: /shared/ASAssets/KPImetrics/Configuration/updateTriggers(1)

7 Migrate a KPImetrics Patch

The following instructions will demonstrate how to migrate a patch from a currently installed KPImetrics configuration from one TDV server environment to another. The target environment has already been installed and configured and is collecting data. There are different levels of patches which may require additional configuration on the target servers.

- 1. Level 1 code changes only. No changes to the KPImetrics data source and no changes to the resources in the /shared/ASAssets/KPImetrics/Customize folder.
- 2. Level 2 changes to /Customize folder
 - a. For "<u>commonValues</u>" changes, review the following resources to see how to automate the migration:
 - i. /shared/ASAssets/KPImetrics/Customize/upgrade_commonValues_KPI
 - <u>upgrade commonValues KPI</u> This procedure is used during the migration process to modify the commonValues and optionally execute pqInsert_METRICS_EVENT_REGISTRATION and/or pqInsert_METRICS_JOB_tables.
 - b. For "<u>upgrade defaultTriggers KPI</u>" changes, review the following resources to see how to automate the migration:
 - i. /shared/ASAssets/KPImetrics/Customize/upgrade defaultTriggers KPI
 - ii. <u>upgrade_defaultTriggers_KPI</u> This procedure is used during the migration process to modify the defaultTriggersToEnable.
 - c. <u>pqInsert METRICS EVENT REGISTRATION</u> any changes would need to be executed once in the target environment.
 - d. <u>pqInsert METRICS JOB tables</u> any changes would need to be executed once in the target environment.
 - e. <u>pqInsert_METADATA_Constants</u> any changes will happen on the first run of the trigger "kpimetricsTrig_40_Cache_METADATA_TABLES" following the update.
 - f. <u>defaultTriggersToEnable</u> any changes will take affect after executing updateTriggers.
- 3. Level 3 changes to the KPImetrics data source

- a. Any changes to the database will require executing the "Upgrade" scripts. See the section on "Upgrading KPImetrics".
- $b. \quad \text{Execute /shared/ASAssets/KPImetrics_installation/} \textbf{3_Post_Upgrade}$

8 Upgrading a Data Source Adapter

Introduction

This section describes how to upgrade the data source adapter. For example, if you are upgrading your database from Oracle 12c to Oracle 19c or SQL Server 2016 to SQL Server 2019 then you are in the right section.

How to Upgrade a Data Source Adapter

Start with a few house-keeping activities described below such as turning off metrics and KPImetric triggers.

Requirements:

- 1. Make sure that you are on the latest version of the KPImetrics before proceeding.
- 2. TDV 8.3 is the minimum requirement to upgrade to Oracle 19c or SQL Server 2019.
- 3. Make sure that all nodes in the cluster are connected and operational.
- 4. You can only upgrade from Oracle to Oracle or SQL Server to SQL Server. You cannot upgrade from Oracle to SQL Server or visa-versa. Only like database upgrades are supported.
- 5. **** MIGRATE **** all of the database resources from the old database to the new database.
 - a. For SQL Server,
 - i. Create the same database name (a.k.a. becomes catalog name in TDV)
 - ii. Create the same schema name
 - iii. Recreate file groups with the same names and sizes.
 - b. For Oracle.
 - i. Create the same schema name
 - ii. Recreate tablespaces with the same names and sizes.
 - c. Migrate all objects including tables, views, procedures, functions, sequences, partitioning schemes
 - i. sequences reset the sequence to start where the old one left off
 - d. Permissions need to be exacelty the same

Upgrade Instructions:

1. Database objects have been migrated

a. As detailed in the requirements section, all database objects have been migrated from the old database to the new database.

2. Turn off /policy/metrics

a. Do this so that no data is inserted into the metrics collection tables.

- 3. Turn off all triggers
 - a. /shared/ASAssets/KPImetrics/Configuration/updateTriggers(0)
- 4. NOTE: Skip STEP 5 if the required data source is already present in TDV
 - a. KPI oracle 19c
 - b. KPI sqlserver 2019
- 5. Import the data source car file
 - a. Locate the .car file in the KPImetrics folder that was unzipped from GIThub. It will overwrite the adapter jar and XML capabilities file in the /conf/adapters/system folder associated with the adapter being imported
 - i. Example: Oracle:
 - 1. KPImetrics_TDV8.3_oracle_19c.car
 - ii. Example: SQL Server:
 - 1. KPImetrics_TDV8.3_sqlserver_2019.car
 - a. Using Studio, Right-click on either Desktop (admin) or root hostname (/) and select "Import"
 - v. Click on the "Overwrite" option. Leave all other options as they are.
 - vi. Browse to the local file system for the car file specified in step a. above.
 - vii. Click on preview and review what will be imported.
 - viii. Click on Import and then click OK
 - b. Import options checked:

X Caching X Data Source Connections Include Users
Jars

X Include Cache Policies X Overwrite Merge Users Folder
Create Caching Tables Override Locks X Privileges

X Custom Jars Discovery Files

6. Configure the data source capabilities file and adapter jar IMPORTANT NOTE:

When TDV imports a car file that contains a data source, it will overwrite the adapter jar files and .xml capabilities file in the /conf/adapters/system/<adapter_name> folder. Please review all entries in the .xml capabilities file to make sure the schema name is correct. This must be done on eac node of the cluster.

- a. TDV Capabilities Files used to achieve push-down with F_GET_PARTTION_NUM()
- b. Example:

SELECT * from /shared/ASAssets/KPImetrics/Application/metadata/vMetadataResource where partition = F_GET_PARTITION_NUM(CURRENT_DATE-1)

- c. Oracle Instructions:
 - ix. Install the proper Oracle 19c adapter jar file. Download from Oracle.
 - x. Add the following text to the correct adapter that is being used:

- DV_HOME/conf/adapters/system/oracle_19c_thin_driver/ oracle_19c_thin_driver_values.xml
- 2. The lines can be put directly after the first comment in the file
- 3. Note: These changes are permanent and will not be overwritten once a hotfix/patch is applied.

- xi. Modify the schema name "DVKPI" to whatever your schema name is.
- xii. Restart the TDV server

</ns1:attribute>

xiii. Repeat for each node in the cluster

<ns1:type>STRING</ns1:type>

- d. SQL Server Instructions:
 - Install the proper SQL Server 2019 adapter jar file. Download from Microsoft.
 - ii. Add the following text to
 - DV_HOME/conf/adapters/system/microsoft_sql_server_2019/ microsoft_sql_server_2019_values.xml
 - 2. They can be put directly after the first comment in the file
 - 3. Note: These changes are permanent and will not be overwritten once a hotfix/patch is applied.

```
<common:attribute
xmlns:common="http://www.compositesw.com/services/system/util/common">
        <common:name>/custom/F_GET_PARTITION_NUM(~date)</common:name>
        <common:type>STRING</common:type>
        <common:value>dbo.F_GET_PARTITION_NUM($1)</common:value>
        <common:configID>F_GET_PARTITION_NUM(~date)</common:configID>
        </common:attribute>
<ns1:attribute xmlns:ns1="http://www.compositesw.com/services/system/util/common">
        <ns1:name>/custom/F_GET_PARTITION_NUM(~string)</ns1:name>
```

<ns1:value>dbo.F_GET_PARTITION_NUM(\$1)</ns1:value>
<ns1:configID>F_GET_PARTITION_NUM(~string)</ns1:configID>
</ns1:attribute>

- iii. Modify the schema name "dbo" to whatever your schema name is.
- iv. Restart the TDV server
- v. Repeat for each node in the cluster

7. Configure the data source connection

- a. Enable the new data source
- b. Configure the data source connection to the new database
- c. Test the connection to make sure it is valid
- d. If SQL Server, go to the Advanced Tab and remove the "SELECT 1" from the connection validation query to prevent locking.

8. Add/Remove (introspect) the data source resources

- a. Introspect the exact same resources that are in the old adapter
- b. This will include Procedures, Tables and Views
- c. Do *NOT* just click everything in the schema. Some resources are used but not introspected. Compare with the old one while you are adding database objects by having 2 studios open side-by-side.

9. Configure commonValues

- a. Reconfigure the commonValues
 - i. Location: /shared/ASAssets/KPImetrics/Customize/commonValues
 - ii. Modify **dataSourceName** change to the <u>new adapter name</u>.
 - 1. KPI_oracle_11g
 - 2. KPI oracle 12c
 - 3. KPI oracle 19c
 - 4. KPI sqlserver 2016
 - 5. KPI sqlserver 2019
 - iii. Modify **dataSourceCatalog** change catalog name if applicable. It was recommended to keep the same name as before.
 - iv. Modify **dataSourceSchema** change the schema name if applicable. It was recommended to keep the same name as before.
 - v. For Oracle, if using Exadata determine if there are any changes to **historyTableCompression**
- b. Validate the configuration names for the following:
 - i. Validate collectionTablespaceName.
 - ii. Validate historyTablespaceName.
 - iii. Validate indexTablespaceName.

10. Rebind resources

Execute the following to rebind the resources to the new adapter /shared/ASAssets/KPImetrics/Configuration/rebindPhysicalDatabaseType(Y,A)

11. Update impacted resources

a. If there are any **red** impacted resources in /shared/ASAssets/KPImetrics execute the following:

/shared/ASAssets/KPImetrics/Configuration/updateImpactedResources (Y)

12. Reconfigure TDV Metrics [/policy/metrics]

- a. Reconfigure the DV Out-Of-The-Box Metrics located at /policy/metrics.
 - i. This is required because the data source adapter has changed paths.
 - ii. Click on the Storage "Browse" button to change the path




iii. Point to the new datas ource adapter in the Metadata folder such as KPI_sqlserver_2019 or KPI_oracle_19c



- b. Select "Edit Tables"
 - i. Previously configured: Edit Tables



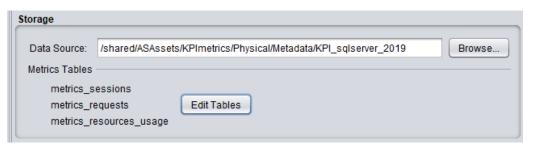

- c. Click "Browse" to the schema path and select the schema name
 - i. Click OK to select the schema
- d. DO NOT execute DDL
- e. Do not browse to each table as the default names should be valid.
- f. Click OK to finish



g. Enable /policy/metrics

- i. Both Buffering status and Truncate status should be green.
- ii. If either one is **red**, then disable and enable. It might take a couple of times for it to resolve itself.

13. Test data capture procedures

- a. Test each of the following scripts manually and in order shown to determine that there were no issues.
- b. Enter 'Y' for turn debug on while testing.
- c. Examine the result output and "console" debug output to determine if it is working properly.
- d. Validation views are located here:
 - iii. /shared/ASAssets/KPImetrics/Application/workflow/vCISWorkflowStatus
 - iv. /shared/ASAssets/KPImetrics/Application/workflow/vJobDetails
- e. Scripts are located here:

/shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache

SCRIPT Validation View

- -- Must do these three first to establish base line resources used by other scripts.
- 1. Cache ALL RESOURCES

vCISWorkflowStatus

2. Cache ALL USERS

vCISWorkflowStatus

4. Cache LOG MEMORY

vCISWorkflowStatus

- 5. Execute some external test queries to generate the proper requests.
- 6. To force /policy/metrics to write data to the collection tables, disable it and then enable it.
- -- These scripts rely on data from collection tables
- 7. pMETRICS ALL TABLES exec

vJobDetails

14. Turn on all triggers

/shared/ASAssets/KPImetrics/Configuration/updateTriggers(1)

15. Upgrade is complete

9 KPImetrics Administration Scenarios

Turn KPI On/Off

This section describes how to turn KPImetrics on and off by simply turning on/off the triggers.

- 1. Turn OFF KPImetrics triggers
 - a. Execute this procedure /shared/ASAssets/KPImetrics/Configuration/updateTriggers
 - i. Enable=0
 - ii. includeList=null
 - iii. excludeList=null
 - b. Refresh Studio
 - c. Review the triggers status on the Manager tab / Triggers:

Resource A	Status	Type	Frequency
kpimetricsTrig 01 Cache ALL RESOURCES	② Disable	Timer Event	Every 2 hours at minute
kpimetricsTrig 02 Cache ALL USERS	? Disable	d Timer Event	Every 2 hours at minute
kpimetricsTrig 04 Cache CIS SYSTEM RE	SOURCES ③ Disable	Timer Event	Every hour at minute
kpimetricsTrig 05 Cache CPU MEMORY CH	ECKER ③ Disable	d Timer Event	Every 15 minutes
kpimetricsTrig 06 Cache LOG DISK	② Disable	Timer Event	Every 15 minutes
kpimetricsTrig 07 Cache LOG IO	? Disable	l Timer Event	Every 15 minutes
kpimetricsTrig 08 Cache LOG MEMORY	② Disable	Timer Event	Every 15 minutes
kpimetricsTrig 10 Cache METRICS SQL R	EQUEST ② Disable	d Timer Event	Every 30 minutes
kpimetricsTrig ll Cache METRICS SQL R	EQUEST REPROCESS 🕐 Disable	Timer Event	Every day at time
kpimetricsTrig 12 Cache SYS CACHES	? Disable	d Timer Event	Every 6 hours at minute
kpimetricsTrig 13 Cache SYS DATASOURC	ES ③ Disable	Timer Event	Every 12 hours at minut
kpimetricsTrig 14 CheckCISWorkflowSta	tusFail (? Disable	d Timer Event	Every hour at minute
kpimetricsTrig 15 CheckMetricsActivit	y ① Disabled	Timer Event	Every day at time
kpimetricsTrig 16 PurgeHistoryData	? Disable	d Timer Event	Every day at time
kpimetricsTrig 17 CheckExceedMemoryPe	rcentRequests 🕝 Disable	Timer Event	Every hour at minute
kpimetricsTrig 18 CheckLongRunningReg	uests ? Disable	l System Event	-
kpimetricsTrig 23 Cache METRICS SQL R	ESOURCE LINEAGE 🕝 Disable	d Timer Event	Every hour at minute
kpimetricsTrig 24 ValidateUpdateStatu	sTables (?) Disable	d Timer Event	Every 30 minutes
pimetricsTrig 25 ExecuteMetricsSqlCo		d Timer Event	Every 15 minutes
kpimetricsTrig 26 Cache SQL Plan	? Disable	d Timer Event	Every hour at minute
kpimetricsTrig 27 ExecuteUpdateStatis	tics (?) Disable	d Timer Event	Every 15 minutes
kpimetricsTrig 28 Cache SYS CLUSTER	(?) Disable	d Timer Event	Every 30 minutes
kpimetricsTriq 29 DetectClusterBreak	② Disable	Timer Event	Every 30 minutes
kpimetricsTrig 30 DBMSScheduler	(?) Disable	l Timer Event	Every 2 hours at minute
kpimetricsTrig 31 DBMSSchedulerError	② Disable	Timer Event	Every 2 hours at minute
kpimetricsTrig 33 DeleteCollection	(?) Disable	d Timer Event	Every 30 minutes
kpimetricsTrig 34 DBMSRebuildIndexes	② Disable	d Timer Event	Every week at day/time
kpimetricsTrig 35 DBMSDeleteCheck	(?) Disable	d Timer Event	Every hour at minute
kpimetricsTrig 36 DBMSInsertCheck	② Disable	Timer Event	Every hour at minute
kpimetricsTrig 40 Cache METADATA TABL	ES ② Disable	d Timer Event	Every day at time
pimetricsTrig 50 MetricsPersistenceF			
kpimetricsTrig 51 MetricsTruncateFail			
pimetricsTrig 52 MetricsBackupFailur			
kpimetricsTriq 53 MetricsRestoreFailu			
pimetricsTrig 54 MetricsKpiPersisten			
kpimetricsTriq 55 MetricsKpiPersisten			
pimetricsTrig 56 MetricsKpiTruncation		2	
pimetricsTrig 57 MetricsKpiTruncation			
kpimetricsTrig 58 MetricsKpiBackupSta	<u> </u>		
kpimetricsTriq 59 MetricsKpiBackupEnd	(?) Disable		
kpimetricsTriq 60 MetricsKpiRestoreSt		4	
kpimetricsTrig 61 MetricsKpiRestoreEn		-	

2. Turn ON KPImetrics triggers

- a. Execute this procedure /shared/ASAssets/KPImetrics/Configuration/updateTriggers
 - i. Enable=1
 - ii. includeList=null
 - iii. excludeList=null
- b. Refresh Studio
- c. Review the triggers status on the Manager tab / Triggers:

Resource	Status	Type	Frequency
kpimetricsTrig 01 Cache ALL RESOURCES	Ready	Timer Event	Every 2 hours at minute
kpimetricsTrig 02 Cache ALL USERS	2 Ready	Timer Event	Every 2 hours at minute
kpimetricsTrig 04 Cache CIS SYSTEM RESOURCES	Ready	Timer Event	Every hour at minute
kpimetriceTrig 05 Cache CPU MEMORY CHECKER	Ready	Timer Event	Every 15 minutes
kpimetricsTrig 06 Cache LOG DISK	Ready	Timer Event	Every 15 minutes
kpimetricsTrig 07 Cache LOG IO	Ready	Timer Event	Every 15 minutes
kpimetricsTrig 08 Cache LOS MEMORY	@ Ready	Timer Event	Every 15 minutes
kpimetricsTrig 10 Cache METRICS SQL REQUEST	(f) Disabled	Timer Event	Every 30 minutes
kpimetricsTrig 11 Cache METRICS SQL REQUEST REPROCESS	(Disabled	Timer Event	Every day at time
kpimetricsTrig 12 Cache SYS CACHES	@ Ready	Timer Event	Every 6 hours at minute
kpimetricsTrig 13 Cache SYS DATASOURCES	@ Ready	Timer Event	Every 12 hours at minute
kpimetricsTrig 14 CheckCISWorkflowStatusFail	@ Ready	Timer Event	Every hour at minute
kpimetricsTrig 15 CheckMetricsActivity	2 Ready	Timer Event	Every day at time
kpimetricsTrig l6 PurgeHistoryData	Ready	Timer Event	Every day at time
kpimetricsTrig 17 CheckExceedMemoryPercentRequests	© Ready	Timer Event	Every hour at minute
kpimetricsTrig 18 CheckLongRunningRequests	Ready	System Event	
kpimetricsTrig 23 Cache METRICS SQL RESOURCE LINEAGE	② Disabled	Timer Event	Every hour at minute
kpimetricsTrig 24 ValidateUpdateStatusTables	Ready	Timer Event	Every 30 minutes
kpimetricsTrig 25 ExecuteMetricsSqlControl	Ready	Timer Event	Every 15 minutes
kpimetricsTrig 26 Cache SQL Plan	① Disabled	Timer Event	Every hour at minute
kpimetricsTrig 27 ExecuteUpdateStatistics	2 Ready	Timer Event	Every 15 minutes
kpimetricsTrig 28 Cache SYS CLUSTER	Ready	Timer Event	Every 30 minutes
kpimetricsTrig 29 DetectClusterBreak	© Ready	Timer Event	Every 30 minutes
kpimetricsTrig 30 DBMSScheduler	Ready	Timer Event	Every 2 hours at minute
kpimetricsTrig 31 DBMSSchedulerError	Ready	Timer Event	Every 2 hours at minute
kpimetricsTrig 33 DeleteCollection	② Disabled	Timer Event	Every 30 minutes
kpimetricsTrig 34 DBMSRebuildIndexes	@ Ready	Timer Event	Every week at day/time
kpimetricsTrig 35 DBMSDeleteCheck	(Disabled	Timer Event	Every hour at minute
kpimetricsTrig 3% DBMSInsertCheck	(2) Disabled	Timer Event	Every hour at minute
kpimetricsTrig 40 Cache METADATA TABLES	(2) Disabled	Timer Event	Every day at time
kpimetricsTrig 50 MetricsPersistenceFailure	Ready	System Event	
kpimetricsTrig 51 MetricsTruncateFailure	@ Ready	System Event	
kpimetricsTrig 52 MetricsBackupFailure	Ready	System Event	
kpimetricsTrig 53 MetricsRestoreFailure	Ready	System Event	
kpimetricsTrig 54 MetricsEpiPersistentStart	① Disabled	System Event	
kpimetricsTrig 55 MetricsKpiPersistentEnd	(? Disabled	System Event	
kpimetricsTrig 56 MetricsEpiTruncationStart	(B) Disabled	System Event	
kpimetricsTrig 57 MetricsEpiTruncationEnd	() Disabled	System Event	
kpimetricsTrig 58 MetricsKpiBackupStart	(f) Disabled	System Event	
kpimetricsTrig 59 MetricsEpiBackupEnd	(Disabled	System Event	
kpimetricsTrig 60 MetricsRpiRestoreStart	(P Disabled	System Event	
kpimetricsTrig 61 MetricsRpiRestoreEnd	(Disabled	System Event	

3. Turn ON KPImetrics triggers [TRICK]

- a. Usage: In this scenario you have executed the triggers and they are up and running. Now you need to stop all the triggers for some maintenance. When the maintenance is over, you want to restart the triggers but you don't need to or want to wait for triggers 1-3 to perform their operation since the data in their tables is current given that you had a short maintenance window within the same day. The trick is to turn on all of the triggers except 1-3 which you will do manually.
- b. Execute this procedure /shared/ASAssets/KPImetrics/Configuration/updateTriggers.
 - i. The procedure will run very fast since it does not have to load the data for triggers 1-3 as you will put them in the excludeList as shown below.

- ii. Enable=1
- iii. includeList=null
- iv. excludeList=1,2,3
- c. In Studio, go to the Manager (tab) → Triggers (screen)
 - i. Locate the following three triggers and highlight them



ii. Click on "Change Enabling" button



 Now all of the triggers are operational and will execute based on their next time slot.


Turn Data Virtualization (DV) metrics On/Off

This section describes how to turn DV metrics on/off.

- 1. To Stop DV metrics, you must log in as the "admin" user
 - a. Open /policy/metrics
 - b. Uncheck the "Enable" button
 - The metrics will indicate they are DISABLED



- 2. To Start DV metrics, you must log in as the "admin" user
 - a. Open /policy/metrics
 - b. Check the "Enable" button
 - c. Both Buffering Status and Truncate Status should be green.



d. If they are not, then there is a problem with the metrics configuration. Check the log entries for errors.

Modify Triggers

This section describes how to modify the triggers once they are installed.

- Open/Edit the resource /shared/ASAssets/KPImetrics/Customize/defaultTriggersToEnable
 - a. Only modify the ON/OFF settings for each trigger. Leave all other settings alone.

- i. Refer to the following sections for details on each trigger:
 - 1. Metadata System Triggers and Load Scripts
- b. The current triggers defaulted to OFF are as follows:
 - kpimetricsTrig_00_CheckMetricsActivityDebug Only turn this on if you suspect that DV metrics is not working properly and you want to debug the DV metrics every hour.
 - ii. kpimetricsTrig_10_Cache_METRICS_SQL_REQUEST This trigger is defaulted to OFF. If you wish to perform SQL parsing on the request description SQL statement to parse out the table and column resources used in the SQL then turn this trigger on. There is quite a bit of overhead associated with this trigger.
 - iii. **kpimetricsTrig_11_Cache_METRICS_SQL_REQUEST_REPROCESS** Only turn this on if you get a code update from the Open Source site and there were changes to the SQL Parser code.
 - iv. kpimetricsTrig_17_CheckExceedMemoryPercentRequests You may choose to keep this off in lower-level environments but turn it on in PROD environments.
 - v. **kpimetricsTrig_18_CheckLongRunningRequests** You may choose to keep this off in lower-level environments but turn it on in PROD environments.
 - vi. kpimetricsTrig_33_DeleteCollection This trigger is defaulted to OFF and is deprecated as of 2020Q100 release. This trigger deletes unwanted rows in the metrics_resources_usage based on applicable rows found in METRICS_JOB_FILTERS. It also deletes rows in metrics_requests where a corresponding row does not exist in metrics_resources_usage. As part of the normal KPImetrics operation, the trigger kpimetricsTrig_30_DBMSScheduler runs a procedure that will transfer metrics collection data and delete rows from the metrics_resources_usage and metrics_requests collection tables. If this trigger/procedure is operating without issues and keeping up with deletes, then it is possible to turn off the trigger: kpimetricsTrig_33_DeleteCollection.
 - vii. kpimetricsTrig_35_DBMSDeleteCheck This trigger is used to monitor when TDV metrics executes the delete statements against the collection tables. It is optional but may provide value in terms of getting an idea what is being executed by TDV metrics.
 - viii. **kpimetricsTrig_36_DBMSInsertCheck** This trigger is used to monitor when TDV metrics executes the insert statements against the collection tables. It is optional but may provide value in terms of getting an idea what is being executed by TDV metrics.
 - ix. kpimetricsTrig_40_Cache_METADATA_TABLES This trigger is defaulted to

OFF. This trigger executes the KPI Metadata strategy. It is intensive which is why it only runs once a day. It could be set to run less often if metadata does not change that often. It should never run more than once a day as it will put load on the DV server. Refer to "KPImetadata Configuration Guide v1.3.pdf" for more information about configuration and usage. Before turning this on, the following procedure must be configured:

/shared/ASAssets/KPImetrics/Customize/pqInsert METADATA Constants.

- 2. Execute this procedure /shared/ASAssets/KPImetrics/Configuration/updateTriggers
 - a. Enable=1
 - b. includeList=null
 - c. excludeList=null
- 3. Refresh Studio
- 4. Review the triggers status on the Manager tab / Triggers to ensure your trigger changes were enforced.

Perform Oracle Database Maintenance on Collection Tables

This section outlines how to perform maintenance on the Oracle collection tables in order to regain the tablespace.

- 1. Stop Data Virtualization metrics
- 2. Execute the

/shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/**P_METRICS_ALL_TABLES_exec** to process the existing rows in the collection tables

3. Execute the following commands directly against Oracle

ALTER TABLE "metrics sessions" ENABLE ROW MOVEMENT;

ALTER TABLE "metrics sessions" SHRINK SPACE CASCADE;

ALTER TABLE "metrics sessions" DEALLOCATE UNUSED KEEP 50;

ALTER TABLE "metrics_requests" ENABLE ROW MOVEMENT;

ALTER TABLE "metrics requests" SHRINK SPACE CASCADE;

ALTER TABLE "metrics requests" DEALLOCATE UNUSED KEEP 50;

ALTER TABLE "metrics resources usage" ENABLE ROW MOVEMENT;

ALTER TABLE "metrics resources usage" SHRINK SPACE CASCADE;


ALTER TABLE "metrics resources usage" DEALLOCATE UNUSED KEEP 50;

Perform SQL Server Database Maintenance on Collection Tables


This section outlines how to perform maintenance on the SQL Server collection tables in order to regain the tablespace.

 Using SQL Server Management Console, run the following script to view the tablespace sizes

- 2. Example results:
 - a. Filegroup results:

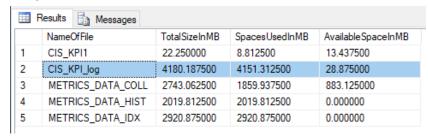


b. File system results:

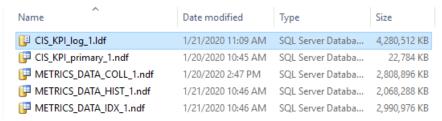


- 3. Typically, the SQL Server log is what is growing the most and must be managed. The following SQL can be run from SQL Server Management Console to shrink the log and the log file thus freeing up disk space.
 - a. Note that the log file group will be different in your environment:

```
DBCC SHRINKFILE (N'DVKPI_log', 0, TRUNCATEONLY)
GO
```

- 4. Example results after execute "DBCC shrinkfile":
 - a. Filegroup results:

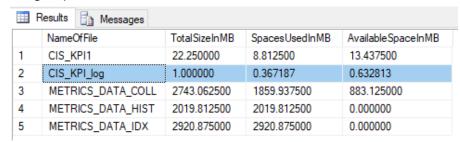

- b. File system results:
 - i. In this example, the log file shrunk from 4GB down to 1 MB after executing the DBCC shrinkfile command. This was after DV metrics were turned off and the DV server was recycled so that the connection to SQL Server was released thus allowing SQL Server to release the logs.

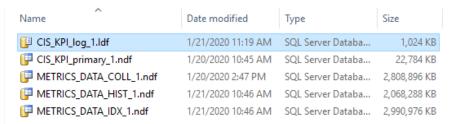

Configure Third Party Tool Access

This section outlines how to configure third party tool access for reporting tools such as Cognos, Spotfire, MicroStrategy or others.

- Download the Data Virtualization (DV) ODBC 7 Drivers and install on the client host machine
- 2. Configure an ODBC data source
 - a. DSN Name: Provide different connections to different DV instances
 - i. DV KPIMETRICS DEV
 - ii. DV KPIMETRICS UAT
 - iii. DV KPIMETRICS PROD
 - b. Host hostname of the DV target instance
 - c. Port port number of the DV target instance (e.g. 9401)
 - d. User Name the user name or service account to use
 - e. Password the password for the user name or service account
 - f. Domain the domain name such as "composite" or "ldap"
 - g. Data source the data source will be "ASAssets"
 - h. Catalog can leave this blank
 - Local/Code Page can leave this blank

Get the Current Row Distribution for the History Tables/Partitions

This section describes how to get the row distribution in partitions for the three metrics history tables, all non-history metrics tables and all metadata tables.

<u>Total Count All Tables</u> – a count but no partition distribution

/shared/ASAssets/KPImetrics/Application/metrics/metrics_all_kpimetrics_table_counts

Metrics History Tables:

/services/databases/ASAssets/KPImetrics/metrics/metrics_history_tables_row_distribution

Metrics Non-history Tables:

/services/databases/ASAssets/KPImetrics/metrics/metrics_tables_row_distribution

Metadata Tables:

/services/databases/ASAssets/KPImetrics/metadata/metadata tables row distribution

Maintenance – Adding/removing a node in the cluster

This section outlines the maintenance required when adding or removing a node in the cluster. After executing *updateTriggers(1)* to turn on triggers, it will automatically invoke the "*automatedMaintenanceDriver*" to add the additionaly tables necessary for the additional node(s).

This total number of nodes is derived from the SYS_CLUSTER table and will be used by the automated maintenance driver

[/shared/ASAssets/KPImetrics/Configuration/AutomatedTableMaintenance/automatedMaintenanceDriver] to adjust the METRICS_ALL_RESOURCES and METRICS_ALL_USERS tables required for each node. The purpose of these tables is to ensure that data is available all the time even while a node is in the process of populating the contents of a table. In the example below, TDV will round-robin the _T1 and _T2 tables between query-available and load-available. Each node in a cluster will have its own set of tables to work with so that they do not collide with each other. This allows each node to safely load data and then truncate the table. This strategy is being used because "delete" statements are inefficient and cause blocking issues especially in SQL Server.

Example:

METRICS_ALL_RESOURCES – a TDV view that is introspected from the METRICS_ALL_RESOURCES database view

METRICS_ALL_RESOURCES – a database union view pointing to all METRICS_ALL_RESOURCES_Nnn views

METRICS ALL USERS - a TDV view that is introspected from the METRICS ALL USERS database view

METRICS_ALL_USERS – a database union view pointing to all METRICS_ALL_USERS_Nnn views Node 1 = N01

METRICS_ALL_RESOURCES_N01 – a database view pointing to query table

METRICS_ALL_RESOURCES_N01_T1 – available for queries

METRICS_ALL_RESOURCES_N01_T2 – available to be loaded

METRICS_ALL_USERS_N01 – a database view pointing to query table

METRICS_ALL_USERS_N01_T1 – available for queries

METRICS_ALL_USERS_N01_T2 – available to be loaded

Node 2 = N02

METRICS_ALL_RESOURCES_N02 – a database view pointing to query table

METRICS_ALL_RESOURCES_N02_T1 – available for queries

METRICS_ALL_RESOURCES_N02_T2 – available to be loaded

METRICS_ALL_USERS_N02 – a database view pointing to query table

METRICS_ALL_USERS_N02_T1 – available for queries

METRICS_ALL_USERS_N02_T2 – available to be loaded

Data Validation

This section describes the use of the data validation procedure.


The data validate procedure is found at this location: /shared/ASAssets/KPImetrics/Configuration/DataValidation/DataValidationScript

This procdure can be executed to verify that the data is not violating the primary key and that there are no null nodehost/nodeport values in the tables.

FAQ

This section provides an FAQ.

- Q1: Does TDV metrics use memory or temp files to store the metrics before writing it out to the database?
- A1: It uses a memory buffer. The amount of memory varies based on the Policy Metrics settings.
- **Q2**: When using SQL Server for the database, is it advantageous to configure BCP for better performance inserting into collection tables?
- **A2**: All information is kept in memory and a JDBC prepared statement is used to insert into the database in batches.
- **Q3**: Is there a correlation between the administration configuration parameter "Maximum Requests Tracked" and the policy metrics setting "Request Count Threshold"?

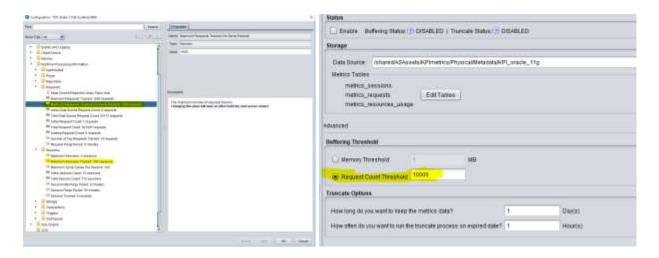

Admin Config: Maximum Requests Tracked – 1000 requests

Admin Config: Maximum Sessions Tracked – 100 sessions

Policy Metrics: Request Count Threshold - 10000

A3: No there is not a correlation between them. Metrics will keep the information in memory until the threshold is reached and write them to the database.

Q4: Will I lose transactions and sessions because metrics is set to 10,000 and Max Request Tracked is set to 1000? Any correlation?

A4: No. There will not be any loss of information. All requests are kept in memory until the threshold is reached. The only correlation between them if smaller Max Request Tracked, then it will take longer to fill the metrics buffer to reach Metrics request threshold.

Q5: What can be expected in terms of memory usage if Policy metrics Request Count Threshold is set to 10000?

A5: It's really based on how big the size of session, request and resource events are. The real memory usage may differ. One option is to use memory threshold.

10 KPImetrics Resources

Configuration Resources

This section outlines the resources that are used for configuration of KPImetrics.

KPI Version Overview

Location: /shared/ASAssets/KPImetrics

This section lists the version and "How to Install" procedures.

Configuration Name	Description
getKPIVersion	Returns the version of KPI in the format: YYYY.Q[1-4] e.g. 2017.4 If a patch is release within the Quarter then it would be 2017.401
README	Provides a brief description of the published views.
RELEASE_NOTES	Provides a description of what changes per release.

Configuration Customize Folder Overview

Location: /shared/ASAssets/KPImetrics/Customize

This section lists all of the configuration customization resources that the user will configure.

Configuration Name	Description	
commonValues	Script to store default purge time values and data source information.	
defaultTriggersToEnable	This view contains a series of UNION statements for each trigger that exists in the KPImetrics. It provides information on the following: triggerName, triggerNumber, recommendation, executeImmediate, isCache and cacheTableName. Example row: 'kpimetricsTrig_01_Cache_ALL_RESOURCES' triggerName, 1 triggerNumber, 'ON' recommendation, 1 executeImmediate, 0 isCache, " cacheTableName	
pqInsert_METRICS_EVENT_REGISTRATION	does not update it. It simply bypasses it. This means that you can run this procedure as many times as you want and not impact existing rows. It does not delete or unsubscribe requester events. To delete a subscription, invoke pMetricsEventRegistrationUnsubscribe(). A subscription in the METRICS_EVENT_REGISTRATION table consists of a unique record for the combination of SUBSCRIBER_EMAIL, GROUP_NAME,	
	ENVIRONMENT_TYPE, EVENT_TYPE and REQUESTER_EMAIL. This is the metrics event subscription table: METRICS_EVENT_REGISTRATION SUBSCRIBER_EMAIL PK userid email or a group email alias. Who the email alert will be sent to.	

	GROUP_NAME PK Group name subscribing to. When an alert occurs for a user the groups will be checked and cross-referenced with this registered group. The group [all] is a composite group and a catch-all for any user belonging to this composite group.
	ENVIRONMENT_TYPE PK Register for all environments [ALL] or a certain environment type [DEV1, CIT1, SIT1, UAT, TT, PROD]
	EVENT_TYPE PK [LONG_RUNNING EXCEEDED_MEMORY INACTIVITY WORKFLOW_FAILURE DBMS_SCHEDULER_ERROR PURGE_HISTORY]
	REQUESTER_EMAIL PK Primary requester email.
	REQUESTER_FIRST_NAME Primary requester first name.
	REQUESTER_LAST_NAME Primary requester last name.
	EXCLUDE_TEXT Pipe separated list of text phrases that would appear in the SYS_REQUESTS SQL description field and signify exclusion of this event if the text is found in the SQL description.
pqInsert_METRICS_JOB_tables	This procedure is used for either initial load or maintenance. It deletes all of the rows and then inserts them new. For maintenance, simply make a change to the script and re-execute in each environment. Perform the load/maintenance on the following tables: METRICS_JOB_ENVIRONMENTS, METRICS_JOB_FILTERS
pqInsert_METADATA_Constants	This procedure gets invoked by /Physical/Metadata/System/ClusterSafeCache/Cache_METADATA_TABLES on a regular schedule so that this data stays in sync with the other metadata.

Configuration Folder Overview

Location: /shared/ASAssets/KPImetrics/Configuration

This section lists all of the configuration procedures that have been defined for the KPImetrics module. These scripts provide functionality for setup/configuration of the KPImetrics module.

Configuration Name	Description
getQueryResponseTime	This procedure executes the passed in query and calculates the average time taken to retrieve the first row of data.
pMetricsEventRegistrationList	This procedure is used to "LIST" to a metrics event registration. A subscription in the METRICS_EVENT_REGISTRATION table that consists of a unique record for the combination of SUBSCRIBER_EMAIL, GROUP_NAME, ENVIRONMENT_TYPE, EVENT_TYPE and REQUESTER_EMAIL.
pMetricsEventRegistrationSubscribe	This procedure is used to "SUBSCRIBE" to a metrics event registration. A subscription in the METRICS_EVENT_REGISTRATION table consists of a unique record for the combination of SUBSCRIBER_EMAIL, GROUP_NAME, ENVIRONMENT_TYPE, EVENT_TYPE and REQUESTER_EMAIL. The column EVENT_TYPE is one of: [LONG_RUNNING EXCEEDED_MEMORY INACTIVITY WORKFLOW_FAILURE DBMS_SCHEDULER_ERROR]
pMetricsEventRegistrationUnsubscribe	This procedure is used to "UNSUBSCRIBE" to a metrics event registration. A subscription in the METRICS_EVENT_REGISTRATION table that consists of a unique record for the combination of SUBSCRIBER_EMAIL,

	GROUP_NAME, ENVIRONMENT_TYPE, EVENT_TYPE and REQUESTER_EMAIL.
rebindPhysicalAbstraction	The 1st step of this procedure is used to rebind all of the resources (Views) in /shared/ASAssets/KPImetrics/Physical/Physical/Abstraction to the KPI_ <database_type> folder as configured in commonValues. All views above the /Abstraction layer will be redirected to use the correct data source. This is a one-time configuration done during setup. The 2nd step is used to optimize various views and procedures as defined by commonValues.viewOptimizationPathList.</database_type>
	Some examples of optimization:
	<u>SQL SERVER</u> :
	ex 1. {OPTION IGNORE_TRAILING_SPACES="TRUE", CASE_SENSITIVE="FALSE"}
	ex 2. CAST(DATEDIFF('DAY', requestdate, CURRENT_DATE)/31.00 AS DECIMAL(19,2)) requestdatemonths, CAST(DATEDIFF('DAY', requestdate, CURRENT_DATE) AS DECIMAL(19,0)) requestdatedays,
	ex 3. FROM /shared/ASAssets/KPImetrics/AllCustomReports/ ResourceCount_DetailsRT_sqlserver
	ex 4. FROM /shared/ASAssets/KPImetrics/AllCustomReports/ ResourceCount_TotalRT_sqlserver
	<u>ORACLE</u> :
	ex 1. {OPTION IGNORE_TRAILING_SPACES="FALSE", CASE_SENSITIVE="TRUE"}
	ex 2. CAST(ROUND(MONTHS_BETWEEN(CURRENT_DATE, requestdate),2) AS DECIMAL(19,2)) requestdatemonths, CAST(DAYS_BETWEEN(CURRENT_DATE, requestdate) AS DECIMAL(19,0)) requestdatedays,
	ex 3. FROM/shared/ASAssets/KPImetrics/AllCustomReports/ ResourceCount_DetailsRT_oracle
	ex 4. FROM /shared/ASAssets/KPImetrics/AllCustomReports/ ResourceCount_TotalRT_oracle
rebindPhysicalDatabaseType	Rebind the folder /shared/ASAssets/KPImetrics/Physical/Physical/KPI_ <database_type> [KPI_oracle, KPI_sqlserver]. Rebind from whatever the current folder is currently pointing to and modify to the new catalog/schema path for tables and procedures. This is required when the catalog and/or the schema name are changed from the original setting. This may be required on the initial setup in the development environment. This may be required if upper environments have a different catalog or schema from the DEV environment although this is not recommended. This procedure is used when the schema and catalog for Oracle is not 'DVKPI' or SQLServer is not 'DVKPI/dbo'. Configure the following /shared/ASAssets/KPImetrics/Customize/commonValues.dataSourceName PRIOR to running this procedure.</database_type>
updateImpactedResources	Provides a way to iterate through /shared/ASAssets/KPImetrics and attempt to fix any impacted resources due to an anomaly in the DV repository.

4	
updateTriggers	This procedure is used to enable and disable the triggers based on the stored in
	/Customize/defaultTriggersToEnable(). When enabling the triggers, it will place
	a record in METRICS_SQL_CONTROL for Cach_ALL_RESOURCES and
	Cache ALL USERS for each node of the cluster which inidicates that those 2
	procedures need to be executed prior to the dependents requiring the data. The
	following processes will look at METRICS SQL CONTROL to determine if
	the procedures need executing:
	and procedures most encountry.
	pExecuteMetricsSqlControl – will execute both and is triggered by
	kpimetricsTrig 25 ExecuteMetricsSqlControl.
	Cache_ALL_RESOURCES gets executed by dependents:
	Cache ALL RESOURCES
	Cache_METRICS_SQL_REQUEST_EXEC
	Cache_METRICS_SQL_REQUEST_EXEC_ADHOC
	Cache_METRICS_SQL_REQUEST_EXEC_REPROCESS
	Cache_METRICS_SQL_RESOURCE_LINEAGE
	pMETRICS_ALL_TABLES_exec
	Cache_ALL_USERS gets executed by dependents:
	Cache_ALL_USERS
	pMETRICS_ALL_TABLES_exec

KPImetrics_installation Folder Overview

Location: /shared/ASAssets/KPImetrics_installation/Maintenance

Configuration Name	Description	
pMaintenanceDeleteHostnamePort	This procedure is used to delete records in all tables where nodehost and nodeport are provided as input.	
	WARNING: Use this procedure with caution.	
pMaintenanceUpdateHostnamePort	This procedure is used to convert the values for NODE_HOST/nodehost and NODE_PORT/nodeport from one value to another. It is "highly" unlikely that this procedure would ever be used but it is provided nonetheless for unforeseen circumstances. For each view found in /shared/ASAssets/KPImetrics/Physical/Physical/Abstraction perform the updated operation if they contain both NODE_HOST/nodehost and NODE_PORT/nodeport. This is a dynamic procedure so it will pick up whatever is in that path.	
	Note: If you (1) migrate from one host to another host or (2) migrate from one DV instance to another DV instance on the same host, you should not modify the data. The nodehost and nodeport along with requestid are needed to insure a unique row. When moving to a new DV instance, the requestid may be repeated.	

Published Resources

This section outlines the resources that are published under the ASAssets virtual database to expose metrics data. Resources are organized under catalogs and schemas based upon their functionality.

Please review the document "*KPImetrics Data Dictionary vX.Y.pdf*" for details about published tables, procedures and columns.

KPImetricsAdmin Definitions

This section outlines the resources that are published under the ASAssets virtual database to expose administration functions.

configurations.updateTriggers Procedure

Provides the ability to turn on/off triggers programmatically.

Column Name	Column Type	Definition
enable	SMALLINT	IN
includeList	VARCHAR(255)	IN
excludeList	VARCHAR(255)	IN
operation	VARCHAR(255)	OUT
prevStatus	VARCHAR(10)	OUT
currStatus	VARCHAR(10)	OUT
triggerNumber	INTEGER	OUT
triggerAction	VARCHAR(3)	OUT
excuteImmediate	INTEGER	OUT
rowsInserted	BIGINT	OUT
duration	VARCHAR(25)	OUT
triggerName	VARCHAR(255)	OUT
triggerPath	VARCHAR(1024)	OUT
message	VARCHAR(1200)	The exception message if a request was not successful.

Data Sources

This section outlines the data sources created, populated and used by KPImetrics project.

Metadata Data Source for CPUAndMemChecker

Location: /shared/ASAssets/KPImetrics/Physical/Metadata/CPUAndMemChecker

CPUAndMemChecker custom java procedure is used to capture system level CPU and Memory usage at the operating system level. On a linux server installation, CPUAndMemChecker invokes two shell scripts (KPImetricsTopCommandGrepCpu_linux7.sh and KPImetricsFreeMemCommand_linux7.sh) to execute 'top' and 'free' commands to returns CPU percentage, used memory and available memory. Windows installations use a couple of powershell scripts (KPImetricsCpuUtilization.ps1 and KPImetricsMemUtilization.ps1) to perform the same capability.

The CPUAndMemChecker procedure is invoked by Cache_CIS_SYSTEM_RESOURCES script and inserts the results in METRICS_CIS_SYSTEM_RESOURCES table of the KPImetrics data source.

The CPUAndMemChecker procedure exposes one procedure that has following parameters:

Parameter Name	Direction	Description
debug	IN	Y=debug values written to cs_server.log. N=no debug.
cpuUsedPercent	OUT	Average CPU utilization percentage reported by the server's operating system
memoryUsedMb	OUT	Used memory in Megabytes reported by the server's operating system
memoryAvailMb	OUT	Available memory in Megabytes reported by the server's operating system

Metadata Data Source Tables and Procedures

Location: /shared/ASAssets/KPImetrics/Physical/Metadata/KPI <database type> <version>

The KPImetrics module provides data source for all currently supported storage database platforms under /shared/ASAssets/KPImetrics/Physical/Metadata.

Currently the KPImetrics module includes the following KPImetrics data sources


- /shared/ASAssets/KPImetrics/Physical/Metadata/KPI oracle <version>
- /shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_<version>

During deployment, the KPImetrics module must be configured to use the data source appropriate for the target KPImetrics database platform. The following instructions refer to this data source at the KPImetrics data source for simplicity


The KPImetrics data source is used to capture

- Historical server metrics captured using incremental caching
- Some pre-processed data for final reporting

KPImetrics "Metrics" Table Relationship Diagram

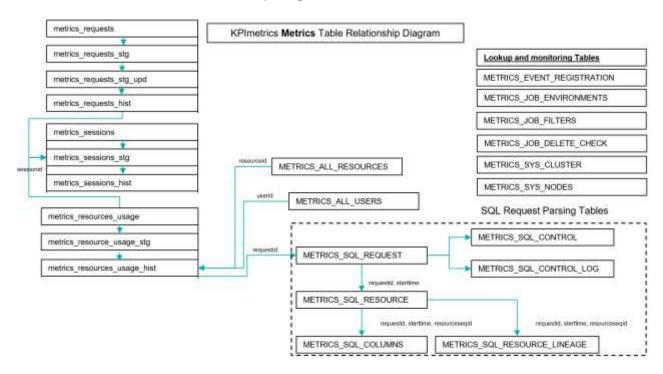


KPImetrics "Metrics" Supporting Table Relationship Diagram

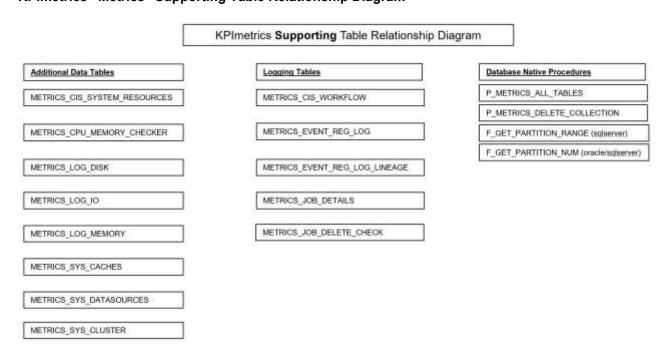

KPI Metrics "Metrics" Tables Partitioning Strategy (w/leap year)

Leap year:


When it is leap year, the P60 partition is used and will contain data for Feb 29. To remain consistent with non-leap years, the partitions numbers remain constant. This allows the query analyst to perform a query consistently. Additionally, if the metadata is archived after 1 year, the partition number will also be consistent.

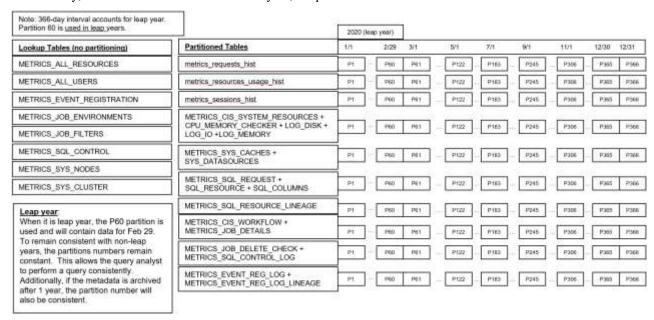

KPI Metrics "Metrics" Tables Partitioning Strategy (w/no leap year)

No Leap year:

When it is not leap year, the P60 partition is not used. To remain consistent with leap years, the partitions numbers remain constant. This allows the query analyst to perform a query consistently. Additionally, if the metadata is archived after 1 year, the partition number will also be consistent.

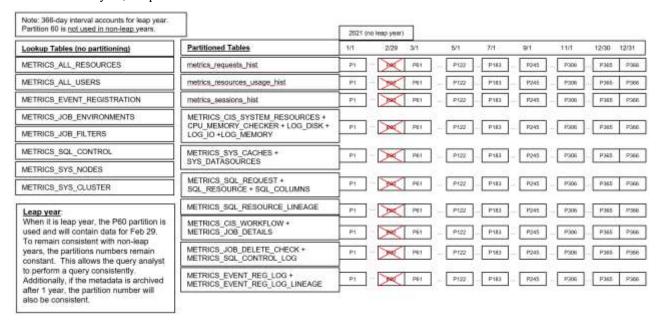


KPImetrics Metadata Table Relationship Diagram Database Native Procedures/Functions METADATA CONST NAME METADATA POLICY F GET PARTITION RANGE (solserver) METADATA CONST PATHS F_GET_PARTITION_NUM (oracle/sqiserver) METADATA_POLICY_ASSIGNMINT METADATA_CONST_LAYERS METRICS_ALL_RESOURCES METADATA_CONST_VALIDATE METADATA RESOURCE COLUMN METADATA_RESOURCE METADATA_NON_COMPLIANT METADATA PRIVILEGE METADATA_PRIVILEGE_USER METADATA DATASOURCE METADATA_RESOURCE_LINEAGE METADATA_ALL_USERS_GROUPS METADATA_ALL_PRIVILEGES METADATA_PRIVILEGE_COMBINED

KPImetrics "Metadata" Table Relationship Diagram

KPI Metrics "Metadata" Tables Partitioning Strategy (w/leap year)

Leap year:


When it is leap year, the P60 partition is used and will contain data for Feb 29. To remain consistent with non-leap years, the partitions numbers remain constant. This allows the query analyst to perform a query consistently. Additionally, if the metadata is archived after 1 year, the partition number will also be consistent.

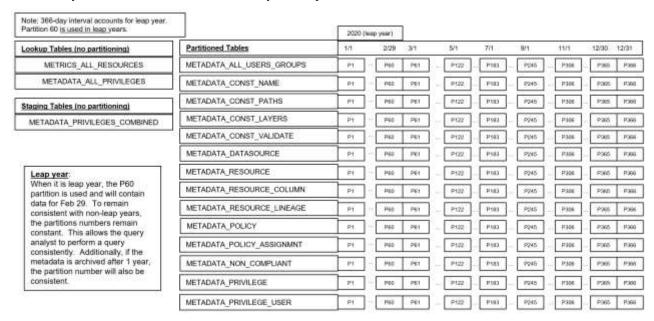

KPI Metrics "Metadata" Tables Partitioning Strategy (w/no leap year)

No Leap year:

When it is not leap year, the P60 partition is not used. To remain consistent with leap years, the partitions numbers remain constant. This allows the query analyst to perform a query consistently. Additionally, if the metadata is archived after 1 year, the partition number will also be consistent.

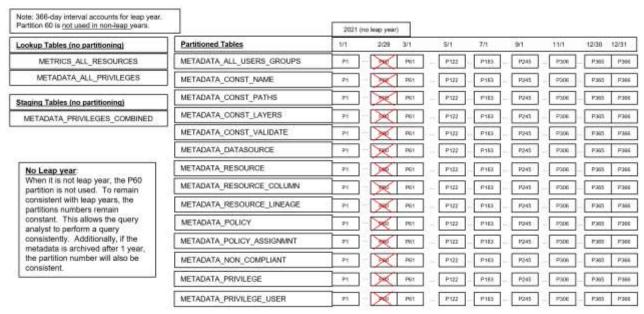

KPI Metrics and Metadata Database Partitioning Strategy

<u>Database Partitioning Strategy</u>:

The database partitioning strategy is conceptually the same for Oracle and SQL Server however, the implementation is different.

For SQL Server, the partitioning is defined up front for 366 "buckets" or days. Based on the day of the year, the correct partition is used for inserting data or purging data. Think of this as a rolling window of time based on what is configured in the commonValues.purgeMetadata. The SQL Server syntax looks like this:

CREATE PARTITION FUNCTION "kpi_pf_DayOfTheYear" (SMALLINT) AS RANGE LEFT FOR VALUES (1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, 101, 102, 103, 104, 105, 106, 107, 108, 109, 110, 111, 112, 113, 114, 115, 116, 117, 118, 119, 120, 121, 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132, 133, 134, 135, 136, 137, 138, 139, 140, 141, 142, 143, 144, 145, 146, 147, 148, 149, 150, 151, 152, 153, 154, 155, 156, 157, 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 172, 173, 174, 175, 176, 177, 178, 179, 180, 181, 182, 183, 184, 185, 186, 187, 188, 189, 190, 191, 192, 193, 194, 195, 196, 197, 198, 199, 200, 201, 202, 203, 204, 205, 206, 207, 208, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 223, 224, 225, 226, 227, 228, 229, 230, 231, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247, 248, 249, 250, 251, 252, 253, 254, 255, 256, 257, 258, 259, 260, 261, 262, 263, 264, 265, 266, 267, 268, 269, 270, 271, 272, 273, 274, 275, 276, 277, 278, 279, 280, 281, 282, 283, 284, 285, 286, 287, 288, 289, 290, 291, 292, 293, 294, 295, 296, 297, 298, 299, 300, 301, 302, 303, 304, 305, 306, 307, 308, 309, 310, 311, 312, 313, 314, 315, 316, 317, 318, 319, 320, 321, 322, 323, 324, 325, 326, 327, 328, 329, 330, 331, 332, 333, 334, 335, 314, 315, 316, 317, 318, 319, 320, 321, 322, 323, 324, 325, 326, 327, 328, 329, 330, 331, 332, 333, 334, 335,

336, 337, 338, 339, 340, 341, 342, 343, 344, 345, 346, 347, 348, 349, 350, 351, 352, 353, 354, 355, 356, 357, 358, 359, 360, 361, 362, 363, 364, 365, 366)

If a history file group has been created then use:

CREATE PARTITION SCHEME "kpi_pf_DayOfTheYear" AS PARTITION "kpi_pf_DayOfTheYear" ALL TO ("'METRICS DATA HIST"')

If no history file group then use:

CREATE PARTITION SCHEME "kpi_ps_DayOfTheYear" AS PARTITION "kpi_pf_DayOfTheYear" ALL TO ([PRIMARY])

CREATE TABLE DVKPI.[tablename] (...columns...CONSTRAINT PK_[pkname] PRIMARY KEY CLUSTER (...columns...)) ON "kpi_ps_DayOfTheYear" ("PARTITION")

For Oracle, the partitions are automatically created when needed based on the timestamp field provided in the table creation syntax. The purge capability dynamically figures out which partitions to truncate and drop based on the rolling window of time configured in commonValues.purgeMetadata. Because Oracle uses Range/Interval, the partition creation is managed by Oracle. The Oracle syntax looks like this:

```
CREATE TABLE DVKPI.[tablename] (...columns...CONSTRAINT PK_[pkname] PRIMARY KEY (...columns...))
PCTFREE 10 PCTUSED 40 INITRANS 1 MAXTRANS 255
STORAGE(BUFFER_POOL DEFAULT FLASH_CACHE DEFAULT CELL_FLASH_CACHE DEFAULT)
TABLESPACE "METRICS DATA HIST"
```

PARTITION BY RANGE ("LOAD DATE") INTERVAL (NUMTODSINTERVAL(1, "DAY"))

(PARTITION "INITIAL" VALUES LESS THAN (TIMESTAMP'2021-07-01 00:00:00')

SEGMENT CREATION DEFERRED

PCTFREE 10 PCTUSED 40 INITRANS 1 MAXTRANS 255

[NOCOMPRESS|COMPRESS FOR QUERY HIGH] LOGGING

STORAGE(BUFFER_POOL DEFAULT FLASH_CACHE DEFAULT CELL_FLASH_CACHE DEFAULT)
TABLESPACE "METRICS DATA HIST"

KPI Metrics Table and Procedure Definitions

The following tables and procedures have been created in DVKPI schema to capture the required data.

Table Name	Description	
	This procedure is used by DV to execute the native database data transfer procedure which formats and moves data from the metrics collection tables to the metrics history tables on a scheduled basis.	
P_METRICS_ALL_TABLES	TRIGGER: /KPImetrics/Physical/Physical/KPI_oracle/kpimetricsTrig_30_DBMSScheduler_KPI → /KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMETRICS_ALL_TABLES_exec →	
	/Physical/Physical/Abstraction/P_METRICS_ALL_TABLES → Oracle Lineage:	

	PROCEDURES:
	/KPImetrics/Physical/Physical/KPI oracle/P METRICS ALL TABLES →
	/KPImetrics/Physical/Metadata/KPI oracle 11g/ <schema>/P METRICS ALL TABLES</schema>
	SQL Server Lineage:
	PROCEDURES:
	/KPImetrics/Physical/KPI_sqlserver/P_METRICS_ALL_TABLES →
	/KPImetrics/Physical/Metadata/KPI_sqlserver_2016/ <catalog>/<schema>/ P_METRICS_ALL_TABLES</schema></catalog>
	This procedure I sused by DV to execute native database SQL for deleting the collection table data.
	TRIGGER:
	/Physical/Physical/KPI_oracle/kpimetricsTrig_33_DeleteCollection →
	/Physical/Metadata/System/ClusterSafeCache/pMETRICS_DELETE_COLLECTION_exec →
DEPRECATED:	/Physical/Physical/Abstraction/P_METRICS_DELETE_COLLECTION →
	Oracle Lineage:
P_METRICS_DELETE_COLLECTION	PROCEDURES:
	/Physical/Physical/KPI_oracle/P_METRICS_DELETE_COLLECTION →
	/Physical/Metadata/KPI_oracle_11g/ <schema>/P_METRICS_DELETE_COLLECTION</schema>
	SQL Server Lineage:
	PROCEDURES:
	/Physical/Physical/KPI_sqlserver/P_METRICS_DELETE_COLLECTION →
	/Physical/Metadata/KPI_sqlserver_2016/ <catalog>/<schema>/ P_METRICS_DELETE_COLLECTION</schema></catalog>
P_METADATA_TRUNCATE_PARTITION	This database procedure is used to truncate the partitions based on a start date and an end date. It is by cache_METADATA_TABLES via this interface /KPImetrics/Physical/Physical/Abstraction/P_METADATA_TRUNCATE_PARTITION.
	startDate = loadDate;
	endDate – A calculation based on loadDate and commonValues.purgeMetadata as described below:
	There are 366 partitions allowing 1 extra for leap year. Calcuate the total partitions - number of days to keep history for. The startDate and endDate act as a rolling window into the 366 partitions. The value for purgeMetadata comes from commonValues. purgeMetadata.
	SELECT DATEADD('day', 366-purgeMetadata, loadDate) INTO endDate from DUAL;
	CALL/Physical/Physical/Abstraction/P_METADATA_TRUNCATE_PARTITION(debug, dataSourceSchemaName, tableName, startDate, endDate, outValue, partitionList, debugOutput);
	This is a database procedure that returns the dat of the year partition number based on the timestamp input. There are 366 days in the year which accounts for leap year. Feb 29 of a leap year is always partition number 60. Mar 1 is always 61. Dec 31 is always 366. In non-leap years, partition 60 will be empty. The partition number remain costant across leap and non-leap years so that queries are preserved accurately.
F_GET_PARTITION_NUM	This procedure is accessible from as a custom function via the following procedure /shared/ASAssets/KPImetrics/Physical/Physical/Abstraction/F_GET_PARTITION_NUM
	This "function" may be used in queries to increase performance by eliminating partitions.
	How to query a metadata view and utilize the power of partitioning using partition elimination?
	The answer is to include the partition column in each query as well as case sensitivity settings. The partition number represents a day of the year and can be dynamically

	determined using the F_GET_PARTITION_NUM function. The input must be a
	timestamp. A string may be CAST as a TIMESTAMP.
	select * from /shared/ASAssets/KPImetrics/Application/metadata/vMetadataResource
	where partition >= F_GET_PARTITION_NUM(CAST('2020-04-17 00:00:00' AS TIMESTAMP))
	and partition <= F_GET_PARTITION_NUM(CAST('2020-04-19 00:00:00' AS TIMESTAMP))
	The range of partitions includes: [108,109,110]. All other partitions will be eliminated from the query thus improving performance.
	This table stores a cached representation of the DV system ALL_RESOURCES table because it is more efficient to query. It is processed using the system interface lineage: TRIGGER: /KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/ kpimetricsTrig_01_Cache_ALL_RESOURCES →
METRICS_ALL_RESOURCES	PROCEDURE:
[No Partitioning used. Lookup table.]	/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache ALL RESOURCES →
	READ:
	/KPImetrics/Physical/Metadata/System/ALL_RESOURCES →
	INSERT:
	/KPImetrics/Physical/Physical/Abstraction/METRICS_ALL_RESOURCES
	This table stores user information for all user accounts that have executed queries against the DV instance. This is an incremental cache target table. It is processed using the system interface lineage:
METRICS_ALL_USERS	TRIGGER:
	/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/ kpimetricsTrig_02_Cache_ALL_USERS →
[No Partitioning used. Lookup table.]	PROCEDURE:
	/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_ALL_USERS →
	READ:
	/KPImetrics/Physical/Metadata/System/ALL_USERS →
	<u>INSERT</u> :
	/KPImetrics/Physical/Physical/Abstraction/METRICS_ALL_USERS
	This tables stores hourly snapshots of memory, disk and I/O usage captured from SYS_MEMORY, SYS_STORAGE and SYS_IO tables. It is processed using the system interface lineage:
	TRIGGER:
METRICS_CIS_SYSTEM_RESOURCES	/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/ kpimetricsTrig_04_Cache_CIS_SYSTEM_RESOURCES→
WETRICS_CIS_STSTEM_RESOURCES	PROCEDURE:
[366-day Interval Partitioning Strategy]	/KPImetrics/Physical/Metadata/System/ClusterSafeCache/ Cache_CIS_SYSTEM_RESOURCES→
	READ:
	/KPImetrics/Physical/Physical/Abstraction/METRICS_CIS_SYSTEM_RESOURCES + /KPImetrics/Physical/Metadata/System/Helpers/p15MinutesIncrements
	INSERT: (VDImetries/Dhymical/Abstraction/METDICS CIS SYSTEM DESCRIBES
	/KPImetrics/Physical/Physical/Abstraction/METRICS_CIS_SYSTEM_RESOURCES
METRICS_CIS_WORKFLOW	The CIS_WORKFLOW table manages workflows for processing data.
	PROCEDURE:

[366-day Interval Partitioning Strategy]	/KPImetrics/Physical/Metadata/System/Helpers/pStartWorkflow
[/KPImetrics/Physical/Metadata/System/Helpers/pEndWorkflow
	INSERT:
	/KPImetrics/Physical/Physical/Abstraction/METRICS CIS_WORKFLOW
METRICS_CPU_MEMORY_CHECKER [366-day Interval Partitioning Strategy]	This table stores the results of executing the CPUAndMemChecker procedure over time. This is an incremental cache target table. It is processed using the system interface lineage: TRIGGER: /KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/ kpimetricsTrig_05_Cache_CPU_MEMORY_CHECKER→ PROCEDURE: /KPImetrics/Physical/Metadata/System/ClusterSafeCache/ Cache_CPU_MEMORY_CHECKER→ READ: /KPImetrics/Physical/Metadata/System/CPU_MEMORY_CHECKER → /KPImetrics/Physical/Metadata/CPUAndMemChecker/CpuAndMemCheckerCjp → CPU Utilization KPImetricsCpuUtilization.ps1 KPImetricsTopCommandGrepCpu_linux6.sh KPImetricsTopCommandGrepCpu_linux7.sh Memory Utilization KPImetricsMemUtilization.ps1 KPImetricsFreeMemCommand_linux6.sh KPImetricsFreeMemCommand_linux7.sh
	INSERT: /KPImetrics/Physical/Physical/Abstraction/METRICS CPU MEMORY CHECKER
	This table stores the details about the events that have occurred and the emails that have been sent out. An event is only logged if an email is sent. Events are registered in the METRICS_EVENT_REGISRATION table and include: LONG_RUNNING, EXCEEDED_MEMORY, INACTIVITY and PURGE_HISTORY. The event time, the user, actual email along with the SQL description when applicable is stored.
	TRIGGER:
	/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/
METRICS_EVENT_REG_LOG [366-day Interval Partitioning Strategy]	1. kpimetricsTrig_15_CheckMetricsActivity → Event=INACTIVITY
	2. kpimetricsTrig_16_PurgeHistoryData → Event=PURGE_HISTORY 3. kpimetricsTrig_17_CheckExceedMemoryPercentRequests → Event=EXCEEDED_MEMORY
	4. kpimetricsTrig_18_CheckLongRunningRequests →Event=LONG_RUNNING
	PROCEDURE:
	/KPImetrics/Physical/Metadata/System/ClusterSafeCache/
	1. pCheckMetricsActivity →/Helpers/pUpdateEventRegLog
	2. pPurgeData →/Helpers/pUpdateEventRegLog
	3. pCheckExceededMemoryPercentRequests →/Helpers/pUpdateEventRegLog
	4. pCheckLongRunningRequests →/Helpers/pUpdateEventRegLog
	READ: /shared/ASAssets/KPImetrics/Physical/Metadata/System/
	1. METRICS_JOB_DETAILS
	2. N/A
	3. /KPImetrics/Business/Business/requests/vExceededMemoryPercentRequests

	4. /KPImetrics/Business/Business/requests/vLongRunningRequests	
	INSERT:	
	/KPImetrics/Physical/Physical/Abstraction/METRICS_EVENT_REG_LOG and METRICS_EVENT_REG_LOG_LINEAGE	
METRICS_EVENT_REG_LOG_LINEAGE [366-day Interval Partitioning Strategy]	This table is a child table to METRICS_EVENT_REG_LOG and is used to store the data source lineage for the SQL request that was logged as a result of either LONG_RUNNING or EXCEEDED_MEMORY. The other events do not produce a SQL description so are not applicable. A SQL description is parsed using the same procedures that produce the METRICS_SQL_REQUEST data and store one or more rows associated with the requests data source and connection information. The reporting on this can look for events and quickly determine which data source is being accessed which can assist the viewer on how to take action with the data owners if necessary.	
METRICS_EVENT_REGISTRATION [No Partitioning used. Lookup table.]	This table is used to register a metrics event registration. A subscription in the METRICS_EVENT_REGISTRATION table consists of a unique record for the combination of SUBSCRIBER_EMAIL, GROUP_NAME, ENVIRONMENT_TYPE, EVENT_TYPE and REQUESTER_EMAIL. The EVENT_TYPE can be one of [LONG_RUNNING EXCEEDED_MEMORY INACTIVITY WORKFLOW_FAILURE DBMS_SCHEDULER_ERROR].	
METRICS_JOB_DETAILS	This table is used to hold the data transfer job details when rows are moved from the metrics collection tables to the history tables. The native database procedure "P_METRICS_ALL_TABLES" performs the following data transfer capabilities:	
[366-day Interval Partitioning Strategy]	metrics_sessions → metrics_sessions_hist	
	metrics_resources_usage → metrics_resources_usage_hist	
	metrics_requests → metrics_requests_hist	
METRICS_JOB_DELETE_CHECK [366-day Interval Partitioning Strategy]	This table provides information about TDV metrics delete statement activity when trigger "kpimetricsTrig_35_DBMSDeleteCheck" or "kpimetricsTrig_36_DBMSInsertCheck" are turned on. It will reveal when the delete/insert statement was executed for each node and how many rows were deleted/inserted from the collection tables.	
METRICS_JOB_ENVIRONMENTS [No Partitioning used. Lookup table.]	This table provides a list of valid environments. In essence, the ENV_TYPE is like the short nickname for a host. For example, DEV1 is the short-name the development server. This is used by various email notification procedures.	
METRICS_JOB_FILTERS [No Partitioning used. Lookup table.]	This table is used to hold the job filters used by "P_METRICS_ALL_TABLES" whereby the metrics_resource_usage collection table filters out rows based on user, domain and resourcekind. This capability allows rows to be filtered out before they get to the history table thus reducing the overall burden. Without this feature, the database would be overwhelmed by millions of unnecessary rows as absolutely everything in DV is reported.	
METRICS_LOG_DISK [366-day Interval Partitioning Strategy]	This table stores logs of available disk space incrementally cached from the DV system table LOG_DISK. It is processed using the system interface lineage: TRIGGER: /KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/ kpimetricsTrig_06_Cache_LOG_DISK→ PROCEDURE: /KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LOG_DISK→ READ: /KPImetrics/Physical/Metadata/System/LOG_DISK INSERT: /KPImetrics/Physical/Physical/Abstraction/METRICS_LOG_DISK	
METRICS_LOG_IO	This table stores IO logs incrementally cached from the DV system table LOG_IO. It is processed using the system interface lineage:	

[366-day Interval Partitioning Strategy]	TRIGGER:
[500-day morvar randoming Strategy]	/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/
	kpimetricsTrig 07 Cache LOG IO→
	PROCEDURE:
	/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache LOG IO→
	READ:
	/KPImetrics/Physical/Metadata/System/LOG IO
	INSERT:
	/KPImetrics/Physical/Physical/Abstraction/METRICS_LOG_IO
	This table stores jvm memory logs incrementally cached from the DV system table LOG_MEMORY. It is processed using the system interface lineage:
	TRIGGER:
METRICS_LOG_MEMORY	/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/ kpimetricsTrig_08_Cache_LOG_MEMORY →
	PROCEDURE:
[366-day Interval Partitioning Strategy]	/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LOG_MEMORY →
	READ:
	/KPImetrics/Physical/Metadata/System/LOG_MEMORY
	INSERT:
	/KPImetrics/Physical/Physical/Abstraction/METRICS_LOG_MEMORY
metrics_requests	
[No Partitioning used. Collection table.]	This is the DV out-of-the-box requests table. It cannot contain any indexes. Its purpose is simply to be a collector of DV metrics requests.
metrics_requests_hist	This is the KPImetrics historical requests table. It may be partitioned and contain indexes for
[366-day Interval Partitioning Strategy]	better query performance. It is updated periodically from the metrics_requests table. If partitioned by month, it allows a more efficient way to purge data by dropping a partition rather than deleting data.
metrics_requests_hist_sqlplan	
[366-day Interval Partitioning Strategy]	This is stores the SQL Explain plan for the request in metrics_requests_hist table.
metrics_requests_stg	
[No Partitioning used. Temp staging table.]	This is a KPImetrics stage tables used to perform updates and deletes on metrics_requests collection data before inserting into metrics_requests_hist.
metrics_requests_stg_upd	
No Partitioning used. Temp staging table.	This is a KPImetrics historical stage table that is used during the data transfer procedure for doing a mass update on the metrics_requests_stg table with Oracle.
metrics_resources_usage	This is the DV out of the hex recovered years table. It against a satisfactory is desired.
[No Partitioning used. Collection table.]	This is the DV out-of-the-box resources usage table. It cannot contain any indexes. Its purpose is simply to be a collector of DV metrics resources usage.
metrics_resources_usage_stg	
[No Partitioning used. Temp staging table.]	This is a KPImetrics stage tables used to perform updates on metrics_resources_usage collection data before inserting into metrics_resources_usage_hist.
metrics_resources_usage_hist	This is the KPImetrics historical resources usage table. It may be partitioned and contain
[366-day Interval Partitioning Strategy]	indexes for better query performance. It is updated periodically from the metrics_resources_usage table. If partitioned by month, it allows a more efficient way to purge data by dropping a partition rather than deleting data.

metrics_sessions		
[No Partitioning used. Collection table.]	This is the DV out-of-the-box sessions table. It cannot contain any indexes. Its purpose is simply to be a collector of DV metrics sessions.	
metrics_sessions_stg	This is a KPImetrics stage tables used to perform updates on metrics sessions collection data	
[No Partitioning used. Temp staging table.]	before inserting into metrics_sessions_hist.	
metrics_sessions_hist	This is the KPImetrics historical sessions table. It may be partitioned and contain indexes for better query performance. It is updated periodically from the metrics sessions table. If	
[366-day Interval Partitioning Strategy]	partitioned by month, it allows a more efficient way to purge data by dropping a partition rather than deleting data.	
	This table holds the parsed SQL columns for the query statement. It is processed using the system interface lineage:	
	TRIGGER:	
	/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/	
	kpimetricsTrig_10_Cache_METRICS_SQL_REQUEST and kpimetricsTrig_11_Cache_METRICS_SQL_REQUEST_REPROCESS→	
	PROCEDURE:	
METRICS_SQL_COLUMNS	/KPImetrics/Physical/Metadata/System/ClusterSafeCache/	
[366-day Interval Partitioning Strategy]	Cache_METRICS_SQL_REQUEST_EXEC → Cache_METRICS_SQL_REQUEST_GENSQL and	
	Cache_METRICS_SQL_REQUEST_EXEC_REPROCESS→ Cache_METRICS_SQL_REQUEST_GENSQL_REPROCESS	
	READ:	
	/KPImetrics/Physical/Formatting/metrics_requests_hist + /KPImetrics/Physical/Formatting/METRICS_SQL_REQUEST	
	INSERT:	
	/KPImetrics/Physical/Physical/Abstraction/METRICS_SQL_COLUMNS	
	This table holds the parsed SQL status for the query statement. It is processed using the system interface lineage:	
	TRIGGER:	
	/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/	
	kpimetricsTrig_10_Cache_METRICS_SQL_REQUEST and kpimetricsTrig_11_Cache_METRICS_SQL_REQUEST_REPROCESS→	
	PROCEDURE:	
METRICS_SQL_REQUEST	/KPImetrics/Physical/Metadata/System/ClusterSafeCache/	
[366-day Interval Partitioning Strategy]	Cache_METRICS_SQL_REQUEST_EXEC → Cache_METRICS_SQL_REQUEST_GENSQL and	
	Cache_METRICS_SQL_REQUEST_EXEC_REPROCESS→ Cache_METRICS_SQL_REQUEST_GENSQL_REPROCESS	
	READ:	
	/KPImetrics/Physical/Formatting/metrics_requests_hist + /KPImetrics/Physical/Formatting/METRICS_SQL_REQUEST	
	INSERT:	
	/KPImetrics/Physical/Physical/Abstraction/METRICS_SQL_REQUEST	
METRICS SOL CONTROL	GATEKEEPER - SEMAPHORE:	
METRICS_SQL_CONTROL	Used by Cache_METRICS_SQL_REQUEST_EXEC.	
[No Partitioning used. Temp control table.]	This section of code acts a semaphore to determine whether to process records or not. This procedure is allowed to process the records that were generated from a different node in order to more efficiently share in the workload. This is important as some nodes in a	

	cluster may generate more rows than others due to an imbalance in the load balancer due to "sticky" setting instead of a true "round-robin" setting.
	Upon entering this procedure, if there are rows in the METRICS_SQL_REQUEST table where KPI_PROCESS_TIME is null and the PROCESSED_NODE_HOST and PROCESSED_NODE_PORT matches this nodes nodehost and nodeport, then it must complete its current work before starting any new work.
	This procedure can only execute the pre-processing by one node at a time within a cluster because this procedure will work on data from other nodes if the current node has no more work to do. It is imperative that each node be allowed time to pre-insert the number of rows identified by the variable "numRowsToProcessBeforeExiting" into the METRICS_SQL_REQUEST table. For example, 500 rows would be pre-inserted with the KPI_PROCESS_TIME being set to null. The acutal processing will take place based on those rows.
	As soon as the pre-processing has completed, the control record will be removed from the METRICS_SQL_CONTROL table thus allowing another node to perform its pre-processing.
	Contains a log of the Gatekeeper code block within
METRICS_SQL_CONTROL_LOG	Cache_METRICS_SQL_REQUEST_EXEC when debugGatekeeper = '1'. During normal operation, this will be turned off so that no rows are produced.
[366-day Interval Partitioning Strategy]	It is only useful for debugging purposes to ensure that in a clustered
	environment, the nodes are taking their turn initializing their own set of rows
	when doing parallel processing on one of the node's data.
	This table holds the parsed SQL resource for the query statement. It is processed using the system interface lineage:
	TRIGGER:
	/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/ kpimetricsTrig_11_Cache_METRICS_SQL_REQUEST and kpimetricsTrig_12_Cache_METRICS_SQL_REQUEST_REPROCESS→
	PROCEDURE:
METRICS_SQL_RESOURCE	/KPImetrics/Physical/Metadata/System/ClusterSafeCache/
[366-day Interval Partitioning Strategy]	Cache_METRICS_SQL_REQUEST_EXEC → Cache_METRICS_SQL_REQUEST_GENSQL and
	Cache_METRICS_SQL_REQUEST_EXEC_REPROCESS→ Cache_METRICS_SQL_REQUEST_GENSQL_REPROCESS
	READ:
	/KPImetrics/Physical/Formatting/metrics_requests_hist + /KPImetrics/Physical/Formatting/METRICS_SQL_REQUEST
	INSERT:
	/KPImetrics/Physical/Physical/Abstraction/METRICS_SQL_RESOURCE
	This table holds the parsed SQL data source resource for each resource in the query statement. It is processed using the system interface lineage:
	TRIGGER:
METRICS_SQL_RESOURCE_LINEAGE	/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/ kpimetricsTrig_23_Cache_METRICS_SQL_RESOURCE_LINEAGE
[366-day Interval Partitioning Strategy]	PROCEDURE:
[[] [] [] [] [] [] [] [] [] [/KPImetrics/Physical/Metadata/System/ClusterSafeCache/
	Cache_METRICS_SQL_RESOURCE_LINEAGE
	READ: /KPImetrics/Physical/Physical/Abstraction/METRICS_SQL_RESOURCE + /KPImetrics/Physical/Physical/Abstraction/METRICS_SQL_RESOURCE + DIFFACE /KPImetrics/Physical/Physical/Physical/Abstraction/METRICS_SQL_RESOURCE + DIFFACE /KPImetrics/Physical/Physical/Physical/Abstraction/METRICS_SQL_RESOURCE + DIFFACE /KPImetrics/Physical/P
	/KPImetrics/Physical/Physical/Abstraction/METRICS_SQL_RESOURCE_LINEAGE

	INSERT:
	/KPImetrics/Physical/Physical/Abstraction/METRICS_SQL_RESOURCE_LINEAGE
	This table stores a list of all cached resources and their current statuses incrementally cached from the DV system table SYS_CACHES. It is processed using the system interface lineage: TRIGGER:
METRICS_SYS_CACHES	/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/ kpimetricsTrig_12_Cache_SYS_CACHES →
[366-day Interval Partitioning Strategy]	PROCEDURE:
[300-day interval Fartitioning Strategy]	/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache SYS CACHES →
	READ:
	/KPImetrics/Physical/Metadata/System/SYS_CACHES
	INSERT:
	/KPImetrics/Physical/Physical/Abstraction/METRICS_SYS_CACHES
	This table stores the contents from TDV system.SYS_CLUSTER from the perspective of each node in the cluster. There are no rows saved for single nodes.
	TRIGGER:
METRICS_SYS_CLUSTER	/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/ kpimetricsTrig_28_Cache_SYS_CLUSTER→
[single table lookup]	PROCEDURE:
[strigte table lookup]	/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_SYS_CLUSTER→
	READ:
	/KPImetrics/Physical/Metadata/System/SYS_CLUSTER
	<u>INSERT</u> :
	/KPImetrics/Physical/Physical/Abstraction/METRICS_SYS_CLUSTER
	This table stores a list of all data sources and their current statuses incrementally cached from the DV system table SYS_DATASOURCES. It is processed using the system interface lineage:
	TRIGGER:
METRICS_SYS_DATASOURCES	/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/ kpimetricsTrig_13_Cache_SYS_DATASOURCES →
[366-day Interval Partitioning Strategy]	PROCEDURE:
	/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_SYS_DATASOURCES →
	READ: (VDImenting / Dhymical / Matadata / System / SVS DATASOUD CES
	/KPImetrics/Physical/Metadata/System/SYS_DATASOURCES INSERT:
	/KPImetrics/Physical/Physical/Abstraction/METRICS_SYS_DATASOURCES
	This table stores a row for each node in the cluster or a single node for a non-cluster.
	TRIGGER:
	None. Invoked by automatedMaintenanceDriver, Cache_ALL_RESOURCES, or Cache_ALL_USERS
METRICS_SYS_NODES	PROCEDURE:
[single table lookup]	/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_SYS_NODES→
	READ:
	/KPImetrics/Physical/Metadata/System/SYS_CLUSTER
	INSERT:
	/KPImetrics/Physical/Physical/Abstraction/METRICS_SYS_NODES

KPImetrics System Triggers and Load Scripts

Location: /shared/ASAssets/KPImetrics/Physical/Metadata/System

/ClusterSafeCache /ClusterSafeTriggers

/Helpers

This section provides a quick summary of all triggers, their schedules and how they execute in a cluster.

Note: "all nodes" and cluster dedicated timekeeper...

The reference to "**all nodes**" refers to all working nodes in a cluster except if there is a dedicated timekeeper. If there is no dedicated timekeeper then one of the nodes is nominated to be a timekeeper. KPImetrics will execute on that node.

When there is a dedicated timekeeper, then KPImetrics procedures will not execute on those nodes as configured in commonValues.dedicatedTimeKeeperHostname and commonValues.dedicatedTimeKeeperPort.

For "only once per cluster", whichever node is the timekeeper nominates a single node in the cluster to perform the work.

Trigger Name	Trigger Schedule	Trigger Period	Cluster execution
kpimetricsTrig 00 CheckMetricsActivityDebug [OFF]	1:00 AM	1 hour	all nodes
kpimetricsTrig_01_Cache_ALL_RESOURCES	1:00 AM	2 hours	all nodes
kpimetricsTrig 02 Cache ALL USERS	1:00 AM	2 hours	all nodes
kpimetricsTrig_04_Cache_CIS_SYSTEM_RESOURCES	1:05 AM	1 hour	all nodes
kpimetricsTrig_05_Cache_CPU_MEMORY_CHECKER	1:00 AM	15 min	all nodes
kpimetricsTrig_06_Cache_LOG_DISK	1:00 AM	15 min	all nodes
kpimetricsTrig_07_Cache_LOG_IO	1:00 AM	15 min	all nodes
kpimetricsTrig_08_Cache_LOG_MEMORY	1:00 AM	15 min	all nodes
kpimetricsTrig_10_Cache_METRICS_SQL_REQUEST [OFF]	1:15 AM	30 min	all nodes
kpimetricsTrig_11_Cache_METRICS_SQL_REQUEST_REPROCESS [OFF]	1:00 AM	1 day	all nodes
kpimetricsTrig_12_Cache_SYS_CACHES	1:00 AM	6 hours	all nodes
kpimetricsTrig_13_Cache_SYS_DATASOURCES	6:00 AM	12 hours	all nodes
kpimetricsTrig_14_CheckCISWorkflowStatusFail	1:30 AM	1 hour	all nodes
kpimetricsTrig_15_CheckMetricsActivity	12:59:50 AM	1 day	all nodes
kpimetricsTrig_16_PurgeHistoryData	11:20 PM	1 day	only once per cluster
kpimetricsTrig_17_CheckExceedMemoryPercentRequests	1:00 AM	1 hour	all nodes
kpimetricsTrig_18_CheckLongRunningRequests	system event	RequestRunForTooLong	all nodes
kpimetricsTrig_23_Cache_METRICS_SQL_RESOURCE_LINEAGE [OFF]	1:10 AM	1 hour	all nodes
kpimetricsTrig_24_ValidateUpdateStatusTables	1:10 AM	30 min	all nodes
kpimetricsTrig_25_ExecuteMetricsSqlControl	1:05 AM	15 min	all nodes
kpimetricsTrig_26_Cache_SQL_Plan	1:00 AM	1 hour [Mon-Sun] 6:00 pm-7:00 am	all nodes
kpimetricsTrig_27_ExecuteUpdateStatistics	1:10 AM	15 min	only once per cluster

kpimetricsTrig_28_Cache_SYS_CLUSTER	1:00 AM	30 min	all nodes
kpimetricsTrig_29_DetectClusterBreak	1:05 AM	30 min	only once per cluster
kpimetricsTrig_30_DBMSScheduler	12:30 AM	2 hours	only once per cluster
kpimetricsTrig_31_DBMSSchedulerError	1:00 AM	2 hours	only once per cluster
kpimetricsTrig_33_DeleteCollection [OFF] [Deprecated]	1:05 AM	30 min	only once per cluster
kpimetricsTrig_34_DBMSRebuildIndexes	3:35 AM	1 week [Sunday]	only once per cluster
kpimetricsTrig_35_DBMSDeleteCheck [debug]	1:00 AM	1 hour	all nodes
kpimetricsTrig_36_DBMSInsertCheck [debug]	1:00 AM	1 hour	all nodes
kpimetricsTrig_40_Cache_METADATA_TABLES [OFF]	11:30 PM	1 day	all nodes
kpimetricsTrig_50_MetricsPersistenceFailure	system event	MetricsPersistentFailure	all nodes
kpimetricsTrig_51_MetricsTruncateFailure	system event	MetricsTruncationFailure	all nodes
kpimetricsTrig_52_MetricsBackupFailure	system event	MetricsBackupFailure	all nodes
kpimetricsTrig_53_MetricsRestoreFailure	system event	MetricsRestoreFailure	all nodes
kpimetricsTrig_54_MetricsKpiPersistentStart	system event	KpiPersistenStart	all nodes
kpimetricsTrig_55_MetricsKpiPersistentEnd	system event	KpiPersistentEnd	all nodes
kpimetricsTrig_56_MetricsKpiTruncationStart	system event	KpiTruncationStart	all nodes
kpimetricsTrig_57_MetricsKpiTruncationEnd	system event	KpiTruncationEnd	all nodes
kpimetricsTrig_58_MetricsKpiBackupStart	system event	KpiBackupStart	all nodes
kpimetricsTrig_59_MetricsKpiBackupEnd	system event	KpiBakupEnd	all nodes
kpimetricsTrig_60_MetricsKpiRestoreStart	system event	KpiRestoreStart	all nodes
kpimetricsTrig_61_MetricsKpiRestoreEnd	system event	KpiRestoreEnd	all nodes

This section lists all triggers and load scripts that have been defined to execute various KPImetrics procedures at regular intervals. The default execution frequencies are listed for each trigger. The load scripts have been created to load and aggregate raw data into processed KPImetrics metrics.

Recommendation: Set the following Administration → Configuration parameter

PathTypeDescriptionValue/server/config/cluster/triggerDistribution/timeKeeperWeightINTEGERWeight of time keeper0

Trigger [schedule] → Script Name → View name	Description
	DEFAULT=OFF
Schedule: [1 hour, 1:00 am] [Executes on all nodes in the cluster] kpimetricsTrig_00_CheckMetricsActivityDebug 'Y',60,06:00:00,20:00:00 → pCheckMetricsActivity → pGetEmailSubscriptions	This script is used for debugging the DV native metrics and checks for activity on an hourly basis and alerts the configured user whether there was any inactivity. This can be a useful gauge of the health of the DV system. It is configured hourly, but it may make sense to alter the timing to every 2 or more hours depending activity-levels. It is also configured to check between the hours of 6 am to 8 pm daily. It will look at the current

	timestamp and compare with MAX(starttime) for the collection tables [metrics requests,
	metrics_resources_usage] and MAX(logintime) for [metrics_sessions]. It also looks to see if the data transfer jobs have been running by looking at METRICS_JOB_DETAILS. Email integration must be configured on the DV server for this to work.
Schedule: [2hours, 1:00 am] [Executes on all nodes in the cluster] kpimetricsTrig_01_Cache_ALL_RESOURCES → Cache_ALL_RESOURCES → /System/ALL_RESOURCES → [/services/databases/system/ALL_RESOURCES, 1_hostname, 1_port] → METRICS_ALL_RESOURCES	Cache ALL_RESOURCES to make joining with other KPImetrics tables more efficient. This is not a historical view of resources. It gets a new copy each time it executes and deletes the old copy. This procedure will first check METRICS_SQL_CONTROL for any records where NODE_HOST = current nodehost and NODE_PORT = current nodeport and CONTROL_NAME like 'Cache_ALL_RESOURCES%' and delete those records before executing. The records were inserted into METRICS_SQL_CONTROL by updateTriggers. Insert into METRICS_ALL_RESOURCES select from /System/ALL_RESOURCES
Schedule: [2 hours, 1:00 am] [Executes on all nodes in the cluster] kpimetricsTrig_02_Cache_ALL_USERS → Cache_ALL_USERS → /System/ALL_USERS → [/services/databases/system/ALL_USERS, l_hostname, l_port] → METRICS_ALL_USERS	Cache ALL_USERS to make joining with other KPImetrics tables more efficient. This is not a historical view of users. It gets a new copy each time it executes and deletes the old copy. This procedure will first check METRICS_SQL_CONTROL for any records where NODE_HOST = current nodehost and NODE_PORT = current nodeport and CONTROL_NAME like 'Cache_ALL_USERS%' and delete those records before executing. The records were inserted into METRICS_SQL_CONTROL by updateTriggers. Insert into METRICS_ALL_USERS select from /System/All_USERS
Schedule: [1 hour, 1:05 am] [Executes on all nodes in the cluster] kpimetricsTrig_04_Cache_CIS_SYSTEM_RESOURCES → Cache_CIS_SYSTEM_RESOURCES → p15MinutesIncrements	Insert 15 min increment rows into METRICS_CIS_SYSTEM_RESOURCES select from METRICS_LOG_MEMORY, METRICS_LOG_IO, METRICS_LOG_DISK, METRICS_CPU_MEMORY_CHECKER.
Schedule: [15 min, 1:00 am] [Executes on all nodes in the cluster] kpimetricsTrig_05_Cache_CPU_MEMORY_CHECKER → Cache_CPU_MEMORY_CHECKER → ./Metadata/System/CPU_MEMORY_CHECKER → /KPImetrics/Physical/Metadata/ CPUAndMemChecker/CpuAndMemCheckerCjp	Cache the system CPU and memory values. Insert into METRICS_CPU_MEMORY_CHECKER select from ./Metadata/System/CPU_MEMORY_CHECKER.
Schedule: [15 min, 1:00 am] [Executes on all nodes in the cluster] kpimetricsTrig_06_Cache_LOG_DISK → Cache_LOG_DISK→	Cache DV system log disk information. Insert into METRICS_LOG_DISK select from ./Metadata/System/LOG_DISK

./Metadata/System/LOG_DISK → /services/databases/system/LOG_DISK	
Schedule: [15 min, 1:00 am] [Executes on all nodes in the cluster] kpimetricsTrig_07_Cache_LOG_IO [-> Cache_LOG_IO -> ./Metadata/System/LOG_IO -> /services/databases/system/LOG_IO	Cache DV system IO information. Insert into METRICS_LOG_IO select from ./Metadata/System/LOG_IO
Schedule: [15 min, 1:00 am] [Executes on all nodes in the cluster] kpimetricsTrig_08_Cache_LOG_MEMORY → Cache_LOG_MEMORY → ./Metadata/System/LOG_MEMORY → /services/databases/system/LOG_MEMORY	Cache DV system log memory information. Insert into METRICS_LOG_MEMORY select from ./Metadata/System/LOG_MEMORY
	DEFAULT=OFF Execute the SQL Parser to parse the SQL request (description) originating from metrics_requests_hist. Retrieve the list of tables and columns and update the METRICS_SQL_REQUEST, METRICS_SQL_RESOURCE and METRICS_SQL_COLUMNS tables.
Schedule: [30 min, 1:15 am] – Primary configuration. Schedule: [15 min, 1:15 am] – Alternative if more frequent processing is needed.	This procedure will first check METRICS_SQL_CONTROL for any records where NODE_HOST = current nodehost and NODE_PORT = current nodeport and CONTROL_NAME like 'Cache_ALL_RESOURCES%' and delete those records before executing Cache_ALL_RESOURCES. The records were inserted into METRICS_SQL_CONTROL by updateTriggers. This procedure is dependent on METRICS_ALL_RESOURCES data.
[Executes on all nodes in the cluster] kpimetricsTrig_10_Cache_METRICS_SQL_REQUEST → Cache_METRICS_SQL_REQUEST_EXEC → Cache_METRICS_SQL_REQUEST_GENSQL	The schedule is designed to run 15 min after kpimetricsTrig_30_DBMSScheduler allowing that trigger to execute pMETRICS_ALL_TABLES_exec which updates the metrics_requests_hist table. The data from metrics_requests_hist is what feeds this trigger and procedure. This procedure runs every 30 min because it often runs behind in its work due to the intensity level at which runs.
	This trigger blocks (does not run) if Cache_METRICS_SQL_RESOURCE_LINEAGE is currently executing. The two procedures running together causes DV and the database to become overwhelmed.
	This procedure is architected for multi-host processing. If there are no rows to process for the current node, it will look to see which node (if cluster) has the most rows to process and help process those rows. This code uses a semaphore to reserve rows for processing. The row

	, 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
	reservation can only be executed by one node at a time. The actual processing is done in parallel.
	NOTE: It may be necessary to set the trigger to 15 min if more frequent processing is required and it can still keep up with the number rows to process in the time period. The number of rows can be found in commonValues.numRowsToProcessBeforeExiting. Adjust the default value of 500 to whatever makes sense for each environment.
	When running in a cluster, this trigger/procedure will attempt to process another nodes SQL once it has processed all of its own. This parallel processing is important as some nodes may be slower than others and fall behind or the load balancer may be set to "sticky" instead of a true "round-robin" and the majority of requests end up on a few of the nodes in the cluster.
[No trigger – manual] Cache_METRICS_SQL_REQUEST_EXEC_ADHOC → Cache_METRICS_SQL_REQUEST_GENSQL_ADHOC	Provides a way to manually re-process successfully parsed requests. This is only necessary if a code-patch has been provided that changes the values that are inserted. Normally, this will never be executed.
	DEFAULT=OFF
	Re-process errors and execute the SQL Parser to parse the SQL request (description) originating from metrics_requests_hist. Retrieve the list of tables and columns and update the METRICS_SQL_REQUEST, METRICS_SQL_RESOURCE and METRICS_SQL_COLUMNS tables.
Schedule: [1 day, 1:00 am]	Typically, this trigger is not turned on unless deemed necessary.
[Executes on all nodes in the cluster] kpimetricsTrig_11_Cache_METRICS_SQL_REQUEST_REP ROCESS → Cache_METRICS_SQL_REQUEST_EXEC_REPROCESS → Cache_METRICS_SQL_REQUEST_GENSQL_REPROCESS (0)	This procedure will first check METRICS_SQL_CONTROL for any records where NODE_HOST = current nodehost and NODE_PORT = current nodeport and CONTROL_NAME like 'Cache_ALL_RESOURCES%' and delete those records before executing Cache_ALL_RESOURCES. The records were inserted into METRICS_SQL_CONTROL by updateTriggers. This procedure is dependent on METRICS_ALL_RESOURCES data.
	This trigger blocks (does not run) if Cache_METRICS_SQL_RESOURCE_LINEAGE is currently executing. The two procedures running together causes DV and the database to become overwhelmed.
Schedule: [6 hours, 1:00 am]	Cache the system cache status information.
[Executes on all nodes in the cluster] kpimetricsTrig_12_Cache_SYS_CACHES → Cache_SYS_CACHES →	Insert into METRICS_SYS_CACHES select from / ./Metadata/System/SYS_CACHES.

./Metadata/System/SYS_CACHES → /services/databases/system/SYS_CACHES	
Schedule: [12 hours, 6:00 am] [Executes on all nodes in the cluster] kpimetricsTrig_13_Cache_SYS_DATASOURCES [> Cache_SYS_DATASOURCES > ./Metadata/System/SYS_DATASOURCES > /services/databases/system/SYS_DATASOURCES	Cache the system data source information. Insert into METRICS_SYS_DATASOURCES select from ./Metadata/System/SYS_DATASOURCES. Decide whether you want to check /users folders or not. The recommendation is to leave the value as 'N' to not check datasources in the /users folders. IN includeUsersFolders CHAR(1), - DEFAULT: N or null. Do not include /users folders. Y=include the datasources in /users folders.
Schedule: [1 hour, 1:30 am] [Executes on all nodes in the cluster] kpimetricsTrig_14_CheckCISWorkflowStatusFail [→ pCheckCISWorkflowStatusFail → [METRICS_CIS_WORKFLOW, pGetEmailSubscriptions]	Check for WORKFLOW_STATUS=F in the METRICS_CIS_WORKFLOW table since the last check. Each time this procedure is called it puts a marker row in the table with WORKFLOW_NAME=CHECK_WORKFLOW_STA TUS Email integration must be configured on the DV server for this to work.
Schedule: [1 day, 12:59:50 am] [Executes on all nodes in the cluster] kpimetricsTrig_15_CheckMetricsActivity 'N',60,00:00:00.000,23:59:59.999 → pCheckMetricsActivity → pGetEmailSubscriptions	This script checks for activity on a daily basis just before midnight and alerts the configured user whether there was any inactivity during the day. It is configured to look for inactivity between the hours of 12 am – 12 pm in the current day. This can be a useful gauge of the health of the DV system. It will look at the current timestamp and compare with MAX(starttime) for the collection tables [metrics_requests, metrics_resources_usage] and MAX(logintime) for [metrics_sessions]. It also looks to see if the data transfer jobs have been running by looking at METRICS_JOB_DETAILS. Email integration must be configured on the DV server for this to work.
Schedule: [1 day, 11:55 pm] [Only once per cluster] kpimetricsTrig_16_PurgeHistoryData → pPurgeData	This script purges old data from METRICS and METRICS HISTORY tables by executing series of TRUNCATE statements. It executes at the very end of a day and always purges with a start date of 1 day in advance of the current date. It determines which partitions to truncate based on the commonValues variables shown below. Since a 366-day rolling window is in effect, it calculates the partitions by taking into account the number of days to retain data and the current date +1. Email integration must be configured on the DV server for this to work. It should be noted that "purgeMetadata" is not executed by this script. It is executed by Cache_METADATA_TABLES. The purge period for each trunate is defined within /Customize/commonValues script. A maximum of 366 days may be retained within these tables.

	purgeHistory 120 days = 4 months - Purge tables: metrics_requests_hist, metrics_resources_usage_hist, metrics_sessions_hist purgeWorkflowData 120 days = 4 months - Purge tables: METRICS_CIS_WORKFLOW, METRICS_JOB_DETAILS, METRICS_EVENT_REG_LOG, METRICS_EVENT_REG_LOG_LINEAGE purgeSQLRequests 120 days = 4 months - Purge tables: METRICS_SQL_COLUMNS, METRICS_SQL_RESOURCE, METRICS_SQL_RESOURCE, METRICS_SQL_RESOURCE_LINEAGE, METRICS_SQL_RESOURCE_LINEAGE, METRICS_SQL_CONTROL_LOG purgeResourceUsage 120 days = 4 months - Purge tables: METRICS_CIS_SYSTEM_RESOURCES, METRICS_CIS_SYSTEM_RESOURCES, METRICS_LOG_DISK, METRICS_LOG_IO,
	METRICS_LOG_MEMORY, METRICS_SYS_CACHES, METRICS_SYS_DATASOURCES
Schedule: [1 hour, 1:00 am] [Executes on all nodes in the cluster] kpimetricsTrig_17_CheckExceedMemoryPercentRequests → pCheckExceedMemoryPercentRequests → pGetEmailSubscriptions	This procedure queries this procedure in real-time /shared/ASAssets/KPImetrics/Business/Business/reques ts/pExceededMemoryPercentRequests to generate a list of queries exceeding memory percent per request. It generates an html table containing each of the requests and emails to the subscriber of the event [EXCEEDED_MEMORY]. Email integration must be configured on the DV server for this to work.
Schedule: [system event=requestRunForTooLong] [Executes on all nodes in the cluster] kpimetricsTrig_18_CheckLongRunningRequests → pCheckLongRunningRequests → pGetEmailSubscriptions	This procedure queries this procedure in real-time /shared/ASAssets/KPImetrics/Business/requests/ pLongRunningRequests to generate a list of long running requests. It generates an html table containing each of the requests and emails to the subscriber of the event [LONG_RUNNING]. Email integration must be configured on the DV server for this to work. The trigger is activated by the system request event: "Request Run Time". This is set in the Administration Configuration. Servert Generation Request Events Request Run Tome: 5 tributes
Schedule: [1 hour, 1:10 am] [Executes on all nodes in the cluster] kpimetricsTrig_23_Cache_METRICS_SQL_RESOURCE_LI NEAGE → Cache METRICS SQL RESOURCE LINEAGE	DEFAULT=OFF This procedure will insert the new data into METRICS_SQL_RESOURCE_LINEAGE based on the START_TIME value from the table

→ METRICS_SQL_RESOURCE and	METRICS SQL RESOURCE. The lineage is derived
METRICS_SQL_RESOURCE_LINEAGE	by either copying a similar resource from the database table or by generating the lineage using getResourceLineageDirectRecursive().
	This procedure will first check METRICS_SQL_CONTROL for any records where NODE_HOST = current nodehost and NODE_PORT = current nodeport and CONTROL_NAME like 'Cache_ALL_RESOURCES%' and delete those records before executing Cache_ALL_RESOURCES. The records were inserted into METRICS_SQL_CONTROL by updateTriggers. This procedure is dependent on METRICS_ALL_RESOURCES data.
	This procedure will block and not execute if Cache_METRICS_SQL_REQUEST_[EXEC or_ADHOC or_REPROCESS] is running. The reason is that the two procedures combined execution can overwhelm both the database and the DV node.
	This procedure is architected for multi-host processing. If there are no rows to process for the current node, it will look to see which node (if cluster) has the most rows to process and help process those rows. This code uses a semaphore to reserve rows for processing. The row reservation can only be executed by one node at a time. The actual processing is done in parallel.
	The lineage is generated for each non-null RESOURCE_PATH and RESOURCE_TYPE found in the METRICS_SQL_RESOURCE table.
	METRICS_SQL_REQUEST [parent]> [0 to many] METRICS_SQL_RESOURCE [child]> [0 to many] METRICS_SQL_RESOURCE_LINEAGE [child]
	1. A request may have 0 or more resources.
	2. A resource may have 0 or more data source resources.
	a. A single resource lineage row contains the Ancestor who uses the data source resource, the data source table/procedure/tree resource and the data source itself.
Schedule: [30 min, 1:10 am] [Executes on all nodes in the cluster] kpimetricsTrig_24_ValidateUpdateStatusTables → pValidateUpdateStatusTables	This procedure is used to validate the two status tables and update any failed "in progress" records that are no longer actively running in the TDV memory space as per system.SYS_REQUESTS table.
	This procedure works in conjunction with "pMETRICS_ALL_TABLES_exec" and "pDELETE_COLLECTION_exec" to check for active running processes.
	This procedure is used to ensure that the METRICS_CIS_WORKFLOW and

	METRICS_JOB_DETAILS do not have in progress status when there are no active processes. It is the responsibility of each node in a cluster to manage its own status records. • For METRICS_CIS_WORKFLOW where WORKFLOW_STATUS='I' and there are no active processes, update WORKFLOW_STATUS='F' and set MESSAGE='Failure for unknown reason.'. • For METRICS_JOB_DETAILS where STATUS='BEGIN JOB' and there are no active processes, update STATUS='FAILURE' and set ADDITIONAL_INFO='Failure for unknown reason.'.
Schedule: [15 min, 1:05 am] [Executes on all nodes in the cluster] kpimetricsTrig_25_ExecuteMetricsSqlControl pExecuteMetricsSqlControl	This procedure compares the current nodehost/nodeport with what is present in METRICS_SQL_CONTROL and is used to control the execution of the procedure referenced in the CONTROL_NAME field. These rows were inserted by updateTriggers according to the following rules. Both Cache_ALL_RESOURCES and Cache_ALL_USERS are required to be executed on each node of the cluster for the dependent resources to be able to use the data collected. The procedure "pExecuteMetricsSqlControl" will execute on each node of the cluster and fulfill the duty for both Cache_ALL_RESOURCES and Cache_ALL_USERS. In the event that this trigger does not get executed before one of the dependents listed below, the dependent procedure will execute what it needs to fulfill its job. Rules: Cache_ALL_RESOURCES gets executed by the dependents: Cache_ALL_RESOURCES Cache_METRICS_SQL_REQUEST_EXEC Cache_METRICS_SQL_REQUEST_EXEC_ADHOC Cache_METRICS_SQL_REQUEST_EXEC_REPROCESS Cache_METRICS_SQL_REQUEST_EXEC_REPROCESS Cache_METRICS_SQL_RESOURCE_LINEAGE pMETRICS_ALL_TABLES_exec Cache_ALL_USERS gets executed by the dependents: Cache_ALL_USERS gets executed by the dependents: Cache_ALL_USERS pMETRICS_ALL_TABLES_exec
Schedule: [1 hour, 1:00 am] [Mon-Sun] 6 pm − 7 am [Executes on all nodes in the cluster] kpimetricsTrig_26_Cache_SQL_Plan → Cache_SQL_Plan → ./Abstraction/metrics_requests_hist_sqlplan_not_processed	Cache_SQL_Plan. This procedure is will process the metrics_request_hist SQL description and generate the SQL Plan. This is also known as the "Explain Plan". This procedure will only process metrics_request_hist where status=SUCCESS and requesttype=SQL. It must

	
	convert the "external" URL to an internal resourcepath for getSqlPlan() to work.
	Monitor this closely to determine how much TDV resources [cpu/memory] are used when calculating the SQL Explain Plan. Turn the trigger off if it is too overwhelming for TDV.
	Insert into metrics_requests_hist_sqlplan select from /Abstraction/metrics_requests_hist_sqlplan_not_processed
	pExecuteUpdateStatistics:
Schedule: [15 min, 1:10 am] [Only once per cluster] kpimetricsTrig_27_ExecuteUpdateStatistics → pExecuteUpdateStatistics	This procedure is executed once per cluster and performs all of the update statistics that are present in the METRICS_SQL_CONTROL table at the time of execution. If multiple nodes in the cluster insert a row for the same table, this procedure will only execute update statistics on that table once per invocation of this procedure. By using this strategy, it will prevent blocking and unnecessary updating of statistics to make KPImetrics more efficient.
	Cache_SYS_CLUSTER:
Schedule: [30 min, 1:00 am] [Executes on all nodes of the cluster] kpimetricsTrig_28_Cache_SYS_CLUSTER → Cache_SYS_CLUSTER	This procedure will insert SYS_CLUSTER rows for each node in order to detect a cluster break. A cluster break is defined by either of the following scenarios:
	1) A cluster which contains multiple timekeepers. 2) A cluster which contains no timekeepers. [this is not a single node]
	The environment is considered a cluster if the following server attribute is defined: /server/config/cluster/displayName or /server/config/cluster/name
	No rows are inserted for single non-cluster node.
	If the node executing is a single non-cluster node, then no workflow is generated in the METRICS_CIS_WORKFLOW table.
	pDetectClusterBreak:
Schedule: [30 min, 1:05 am] [Only once per cluster] kpimetricsTrig_29_DetectClusterBreak → pDetectClusterBreak	This procedure is used to detect a cluster break by looking for a timekeeper designation on each node. If the node executing is a single non-cluster node, then no workflow is generated in the METRICS_CIS_WORKFLOW table.
	Results based the rules:
	If the server attribute('/server/config/cluster/displayName') is null then this is a single node. status=SUCCESS and isCluster=0 and numTimekeepers=0 and message='Valid single node.'
	If there are rows in the SYS_CLUSTER table then this is a cluster. if numTimekeepers=1 then status=SUCCESS

and isCluster=1 and numTimekeepers=1 and message='Valid cluster.' If there are rows in the SYS CLUSTER table then this is a cluster. if numTimekeepers>1 then status=FAIL and isCluster=1 and numTimekeepers=[count]>1 and message='Invalid cluster. A cluster break was detected. More than 1 timekeeper is configured.' If there are rows in the SYS CLUSTER table then this is a cluster. if numTimekeepers=0 then status=FAIL and isCluster=1 and numTimekeepers=0 and message='Invalid cluster. A cluster break was detected. No timekeepers are configured.' This trigger executes the pMETRICS ALL TABLES exec PLSQL procedure to transfer data from the metrics collection tables to the metrics history tables. It inserts a record into the METRICS JOB DETAILS table when it starts with a JOB TABLE NAME='DBMS SCHEDULER'. It updates the same row with a STATUS='SUCCESS' or 'FAILURE'. If 'FAILURE' then update the ADDITIONAL INFO field with the database error. This procedure will first check METRICS SQL CONTROL for any records where NODE_HOST = current nodehost and NODE_PORT = current nodeport and CONTROL NAME like 'Cache ALL RESOURCES%' and delete those records before executing Cache ALL RESOURCES. The records were inserted into METRICS SQL CONTROL by updateTriggers. This procedure is dependent on Schedule: [2 hours, 12:30 am] METRICS_ALL_RESOURCES data. [Only once per cluster] Subsequently, this procedure will check kpimetricsTrig 30 DBMSScheduler → METRICS SQL CONTROL for any records where pMETRICS ALL TABLES exec > NODE HOST = current nodehost and NODE PORT = P METRICS ALL TABLES() current nodeport and CONTROL NAME like 'Cache ALL USERS%' and delete those records before executing Cache ALL USERS. The records were inserted into METRICS SQL CONTROL by updateTriggers. This procedure is dependent on METRICS ALL USERS data. If the 30-min timeout occurs because processing could not commense an exception will be thrown and logged in the METRICS_JOB_DETAIL table. Operational insights: 1. This procedure executes in a single-threaded fashion on one node in a cluster and processes all the data for each node in the cluster sequentially. It does this in order to avoid "deadlock" contention when multiple nodes issue the same commands at the same time. 2. This procedure will not execute if P METRICS DELETE COLLECTION or pRebuildIndexes is executing. However, it will loop

	every minute and check if it can execute. It will wait up
	to 30 min to allow the other processes to complete.
	Send an email if there is a database PLSQL data transfer
Schedule: [2 hours, 1:00 am] [Only once per cluster] kpimetricsTrig_31_DBMSSchedulerError → pCheckDBMSSchedulerError → pGetEmailSubscriptions	error that gets generated. Select details from /Abstraction/METRICS_JOB_DETAILS. The timing of 2 hours on the odd hour is based on the fact that the DBMS Scheduler trigger runs every 2 hours on the even hour. Therefore, this trigger runs an hour later to allow the PLSQL data transfer script to complete and post any issues or not. Note: This trigger only runs once per cluster because it
	finds all errors for all nodes if there is a cluster.
	DEFAULT=OFF [DEPRECATED] As of the 2020Q100, this trigger is turned off to eliminate blocking which occurs from DV metrics issuing inserts/deletes at the same time as KPImetrics issuing delete statements. Goring forward, only DV metrics will manage inserts/deletes into the collection tables. This trigger executes the PLSQL procedure.
[DEPRECATED - TURNED OFF] Schedule: [30 min, 1:05 am] — Primary configuration. Schedule: [15 min, 1:05 am] — Alternative if more frequent processing is needed. [Only once per cluster] kpimetricsTrig_33_DeleteCollection → pMETRICS_DELETE_COLLECTION_exec → P_METRICS_DELETE_COLLECTION()	This trigger executes the PLSQL procedure pMETRICS_DELETE_COLLECTION_exec to delete non-essential and unwanted rows from the two collection tables: metrics_resources_usage and metrics_requests. It inserts a record into the METRICS_JOB_DETAILS table when it starts with a JOB_TABLE_NAME='DELETE_COLLECTION'. It updates the same row with a STATUS='SUCCESS' or 'FAILURE'. If 'FAILURE' then update the ADDITIONAL_INFO field with the database error. This trigger executes only once per cluster node and processes all transactions for all hosts. The procedure "pMETRICS_DELETE_COLLECTION_exec()" provides the flow control for each node by getting the eligible members of the cluster and looping through each nodehost/nodeport combination until all work is done. If the 30-min timeout occurs because processing could not commense an exception will be thrown and logged in the METRICS_JOB_DETAIL table.
	Exceptions: Emails will be sent if there are exceptions. It is recommended to have this turned on if the system is very active and producing 100K or more transactions in 1 hour or if the commonValues.queryRequestTemplate='Y' which will produce 100K or more transactions itself within 1 hour. This setting is used to keep the collection tables as small as possible of unwanted data based on METRICS_JOB_FILTERS rows. 1. metrics_resources_usage – delete from this collection table where a row matches METRICS_JOB_FILTERS based on user, domain and resourcekind. This delete gets executed first.

2. metrics_requests – delete from this collection table when a row does not exist in metrics_resources_usage collection table. This delete gets executed second.

Operational insights:

- This procedure executes in a single-threaded fashion on one node in a cluster and processes all the data for each node in the cluster sequentially. It does this in order to avoid "deadlock" contention when multiple nodes issue the same commands at the same time.
- 2. This procedure will <u>not</u> execute if P_METRICS_ALL_TABLES or pRebuildIndexes is executing. However, it will loop every minute and check if it can execute. It will wait up to 30 min to allow the other processes to complete.
- 3. If this procedure finds another record for the same nodehost and nodeport and JOB_TABLE_NAME='DELETE_COLLECTION' and STATUS='BEGIN JOB' then it determines that the record is stranded due to some unforeseen event and marks that record with a STATUS='FAILURE'. It then continues on as normal.
- 4. The timing of the kpimetricsTrig 33 DeleteCollection [DC] trigger is important. It is set to execute after the kpimetricsTrig_10_Cache_METRICS_SQL_REQUEST [MSR] trigger and before the kpimetricsTrig 30 DBMSScheduler [DBS] trigger. It is recommended that the period be the same between kpimetricsTrig 33 DeleteCollection and kpimetricsTrig_10_Cache_METRICS_SQL_REQUEST. If one gets changed from 30 to 15, then the other one should be changed also. The objective is to delete unwanted rows produced by the first trigger and delete as much as possible for DBMSScheduler runs so that it does not have to spend time querying through 100K of unwanted rows. Ultimately, DBMSSchduler to run as quickly as possible. The only way to do that is to keep the data set as small as possible. The chart below shows the time interaction between the three triggers that are responsible for the following:

[MSR] – SQL parsing with a byproduct of creating metrics request volume,

[DBS] – transferring data from collection to history and deleting collection.

[DC] – deleting collection data with the objective of keeping collection tables small and manageable.

30 min period on MSR and DC triggers:

[MSR] [DBS] [DC]

12:00 12:05 ←del collection just before

processing

12:30 12:30 12:35

	1	
	15 min period on MSR and DC triggers: [MSR] [DBS] [DC] 12:00	
Schedule: [1 week, 3:35 am] [Sunday] [Only once per cluster] kpimetricsTrig_34_DBMSRebuildIndexes → pRebuildIndexes	This trigger executes the pRebuildIndexes procedure. This procedure is used to rebuild or reorganize the indexes. It is recommended to only execute once a week such as a Sunday at 3:35 am. Indexes do not start rebuilding until all processare are inactive. For METRICS_CIS_WORKFLOW, WORKFLOW_STATUS <> 'I'. For METRICS_JOB_DETAILS, STATUS <> 'BEGIN JOB'. If the 1-hour timeout occurs an exception will be thrown and logged in the METRICS_JOB_DETAIL table. Exceptions: Emails will be sent if there are exceptions. Review the following view (table) for issues: /services/databases/ASAssets/KPImetrics/workflow/vJobDetails	
[use for debug purposes] Schedule: [1 Hour, 1:00 am] [Executes on all nodes in the cluster] kpimetricsTrig_35_DBMSDeleteCheck → pMetricsInsertDeleteCheck	This trigger executes the pMetricsInsertDeleteCheck procedure. This procedure logs the TDV metrics delete statements which are executed by DV metrics based on the schedule set in /policy/metrics. Whenever the /policy/metrics is enabled TDV uses that timestamp in the delete statement. It monitors SYS_REQUESTS for TDV metrics delete statements and inserts the information into METRICS_JOB_DELETE_CHECK. The view is published as workflow.vJobDeleteCheck and can be used to monitor when the delete statements occur and how many rows get deleted for each node. It will monitor SYS_REQUESTS.STATUS=SUCCESS, READY, FAILED	
[use for debug purposes] Schedule: [1 Hour, 1:00 am] [Executes on all nodes in the cluster] kpimetricsTrig_36_DBMSInsertCheck → pMetricsInsertDeleteCheck	This trigger executes the pMetricsInsertDeleteCheck procedure. This procedure logs the TDV metrics insert statements which are executed by DV metrics based on the schedule set in /policy/metrics. Whenever the /policy/metrics is enabled TDV uses that timestamp in the cluster the delete statement. It monitors SYS_REQUESTS for TDV metrics delete statements and inserts the information into METRICS_LOR_DELETE_CHECK.	
Schedule: [1 day, 9:30 pm] [Executes on all nodes in the cluster]	DEFAULT=OFF	

kpimetricsTrig_40_Cache_METADATA_TABLES → Cache_METADATA_TABLES	This procedure is used to cache all of the METADATA_* tables.	
	Uses the same ALL_RESOURCE data from METRICS_ALL_RESOURCES_STG which gets cached every 2 hours. The data would be current as of 9 pm. This alleviates the need to recache data that was already cached. Therefore, there is a dependency on Cache_ALL_RESOURCES completing for a given node.	
	DEFAULT=ON	
Schedule: [system event=MetricsPersistentFailure] [Executes on all nodes in the cluster] kpimetricsTrig_50_MetricsPersistenceFailure → pMetricsSystemEvent	This is activated when the system event=MetricsPersistentFailure occurs. This procedure sends an email to the commonValues.sendTo list and the subscription list. The row gets logged to the METRICS_EVENT_REG_LOG.	
	DEFAULT=ON	
Schedule: [system event=MetricsTruncationFailure] [Executes on all nodes in the cluster] kpimetricsTrig_51_MetricsTruncateFailure → pMetricsSystemEvent	This is activated when the system event=MetricsTruncationFailure occurs. This procedure sends an email to the commonValues.sendTo list and the subscription list. The row gets logged to the METRICS_EVENT_REG_LOG.	
	DEFAULT=ON	
Schedule: [system event=MetricsBackupFailure] [Executes on all nodes in the cluster] kpimetricsTrig_52_MetricsBackupFailure → pMetricsSystemEvent	This is activated when the system event=MetricsBackupFailure occurs. This procedure sends an email to the commonValues.sendTo list and the subscription list. The row gets logged to the METRICS_EVENT_REG_LOG.	
	DEFAULT=ON	
Schedule: [system event=MetricsRestoreFailure] [Executes on all nodes in the cluster] kpimetricsTrig_53_MetricsRestoreFailure → pMetricsSystemEvent	This is activated when the system event=MetricsRestoreFailure occurs. This procedure sends an email to the commonValues.sendTo list and the subscription list. The row gets logged to the METRICS_EVENT_REG_LOG.	
Sahadular (system avant-KniDavsistantStaut)	DEFAUILT=OFF	
Schedule: [system event=KpiPersistentStart] [Executes on all nodes in the cluster] kpimetricsTrig_54_MetricsKpiPersistentStart > pMetricsSystemEvent	This is activated when the system event=KpiPersistentStart occurs. This procedure sends an email to subscription list. The row gets logged to the METRICS_EVENT_REG_LOG.	
Schedule: [system event=KpiPersistentEnd]	DEFAUILT=OFF	
[Executes on all nodes in the cluster] kpimetricsTrig_55_MetricsKpiPersistentEnd → pMetricsSystemEvent	This is activated when the system event=KpiPersistentEnd occurs. This procedure sends an email to subscription list. The row gets logged to the METRICS_EVENT_REG_LOG.	
	DEFAUILT=OFF	
Schedule: [system event=KpiTruncationStart] [Executes on all nodes in the cluster]	This is activated when the system event=KpiTruncationStart occurs. This procedure sends	

kpimetricsTrig_56_MetricsKpiTruncationStart → pMetricsSystemEvent	an email to subscription list. The row gets logged to the METRICS_EVENT_REG_LOG. DEFAUILT=OFF This is activated when the system event=KpiTruncationEnd occurs. This procedure sends an email to subscription list. The row gets logged to the METRICS_EVENT_REG_LOG.	
Schedule: [system event=KpiTruncationEnd] [Executes on all nodes in the cluster] kpimetricsTrig_57_MetricsKpiTruncationEnd → pMetricsSystemEvent		
Schedule: [system event=KpiBackupStart] [Executes on all nodes in the cluster] kpimetricsTrig_58_MetricsKpiBackupStart → pMetricsSystemEvent	DEFAUILT=OFF This is activated when the system event=KpiBackupStart occurs. This procedure sends an email to subscription list. The row gets logged to the METRICS_EVENT_REG_LOG.	
Schedule: [system event= KpiBackupEnd] [Executes on all nodes in the cluster] kpimetricsTrig_59_MetricsKpiBackupEnd → pMetricsSystemEvent	DEFAUILT=OFF This is activated when the system event=KpiBackupEnd occurs. This procedure sends an email to subscription list. The row gets logged to the METRICS_EVENT_REG_LOG.	
Schedule: [system event=KpiRestoreStart] [Executes on all nodes in the cluster] kpimetricsTrig_60_MetricsKpiRestoreStart → pMetricsSystemEvent	DEFAUILT=OFF This is activated when the system event=KpiRestoreStart occurs. This procedure sends an email to subscription list. The row gets logged to the METRICS_EVENT_REG_LOG.	
Schedule: [system event=KpiRestoreEnd] [Executes on all nodes in the cluster] kpimetricsTrig_61_MetricsKpiRestoreEnd → pMetricsSystemEvent	DEFAUILT=OFF This is activated when the system event=KpiRestoreEnd occurs. This procedure sends an email to subscription list. The row gets logged to the METRICS_EVENT_REG_LOG.	

KPImetrics System Helpers Scripts

Location: /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers

This section lists all triggers and load scripts that have been defined to execute various KPImetrics procedures at regular intervals. The default execution frequencies are listed for each trigger. The load scripts have been created to load and aggregate raw data into processed KPImetrics metrics.

Script Name → Resource name	Description
executeMetricsSqlControl	This procedure compares the nodehost/nodeport passed in with what is
	present in METRICS_SQL_CONTROL and is used to control the
	execution of the procedure referenced in the CONTROL_NAME field.
	These rows were inserted by updateTriggers according to the following
	rules. Both Cache_ALL_RESOURCES and Cache_ALL_USERS are
	required to be executed on each node of the cluster for the dependent
	resources to be able to use the data collected.
	Rules:
	Cache_ALL_RESOURCES gets executed by dependents:
	Cache_ALL_RESOURCES
	Cache_METRICS_SQL_REQUEST_EXEC

	Cache_METRICS_SQL_REQUEST_EXEC_ADHOC Cache_METRICS_SQL_REQUEST_EXEC_REPROCESS Cache_METRICS_SQL_RESOURCE_LINEAGE pMETRICS_ALL_TABLES_exec Cache_ALL_USERS gets executed by dependents: Cache_ALL_USERS pMETRICS_ALL_TABLES_exec
freeUnusedMemory	This procedure is used to free unused memory. It gets invoked by Cache METADATA Tables
getClusterHostnamesDiff	The purpose of this procedure is to compare the current hostname for the current server with names in the cluster to determine the difference of those names. This difference will be used to create and use stage tables for the P_METRICS_ALL_TABLES procedure to use. It requires a unique stage table for each node in the cluster because it performs a table truncate during its processing. hostname1 hostname2 The difference for the current hostname=1 hostname_a hostname_b The difference for the current hostname=a
getDatasourceConfiguration → /shared/ASAssets/Utilities// getBasicResourceCursor → getBasicResourceXSLT	This procedure is used to get the current data source configuration for various commonValue settings, paths and derived paths. It invokes a couple of other procedures to get the data source type.
getDatasourceDependencyMetadata	This procedure is used to produce the dependency metadata for a given input resource path. It returns the datasource id, path and dependency resource path along with the lineage for that path. For each new datasource found, it will return a row with the afor-mentioned results. The input resource path may be from /services/databases/ or /shared/ paths. This procedure uses /lib/resource/GetColumnDependencies when a resource path is of type LINK or TABLE. When a resource path is PROCEDURE or a PROCEDURE is found during processing of GetColumnDependencies(), the algorithm will utilize getResourceLineageDirectRecursive() to complete the lineage thus providing a full picture of lineage for resources containing TABLE and PROCEDURE types within the lineage.
getServerNames → getServerNamesXSLT	Get the list of server names for a single node or cluster.
getSysRequestsProcedureName	Get the START_TIME for the procedure name passed in from SYS_REQUESTS. This confirms whether the procedure is actively running in TDV memory space or not.
getVersion	This procedure is used to determine which KPImetrics DDL script version should be used based on the DV version. DV 7.x ==> DDL <script_name>_700 DV 8.x ==> DDL <script_name>_800 The event that would cause a different DDL script to be created would be a change in the base metrics product. For example, if Tibco engineering decided to change the base tables, then a new <script_name>_xxx would be required. The DV version in which the changes are release would dictate the DDL script version and its content.</script_name></script_name></script_name>
p15MinutesIncrements	This procedure returns a cursor of 15-minute increments given a starting timestamp that is passed in. It generates a record per 15-min interval from the timestamp that is passed in. It will only generate the 15-min interval for the last full 15-min interval. If it is 1:05 then it generates 12:45-1:00 and not 1:00-1:15.

pGetEmailSubscriptions → pGetDomainUsers → [pGetDomainsXSLT,pGetDomainUsersXSLT]	This procedure constructs a list of emails which is used to send error or informational emails based on subscription to DV groups or LDAP groups.
pGetSystemInformation	This script is used to get cluster name and server name from /lib/util/getProperties() built in function. This function is used in load scripts and by custom logger to get server name.
pStartWorkflow	This script is invoked from each of the load scripts and marks the start of a workflow in the METRICS_CIS_WORKFLOW table. For a given workflow, the script takes workflow name as an input and returns the next workflow start and end time.
pEndWorkflow	Like pStartWorkflow script, this script is also called from other load scripts and marks the end of a workflow by updating the METRICS_CIS_WORKFLOW table when a workflow finishes. This script takes workflow name, workflow start and end times, workflow status and number of rows affected as input and updates the METRICS_CIS_WORKFLOW table.
pUpdateEventRegLog	This procedure is used to insert/update rows in the METRICS_EVENT_REG_LOG and METRICS_EVENT_REG_LOG_LINEAGE tables.
verifyProcessRunningMetricsJobDetails	Check for actively running processes for the following tables.

Baseline Table Load Architecture

This section outlines the table load architecture for the three baseline tables described below.

Baseline Table Accessibilty and Parallel Table Load Architecture

This section describes the architecture used to keep the three baseline tables accessible while new data is being loaded. These are the only tables that have this requirement. These tables are used by other load scripts and must be accessible for user queries and joining with data from other load scripts. The three tables are:

- METRICS ALL RESOURCES must be accessible all the time and loaded in parallel
- METRICS_ALL_USERS must be accessible all the time and loaded in parallel

The following architecture is being used for METRICS_ALL_RESOURCES and METRICS_ALL_USERS. This example shows a 2-node cluster with no timekeeper. For each additional node, there would be an additional _N## view and 2 tables N##_T1 and N## T2.

- TDV references the same view name in the database.
- The top-level database view is a UNION ALL of all the nodes.
- Each node-level view designated with _N## points to the current _N##_T1 or _N##_T2 that is currently loaded with data. The other table has been truncated and contains no data.
- When Cache_ALL_RESOURCES or Cache_ALL_USERS executes, it determines which table [T1 or T2] has no data. It designates the table with no data as the load table. It designates the table with data as the truncate table. The following shows an example and the steps that are performed.

Supposition: T1 contains rows. T2 is empty.

- a. T1 remains available for queries since it has data.
- b. Each node in the cluster wakes up at the same time on a trigger timer and executes the same code.

- c. Insert data:
 - i. NODE 01: Perform INSERT INTO METRICS_ALL_RESOURCES_N01_T2 SELECT * FROM
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ALL_RESOURCES
 - ii. NODE 02: Perform INSERT INTO METRICS_ALL_RESOURCES_N02_T2 SELECT * FROM

/shared/ASAssets/KPImetrics/Physical/Metadata/System/ALL RESOURCES

- j. Execute table statistics
 - i. NODE 01: UPDATE STATISTICS "schema". "METRICS ALL RESOURCES N01 T2"
 - ii. NODE 02: UPDATE STATISTICS
 "schema"."METRICS_ALL_RESOURCES_N02_T2"
- k. Alter View to repoint to newly loaded table
 - i. NODE 01: ALTER VIEW "schema"."METRICS_ALL_RESOURCES_N01" AS SELECT * FROM "schema"."METRICS_ALL_RESOURCES_N01_T2"
 - ii. NODE 02: ALTER VIEW "schema"."METRICS_ALL_RESOURCES_N02" AS SELECT * FROM "schema"."METRICS_ALL_RESOURCES_N02_T2"
- I. Truncate old table
 - i. NODE 01: TRUNCATE TABLE "schema"."METRICS ALL RESOURCES N01 T1"
 - ii. NODE 02: TRUNCATE TABLE "schema"."METRICS_ALL_RESOURCES_N02_T1"

In the diagram below, there are 2 physical tables created [T1 and T2] for each node in the cluster [N01, N02, etc]. There is a database view for each node [_N01] that is mapped to the table that contains the most current data. The loading simply alternates between the two tables. There is another view that is a UNION ALL view that unions each of the node views. The name of this view is the same as the base view in TDV. In the example below the TDV view METRICS_ALL_RESOURCES access the database view METRICS_ALL_RESOURCES which is the UNION ALL of all the database node views. This abstraction allows TDV to load the data into the empty table and switch the node view to the newly loaded table and truncate the old one. This allows each node to execute in parallel and load their own tables and switch their own view when they have completed. It also maintains data accessibility during this load period.

TDV	: VIEW	[METRICS_ALL_RESOURCES]	
DB	: VIEW (UNION A	LL) [METRICS_ALL_RESOURCES]	
		I	I
DB	: VIEW	[METRICS_ALL_RESOURCES_N01]	[METRICS_ALL_RESOURCES_N02]
switch	between T1 and T2	>	I
DB	: TABLE 1	[METRICS_ALL_RESOURCES_N01_T1]	[METRICS_ALL_RESOURCES_N02_T1]
DB	: TABLE 2	[METRICS_ALL_RESOURCES_N01_T2]	[METRICS_ALL_RESOURCES_N02_T2]

Data Transfer Scripts

This section outlines the Oracle and SQL Server data transfer scripts.

Physical Oracle Data Transfer Script

Location: /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/Oracle/ 06 pgCreateDrop KPI Plsgl oracle data xfer script

This section describes the actions and SQL taken in the P_METRICS_ALL_TABLES data transfer script. The purpose of this script is to transfer data from the collection tables to the history tables using native Oracle SQL script. Stage tables are used to prepare and augment the collection data prior to inserting into the history tables. The result of this is that only "inserts" are performed on the history tables. All of the insert/update/deletes that are required are performed on the stage tables.

metrics sessions

1. Get the min/max sessionid and logintime

```
select min("sessionid") minsessionid, min("logintime") minlogintime, max("sessionid") maxsessionid, max("logintime") maxlogintime from "'||dataSourceSchemaName||"."'||metrics_sessions_collection||" where "nodehost" = c_node_host and "nodeport" = c_node_port;
```

2. Insert into the metrics_sessions_stg stage table from the metrics_sessions collection table

```
insert into "||dataSourceSchemaName||"."||metrics sessions stg||"
  select ms.*
    LU."USER ID", LU."user", LU."domain"
 from ""||dataSourceSchemaName||"".""||metrics_sessions_collection||"" ms
-- Join with metrics_resources_usage to get the user
LEFT OUTER JOIN (
   select distinct mruc."nodehost", mruc."nodeport", mruc."sessionid", mruc."user", mruc."domain",
 mau."USER ID"
   FROM "'||dataSourceSchemaName||""."'||metrics_resources_usage_collection||"' mruc

    Join with METRICS_ALL_USERS to get the latest (max LOAD_TIME) userid

   LEFT OUTER JOIN "||dataSourceSchemaName||"."METRICS_ALL_USERS" mau
    ON mau."USERNAME" = mruc."user"
    AND mau. "DOMAIN NAME" = mruc. "domain"
    AND mau. "NODE HOST" = mruc. "nodehost"
    AND mau. "NODE PORT" = mruc. "nodeport"
  ) LU
  ON LU."sessionid" = ms."sessionid"
  AND LU. "nodehost" = ms. "nodehost"
  AND LU."nodeport" = ms."nodeport"
  where ms. "logintime" <= maxlogintime
   and ms. "sessionid" <= maxsessionid
   and ms. "nodehost" = in node host
   and ms. "nodeport" = in node port
   and NOT EXISTS (
   select *
   from "'||dataSourceSchemaName||""."'||metrics sessions hist||" ms1
   where ms1."nodehost" = ms."nodehost"
    and ms1."nodeport" = ms."nodeport"
    and ms1."sessionid" = ms."sessionid"
    and ms1."logintime" = ms."logintime"
    and ms1."type" = ms."type"
```

Insert into metrics_sessions_hist history from metrics_sessions_stg stage

```
INSERT INTO "||dataSourceSchemaName||"."||metrics_sessions_hist||"
SELECT * FROM "||dataSourceSchemaName||"."||metrics_sessions_stg||"
where "nodehost" = in_node_host
and "nodeport" = in_node_port;
```

metrics_resources_usage

1. Get the min/max requestid and starttime

```
select min("requestid") minrequestid, min("starttime") minstarttime, max("requestid") maxrequestid, max("starttime") maxstarttime from "||dataSourceSchemaName||"."||metrics_resources_usage_collection||" where "nodehost" = c_node_host and "nodeport" = c_node_port;
```

2. Insert the new rows into the metrics_resources_usage_stg stage from the metrics_resources_usage collection where not exists in metrics_resources_usage_hist history and not in METRICS_JOB_FILTERS.

```
INSERT INTO "||dataSourceSchemaName||"."||metrics_resources_usage_stg||"
   SELECT
       -- Insert collection columns
        mruc."cluster"
       , mruc."nodehost"
       , mruc."nodeport"
       , mruc."sessionid"
       , mruc."user"
       , mruc."domain"
       , mruc."group"
       , mruc."requestid"
       , mruc."parentid"
       , mruc."datasourcepath"
       , mruc."datasourcetype'
       , mruc. "resourcepath"
       , mruc. "resourcetype"
       , mruc. "resourceguid"
       , mruc. "resourcekind"
       , mruc."starttime"
       , mruc."endtime"
       -- Insert expanded information
       , mar. "RESOURCE ORIGIN" "resourceorigin"
       , mar."RESOURCE ID" "resourceid"
       , mar."DATASERVICE_NAME" "dataservicename"
       , mar. "RESOURCE NAME" "resourcename"
       , mar."SCHEMA_NAME" "parentname"
, mar."CATALOG_NAME" "grandparentname"
       , mar. "CATEGORY_NAME" "categoryname"
       , mar."PARENT_PATH" "parentpath" -- Insert expanded user information
       , mau. "USER ID" "userid"
"telephoneNumber", null "friendlyCountryName"
   FROM "'||dataSourceSchemaName||""."||metrics resources usage collection||" mruc
     -- METRICS ALL_USERS
    LEFT OUTER JOIN "||dataSourceSchemaName||"."METRICS ALL USERS" mau
      ON mau."USERNAME" = mruc."user"
      AND mau. "DOMAIN NAME" = mruc. "domain"
      AND mau. "NODE HOST" = mruc. "nodehost"
      AND mau. "NODE_PORT" = mruc. "nodeport"
     -- METRICS_ALL_RESOURCES
    LEFT OUTER JOIN "||dataSourceSchemaName||"."METRICS_ALL_RESOURCES" mar ON mar."RESOURCEPATH" = mruc."resourcepath"
      AND mar. "RESOURCE_TYPE" = mruc. "resourcetype"
      AND mar. "NODE HOST" = mruc. "nodehost"
      AND mar."NODE_PORT"
                                = mruc."nodeport"
    WHERE mruc."nodehost" = in node host
      AND mruc. "nodeport" = in node port
      AND mruc."starttime" <= maxstarttime mru
      AND mruc."requestid" <= maxrequestid_mr
      -- Do not insert rows matching the filter rows in METRICS JOB FILTERS
     AND (mruc."user", mruc."domain", mruc."resourcekind") NOT IN (select "USER", "DOMAIN", "RESOURCE_KIND"
FROM "||dataSourceSchemaName||" "METRICS JOB FILTERS" WHERE "ENV TYPE" = in env type)
      -- Do not insert rows if they exist in metrics resources usage hist
```

```
AND NOT EXISTS (
SELECT 1
FROM "||dataSourceSchemaName||"."||metrics_resources_usage_hist||" mruh
WHERE mruc."nodehost" = mruh."nodehost"
AND mruc."nodeport" = mruh."nodeport"
AND mruc."starttime" = mruh."starttime"
AND mruc."requestid" = mruh."requestid"
);
```

Insert into metrics_resources_usage_hist history from metrics_resources_usage_stg stage

```
INSERT INTO "||dataSourceSchemaName||"."||metrics_resources_usage_hist||"
SELECT * FROM "||dataSourceSchemaName||"."||metrics_resources_usage_stg||"
where "nodehost" = in_node_host
    and "nodeport" = in_node_port;
```

metrics_requests

1. Get the min/max requestid and starttime

```
select min("requestid") minrequestid, min("starttime") minstarttime, max("requestid") maxrequestid, max("starttime") maxstarttime from "'||dataSourceSchemaName||"."'||metrics_requests_collection||" where "nodehost" = c_node_host and "nodeport" = c_node_port;
```

- Insert the new rows into the metrics_requests_stg stage from the metrics_requests collection where not exists in metrics_requests_hist history and exists in metrics_resources_usage_stg.
 - -- A cursor is created in order to be able to loop through the records and commit a batch at a time. This was done so as to minimize the UNDO tablespace and archiver rollback logs. When Oracle archiver reaches a configured length of time and the query has not finished it tries to rollback. If there is not enough UNDO tablespace, the query fails. For this particular query it may be necessary to greatly increase the UNDO tablespace and increase the time for the archiver to 2 hours.

```
cursor c metrics requests(c node host varchar2, c node port number, c maxrequestid number,
c maxstarttime timestamp) is
SELECT mrc.*,
       null "dataservicename", null "resourcekind",
       LU."USER ID", LU."user", LU."domain"
FROM "'||dataSourceSchemaName||""."'||metrics requests collection||"" mrc
-- METRICS ALL USERS
LEFT OUTER JOIN
     (SELECT DISTINCT mruc."nodehost", mruc."nodeport", mruc, "requestid", mruc, "user",
mruc."domain", mau."USER ID"
     FROM "'||dataSourceSchemaName||""."'||metrics resources usage collection||" mruc
     LEFT OUTER JOIN "||dataSourceSchemaName||"."METRICS ALL USERS" mau
               ON mau."USERNAME" = mruc."user"
               AND mau. "DOMAIN NAME" = mruc. "domain"
               AND mau. "NODE_HOST" = mruc. "nodehost"
               AND mau. "NODE PORT" = mruc. "nodeport"
      ) LU
       ON LU."requestid" = mrc."requestid"
      AND LU. "nodehost" = mrc. "nodehost"
      AND LU. "nodeport" = mrc. "nodeport"
     WHERE mrc. "nodehost" = c node host
      AND mrc."nodeport" = c node port
       AND mrc."requestid" <= c maxrequestid
       AND mrc."starttime" <= c maxstarttime
```

```
-- Only insert metrics requests collection rows with a corresponding row in the
metrics resources usage stg

    No point in capturing these rows without relevant resource usage information.

       AND EXISTS (
                       SELECT 1 FROM
""||dataSourceSchemaName||""."||metrics_resources_usage_stg||"" mru
                       WHERE mru. "nodehost" = mrc. "nodehost"
                        AND mru."nodeport" = mrc."nodeport"
                        AND mru. "requestid" = mrc. "requestid"
                        AND mru."starttime" = mrc."starttime"
       );
TYPE c metrics requests T is table of c metrics requests%rowtype;
c metrics requests array c metrics requests T;
-- Perform the insert in batches that get committed every "batchInsertMax" to free up UNDO space.
-- The fetch size and commit size are the same to keep the logic clean.
batchcount := 0:
begintimestamp3 := SYSTIMESTAMP;
open c_metrics_requests(in_node_host, in_node_port, maxrequestid_mr, maxstarttime_mr);
loop fetch c_metrics_requests bulk collect into c_metrics_requests_array limit batchInsertMax;
  -- Calculate fetch collection duration
  endtimestamp := SYSTIMESTAMP;
  fetchDuration mr := endtimestamp - begintimestamp3;
  durationStr := replace(replace(cast(fetchDuration mr as varchar2), "000000000", "0"), "+", "");
  fetchDurationStr mr := substr(durationStr, 1, instr(durationStr, ".") + 3);
  -- Insert the rows a batch at a time
  begintimestamp3 := SYSTIMESTAMP;
  forall i in 1 .. c_metrics_requests_array.count
     INSERT INTO "||dataSourceSchemaName||"."||metrics requests stg||" VALUES
c metrics requests array(i);
  uncommitted := uncommitted + sql%rowcount;
  insertrows mr := insertrows mr + sql%rowcount;
  batchcount := batchcount + 1;
  -- Calculate insert stage duration
  endtimestamp := SYSTIMESTAMP;
  insertStgDuration mr := endtimestamp - begintimestamp3;
  durationStr := replace(replace(cast(insertStqDuration mr as varchar2), "000000000", "0"), "+", "");
  insertStgDurationStr mr := substr(durationStr, 1, instr(durationStr, ".") + 3);
  -- Update a status row into the METRICS JOB DETAILS table for number of rows affected
  statusmsg := "INSERT STAGE: '||metrics_requests_stg||' B#="||batchcount||" T#="||insertrows_mr||"
FETCH="||fetchDurationStr mr||" INSERT="||insertStgDurationStr mr;
 update "'||dataSourceSchemaName||""."METRICS_JOB_DETAILS"
           set CURRENT_OPERATION = statusmsg
           where REQ_START_DATE = begintimestamp
           and JOB_TABLE_NAME = ""||metrics_requests_collection||""
           and NODE HOST = in node host
           and NODE PORT = in node port;
  exit when c metrics requests array.count < batchInsertMax;
  if (uncommitted >= batchInsertMax) then
    commit;
    uncommitted := 0;
  begintimestamp3 := SYSTIMESTAMP;
end loop;
if (uncommitted > 0) then
```

```
commit;
end if;
close c_metrics_requests;
```

-- Delete any rows from stage that exist in history. This logic was broken out as a separate piece instead of embedding in the cursor query above because in most cases there should be no rows. This is here as more of an insurance policy.

```
DELETE FROM "||dataSourceSchemaName||"."||metrics_requests_stg||" mrc
-- Remove any rows that already exist in metrics_requests_hist
WHERE mrc."nodehost" = in_node_host
AND mrc."nodeport" = in_node_port
AND EXISTS (
SELECT 1
FROM "||dataSourceSchemaName||"."||metrics_requests_hist||" mrh
WHERE mrc."nodehost" = mrh."nodehost"
AND mrc."nodeport" = mrh."nodeport"
AND mrc."starttime" = mrh."starttime"
AND mrc."starttime" = mrh."requestid"
);
deleterows_mr := sql%rowcount;
commit;
```

- 3. Update metrics_requests_stg stage [resourcekind and dataservicename] joined with metrics resources usage stg.
 - a. Use the resourcekind and dataservicename from metrics_resources_usage_stg.
 - b. This process is to ensure that user defined requests are updated first in the event that metrics_resoruces_usage contains multiple rows for the same requestid where the resourcekind spans both [user defined] and [system].
 - c. If multiple distinct "requestid, resourcekind and dataservicename" rows are found the algorithm orders by mruh.requestid, mruh.resourcekind desc, mruh.dataservicename so that "user defined" is sorted before "system" as "user defined" has higher priority.
 - d. Only one record can be chosen.

Loop through the records using the following SQL

select distinct mruh."requestid", mrh."starttime", mrh."endtime", mrh."status", mruh."resourcekind", mruh."dataservicename"

```
from "'||dataSourceSchemaName||""."'||metrics_requests_stg||" mrh inner join "'||dataSourceSchemaName||""."'||metrics resources usage stg||" mruh
```

```
on mrh."requestid" = mruh."requestid"
and mrh."starttime" = mruh."starttime"
and mrh."nodehost" = mruh."nodehost"
and mrh."nodeport" = mruh."nodeport"
where mruh."resourcekind" is not null
and mrh."nodehost" = c_node_host
and mrh."nodeport" = c_node_port
and (mrh."resourcekind" is null or mrh."dataservicename" is null)
and mrh."requestid" >= c_minrequestid and mrh."requestid" <= c_maxrequestid
and mrh."starttime" >= c_minstarttime and mrh."starttime" <= c_maxstarttime
order by mruh."requestid", mruh."resourcekind" desc, mruh."dataservicename";
```

Insert records into metrics requests stg table in pre-defined batches

insert into "||dataSourceSchemaName||"."||metrics_requests_stg_upd||" values(t."requestid", t."starttime", t."endtime", t."status", t."resourcekind", t."dataservicename", in node host, in node port);

<u>Update the metrics_requests_stg with the single row for each requestid using the batch in the metrics_request_stg_upd stage table.</u> The min and max requestid and starttime are important to establish boundaries for the update. Without them the resourcekind and dataservicename for rows not in the stage update table are set to null.

```
update "'||dataSourceSchemaName||""."'||metrics_requests_stg||" mrh
     set (mrh."resourcekind", mrh."dataservicename") =
        (select mrht."resourcekind", mrht."dataservicename"
             from "'||dataSourceSchemaName||""."'||metrics requests stg upd||" mrht
             where mrh. "requestid" = mrht. "requestid"
              and mrh."starttime" = mrht."starttime"
              and mrh."endtime" = mrht."endtime"
              and mrh."status" = mrht."status"
              and mrh. "nodehost" = mrht. "nodehost"
              and mrh. "nodeport" = mrht. "nodeport"
              and mrht."nodehost" = in node host
              and mrht."nodeport" = in node port
where mrh. "resourcekind" is null
     and mrh."dataservicename" is null
     and mrh. "nodehost" = in_node_host
    and mrh."nodeport" = in_node_port
     and mrh. "requestid" >= minrequestid mrb
     and mrh. "requestid" <= maxrequestid_mrb
     and mrh."starttime" >= minstarttime mrb
     and mrh."starttime" <= maxstarttime mrb;
```

Delete only rows associated with the nodehost and nodeport that is executing this script

End of Loop

4. Insert into the metrics_requests_hist history from the metrics_requests_stg stage

```
INSERT INTO "'||dataSourceSchemaName||""."'||metrics_requests_hist||"
SELECT * FROM "'||dataSourceSchemaName||""."'||metrics_requests_stg||"
where "nodehost" = in_node_host
    and "nodeport" = in_node_port;
```

Physical SQL Server Data Transfer Script

Location: /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/SqlServer/06_pqCreateDrop_KPI_Plsql_sqlserver_data_xfer_script

This section describes the actions and SQL taken in the P_METRICS_ALL_TABLES data transfer script. The purpose of this script is to transfer data from the collection tables to the history tables using native SQL Server SQL script. Stage tables are used to prepare and augment the collection data prior to inserting into the history tables. The result of this is that only "inserts" are performed on the history tables. All of the insert/update/deletes that are required are performed on the stage tables.

metrics sessions

1. Get the min/max sessionid and logintime

```
select min("sessionid") minsessionid, min("logintime") minlogintime, max("sessionid") maxsessionid, max("logintime") maxlogintime from "'||dataSourceCatalogName||"."'||dataSourceSchemaName||"."'||metrics_sessions_collection||" where "nodehost" = @in_node_host and "nodeport" = @in_node_port;
```

2. Insert from metrics_sessions collection table into metrics_sessions_stg stage table

```
insert into "'||dataSourceCatalogName||""."'||dataSourceSchemaName||""."'||metrics sessions stg||""
 select ms.*,
    LU."USER ID", LU."user", LU."domain"
 from "||dataSourceCatalogName||""."||dataSourceSchemaName||""."||metrics sessions collection||" ms
-- Join with metrics resources usage to get the user
 LEFT OUTER JOIN (
  select distinct mruc."nodehost", mruc."nodeport", mruc."sessionid", mruc."user", mruc."domain",
mau."USER ID"
  FROM
 "||dataSourceCatalogName||""."||dataSourceSchemaName||""."||metrics_resources_usage_collection||"" mruc
 -- Join with METRICS_ALL_USERS to get the latest (max LOAD_TIME) userid
  LEFT OUTER JOIN
 "||dataSourceCatalogName||""."||dataSourceSchemaName||""."METRICS_ALL_USERS" mau
    ON mau."USERNAME" = mruc."user"
    AND mau. "DOMAIN NAME" = mruc. "domain"
    AND mau. "NODE HOST" = mruc. "nodehost"
    AND mau. "NODE_PORT" = mruc. "nodeport"
 ON LU. "sessionid" = ms. "sessionid"
 AND LU."nodehost" = ms."nodehost"
 AND LU. "nodeport" = ms. "nodeport"
 where ms."logintime" <= @maxlogintime
  and ms."sessionid" <= @maxsessionid
  and ms."nodehost" = @in_node_host
  and ms. "nodeport" = @in node port
  and NOT EXISTS (
   select *
   from "'||dataSourceCatalogName||"."||dataSourceSchemaName||"."||metrics_sessions_hist||" ms1
   where ms1."nodehost" = ms."nodehost"
    and ms1."nodeport" = ms."nodeport"
    and ms1."sessionid" = ms."sessionid"
    and ms1."logintime" = ms."logintime"
    and ms1."type" = ms."type"
   );
```

3. Insert into metrics_sessions_hist history from metrics_sessions_stg stage

```
INSERT INTO "'||dataSourceCatalogName||"."'||dataSourceSchemaName||"."'||metrics_sessions_hist||"
SELECT * FROM "'||dataSourceCatalogName||"."'||dataSourceSchemaName||"."'||metrics_sessions_stg||"
where "nodehost" = in_node_host
and "nodeport" = in_node_port;
```

metrics resources usage

1. Get the min/max requestid and starttime

```
select min("requestid") minrequestid, min("starttime") minstarttime, max("requestid") maxrequestid, max("starttime") maxstarttime from 
"||dataSourceCatalogName||"."||dataSourceSchemaName||"."||metrics_resources_usage_collection||" where "nodehost" = @in node host and "nodeport" = @in node port;
```

 Insert the new rows into the metrics_resources_usage_stg stage from the metrics_resources_usage collection where not exists in metrics_resources_usage_hist history and not in METRICS_JOB_FILTERS.

```
INSERT INTO "||dataSourceCatalogName||"."||dataSourceSchemaName||"."||metrics resources usage stg||"
       -- Insert collection columns
        mruc."cluster"
       , mruc."nodehost"
       , mruc."nodeport"
       , mruc "sessionid"
       , mruc."user'
       , mruc."domain"
       , mruc."group"
       , mruc. "requestid"
       , mruc."parentid"
       , mruc. datasourcepath
       , mruc. "datasourcetype"
       , mruc."resourcepath"
       , mruc. "resourcetype"
       , mruc. "resourceguid"
       , mruc. "resourcekind"
       , mruc."starttime"
       , mruc."endtime"
       -- Insert expanded information
       , mar. "RESOURCE ORIGIN" "resourceorigin"
       , mar."RESOURCE_ID" "resourceid"
, mar."DATASERVICE_NAME" "dataservicename"
       , mar. "RESOURCE_NAME" "resourcename"
       , mar. "SCHEMA NAME" "parentname"
       , mar."CATALOG_NAME" "grandparentname" , mar."CATEGORY_NAME" "categoryname"
       , mar "PARENT PATH" "parentpath"
       -- Insert expanded user information
        , mau."USĖR_ID" "userid'
   FROM "||dataSourceCatalogName||"."||dataSourceSchemaName||"."||metrics_resources_usage_collection||" mruc
     -- METRICS ALL USERS
    LEFT OUTER JOIN "||dataSourceCatalogName||"."||dataSourceSchemaName||"."METRICS_ALL_USERS" mau
         ON mau."USERNAME" = mruc."user"
         AND mau. "DOMAIN NAME" = mruc. "domain"
      AND mau. "NODE HOST" = mruc. "nodehost"
      AND mau."NODE_PORT" = mruc."nodeport"
    -- METRICS_ALL_RESOURCES
LEFT OUTER JOIN
"'||dataSourceCatalogName||"."||dataSourceSchemaName||"."METRICS_ALL_RESOURCES" mar
      ON mar."RESOURCEPATH" = mruc."resourcepath"
      AND mar."RESOURCE_TYPE" = mruc."resourcetype"
AND mar."NODE_HOST" = mruc."nodehost"
                                 = mruc."nodehost"
      AND mar. "NODE PORT" = mruc. "nodeport"
   WHERE mruc."nodehost" = @in_node_host
    AND mruc."nodeport" = @in node port
    AND mruc."starttime" <= @maxstarttime_mru
AND mruc."requestid" <= @maxrequestid_mr
     -- Do not insert rows matching the filter rows in METRICS_JOB_FILTERS
    AND mruc. "requestid" NOT IN
           (SELECT mru."requestid"
            FROM "||dataSourceCatalogName||"."||dataSourceSchemaName||"."||metrics resources usage collection||"
mru
            JOIN "||dataSourceCatalogName||"."||dataSourceSchemaName||"."METRICS_JOB_FILTERS" mjf
              ON mru."user" = mif."USER"
              AND mru."domain" = mjf."DOMAIN"
              AND mru."resourcekind" = mjf."RESOURCE_KIND"
                                                   AND mru."nodehost" = @in node host
              AND mru. "nodeport" = @in node port
            WHERE mjf."ENV_TYPE" = @in_env_type )
    -- Do not insert rows if they exist in metrics_resources_usage_hist
```

```
AND NOT EXISTS (
SELECT 1
FROM "||dataSourceCatalogName||"."||dataSourceSchemaName||"."||metrics_resources_usage_hist||" mruh
WHERE mruc."nodehost" = mruh."nodehost"
AND mruc."nodeport" = mruh."nodeport"
AND mruc."starttime" = mruh."starttime"
AND mruc."starttime" = mruh."requestid"
);
```

Insert into metrics_resources_usage_hist history from metrics_resources_usage_stg stage

```
INSERT INTO
""||dataSourceCatalogName||"".""||dataSourceSchemaName||"".""||metrics_resources_usage_hist||""
SELECT * FROM
""||dataSourceCatalogName||"".""||dataSourceSchemaName||"".""||metrics_resources_usage_stg||"
where "nodehost" = in_node_host
and "nodeport" = in_node_port;
```

metrics requests

1. Get the min/max requestid and starttime

```
select min("requestid") minrequestid, min("starttime") minstarttime, max("requestid") maxrequestid, max("starttime") maxstarttime from "i||dataSourceCatalogName||""."i||dataSourceSchemaName||""."i||metrics_requests_collection||" where "nodehost" = @in_node_host and "nodeport" = @in_node_port;
```

2. Insert the new rows into the metrics_requests_stg stage from the metrics_requests collection where not exists in metrics_requests_hist history and exists in metrics_resources_usage_stg.

```
INSERT INTO "||dataSourceCatalogName||""."||dataSourceSchemaName||""."||metrics_requests_stg||""
   SELECT mrc.*,
      null "dataservicename", null "resourcekind",
      LU."USER ID", LU."user", LU."domain"
   FROM "||dataSourceCatalogName||"."||dataSourceSchemaName||"."||metrics_requests_collection||" mrc
   LEFT OUTER JOIN (
    SELECT DISTINCT mruc."nodehost", mruc."nodeport", mruc."requestid", mruc."user", mruc."domain",
  mau."USER ID"
  ""||dataSourceCatalogName||"".""||dataSourceSchemaName||"".""||metrics_resources_usage_collection||""
  mruc
    LEFT OUTER JOIN
  "'||dataSourceCatalogName||""."'||dataSourceSchemaName||""."METRICS ALL USERS" mau
      ON mau."USERNAME" = mruc."user"
      AND mau. "DOMAIN_NAME" = mruc. "domain"
      AND mau. "NODE_HOST" = mruc. "nodehost"
      AND mau. "NODE_PORT" = mruc. "nodeport"
   ) LU
   ON LU."requestid" = mrc."requestid"
   AND LU. "nodehost" = mrc. "nodehost"
   AND LU. "nodeport" = mrc. "nodeport"
  WHERE mrc. "nodehost" = @in node host
   AND mrc. "nodeport" = @in node port
   AND mrc."starttime" <= @maxstarttime mr
   AND mrc. "requestid" <= @maxrequestid mr
   AND NOT EXISTS (
     SELECT 1
     FROM "||dataSourceCatalogName||""."||dataSourceSchemaName||""."||metrics requests hist||" mrh
     WHERE mrc. "nodehost" = mrh. "nodehost"
```

```
AND mrc."nodeport" = mrh."nodeport"

AND mrc."starttime" = mrh."starttime"

AND mrc."requestid" = mrh."requestid"
)

-- Only insert metrics_requests collection rows when a corresponding row exists in the metrics_resources_usage_stg

-- No point in capturing these rows without relevant resource usage information.

AND EXISTS (

SELECT 1 FROM

""||dataSourceCatalogName||".""||dataSourceSchemaName||".""||metrics_resources_usage_stg||" mru

WHERE mru."nodehost" = mrc."nodehost"

AND mru."nodeport" = mrc."nodeport"

AND mru."requestid" = mrc."requestid"

AND mru."starttime" = mrc."starttime"
);
```

3. Update metrics_requests_stg stage [resourcekind and dataservicename] joined with metrics_resources_usage_stg.

- a. Use the resourcekind and dataservicename from metrics_resources_usage_stg.
- b. This process is to ensure that user defined requests are updated first in the event that metrics_resoruces_usage contains multiple rows for the same requestid where the resourcekind spans both [user defined] and [system].
- c. If multiple distinct "requestid, resourcekind and dataservicename" rows are found the algorithm orders by mruh.requestid, mruh.resourcekind desc, mruh.dataservicename so that "user defined" is sorted before "system" as "user defined" has higher priority.
- d. Only one record can be chosen.

Update where resourcekind='user defined'

```
update "'||dataSourceCatalogName||""."'||dataSourceSchemaName||""."'||metrics requests stg||"
       set "resourcekind" = mruh. "resourcekind",
          "dataservicename" = mruh."dataservicename"
     from "'||dataSourceCatalogName||"."||dataSourceSchemaName||"."||metrics requests stg||" mrh
      inner join
"'||dataSourceCatalogName||"."'||dataSourceSchemaName||"."'||metrics_resources_usage_stg||" mruh
      on mruh."requestid" = mrh."requestid"
      and mruh."starttime" = mrh."starttime"
      and mruh. "nodehost" = mrh. "nodehost"
      and mruh. "nodeport" = mrh. "nodeport"
     where mrh. "nodehost" = @in_node_host
      and mrh."nodeport" = @in_node_port
      and mrh."starttime" <= @maxstarttime_mr
      and mrh. "requestid" <= @maxrequestid mr
      and mrh. "resourcekind" is null
      and mrh."dataservicename" is null
      and mruh."dataservicename" is not null
      and mruh. "resourcekind" = "user defined"; -- [user defined, system]
```

Update where resourcekind='system'

```
and mruh."nodeport" = mrh."nodeport"
where mrh."nodehost" = @in_node_host
and mrh."nodeport" = @in_node_port
and mrh."starttime" <= @maxstarttime_mr
and mrh."requestid" <= @maxrequestid_mr
and mrh."resourcekind" is null
and mrh."dataservicename" is null
and mruh."dataservicename" is not null
and mruh."resourcekind" = "system"; -- [user defined, system]
```

5. Insert into metrics_requests_hist history from metrics_requests_stg stage

```
INSERT INTO "'||dataSourceCatalogName||""."'||dataSourceSchemaName||""."'||metrics_requests_hist||""
SELECT * FROM "'||dataSourceCatalogName||""."'||dataSourceSchemaName||""."'||metrics_requests_stg||"
where "nodehost" = in_node_host
and "nodeport" = in_node_port;
```

11 Release Notes

This section provides information on what has changed in this release.

Added or Modified in this Release

This section provides bullet points on what has been added or changed in this release.

Release 2022Q400 [Dec 19 2022]

- Relocated procedures to /shared/ASAssets/Utilities/model/Resources/procedures. Added commonValues.hostnameProperty and pMODEL ALL MAPPING. Added DisplaySqlPlan.
- Modified getDatasourceDependencyMetadata to throw an exception if GetColumnDependencies throws an
 exception. No longer falling back to getResourceLineageDiretRecursive() for views.
- Modified Cache METADATA TABLES to implement not generating lineage based on types.
- NEW:
 - o /services/databases/ASAssets/KPImetrics/sqlPlan/DisplaySqlPlan
 - /shared/ASAssets/KPImetrics/Application/sqlPlan/DisplaySqlPlan
- MOD:
 - o /shared/ASAssets/KPImetrics/Customize/commonValues
 - hostnameProperty
 - pMODEL ALL MAPPING
 - getSqlPlanRemoveStrings
 - o /shared/ASAssets/KPImetrics/Customize/upgrade_commonValues_KPI
 - /shared/ASAssets/KPImetrics/Customize/pqInsert METADATA Constants
 - /shared/ASAssets/KPImetrics/Configuration/modify_commonValues
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_ALL_RESOURC FS
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METADATA_TA BLES
 - o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_SQL_Plan
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/getServerNames
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/pGetSystemInformation
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/getDatasourceDependencyMetadat
 a
 - /shared/ASAssets/KPImetrics/README
 - /shared/ASAssets/KPImetrics_installation/DDL/Oracle/02_pqCreateDrop_KPI_Tables_oracle_metrics collection tables 800
 - /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/02_pqCreateDrop_KPI_Tables_sqlserver_metrics_collection_tables_800
 - /shared/ASAssets/KPImetrics_installation/Helpers/Database/createDropDatabaseResources
 - o /shared/ASAssets/KPImetrics_installation/Helpers/General/getServerNames
 - o /shared/ASAssets/KPImetrics_installation/Maintenance/pMaintenanceUpdateHostnamePort
 - o /shared/ASAssets/KPImetrics_installation/3_Post_Upgrade
- MOVED:
 - o /shared/ASAssets/Utilities/model/Resources/procedures/getDataSourceAttributesNormalized
 - o /shared/ASAssets/Utilities/model/Resources/procedures/getResourceAttributesNormalized
 - /shared/ASAssets/Utilities/model/Resources/procedures/getUsedResourcesDirectCursorNormalized
 - o /shared/ASAssets/Utilities/model/Resources/procedures/pMODEL_ALL_COLUMNS
 - o /shared/ASAssets/Utilities/model/Resources/procedures/pMODEL_ALL_DATASOURCES
 - /shared/ASAssets/Utilities/model/Resources/procedures/pMODEL_ALL_PARAMETERS
 /shared/ASAssets/Utilities/model/Resources/procedures/pMODEL_ALL_PROCEDURES
 - o /shared/ASAssets/Utilities/model/Resources/procedures/pMODEL ALL RESOURCES OTHER
 - /shared/ASAssets/Utilities/model/Resources/procedures/pMODEL_ALL_TABLES
 - o /shared/ASAssets/Utilities/model/Resources/procedures/pMODEL_ALL_WSDL_OPERATIONS

Release 2022Q302 [Sep 22 2022]

- Modified Cache_SQL_Plan to use modified utilities getSqlPlan. Added table column metrics_requests_hist_sqlplan.pusheddownsql
- MOD:
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache SQL Plan
 - /shared/ASAssets/KPImetrics_installation/DDL/Oracle/04_pqCreateDrop_KPI_Tables_oracle_kpi1_tables
 - /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/04_pqCreateDrop_KPI_Tables_sqlserver_k pi1_tables
 - o /shared/ASAssets/KPImetrics_installation/0_commonValues
 - o /shared/ASAssets/KPImetrics installation/0 mappingConstants
 - /shared/ASAssets/KPImetrics_installation/Helpers/Upgrade/modify_commonValues

Release 2022Q301 [Aug 08 2022]

- · Removed calls to "Free Unused Memory" and serialized privilege user code in Cache METADATA TABLES
- MOD: Put a gateKeeperCheckWait around the PRIVILEGE_USER code to serialize execution across all nodes to alleviate timeouts and connection resets and deadlocks.
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METADATA_TA BLES
- MOD: Removed calls to "Free Unused Memory" as memory management should be the responsibility of TDV GC or a customer process.
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_ALL_RESOURC
 FS
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METADATA_TA BLES
- MOD: Added variable processingTimeoutSec to pass into gateKeeperCheckWait to control loop timeout.
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/gateKeeperCheckWait
 - All /ClusterSafeCache procedures that invoked gateKeeperCheckWait were modified due to input param changes.
 - İshared/ASAssets/KPImetrics/Configuration/updateTriggers delete METRICS_SQL_CONTROL to avoid left-over entries that could cause blocking.

Release 2022Q300 [July 12 2022]

- Rewrote the INSERT/SELECT into individual native INSERT transactions to catch and ignore "duplicate key" and to insert with correct PARTITION number based on actual EVENT_TIME.
- Replaced usage of METADATA_ALL_RESOURCES with direct access to METRICS_ALL_RESOURCES to reduce time and storage.
- MOD: Rewrote INSERT/SELECT to catch and ignore duplicate key.
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LOG_DISK
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache LOG IO
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LOG_MEMORY
- MOD: Replaced usage of METADATA_ALL_RESOURCES with direct access to METRICS_ALL_RESOURCES to reduce time and storage.
 - /shared/ASAssets/KPImetrics_installation/0_mappingConstants
 - /shared/ASAssets/KPImetrics_installation/DDL/Oracle/10_pqCreateDrop_Metadata_Tables_oracle_metadata_tables
 - /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/10_pqCreateDrop_Metadata_Tables_sqlse
 rver_metadata_tables
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METADATA_TA BLES
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI sglserver/METADATA ALL RESOURCES
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/pqPartition_metadata_tables_ROW_D ISTRIBUTION
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/pqPartition_metrics_history_other_table
 ROW_DISTRIBUTION
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI oracle/METADATA ALL RESOURCES
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/pqPartition_metadata_tables_ROW_DISTRIBUTION

- /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/pqPartition_metrics_history_other_tables ROW DISTRIBUTION
- DEL:
 - /shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_2016/DVKPI8/DVKPI/METADATA_A LL RESOURCES
 - Dropped table METADATA_ALL_RESOURCES

Release 2022Q202 [July 06 2022]

- Fixed SQL Server blocking issue due to "SELECT 1" in 00_ExecuteDDL and Datasource connection validation query.
- Fixed issue with node maintenance for the tables METRICS_ALL_RESOURCES and METRICS_ALL_USERS which depends on the number of nodes in a cluster.
- Fixed issue with Cache ALL RESOURCES and Cache ALL USERS failure for unknown reason.
- Fixed issue with deadlock in SQL Server when accessing METRICS_CIS_WORKFLOW and METRICS_JOB_DETAILS.
- MOD: blocking
 - /shared/ASAssets/KPImetrics/Physical/Metadata/KPI sqlserver 2016
 - /shared/ASAssets/KPImetrics/Physical/Metadata/KPI sqlserver 2019
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI sglserver/00 ExecuteDDL
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI sqlserver/04 KillSessionId
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI sqlserver/ExecuteTableStatistics
- MOD: node maintenance during update triggers
 - /shared/ASAssets/KPImetrics/Configuration/AutomatedTableMaintenance/automatedMaintenanceDriver
 - o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache SYS NODES
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_ALL_RESOURC
 FS
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_ALL_USERS
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMETRICS_ALL_TABLE S exec
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/gateKeeperCheckWait
- MOD: resolve deadlock in SQL Server
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckCISWorkflowStat usFail
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckDBMSScheduler Error
 - o /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/getDMLSelectResponse
- NEW:
 - o /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/01_exec_sp_WholsActive
 - Added a file system directory: \KPImetrics 2022Q202\KPImetrics scripts\sp whoisactive-12.00

Release 2022Q201 [May 25 2022]

- General updates:
 - Removed LDAP integration from KPImetrics.
 - o Customers will have to migrate to their own custom LDAP.
 - Dropped LDAP PERSON tables. Dropped LDAP related columns from metrics * hist tables.
 - o Modified all code related to LDAP to remove. Updated documentation.
 - Added Cache_SYS_CLUSTER [table: METRICS_SYS_CLUSTER] and Cache_SYS_NODES [table: METRICS_SYS_NODES] and pDetectClusterBreak
 - Removed commonValues.totalNumberWorkerNodes
- NEW:
 - $\circ \hspace{0.3cm} / shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_SYS_CLUSTER$
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_SYS_NODES
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pDetectClusterBreak
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_28_Cac he SYS CLUSTER
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_29_Det ectClusterBreak
- DEL:

- /shared/ASAssets/KPImetrics/Physical/Metadata/LDAP1 and LDAP2 0
- /shared/ASAssets/KPImetrics/Customize/LDAP PERSON 0
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache LDAP PERSON
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig 03 Cac he LDAP PERSON
- /shared/ASAssets/KPImetrics/Physical/Physical/Abstraction/METRICS LDAP PERSON
- /shared/ASAssets/KPImetrics/Physical/Physical//KPI oracle/METRICS LDAP PERSON
- /shared/ASAssets/KPImetrics/Physical/Physical//KPI sqlserver/METRICS LDAP PERSON
- /shared/ASAssets/KPImetrics/Physical/Formatting/METRICS_LDAP_PERSON
- /shared/ASAssets/KPImetrics/Business/Logical/userUsage/vLdapPerson
- /shared/ASAssets/KPImetrics/Business/Business/users/vLdapPerson
- /shared/ASAssets/KPImetrics/Application/users/vLdapPerson 0
 - /services/databases/ASAssets/KPImetrics/users/vLdapPerson

MOD:

- /shared/ASAssets/KPImetrics/Customize/commonValues
- /shared/ASAssets/KPImetrics/Customize/upgrade defaultTriggers KPI 0
- /shared/ASAssets/KPImetrics/Customize/defaultTriggersToEnable
- /shared/ASAssets/KPImetrics/Configuration/updateTriggers
- /shared/ASAssets/KPImetrics/Configuration/AutomatedTableMaintenance/automatedMaintenanceDri
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckDBMSScheduler Frror
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckExceedMemoryP ercentRequests
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckLongRunningReq uests
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pValidateUpdateStatusT
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckMetricsActivity
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMETRICS ALL TABLE S exec
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMetricsSystemEvent 0
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pPurgeData
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/pUpdateEventRegLog
- /shared/ASAssets/KPImetrics/Physical/Formatting/METRICS_EVENT_REG_LOG /shared/ASAssets/KPImetrics/Business/Logical/resourceUsage/vResourceUsageAll
- /shared/ASAssets/KPImetrics/Business/Logical/resourceUsage/vResourceUsageUD
- /shared/ASAssets/KPImetrics/Business/Logical/requestMonitoring/vSessions
- /shared/ASAssets/KPImetrics/Business/Logical/requestMonitoring/vRequestsExpandedUD
- /shared/ASAssets/KPImetrics/Business/Logical/requestMonitoring/vRequestExpandedAll
- /shared/ASAssets/KPImetrics/Business/Logical/requestMonitoring/vEventRequestSqlResources
- /shared/ASAssets/KPImetrics/Business/Business/resourceAll/vResourceCountUsersDate
- /shared/ASAssets/KPImetrics/Business/Business/resourceAll/vResourceCountUsers 0
- /shared/ASAssets/KPImetrics/Business/Business/resource/vResourceCountUsersDate 0
- /shared/ASAssets/KPImetrics/Business/Business/resource/vResourceCountUsers
- /shared/ASAssets/KPImetrics/Business/Business/requests/vSessionsUserRequests
- /shared/ASAssets/KPImetrics/Business/Business/requests/vRequestsCountsByUser
- /shared/ASAssets/KPImetrics/Business/Business/requests/vPublishedResourcePerRequest
- /shared/ASAssets/KPImetrics/Application/requests/vRequestDurationSqlTemplates
- /shared/ASAssets/KPImetrics/Application/metrics/metrics requests hist/metrics requests hist group by date user domain
- /shared/ASAssets/KPImetrics/Application/metrics/metrics requests hist/metrics requests hist group by date user domain resourcekind
- /shared/ASAssets/KPImetrics/Application/metrics/metrics_requests_hist/metrics_requests_hist_group by date user domain resourcekind dataservicename
- /shared/ASAssets/KPImetrics/Application/metrics/metrics requests hist/metrics requests hist group by user domain
- /shared/ASAssets/KPImetrics/Application/metrics/metrics requests hist/metrics requests hist group by user domain nodehost nodeport

- /shared/ASAssets/KPImetrics/Application/metrics/metrics_requests_hist/metrics_requests_hist_group by user domain resourcekind dataservicename
- /shared/ASAssets/KPImetrics/Application/metrics/metrics_requests_hist/metrics_requests_hist_group by_user_domain_resourcekind_dataservicename_nodehost_nodeport
- o /shared/ASAssets/KPImetrics/AllCustomReports/vEventRequestSqlResources
- /shared/ASAssets/KPImetrics/AllCustomReports/ResourceAccessByUsersRT
- /shared/ASAssets/KPImetrics/AllCustomReports/ResourceAccessByUsers
- /shared/ASAssets/KPImetrics/AllCustomReports/AccessByUserOvertimeRT
- o /shared/ASAssets/KPImetrics/AllCustomReports/AccessByUserOvertime
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/deleteOrTruncateTable
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/getServerNames
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/executeMetricsSqlControlInsert
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pExecuteMetricsSqlCont rol
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_ALL_RESOURC
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache ALL USERS
- KPImetrics installation:
- MOD:
 - o /shared/ASAssets/KPImetrics_installation/0_mappingConstants
 - o /shared/ASAssets/KPImetrics installation/2 Post Installation
 - /shared/ASAssets/KPImetrics installation/3 Post Upgrade
 - o /shared/ASAssets/KPImetrics installation/backupCustomResources
 - o /shared/ASAssets/KPImetrics installation/ README RELEASE
 - /shared/ASAssets/KPImetrics_installation/Helpers/Upgrade/modify_upgrade_defaultTriggers_KPI add remove LDAP_PSERSON trigger.
 - o /shared/ASAssets/KPImetrics installation/Helpers/Database/createDropDatabaseResources
 - o /shared/ASAssets/KPImetrics installation/Maintenance/pMaintenanceUpdateHostnamePort
 - /shared/ASAssets/KPImetrics_installation/Helpers/Database/Administration/Create_All_Database_Re sources
 - /shared/ASAssets/KPImetrics_installation/Helpers/Database/Administration/Drop_All_Database_Res ources
 - /shared/ASAssets/KPImetrics installation/Helpers/Database/Administration/Rebuild All Indexes
- DEL:
 - /shared/ASAssets/KPImetrics installation/Helpers/Upgrade/modify LDAP PERSON
- DDL: Oracle
 - /shared/ASAssets/KPImetrics_installation/DDL/Oracle/Helpers/06_oracle_data_xfer_800_P_METRIC
 S ALL TABLES
 - /shared/ASAssets/KPImetrics_installation/DDL/Oracle/02_pqCreateDrop_KPI_Tables_oracle_metrics collection stage tables 800
 - /shared/ASAssets/KPImetrics_installation/DDL/Oracle/03_pqCreateDrop_KPI_Tables_oracle_metrics history tables 800
 - /shared/ASAssets/KPImetrics_installation/DDL/Oracle/04_pqCreateDrop_KPI_Tables_oracle_kpi1_tables
 - /shared/ASAssets/KPImetrics_installation/DDL/Oracle/04_pqCreateDrop_KPI_Tables_oracle_kpi2_tables
 - /shared/ASAssets/KPImetrics_installation/DDL/Oracle/06_pqCreateDrop_KPI_Plsql_oracle_data_xfer script 800
- DDL: SqlServer
 - /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/Helpers/06_sqlserver_data_xfer_800_P_M ETRICS ALL TABLES
 - /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/04_pqCreateDrop_KPI_Tables_sqlserver_k
 pi1 tables
 - /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/04_pqCreateDrop_KPI_Tables_sqlserver_k pi2_tables
 - /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/02_pqCreateDrop_KPI_Tables_sqlserver_metrics_collection_stage_tables_800
 - /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/03_pqCreateDrop_KPI_Tables_sqlserver_metrics_history_tables_800

/shared/ASAssets/KPImetrics installation/DDL/SqlServer/06 pqCreateDrop KPI Plsql sqlserver dat a xfer script 800

Release 2022Q200 [Apr 26 2022]

- Added "updateEventRegLogParseSQL" to commonValues to enable/disable parsing SQL and getting data source lineage
- Mod:
 - /shared/ASAssets/KPImetrics/Customize/commonValues
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/pUpdateEventRegLog
- NEW: Consolidated all update statistics to a single procedure which uses METRICS SQL CONTROL as the common registration point to coelesce the updating of statistics. Only one node in a cluster will execute to avoid SQL Server blocking.
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pExecuteUpdateStatistics 0
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig 27 ExecuteUpdateS 0 tatistics
- MOD:
 - /shared/ASAssets/KPImetrics/Customize/commonValues
 - Added "WF_pExecuteUpdateStatistics" to commonValues.
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/ExecuteTableStatistics
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/executeMetricsSqlControlInsert
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pPurgeData
 - /shared/ASAssets/KPImetrics/Physical/Physical/Abstraction/P_METADATA_TRUNCATE_PARTITION /shared/ASAssets/KPImetrics/Physical/Physical/Abstraction/P_METRICS_TRUNCATE_PARTITION /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/P_METADATA_TRUNCATE_PARTITION

 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/P_METRICS_TRUNCATE_PARTITION
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/P_METADATA_TRUNCATE_PARTITION /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/P_METRICS_TRUNCATE_PARTITION

 - All procedures that invoke ExecuteTableStatistics added input parameter nodehost, nodeport

Release 2022Q101 [Mar 31 2022]

- Mod: Modularize Cache ALL RESOURCES
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_ALL_RESOURCES
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache METADATA TABLES
- New: triggers/procedure
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/pMODEL_ALL_COLUMNS
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/pMODEL_ALL_DATASOURCES /shared/ASAssets/KPImetrics/Physical/Metadata/System/pMODEL_ALL_PARAMETERS

 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/pMODEL_ALL_PROCEDURES
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/pMODEL_ALL_RESOURCES_OTHER

 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/pMODEL_ALL_TABLES /shared/ASAssets/KPImetrics/Physical/Metadata/System/pMODEL_ALL_WSDL_OPERATIONS
- Mod: moved /Metadata/System/SYSTEM ALL * to /System/tdv 82 lower to minimize the importance since most customer are moving to TDV 8.3 and above.

Release 2022Q100 [Mar 02 2022]

- Fixed various bugs and improved code maintainability. Utilize TDV model tables instead of API's for TDV 8.3 and above
- Removed: KPImetrics_Installation TDV 7.x DDL scripts [formerly had been deprecated for several releases.]
- Mod: Fix unique constraint error for SYS CACHES. Added column "REFRESH ACTIVITY TIME". Modified primary key to include "REFRESH ACTIVITY TIME" and "STATUS".
 - Mod: /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache SYS CACHES 0
 - 0 Mod: /shared/ASAssets/KPImetrics installation/DDL/Oracle/04 pqCreateDrop KPI Tables oracle kpi1 tables

 - /shared/ASAssets/KPImetrics installation/DDL/SqlServer/04 pqCreateDrop KPI Tables sqlserver kpi1 tables
- New/Mod: rework to use TDV model tables where possible and reduce API calls
 - New: /shared/ASAssets/KPImetrics/Physical/Metadata/System/pMODEL ALL RESOURCES -- replaces
 - New: /shared/ASAssets/KPImetrics/Physical/Metadata/System/SYSTEM_ALL_COLUMNS
 - New: /shared/ASAssets/KPImetrics/Physical/Metadata/System/SYSTEM_ALL_DATASOURCES
 - New: /shared/ASAssets/KPImetrics/Physical/Metadata/System/SYSTEM_ALL_DATASOURCES_ATTRIBUTES
 - New: /shared/ASAssets/KPImetrics/Physical/Metadata/System/SYSTEM_ALL_PARAMETERS
 - New: /shared/ASAssets/KPImetrics/Physical/Metadata/System/SYSTEM_ALL_PROCEDURES
 - New: /shared/ASAssets/KPImetrics/Physical/Metadata/System/SYSTEM ALL RESOURCES OTHER
 - New: /shared/ASAssets/KPImetrics/Physical/Metadata/System/SYSTEM_ALL_TABLES

- New: /shared/ASAssets/KPImetrics/Physical/Metadata/System/SYSTEM_ALL_WSDL_OPERATIONS
- Mod: /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_ALL_RESOURCES
- Mod: /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METADATA_TABLES
- o Table structure change: METRICS_ALL_RESOURCES and METADATA_ALL_RESOURCES
- Mod.
- /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/04_pqCreateDrop_KPI_Tables_sqlserver_kpi2_tables
- o Mod
 - /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/10_pqCreateDrop_Metadata_Tables_sqlserver_metadat a tables
- Mod: /shared/ASAssets/KPImetrics_installation/DDL/Oracle/04_pqCreateDrop_KPI_Tables_oracle_kpi2_tables
- Mod:
 - /shared/ASAssets/KPImetrics_installation/DDL/Oracle/10_pqCreateDrop_Metadata_Tables_oracle_metadata_tables
- Deprecating the execution of storage of these 4 tables. Real-time access will be provided instead.
 - All related triggers and resources have been removed and the tables dropped.
 - METRICS_ACR_ABUOT populated nightly by Cache_AllCustom_AccessByUserOverTime / kpimetricsTrig_19_AllCustom_AccessByUserOverTime
 - Real-time view:
 - /services/databases/ASAssets/KPImetrics/AllCustomReports/AccessByUserOvertimeRT
 - METRICS_ACR_AROPOT populated nightly by Cache_AllCustom_ActiveResourcesOverPeriodOfTime / kpimetricsTrig 20 AllCustom ActiveResourcesOverPeriodOfTime
 - Real-time view
 - /services/databases/ASAssets/KPImetrics/AllCustomReports/ResourceAccessByUsersRT
 - METRICS_ACR_RCD populated nightly by Cache_AllCustom_ResourceCount_Details / kpimetricsTrig_21_AllCustom_ResourceCount_Details
 - Real-time view:
 - $/services/databases/ASAssets/KPImetrics/AllCustomReports/ResourceCount_DetailsRT$
 - METRICS_ACR_RCT populated nightly by Cache_AllCustom_ResourceCount_Total / kpimetricsTrig_22_AllCustom_ResourceCount_Total
 - Real-time view:
 - /services/databases/ASAssets/KPImetrics/AllCustomReports/ResourceCount_TotalRT
- Mod/New: Cluster gatekeeper for /pMETRICS_ALL_TABLES only allow 1 node in a cluster to execute at one time.
 - o Mod: /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMETRICS_ALL_TABLES_exec
 - o New: /shared/ASAssets/KPImetrics/Physical/Physical/Abstraction/P_OBJECT_IS_RUNNING
 - o New: /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/P_OBJECT_IS_RUNNING
 - Requires select access to dba_objects and v\$session
 - - Requires select access to sys.dm_exec_requests, sys.dm_exec_sql_text and sys.dm_exec_sessions
- · Mod: Fix metrics resources usage hist.resourceid null error and duplicate row metrics sessions hist error
 - /shared/ASAssets/KPImetrics installation/DDL/Oracle/06 pqCreateDrop KPI Plsql oracle data xfer script 800
 - o /shared/ASAssets/KPImetrics installation/DDL/SqlServer/06 pqCreateDrop KPI Plsql sqlserver data xfer script 800
- New: improve code maintainability by splitting code into separate procedures
 - o /shared/ASAssets/KPImetrics installation/DDL/Oracle/Helpers/06 oracle data xfer 800 P METRICS ALL TABLES
 - /shared/ASAssets/KPImetrics_installation/DDL/Oracle/Helpers/06_oracle_data_xfer_800_P_METRICS_ALL_TABLES_PR_INT
 - o /shared/ASAssets/KPImetrics_installation/DDL/Oracle/Helpers/06_oracle_data_xfer_800_P_METRICS_DELETE_COLLEC TION
 - /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/Helpers/06_sqlserver_data_xfer_800_P_FORMATTED_INTERV AL
 - o /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/Helpers/06_sqlserver_data_xfer_800_P_METRICS_ALL_TABLE_s
 - /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/Helpers/06_sqlserver_data_xfer_800_P_METRICS_ALL_TABLE
 S PRINT
 - /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/Helpers/06_sqlserver_data_xfer_800_P_METRICS_DELETE_COLLECTION
- Mod: retry loop added
 - o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_ALL_RESOURCES
 - o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_ALL_USERS
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_CIS_SYSTEM_RESOURCES
 - ${\tt o} {\tt /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_CPU_MEMORY_CHECKER}$
 - o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LOG_DISK
 - ${\color{blue} \circ} \hspace{0.5cm} / shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LOG_IO$
 - $o \hspace{0.5cm} / shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LOG_MEMORY$
 - ${\tt o} {\tt /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METADATA_TABLES}$

- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_SYS_CACHES
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_SYS_DATASOURCES
- Mod: general improvements
 - o /shared/ASAssets/KPImetrics/Configuration/pMetricsEventRegistrationSubscribe
 - /shared/ASAssets/KPImetrics/Configuration/pMetricsEventRegistrationUnsubscribe
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/executeMetricsSqlControlInsert
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMETRICS ALL TABLES exec
- Mod: [distribution count]
 - /shared/ASAssets/KPImetrics/Application/metrics/metrics count/metrics all min max starttime count
 - o /services/databases/ASAssets/KPImetrics/metrics/metrics_all_kpimetrics_table_counts
 - /shared/ASAssets/KPImetrics/Application/metrics/metrics count/metrics all kpimetrics table counts
 - o /shared/ASAssets/KPImetrics/Business/Logical/metrics/metrics all kpimetrics table counts
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache METADATA TABLES
 - o /shared/ASAssets/KPImetrics/Physical/Physical/KPI oracle/pqPartition metadata tables ROW DISTRIBUTION
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/pqPartition_metrics_history_other_tables_ROW_DISTRIBUTION
 - o /shared/ASAssets/KPImetrics/Physical/Physical/KPI oracle/pqPartition metrics history tables ROW DISTRIBUTION
 - o /shared/ASAssets/KPImetrics/Physical/Physical/KPI sqlserver/pqPartition metadata tables ROW DISTRIBUTION
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/pqPartition_metrics_history_other_tables_ROW_DISTRIBUT ION
 - $o \hspace{0.5cm} / shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/pqPartition_metrics_history_tables_ROW_DISTRIBUTION(SASSETS) \\$
- Del:
- /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/02_AnalyzeDiskSpace
- New: [analyze disk space]
 - o /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/02_AnalyzeDiskSpaceTable
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI sqlserver/03 AnalyzeDiskSpacePartitions order space
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/03_AnalyzeDiskSpacePartitions_order_table
 - /shared/ASAssets/KPImetrics installation/Maintenance/pMaintenanceDeleteHostnamePort
- Moved:
 - /shared/ASAssets/KPImetrics installation/Maintenance/pMaintenanceUpdateHostnamePort
- New: triggers/procedure
 - o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMetricsInsertDeleteCheck
 - o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_36_DBMSInsertCheck
 - $o \hspace{0.2cm} / shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_54_MetricsKpiPersistentStart$
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_55_MetricsKpiPersistentEnd
 /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_56_MetricsKpiTruncationStart
 - o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_57_MetricsKpiTruncationEnd
 - o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_58_MetricsKpiBackupStart
 - o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_59_MetricsKpiBackupEnd
 - o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig 60 MetricsKpiRestoreStart
 - o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_61_MetricsKpiRestoreEnd
- 2022-02-04: Deprecation Notice: Beginning May 2022
 - Please refer to the deprecation notice on Github in /Release/DEPRECATION NOTICE.txt
 - Going forward, KPImetrics will no longer integrate with LDAP data which was "optionally" used to augment the following tables:
 - metrics sessions hist
 - metrics resources usage hist
 - metrics requests hist

Release 2021Q402 [Nov 23 2021]

- Added processing for the SQL Explain Plan. new table created: metrics_requests_hist_sqlplan.
- New Procedure/Trigger:
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache SQL Plan
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_26_Cache_SQL_Plan
- New Table: metrics requests hist sqlplan
 - o /services/databases/ASAssets/KPImetrics/metrics/metrics requests hist sqlplan
 - o /shared/ASAssets/KPImetrics/Application/metrics_requests_hist_sqlplan/metrics_requests_hist_sqlplan
 - o /shared/ASAssets/KPImetrics/Business/Logical/metrics/metrics_requests_hist_sqlplan
 - o /shared/ASAssets/KPImetrics/Physical/Formatting/metrics requests hist sglplan
 - o /shared/ASAssets/KPImetrics/Physical/Physical/Abstraction/metrics_requests_hist_sqlplan
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/metrics_requests_hist_sqlplan
 /shared/ASAssets/KPImetrics/Physical/Physical/KPI sqlserver/metrics requests hist sqlplan
- New View: metrics requests hist sqlplan not processed
 - o /services/databases/ASAssets/KPImetrics/metrics requests hist sqlplan not processed

- /shared/ASAssets/KPImetrics/Application/metrics/metrics_requests_hist_sqlplan/metrics_requests_hist_sqlplan_n ot processed
- o /shared/ASAssets/KPImetrics/Business/Logical/metrics/metrics_requests_hist_sqlplan_not_processed
- /shared/ASAssets/KPImetrics/Physical/Formatting/metrics requests hist sqlplan not processed
- /shared/ASAssets/KPImetrics/Physical/Physical/Abstraction/metrics_requests_hist_sqlplan_not_processed
- /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/metrics_requests_hist_sqlplan_not_processed
- o /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/metrics_requests_hist_sqlplan_not_processed

Mod:

- /shared/ASAssets/KPImetrics/Customize/defaultTriggersToEnable -
- /shared/ASAssets/KPImetrics/Customize/upgrade_defaultTriggers_KPI add an entry for each environment: kpimetricsTrig_26_Cache_SQL_Plan=OFF|ON
- /shared/ASAssets/KPImetrics/Configuration/rebindPhysicalDatabaseType
- o /shared/ASAssets/KPImetrics_installation/Helpers/General/rebindPhysicalDatabaseType
- o /shared/ASAssets/KPImetrics installation/DDL/Oracle/04 pqCreateDrop KPI Tables oracle kpi1 tables
- /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/04_pqCreateDrop_KPI_Tables_sqlserver_kpi1_tables
- New/Mod: Installation
 - New-/shared/ASAssets/KPImetrics_installation/Helpers/Upgrade/modify_upgrade_defaultTriggers_KPI
 - Mod-/shared/ASAssets/KPImetrics_installation/3_Post_Upgrade
- Required To Do:
 - A new trigger was added to defaultTriggersToEnable and upgrade defaultTriggers KPI.
 - The customer should evaluate whether this should be ON or OFF for each environment: kpimetricsTrig 26 Cache SQL Plan=OFF|ON
 - Monitor closely to determine how much TDV resources it takes to get the SQL Explain Plan.

Release 2021Q401 [Nov 22 2021]

- Modified the update algorithm to fix missing data.
- MOD: Modified the update algorithm to fix missing data.
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_AllCustom_AccessByUserOverTime
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_AllCustom_ActiveResources OverPeriodOfTime
 - Rename EXCEPT ACR AccessByUserOverTime to ACR AccessByUserOverTime New
 - Rename EXCEPT ACR ActiveResourcesOverPeriodOfTime to ACR ActiveResourcesOverPeriodOfTime New
 - o /shared/ASAssets/KPImetrics/Configuration/rebindPhysicalDatabaseType
 - /shared/ASAssets/KPImetrics installation/Helpers/General/rebindPhysicalDatabaseType
- NEW: Modified the update algorithm to fix missing data.
 - $\ \ \, \circ \quad \ \ \, \text{/shared/ASAssets/KPImetrics/Physical/Physical/Abstraction/ACR_AccessByUserOverTime_Update} \\$
 - o /shared/ASAssets/KPImetrics/Physical/Physical/Abstraction/ACR_ActiveResourcesOverPeriodOfTime_Update
 - o /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/ACR_AccessByUserOverTime_Update
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/ACR_ActiveResourcesOverPeriodOfTime_Update /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/ACR_AccessByUserOverTime_Update
 - o /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/ACR_ActiveResourcesOverPeriodOfTime_Update
- MOD: For Oracle, it was not calculating requestdays correctly. Added ABS(ROUND(original_calculation,2))
 - /shared/ASAssets/KPImetrics/Business/Logical/requestMonitoring/vRequestsExpandedUD
 - o /shared/ASAssets/KPImetrics/Business/Logical/resourceUsage/vResourceUsageAll
 - /shared/ASAssets/KPImetrics/Business/Logical/resourceUsage/vResourceUsageUD
- MOD: For Oracle, a fix for filtering rows from metrics resources usage into stage
 - /shared/ASAssets/KPImetrics installation/DDL/Oracle/06 pqCreateDrop KPI Plsql oracle data xfer script 800
 - o /shared/ASAssets/KPImetrics_installation/DDL/Oracle/deprecated/06_pqCreateDrop_KPI_Plsql_oracle_data_xfer
- MOD: Cache_CIS_SYSTEM_RESOURCES Synchronized increments to 15 min for system memory/cpu and fixed p15increments to only calculate on completed time periods.
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/p15MinutesIncrements
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_04_Cache_CIS_SY STEM RESOURCES - changed time to 1:05 am
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_05_Cache_CPU_M EMORY CHECKER - changed to 15 min interval
 - /shared/ĀSAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_06_Cache_LOG_DI SK - changed to 15 min interval
 - /shared/AŠAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_07_Cache_LOG_IO
 changed to 15 min interval
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_08_Cache_LOG_MEMORY changed to 15 min interval

Release 2021Q400 [Sep 10 2021]

- Deprecated support for TDV 7.x as it has been 1 year since TIBCO dropped support for TDV 7.x.
- Fixes to pMETRICS_ALL_TABLES_exec and DDL in *data_xfer_script* w.r.t. references to sessionid and requestid as it may prevent data being transfered from collection to history on migrated data from a previous TDV Server into an upgraded TDV server due to resetting of sessionid and requestid values.
- MOD:
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMETRICS_ALL_TABLE S exec
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMETRICS_DELETE_C OLLECTION exec
 - /shared/ASAssets/KPImetrics/Physical/Physical/Abstraction/P METRICS ALL TABLES
 - o /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/P_METRICS_ALL_TABLES
 - o /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/P_METRICS_ALL_TABLES
 - o /shared/ASAssets/KPImetrics_installation/pMaintenanceUpdateHostnamePort
 - /shared/ASAssets/KPImetrics_installation/DDL/Oracle/06_pqCreateDrop_KPI_Plsql_oracle_data_xfer _script_800
 - /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/06_pqCreateDrop_KPI_Plsql_sqlserver_dat a xfer script 800
 - o /shared/ASAssets/KPImetrics installation/0 mappingConstants
- MOD: Installation DDL script changes
 - Deprecated all /shared/ASAssets/KPImetrics_installation/DDL: *_700 scripts
 - General modifications to all DDL scripts to allow better error handling and error messages to pass back to invoking procedure.
- MOD: Removed INTERVAL DAY TO SECOND which may cause an issue for large gaps in time for "F" failed resources where the workflowendtime was finally resolved.
 - /shared/ASAssets/KPImetrics/Business/Business/workflow/vCISWorkflow

Release 2021Q301 [Aug 06 2021]

- Added SELECT {OPTION FORCE_DISK} to the INSERT/SELECT statement for views/procedures in /Metadata/System folder.
- Fixes to pMETRICS_ALL_TABLES_exec and DDL in *data_xfer_script* w.r.t. references to sessionid and requestid as it may prevent data being transfered from collection to history on migrated data from a previous TDV Server into an upgraded TDV server due to resetting of sessionid and requestid values.
- MOD:
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_ALL_RESOURC ES
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache ALL USERS
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_CPU_MEMORY_ CHECKER
 - o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache LDAP PERSON
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache LOG DISK
 - o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LOG_IO
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache LOG MEMORY
 - $\circ \hspace{0.3cm} / shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_SYS_CACHES$
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_SYS_DATASOU RCES
 - /Customize/commonValues
 - /shared/ASAssets/KPImetrics/Customize/commonValues
 - Add the following to section "ignoreSysDatasourcePaths" in commonValues after "storeSysDatasourcePassword":
 - KPI metrics Ignore Sys Datasource Paths
 - This is used to ignore gathering info on the list of datasources provided.
 - The list is pipe-separated. A path may be a full datasource path or a wildcard path ending in %.
 - Example 1 full path: /shared/test/ds1|/shared/test/ds2
 - Example 2 wildcard: /shared/test/%
 - Notice how the /% indicates that any datasource found in /shared/test/ is ignored.

- Alternatively, /shared/test% would ignore /shared/test1/ds1 and /shared/test2/ds2
- DECLARE PUBLIC ignoreSysDatasourcePaths CONSTANT LONGVARCHAR DEFAULT ":

Release 2021Q300 [Jul 13 2021]

- Bug fixes. Moved pMaintenanceUpdateHostnamePort to KPImetrics installation.
- MOD: Fixed bug 'literal too long' when insert/update METRICS JOB DETAILS
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckDBMSScheduler Error
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pRebuildIndexes
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/pEndWorkflow
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMETRICS_ALL_TABLE
 S exec
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMETRICS_DELETE_C OLLECTION exec
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/verifyProcessRunningMetricsJobDe tails
- MOD: Add admin/composite "user defined" for each row in the filters
 - /shared/ASAssets/KPImetrics/Customize/pqInsert_METRICS_JOB_tables
- MOD: Upgrade Fix issue with deploying changes to Customize procedures
 - /shared/ASAssets/KPImetrics installation/3 Post Upgrade
- NEW:
 - /shared/ASAssets/KPImetrics installation/pMaintenanceUpdateHostnamePort
- DEL:
 - /shared/ASAssets/KPImetrics/Configuration/pMaintenanceUpdateHostnamePort

Release 2021Q200 [Jun 14 2021]

- Migration automation strategy. Moved commonValues.minVersion to getKPIVersion. Upgrade script modifications.
 - o NEW:
 - /shared/ASAssets/KPImetrics installation/Helpers/Install/createKPImetricsUser
 - /shared/ASAssets/KPImetrics/Configuration/modify defaultTriggers
 - /shared/ASAssets/KPImetrics/Customize/upgrade defaultTriggers KPI
 - MOD: Migration strategy
 - /shared/ASAssets/KPImetrics installation/2 Post Installation
 - /shared/ASAssets/KPImetrics_installation/3_Post_Upgrade
 - /shared/ASAssets/KPImetrics installation/backupCustomResources
 - /shared/ASAssets/KPImetrics_installation/validateUpgrade
 - MOD: Version
 - /shared/ASAssets/KPImetrics/Customize/commonValues
 - /shared/ASAssets/KPImetrics/Customize/pqInsert METRICS JOB tables
 - /shared/ASAssets/KPImetrics/getKPIVersion
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METRICS_SQL_R ESOURCE_LINEAGE
 - MOD: Removed dataSourceCatalogName from the SQL statement.
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/*
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/*
 - MOD: Convert TDV insert and update into native insert and update
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMETRICS_ALL_TABLES exec
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMETRICS_DELETE_COL LECTION exec
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pRebuildIndexes
 - o MOD: bug fix
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pValidateUpdateStatusTables
 - o DEL:
 - /shared/ASAssets/KPImetrics/Configuration/backupCustomResources use this instead: /shared/ASAssets/KPImetrics installation/backupCustomResources

Release 2021Q101 [Mar 24 2021]

- Index rebuild. Migration automation. Upgrade script modifications.
 - MOD: /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pRebuildIndexes
 - NEW: /shared/ASAssets/KPImetrics/Customize/commonValues.indexOptions
- General code modifications

 - NEW: /shared/ASAssets/KPImetrics/Configuration/modify_commonValues NEW: /shared/ASAssets/KPImetrics/Configuration/updateAllDatabaseTableStatistics
 - MOD: /shared/ASAssets/KPImetrics/Configuration/pMaintenanceUpdateHostnamePort
 - NEW: /shared/ASAssets/KPImetrics/Customize/upgrade_commonValues_KPI
 - MOD: /shared/ASAssets/KPImetrics/Configuration/AutomatedTableMaintenance/automatedMaintenanceDriver
 - MOD:
 - /shared/ASAssets/KPImetrics/Configuration/AutomatedTableMaintenance/04_pqCreateDrop_KPI_Tables_oracle_kpi2_tables MOD:
 - /shared/ASAssets/KPImetrics/Configuration/AutomatedTableMaintenance/04_pqCreateDrop_KPI_Tables_sqlserver_kpi2_tables
 - MOD: /shared/ASAssets/KPImetrics/Customize/pqInsert_METRICS_JOB_tables add a version row
 - MOD: /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LOG_DISK rollup EVENT_TIME MOD: /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LOG_IO - rollup EVENT_TIME
 - MOD: /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache LOG MEMORY rollup EVENT TIME
 - MOD: /shared/ASAssets/KPImetrics/Physical/Physical/Abstraction/GetSequenceValueProc
 - MOD: /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/ExecuteTableStatistics
 - MOD: /shared/ASAssets/KPImetrics/Physical/Physical/Abstraction/ExecuteTableStatistics
 - MOD: The majority of /ClusterSafeCache procedures that invoked ExecuteTableStatistics to add databaseType to the input 0 params
 - . MOD: /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/getDMLSelectResponse
 - MOD: /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/P_METADATA_TRUNCATE_PARTITION Fixed bug with deriving the boundary_definition date. High value may contain TO_DATE or TIMEStAMP.
 - MOD: /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/P_METRICS_TRUNCATE_PARTITION Fixed bug with derivng the boundary_definition date. High value may contain TO_DATE or TIMEStAMP.

 MOD: /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/pqPartition_metadata_tables_ROW_DISTRIBUTION

 - MOD:
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/pqPartition_metrics_history_other_tables_ROW_DISTRIBUTION MOD: /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/pqPartition_metrics_history_tables_ROW_DISTRIBUTION

 - MOD: /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/P_METADATA_TRUNCATE_PARTITION
 MOD: /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/P_METRICS_TRUNCATE_PARTITION
 MOD: /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/pqPartition_metadata_tables_ROW_DISTRIBUTION
 - MOD: 0
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/pqPartition_metrics_history_other_tables_ROW_DISTRIBUTION MOD
 - 0
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI sqlserver/pqPartition metrics history tables ROW DISTRIBUTIONFolder Restructure - added sub-folders to make it easier to find views. Moved views into applicable folder.
 - NEW: /shared/ASAssets/KPImetrics/Application/metrics/metrics count
 - NEW: /shared/ASAssets/KPImetrics/Application/metrics/metrics_requests_collection
 - NEW: /shared/ASAssets/KPImetrics/Application/metrics/metrics_requests_collection
 NEW: /shared/ASAssets/KPImetrics/Application/metrics/metrics_resources_usage_collection
 - NEW: /shared/ASAssets/KPImetrics/Application/metrics/metrics_resources_usage_hist
 - NEW: /shared/ASAssets/KPImetrics/Application/metrics/metrics_sessions_collection
 - NEW: /shared/ASAssets/KPImetrics/Application/metrics/metrics_sessions_hist
- added table owner= to query:
 - MOD: /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/P_METADATA_TRUNCATE_PARTITION added table_owner=
 - 0 MOD: /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/pqPartition_metadata_tables_ROW_DISTRIBUTION

0

- /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/pqPartition_metrics_history_other_tables_ROW_DISTRIBUTION MOD: /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/pqPartition_metrics_history_tables_ROW_DISTRIBUTION
- Updated KPImetrics Install scripts for migration automation and upgrade:
 - MOD: /shared/ASAssets/KPImetrics_installation/0_commonValues
 - NEW: /shared/ASAssets/KPImetrics_installation/0_mappingConstants MOD: /shared/ASAssets/KPImetrics_installation/2_Post_Installation

 - MOD: /shared/ASAssets/KPImetrics_installation/3_Post_Upgrade rebuilt MOD: /shared/ASAssets/KPImetrics_installation/getKPIInstallationVersion

 - NEW: All scripts in /shared/ASAssets/KPImetrics_installation/Helpers/Database
 NEW: shared/ASAssets/KPImetrics_installation/Helpers/General/rebindInstallPackageProcedures
 - NEW: /shared/ASAssets/KPImetrics_installation/Helpers/Upgrade/mapTables
 - NEW: /shared/ASAssets/KPImetrics_installation/Helpers/Upgrade/migrateTableData
 - NEW: /shared/ASAssets/KPImetrics_installation/Helpers/Upgrade/migrateTableDataSqlStatement
 - MOD: /shared/ASAssets/KPImetrics_installation/Helpers/Upgrade/modify_pqInsert_METADATA_Constants NEW: /shared/ASAssets/KPImetrics_installation/Helpers/Upgrade/modify_pqInsert_METADATA_Constants_prep_sections
 - NEW: /shared/ASAssets/KPImetrics_installation/Helpers/Upgrade/modify_pqInsert_METADATA_Constants_process
 - NEW: All scripts in /shared/ASAssets/KPImetrics_installation/Helpers/Upgrade/Custom
 - MOD: All scripts in /shared/ASAssets/KPImetrics_installation/DDL/SqlServer
 - MOD: All scripts in /shared/ASAssets/KPImetrics installation/DDL/Oracle 0
- Removed:
 - /shared/ASAssets/KPImetrics/Physical/Physical/Abstraction/ExecuteTableStatistics
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI oracle/00 fix

- /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/00_fix
- o /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/00_ExecuteDMLVarcharResult
- /shared/ASAssets/KPImetrics/Physical/Physical/KPI sqlserver/00 ExecuteDMLVarcharResult
- o /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/GetSequenceValue
- o /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/GetSequenceValue
- o /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/00_ExecuteDMLIndex
- o /shared/ASAssets/KPImetrics/Physical/Physical/KPI sqlserver/00 ExecuteDMLIndex
- o /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/00_ExecuteDMLRowDist
- /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/00_ExecuteDMLRowDistMetrics
- /shared/ASAssets/KPImetrics/Physical/Physical/KPI sqlserver/00 ExecuteDMLRowDist

Release 2021Q100 [Jan 25 2021]

- Updated for changes to /shared/ASAssets/Utilities/repository/reintrospectDataSource.
 - /shared/ASAssets/KPImetrics/Configuration/AutomatedTableMaintenance/04_pqCreateDrop_KPI_Ta bles_oracle_kpi2_tables
 - /shared/ASAssets/KPImetrics/Configuration/AutomatedTableMaintenance/04_pqCreateDrop_KPI_Ta bles sqlserver kpi2 tables
 - /shared/ASAssets/KPImetrics_installation/DDL/DataValidation/Fix_METRICS_SYS_CACHES_migrat e_sqlserver
 - /shared/ASAssets/KPImetrics_installation/2_Post_Installation
 - /shared/ASAssets/KPImetrics_installation/3_Post_Upgrade
 - Almost all scripts in /shared/ASAssets/KPImetrics installation/DDL/Oracle/
 - Almost all scripts in /shared/ASAssets/KPImetrics installation/DDL/Oracle/Upgrade
 - Almost all scripts in /shared/ASAssets/KPImetrics_installation/DDL/SqlServer
 - Almost all scripts in /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/Upgrade
- Updated to replace calls to BigintToTimestamp with FROM UNIXTIME(long/1000)
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/getDataSourceAttributesNormalize
 d
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/getResourceAttributesNormalized
- /shared/ASAssets/KPImetrics/Customize/commonValues
 - ECLARE PUBLIC minVersion CONSTANT DOUBLE DEFAULT 2021.100;

Release 2020Q401 [Dec 14 2020]

- Modification to how statistics are gathered. Collection table index changes.
- · Manually drop these indexes for Oracle
 - o DROP INDEX "schema"."metrics_resources_usage_idx5"
 - o DROP INDEX "schema"."metrics_requests_idx2"
- Metadata View modified to use left outer join instead of inner join to display all groups that have no users.
 - /shared/ASAssets/KPImetrics/Application/metadata/reportMetadataPrivilegeUsers
- Collection table index changes.

- /shared/ASAssets/KPImetrics_installation/DDL/Oracle/02_pqCreateDrop_KPI_Tables_oracle_metrics_collection_tables_700
- /shared/ASAssets/KPImetrics_installation/DDL/Oracle/02_pqCreateDrop_KPI_Tables_oracle_metrics_collection_tables_800
- /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/02_pqCreateDrop_KPI_Tables_sqlserver_metrics_collection_tables_700
- /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/02_pqCreateDrop_KPI_Tables_sqlserver_metrics collection tables 800
- Modification to how statistics are gathered.
 - /shared/ASAssets/KPImetrics_installation/DDL/Oracle/06_pqCreateDrop_KPI_Plsql_oracle_data_xfe r_script_700
 - /shared/ASAssets/KPImetrics_installation/DDL/Oracle/06_pqCreateDrop_KPI_Plsql_oracle_data_xfe r_script_800
 - /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/06_pqCreateDrop_KPI_Plsql_sqlserver_da ta_xfer_script_700
 - /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/06_pqCreateDrop_KPI_Plsql_sqlserver_da ta_xfer_script_800
 - /System/ClusterSafeCache
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_ALL_R ESOURCES
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_ALL_U SERS
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_AllCust om_AccessByUserOverTime
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_AllCust om ActiveResourcesOverPeriodOfTime
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_AllCust om_ResourceCount_Details
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_AllCust om ResourceCount Total
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_CIS_SY STEM RESOURCES
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_CPU_M EMORY_CHECKER
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LDAP_ PERSON
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LOG_D ISK
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LOG_I

- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LOG_M EMORY
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METAD
 ATA TABLES
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METRI CS_SQL_REQUEST_EXEC
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METRI CS SQL REQUEST EXEC ADHOC
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METRI CS_SQL_REQUEST_EXEC_REPROCESS
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METRI CS_SQL_RESOURCE_LINEAGE
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_SYS_C ACHES
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_SYS_D ATASOURCES
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckDBMSS chedulerError
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMetricsDelete Check

/System/Helpers

- NEW: /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/ExecuteTableStatistics
- NEW: /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/ExecuteTableStatisticsRul
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/gateKeeper
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/gateKeeperCheck
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/gateKeeperCheckWait
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/pStartWorkflow
- /Customize/commonValues
 - /shared/ASAssets/KPImetrics/Customize/commonValues
 - Add the following to commonValues:
 - DECLARE PUBLIC executeStatisticsCollectionRule CONSTANT VARCHAR(255) DEFAULT 'OFF';
 - DECLARE PUBLIC executeStatisticsStageRule CONSTANT VARCHAR(255) DEFAULT 'ON';
 - DECLARE PUBLIC executeStatisticsHistoryRule CONSTANT VARCHAR(255) DEFAULT 'LAST';

Release 2020Q400 [Nov 10 2020]

- · Fixed for transaction code blocks.
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_ALL_RESOURC
 ES
 - o /shared/ASAssets/KPImetrics/Customize/pqInsert_METRICS_EVENT_REGISTRATION
 - /shared/ASAssets/KPImetrics/Customize/pqInsert METRICS JOB tables
 - /shared/ASAssets/KPImetrics/Configuration/updateTriggers
- Fix for getting nodehost and nodeport in emails when database is not available.
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/pStartWorkflow
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/pEndWorkflow
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_ALL_RESOURC
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache ALL USERS
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_AllCustom_Acce ssByUserOverTime
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_AllCustom_ActiveResourcesOverPeriodOfTime
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_AllCustom_ResourceCount_Details
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_AllCustom_ResourceCount_Total
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_CIS_SYSTEM_ RESOURCES
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_CPU_MEMORY _CHECKER
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LDAP_PERSON
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache LOG DISK
 - o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache LOG IO
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache LOG MEMORY
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METADATA_TA BLES
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METRICS_SQL REQUEST_EXEC
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METRICS_SQL REQUEST_EXEC_ADHOC
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METRICS_SQL _REQUEST_EXEC_REPROCESS

- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METRICS_SQL _RESOURCE_LINEAGE
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache SYS CACHES
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_SYS_DATASOU RCES
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckCISWorkflowStatusFail
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckExceedMemoryPercentRequests
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckLongRunningRe quests
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckMetricsActivity
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMETRICS_ALL_TABL ES exec
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMETRICS_DELETE_C OLLECTION exec
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMetricsDeleteCheck
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pPurgeData
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pRebuildIndexes
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pValidateUpdateStatusT ables
- CommonValues Modified to create static variables for Windows and UNIX:
 CPUCheckerCommandPathWindows, memoryCheckerCommandPathWindows,
 CPUCheckerCommandPathUNIX, memoryCheckerCommandPathUNIX
 - /shared/ASAssets/KPImetrics/Customize/commonValues
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/CPU MEMORY CHECKER
- Restructure code to be at the bottom and all modifications at the top to be easier to work with.
 - /shared/ASAssets/KPImetrics/Customize/pqInsert_METRICS_JOB_tables
- Modified KPImetrics_installation procedures
 - /shared/ASAssets/KPImetrics installation/3 Post Upgrade
 - /shared/ASAssets/KPImetrics_installation/Helpers/Upgrade/modify_pqInsert_METRICS_EVENT_RE GISTRATION
 - /shared/ASAssets/KPImetrics installation/Helpers/Upgrade/modify pqInsert METRICS JOB tables

Release 2020Q300 [Aug 27 2020]

- Fixed issue with Cache SYS CACHES throwing an exception with VARIANT.
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_SYS_CACHES add space to VARIANT if null

- Fixed Oracle install bug w.r.t. 32-character resource name limit PK names. Modified KPImetrics_Installation to reduce size of PK to 32 or less including double quotes
 - /shared/ASAssets/KPImetrics_installation/DDL/Oracle/03_pqCreateDrop_KPI_Tables_oracle_metric s_history_tables_700
 - /shared/ASAssets/KPImetrics_installation/DDL/Oracle/03_pqCreateDrop_KPI_Tables_oracle_metric s_history_tables_800
 - /shared/ASAssets/KPImetrics_installation/DDL/Oracle/04_pqCreateDrop_KPI_Tables_oracle_kpi1_t ables
- Enhanced pCheckLongRunningRequests to only send the initial email when a long running event occurs and not duplicate the message if other events happen while the first event is still going on.
- Added NOTIFCATION STATUS column
 - /shared/ASAssets/KPImetrics_installation/DDL/Oracle/04_pqCreateDrop_KPI_Tables_oracle_kpi1_t ables
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/pUpdateEventRegLog
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckCISWorkflowStatusFail
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckDBMSScheduler Frror
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckExceedMemoryPercentRequests
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckLongRunningRequests
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckMetricsActivity
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMetricsSystemEvent
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/pUpdateEventRegLog

Release 2020Q203 [June 25 2020]

- Implemented daily (interval) Table Partitioning scheme for all tables. Changed monthly to daily.
- Added automated table maintenance during updateTriggers to add tables if nodes are added to a cluster for METRICS_ALL_USERS and METRICS_ALL_RESOURCES.
- Added DataValidation and Fix_1_NullHostPort and Fix_2_NonUniqueRows for the following tables with
 potential null hostname and non-unque rows.
- METRICS_CIS_SYSTEM_RESOURCES, METRICS_LOG_DISK, METRICS_LOG_IO, METRICS LOG MEMORY
- Modified these views to produce a single unique row.
 - o /shared/ASAssets/KPImetrics/Physical/Metadata/System/LOG_DISK
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/LOG_IO
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/LOG_MEMORY

- Modified updgrade scripts to migrate data to interval paritioning.
- Added a new published resource: /services/databases/ASAssets/KPImetrics/metrics_tables_row_distribution
- Added partitioning to the following tables. Added either "partition" or "PARTITION" column.
 - Truncate partition is governed by commonValues.purgeHistory
 - metrics requests hist changed from monthly to interval/daily partitioning.
 - metrics resources usage hist changed from monthly to interval/daily partitioning.
 - metrics sessions hist changed from monthly to interval/daily partitioning.
 - Truncate partition is governed by commonValues.purgeWorkflowData
 - METRICS_CIS_WORKFLOW
 - METRICS_JOB_DETAILS
 - METRICS_EVENT_REG_LOG
 - METRICS_EVENT_REG_LOG_LINEAGE
 - METRICS_JOB_DELETE_CHECK
 - METRICS_SQL_CONTROL_LOG
 - Truncate partition is governed by commonValues.purgeResourceUsage
 - METRICS CIS SYSTEM RESOURCES
 - METRICS_CPU_MEMORY_CHECKER
 - METRICS_LOG_DISK
 - METRICS_LOG_IO
 - METRICS LOG MEMORY
 - METRICS_SYS_CACHES
 - METRICS_SYS_DATASOURCES
 - METRICS_ACR_ABUOT
 - METRICS ACR AROPOT
 - METRICS_ACR_RCD
 - METRICS ACR RCT
 - Truncate partition is governed by commonValues.purgeSQLRequests
 - METRICS SQL REQUEST
 - METRICS_SQL_RESOURCE
 - METRICS_SQL_COLUMNS
 - METRICS_SQL_RESOURCE_LINEAGE
- Modified all procedures associated with the above views to accommodate partitioning.

- Modified all views associated with the above tables to add a "partition" column which also affects the published resources.
- Requires Utilities 2020Q202.

Release 2020Q202 [May 26 2020]

- Removed all [Arch] tables as partitioning for each table has been added so that the current and historical data will reside in the same table in an interval of 366 days.
- Only supporing SQL Server 2016 or SQL Server Azure due to native SQL requirements "truncate table with(partitions(n)). The ony datasource that is used is KPI_sqlserver_2016. The other 2 datasources KPI_sqlserver_2012 and KPI_sqlserver_2014 have been dropped. This was necessary to simplify this offering.
- Revised strategy for pRebuildIndexes. Don't turn off indexes. Have other processes wait until it is finished
 using a gatekeeper methodology.
- Requires Utilities 2020Q201.

Release 2020Q201 [Apr 6 2020]

- Release 2020Q201
 - Patch includes all /System/ClusterSafeCache and /System/Helpers
 - Added check for a dedicated time keeper node so as to not execute procedures on it.
 - Fixed issue with recognizing a cluster when perform DELETE or TRUNCATE properly.
 - Fixed Cache METADATA TABLES insert into METADATA PRIVILEGES duplicate key.
 - Redo how the gateKeeper/gateKeeperCheck procedures detect cluster processing and wait for all nodes to complete.
 - Potential issue: If there is a cluster break and the nodes sub-partition and then there may be different number of nodes in each sub-partition which will surely throw off the computations in the gateKeeperCheck procedure.
 - o Published new resources:
 - /services/databases/ASAssets/KPImetrics/metadata/reportMetadataAllCount
 - /services/databases/ASAssets/KPImetrics/metadata/reportMetadataAllCountArch
 - /services/databases/ASAssets/KPImetrics/metrics/metrics_requests_groupby_date
 - /services/databases/ASAssets/KPImetrics/metrics/metrics_requests_groupby_nodehost_no deport
 - /services/databases/ASAssets/KPImetrics/metrics_resources_usage_groupby_date
 - /services/databases/ASAssets/KPImetrics/metrics_resources_usage_groupby_node host nodeport
 - /services/databases/ASAssets/KPImetrics/metrics sessions groupby date
 - /services/databases/ASAssets/KPImetrics/metrics/metrics_sessions_groupby_nodehost_no deport
 - Upgrade Changes:

- modify_LDAP_PERSON Added a list of columns to be removed from LDAP_PERSON in order to simplify and reduce overhead. See removeColumnList.
- 04_pqCreateDrop_KPI_Tables_sqlserver_kpi2_tables Create multiple tables for METRICS_ALL_RESOURCES, METRICS_ALL_USERS and LDAP_PERSON that will be used for loading and access. 1) Keep tables accessible all the time while loading new data.
 2) Increase parallel NODE load and efficiency by removing the gatekeeper.

Release 2020Q200 [Mar 12 2020]

- Release 2020Q200
 - Includes 2020.102 + Requires Utilities 2020Q200 to synchronize with migrated utilities required by KPImetrics.
 - Installation MOVE OR UPDATED THE FOLLOWING TO Utilities 2020Q200
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/freeUnusedMemory
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/getBasicResourceCursor_ PROCEDURE CURSOR
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/getBasicResourceCursor_ SQL_TABLE
 - /shared/ASAssets/KPImetrics installation/Helpers/Utilities/copyResource
 - /shared/ASAssets/KPImetrics installation/Helpers/Utilities/getConstantV2
 - /shared/ASAssets/KPImetrics_installation/Helpers/Utilities/getTrigger
 - /shared/ASAssets/KPImetrics_installation/Helpers/Utilities/updateResourceEnabled
 - /shared/ASAssets/KPImetrics_installation/Helpers/Utilities/updateUser
 - Cache_METADATA_TABLES Updated to use Utilities 2020Q200 instead of KPImetrics local version of Utilities mentioned below.
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/freeUnusedMemory
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/getBasicResourceCursor_ PROCEDURE CURSOR
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/getBasicResourceCursor_ SQL_TABLE
- Includes patch 2020Q102 Modified to alleviate SQL Server blocking
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/00_ExecuteDMLSelect generic select and response
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/00_ExecuteDMLSelect generic select and response
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/pStartWorkflow use getTableCount()
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/gateKeeperCheck use getTableCount()

- /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/getBasicResourceCursor_PROCE DURE_CURSOR
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/getBasicResourceCursor_SQL_TA BLE
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/getResourceAttributesNormalized
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/executeMetricsSqlControl
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/pUpdateEventRegLog
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/verifyProcessRunningMetricsJobD etails
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METADATA_TA BLES
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMETRICS_ALL_TABL ES_exec
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMETRICS_DELETE_C OLLECTION_exec
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pValidateUpdateStatusTables
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckDBMSScheduler
 Error
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pRebuildIndexes
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pValidateUpdateStatusTables
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckCISWorkflowStat usFail
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckMetricsActivity
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pPurgeData
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_ALL_RESOURC ES
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache ALL USERS
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_AllCustom_Acce ssByUserOverTime
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_AllCustom_ActiveResourcesOverPeriodOfTime
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_CIS_SYSTEM_R ESOURCES
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache LOG DISK
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LOG_IO
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LOG_MEMORY

- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_SYS_DATASOU RCES
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METRICS_SQL_ REQUEST_EXEC
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METRICS_SQL_ REQUEST_EXEC_ADHOC
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METRICS_SQL_ REQUEST_EXEC_REPROCESS
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METRICS_SQL_ RESOURCE_LINEAGE
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ALL_RESOURCES
 - fixed bug for RESOURCE_NAME, PARENT_PATH, RESOURCE_PATH where name contains a / and requires double quotes around name.
- /shared/ASAssets/KPImetrics/Business/Business/requests/pExceededMemoryPercentRequests
- /shared/ASAssets/KPImetrics/Business/Business/requests/pLongRunningRequests

Release 2020Q101 [Feb 25 2020]

- General release goals
 - KPI Metadata improvements. Purge concurrency improvements.
 - Redefine Strategy simplify processing
 - Dropped table METRICS_ALL_RESOURCES_STG no longer needed for staging ALL_RESOURCES data.
 - METRICS_ALL_RESOURCES will no longer maintaining a resource history. Only 1 copy of the current ALL RESOURCES will be cached at any one time.
 - METRICS_ALL_USERS will no longer maintain user history. Only 1 copy of the current ALL_USERS will be cached at any one time.
 - METRICS_LDAP_PERSON will no longer maintain ldap history. Only 1 copy of the current ldap users will be cached at any one time.
 - Alternative strategy Cache_METADATA_TABLES will allow the configuration and archival of ALL_RESOURCES and ALL_USERS over time.
 - Published resource changes:
 - KPImetrics.resource.vAllResourcesMax dropped
 - KPImetrics.resource.vAllResourcesHist renamed to vAllResources retrieve current ALL_RESOURCES
 - KPImetrics.resource.METRICS_ALL_RESOURCES_groupby_nodehost_nodeport
 renamed to vAllResources_GroupBy_NodehostNodeport
 - KPImetrics.users.vAllUsersMax dropped
 - KPImetrics.users.vAllUsersHist renamed to vAllUsers retrieve current ALL USERS

KPI Metrics:

- Added a new table METRICS JOB DELETE CHECK status check for the TDV metrics delete.
- Added new procedure -/shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMetricsDeleteCheck
- Added new trigger -/shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_35_DBMS DeleteCheck
- ALTER TABLE "{0}"."METRICS_ACR_RCD" RENAME COLUMN "loadtime" TO "loaddate"
- ALTER TABLE "{0}"."METRICS ACR RCT" RENAME COLUMN "loadtime" TO "loaddate"
- ALTER TABLE "{0}"."METRICS_LDAP_PERSON" RENAME COLUMN "loadtime" TO "loaddate"
- ALTER TABLE "{0}". "METRICS_ALL_USERS" RENAME COLUMN "LOAD_TIME" TO "LOAD_DATE"
- ALTER TABLE "{0}"."METRICS_ALL_RESOURCES" RENAME COLUMN "LOAD_TIME" TO "LOAD_DATE"
- ALTER TABLE "{0}"."METRICS_ALL_RESOURCES" RENAME COLUMN "RESOURCEPATH" TO "RESOURCE PATH"
- ALTER TABLE "{0}"."METRICS_ALL_RESOURCES" RENAME COLUMN "OWNER" TO "OWNER NAME"
- ALTER TABLE "{0}"."METRICS_ALL_RESOURCES" ADD "RESOURCE_LINK_TYPE" VARCHAR2(40)
- ALTER TABLE "{0}"."METRICS ALL RESOURCES" ADD "OWNER DOMAIN" VARCHAR2(255)
- ALTER TABLE "{0}"."METRICS_ALL_RESOURCES" ADD "ANNOTATION" CLOB
- ALTER TABLE "{0}"."METRICS_ALL_RESOURCES" MODIFY "RESOURCE_TYPE" VARCHAR2(40)
- ALTER TABLE "{0}"."METRICS_ALL_RESOURCES" MODIFY "RESOURCE_SUBTYPE" VARCHAR2(40)
- ALTER TABLE "{0}". "METRICS ALL RESOURCES" MODIFY "GUID" VARCHAR2(255)

KPI Metadata:

- Added a new table METADATA_ALL_RESOURCES improve processing performance.
 cache from existing METRICS ALL RESOURCES.
- Added a new table METADATA_ALL_PRIVILEGES improve processing performance.
- Added a new table METADATA_ALL_USERS_GROUPS[_ARCH] improve processing performance.
- Added a new table METADATA_PRIVILEGE_USER[_ARCH] provides a many-to-many between METADATA_PRIVILEGE and METADATA_ALL_USER_GROUPS.
- Added column ANNOTATION to METADATA_RESOURCE[_ARCH]
- Added column ANNOTATION to METADATA RESOURCE COLUMN[ARCH]
- Added column ANNOTATION to METADATA_DATASOURCE[_ARCH]
- Added column PRIVILEGE_ID, LAYER_TYPE, NAME_ID to METADATA PRIVILEGE[ARCH]
- Added column MESSAGE to METADATA_POLICY_ASSIGNMENT when a policy assignment points to a resource path that no longer exists, the log the message.

- Added column ASSIGN_PRIVILEGES to METADATA_CONST_LAYERS[_ARCH]
- Dropped column USER_NAME in METADATA_PRIVILEGE[_ARCH] in favor of the join table METADATA_PRIVILEGE_USER
- Cache_METADATA_TABLES modified to use more efficient processing of ALL_RESOURCES and ALL_PRIVILEGES. Modified for column changes.

Default Triggers

- Defaulted kpimetricsTrig_10_Cache_METRICS_SQL_REQUEST to OFF due to intensive processing. Customer may turn on if required.
- Defaulted kpimetricsTrig_23_Cache_METRICS_SQL_RESOURCE_LINEAGE to OFF due to intensive processing. Customer may turn on if required.
- Defaulted kpimetricsTrig_33_DeleteCollection to OFF due to blocking issues with SQL Server. Customer should not turn this on.

o Override Triggers

- kpimetricsTrig_16_PurgeHistoryData override schedule to once a week SAT at 2:30 AM
- kpimetricsTrig_34_DBMSRebuildIndexes override schedule to once a week SUN at 3:00 AM
- kpimetricsTrig_01_Cache_ALL_RESOURCES override schedule to every 2 hours at 1:00 AM
- kpimetricsTrig_02_Cache_ALL_USERS override schedule to every 2 hours at 1:00 AM
- kpimetricsTrig_30_DBMSScheduler override schedule to every 2 hours at 1:30 AM (coincide with 30 min later than kpimetricsTrig_01 and kpimetricsTrig_02)
- kpimetricsTrig_31_DBMSSchedulerError override schedule to every 2 hours at 2:00 AM (coincide with 30 min later than kpimetricsTrig_30)
- kpimetricsTrig_40_Cache_METADATA_TABLES override schedule to every 1 day at 11:30 PM (coincide to run 30 min later than kpimetricsTrig_01_Cache_ALL_RESOURCES because it uses its cached data)

New Triggers / Procedure

- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig _50_MetricsPersistenceFailure
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig
 _51_MetricsTruncateFailure
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig _52_MetricsBackupFailure
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig
 MetricsRestoreFailure
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMetricsSystem/Event
- Updated commonValues.eventRegistrationTypeList with new event 'METRICS_FAILURE'

- Updated /shared/ASAssets/KPImetrics/Customize/pqInsert_METRICS_EVENT_REGISTRATION with documentation on new event 'METRICS FAILURE'
- Updated /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/pGetEmailSubscriptions
- Updated /shared/ASAssets/KPImetrics/Configuration/pMetricsEventRegistrationList
- Updated /shared/ASAssets/KPImetrics/Configuration/pMetricsEventRegistrationSubscribe
- Updated /shared/ASAssets/KPImetrics/Configuration/pMetricsEventRegistrationUnsubscribe
- Updated /shared/ASAssets/KPImetrics/Customize/defaultTriggersToEnable
- Modified pCheckDBMSSchedulerError to put a tracking row in METRICS_JOB_DETAILS instead of using pStartWorkflow/pEndWorkflow.
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckDBMSS chedulerError
- Purge Data (other than the 3 core metrics tables and METADATA tables)
 - commonValues.EX_SUSPENDED added a public exception that gets used by the following:
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/pStartWorkflow
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache ALL RESOURCES
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_ALL_USERS
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_AllCustom_AccessByUser OverTime
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_AllCustom_ActiveResourc esOverPeriodOfTime
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_AllCustom_ResourceCount
 t Details
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_AllCustom_ResourceCount_Total
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_CIS_SYSTEM_RESOUR
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_CPU_MEMORY_CHECK ER
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LDAP_PERSON
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LOG_DISK
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LOG_IO
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LOG_MEMORY
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METRICS_SQL_REQUES
 T EXEC
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METRICS_SQL_REQUES
 T_EXEC_ADHOC
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METRICS_SQL_REQUES
 T EXEC REPROCESS

- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METRICS_SQL_RESOU RCE_LINEAGE
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_SYS_CACHES
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache SYS DATASOURCES
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckCISWorkflowStatusFail
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckExceedMemoryPercentRe quests
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckLongRunningRequests
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pCheckMetricsActivity

Release 2020Q100 [Jan 23 2020]

- General release goals
 - o Created a data dictionary document KPImetrics Data Dictionary v1.1.pdf
 - Changed delete strategy for P METRICS ALL TABLES
 - For both Oracle and SQL Server do not delete collection tables from KPImetrics. Only DV metrics will control this.
 - Allow DV metrics to delete only to eliminate SQL Server concurrency issue with simultaneous INSERTS and DELETES.
 - Note: Oracle does not have this issue but modified with same behavior for consistency in strategies.
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMETRICS_AL L_TABLES_exec
 - /shared/ASAssets/KPImetrics/Physical/Physical/Abstraction/P METRICS ALL TABLES
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/P_METRICS_ALL_TABLES
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/P_METRICS_ALL_TABLES
 - /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/06_pqCreateDrop_KPI_Plsql_sqls erver_data_xfer_script_700
 - /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/06_pqCreateDrop_KPI_Plsql_sqls erver_data_xfer_script_800
 - /shared/ASAssets/KPImetrics/Configuration/updateTriggers Modified to force kpimetricsTrig_33_DeleteCollection to be OFF.
 - Added transaction blocks around database SQL statements
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pPARTITION_ MANAGER exec
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/pqPartition_metrics_history_table
 es ADD
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/pqPartition_metrics_history_table
 es DROP
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/pqPartition_metrics_history_t ables ADD

- /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/pqPartition_metrics_history_t ables DROP
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/pUpdateEventRegLog
- Added transaction blocks around database SQL statements
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pPARTITION_MANAGER_exec
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/pqPartition_metrics_history_tables_ADD
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI oracle/pqPartition metrics history tables DROP
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/pqPartition_metrics_history_tables_ADD
 - /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/pqPartition_metrics_history_tables_DROP
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/pUpdateEventRegLog

Documentation

- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache SYS DATASOURCES
- Installation scripts
 - /shared/ASAssets/KPImetrics_installation/3_Post_Upgrade
 - /shared/ASAssets/KPImetrics_installation/backupCustomResources Save trigger metdata
 - /shared/ASAssets/KPImetrics_installation/Helpers/General/getTrigger
 - /shared/ASAssets/KPImetrics installation/Helpers/General/getTriggerMetadata
 - /shared/ASAssets/KPImetrics installation/Helpers/General/turnOffAllTriggers
- Missing Column
 - ../Physical/Formatting/METRICS_EVENT_REGISTRATION added EXCLUDE_TEXT
 - ./Business/Business/requests/vMetricsSqlRequestUniqueSqlTemplatesByUser added "domain"
 - ../Business/Business/requests/vMetricsSqlRequestUniqueSqlTemplatesByUserByDate added "domain"
 - ./Business/Business/requests/vMetricsSqlRequestUniqueSqlTemplatesClobByUser added "domain"
 - ../Business/Business/requests/vMetricsSqlRequestUniqueSqlTemplatesClobByUserByDate added "domain"
- Modified column names to lower case style
 - /shared/ASAssets/KPImetrics/Application/workflow/vJobDetailsStatusSummary
- Moved to KPImetricsAdmin catalog
 - /services/databases/ASAssets/KPImetrics/configuration/updateTriggers

Release 2019Q402 [Dec 23 2019]

- · General release goals
 - o Improved SQL Server database stability
 - Improved script execution for a cluster to reduce deadlocks
 - o Metrics data transfer procedure batching changes SQL Server
 - o Better debug and error handling
 - o Moved all /DDL procedures to KPImetrics installation and out of KPImetrics

- Revamped the upgrade scripts to be easier to execute
- Refactored customized resources to a single folder /KPImetrics/Customize

Refactored Code

- Moved /KPImetrics/Configuration/commonValues to /KPImetrics/Customize/commonValues
 - added dataTransferBatchDeleteMax
 - allowed SQL Server to use dataTransferBatchInsertMax and dataTransferBatchUpdateMax are used by SQL Server.
- Moved /KPImetrics/Configuration/defaultTriggersToEnable to /KPImetrics/Customize/defaultTriggersToEnable
 - Added trigger kpimetricsTrig_25_ExecuteMetricsSqlControl
- Moved /KPImetrics/Physical/Metadata/System/LDAP PERSON to /KPImetrics/Customize/LDAP PERSON
- Moved all DDL scripts to /shared/ASAssets/KPImetrics installation folder except the following:
- Moved /DDL/Common/07_pqInsert_KPI_Tables_METRICS_JOB_tables to /Customize/pqInsert_METRICS_JOB_tables and modified the structure.
- Moved /DDL/Common/08_pqInsert_KPI_Tables_METRICS_EVENT_REGISTRATION to /Customize/pqInsert_METRICS_EVENT_REGISTRATION
- Moved /DDL/Common/10_pqInsert_Metadata_Tables_METADATA_Constants to /Customize/pqInsert_METADATA_Constants
- Moved /DDL/Oracle/03_pqCreateDrop_KPI_Tables_oracle_metrics_history_tables_DROP to /KPI_oracle/pqPartition_metrics_history_tables_DROP
- Moved /DDL/Oracle/03_pqCreateDrop_KPI_Tables_oracle_metrics_history_tables_ADD to /KPI_oracle/pqPartition_metrics_history_tables_ADD
- Moved /DDL/Oracle/03_pqCreateDrop_KPI_Tables_oracle_metrics_history_tables_ROW_DISTRIBUTION to /KPI_oracle/pqPartition_metrics_history_tables_ROW_DISTRIBUTION
- Moved /DDL/SqlServer/03_pqCreateDrop_KPI_Tables_sqlserver_metrics_history_tables_DROP to /KPI_sqlserver/pqPartition_metrics_history_tables_DROP
- Moved /DDL/SqlServer/03_pqCreateDrop_KPI_Tables_sqlserver_metrics_history_tables_ADD to /KPI_sqlserver/pqPartition_metrics_history_tables_ADD
- Moved /DDL/SqlServer/03_pqCreateDrop_KPI_Tables_sqlserver_metrics_history_tables_ROW_DISTRIBUTION to /KPI_sqlserver/pqPartition_metrics_history_tables_ROW_DISTRIBUTION

Modified Metadata DDL scripts

- /shared/ASAssets/KPImetrics_installation/DDL/Oracle/04_pqCreateDrop_KPI_Tables_oracle_kpi_tables
- /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/04_pqCreateDrop_KPI_Tables_sqlserver_kpi_tables
- /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/06_pqCreateDrop_KPI_Plsql_sqlserver_data_xfer_script_700
- /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/06_pqCreateDrop_KPI_Plsql_sqlserver_data_xfer_script_800

Added DDL Upgrade scripts

- /shared/ASAssets/KPImetrics_installation/DDL/Oracle/Upgrade/upgrade_2019Q401_to_2019Q402_pqCreateDrop_Tables_oracle
- /shared/ASAssets/KPImetrics_installation/DDL/SqlServer/Upgrade/upgrade_2019Q401_to_2019Q402_pqCreateDrop_Tables_sqlserver
- $\circ \hspace{20mm} / shared/ASAssets/KPImetrics_installation/DDL/UpgradeResources/upgrade_2019Q401_to_2019Q402_07 InsertJobTables$
- /shared/ASAssets/KPImetrics_installation/DDL/UpgradeResources/upgrade_2019Q401_to_2019Q402_commonValues
- o /shared/ASAssets/KPImetrics_installationDDL/UpgradeResources/upgrade_2019Q401_to_2019Q402_defaultTriggersToEnable

Error Handling output to log

- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/pStartWorkflow
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/pEndWorkflow
- o All procedures in /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache

Added new resources

- /services/databases/ASAssets/KPImetrics/systemUsage/vDatasourceCurrentStatusChanges
- o /shared/ASAssets/KPImetrics/Application/systemUsage/vDatasourceCurrentStatusChanges
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_25_ExecuteMetricsSqlControl
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pExecuteMetricsSqlControl
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/executeMetricsSqlControl
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/getServerNames
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/getServerNamesXSLT
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/verifyProcessRunningMetricsJobDetails
- /shared/ASAssets/KPImetrics/Physical/Physical/Abstraction/METRICS_HISTORY_TABLES_ROW_DISTRIBUTION
- /shared/ASAssets/KPImetrics/Physical/Formatting/METRICS HISTORY TABLES ROW DISTRIBUTION
- $\circ \hspace{0.5cm} / shared/ASAssets/KPImetrics/Business/Logical/metrics/metrics_history_tables_row_distribution$
- o /shared/ASAssets/KPImetrics/Application/metrics/metrics_history_tables_row_distribution
- /services/databases/ASAssets/KPImetrics/metrics/metrics_history_tables_row_distribution

Added new database columns and modified Formatting layer views to bring in new column

- METRICS_CIS_WORKFLOW: ERROR_MESSASGE, WORKFLOW_START_TIME_STR
 - Support better error handling and updating. Allows the entire error trace to be saved into ERROR_MESSAGE.
- METRICS_JOB_FILTERS: RESOURCE_PATH, RESOURCE_TYPE, PATH_TYPE
 - Support filtering based on the resource path and type
- METRICS_JOB_DETAILS: REQ_END_DATE, CORRELATION_ID, PROCESSED_NODE_HOST, PROCESSED_NODE_PORT, PROCESSED_START_DATE, ERROR_MESSAGE

Modified

- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pRebuildIndexes
 - Synchronized execution with pMETRICS_ALL_TABLES_exec and pMETRICS_DELETE_COLLECTION_exec
 - For Oracle, dynamic rebuild based on what is in Oracle catalogs
- shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMETRICS ALL TABLES exec
 - Synchronized execution with pRebuildIndexes and pMETRICS_DELETE_COLLECTION_exec
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMETRICS_DELETE_COLLECTION_exec
 - Synchronized execution with pMETRICS_ALL_TABLES_exec and pRebuildIndexes
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_SYS_DATASOURCES
 - Removed dataSourceType and dataSourceSubtype as it is not used.
 - Fixed the logic to only test a datasource once.
 - Added logic to insert a record for a deleted datasource instead of updating the most recent one.
- o /shared/ASAssets/KPImetrics/Configuration/pMaintenanceUpdateHostnamePort
- Modified Input Parameters

- $\circ \hspace{0.5cm} / shared/ASAssets/KPImetrics/Physical/Physical/Abstraction/P_METRICS_ALL_TABLES$
- /shared/ASAssets/KPImetrics/Physical/Physical/Abstraction/P_METRICS_DELETE_COLLECTION
- $\circ \hspace{0.5cm} / shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/P_METRICS_ALL_TABLES$
- /shared/ASAssets/KPImetrics/Physical/Physical/KPI_oracle/P_METRICS_DELETE_COLLECTION
- /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/P_METRICS_ALL_TABLES
- o /shared/ASAssets/KPImetrics/Physical/Physical/KPI_sqlserver/P_METRICS_DELETE_COLLECTION

Modified to remove the projection and put in a "SELECT *"

- /shared/ASAssets/KPImetrics/Business/Logical/metrics/metrics_requests
- o /shared/ASAssets/KPImetrics/Business/Logical/metrics/metrics_resources_usage
- /shared/ASAssets/KPImetrics/Business/Logical/metrics/metrics_sessions

Removed dataSourceType and dataSourceSubtype as it is not used:

- o /shared/ASAssets/KPImetrics_installation/2_Post_Installation
- o /shared/ASAssets/KPImetrics/Business/Logical/metrics/metrics_all_kpimetrics_table_counts
- /shared/ASAssets/KPImetrics/Configuration/rebindPhysicalAbstraction
- /shared/ASAssets/KPImetrics/Configuration/rebindPhysicalDatabaseType
- o /shared/ASAssets/KPImetrics/Configuration/updateTriggers
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache ALL RESOURCES
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache ALL USERS
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache AllCustom AccessByUserOverTime
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_AllCustom_ActiveResourcesOverPeriodOfTime
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_AllCustom_ResourceCount_Details
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_AllCustom_ResourceCount_Total
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_CIS_SYSTEM_RESOURCES
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_CPU_MEMORY_CHECKER
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LDAP_PERSON
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LOG_DISK
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LOG_IO
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_LOG_MEMORY
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METADATA_TABLES
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METRICS_SQL_REQUEST_EXEC
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METRICS_SQL_REQUEST_EXEC_ADHOC
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METRICS_SQL_REQUEST_EXEC_REPROCESS
- $\circ \qquad \text{/shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METRICS_SQL_RESOURCE_LINEAGE}$
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_SYS_CACHES
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_SYS_DATASOURCES
- $\circ \hspace{0.5cm} / shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pPARTITION_MANAGER_execution (Control of the Control of t$
- $\circ \hspace{0.5cm} / shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pRebuildIndexes and the control of the con$
- All resources in /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/Oracle
- $\circ \qquad \hbox{All resource in /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/SqlServer}$

· Debug param added to procedure input

- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_00_CheckMetricsActivityDebug
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_01_Cache_ALL_RESOURCES
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_02_Cache_ALL_USERS
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_03_Cache_LDAP_PERSON
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_04_Cache_CIS_SYSTEM_RESOURCES
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_05_Cache_CPU_MEMORY_CHECKER
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_06_Cache_LOG_DISK
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_07_Cache_LOG_IO
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_08_Cache_LOG_MEMORY
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig 10 Cache METRICS SQL REQUEST
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_11_Cache_METRICS_SQL_REQUEST_REP ROCESS
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig 12 Cache SYS CACHES
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig 13 Cache SYS DATASOURCES
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_14_CheckCISWorkflowStatusFail
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_15_CheckMetricsActivity
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_16_PurgeHistoryData
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_17_CheckExceedMemoryPercentRequests
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_18_CheckLongRunningRequests
- $o \qquad / shared/ASAssets/KPI metrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_19_AllCustom_AccessByUserOverTimeTriggers/kpimetricsTrig_19_AllCustom_AccessByUserOverTimeTriggers/kpimetricsTrig_19_AllCustom_AccessByUserOverTimeTriggers/kpimetricsTrig_19_AllCustom_AccessByUserOverTimeTriggers/kpimetricsTrig_19_AllCustom_AccessByUserOverTimeTriggers/kpimetricsTrig_19_AllCustom_AccessByUserOverTimeTriggers/kpimetricsTrig_19_AllCustom_AccessByUserOverTimeTriggers/kpimetricsTrig_19_AllCustom_AccessByUserOverTimeTriggers/kpimetricsTrig_19_AllCustom_AccessByUserOverTimeTriggers/kpimetricsTrig_19_AllCustom_AccessByUserOverTimeTriggers/kpimetricsTrig_19_AllCustom_AccessByUserOverTimeTriggers/kpimetricsTrig_19_AllCustom_AccessByUserOverTimeTriggers/kpimetricsTrig_19_AllCustom_AccessByUserOverTimeTriggers/kpimetricsTrig_19_AllCustom_AccessByUserOverTimeTriggers/kpimetricsTriggers/kpimetri$
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_20_AllCustom_ActiveResourcesOverPeriodOf Time
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_21_AllCustom_ResourceCount_Details
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_23_Cache_METRICS_SQL_RESOURCE_LIN EAGE
- o /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_30_DBMSScheduler
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_31_DBMSSchedulerError
- /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeTriggers/kpimetricsTrig_33_DeleteCollection

Release 2019Q401 [Nov 6 2019]

- Modified Metadata DDL scripts
 - Added LINEAGE ORDER to METADATA NON COMPLIANT
 - o Modified column METADATA_PRIVILEGE.USER NAME VARCHAR(255)
 - /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/Oracle/10_pqCreateDrop_Metadata_Tables_o racle metadata tables
 - /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/SqlServer/10_pqCreateDrop_Metadata_Table s_sqlserver_metadata_tables
 - /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/Common/10_pqInsert_Metadata_Tables_MET
 ADATA Constants Documentation/formatting changes

- /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/Oracle/Upgrade/upgrade_2019Q400_to_2019 Q401_pqCreateDrop_Tables_oracle
- /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/SqlServer/Upgrade/upgrade_2019Q400_to_20
 19Q401 pqCreateDrop Tables sqlserver
- Consolidated upgrade scripts to simplify upgrade process
 - Consolidated upgrade_8000Q000_pqCreateDrop_Final_[oracle|sqlserver] into upgrade_2019Q101_to_2019Q102_pqCreateDrop_Tables_[oracle|sqlserver]
 - Consolidated upgrade_9000Q000_pqUpdate_METRICS_ALL_RESOURCES into upgrade_2018Q103_to_2018Q300_pqCreateDrop_Tables_[oracle|sqlserver]
 - Consolidated upgrade_9001Q000_pqUpdate_metrics_hist_tables into upgrade_2018Q401_to_2019Q100_pqCreateDrop_Tables_[oracle|sqlserver]
- Fixed Datasource Lineage
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/Cache_METADATA_TA BLES
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/getDatasourceDependencyMetadat
 a new
- Created a new Resource/Datasource Lineage report
 - /shared/ASAssets/KPImetrics/Application/metadata/reportResourceDatasourceLineage new report
 - /services/databases/ASAssets/KPImetrics/metadata/reportResourceDatasourceLineage
- Modified Non-Compliant report
 - /shared/ASAssets/KPImetrics/Application/metadata/reportMetadataNonCompliantLayers
- New column LINEAGE ORDER
 - /shared/ASAssets/KPImetrics/Physical/Metadata/KPI_oracle_[11g|12c]/CIS_KPI/METADATA_NON_ COMPLIANT
 - /shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_[2012|2014]/CIS_KPI/dbo/METADA TA_NON_COMPLIANT_ARCH
 - /shared/ASAssets/KPImetrics/Physical/Formatting/METADATA NON COMPLIANT
 - $\circ \hspace{0.3cm} / shared/ASAssets/KPImetrics/Business/Logical/metadata/vMetadataNonCompliant$
 - o /shared/ASAssets/KPImetrics/Business/Business/metadata/vMetadataNonCompliant
 - /shared/ASAssets/KPImetrics/Application/metadata/vMetadataNonCompliant
 - /services/databases/ASAssets/KPImetrics/metadata/vMetadataNonCompliant
 - /shared/ASAssets/KPImetrics/Physical/Metadata/KPI_oracle_[11g|12c]/CIS_KPI/METADATA_NON_ COMPLIANT
 - /shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_[2012|2014]/CIS_KPI/dbo/METADA
 TA NON COMPLIANT ARCH
 - /shared/ASAssets/KPImetrics/Physical/Formatting/METADATA NON COMPLIANT ARCH

- o /shared/ASAssets/KPImetrics/Business/Logical/metadata/vMetadataNonCompliantArch
- o /shared/ASAssets/KPImetrics/Application/metadata/vMetadataNonCompliantArch
- /shared/ASAssets/KPImetrics/Business/Business/metadata/vMetadataNonCompliantArch
- /services/databases/ASAssets/KPImetrics/metadata/vMetadataNonCompliantArch
- Fixed missing columns LINEAGE ORDER and MESSAGE
 - /shared/ASAssets/KPImetrics/Physical/Formatting/METADATA_RESOURCE_LINEAGE missing columns
 - /shared/ASAssets/KPImetrics/Business/Logical/metadata/vMetadataResourceLineage
 - /shared/ASAssets/KPImetrics/Business/Business/metadata/vMetadataResourceLineage
 - /shared/ASAssets/KPImetrics/Application/metadata/vMetadataResourceLineage
 - /services/databases/ASAssets/KPImetrics/metadata/vMetadataResourceLineage
 - /shared/ASAssets/KPImetrics/Physical/Formatting/METADATA_RESOURCE_LINEAGE_ARCH missing columns
 - o /shared/ASAssets/KPImetrics/Business/Logical/metadata/vMetadataResourceLineageArch
 - /shared/ASAssets/KPImetrics/Business/Business/metadata/vMetadataResourceLineageArch
 - /shared/ASAssets/KPImetrics/Application/metadata/vMetadataResourceLineageArch
 - /services/databases/ASAssets/KPImetrics/metadata/vMetadataResourceLineageArch
- Modified column METADATA_PRIVILEGE.USER_NAME VARCHAR(255)
 - /shared/ASAssets/KPImetrics/Physical/Metadata/KPI_oracle_[11g|12c]/CIS_KPI/METADATA_PRIVIL EGE
 - /shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_[2012|2014]/CIS_KPI/dbo/METADA TA_PRIVILEGE_ARCH

 - /shared/ASAssets/KPImetrics/Physical/Metadata/KPI_sqlserver_[2012|2014]/CIS_KPI/dbo/METADA TA_PRIVILEGE_ARCH

Release 2019Q400 [Oct 24 2019]

- SQL Server Schema qualifer in DDL scripts. Oracle DDL modifications.
- Fixed bugs
 - o /shared/ASAssets/KPImetrics installation/Helpers/createTables
- Modified documentation header
 - o /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/Oracle/03_pqCreateDrop_KPI_Tables_oracle_metrics_history_tables_700
 - shared/ASAssets/KPImetrics/Physical/Metadata/DDL/Oracle/03_pqCreateDrop_KPI_Tables_oracle_metrics_history_tables_800
 - /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/Oracle/03_pqCreateDrop_KPI_Tables_oracle_metrics_history_tables_ADD modified algorithm to add partitions from last one to current date+1.

- o /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/Oracle/03_pqCreateDrop_KPI_Tables_oracle_metrics_history_tables_DROP
- Added schema qualifier to SQL Server Scripts
 - /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/SqlServer/02_pqCreateDrop_KPI_Tables_sqlserver_metrics_collection_stage_tables
 700
 - /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/SqlServer/02_pqCreateDrop_KPI_Tables_sqlserver_metrics_collection_stage_tables
 800
 - /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/SqlServer/03_pqCreateDrop_KPI_Tables_sqlserver_metrics_history_tables_700
 - o /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/SqlServer/03_pqCreateDrop_KPI_Tables_sqlserver_metrics_history_tables_800
 - /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/SqlServer/03_pqCreateDrop_KPI_Tables_sqlserver_metrics_history_tables_ADD modified algorithm to add partitions from last one to current date+1.
 - /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/SqlServer/03_pqCreateDrop_KPI_Tables_sqlserver_metrics_history_tables_DROP
 - /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/SqlServer/04_pqCreateDrop_KPI_Tables_sqlserver_kpi_tables
 - /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/SqlServer/10_pqCreateDrop_Metadata_Tables_sqlserver_metadata_tables
- Modified existing DDL by adding additional where clause into the delete statements.
 - /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/Oracle/06_pqCreateDrop_KPI_Plsql_oracle_data_xfer_script_700
 - /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/Oracle/06_pqCreateDrop_KPI_Plsql_oracle_data_xfer_script_800
 - o /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/SqlServer/06_pqCreateDrop_KPI_Plsql_sqlserver_data_xfer_script_700
 - $\circ \hspace{0.2in} / shared/ASAssets/KPImetrics/Physical/Metadata/DDL/SqlServer/06_pqCreateDrop_KPl_Plsql_sqlserver_data_xfer_script_800$

Release 2019Q301 [Aug 31 2019]

- Added new feature for capturing metadata [kpiMetadata].
 - Added several new tables startig with METADATA <tablename>.
 - o Added /metadata in all layers including a published schema called metadata.
 - Added Cache_METADATA_TABLES and kpimetricsTrig_40_Cache_METADATA_TABLES to process.
 - Added 10_pqCreateDrop_Metadata_Tables_oracle_metadata_tables
 - Added 10_pqCreateDrop_Metadata_Tables_sqlserver_metadata_tables
 - Added 10 pgInsert Metadata Tables METADATA Constants
 - Added upgrade script upgrade 2019Q200 to 2019Q301 pqCreateDrop Tables oracle
 - Added upgrade script upgrade_2019Q200_to_2019Q301_pqCreateDrop_Tables_sqlserver
 - Created new documentation
- Fixed various bugs. Added purge history rule for no partitioning use case. Added a DDL upgrade script for history tables.
 - Added "purgeHistory" rule for no partitioning which is used by pMETRICS_ALL_TABLES_exec.
 - /shared/ASAssets/KPImetrics/Configuration/commonValues
 - Added the ability to delete history rows when there is no partitioning configured. partitionNumber=0.
 - o Prior to this, partitioning was required in order to drop partitions to delete history data.
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pMETRICS_AL L_TABLES_exec

- Modified validation of METRICS_JOB_DETAILS by using jobTableList to search for various JOB TABLE NAME variations.
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pValidateUpdat eStatusTables
- Modified pPurgeData to add the missing METRICS_JOD_DETAILS to purgeWorkflowData rule
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pPurgeData
- Modified to pRebuildIndexes to invoke getVersion resolving an issue when the version is 8.x
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/pRebuildIndexes
- Modified commonValues and removed all custom functions.
- Modified each procedure that invokes that commonValues variable to call the explicit path of the custom function.
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/CPU_MEMORY_CHECKER
 - /shared/ASAssets/KPImetrics/Business/Business/requests/pExceededMemoryPercentRequests
 - /shared/ASAssets/KPImetrics/Business/Business/requests/pLongRunningRequests
 - /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/sqlParserV1_2/ utility/parseColumnExpression
- Added DDL upgrade script:
 - /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/Oracle/Upgrade/upgrade_9001Q000_ pqUpdate_metrics_hist_tables
 - /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/SqlServer/Upgrade/upgrade_9001Q0 00_pqUpdate_metrics_hist_tables
- Modified existing DDL:
 - /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/Oracle/Upgrade/upgrade_8000Q000_ pqCreateDrop_Final_oracle - added input executeDDL
 - /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/Oracle/Upgrade/upgrade_9000Q000_ pqUpdate METRICS ALL RESOURCES - added input executeDDL
 - /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/Oracle/06_pqCreateDrop_KPI_Plsql_ oracle_data_xfer_script_700 - ensure null or empty string userKeyTransform and domainKeyTransform get default values
 - /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/Oracle/06_pqCreateDrop_KPI_Plsql_ oracle_data_xfer_script_800 - ensure null or empty string userKeyTransform and domainKeyTransform get default values
 - /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/SqlServer/Upgrade/upgrade_8000Q0 00_pqCreateDrop_Final_sqlserver - added input executeDDL
 - /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/SqlServer/Upgrade/upgrade_9000Q0 00_pqUpdate_METRICS_ALL_RESOURCES - added input executeDDL

- /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/SqlServer/03_pqCreateDrop_KPI_Ta bles_sqlserver_metrics_history_tables_700 - fixed bug with replace: REPLACE(sqlRow.sqlStatement, 'ALL TO ([{HISTORY}])', 'ALL TO ([PRIMARY])');
- /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/SqlServer/03_pqCreateDrop_KPI_Ta bles_sqlserver_metrics_history_tables_800 - fixed bug with replace: REPLACE(sqlRow.sqlStatement, 'ALL TO ([{HISTORY}])', 'ALL TO ([PRIMARY])');
- /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/SqlServer/03_pqCreateDrop_KPI_Ta bles_sqlserver_metrics_history_tables_ADD - fixed bug with replace: REPLACE(sqlRow.sqlStatement, 'NEXT USED [{HISTORY}]', 'NEXT USED [PRIMARY]');
- /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/SqlServer/06_pqCreateDrop_KPI_Pls ql_sqlserver_data_xfer_script_700 - ensure null or empty string userKeyTransform and domainKeyTransform get default values
- /shared/ASAssets/KPImetrics/Physical/Metadata/DDL/SqlServer/06_pqCreateDrop_KPI_Pls ql_sqlserver_data_xfer_script_800 - ensure null or empty string userKeyTransform and domainKeyTransform get default values.

Release 2019Q300 [Aug 5 2019]

- · Release Objective: Bug fixes.
 - Fixed bug where pRebuildIndexes fails. Fixed with admin interface invocation.
 - Indexes do not start rebuilding until all processare are inactive.
 - For METRICS_CIS_WORKFLOW, WORKFLOW_STATUS <> 'I'
 - For METRICS JOB DETAILS, STATUS <> 'BEGIN JOB'
 - The following two new resources act in conjunction with pRebuildIndexes. They are used to ensure that the METRICS_CIS_WORKFLOW and METRICS_JOB_DETAILS do not have in progress status when there are no active processes. It is the responsibility of each node in a cluster to manage its own status records.
 - For METRICS_CIS_WORKFLOW where WORKFLOW_STATUS='I' and there are no active processes, update WORKFLOW_STATUS='F' and set MESSAGE='Failure for unknown reason.'.
 - For METRICS_JOB_DETAILS where STATUS='BEGIN JOB' and there are no active processes, update STATUS='FAILURE' and set ADDITIONAL_INFO='Failure for unknown reason.'.
 - Added new trigger /ClusterSafeTriggers/kpimetricsTrig_24_ValidateUpdateStatusTables
 - Added new procedure /ClusterSafeCache/pValidateUpdateStatusTables
 - Modified defaultTriggersToEnable to add the new trigger
 "kpimetricsTrig 24 ValidateUpdateStatusTables" to the list.

Release 2019Q200 [Jun 13 2019]

- Release Objective: Migrated some basic scripts to the Utilities.
 - Requires Utilities 2019.200 version
 - Migrated getCodedString to the Utilities

- o Migrated encodedValues to the Utilities
- Migrated findOpenClosePair to the Utilities
- Rebound extractSQL to numOccurrences in Utilities
- Rebound parseArithmeticOperators to numOccurrences in Utilities
- o Rebound parseSqlScriptComplex to numOccurrences in Utilities
- Rebound to getCurrentTimestamp in Utilities.
- Removed /shared/ASAssets/KPImetrics/Physical/Metadata/System/Helpers/getCurrentTimestamp.
- pPurgeData Put explicit BEGIN blocks around each DELETE statement in order to fix a blocking condition with METRICS_CIS_WORKFLOW.
- Modified METRICS_SYS_CACHES.STATUS from VARCHAR(20) to VARCHAR(24) for TDV 8.1
- sqlParserV1_2 Converted all VECTORS to XML as VECTOR parameters has been associated with memory leaks.

Release 2019Q102 [Mar 12 2019]

- Release Objective: Added upgrade scripts. Added "group" to metrics_requests and metrics_sessions for 7.0 to bring up to par with 8.0.
 - Added upgrade scripts starting with 2018Q103 for oracle and sqlserver.
 - Allows upgrading from 2018Q103 or higher on 7.x to 7.x.
 - Allows upgrading from 2018Q103 or higher on 7.x to 8.x.
 - Added indexes for METRICS_CIS_WORKFLOW:
 - METRICS_CIS_WORKFLOW_IDX1 and METRICS_CIS_WORKFLOW_IDX2
 - Modified schemas [collection, staging] for 7.0.
 - "group" was added to metrics_sessions and metrics_requests for 7.0.
 - Modified schemas [history] to work with 8.0 modified metrics schemas.
 - "group" was added to metrics_sessions_hist and metrics_requests_hist for 7.0 as "user" and "domain" already exists.
 - Modified Oracle DDL Scripts:
 - Modified 02_pqCreateDrop_KPI_Tables_oracle_metrics_collection_stage_tables_700 to add "group"
 - Modified 03_pqCreateDrop_KPI_Tables_oracle_metrics_history_tables_700 to add "group"
 - Modified 06_pqCreateDrop_KPI_Plsql_oracle_data_xfer_script_700 to add "group"
 - Modified SQL Server DDL Scripts:
 - Modified 02_pqCreateDrop_KPI_Tables_sqlserver_metrics_collection_stage_tables_700 to add "group"
 - Modified 03_pqCreateDrop_KPI_Tables_sqlserver_metrics_history_tables_700 to add "group"

- Modified 06 pqCreateDrop KPI Plsql sqlserver data xfer script 700 to add "group"
- Renamed updateImpacteResources to updateImpactedResources (missing d in Impacted).
- Modified /shared/ASAssets/KPImetrics installation to account for updateImpactedResources.
- Modified all the scripts in /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache that contained "INSERT INTO" statements to specify INSERT and SELECT columns and not use SELECT *.

Release 2019Q101 [Jan 30 2019]

- Release Objective: Added support for DV 8.0 as the out-of-the-box metrics tables [metrics_requests and metrics_sessions] added user, domain and group. KPI installation automatically checks for DV version 7.0 or 8.0 and executes the appropriate scripts to install KPImetrics.
 - Bug Fixes:
 - sqlParserV1_2 Various scripts. Fixed a bug when server
 IGNORE_TRAILING_SPACES=true. Changed INSTR functions with a trailing space to use
 SELECT {OPTION IGNORE_TRAILING_SPACES="FALSE"} INSTR(sqlScript, ' ')
 - Modified KPImetrics installation scripts to install for 7.0 or 8.0 automatically.
 - Modified schemas [collection, staging, history] to work with 8.0 modified metrics schemas. The columns "user", "domain", "group" were added to metrics sessions and metrics requests for 8.0.
 - Modified Oracle DDL Scripts:
 - Renamed 02_pqCreateDrop_KPI_Tables_oracle_metrics_collection_stage_tables to
 02 pqCreateDrop KPI Tables oracle metrics collection stage tables 700
 - Added 02 pqCreateDrop KPI Tables oracle metrics collection stage tables 800
 - Renamed 02_pqCreateDrop_KPI_Tables_oracle_metrics_collection_tables to 02_pqCreateDrop_KPI_Tables_oracle_metrics_collection_tables_700
 - Added 02 pqCreateDrop KPI Tables oracle metrics collection tables 800
 - Renamed 03_pqCreateDrop_KPI_Tables_oracle_metrics_history_tables to 03_pqCreateDrop_KPI_Tables_oracle_metrics_history_tables_700
 - Added 03_pqCreateDrop_KPI_Tables_oracle_metrics_history_tables_800
 - Renamed 06_pqCreateDrop_KPI_Plsql_oracle_data_xfer_script to 06_pqCreateDrop_KPI_Plsql_oracle_data_xfer_script_700
 - Added 06_pqCreateDrop_KPI_Plsql_oracle_data_xfer_script_800
 - Modified SQL Server DDL Scripts:
 - Renamed 02_pqCreateDrop_KPI_Tables_oracle_metrics_collection_stage_tables to
 02_pqCreateDrop_KPI_Tables_oracle_metrics_collection_stage_tables_700
 - Renamed 02_pqCreateDrop_KPI_Tables_sqlserver_metrics_collection_stage_tables to
 02_pqCreateDrop_KPI_Tables_sqlserver_metrics_collection_stage_tables_700
 - Added 02 pqCreateDrop KPI Tables sqlserver metrics collection stage tables 800
 - Renamed 02_pqCreateDrop_KPI_Tables_sqlserver_metrics_collection_tables to
 02_pqCreateDrop_KPI_Tables_sqlserver_metrics_collection_tables_700

- Added 02_pqCreateDrop_KPI_Tables_sqlserver_metrics_collection_tables_800
- Renamed 03_pqCreateDrop_KPI_Tables_sqlserver_metrics_history_tables to 03_pqCreateDrop_KPI_Tables_sqlserver_metrics_history_tables_700
- Added 03_pqCreateDrop_KPI_Tables_sqlserver_metrics_history_tables_800
- Renamed 06_pqCreateDrop_KPI_Plsql_sqlserver_data_xfer_script to 06_pqCreateDrop_KPI_Plsql_sqlserver_data_xfer_script_700
- Added 06_pqCreateDrop_KPI_Plsql_sqlserver_data_xfer_script_800

Release 2019Q100 [Jan 7 2019]

- Release Objective: Fixed installation scripts. Added "domainkey" to METRICS_LDAP_PERSON and history tables.
 - Fixed KPImetrics installation scripts.
 - Modified rebindPhysicalDatabaseType to work with installation scripts.
 - Modified Cache_CPU_MEMORY_CHECKER to put double quotes around windows path.
 - o Added domainkey column to qualify a user. The same user may exist in different domains.
 - **** NOTE ****
 - [Perform these actions in order for an existing installation of KPImetrics which contains history data.]
 - [This is not required for new installations.]
 - 1. If the history tables already exist then use alter statements found in /Physical/Physical/KPI [oracle|sqlserver]/00 fix
 - The alter statements will also modify METRICS_LDAP_PERSON
 - 2. It is required to drop and recreate the staging tables using 02 pqCreateDrop KPI Tables
 - 3. It is required to drop and recreate the stored procedure using 06 pqCreateDrop KPI Plsql ...
 - 4. Update the history tables "domainkey" column with the domain name for all rows.
 - Update the METRICS_LDAP_PERSON table "domainkey" column with the domain name for all rows.
 - Provided the ability to map to multiple LDAP domains
 - Renamed data source /shared/ASAssets/KPImetrics/Physical/Metadata/LDAP to LDAP1
 - Added data source /shared/ASAssets/KPImetrics/Physical/Metadata/LDAP2
 - Modified /Metadata/System/LDAP_PERSON added "domainkey".
 - Modified /Metadata/System/ClusterSafeCache/Cache_LDAP_PERSON
 - Modified /Physical/Formatting/metrics resources usage hist added "domainkey".
 - Modified /Business/Logical/userUsage/vLdapPerson added "domainkey" to the where clause to qualify "user".

- Modified /shared/ASAssets/KPImetrics/Business/Business/requests/ pExceededMemoryPercentRequests to return domain name.
- Modified /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/ pCheckExceedMemoryPercentRequests to qualify userkey with domainkey.
- Modified /shared/ASAssets/KPImetrics/Business/Business/requests/ pLongRunningRequests to return domain name.
- Modified /shared/ASAssets/KPImetrics/Physical/Metadata/System/ClusterSafeCache/ pCheckLongRunningRequests to qualify userkey with domainkey.
- Modified /Metadata/System/ClusterSafeCache/ Cache_AllCustom_AccessByUserOverTime
 - added "domain" to the where clause to qualify "user".
- Modified /Physical/Physical/KPI_oracle/00_fix alter statements for tables.
- Modified /Physical/Physical/KPI_sqlserver/00_fix alter statements for tables.
- Modified /Metadata/DDL/Oracle/
 02_pqCreateDrop_KPI_Tables_oracle_metrics_collection_stage_tables
 - added "domainkey" to metrics_requests_stg, metrics_resources_usage_stg, metrics_sessions_stg
- Modified /Metadata/DDL/Oracle/
 03_pqCreateDrop_KPI_Tables_oracle_metrics_history_tables
 - added "domainkey" to metrics_requests_hist, metrics_resources_usage_hist, metrics_sessions_hist
- Modified /Metadata/DDL/Oracle/04_pqCreateDrop_KPI_Tables_oracle_kpi_tables
 - added "domainkey" to METRICS LDAP PERSON
- Modified /Metadata/DDL/Oracle/ 06_pqCreateDrop_KPI_Plsql_oracle_data_xfer_script to use "domainkey"
- Modified /Metadata/DDL/SqlServer/02_pqCreateDrop_KPI_Tables_sqlserver_metrics_collection_sta ge_tables
 - added "domainkey" to metrics_requests_stg, metrics_resources_usage_stg, metrics sessions stg
- Modified /Metadata/DDL/SqlServer/
 03_pqCreateDrop_KPI_Tables_sqlserver_metrics_history_tables
 - added "domainkey" to metrics_requests_hist, metrics_resources_usage_hist, metrics sessions hist
- Modified /Metadata/DDL/SqlServer/04_pqCreateDrop_KPI_Tables_sqlserver_kpi_tables
 - added "domainkey" to METRICS_LDAP_PERSON
- Modified /Metadata/DDL/SqlServer/
 06_pqCreateDrop_KPI_Plsql_sqlserver_data_xfer_script to use "domainkey"

Release 2018Q401 [Dec 4 2018]

- Release Objective: Deprecated/Removed METRICS RESOURCES USAGE UD.
 - This was a copy of the data from metrics_resources_usage_hist where resourcekind='user defined'.
 Removed all processing associated with this table and made it a native access.
 - Modified /logical/resourceUsage/vResourceUsageUD to point to metrics_resources_usage_hist.

- Modified /logical/resourceUsage/vResourceUsageAll to select categoryname with no coelesce (bug fix).
- Modified /Physical/KPI_[oracle|sqlserver]/EXCEPT_ACR_AccessByUserOverTime to use metrics resources usage hist.
- Modified /Physical/KPI_[oracle|sqlserver]/EXCEPT_ACR_ActiveResourcesOverPeriodOfTime to use metrics_resources_usage_hist.
- Modified 03_pqCreateDrop_KPI_Tables_oracle_metrics_history_tables to add index "mru hist reskind dsname".
- Modified 04_pqCreateDrop_KPI_Tables_oracle_kpi_tables to remove references to METRICS RESOURCES USAGE UD.
- Modified /Oracle_Larger_DataTypes/04_pqCreateDrop_KPI_Tables_oracle_kpi_tables to remove references to METRICS RESOURCES USAGE UD.
- Modified 06_pqCreateDrop_KPI_Plsql_oracle_data_xfer_script to remove references to METRICS RESOURCES USAGE UD.
- Modified 03_pqCreateDrop_KPI_Tables_sqlserver_metrics_history_tables to add index "mru hist reskind dsname".
- Modified 04_pqCreateDrop_KPI_Tables_sqlserver_kpi_tables to remove references to METRICS RESOURCES USAGE UD.
- Modified 06_pqCreateDrop_KPI_Plsql_sqlserver_data_xfer_script to remove references to METRICS RESOURCES USAGE UD.
- Modified pPurgeData to remove references to METRICS_RESOURCES_USAGE_UD.
- o Removed /Formatting/METRICS_RESOURCES_USAGE_UD
- Removed /Physical/Abstraction/METRICS RESOURCES USAGE UD
- Removed /Physical/KPI oracle/METRICS RESOURCES USAGE UD
- Removed /Metadata/KPI_oracle_11g/CIS_KPI/METRICS_RESOURCES_USAGE_UD
- Removed /Metadata/KPI_oracle_12c/CIS_KPI/METRICS_RESOURCES_USAGE_UD
- Removed /Physical/KPI sqlserver/METRICS RESOURCES USAGE UD
- Removed /Metadata/KPI_sqlserver_2012/CIS_KPI/dbo/METRICS_RESOURCES_USAGE_UD
- Removed /Metadata/KPI sqlserver 2014/CIS KPI/dbo/METRICS RESOURCES USAGE UD

Release 2018Q400 [Dec 1 2018]

- Release Objective: Correlation of published view with datasource lineage.
 - Added processing for SQL request datasource lineage thus allowing reporting on what physical data source resources are related to which published resources.
 - Procedure tuning for Cache_METRICS_SQL_REQUEST_EXEC to block execution when Cache_METRICS_SQL_RESOURCE_LINEAGE is executing so as to not overwhelm the DV node. The opposite is true for Cache_METRICS_SQL_RESOURCE_LINEAGE which checks to see if Cache_METRICS_SQL_REQUEST_EXEC is running before executing.
- Lineage Changes:
- Altered tables METRICS_SQL_RESOURCE and METRICS_SQL_COLUMNS to add START_TIME TIMESTAMP column.
- Altered table METRICS_SQL_RESOURCE to add MESSAGE_TYPE, MESSAGE, PROCESS_NODE_HOST and PROCESSED NODE PORT.

- Altered table METRICS_SQL_CONTROL and METRICS_SQL_CONTROL_LOG to add column CONTROL NAME.
- Added new table METRICS_SQL_RESOURCE_LINEAGE datasource lineage for each resource found in METRICS SQL RESOURCE.
- Added table DDL to 04_pqCreateDrop_KPI_Tables_oracle_kpi_tables and 04 pqCreateDrop KPI Tables sqlserver kpi tables.
- Added views and published KPImetrics.requests.vMetricsSqlResourceLineage and vMetricsSqlResourceLineageCountReport.
- Added trigger kpimetricsTrig_23_Cache_METRICS_SQL_RESOURCE_LINEAGE.
- Added cluster safe procedure Cache_METRICS_SQL_RESOURCE_LINEAGE which allows for multi-host processing. This means that node a can process node b's lineage as long as node a has no more rows to process.
- Added variables to commonValues: queryTableLookupDefault, queryTableLookupInterval, getResourceLineagePathExclusionList, numRowsToProcessBeforeExitingLineage
- Modified defaultTriggersToEnable to include new trigger.
- Added index METRICS_SQL_RES_LINEAGE_IDX1 and _IDX2.
- Added index METRICS SQL COLUMNS IDX3.
- Modified pPurgeData to delete from METRICS SQL RESOURCE LINEAGE.
- General Fixes:
- Fixed a bug in the following view to eliminate ALL_COLUMNS and ALL_PARAMETERS from the result set: /Business/Business/resourceList/vAllPublishedResources.
- Modified pEndWorkflow to better hand error messages with single quotes.
- Fixed updateTriggers which execute the cache when turning off triggers.

Release 2018Q302 [Oct 12 2018]

- Fixed a collection table row volume problem by adding an independent delete trigger [kpimetricsTrig_33_DeleteCollection] for deleting unwanted rows from the collection tables: metrics_requests and metrics_resources_usage. By deleting unwanted rows more often it allows the data transfer script to work more efficiently and quickly.
- Added indexes metrics_resources_usage_idx4, metrics_resources_usage_idx5, metrics_requests_idx1, metrics_requests_idx2 to improve to different styles of delete.
- Modified index METRICS SQL REQUEST IDX4 to try and improve lookup speed.
- Added indexes METRICS_SQL_RESOURCE_IDX2, METRICS_SQL_COLUMNS_IDX2 to try and improve
 joins.

Release 2018Q301 [Oct 1 2018]

 Modified parseSqlScriptComplex and parseSqlScriptTemplate to change template select from SELECT DISTINCT to SELECT TOP 1 to make it more efficient.

Release 2018Q3 [Sep 2018]

- Modified to allow datasource names in the format of KPI_oracle_11g, KPI_oracle_12c, KPI_sqlserver_2012 or KPI_sqlserver_2014 in order to allow for adding a datasource.
- Modified sqlParserV1_2 to allow for parallel processing of SQL when a cluster is present. A node can process
 rows other than its own rows when it has no work to do.

Modified tables:

- METRICS_SQL_REQUEST added PROCESSED_NODE_HOST and PROCESSED_NODE_PORT
- metrics_resources_usage_hist added resourceorigin
- o METRICS SQL RESOURCE added RESOURCE ORIGIN
- METRICS ALL RESOURCES added RESOURCE ORIGIN
- METRICS_RESOURCES_USAGE_UD added RESOURCE_ORIGIN

Added tables:

- metrics_sessions_stg staging table for metrics_sessions_hist
- metrics_requests_stg staging table for metrics_requests_hist
- metrics_resources_usage_stg staging table for metrics_resources_usage_hist
- METRICS_SQL_CONTROL used to control parallel processing for sqlParserV1_2
- METRICS_SQL_CONTROL_LOG logs the activity if turned if debugging is turned on.

• Modified sqlParserV1 2:

- Allow for parallel processing of SQL when a cluster is present. A node can process rows other than
 its own rows when it has no work to do.
- Added ability to process web service calls for operations that are TABLES or PROCEDURES.
- Modified /shared/ASAssets/KPImetrics/Business/Logical/metrics *_hist views to use where starttime > TO_TIMESTAMP('1900-01-01 00:00:00.000') to force the use of parallel queries.
- Consolidated P_METRICS_ALL_TABLES_exec from KPI_oracle/KPI_sqlserver to /ClusterSafeCache/pMETRICS_ALL_TABLES_exec.
- Consolidated P_PARTITION_MANAGER_exec from KPI_oracle/KPI_sqlserver to /ClusterSafeCache/pPARTITION_MANAGER_exec.
- Consolidated the 3 DBMS triggers each from KPI_oracle/KPI_sqlserver to a single set under ClusterSafeTriggers.
- Removed GetSequenceValueProc from KPI_oracle/KPI_sqlserver and consolidated the functionality into /Abstraction/GetSequenceValueProc.
- Moved the "update METRICS_RESOURCES_USAGE_UD where RESOURCE_ID IS NULL" logic from Cache_ALL_RESOURCES to the data transfer script.
- Removed the "update metrics_resources_usage_hist where RESOURCE_ID IS NULL" logic from Cache_ALL_RESOURCES alltogher to avoid updates on the history table.
- Consolidated 05_pqCreateDrop_KPI_Tables_[oracle|sqlserver]_kpi_application_tables into 04_pqCreateDrop_KPI_Tables_[oracle|sqlserver]_kpi_tables
- Renamed 06_pqCreateDrop_KPI_Tables_[oracle|sqlserver]_kpi_sequence to 05_pqCreateDrop_KPI_Tables_[oracle|sqlserver]_kpi_sequence
- Renamed 07_pqCreateDrop_KPI_Plsql_[oracle|sqlserver]_data_xfer_script to 06_pqCreateDrop_KPI_Plsql_[oracle|sqlserver]_data_xfer_script
- Modified 06 pqCreateDrop KPI Plsql [oracle|sqlserver] data xfer script: [inserts are faster than deletes]
 - Modified the Oracle and SQL Server data transfer scripts to use staging tables for insert/update/deletes in order to only perform inserts into history tables.
 - Eliminated the delete job filter SQL on metrics_resources_usage by including it in the insert stage where clause.

- Eliminated the delete not exist SQL on metrics_requests by including a WHERE EXISTS in the insert stage where clause.
- Renamed 08_pqlnsert_KPI_Tables_METRICS_JOB_tables to 07_pqlnsert_KPI_Tables_METRICS_JOB_tables
- Renamed 09_pqInsert_KPI_Tables_METRICS_EVENT_REGISTRATION to 08_pqInsert_KPI_Tables_METRICS_EVENT_REGISTRATION
- Modified commonValues:
 - o Removed dataSourceSchemaPath_oracle, dataSourceSchemaPath_sqlserver.
 - Removed cisCaseSensitivity as it is no longer needed.
 - Added dataSourceCatalog, dataSourceSchema, historyTableCompression.
 - Added dataSourceCollation_sqlserver which gets applied at the time of creating the SQL Server tables to allow for case sensitive searches and joins on columns.

12 Post-Installation Background Information

Information Only Section

This section provides a background on what gets executed by the post-installation script.

Script Requirements:

- 1. This script must be executed by the user admin or someone who has admin privileges
- 2. The KPImetrics CAR file has been imported either manually or with 1_Pre_Installation.

Steps to be performed after the KPImetrics CAR file is imported:

- 1. Update impacted resources.
- 2. Set resource privileges
- 3. Enable and test the KPImetrics data source
- 4. Rebind physical database type tables to the data source schema
- 5. Rebind the physical abstraction folder "/Physical/Abstraction" to the correct physical data source folder "/Physical/KPI [oracle|sqlserver]"
- 6. Remove DVKPI folder if not needed
- 7. Update impacted resources
- 8. Validate and Create KPImetrics collection tables exist
- 9. Create KPImetrics cache tables, sequences and procedures [This will drop existing]
- Introspect / Reintrospect the KPImetrics data source
- 11. Change resource ownership
- 12. Load the METRICS JOBS table
- 13. Load the METRICS EVENT REGISTRATION table
- 14. Install the CpuAndMemCheckerCjp scripts into the file system for either Windows or UNIX.
- 15. Update the CPUAndMemChecker data source url and reintrospect it
- Test the /System/CPU MEMORY CHECKER view
- 17. Installation and configuration are complete

How the scripts work:

The KPImetrics module requires several tables in the KPImetrics data source database in order to store metrics data for reporting. You must create these storage tables using the provided DDL in order for the KPImetrics module to function correctly.

If you choose to create the tables from within Studio, execute the procedures under /shared/ASAssets/KPImetrics/Physical/Metadata/DDL for your data source type. Proceed to the following section associated for your database type.

Procedure Parameters:

IN displayDDL – Y=Display the DDL, N=Do not display the DDL.

IN executeDDL – Y=execute the DDL, N=Do not execute the DDL. If you choose to execute the DDL externally, you will need to execute each of the 01-07 DDL procedures with the variable set as executeDDL=N and displayDDL=Y. This will output the DDL that you need to execute externally without actually performing the DDL operations. Once you have executed each procedure 01-07, you are now ready to run the DDL externally. Once you have executed the DDL proceed to the next section "Common Configuration for all Databases".

IN dropIndexes– Y=drop the indexes before creating the first. N=do not drop the indexes.

IN dropTables – Y=drop the tables before creating the tables. N=do not drop the tables.

IN createTables – Y=execute the table creation DDL, N=display the table creation DDL in the console window only.

IN createIndexes— Y=execute index creation DDL. N=display the index creation DDL in the console window only.

OUT cursCombinedResult – Provides a status on each SQL statement executed.

OUT sqlScript – Generates an output of the entire script which can be used for external execution.

The common 08-09 DML procedures to populate the database must be run from within DV as there is no external SQL generation for those.

Create the KPImetrics storage tables for Oracle

- 1. Do the DV metrics collection tables exist?
 - a. NO
- i. Create a tablespace called "METRICS DATA COLL" with NOLOGGING.
 - 1. Example:
 - create tablespace METRICS_DATA_COLL nologging datafile
 'C:/DV/oracle/metrics_data_coll01.dbf' size 500m autoextend on next 50m extent management local;
- ii. Execute
 - 02_pqCreateDrop_KPI_Tables_oracle_metrics_collection_stage_table s_800
 - SchemaName derived from commonValues.dataSourceSchema

TablespaceName – derived from commonValues.collectionTablespaceName

iii. Execute

02_pqCreateDrop_KPI_Tables_oracle_metrics_collection_tables_800

- 1. SchemaName derived from commonValues.dataSourceSchema
- TablespaceName derived from commonValues.collectionTablespaceName

b. YES

- Consider exporting the data and turning off metrics in order to create these tables with NO LOGGING option enabled in their own tablespace called "METRICS_DATA_COLL".
- ii. If this is not desired, then bypass this step.
- 2. Create the metrics history tables and indexes
 - a. Create a tablespace called "METRICS_DATA_HIST" and "METRICS_DATA_IDX" with logging turned on.
 - i. Example:
 - ii. create tablespace METRICS_DATA_HIST logging datafile
 'C:/DV/oracle/metrics_data_hist01.dbf' size 500m autoextend on next 50m extent management local;
 - iii. create tablespace METRICS_DATA_IDX logging datafile'C:/DV/oracle/metrics_data_idx01.dbf' size 500m autoextend on next 50m extent management local;
 - b. Drop and Create the metrics history tables and indexes: metrics_requests_hist, metrics_resources_usage_hist and metrics_sessions
 - c. Execute **03_pqCreateDrop_KPI_Tables_oracle_metrics_history_tables_800** with input:
 - i. partitionStartDate- derived from commonValues.partitionStartDate
 - ii. SchemaName derived from commonValues.dataSourceSchema
 - iii. TablespaceName derived from commonValues.historyTablespaceName and commonValues.indexTablespaceName.
- 3. Create the metrics KPI reporting tables and indexes
 - a. Execute **04_pqCreateDrop_KPI_Tables_oracle_kpi_tables** with input:
 - i. SchemaName derived from commonValues.dataSourceSchema
 - ii. TablespaceName derived from commonValues.historyTablespaceName

and commonValues.indexTablespaceName.

- 4. Create the metrics KPI reporting sequence
 - a. Execute **05_pqCreateDrop_KPI_Tables_oracle_kpi_sequence** with input:
 - i. SchemaName derived from commonValues.dataSourceSchema
- 5. Create the metrics KPI "native" PLSQL data transfer script
 - a. Execute 06_pqCreateDrop_KPI_Plsql_oracle_data_xfer_script_800 with no input:
 - SchemaName derived from commonValues.dataSourceSchema

Create the KPImetrics storage tables for SQL Serer

- 1. Do the DV metrics collection tables exist?
 - a. NO
- i. Create a tablespace (filegroup) called "METRICS DATA COLL".
 - 1. Example:
 - 2. alter database CIS_KPI add filegroup METRICS_DATA_COLL;
 - alter database CIS_KPI add FILE (NAME='METRICS_DATA_COLL1', FILENAME='C:\SQLServer_FileGroup\METRICS_DATA_COLL1') TO FILEGROUP METRICS_DATA_COLL;
- ii. Execute

02_pqCreateDrop_KPI_Tables_sqlserver_metrics_collection_stage_tab les_800

- 1. SchemaName derived from commonValues.dataSourceSchema
- TablespaceName derived from commonValues.collectionTablespaceName
- iii. Execute

02_pqCreateDrop_KPI_Tables_sqlserver_metrics_collection_tables_80 0

- 1. SchemaName derived from commonValues.dataSourceSchema
- TablespaceName derived from commonValues.collectionTablespaceName
- b. YES
 - Consider exporting the data and turning off metrics in order to create these tables with NO LOGGING option enabled in their own tablespace called "METRICS DATA COLL".

- ii. If this is not desired, then bypass this step.
- 2. Create the metrics history tables and indexes
 - a. Create a tablespace (filegroup) called "METRICS_DATA_HIST" and "METRICS_DATA_IDX" with logging turned.
 - i. Example:
 - ii. alter database CIS_KPI add filegroup METRICS_DATA_HIST;
 - iii. alter database CIS_KPI add FILE (NAME='METRICS_DATA_HIST_1', FILENAME='C:\SQLServer_FileGroup\METRICS_DATA_HIST_1') TO FILEGROUP METRICS_DATA_HIST;
 - iv. alter database CIS_KPI add filegroup METRICS_DATA_IDX;
 - v. alter database CIS_KPI add FILE (NAME='METRICS_DATA_IDX_1', FILENAME='C:\SQLServer_FileGroup\METRICS_DATA_IDX_1') TO FILEGROUP METRICS_DATA_IDX;
 - b. Drop and Create the metrics history tables and indexes: metrics_requests_hist, metrics_resources_usage_hist and metrics_sessions
 - c. Execute 03_pqCreateDrop_KPI_Tables_sqlserver_metrics_history_tables with input:
 - i. partitionStartDate- derived from commonValues.partitionStartDate
 - ii. SchemaName derived from commonValues.dataSourceSchema
 - iii. TablespaceName derived from commonValues.historyTablespaceName and commonValues.indexTablespaceName.
- 3. Create the metrics KPI reporting tables and indexes
 - a. Execute 04 pqCreateDrop KPI Tables sqlserver kpi tables with input:
 - i. SchemaName derived from commonValues.dataSourceSchema
 - ii. TablespaceName derived from commonValues.historyTablespaceName and commonValues.indexTablespaceName.
- 4. Create the metrics KPI reporting sequence
 - a. Execute 05 pqCreateDrop KPI Tables sqlserver kpi sequence with input:
 - i. SchemaName derived from commonValues.dataSourceSchema
- 5. Create the metrics KPI "native" PLSQL data transfer script
 - a. Execute 06_pqCreateDrop_KPI_Plsql_sqlserver_data_xfer_script with no input:
 - i. SchemaName derived from commonValues.dataSourceSchema

Common Configuration for all Databases

1. Execute the procedure

/shared/ASAssets/KPImetrics/Configuration/updateEnableDatasource

- a. This procedure will enable the proper KPImetrics data source [KPI_oracle or KPI sqlserver] based on commonValues configuration.
- 2. Reintrospect or Introspect the data source
 - a. Was the default CIS KPI schema or CIS KPI/dbo catalog/schema used?
 - i. YES: Reintrospect the KPImetrics data source to confirm that the tables are visible.
 - 1. Right-click on your chosen data source "KPI_<database_type>" and select "Re-Introspect Now" and wait for it to complete.
 - 2. Click OK when completed.
 - ii. NO: A new schema or catalog name was used. Introspect the new schema or catalog/schema.
 - Right-click on your chosen data source "KPI_<database_type>" and select "Add/Remove Tables".
 - 2. Select your schema or catalog/schema
 - 3. Select all tables/procedures:
 - a. P METRICS ALL TABLES
 - b. "cache_status" and "cache_tracking"
 - c. Starting with "METRICS ..."
 - d. Starting with "metrics ..."
 - e. Click Next. Click Finish. Wait for the introspection to complete. Review the list of tables in this section:
 - f. "Metadata Data Source for KPI <database type>"
 - 4. Click OK when completed.
- Execute the rebind of the physical database type folder resources /shared/ASAssets/KPImetrics/Configuration/rebindPhysicalDatabaseType
 - a. This procedure rebinds the /shared/ASAssets/KPImetrics/Physical/Physical/KPI_<database_type> folder to the configured schema and catalog path found in commonValues.
 - b. No input is required. It uses commonValues to determine the target data source to rebind to. *Note*: /shared/ASAssets/KPImetrics/Configuration/commonValues must be configured prior to executing this procedure.

4. Execute the rebind procedure

/shared/ASAssets/KPImetrics/Configuration/**rebindPhysicalAbstraction** to rebind all KPImetrics abstraction layer views to the appropriate data source.

- a. No input is required. It uses commonValues to determine the target data source to rebind to. <u>Note</u>: /shared/ASAssets/KPImetrics/Configuration/commonValues must be configured prior to executing this procedure.
- b. Based on the commonValues.dataSourceName, it will rebind the /Physical/Abstraction views to either /Physical/KPI_oracle or /Physical/KPI_sqlserver.
- c. Additionally, there is a list of views "commonValues.viewOptimizationPathList" used by rebindPhysicalAbstraction, that is used to modify the view SQL Script to optimize for Oracle or SQL Server in order to achieve push-down of the query.
- 5. Remove default CIS KPI schema/catalog if not used.
 - a. If a different schema/catalog was chosen other than CIS_KPI then remove the old CIS_KPI name from your chosen data source "KPI <database type>".
 - i. Right-click on CIS KPI and select delete
 - 1. Update Impacted Resources
 - b. Potentially, there may be some resources that are red/impacted.
 - ii. Session is null
 - iii. Java.lang.null
- Execute /shared/ASAssets/KPImetrics/Configuration/updateImpacteResources
 - a. Refresh your studio once this completes and the red/impacted resources should disappear. If they do not, then edit the ones that are still red/impacted. Put a space anywhere in the resource and save the resource. The act of editing and changing the resource should cause the common error "session is null" to go away. If the error persists, perhaps it is some other issue that requires a closer look.
- 7. Execute **07_pqInsert_KPI_Tables_METRICS_JOB_tables** with no input
 - a. Note: This same procedure is used to modify rows. It always deletes the rows and then inserts the rows.
- 8. Execute 08 pqInsert KPI Tables METRICS EVENT REGISTRATION with input:

- a. deleteAllRows Y=delete all rows first, N=Do not delete all rows. (default).
- b. This same procedure is used to modify rows. First delete the rows and then insert the rows.