


	transactions	
	transaction_id 🔑	integer
<	sender_id	integer NN
<	receiver_id	integer NN
	transaction_type	varchar(50) NN
	points	integer NN
	payment_channel	varchar(50) NN
	status	varchar(50) NN
	created_at	timestamp
	updated_at	timestamp

user_id 🔑	integer
email	varchar(50) NN
password	varchar(128) NN
role	varchar(50) NN
admin_email	varchar(50)
created_at	timestamp
updated_at	timestamp
is_active	boolean
is_staff	boolean
is_superuser	boolean



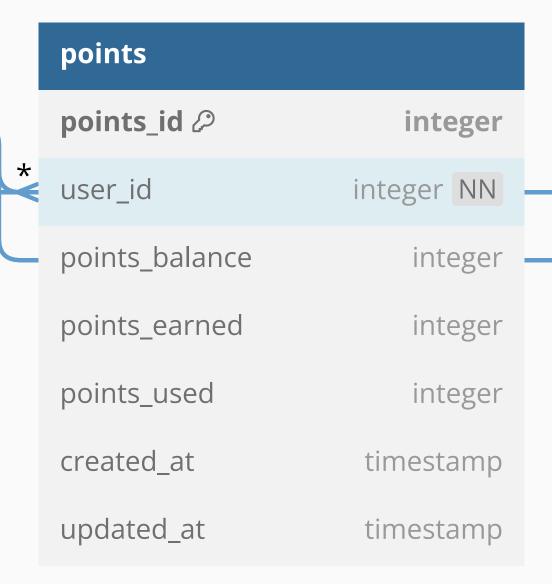

transactio	ons	
transactio	on_id 🖉	integer
sender_id		integer NN
receiver_id	d	integer NN
transactio	n_type	varchar(50) NN
points		integer NN
payment_0	channel	varchar(50) NN
status		varchar(50) NN
created_at	t	timestamp
updated_a	at	timestamp