

Operações Nodejs

Rota Raiz


Thunder Client interface showing a GET request to `http://localhost:3000`. The response is a 200 OK status with a 25-byte body containing the text "Lista de pedidos Luminio." The terminal shows the server running on port 3000.

Rota dos Pedidos


Thunder Client interface showing a GET request to `http://localhost:3000/pedidos`. The response is a 200 OK status with a 417-byte body containing a JSON array of 5 orders. The terminal shows the server running on port 3000.

```
[{"id": 1, "pedido": "cliente", "endereco": "Rua da rua 45", "pagamento": "PIX"}, {"id": 2, "pedido": "cachorro quente", "endereco": "Rua da rua 32", "pagamento": "PIX"}, {"id": 3, "pedido": "pizza", "endereco": "Rua da rua 98", "pagamento": "Cartão - débito"}, {"id": 4, "pedido": "gasolina", "endereco": "Rua da rua 72", "pagamento": "PIX"}, {"id": 5, "pedido": "computador", "endereco": "Rua que não é da rua 57", "pagamento": "Cartão - crédito"}]
```


Rota por ID

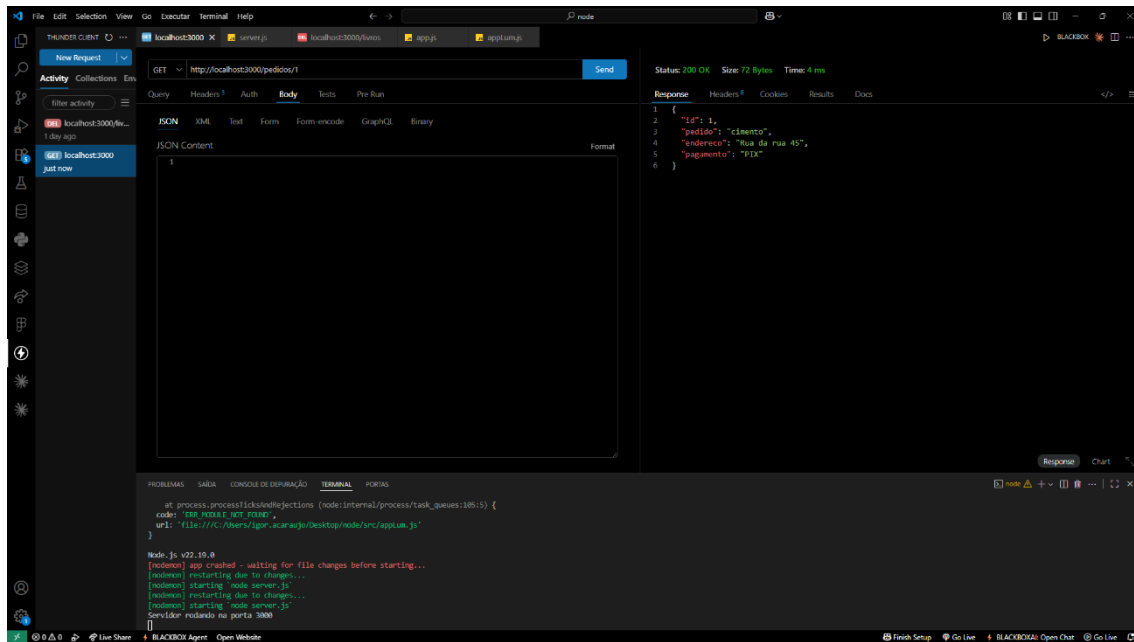


PUT

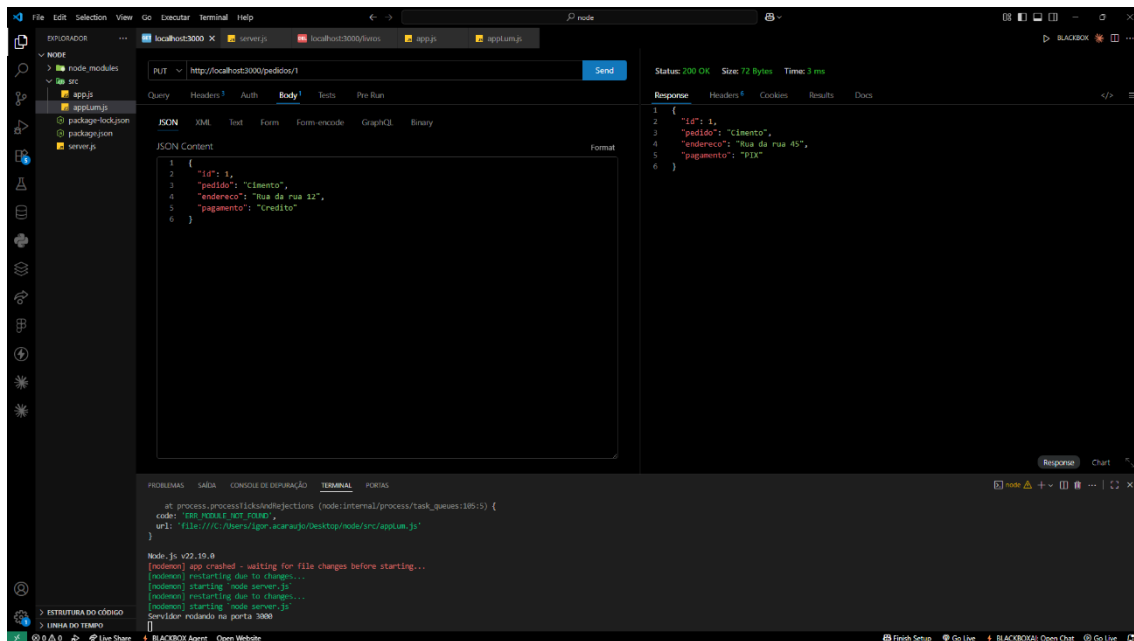


PATCH

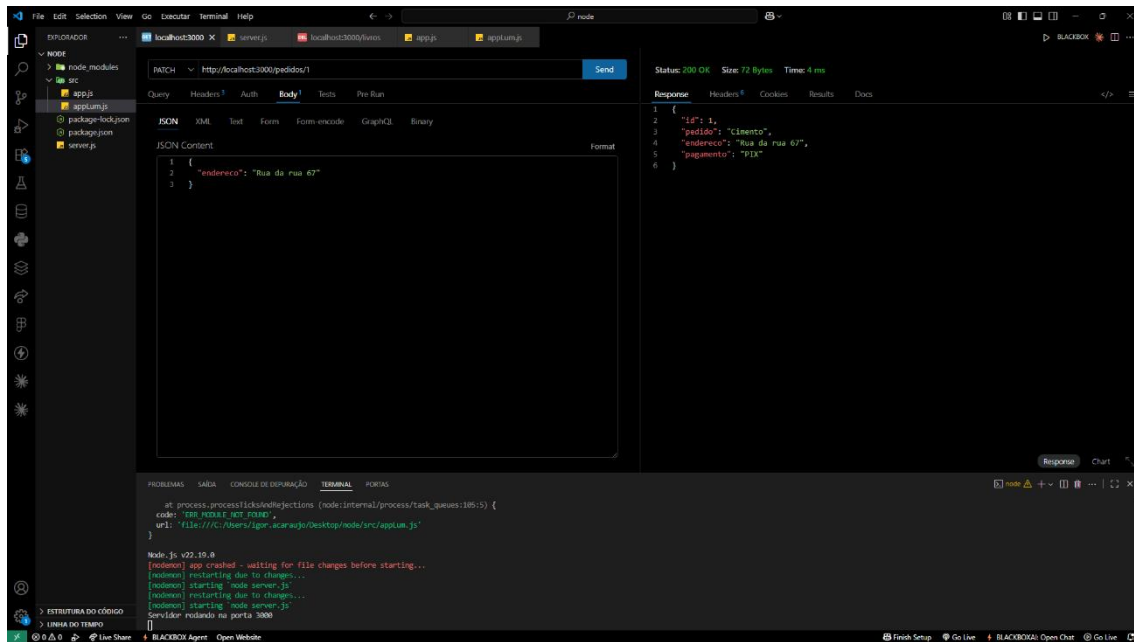


POST

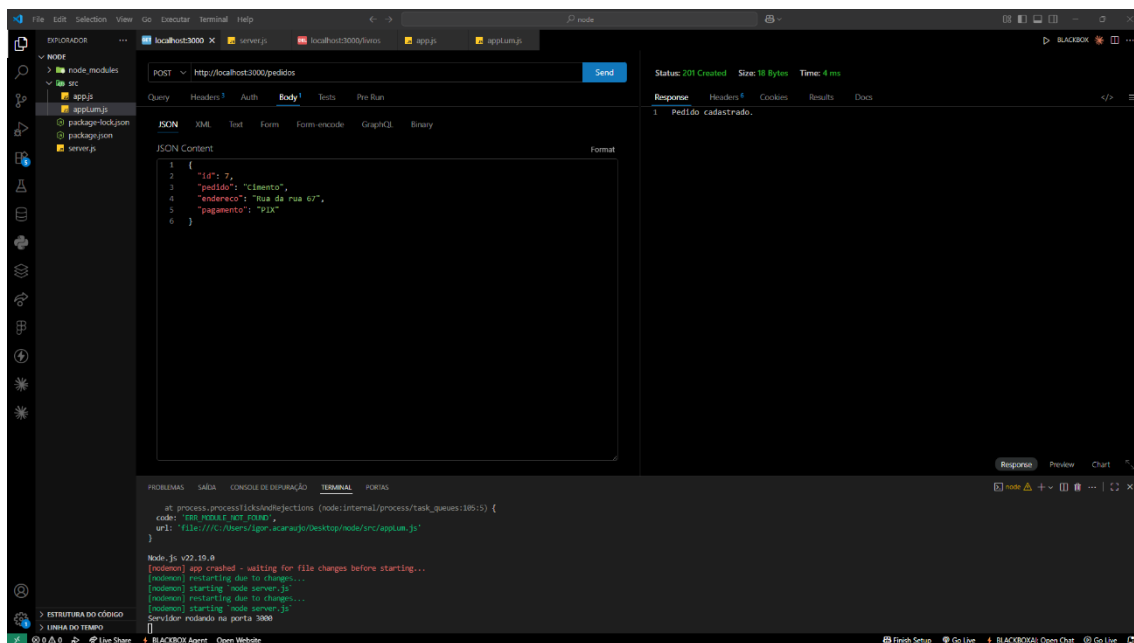


DELETE

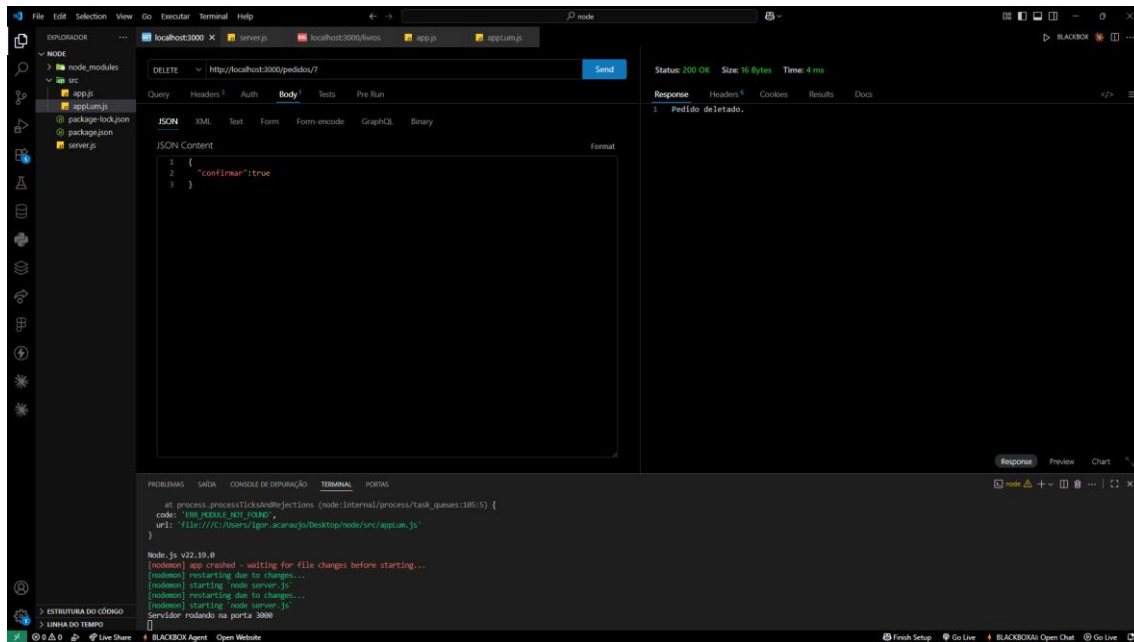

Obrigatoriedade de ID

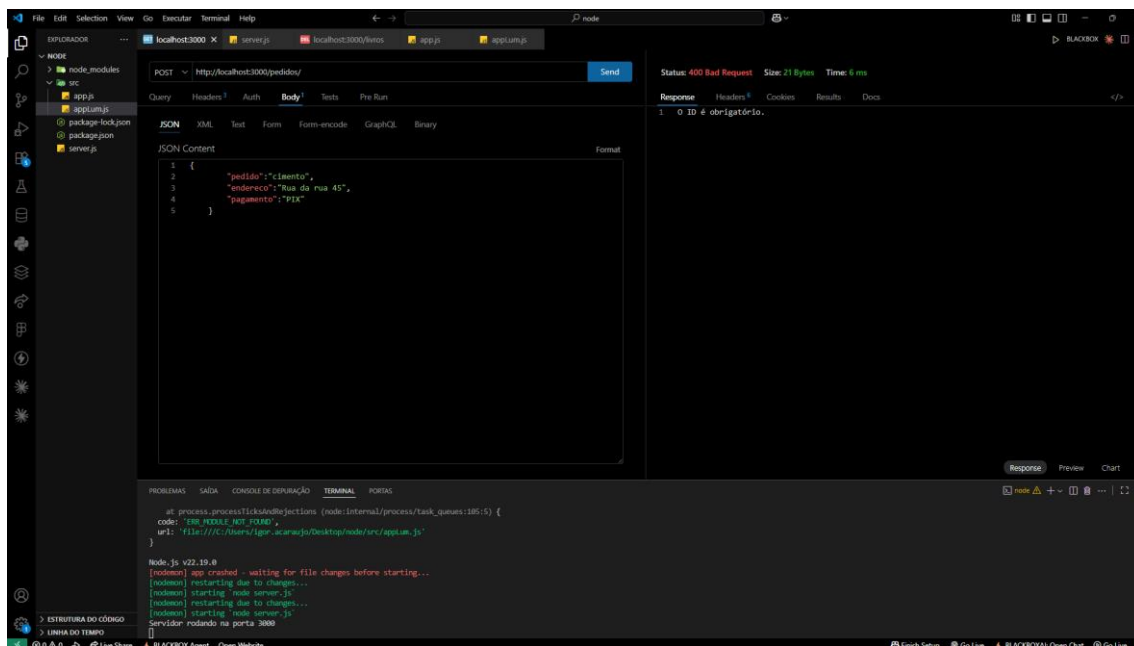

Exclusão não confirmado.

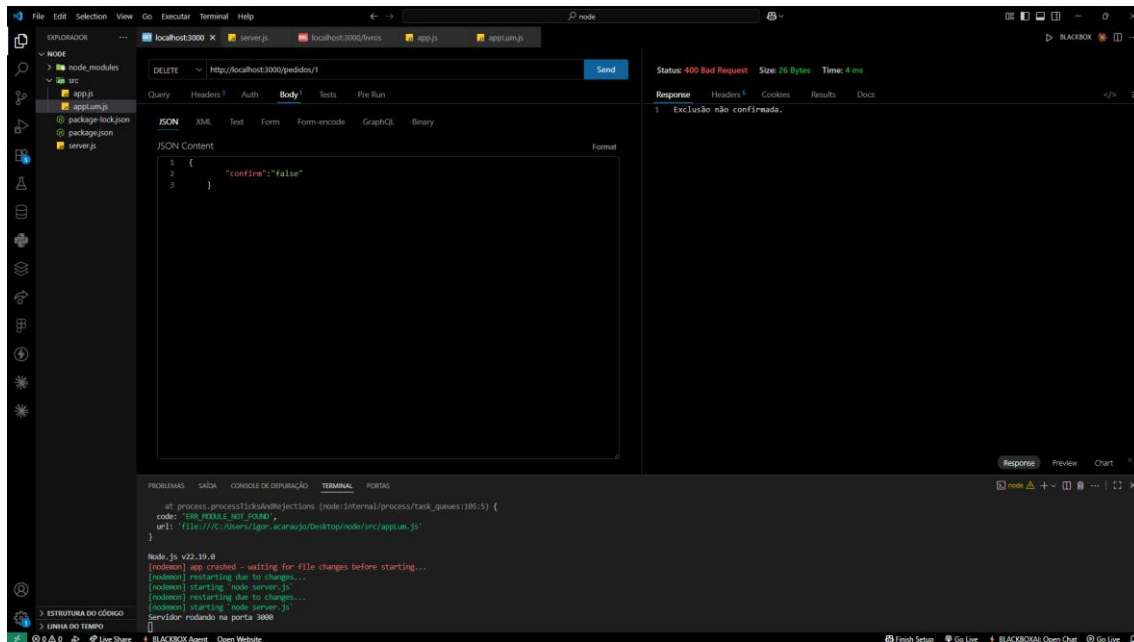

Quando ID já existe e é executado um POST

