

Context and Navigation



Roland Guijt

Freelance consultant and trainer

@rolandguijt roland.guijt@gmail.com



Context Recipe

In component providing context or separate module

In the component providing context

In child components

```
const context = React.createContext("default value");
```


```
<context.Provider value="some value">  
  //children  
</context.Provider>
```

```
const value = useContext(context);  
or: const value = use(context);
```


```
<context.Consumer>  
  { value => /* render something based on value */ }  
</context.Consumer>
```




Passing It On

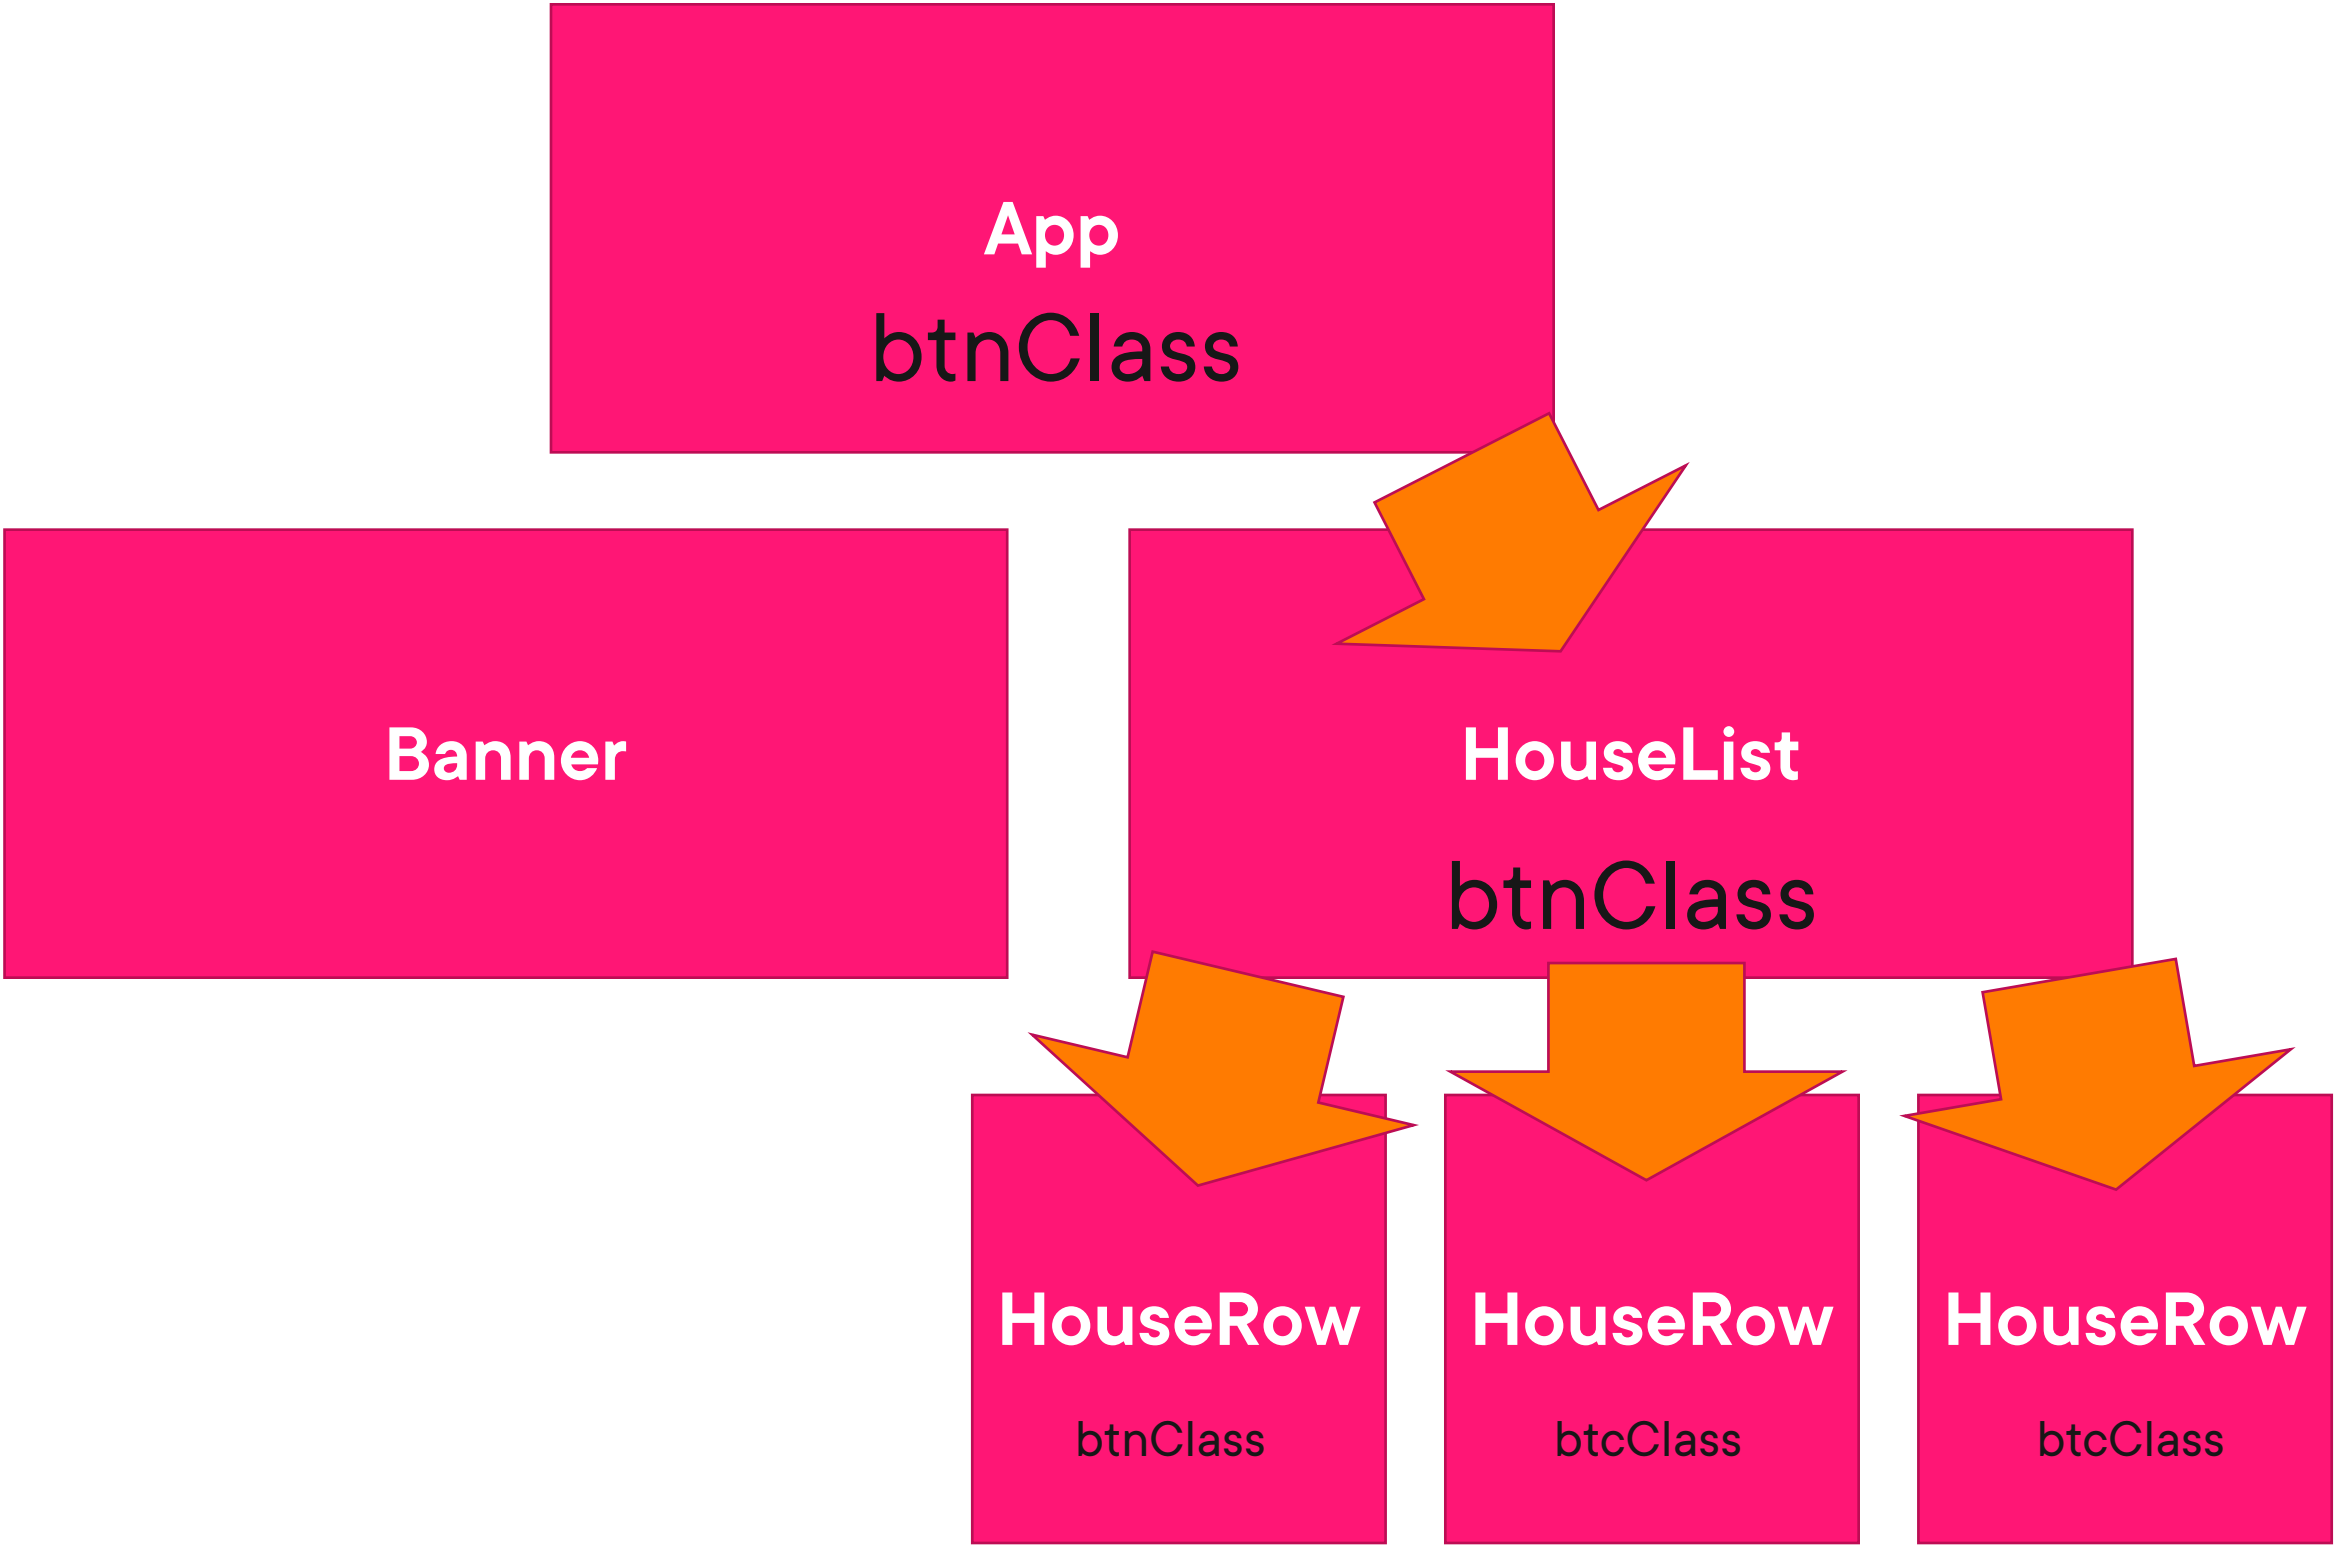

A Possible Future Component Hierarchy

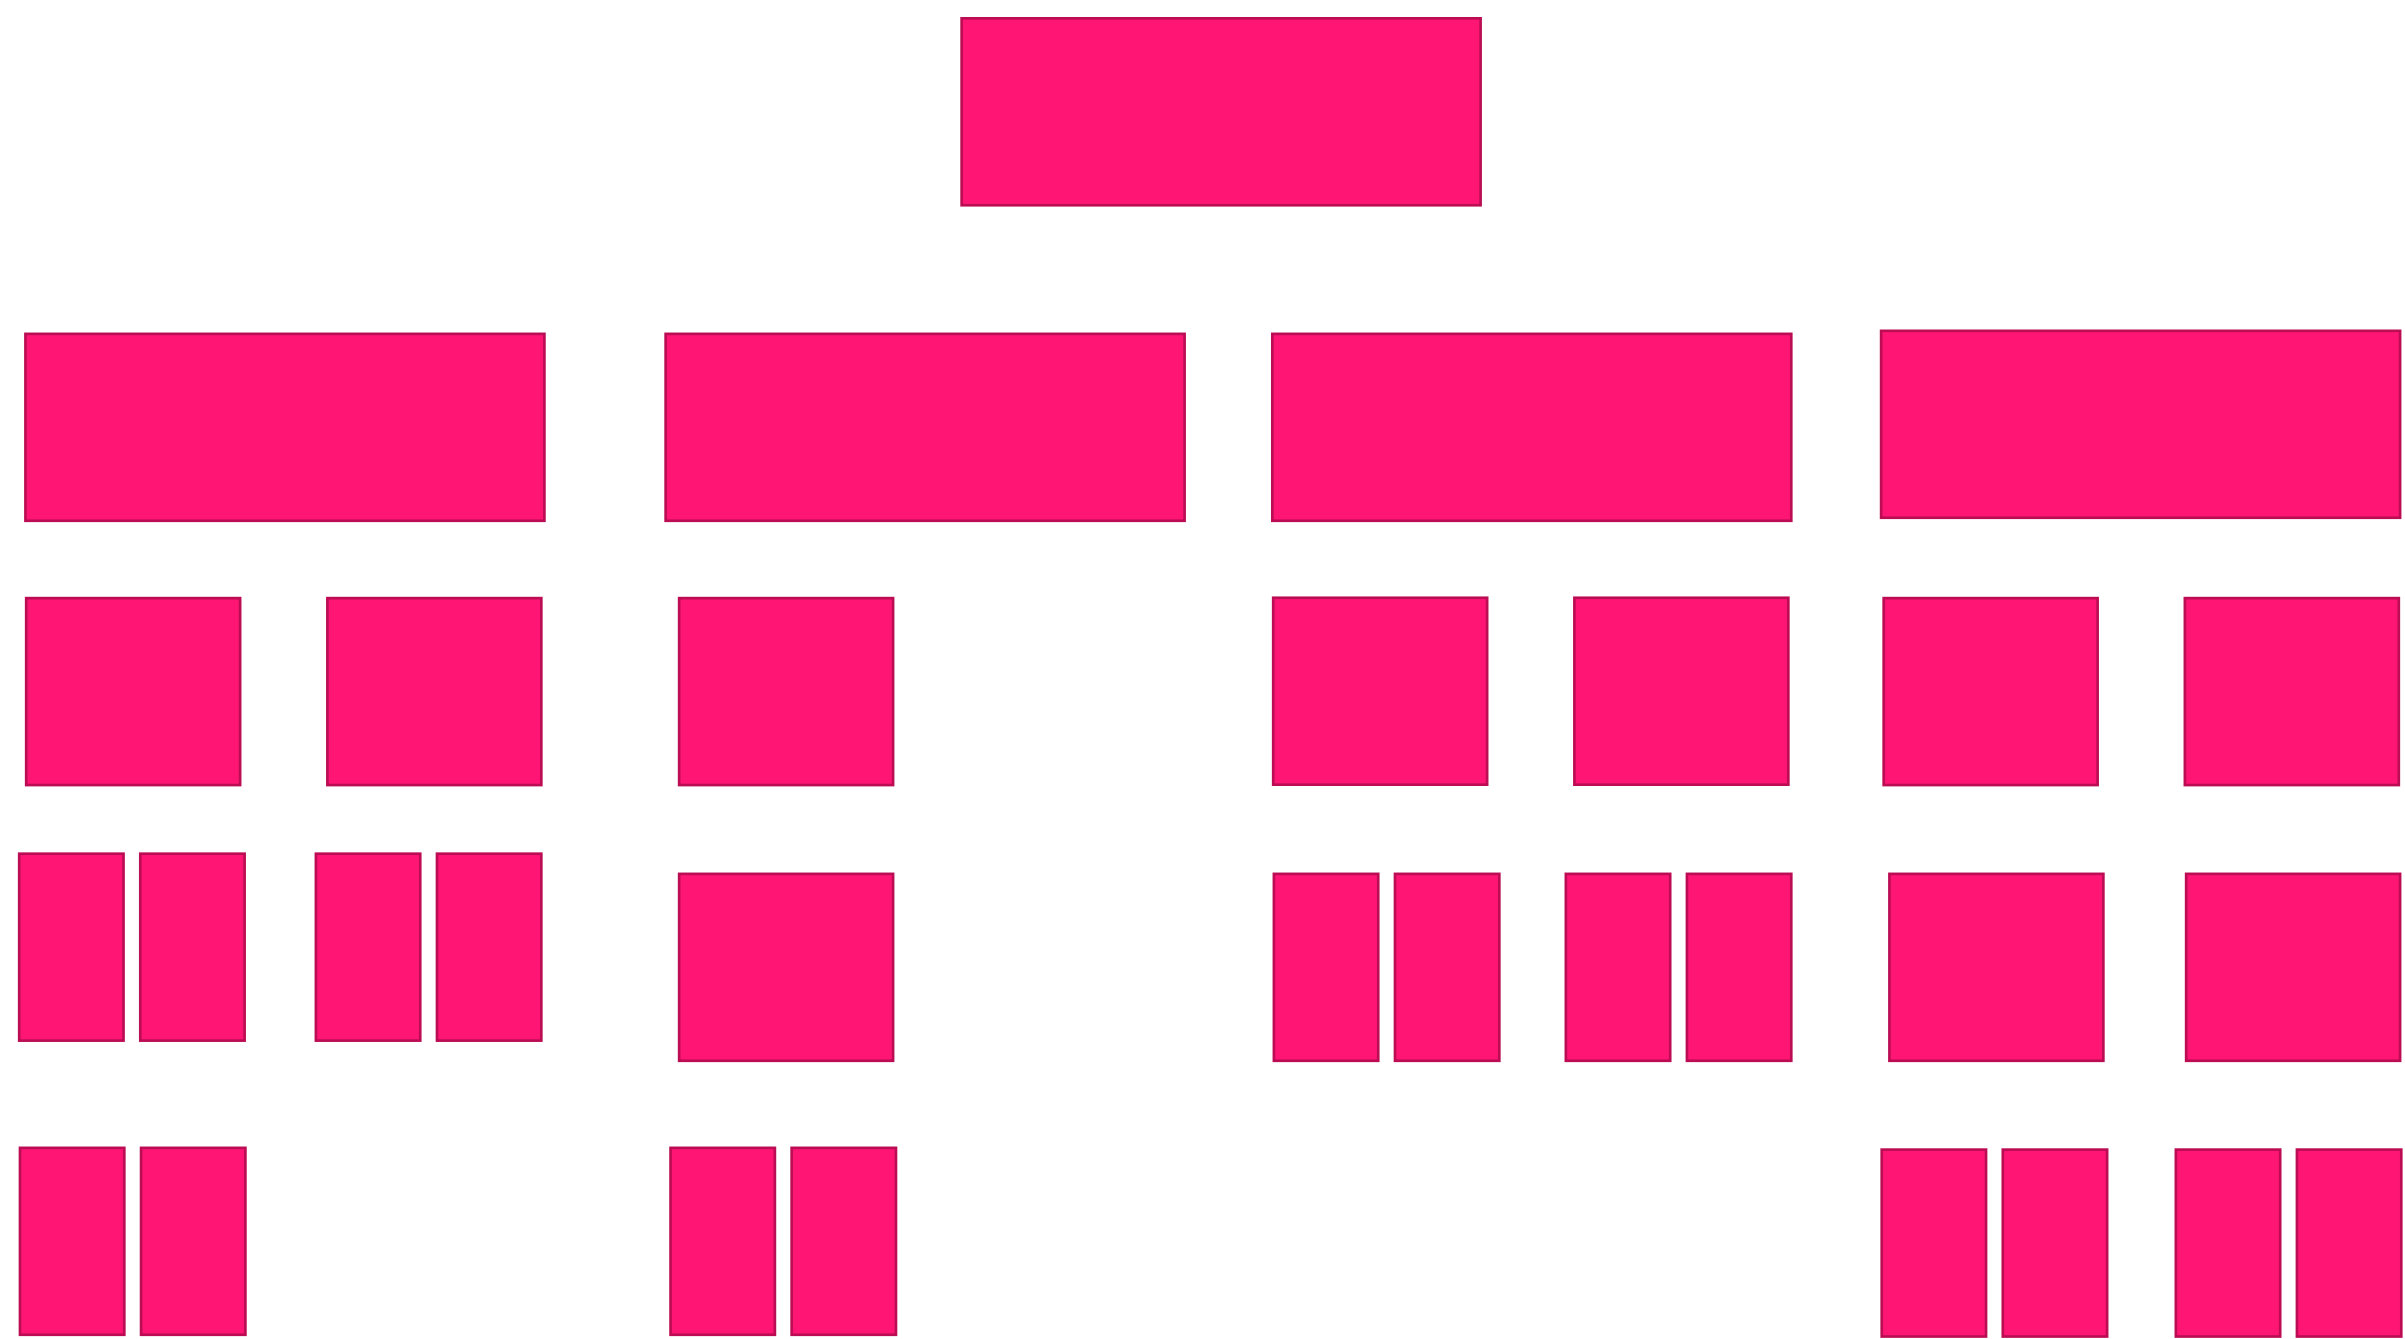


Navigation So Far

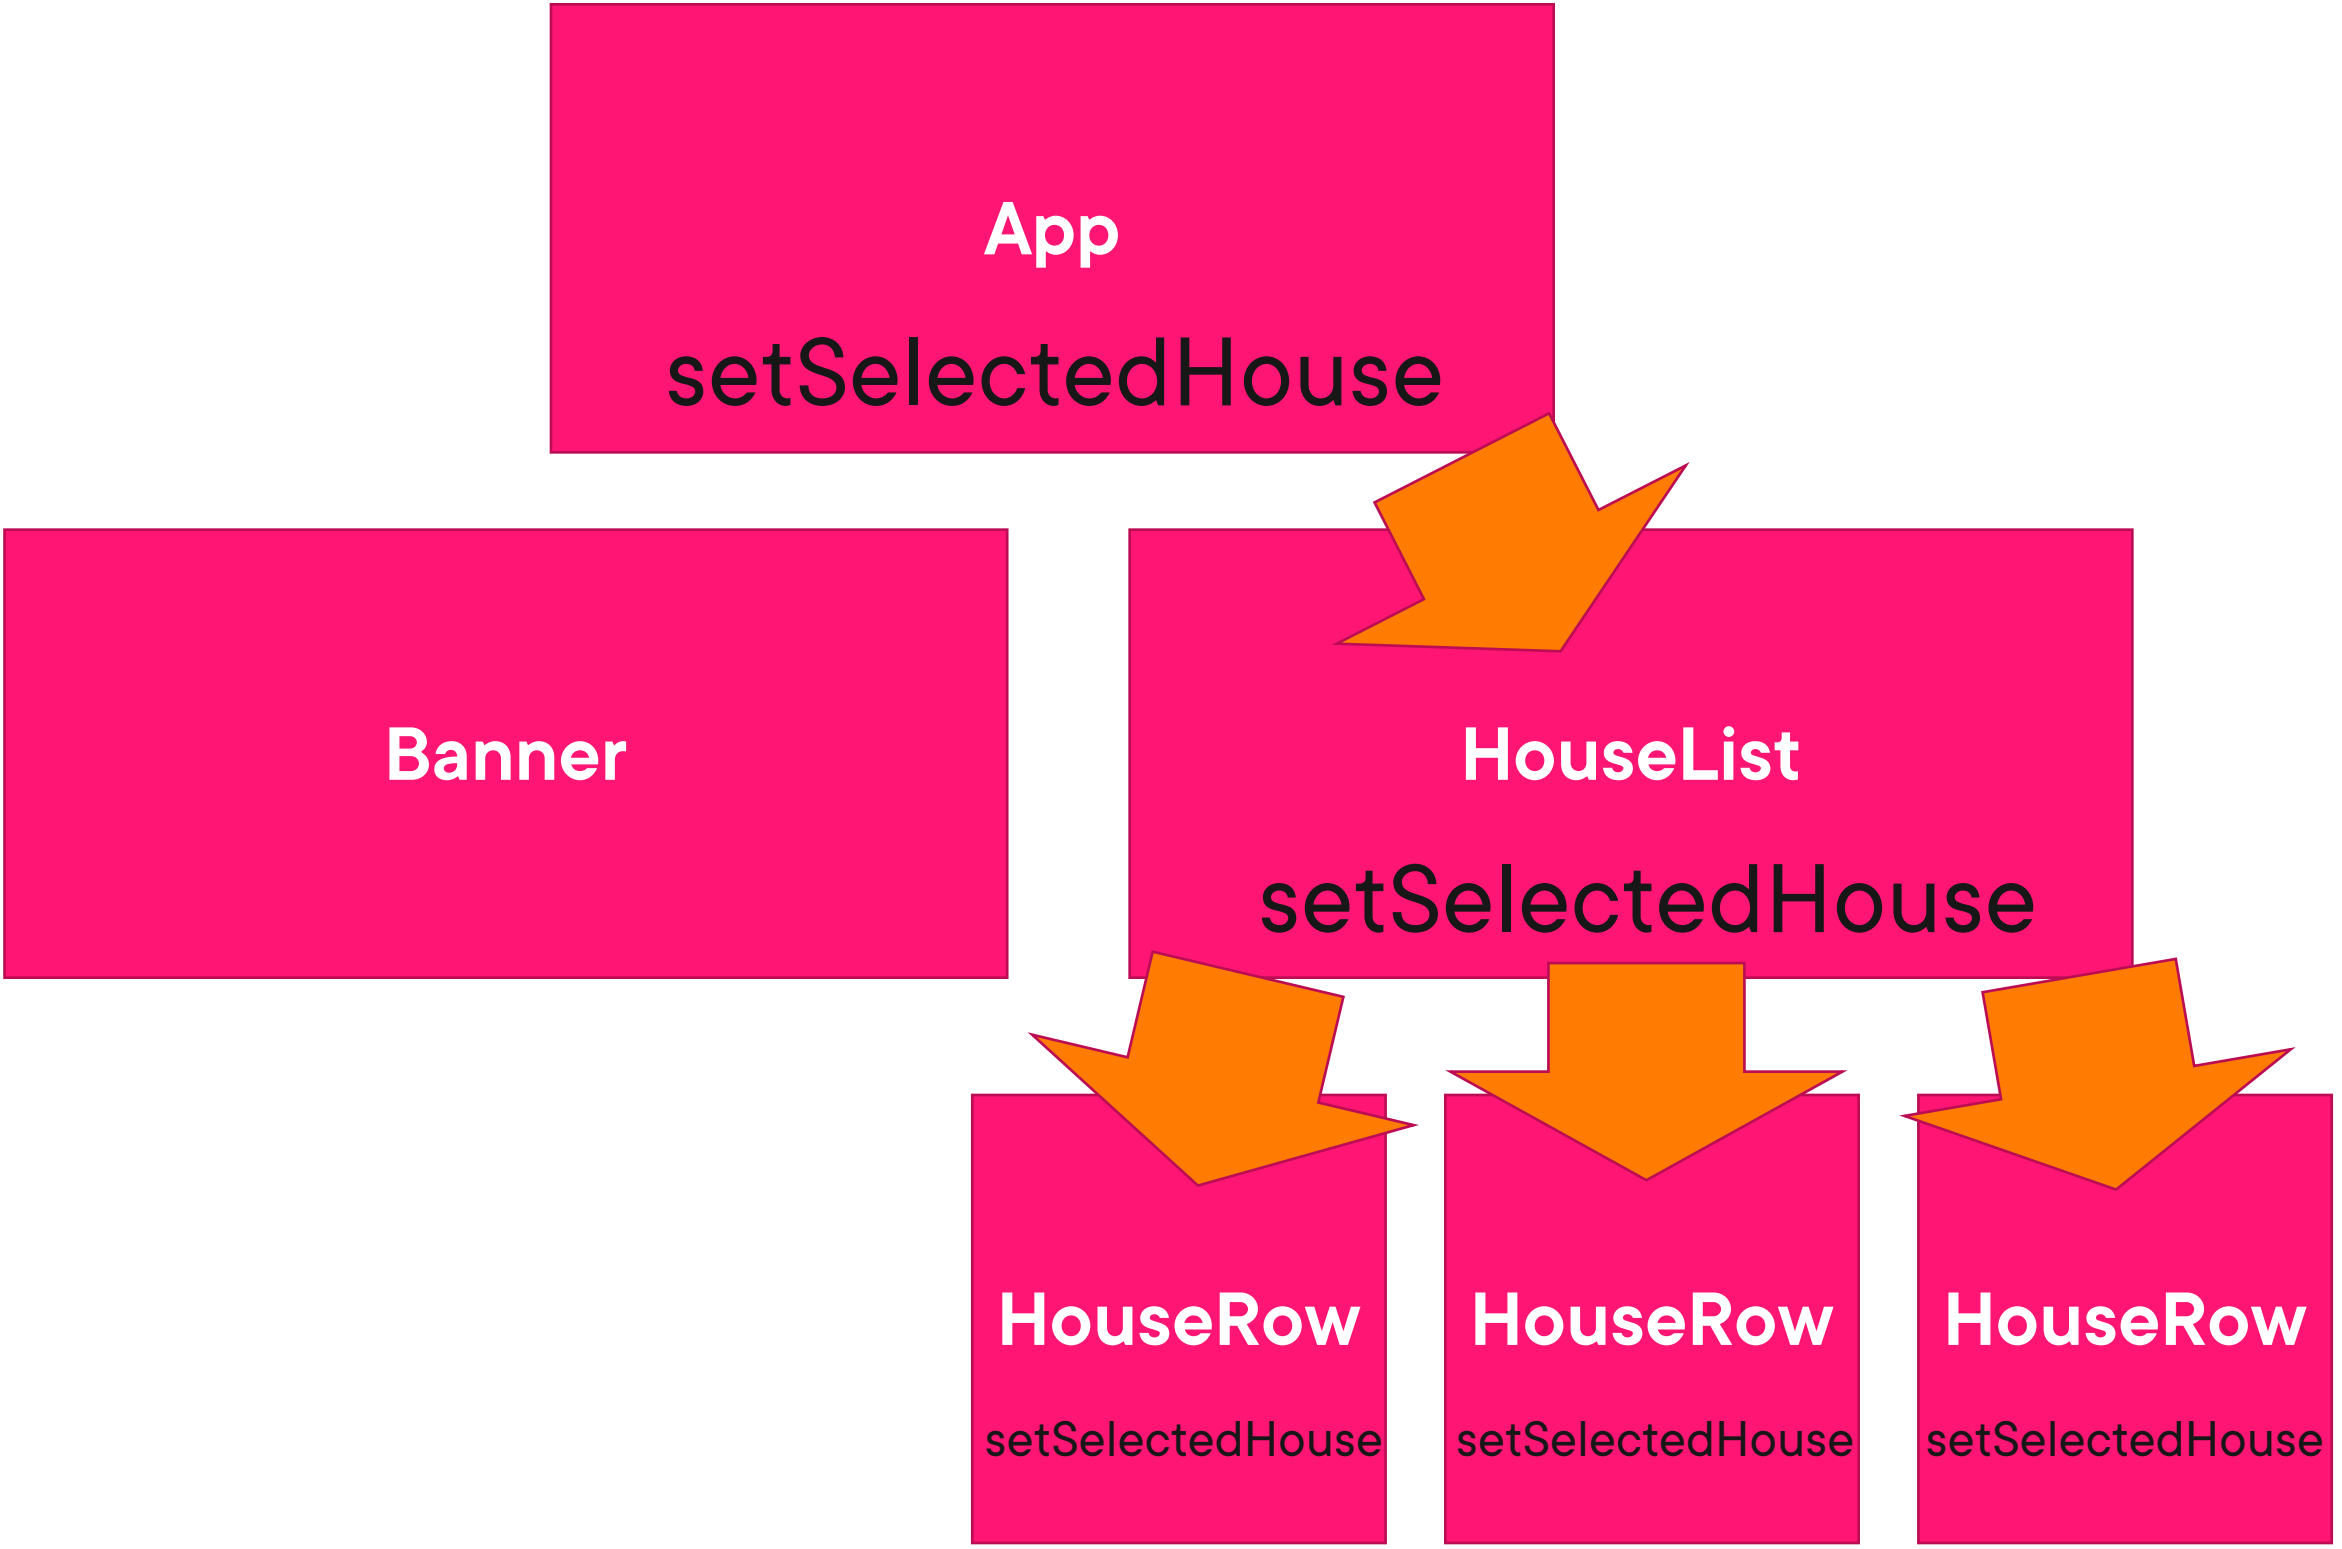


**When the value of the
context changes,
all consumers will be re-rendered**




Context On a Lower Component Level

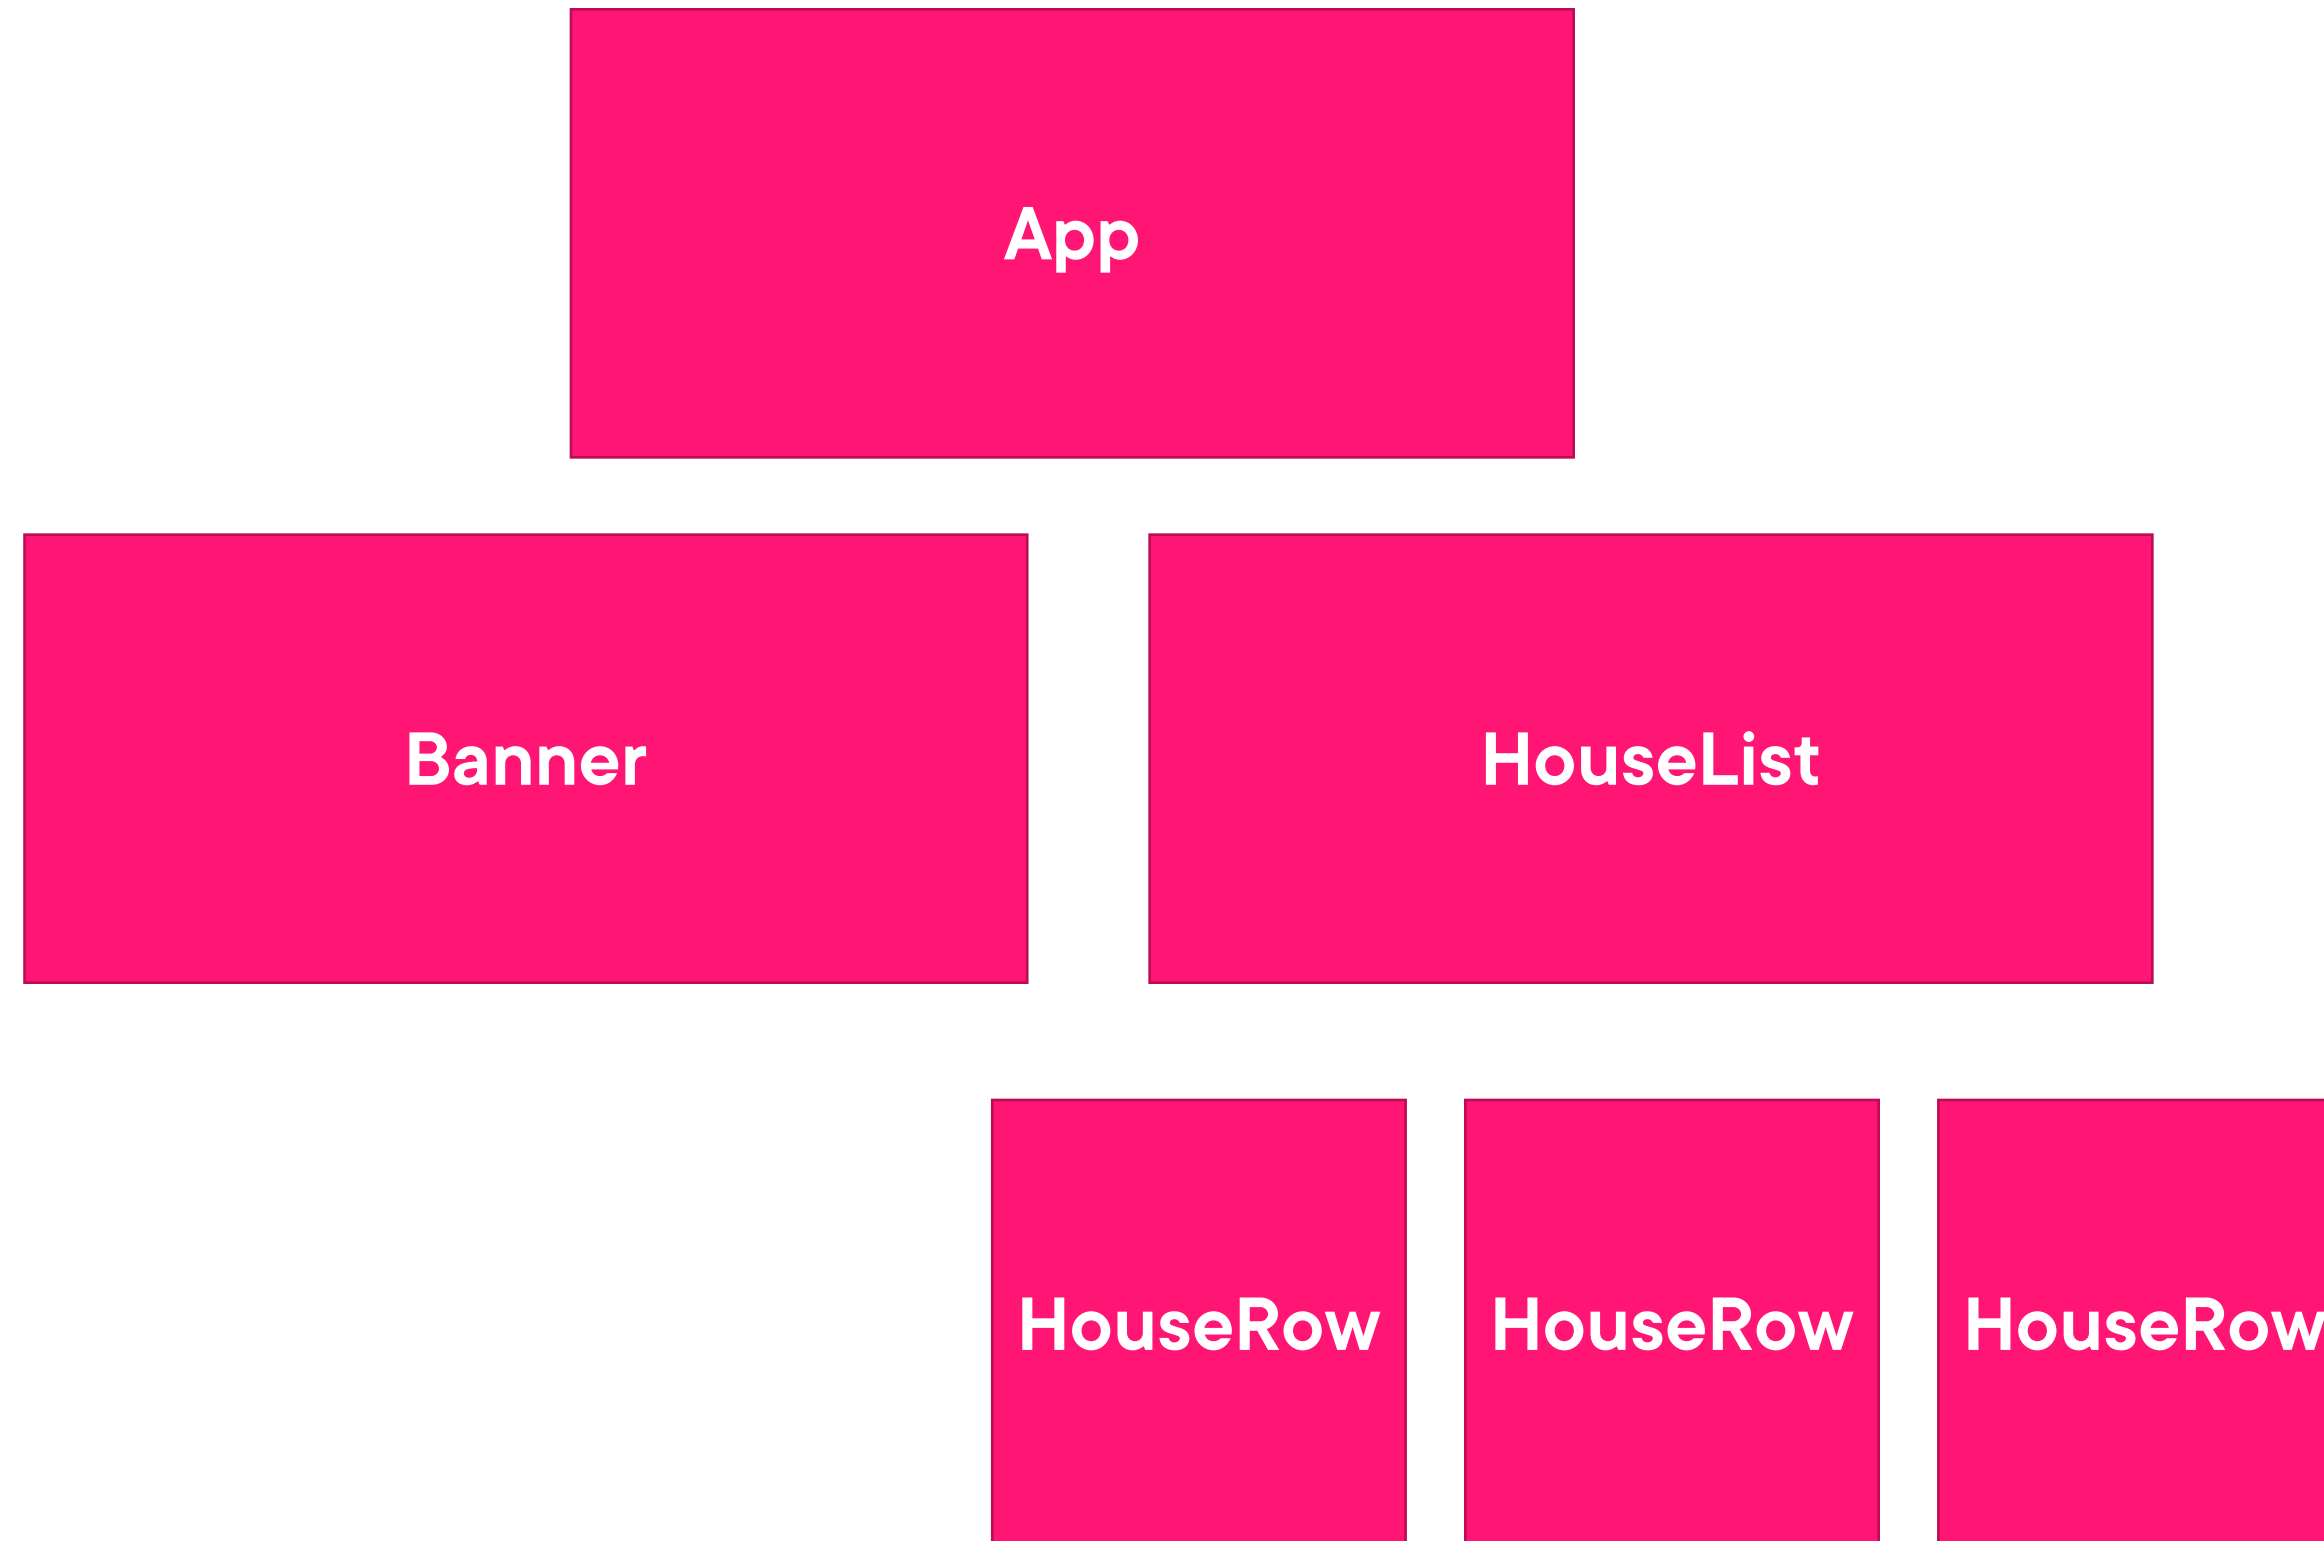

Context On a Lower Component Level

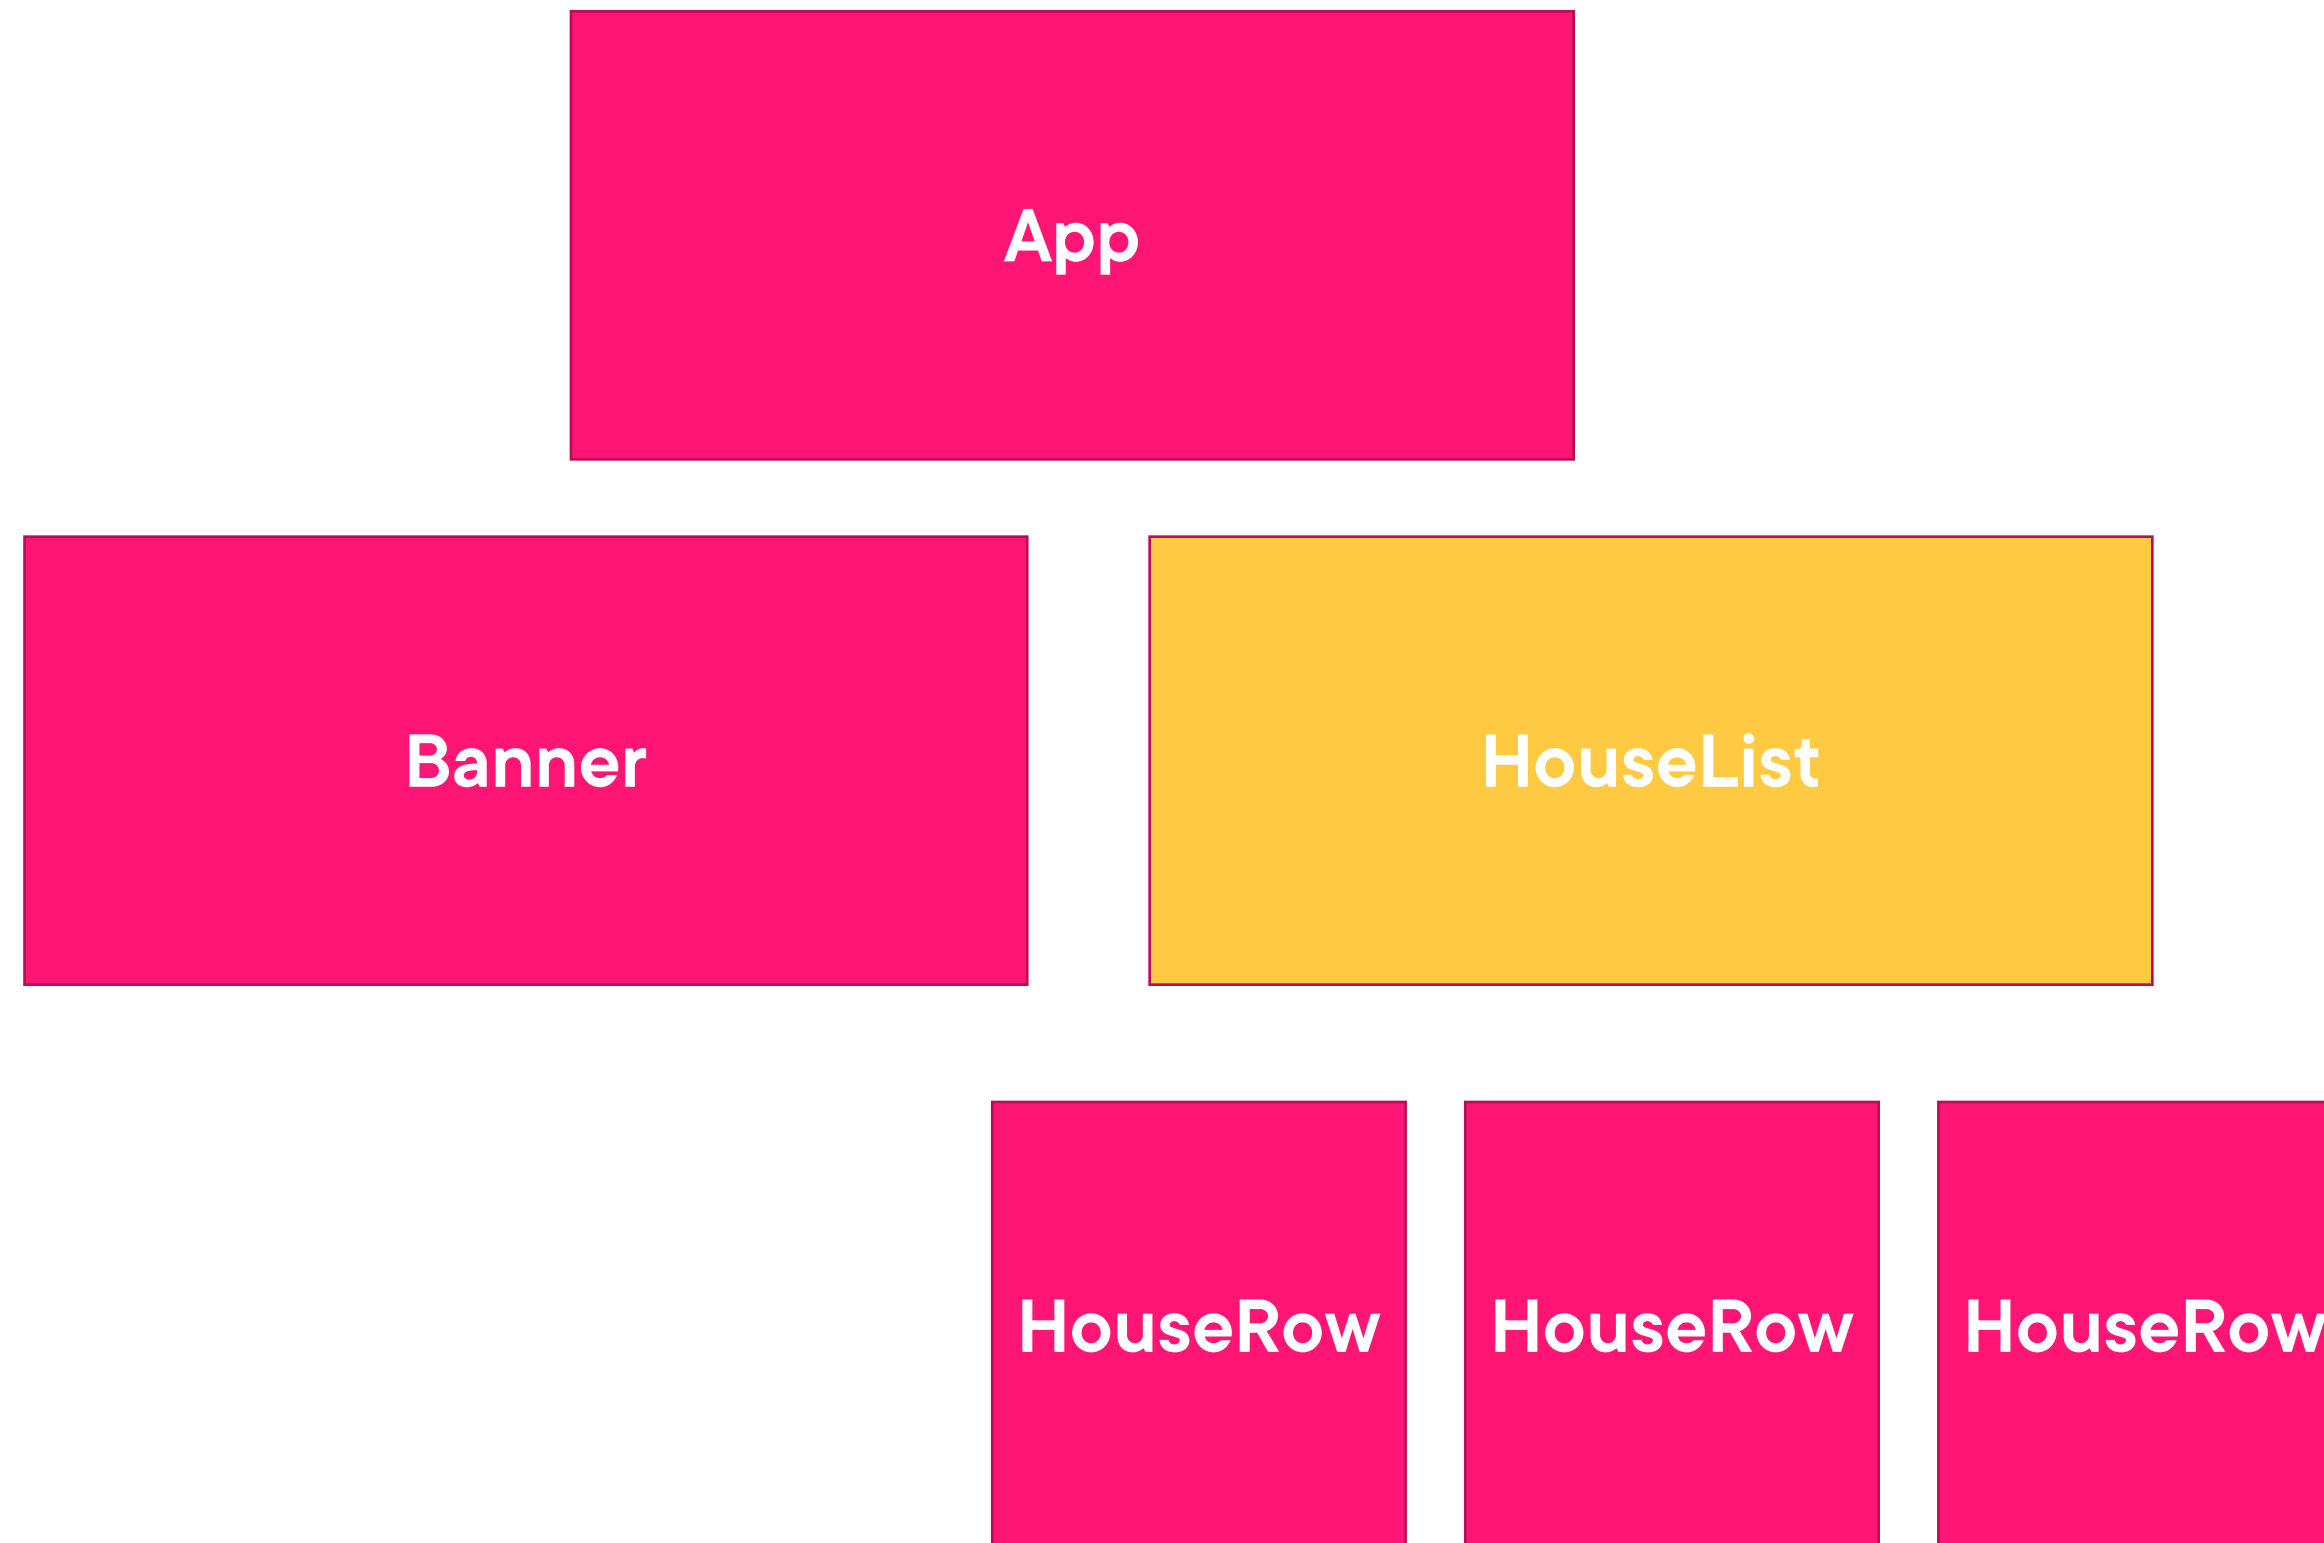

Context On a Lower Component Level

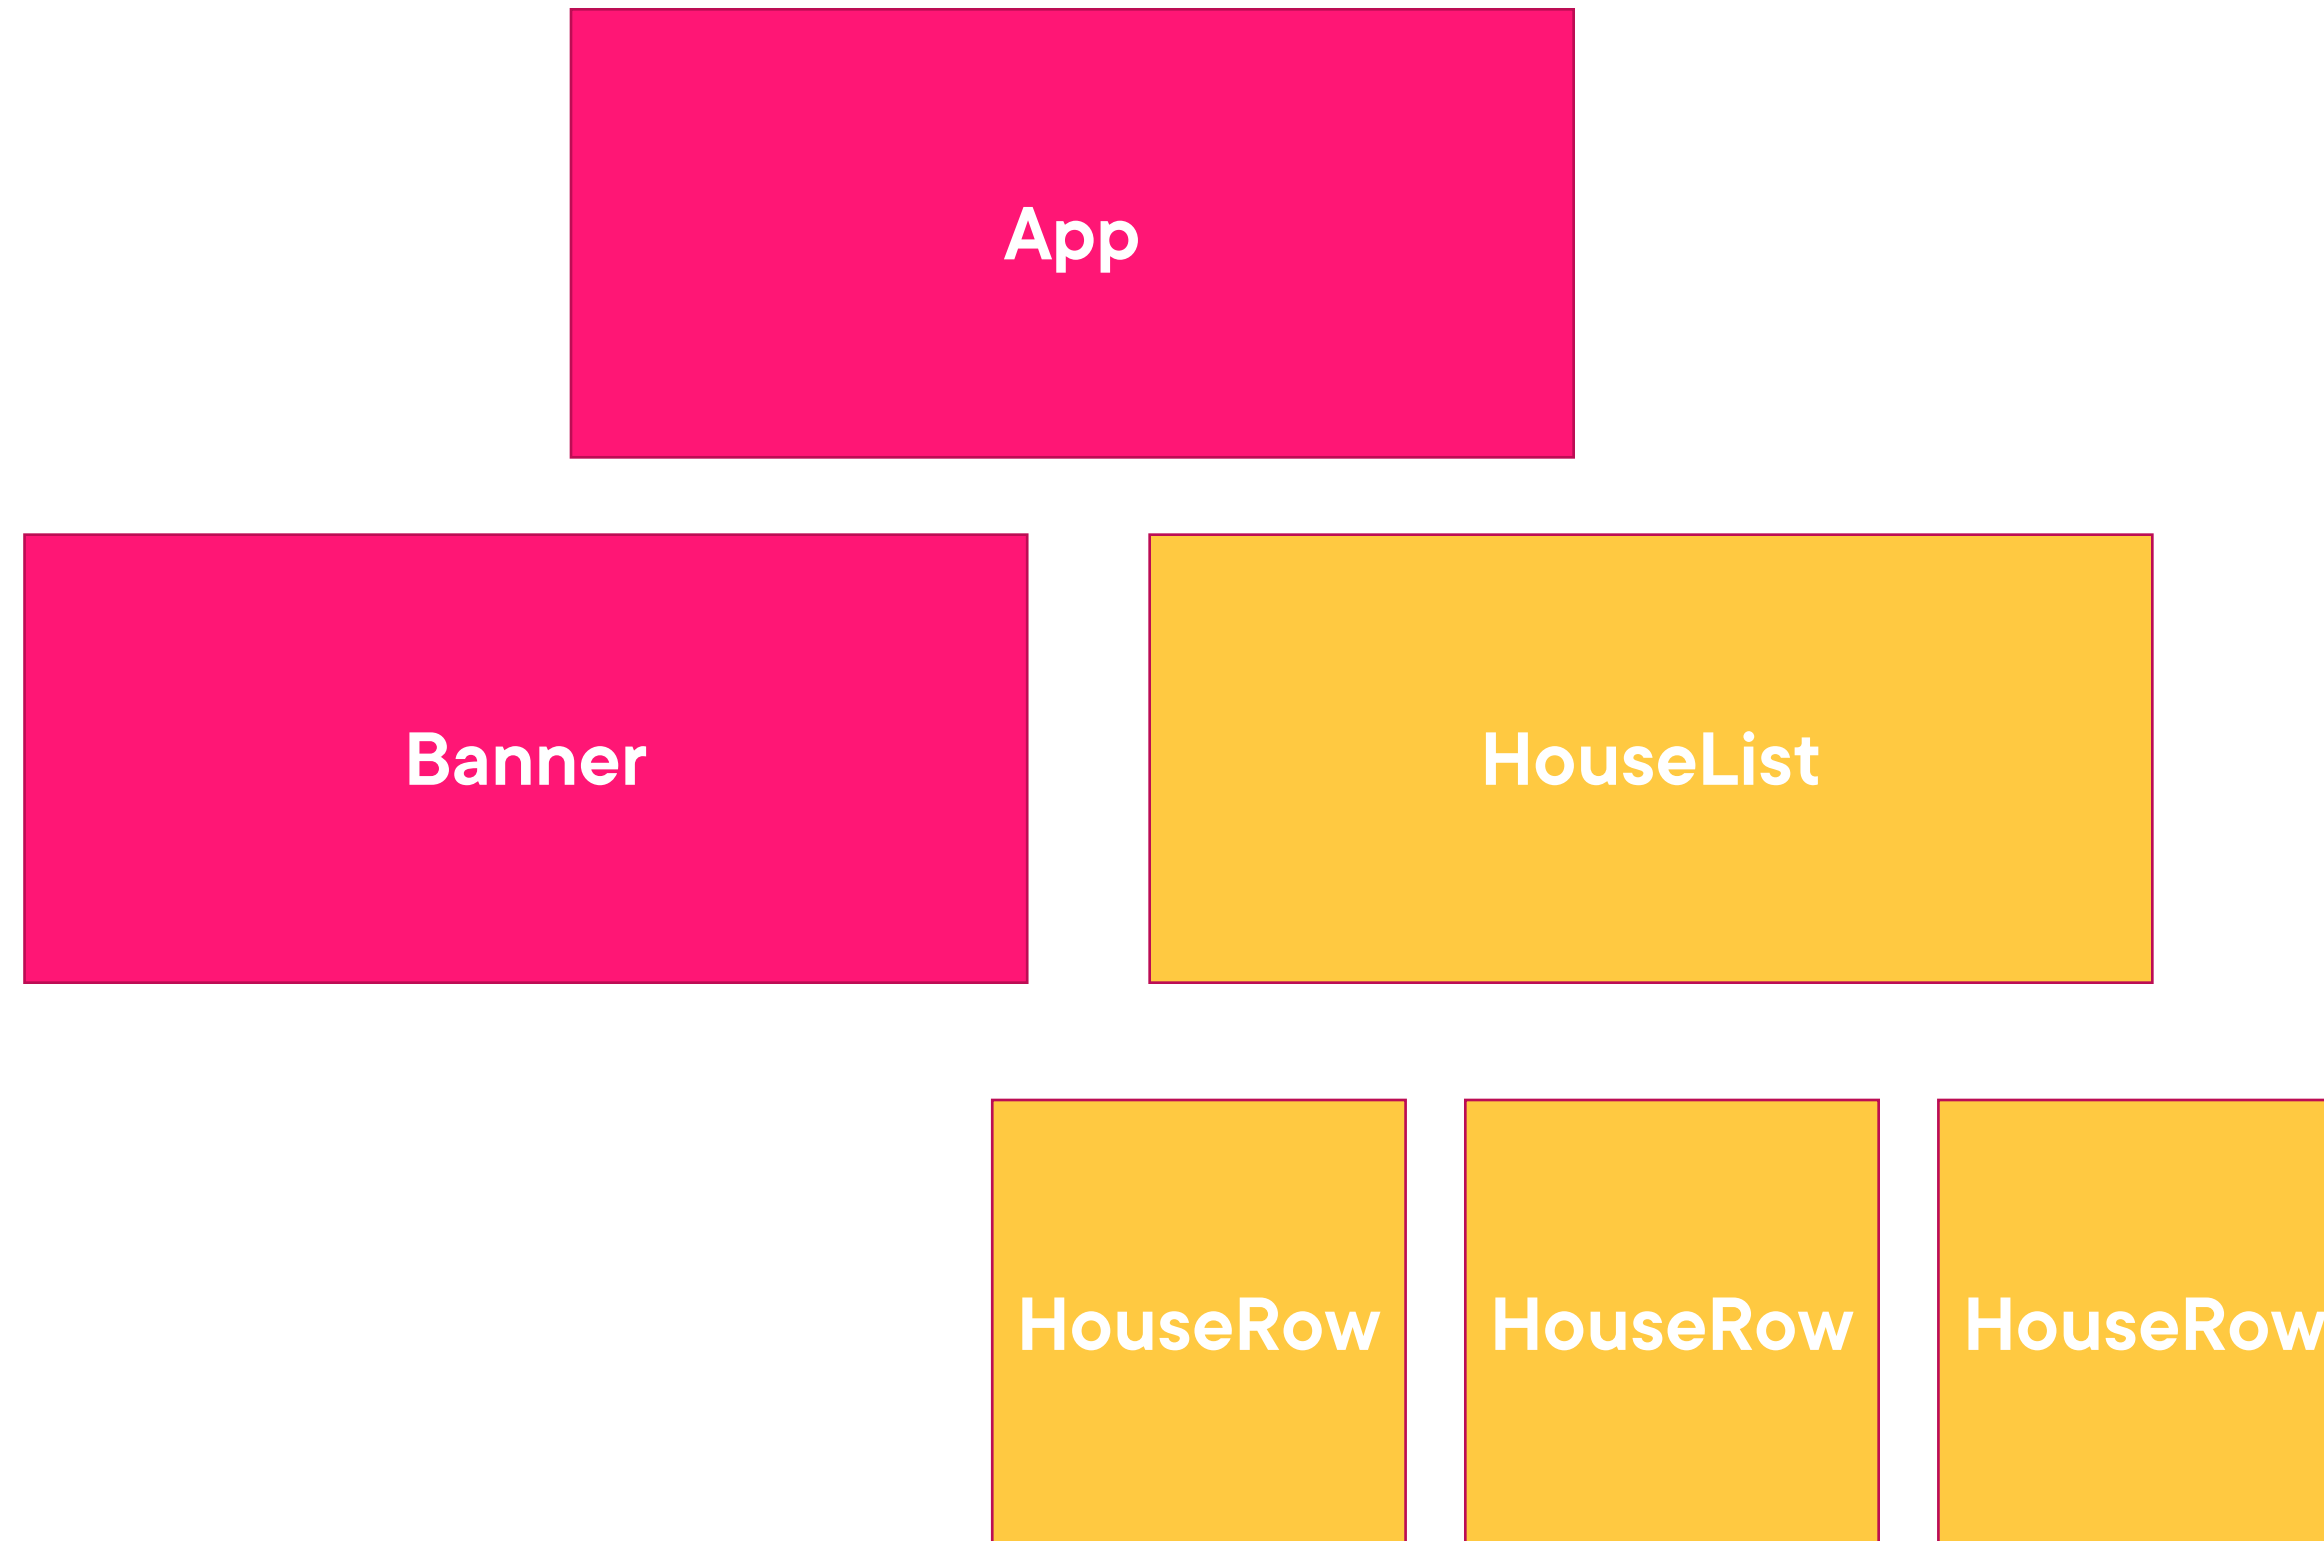

When to Use Context and Implications

When the same state has to be passed to
many components


Think about re-renders

Component reuse more difficult


Hidden state



Context and Re-Renders

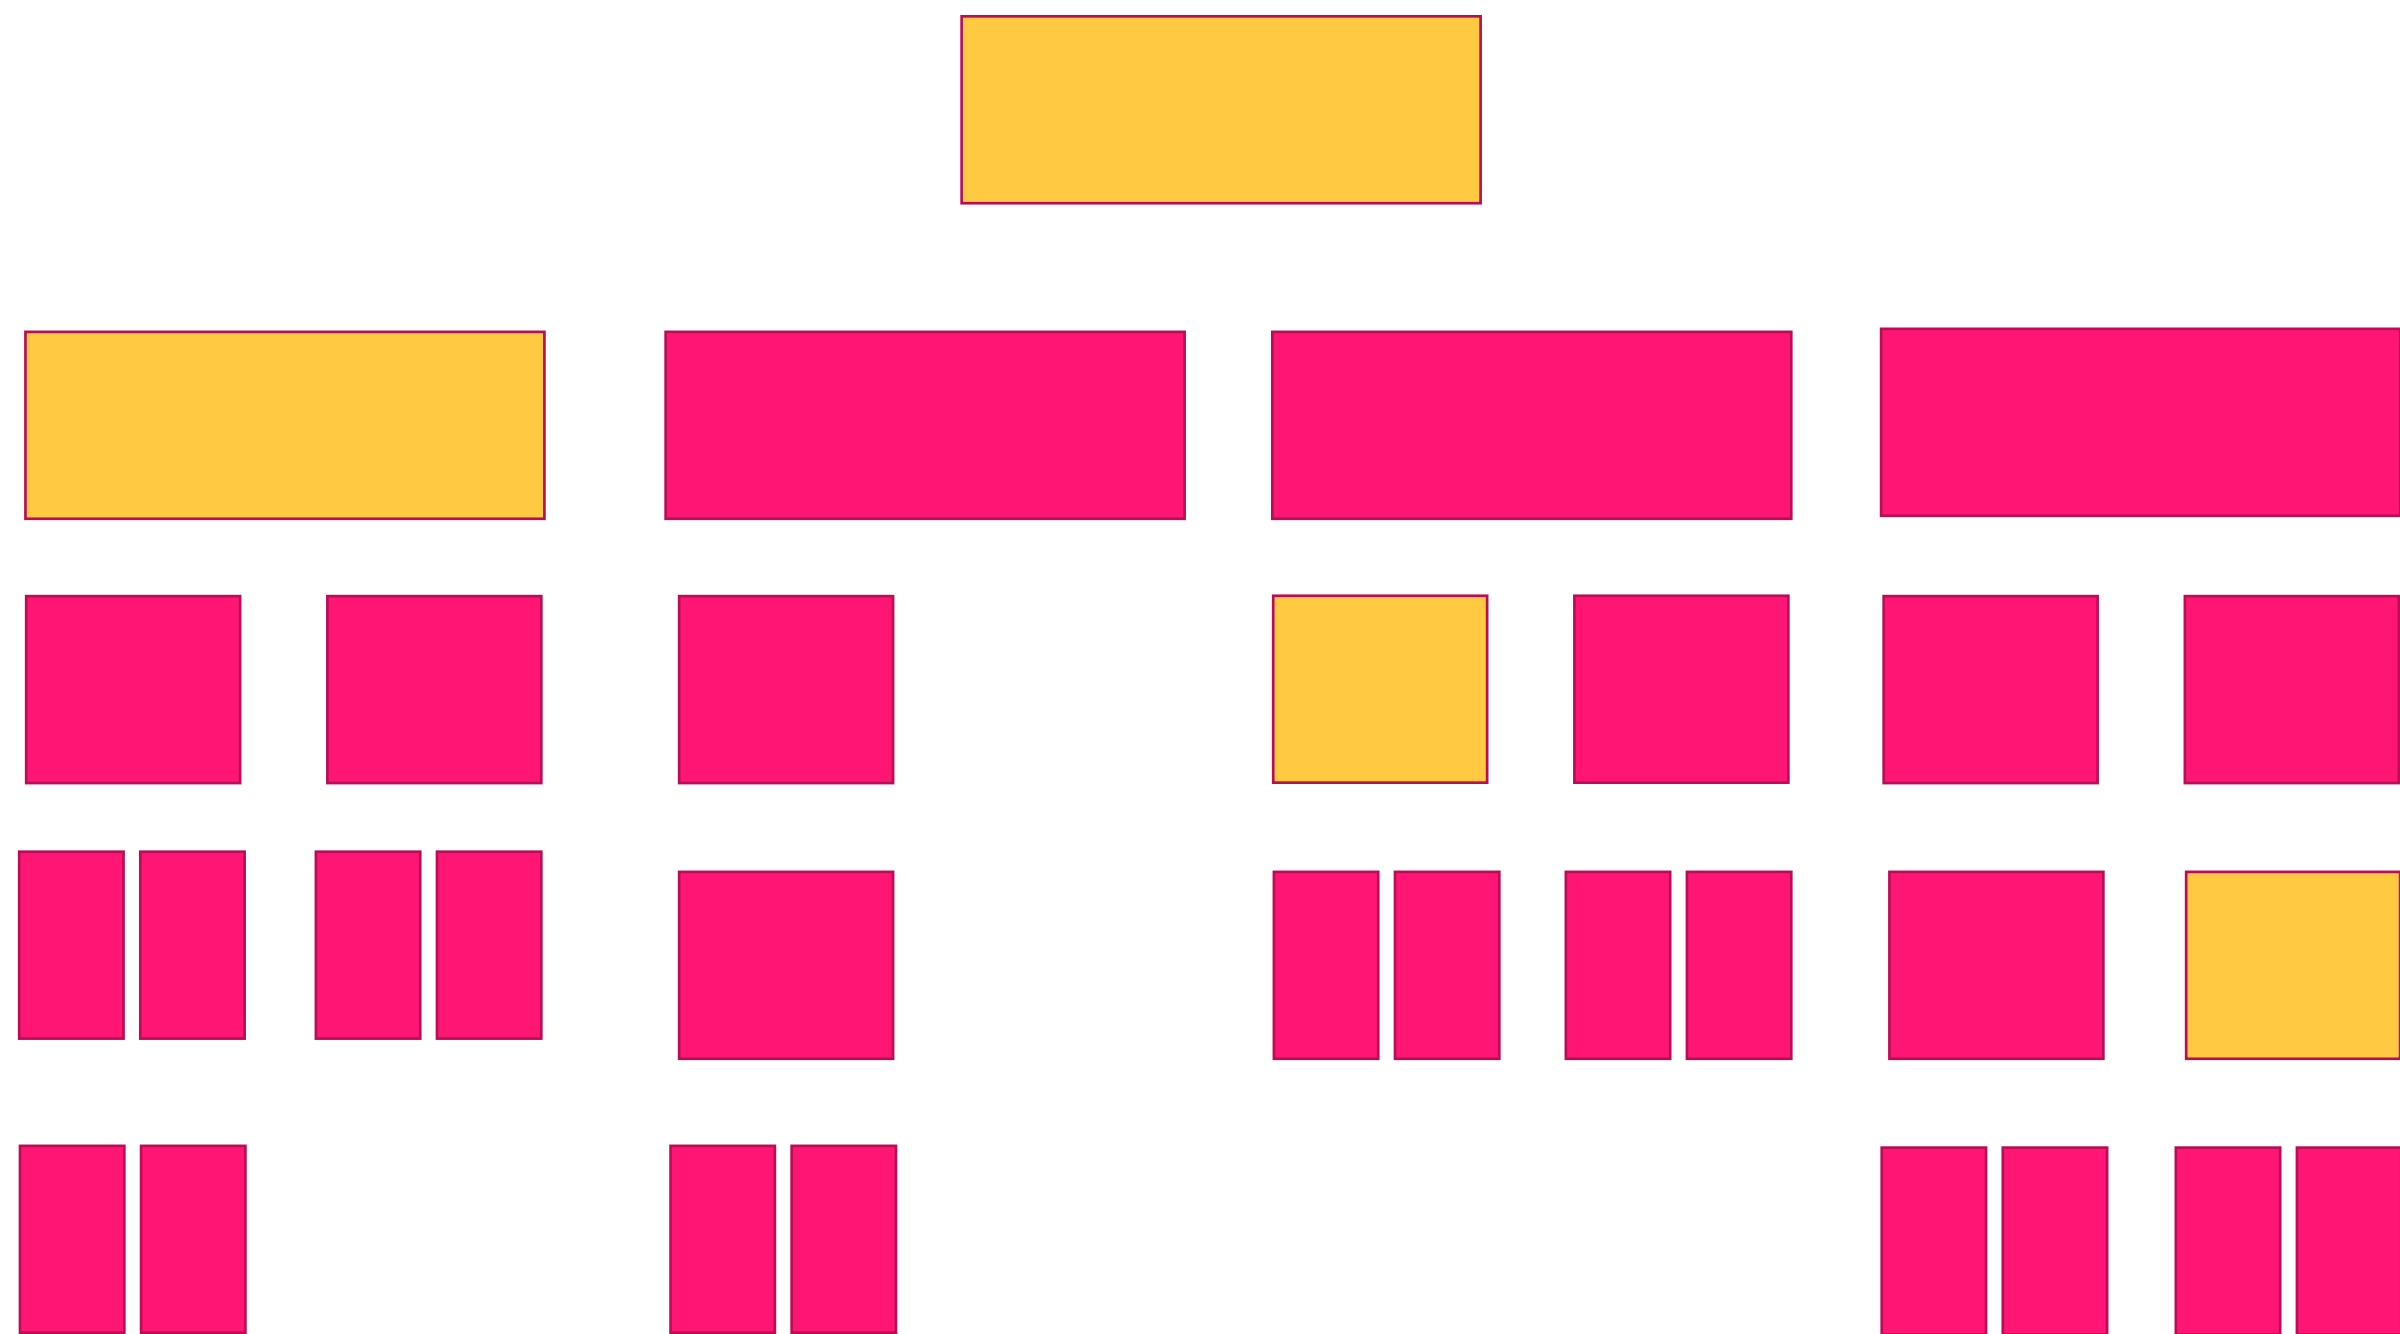

Context and Re-Renders

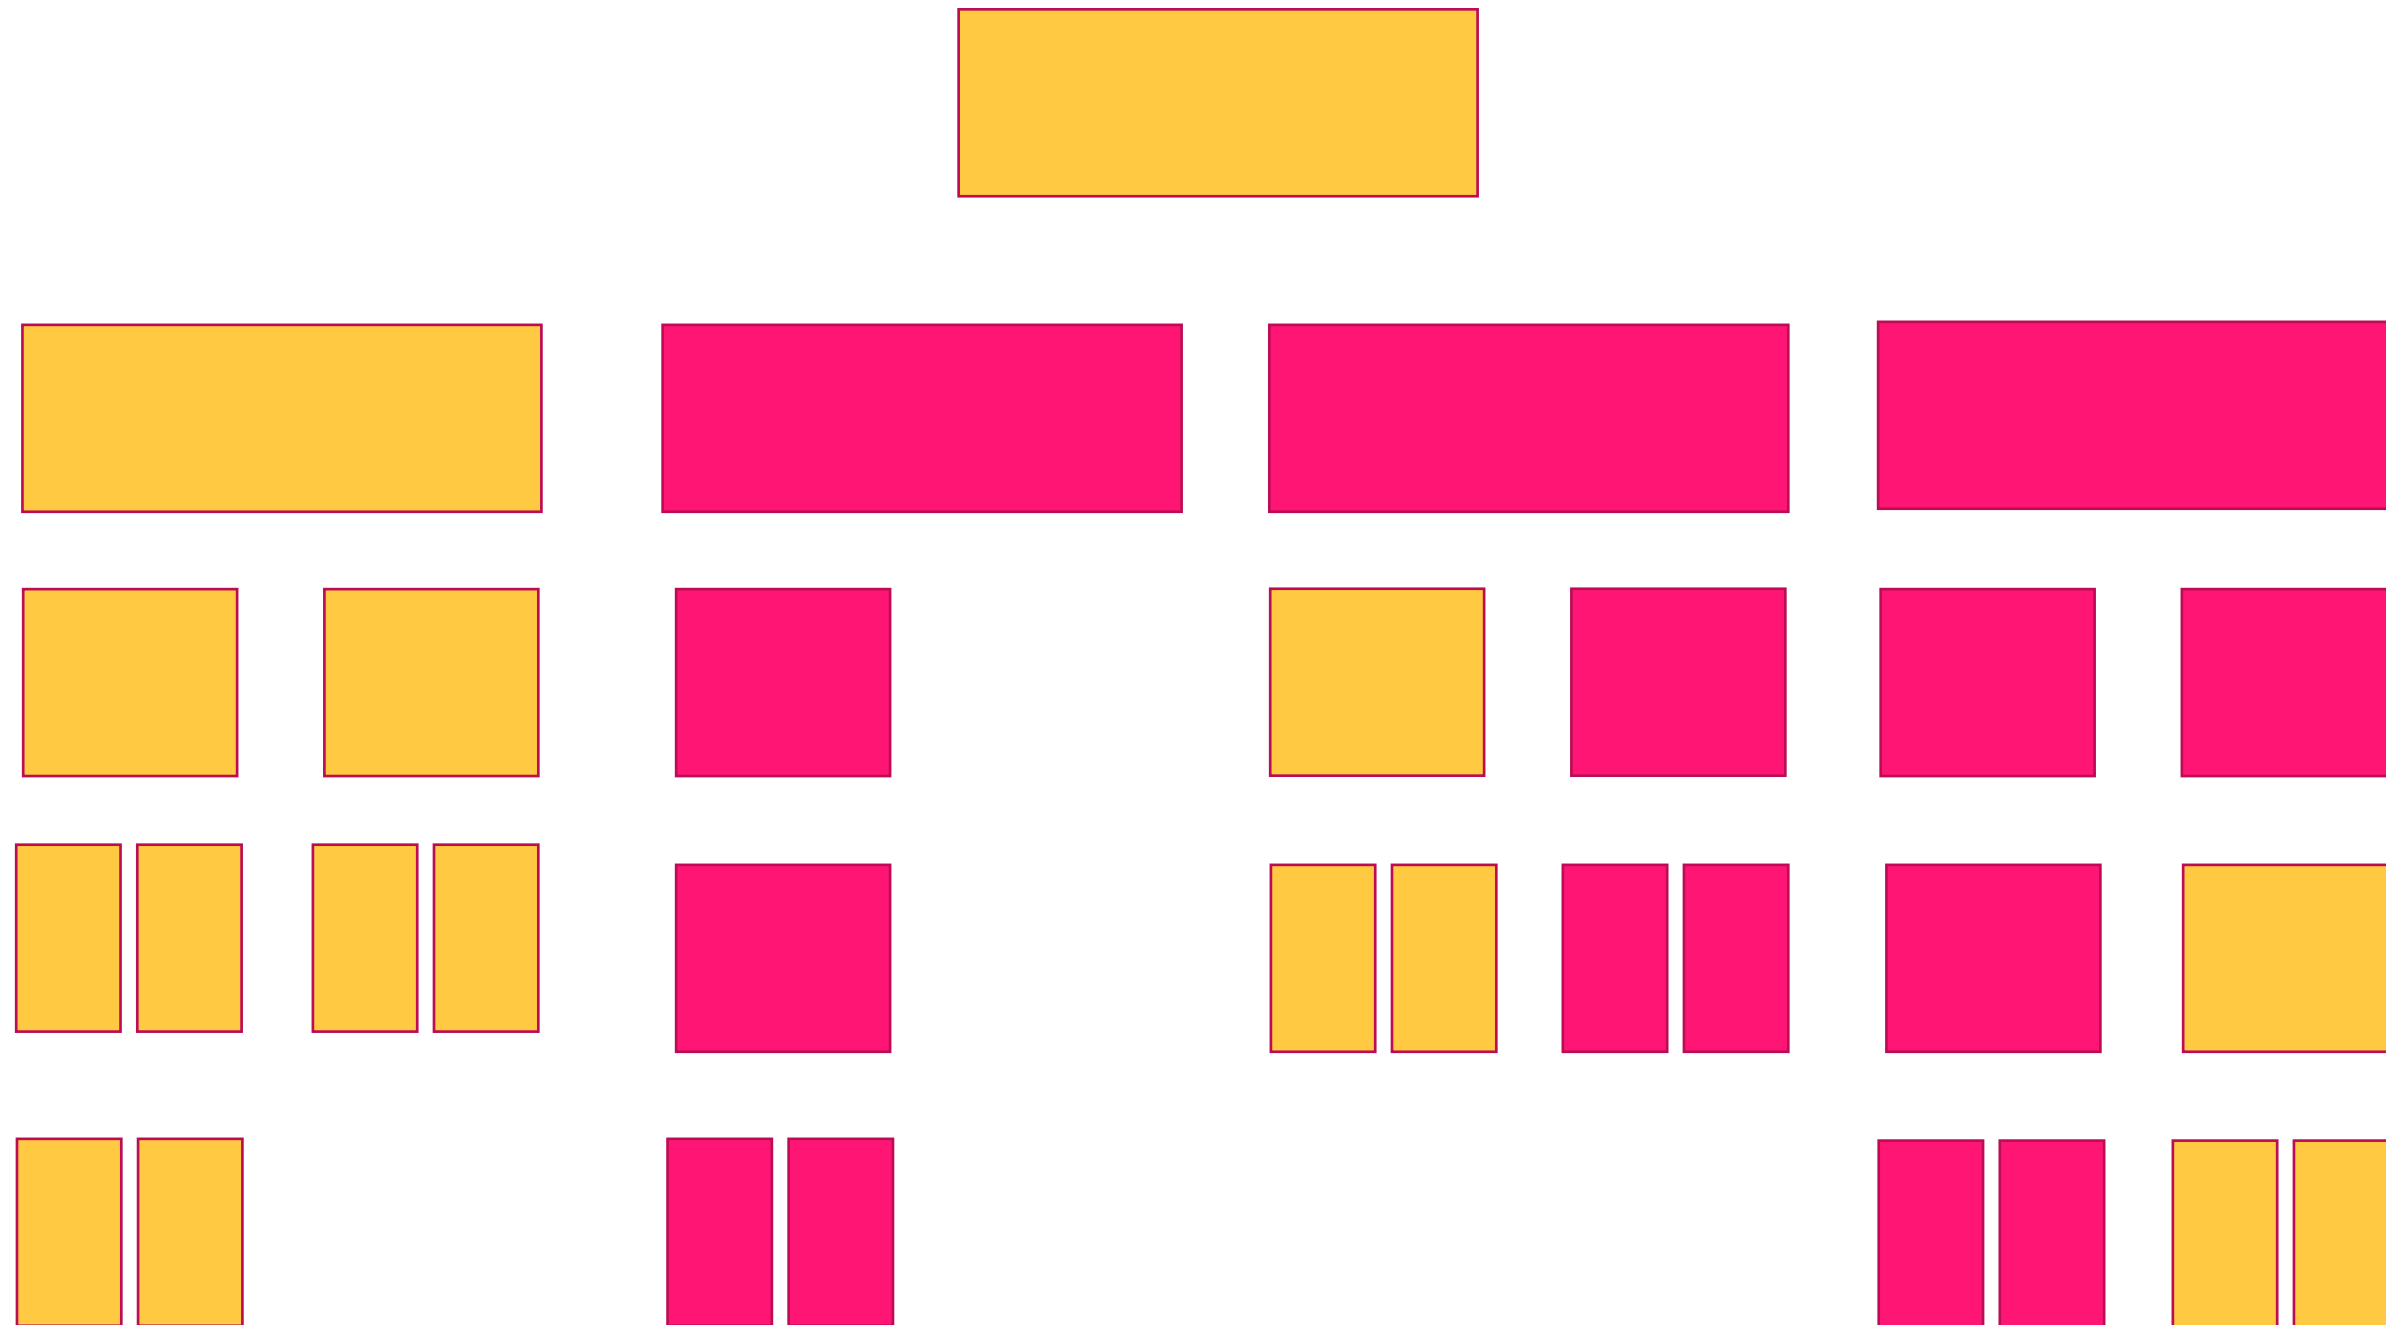

What If More Features Are Needed?

Examples:

- Browser history
- Deep linking

Routing library

React Router



Next up:

User Input and Forms

