

# Reading and Displaying Data

---



**Craig Shoemaker**

Senior Web Developer

@craigshoemaker   craigshoemaker.net

# Add, Remove, and Toggle Classes

---

```
.big-border {  
    border:10px solid #5ecda9;  
}
```

# Detect Classes

---

# Toggle a Class

---

# Read and Write Dimensions

---

Add Interactivity

---

## Click Function

```
$(() => {
```

```
$('#order-btn').click(e => {
```

```
// jQuery code here
```

```
});
```

```
});
```

## Click Function

```
$(( ) => {
```

```
$( '#order-btn' ).click(e => {
```

```
// jquery code here
```

```
});
```

```
});
```

## Click Function

```
$(( ) => {
```

```
$( '#order-btn' ).click( e => {
```

```
// jquery code here
```

```
});
```

```
});
```

▼ `jQuery.Event` {`originalEvent`: `PointerEvent`, `type`: `'click'`, `target`: `button#order`,  
 `currentTarget`: `button#order`, `isDefaultPrevented`: `f`, ...} ⓘ

- ▶ `currentTarget`: `button#order`  
 `data`: `null`
- ▶ `delegateTarget`: `button#order`
- ▶ `handleObj`: {`type`: `'click'`, `origType`: `'click'`, `data`: `null`, `guid`: `1`, `handler`: `f`}
- ▶ `isDefaultPrevented`: `f returnFalse()`  
 `jQuery36007059710938089026`: `true`
- ▶ `originalEvent`: `PointerEvent` {`isTrusted`: `true`, `pointerId`: `1`, `width`: `1`, `height`:  
 `relatedTarget`: `null`}
- ▶ `target`: `button#order`  
 `timestamp`: `3246.800000011921`  
 `type`: `"click"`  
 `altKey`: `(...)`  
 `bubbles`: `(...)`  
 `button`: `(...)`  
 `buttons`: `(...)`  
 `cancelable`: `(...)`  
 `changedTouches`: `(...)`  
 `char`: `(...)`

```
▼ jQuery.Event {originalEvent: PointerEvent, type: 'click', target: button#order
, currentTarget: button#order, isDefaultPrevented: f, ...} ⓘ
  ▶ currentTarget: button#order
    data: null
  ▶ delegateTarget: button#order
  ▶ handleObj: {type: 'click', origType: 'click', data: null, guid: 1, handler: f}
  ▶ isDefaultPrevented: f returnFalse()
    jQuery36007059710938089026: true
  ▶ originalEvent: PointerEvent {isTrusted: true, pointerId: 1, width: 1, height:
    relatedTarget: null
  ▶ target: button#order
    timeStamp: 3246.8000000011921
    type: "click"
    altKey: (...)
    bubbles: (...)
    button: (...)
    buttons: (...)
    cancelable: (...)
    changedTouches: (...)
    char: ( )
```

```
▼ jQuery.Event {originalEvent: PointerEvent, type: 'click', target: button#order  
  , currentTarget: button#order, isDefaultPrevented: f, ...} ⓘ  
  ▶ currentTarget: button#order  
    data: null  
  ▶ delegateTarget: button#order  
  ▶ handleObj: {type: 'click', origType: 'click', data: null, guid: 1, handler: f  
  ▶ isDefaultPrevented: f returnFalse()  
    jQuery36007059710938089026: true  
  ▶ originalEvent: PointerEvent {isTrusted: true, pointerId: 1, width: 1, height:  
    relatedTarget: null  
  ▶ target: button#order  
    timeStamp: 3246.8000000011921  
    type: "click"  
    altKey: (...)  
    bubbles: (...)  
    button: (...)  
    buttons: (...)  
    cancelable: (...)  
    changedTouches: (...)  
    char: (...)
```

```
key: (...)  
keyCode: (...)  
metaKey: (...)  
offsetX: (...)  
offsetY: (...)  
pageX: (...)  
pageY: (...)  
pointerId: (...)  
pointerType: (...)  
screenX: (...)  
screenY: (...)  
shiftKey: (...)  
targetTouches: (...)  
toElement: (...)  
touches: (...)  
view: (...)  
which: (...)  
► [[Prototype]]: Object
```


# Element Visibility

---

# Mouse Events

---

# jQuery Mouse Events

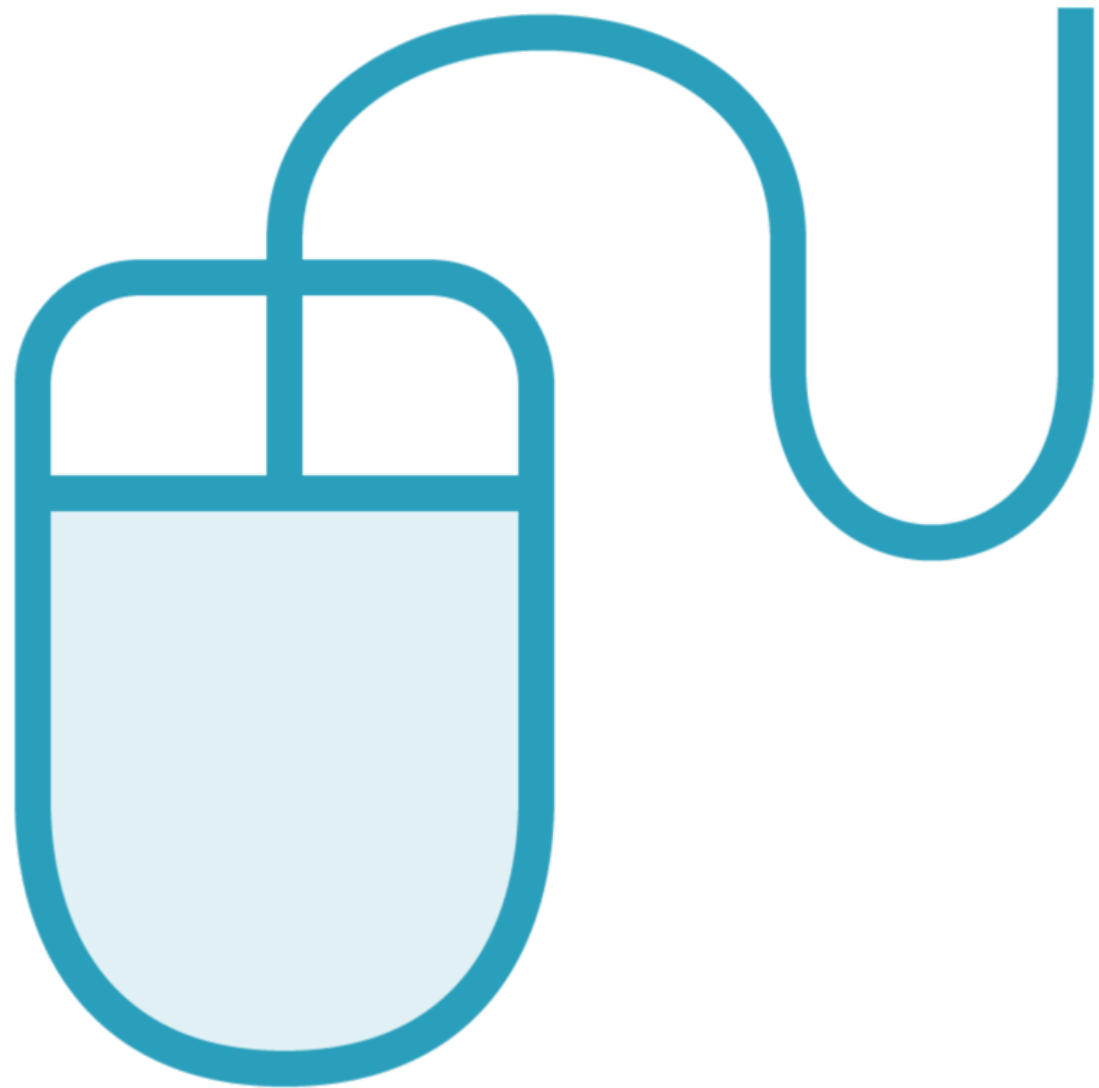

**click**

**contextmenu**

**dblclick**

**hover**

**mousedown**

**mouseenter**

**mouseleave**

**mousemove**

**mouseout**

**mouseup**


**toggle**

# Fetching Data

---

# Native `fetch` API

# Native `fetch` API

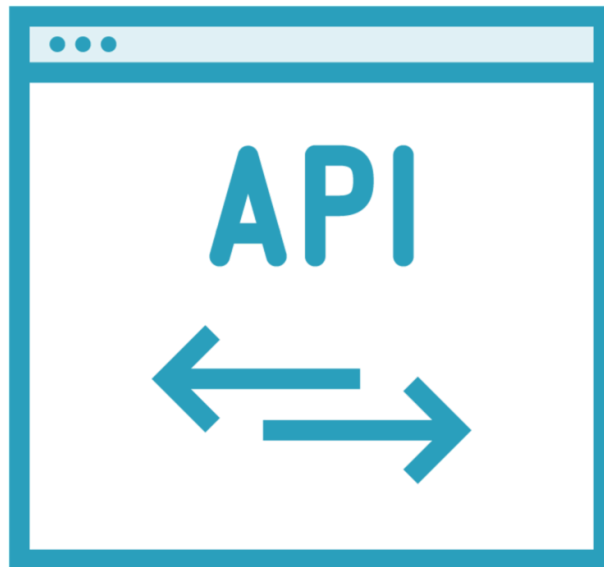

**Make asynchronous requests.**


Takes place of `XMLHttpRequest`

Sometimes known as “Ajax”

# fetch API

```
fetch('/data/pies.json')  
  .then((response) => response.json())  
  .then((data) => console.log(data));
```

# fetch vs jQuery Ajax

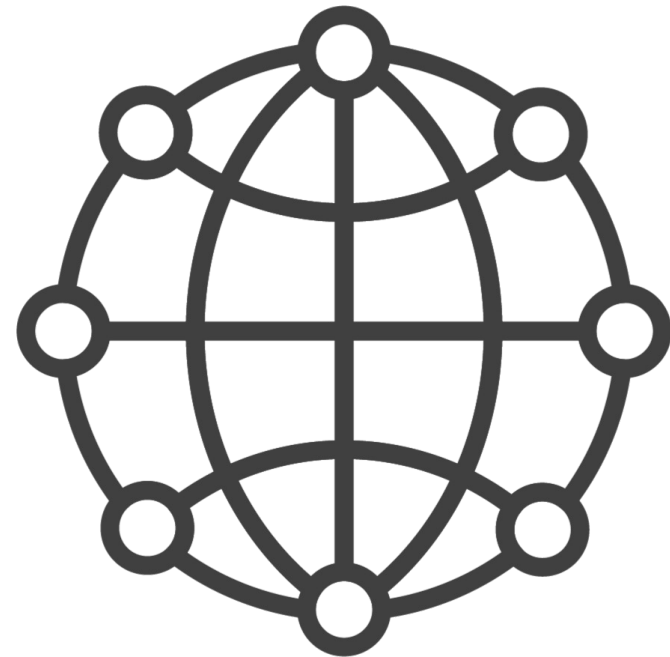

## **Errors:**

Only rejects requests on network failure

## **Credentials:**

Does not send cookies in cross-origin requests by default

# Add HTML Elements in a Loop

---

# Make Elements Interactive

---

# Demo



**Implement the Pies page**

# Demo



## Implement the Order page

# Posting Data

---

## Posting Data

```
const order = {  
  "first-name": $("#first-name").val(),  
  "last-name": $("#last-name").val(),  
  "street-address": $("#street-address").val(),  
  "email": $("#email").val(),  
  "details": JSON.parse(order)  
};  
  
$.post("/api/order", order)  
  .done(response => {  
    console.log("Order submitted");  
    console.log(response);  
  });
```

# Posting Data

```
const order = {  
  "first-name": $("#first-name").val(),  
  "last-name": $("#last-name").val(),  
  "street-address": $("#street-address").val(),  
  "email": $("#email").val(),  
  "details": JSON.parse(order)  
};  
  
$.post("https://example.com/api/order", order)  
  .done(response => {  
    console.log("Order submitted");  
    console.log(response);  
  });
```

# Posting Data

```
const order = {  
  "first-name": $("#first-name").val(),  
  "last-name": $("#last-name").val(),  
  "street-address": $("#street-address").val(),  
  "email": $("#email").val(),  
  "details": JSON.parse(order)  
};  
  
$.post("https://example.com/api/order", order)  
  .done(response => {  
    console.log("Order submitted");  
    console.log(response);  
  });
```

# Posting Data

```
const order = {  
  "first-name": $("#first-name").val(),  
  "last-name": $("#last-name").val(),  
  "street-address": $("#street-address").val(),  
  "email": $("#email").val(),  
  "details": JSON.stringify(order)  
};  
  
$.post("https://example.com/api/order", order)  
  .done(response => {  
    console.log("Order submitted");  
    console.log(response);  
  });
```

# Posting Data

```
const order = {  
  "first-name": $("#first-name").val(),  
  "last-name": $("#last-name").val(),  
  "street-address": $("#street-address").val(),  
  "email": $("#email").val(),  
  "details": JSON.parse(order)  
};  
  
$.post("https://example.com/api/order", order)  
  .done(response => {  
    console.log("Order submitted");  
    console.log(response);  
  });
```

# Posting Data

```
const order = {  
  "first-name": $("#first-name").val(),  
  "last-name": $("#last-name").val(),  
  "street-address": $("#street-address").val(),  
  "email": $("#email").val(),  
  "details": JSON.parse(order)  
};  
  
$.post("https://example.com/api/order", order)  
  .done(response => {  
    console.log("Order submitted");  
    console.log(response);  
  });
```

## Posting Data

```
const order = {  
  "first-name": $("#first-name").val(),  
  "last-name": $("#last-name").val(),  
  "street-address": $("#street-address").val(),  
  "email": $("#email").val(),  
  "details": JSON.parse(order)  
};  
  
$.post("https://example.com/api/order", order)  
  .done(response => {  
    console.log("Order submitted");  
    console.log(response);  
  });
```

**Up Next:**  
jQuery Techniques

---