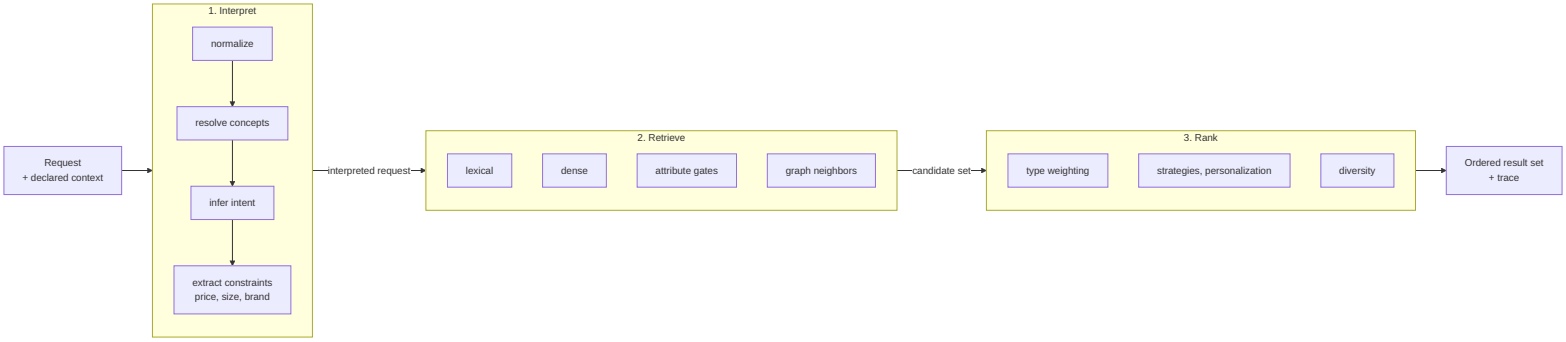
Request
+ declared context
1. Interpret
normalize
resolve concepts
infer intent
extract constraints
price, size, brand
interpreted request
2. Retrieve
lexical
dense
attribute gates
graph neighbors
candidate set
3. Rank
type weighting
strategies, personalization
diversity
Ordered result set
+ trace