TSOGO-BIS

Supabase database, security, functions, and operations

Supabase reference | Prepared 24 October 2026 | Derived from checked-in schema and migrations

Scope and live-state limitation

This is an inventory of the repository's Supabase definitions, not a live introspection export. The Supabase MCP read-only schema, function, and migration listing calls failed due to a connector transport error during preparation. The production project could not be confirmed. The reference schema, migrations and local Edge Function files are source evidence; they do not prove every object has been deployed.

Configured project reference in this workspace: bompysyuamyalbzmubzo. No credentials or secret values are included.

1. Supabase surface map

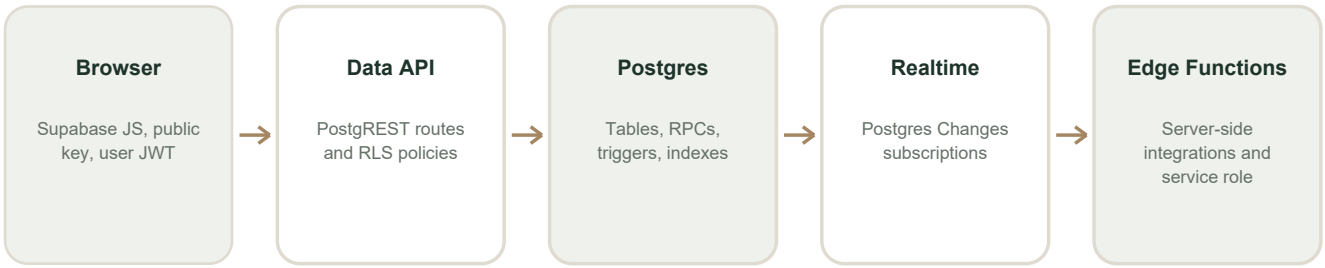


Figure 1. Supabase service boundaries; Auth and Storage are also used by the application.

2. Schema inventory

Schemas present in checked-in SQL: public (Data API-facing), private (internal helper/rate-limit functions and tables), auth/storage/realtime (Supabase-managed services referenced by policies and functions). The inventory below combines schema-v2.sql with later migrations by adding declared columns; review the migration order and actual live catalog for authoritative final types.

Table	Columns found in source snapshot
private.password_reset_rate_limits	bucket_hash text; window_started_at timestamptz; attempt_count integer; updated_at timestamptz
public.admin_new_order_email_log	checkout_id bigint; recipient_email text; sent_at timestamptz

Table	Columns found in source snapshot
public.cart_items	id bigint; user_id uuid; product_id bigint; quantity integer; variant_key text; selected_options jsonb; created_at timestamptz; updated_at timestamptz
public.categories	id bigint; parent_id bigint; slug text; name text; description text; sort_order integer; is_active boolean; created_at timestamptz; updated_at timestamptz
public.checkout_items	id bigint; checkout_id bigint; product_id bigint; quantity integer; price numeric(12,2); size text; color text; shipping_method text; shipping_fee numeric(12,2); created_at timestamptz
public.checkout_status_email_log	checkout_id bigint; status_type text; status text; sent_at timestamptz
public.checkouts	checkout_id bigint; id bigint; user_id uuid; visitor_id text; user_name text; email text; phone_number text; address text; total numeric(12,2); items jsonb; payment_method text; status text; delivery_status text; tracking_number text; tracking_link text; created_at timestamptz; idempotency_key text; payment_provider text; payment_reference text; payment_url text; payment_status text; inventory_reserved boolean; order_id uuid; referral_credit_applied numeric(12,2); amount_due numeric(12,2); paid_at timestamptz; service_fee numeric(12,2); payment_reminder_sent_at timestamptz; shipping_payment_mode text; shipping_due_on_delivery numeric(12,2); delivered_at timestamptz; email_language text; coupon_code text; coupon_discount numeric(12,2)
public.coupons	id uuid; code text; discount_type text; discount_value numeric(12,2); minimum_amount numeric(12,2); product_id bigint; active boolean; starts_at timestamptz; expires_at timestamptz; created_at timestamptz; updated_at timestamptz; category_id bigint; subcategory_id bigint
public.currency_rates	base_currency char(3); quote_currency char(3); rate numeric(20,10); updated_at timestamptz
public.notifications	id uuid; user_id uuid; type text; entity_id text; payload jsonb; created_at timestamptz; read_at timestamptz
public.order_confirmation_email_jobs	checkout_id bigint; status text; attempts integer; last_error text; sent_at timestamptz; updated_at timestamptz
public.order_items	id bigint; order_id uuid; product_id bigint; product_name text; product_sku text; selected_options jsonb; quantity integer; unit_price numeric(12,2); line_total numeric(12,2); created_at timestamptz
public.orders	id uuid; order_number bigint; user_id uuid; customer_name text; customer_email text; customer_phone text; shipping_address jsonb; currency char(3); subtotal numeric(12,2); shipping_total numeric(12,2); tax_total numeric(12,2); grand_total numeric(12,2); status text; created_at timestamptz; updated_at timestamptz
public.payment_attempts	id uuid; order_id uuid; provider text; provider_reference text; idempotency_key text; amount numeric(12,2); currency char(3); status text; provider_payload jsonb; created_at timestamptz; updated_at timestamptz
public.product_images	id bigint; product_id bigint; storage_path text; image_url text; alt_text text; sort_order integer; is_primary boolean; created_at timestamptz
public.product_reviews	id bigint; product_id bigint; user_id uuid; order_item_id bigint; rating smallint; title text; body text; status text; created_at timestamptz; updated_at timestamptz
public.product_tags	product_id bigint; tag text; valid_from timestamptz; valid_until timestamptz
public.products	id bigint; category_id bigint; slug text; name text; description text; price numeric(12,2); currency char(3); stock_quantity integer; weight_grams integer; origin_country text; options jsonb; shipping_methods jsonb; status text; published_at timestamptz; created_at timestamptz; updated_at timestamptz; weight numeric(12,3); subcategory_id bigint
public.profiles	user_id uuid; display_name text; phone text; preferred_language text; created_at timestamptz; updated_at timestamptz; referral_code text
public.referral_wallet_ledger	id uuid; user_id uuid; entry_type text; amount numeric(12,2); referral_id uuid; checkout_id bigint; created_at timestamptz
public.referrals	id uuid; referrer_user_id uuid; referred_user_id uuid; referral_code text; created_at timestamptz; commission_checkout_id bigint; commission_amount numeric(12,2); commission_status text; commission_created_at timestamptz
public.shipment_events	id bigint; shipment_id uuid; status text; location text; message text; occurred_at timestamptz; created_at timestamptz
public.shipments	id uuid; order_id uuid; carrier text; tracking_number text; tracking_url text; status text; estimated_delivery date; shipped_at timestamptz; delivered_at timestamptz; created_at timestamptz; updated_at timestamptz

Table	Columns found in source snapshot
public.site_settings	id boolean; site_name text; contact_email text; contact_phone text; whatsapp_phone text; base_currency char(3); tax_rate numeric(6,5); terms_and_policies text; and prices; or customs; updated_at timestamptz; terms_and_policies_en text; terms_and_policies_fr text; coupon_code text; coupon_discount_type text; coupon_discount_value numeric(12,2); coupon_minimum numeric(12,2); coupon_active boolean; ad_popup_enabled boolean; ad_popup_title_en text; ad_popup_title_fr text; ad_popup_body_en text; ad_popup_body_fr text; ad_popup_cta_en text; ad_popup_cta_fr text; ad_popup_image_url text; ad_popup_link_url text; ad_popup_starts_at timestamptz; ad_popup_ends_at timestamptz
public.subcategories	id bigint; category_id bigint; name text; slug text; description text; sort_order integer; is_active boolean; created_at timestamptz; updated_at timestamptz
public.user_roles	user_id uuid; role text; created_at timestamptz

Column types are compact SQL type labels. Primary keys, foreign keys, defaults, checks, RLS and nullable constraints should be verified from the actual migration statements; names ending in _id are not automatically foreign keys.

Foreign-key constraints found in source

Source column	References	Source file
public.admin_new_order_email_log.checkout_id	public.checkouts.checkout_id	20261023370000_admin_new_order_email_log.sql
public.cart_items.product_id	public.products.id	schema-v2.sql
public.cart_items.user_id	auth.users.id	schema-v2.sql
public.categories.parent_id	public.categories.id	schema-v2.sql
public.checkout_items.checkout_id	public.checkouts.checkout_id	20261023100000_secure_fapshi_checkout.sql
public.checkout_items.product_id	public.products.id	20261023100000_secure_fapshi_checkout.sql
public.checkout_status_email_log.checkout_id	public.checkouts.checkout_id	20261023360000_checkout_status_email_log.sql
public.checkouts.user_id	auth.users.id	20261023100000_secure_fapshi_checkout.sql
public.coupons.product_id	public.products.id	20261024073736_admin_coupons_ads_and_order_tools.sql
public.notifications.user_id	auth.users.id	20261024084156_dashboard_notifications.sql
public.order_confirmation_email_jobs.checkout_id	public.checkouts.checkout_id	20261023170000_order_confirmation_and_shipping_payment.sql
public.order_items.order_id	public.orders.id	schema-v2.sql
public.order_items.product_id	public.products.id	schema-v2.sql
public.orders.user_id	auth.users.id	schema-v2.sql
public.payment_attempts.order_id	public.orders.id	schema-v2.sql
public.product_images.product_id	public.products.id	schema-v2.sql
public.product_reviews.order_item_id	public.order_items.id	schema-v2.sql
public.product_reviews.product_id	public.products.id	schema-v2.sql
public.product_reviews.user_id	auth.users.id	schema-v2.sql
public.product_tags.product_id	public.products.id	schema-v2.sql
public.products.category_id	public.categories.id	schema-v2.sql
public.profiles.user_id	auth.users.id	schema-v2.sql
public.referral_wallet_ledger.checkout_id	public.checkouts.checkout_id	20261023200000_referral_store_credit.sql
public.referral_wallet_ledger.referral_id	public.referrals.id	20261023200000_referral_store_credit.sql
public.referral_wallet_ledger.user_id	public.profiles.user_id	20261023200000_referral_store_credit.sql
public.referrals.commission_checkout_id	public.checkouts.checkout_id	20261023190000_referrals_and_first_order_commission.sql
public.referrals.referred_user_id	public.profiles.user_id	20261023190000_referrals_and_first_order_commission.sql
public.referrals.referrer_user_id	public.profiles.user_id	20261023190000_referrals_and_first_order_commission.sql
public.shipment_events.shipment_id	public.shipments.id	schema-v2.sql

Source column	References	Source file
public.shipments.order_id	public.orders.id	schema-v2.sql
public.subcategories.category_id	public.categories.id	20261023230000_categories_subcategories.sql
public.user_roles.user_id	auth.users.id	schema-v2.sql

3. Index inventory

Explicit CREATE INDEX statements found in schema-v2.sql and migrations. PostgreSQL also creates indexes for primary-key and unique constraints; those may not appear in this list.

Index	Table	Definition / source
cart_items_user_idx	public.cart_items	create index cart_items_user_idx on public.cart_items(user_id); schema-v2.sql
checkout_items_checkout_id_idx	public.checkout_items	create index if not exists checkout_items_checkout_id_idx on public.checkout_items(checkout_id); 20261023100000_secure_fapshi_checkout.sql
checkouts_order_id_uidx	public.checkouts	create unique index if not exists checkouts_order_id_uidx on public.checkouts(order_id) where order_id is not null; 20261023120000_link_fapshi_checkouts_to_orders.sql
checkouts_payment_reference_uidx	public.checkouts	create unique index if not exists checkouts_payment_reference_uidx on public.checkouts(payment_reference) where payment_reference is not null; 20261023100000_secure_fapshi_checkout.sql
checkouts_user_created_idx	public.checkouts	create index if not exists checkouts_user_created_idx on public.checkouts(user_id, created_at desc); 20261023100000_secure_fapshi_checkout.sql
checkouts_user_idempotency_key_uidx	public.checkouts	create unique index if not exists checkouts_user_idempotency_key_uidx on public.checkouts(user_id, idempotency_key) where idempotency_key is not null; 20261023100000_secure_fapshi_checkout.sql
coupons_active_product_idx	public.coupons	create index if not exists coupons_active_product_idx on public.coupons(active, product_id, code); 20261024073736_admin_coupons_ads_and_order_tools.sql
coupons_category_scope_idx	public.coupons	create index if not exists coupons_category_scope_idx on public.coupons(category_id) where category_id is not null; 20261024080256_add_coupon_category_subcategory_scope.sql
coupons_product_scope_idx	public.coupons	create index if not exists coupons_product_scope_idx on public.coupons(product_id) where product_id is not null; 20261024080256_add_coupon_category_subcategory_scope.sql
coupons_subcategory_scope_idx	public.coupons	create index if not exists coupons_subcategory_scope_idx on public.coupons(subcategory_id) where subcategory_id is not null; 20261024080256_add_coupon_category_subcategory_scope.sql
notifications_unread_user_idx	public.notifications	create index if not exists notifications_unread_user_idx on public.notifications (user_id, created_at desc) where read_at is null; 20261024084156_dashboard_notifications.sql
notifications_user_created_idx	public.notifications	create index if not exists notifications_user_created_idx on public.notifications (user_id, created_at desc); 20261024084156_dashboard_notifications.sql
order_items_order_id_idx	public.order_items	create index order_items_order_id_idx on public.order_items(order_id); schema-v2.sql
orders_user_created_idx	public.orders	create index orders_user_created_idx on public.orders(user_id, created_at desc); schema-v2.sql
password_reset_rate_limits_updated_at_idx	private.password_reset_rate_limits	create index if not exists password_reset_rate_limits_updated_at_idx on private.password_reset_rate_limits (updated_at); 20261022200000_password_reset_rate_limit.sql

Index	Table	Definition / source
payments_order_created_idx	public.payment_attempts	create index payments_order_created_idx on public.payment_attempts(order_id, created_at desc); schema-v2.sql
product_images_one_primary_per_product	public.product_images	create unique index product_images_one_primary_per_product on public.product_images(product_id) where is_primary; schema-v2.sql
products_category_status_idx	public.products	create index products_category_status_idx on public.products(category_id, status); schema-v2.sql
products_subcategory_idx	public.products	create index if not exists products_subcategory_idx on public.products(subcategory_id); 20261023230000_categories_subcategories.sql
profiles_referral_code_uidx	public.profiles	create unique index if not exists profiles_referral_code_uidx on public.profiles(referral_code); 20261023190000_referrals_and_first_order_commission.sql
referral_wallet_checkout_debit_once_uidx	public.referral_wallet_ledger	create unique index if not exists referral_wallet_checkout_debit_once_uidx on public.referral_wallet_ledger(checkout_id) where entry_type = 'spent'; 20261023200000_referral_store_credit.sql
referral_wallet_checkout_refund_once_uidx	public.referral_wallet_ledger	create unique index if not exists referral_wallet_checkout_refund_once_uidx on public.referral_wallet_ledger(checkout_id) where entry_type = 'refund'; 20261023200000_referral_store_credit.sql
referral_wallet_earned_once_uidx	public.referral_wallet_ledger	create unique index if not exists referral_wallet_earned_once_uidx on public.referral_wallet_ledger(referral_id) where entry_type = 'earned'; 20261023200000_referral_store_credit.sql
referral_wallet_user_created_idx	public.referral_wallet_ledger	create index if not exists referral_wallet_user_created_idx on public.referral_wallet_ledger(user_id, created_at desc); 20261023200000_referral_store_credit.sql
referrals_referrer_created_idx	public.referrals	create index if not exists referrals_referrer_created_idx on public.referrals(referrer_user_id, created_at desc); 20261023190000_referrals_and_first_order_commission.sql
reviews_product_status_idx	public.product_reviews	create index reviews_product_status_idx on public.product_reviews(product_id, status, created_at desc); schema-v2.sql
shipment_events_shipment_time_idx	public.shipment_events	create index shipment_events_shipment_time_idx on public.shipment_events(shipment_id, occurred_at desc); schema-v2.sql
subcategories_category_sort_idx	public.subcategories	create index if not exists subcategories_category_sort_idx on public.subcategories(category_id, sort_order, name); 20261023230000_categories_subcategories.sql

4. SQL function inventory

Function names were deduplicated by schema/name across migrations. Several files replace earlier definitions; the latest migration in chronological order defines the intended version. Read the function body and ACL in source before invoking it directly.

Function	Latest source migration
private.award_first_referral_commission	20261023200000_referral_store_credit.sql
private.create_dashboard_order_notifications	20261024084156_dashboard_notifications.sql
private.finalize_referral_credit_payment_record	20261023200000_referral_store_credit.sql
private.generate_checkout_tracking_number	20261023240000_repair_tracking_number_format.sql
private.is_admin	20261022160000_lock_down_auth_helpers.sql
private.is_admin_totp_verified	20261023162546_enforce_admin_totp_mfa.sql

Function	Latest source migration
private.keep_profile_referral_code_immutable	20261023190000_referrals_and_first_order_commission.sql
private.queue_order_confirmation_email	20261023170000_order_confirmation_and_shipping_payment.sql
private.refund_failed_referral_credit	20261023200000_referral_store_credit.sql
private.validate_product_subcategory_parent	20261023230000_categories_subcategories.sql
public.admin_delete_all_orders	20261024073736_admin_coupons_ads_and_order_tools.sql
public.admin_list_users	20261024073736_admin_coupons_ads_and_order_tools.sql
public.admin_update_checkout_tracking	20261023240000_repair_tracking_number_format.sql
public.admin_update_shipment_status	20261023180000_admin_shipment_progress.sql
public.apply_referral_store_credit	20261023200000_referral_store_credit.sql
public.broadcast_delivery_status_update	20261023340000_enable_delivery_realtime.sql
public.capture_checkout_delivery_time	20261023320000_fix_delivered_product_reviews.sql
public.claim_order_confirmation_email	20261023170000_order_confirmation_and_shipping_payment.sql
public.consume_password_reset_rate_limit	20261022200000_password_reset_rate_limit.sql
public.create_fapshi_checkout	20261023300000_commit_stock_on_payment.sql
public.enforce_product_review_change_window	20261023330000_review_edit_delete_window.sql
public.enforce_product_review_window	20261024071531_allow_reviews_after_delivery.sql
public.finish_order_confirmation_email	20261023170000_order_confirmation_and_shipping_payment.sql
public.handle_new_user	20261023180000_persist_user_language_preference.sql
public.is_admin	20261023162546_enforce_admin_totp_mfa.sql
public.is_admin_role	20261023162546_enforce_admin_totp_mfa.sql
public.set_checkout_paid_at	20261023260000_product_review_window.sql
public.set_fapshi_checkout_payment	20261023100000_secure_fapshi_checkout.sql
public.set_updated_at	schema-v2.sql
public.sync_checkout_inventory	20261023300000_commit_stock_on_payment.sql
public.sync_fapshi_checkout_order	20261023240000_repair_tracking_number_format.sql
public.track_shipment	20261023170000_order_confirmation_and_shipping_payment.sql

5. Triggers and policies

Triggers created in checked-in SQL. Repeated trigger names are shown once using the last source occurrence; trigger ordering can matter when names are prefixed or explicitly sorted by PostgreSQL.

Trigger	Definition target
award_first_referral_commission_trigger	after update of payment_status on public.checkouts for each row execute function private.award_first_referral_commission()
capture_checkout_delivery_time_trigger	before insert or update of delivery_status on public.checkouts for each row execute function public.capture_checkout_delivery_time()
cart_items_set_updated_at	before update on public.cart_items for each row execute function public.set_updated_at()
categories_set_updated_at	before update on public.categories for each row execute function public.set_updated_at()

Trigger	Definition target
enforce_product_review_change_window_trigger	before update or delete on public.product_reviews for each row execute function public.enforce_product_review_change_window()
enforce_product_review_window_trigger	before insert on public.product_reviews for each row execute function public.enforce_product_review_window()
keep_profile_referral_code_immutable_trigger	before update of referral_code on public.profiles for each row execute function private.keep_profile_referral_code_immutable()
notify_admins_of_new_checkout	after insert on public.checkouts for each row execute function private.create_dashboard_order_notifications()
notify_customer_of_checkout_status	after update of payment_status, delivery_status on public.checkouts for each row when (old.payment_status is distinct from new.payment_status or old.delivery_status is distinct fro
on_auth_user_created	after insert on auth.users for each row execute function public.handle_new_user()
orders_set_updated_at	before update on public.orders for each row execute function public.set_updated_at()
payment_attempts_set_updated_at	before update on public.payment_attempts for each row execute function public.set_updated_at()
product_reviews_set_updated_at	before update on public.product_reviews for each row execute function public.set_updated_at()
products_set_updated_at	before update on public.products for each row execute function public.set_updated_at()
profiles_set_updated_at	before update on public.profiles for each row execute function public.set_updated_at()
queue_order_confirmation_email_trigger	after update of payment_status on public.checkouts for each row execute function private.queue_order_confirmation_email()
refund_failed_referral_credit_trigger	after update of payment_status on public.checkouts for each row execute function private.refund_failed_referral_credit()
set_checkout_paid_at_trigger	before update of payment_status on public.checkouts for each row execute function public.set_checkout_paid_at()
shipments_broadcast_delivery_status	after update of status, estimated_delivery on public.shipments for each row when (old.status is distinct from new.status or old.estimated_delivery is distinct from new.estimated_de
shipments_set_updated_at	before update on public.shipments for each row execute function public.set_updated_at()
site_settings_set_updated_at	before update on public.site_settings for each row execute function public.set_updated_at()
sync_checkout_inventory_trigger	before update of status, payment_status, inventory_reserved on public.checkouts for each row execute function public.sync_checkout_inventory()
sync_fapshi_checkout_order_trigger	after insert or update of payment_status, payment_reference, payment_url, payment_provider, order_id on public.checkouts for each row execute function public.sync_fapshi_checkout_o
validate_product_subcategory_parent_trigger	before insert or update of category_id, subcategory_id on public.products for each row execute function private.validate_product_subcategory_parent()
zz_finalize_referral_credit_payment_record	after update of payment_status on public.checkouts for each row execute function private.finalize_referral_credit_payment_record()

Named RLS policies found: 47. Policies span catalog, customer-owned rows, checkout/administrative access, storage objects, and feature-specific workflows. Inspect policy predicates directly in migrations and confirm RLS is enabled on every public table before deployment.

Policy	Table	Source
Admins manage subcategories	public.subcategories	20261023230000_categories_subcategories.sql
Public can read active subcategories	public.subcategories	20261023230000_categories_subcategories.sql
admins manage categories	public.categories	schema-v2.sql
admins manage checkout items	public.checkout_items	20261023100000_secure_fapshi_checkout.sql
admins manage checkouts	public.checkouts	20261023100000_secure_fapshi_checkout.sql

Policy	Table	Source
admins manage coupons	public.coupons	20261024073736_admin_coupons_ads_and_order_tools.sql
admins manage currency rates	public.currency_rates	schema-v2.sql
admins manage order items	public.order_items	schema-v2.sql
admins manage orders	public.orders	schema-v2.sql
admins manage payment attempts	public.payment_attempts	schema-v2.sql
admins manage product images	public.product_images	20261023250000_repair_admin_product_write_policies.sql
admins manage product tags	public.product_tags	20261023250000_repair_admin_product_write_policies.sql
admins manage products	public.products	20261023250000_repair_admin_product_write_policies.sql
admins manage reviews	public.product_reviews	schema-v2.sql
admins manage roles	public.user_roles	schema-v2.sql
admins manage shipment events	public.shipment_events	schema-v2.sql
admins manage shipments	public.shipments	schema-v2.sql
admins manage site settings	public.site_settings	schema-v2.sql
admins read referral activity	public.referrals	20261023210000_admin_referral_visibility.sql
admins read referral wallet activity	public.referral_wallet_ledger	20261023210000_admin_referral_visibility.sql
product images delete by admins	storage.objects	20261023250000_repair_admin_product_write_policies.sql
product images insert by admins	storage.objects	20261023250000_repair_admin_product_write_policies.sql
product images update by admins	storage.objects	20261023250000_repair_admin_product_write_policies.sql
profiles read own or admin	public.profiles	schema-v2.sql
profiles update own or admin	public.profiles	schema-v2.sql
public read active categories	public.categories	20261022180000_public_catalog_reads.sql
public read active coupons	public.coupons	20261024073736_admin_coupons_ads_and_order_tools.sql
public read currency rates	public.currency_rates	schema-v2.sql
public read images for published products	public.product_images	20261022180000_public_catalog_reads.sql
public read published products	public.products	20261022180000_public_catalog_reads.sql
public read published reviews	public.product_reviews	20261024071531_allow_reviews_after_delivery.sql
public read site settings	public.site_settings	schema-v2.sql
public read tags for published products	public.product_tags	20261022180000_public_catalog_reads.sql
referrers read their referral summary	public.referrals	20261023190000_referrals_and_first_order_commission.sql
users delete own reviews	public.product_reviews	20261023330000_review_edit_delete_window.sql
users manage own cart	public.cart_items	schema-v2.sql
users mark own notifications read	public.notifications	20261024084156_dashboard_notifications.sql

Policy	Table	Source
users read own checkout items	public.checkout_items	20261023100000_secure_fapshi_checkout.sql
users read own checkouts	public.checkouts	20261023100000_secure_fapshi_checkout.sql
users read own notifications	public.notifications	20261024084156_dashboard_notifications.sql
users read own order items	public.order_items	schema-v2.sql
users read own orders	public.orders	schema-v2.sql
users read own referral store credit	public.referral_wallet_ledger	20261023200000_referral_store_credit.sql
users read own shipment events	public.shipment_events	schema-v2.sql
users read own shipment status	public.shipments	schema-v2.sql
users update own pending reviews	public.product_reviews	20261023330000_review_edit_delete_window.sql
verified buyers create reviews	public.product_reviews	20261023320000_fix_delivered_product_reviews.sql

6. Edge Functions

Local function folders are listed below. Function availability and deployed versions were not confirmed remotely. JWT verification is set explicitly for some functions in supabase/config.toml; provider callbacks may intentionally disable gateway JWT and must validate provider credentials themselves.

Function	Source-level responsibility
create-fapshi-order	Creates an authenticated Fapshi checkout; validates request details and calls the atomic checkout RPC before provider initialization.
fapshi-webhook	Receives Fapshi payment callbacks and reconciles checkout payment outcome; source includes confirmation/referral flows.
get-fapshi-checkout-status	Returns the current status for a customer checkout after authorization.
create-campay-order	Initiates a Campay payment order.
verify-campay-payment	Verifies/polls Campay payment outcome.
send-order-status-email	Sends localized customer email for order/payment/delivery status changes.
send-password-reset	Handles password reset email flow and redirect configuration.
create-account	Creates account-related data through a server-side path.
manage-admins	Performs privileged administration user/role management; authenticated admin access is required.
currency-rate	Provides or updates currency conversion-rate data.
admin-mark-checkout-paid	Administrative/manual checkout payment reconciliation.
jghjghjgh	Legacy-named local function folder; behavior and deployment intent need owner confirmation.

Shared TypeScript modules such as functions/_shared/order-confirmation-email.ts are imported helpers, not separately deployed Edge Functions.

7. Realtime

The checked-in migration adds checkouts, shipments and shipment_events to the supabase_realtime publication and broadcasts delivery updates by tracking-number topic. The local notifications migration adds the notifications table to the publication for per-user dashboard inboxes. Realtime access is filtered by authenticated row visibility; subscriptions do not replace RLS-protected reads.

- The dashboard notifications migration creates order_placed records for admins on checkout insert and order_update records for the customer when payment or delivery state changes.

• The migration must be applied in production before the new NotificationCenter can read/subscribe to notifications.

• Postgres Changes requires publication membership and appropriate table SELECT grants plus row policies; verify the Supabase publication after migration.

8. Security, Auth and Storage

• Auth identities are managed in auth.users. public.profiles stores application profile details; public.user_roles is the source of admin-role membership.

• Admin authorization helpers include role checks and an AAL2/TOTP verification check. Confirm the active policy calls the MFA-aware helper for privileged updates.

• The public schema is exposed to PostgREST. Enable RLS on every exposed table and grant only required table/column privileges. RLS policies scope customer rows by auth.uid().

• The source defines a public products-images Storage bucket for catalog downloads with a 10 MiB upload limit and JPEG, PNG, WebP, and AVIF MIME types. Authenticated admin-only policies guard insert, update and delete operations.

• Edge Functions may use SUPABASE_SERVICE_ROLE_KEY only in server-side secret configuration; never embed it in VITE_ variables or client bundles.

Environment variable names referenced by local Edge Function code

Variable name	Function folders referencing it
ALLOWED_ORIGINS	create-account, send-password-reset
APP_URL	_shared, admin-mark-checkout-paid, create-account, create-fapshi-order, get-fapshi-checkout-status, send-order-status-email, send-password-reset
CAMPAY_API_KEY	create-campay-order, jghjghjgh, verify-campay-payment
EXCHANGE_RATE_API_KEY	currency-rate
FAPSHI_API_KEY	create-fapshi-order, fapshi-webhook, get-fapshi-checkout-status
FAPSHI_API_USER	create-fapshi-order, fapshi-webhook, get-fapshi-checkout-status
FAPSHI_BASE_URL	create-fapshi-order, fapshi-webhook, get-fapshi-checkout-status
FAPSHI_WEBHOOK_SECRET	fapshi-webhook
FAPSHI_WEBHOOK_URL	create-fapshi-order
RESEND_API_KEY	_shared, create-account, create-fapshi-order, send-order-status-email, send-password-reset
RESEND_FROM_EMAIL	_shared, create-account, create-fapshi-order, send-order-status-email, send-password-reset
RESET_RATE_LIMIT_SECRET	create-account, send-password-reset
SERVICE_ROLE_KEY	create-campay-order, jghjghjgh, verify-campay-payment
SUPABASE_ANON_KEY	admin-mark-checkout-paid, create-fapshi-order, get-fapshi-checkout-status, manage-admins, send-order-status-email
SUPABASE_SERVICE_ROLE_KEY	admin-mark-checkout-paid, create-account, create-campay-order, create-fapshi-order, fapshi-webhook, get-fapshi-checkout-status, jghjghjgh, manage-admins, send-order-status-email, send-password-reset
SUPABASE_URL	admin-mark-checkout-paid, create-account, create-campay-order, create-fapshi-order, fapshi-webhook, get-fapshi-checkout-status, jghjghjgh, manage-admins, send-order-status-email, send-password-reset, verify-campay-payment
WEBHOOK_SECRET	verify-campay-payment

Only names are shown. Values are secrets and are not part of this document.

9. Data and transaction flows

Checkout transaction

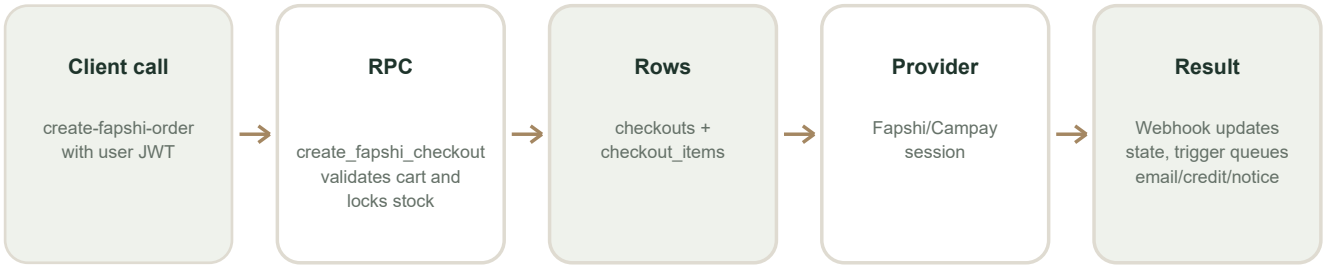


Figure 2. Payment lifecycle as described by source. Ensure inventory reservation, cancellation, expiry and payment-finalization triggers match deployed code before relying on stock counts.

Database function categories

• Authorization helpers: is_admin, is_admin_role, and TOTP/AAL2 verification.

• Checkout/payment: atomic checkout create, payment status update, checkout/order synchronization, inventory synchronization, tracking-number generation.

• Tracking: public tracking lookup and admin shipment/status update routines.

• Referrals: code immutability, first-order commission award, failed-payment refund, wallet-credit application and finalization.

• Notifications/email: confirmation job queue and completion, status-email logs, admin order-email log, and dashboard notification triggers.

• Operational/admin RPCs: admin user listing, bulk order delete, password-reset rate-limit consume, checkout status reconciliation.

10. Migration and verification checklist

• Compare remote migration ledger to local supabase/migrations before applying pending files.

• Apply one approved migration set, then verify table columns, constraints, indexes, RLS policies and trigger attachment in SQL Editor.

• Check `supabase_realtime` publication membership for the tables used by the UI.

• Confirm Edge Function deployment names/versions and provider secrets in Supabase Dashboard.

• Run security and performance advisors after schema changes; resolve missing RLS policies and unindexed foreign-key filters.

• Perform end-to-end staging verification for payment success/failure, stock transitions, status emails, admin notifications, customer notices, and read-state updates.

Source coverage and limitation: This inventory uses schema-v2.sql, 40 migration files, supabase/config.toml and 12 local Edge Function entry files. The remote Supabase connector was unavailable; production columns, indexes, publication membership, installed extensions, deployed function versions, migration ledger, and advisor findings remain unverified. Refresh this reference after remote introspection is available.