

topcatswap 1.1.1

Ubuntu installation guide

Desktop app and command-line bot

Ubuntu 22.04 / 24.04 · Node.js 18+

English (US)

Contents

1. Before you start
2. Prepare the folder
3. Build the executable
4. Install
5. Prepare the hardware wallets
6. First start and language
7. Update, uninstall and data
8. Command-line bot
9. Installation problems

1 Before you start

This guide installs the topcatswap 1.1.1 desktop app on Ubuntu (22.04 or 24.04, 64-bit) and prepares the hardware wallets. How to use the app is in the other guide, “User tutorial”.

- Node.js 18 or newer (check with: node -v).
- Internet connection during the build (it downloads Electron and the libraries).
- Your user password (sudo) to install packages and the .deb.
- The file topcatswap-ubuntu-1.1.1.zip, in your Downloads folder.

> If you don't have Node.js yet: sudo apt install nodejs npm (or install the LTS version from nodejs.org) and check with node -v.

2 Prepare the folder

Unzip into a temporary folder, check the version and copy the files to the app folder on your Desktop:

```
rm -rf /tmp/tcs && mkdir /tmp/tcs && cd /tmp/tcs
unzip ~/Downloads/topcatswap-ubuntu-1.1.1.zip
grep '"version"' topcatswap-app/package.json
mkdir -p ~/Desktop/topcatswap-1.1.1
cp -r /tmp/tcs/topcatswap-app/. ~/Desktop/topcatswap-1.1.1/
```

The grep must show "version": "1.1.1". If it shows another version you are using a different zip: check the name and size with ls -la ~/Downloads/topcatswap* (use the Tab key to complete names).

3 Build the executable

```
cd ~/Desktop/topcatswap-1.1.1
./build-ubuntu.sh
```

The script does four steps and takes a few minutes the first time:

1. Installs missing system packages (build-essential, libudev-dev, libusb-1.0-0-dev, python3) — asks for the sudo password.
2. Installs the dependencies: Electron, ethers, Ledger and Trezor libraries.
3. Compiles the USB modules for Electron.
4. Creates TopCatSwap-1.1.1-amd64.deb and TopCatSwap-1.1.1-x86_64.AppImage in the dist/ folder.

At the end, check that the .deb exists:

```
ls dist/
```

> npm warnings about “vulnerabilities” and “install-scripts” are normal; do not run npm audit fix --force.

4 Install

Recommended: .deb package

```
sudo apt install ./dist/TopCatSwap-1.1.1-amd64.deb
topcatswap
```

It appears in the applications menu as “TopCatSwap”. The messages “Ignoring file … .list.migrate” and “Download is performed unsandboxed as root” are normal and can be ignored.

Alternative: AppImage (no install)

```
chmod +x dist/TopCatSwap-1.1.1-x86_64.AppImage
./dist/TopCatSwap-1.1.1-x86_64.AppImage --no-sandbox
```

On Ubuntu 22.04 you may need sudo apt install libfuse2 (on 24.04: libfuse2t64).

5 Prepare the hardware wallets

Only needed once per computer. Browser wallets (MetaMask, OKX, Rabby, Coinbase Wallet, Trust Wallet) and imported wallets need none of this.

Ledger

```
wget -q -O - https://raw.githubusercontent.com/LedgerHQ/udev-rules/master/add_udev_rules.sh |
sudo bash
```

On the Ledger: Ethereum app → Settings → enable “Blind signing”. Close Ledger Live while you use the app.

Trezor (experimental)

```
sudo curl -fsSL https://data.trezor.io/udev/51-trezor.rules -o /etc/udev/rules.d/51-trezor.rul
es
sudo udevadm control --reload-rules && sudo udevadm trigger
```

Close Trezor Suite while you use the app. Unplug and plug the cable again after installing the rules.

6 First start and language

When it opens, the app shows “Choose your wallet”. At the top right you choose the language: PT (Português) or EN (English US). The first time, the app follows Ubuntu's language.

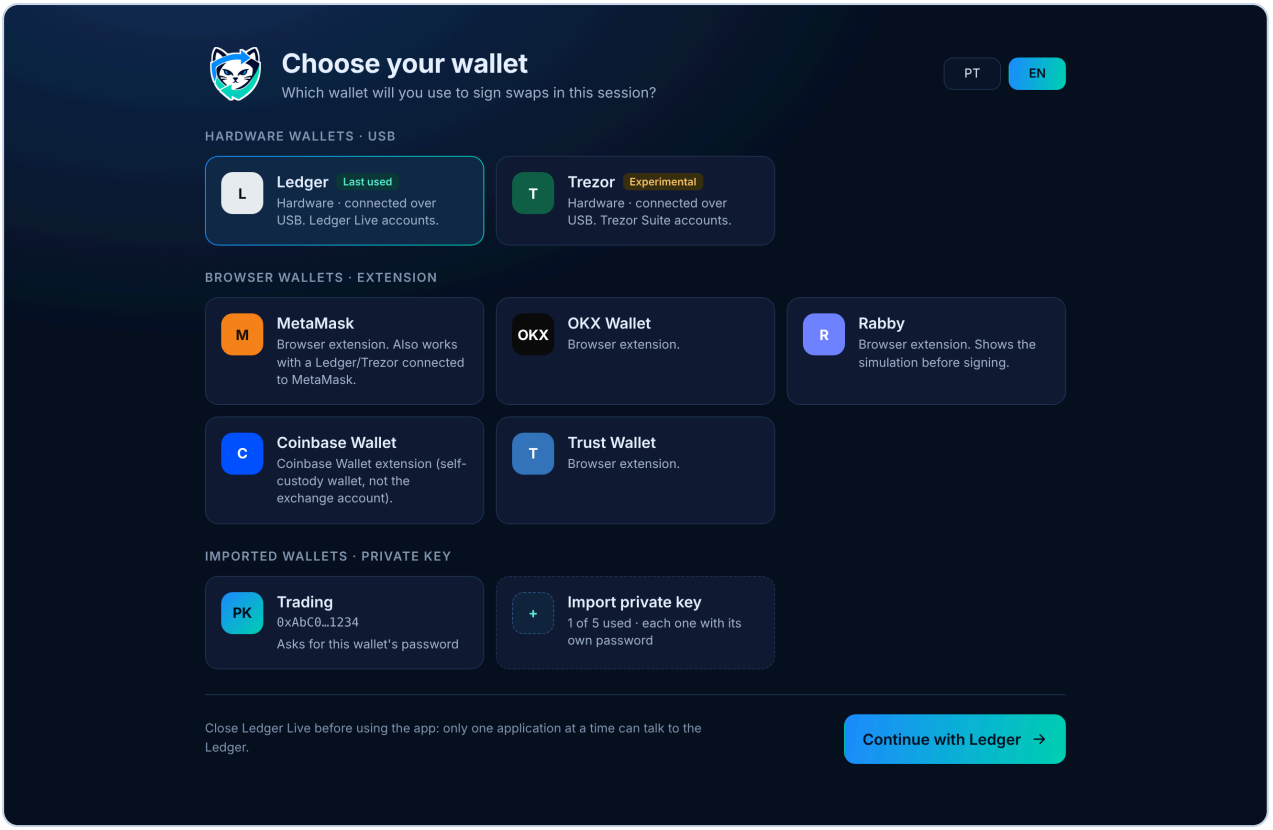


Figure 1. First screen: wallet and language choice (PT | EN).

The language can also be changed in Settings › Language. The app restarts to apply it; settings and wallets are kept. The installed version (1.1.1) is shown at the top left.

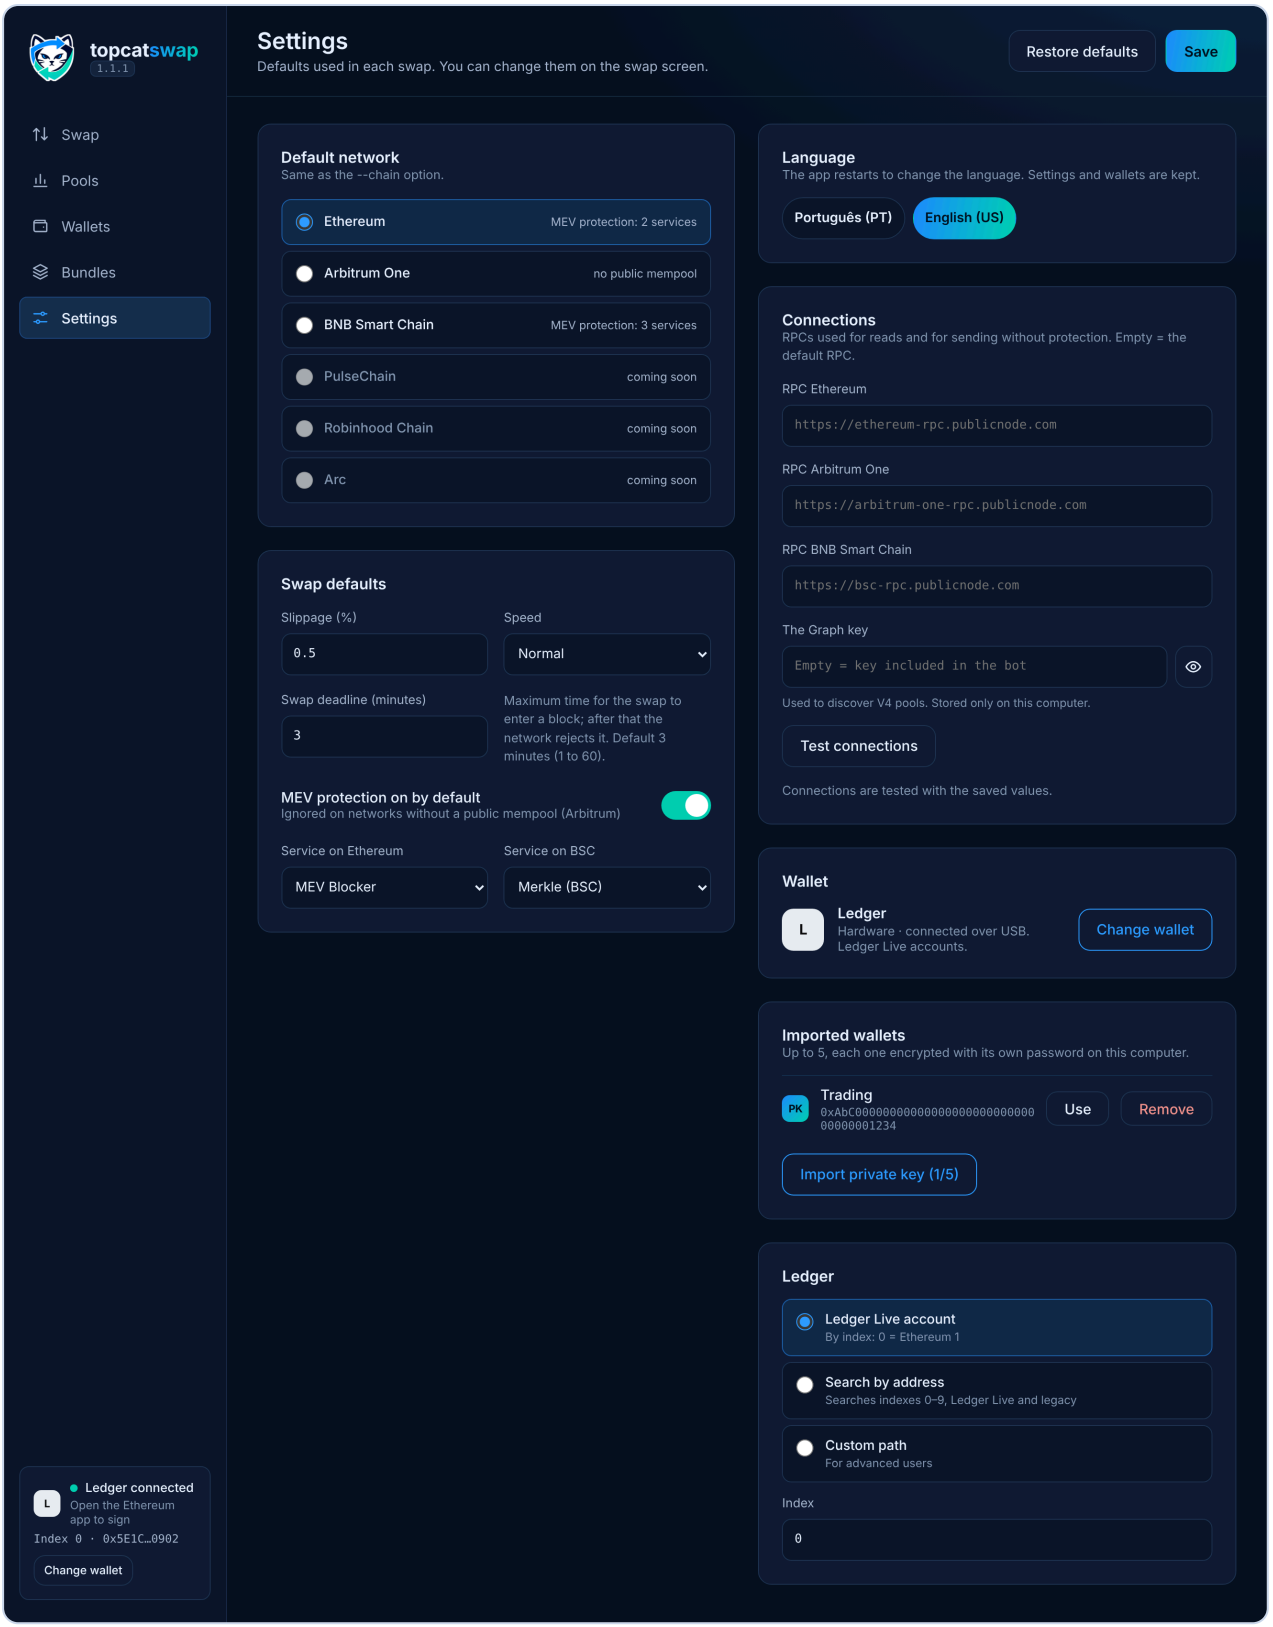


Figure 2. Settings, with the language choice.

7 Update, uninstall and data

- To update: repeat steps 2 to 4 with the new zip, in a new folder (e.g. ~/Desktop/topcatswap-1.0.10). apt replaces the previous version; settings and wallets are kept.
- Always check the version with the grep from step 2 before building: renaming a zip does not change the version inside it.
- Uninstall: sudo apt remove topcatswap.
- Data (kept when uninstalling): ~/.config/TopCatSwap/settings.json (settings), ~/.config/TopCatSwap/wallets/ (imported wallets, encrypted) and ~/.config/TopCatSwap/topcatswap.log (log).

> Before deleting ~/.config/TopCatSwap/wallets/ make sure you have the private keys stored somewhere else.

8 Command-line bot

The bot is a single file: topcatswap_comline_us_1-1-1.js (English) or topcatswap_comline_pt_1-1-1.js (Portuguese). Put it in a folder and install the dependencies:

```
mkdir -p ~/topcatswap-cli && cd ~/topcatswap-cli
cp ~/Downloads/topcatswap_comline_us_1-1-1.js .
npm init -y
npm install ethers @ledgerhq/hw-transport-node-hid @ledgerhq/hw-app-eth
node topcatswap_comline_us_1-1-1.js --version
node topcatswap_comline_us_1-1-1.js
```

Without arguments it shows the full help. The commands are in the “User tutorial”.

9 Installation problems

Symptom	Cause and fix
Unsupported file ./dist/TopCatSwap-...deb	The .deb does not exist with that name: the build did not run, failed or is another version. Run ls dist/ and use the name shown there.
The app opens the old version	The new .deb was not installed. Close the app (pkill -f /opt/TopCatSwap), install and open again.
Build compile error	sudo apt install build-essential libudev-dev libusb-1.0-0-dev python3 and run the build again.
node: command not found / old version	Install Node.js 18+ and check with node -v.
AppImage does not open	sudo apt install libfuse2 (or libfuse2t64) and use --no-sandbox.
Blank window	Ctrl+Shift+I shows the error; the log is at ~/.config/TopCatSwap/topcatswap.log.
Ledger / Trezor not detected	udev rules from step 5; close Ledger Live / Trezor Suite; unplug and plug the cable.

To ask for help, save the build log with ./build-ubuntu.sh 2>&1 | tee build.log and send the last lines (tail -40 build.log).