


**10. defines the space between two inline elements, inside of the div's box.**

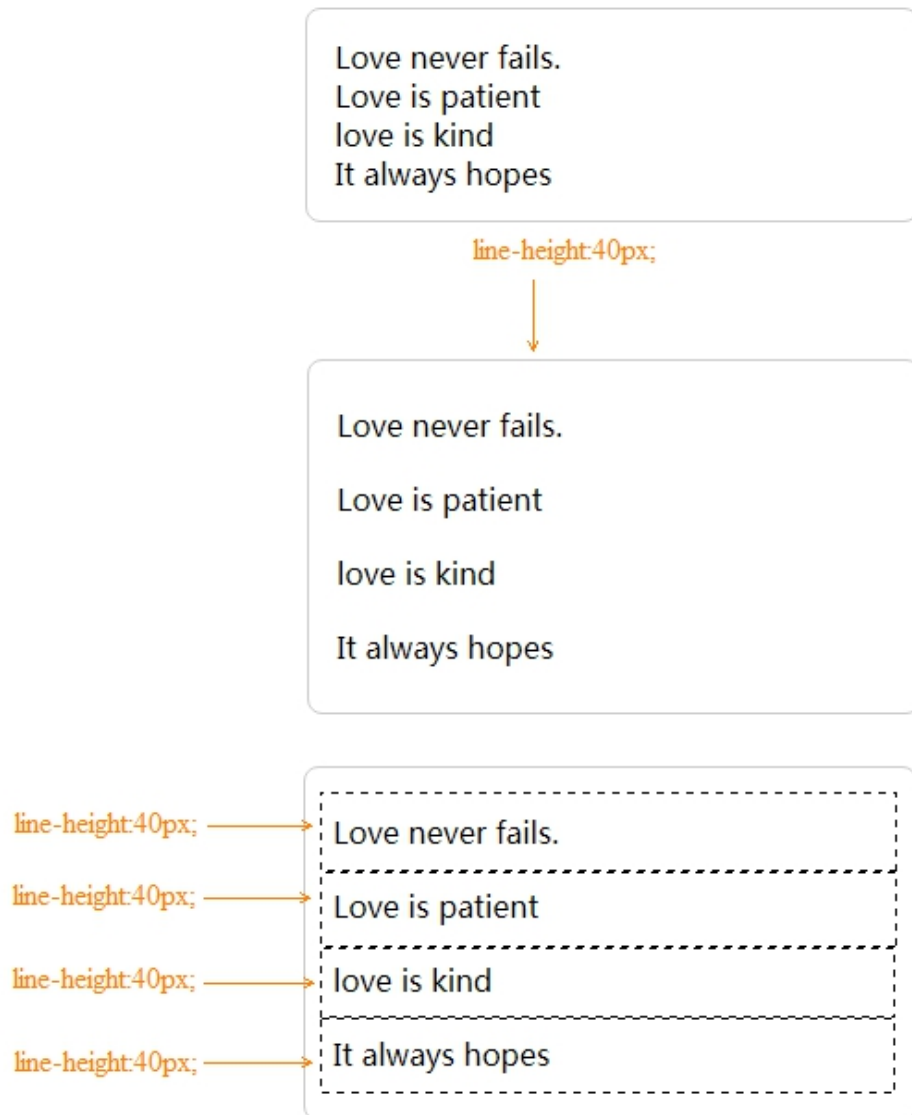

**line-height:** CSS property defines the space between two inline elements.

**<br>:** html tag break a new line.

```
<style>
  .box{
    border:1px solid #cccccc;
    width:300px;
    border-radius:8px;
    padding:15px 15px 15px 15px;
    line-height:40px;
  }
</style>
<div class ="box" >
  Love never fails.
  <br>
  Love is patient
  <br>
  love is kind
  <br>
  It always hopes
</div>
```

## 11. insert image to the div's box.



**<img>**: tag defines an image in an HTML page. **src** = "**shirt.jpg**" image path.

```
<style>
  .box{
    border:1px solid #cccccc;
    width:250px;
    border-radius:8px;
    padding:15px 15px 15px 15px;
  }
</style>

<div class ="box" >
  <img src ="shirt.jpg" />
</div>
```

12. insert text below image to the div's box.



```
<div class="box">  
  <div id="imgBox">  
      
  </div>  
  <div id="textBox">  
    Life can be love t-shirt.  
  </div>  
</div>
```




**#id:** CSS to select an element with a specific id

```
<style>
  .box{
    border:1px solid #cccccc;
    width:250px;
    border-radius:8px;
    padding:15px 15px 15px 15px;
  }
  #imgBox{
    width:100%;
  }
  #textBox{
    text-align:center;
    width:100%;
    line-height:30px;
  }
</style>

<div class ="box" >
  <div id ="imgBox" >
    <img src ="shirt.jpg" />
  </div>
  <div id ="textBox" >
    Life can be love t-shirt.
  </div>
</div>
```

### 13. Text wraps around the image.

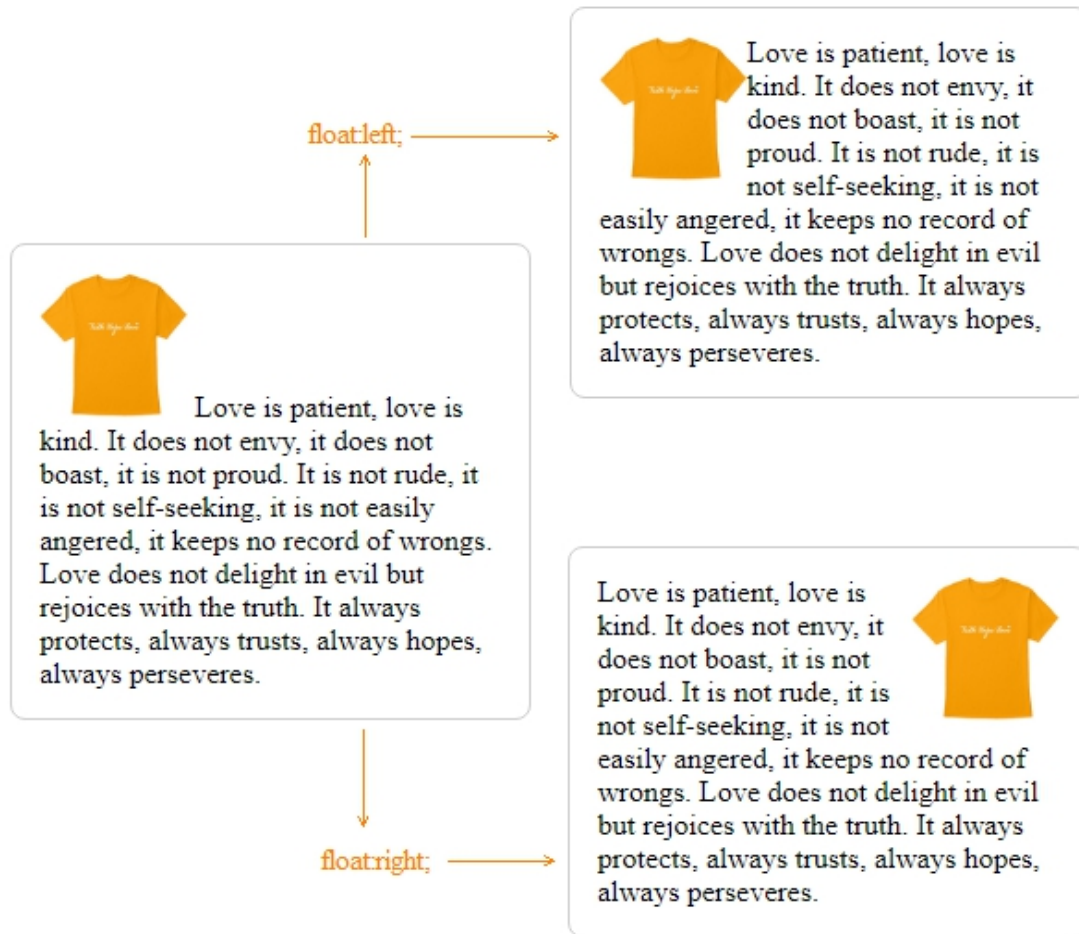

**float:** CSS property specifies how an element should float. (left, right, clear)

**.box img:** Descendant selector the CSS style will be used in child element.

**font-family:** "Times New Roman", Times, serif;

```
<style>
  .box{
    border:1px solid #cccccc;
    width:250px;
    border-radius:8px;
    padding:15px 15px 15px 15px;
    font-size:16px;
    font-family: "Times New Roman", Times, serif;
  }
  .box img{
    width:80px;
    float:left;
  }
</style>
```

```
<div class ="box" >
  <img src ="shirt.jpg" />
```

Love is patient, love is kind. It does not envy, it does not boast, it is not proud. It is not rude, it is not self-seeking, it is not easily angered, it keeps no record of wrongs. Love does not delight in evil but rejoices with the truth. It always protects, always trusts, always hopes, always perseveres.

```
</div>
```

**14. unordered list:** starts with the `<ul>` tag. Each list item starts with the `<li>` tag.

- Easy Learning HTML CSS
- Easy Learning Javascript
- Easy Learning Python 3

```
<style>
  #box{
    border:1px solid #cccccc;
    width:250px;
    border-radius:8px;
    padding:15px 15px 15px 15px;
    font-size:16px;
    font-family: "Times New Roman", Times, serif;
  }
</style>

<div id="box" >
  <ul>
    <li> Easy Learning HTML CSS </li>
    <li> Easy Learning Javascript </li>
    <li> Easy Learning Python 3 </li>
  </ul>
</div>
```



**15. unordered list:** insert icon image replace the black dot.




**list-style-image:url('icon.jpg');** CSS property is used to specify an image that is to be used as a marker

```
<style>
  #box{
    border:1px solid #cccccc;
    width:250px;
    border-radius:8px;
    padding:15px 15px 15px 15px;
    font-size:16px;
    font-family: "Times New Roman", Times, serif;
  }

  #box ul li{
    list-style-image:url('icon.jpg');
  }
</style>

<div id = "box" >
  <ul>
    <li> Easy Learning HTML CSS </li>
    <li> Easy Learning Javascript </li>
    <li> Easy Learning Python 3 </li>
  </ul>
</div>
```

## 16. Link status style

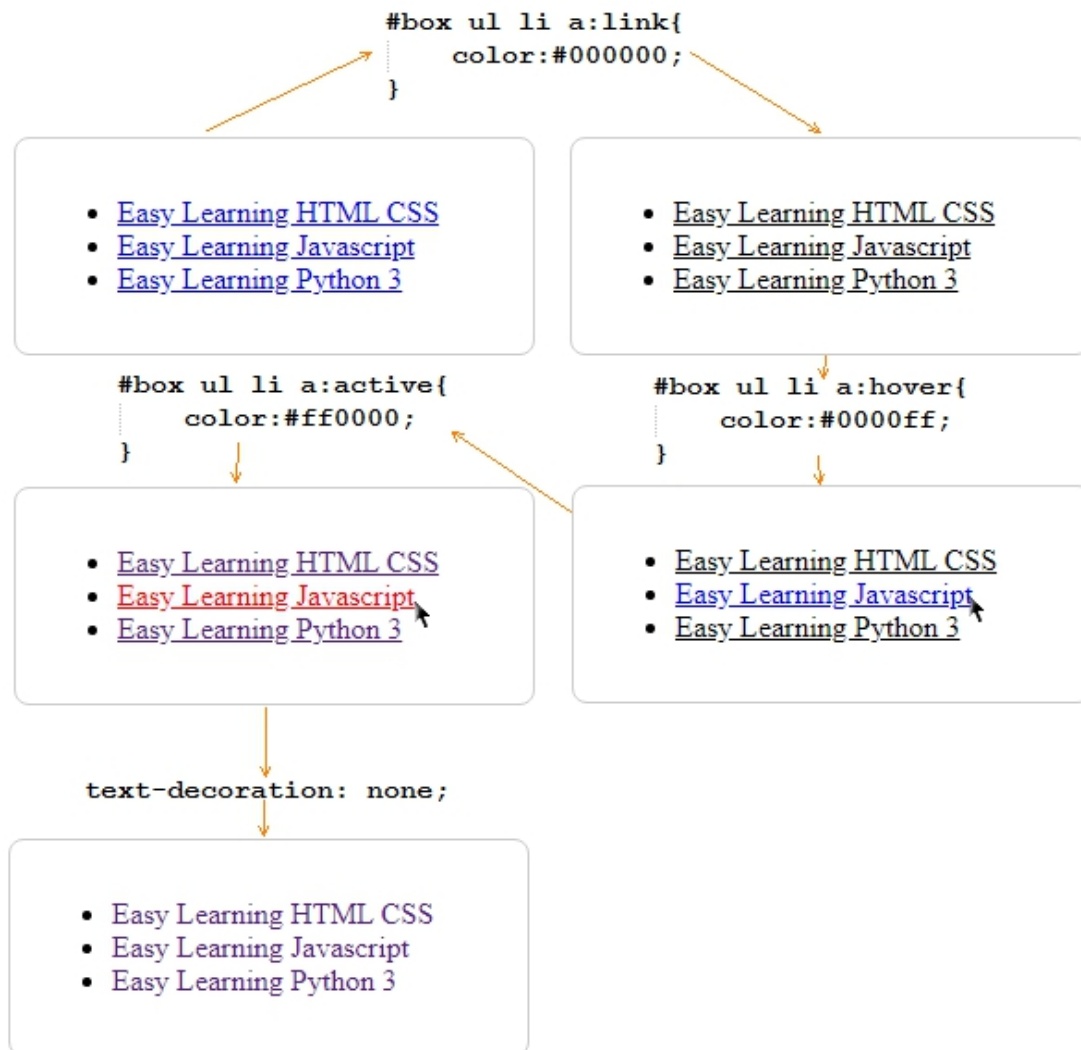

**text-decoration: none;** Remove text-decoration from text

**li a:link:** is used to select elements when not visited

**li a:hover:** is used to select elements when you mouse over them.

**li a.active:** CSS pseudo-class. It specifies <li> <a> on a state the active

```


<style>
  #box{
    border:1px solid #cccccc;
    width:250px;
    border-radius:8px;
    padding:15px 15px 15px 15px;
    font-size:16px;
    font-family: "Times New Roman", Times, serif;
  }

  #box ul li a:link{
    color:#000000;
    text-decoration: none;
  }
  #box ul li a:hover{
    color:#0000ff;
  }
  #box ul li a:active{
    color:#ff0000;
  }
</style>

<div id="box" >
  <ul>
    <li><a href="#" > Easy Learning HTML CSS </a></li>
    <li><a href="#" > Easy Learning Javascript </a></li>
    <li><a href="#" > Easy Learning Python 3 </a></li>
  </ul>
</div>

```

## 17. Drop-down menu

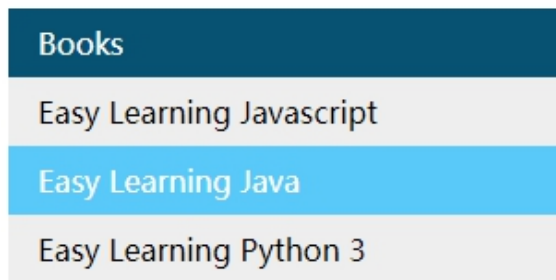

**list-style-type: none:** CSS property Remove marker is shown in the <li>  
**display: block;** Displays an element as a block (like <div>). It starts on a new line.

**li a:hover:not(.active):** is used to select elements when you mouse over them but not active

```
<style>
  ul {
    list-style-type: none;
    margin: 0;
    padding: 0;
    width: 300px;
    background-color: #eeeeee;
  }

  li a {
    display: block;
    color: #000000;
    padding: 8px 16px;
    text-decoration: none;
  }

  li a.active {
    background-color: #075272;
    color: white;
  }

  li a:hover:not(.active) {
    background-color: #59c9f9;
    color: white;
  }
```

```
</style>
```

```
<ul>
```

```
  <li><a class="active" href="#" > Books </a></li>
```

```
  <li><a href="#" > Easy Learning Javascript </a></li>
```

```
  <li><a href="#" > Easy Learning Java </a></li>
```

```
  <li><a href="#" > Easy Learning Python 3 </a></li>
```

```
</ul>
```

## 18. Navigate menu

HTML

CSS

Javascript

Python

```
<style>
  ul {
    list-style-type: none;
    margin: 0;
    padding: 0;
    overflow: hidden;
    background-color: #333;
    position: fixed;
    top: 10px;
    width: 100%;
  }

  li {
    float: left;
  }


  li a {
    display: block;
    color: white;
    text-align: center;
    padding: 15px;
    text-decoration: none;
  }

  li a:hover:not(.active) {
    background-color: #fde325;
  }

  .active {
    background-color: #fde325;
  }
</style>
<ul>
  <li><a class = "active" href = "#" > HTML </a></li>
  <li><a href = "#" > CSS </a></li>
  <li><a href = "#" > Javascript </a></li>
  <li><a href = "#" > Python </a></li>
```

</ul>

## 19. click drop down menu

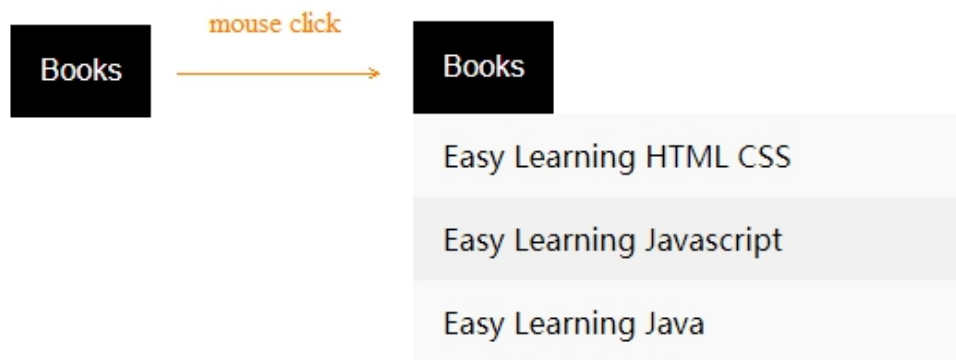

**<style>**

```
.menubtn {  
    background-color: #000000;  
    color: white;  
    padding: 16px;  
    font-size: 16px;  
    border: none;  
    cursor: pointer;  
}  
  
.menudown {  
    position: relative;  
    display: inline-block;  
    float:left;  
}  
  
.menudown-content {  
    display: none;  
    position: absolute;  
    right: 0;  
    background-color: #f9f9f9;  
    min-width: 300px;  
}  
  
.menudown-content a {  
    color: black;  
    padding: 12px 16px;  
    text-decoration: none;  
    display: block;  
}
```



```

.menudown-content a:hover {background-color: #f1f1f1}

.menudown:hover .menudown-content {
    display: block;
}

.menudown:hover .menubtn {
    background-color: #000000;
}
</style>

<div class="menudown" >
    <button class="menubtn" > Books </button>
    <div class="menudown-content" style="left:0;" >
        <a href="#" > Easy Learning HTML CSS </a>
        <a href="#" > Easy Learning Javascript </a>
        <a href="#" > Easy Learning Java </a>
    </div>
</div>

```

## 20. login div dialog .

Username:

Password:

```
<style>
  #login{
    border:1px solid #cccccc;
    width:250px;
    border-radius:8px;
    padding:15px 15px 15px 15px;
    font-size:16px;
    font-family: "Times New Roman", Times, serif;
  }

  #login div{
    line-height:30px;
    width:100%;
  }

  .textbox{
    width:160px;
  }

  #buttonDiv{
    text-align:center;
  }

  #buttonDiv input{
    border:1px solid #cccccc;
    background-color:#ffffff;
  }
</style>

<div id="login" >
```

```
<div> Username: <input class ="textbox" type ="text" id
="username" /></div>
<div> Password: <input class ="textbox" type ="password" id
="password" /></div>
<div id ="buttonDiv" >
    <input type ="button" value ="Login" />
    <input type ="button" value ="Close" />
</div>
</div>
```