


Deep Learning


Lecture 4

Basic optimization

Loss functions \Rightarrow Loss surfaces

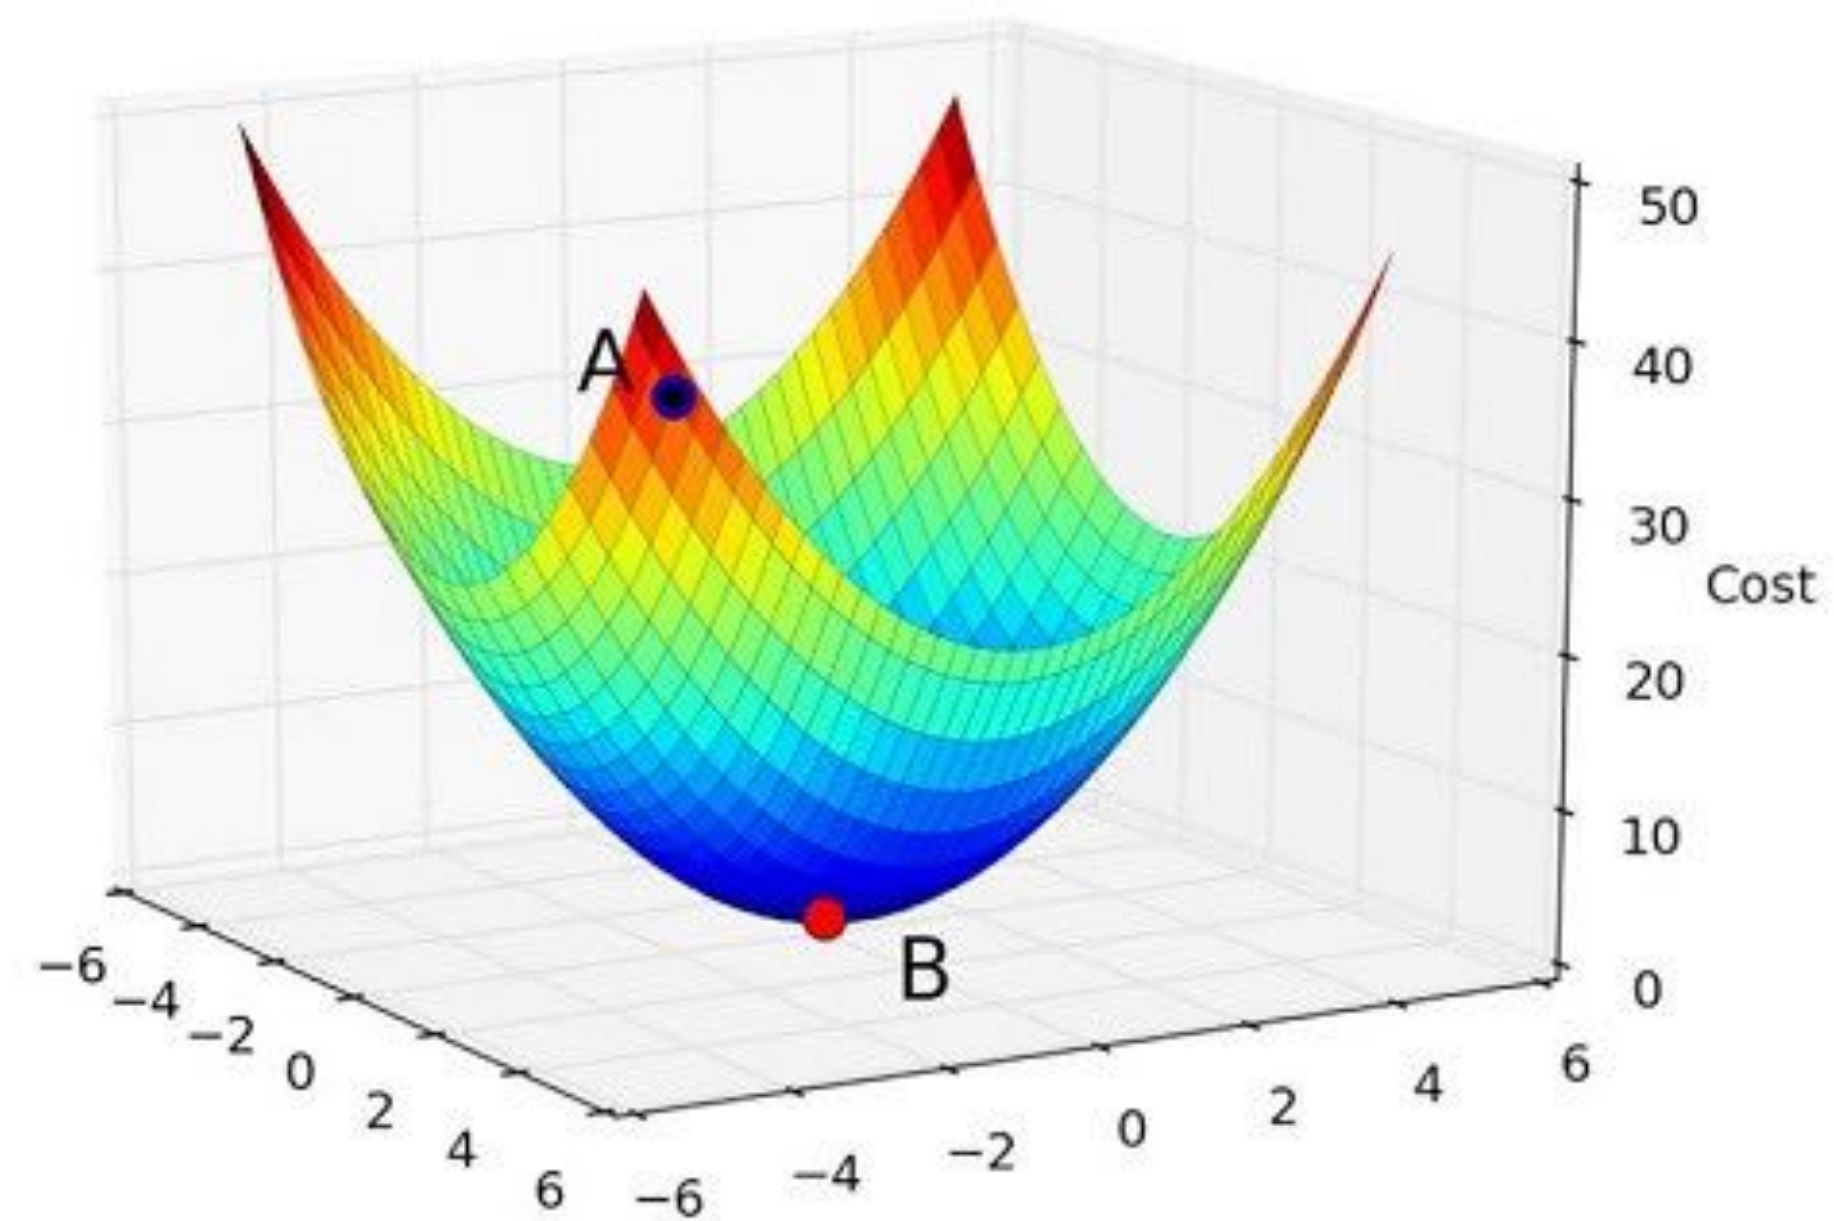

Wolfram Global Problem

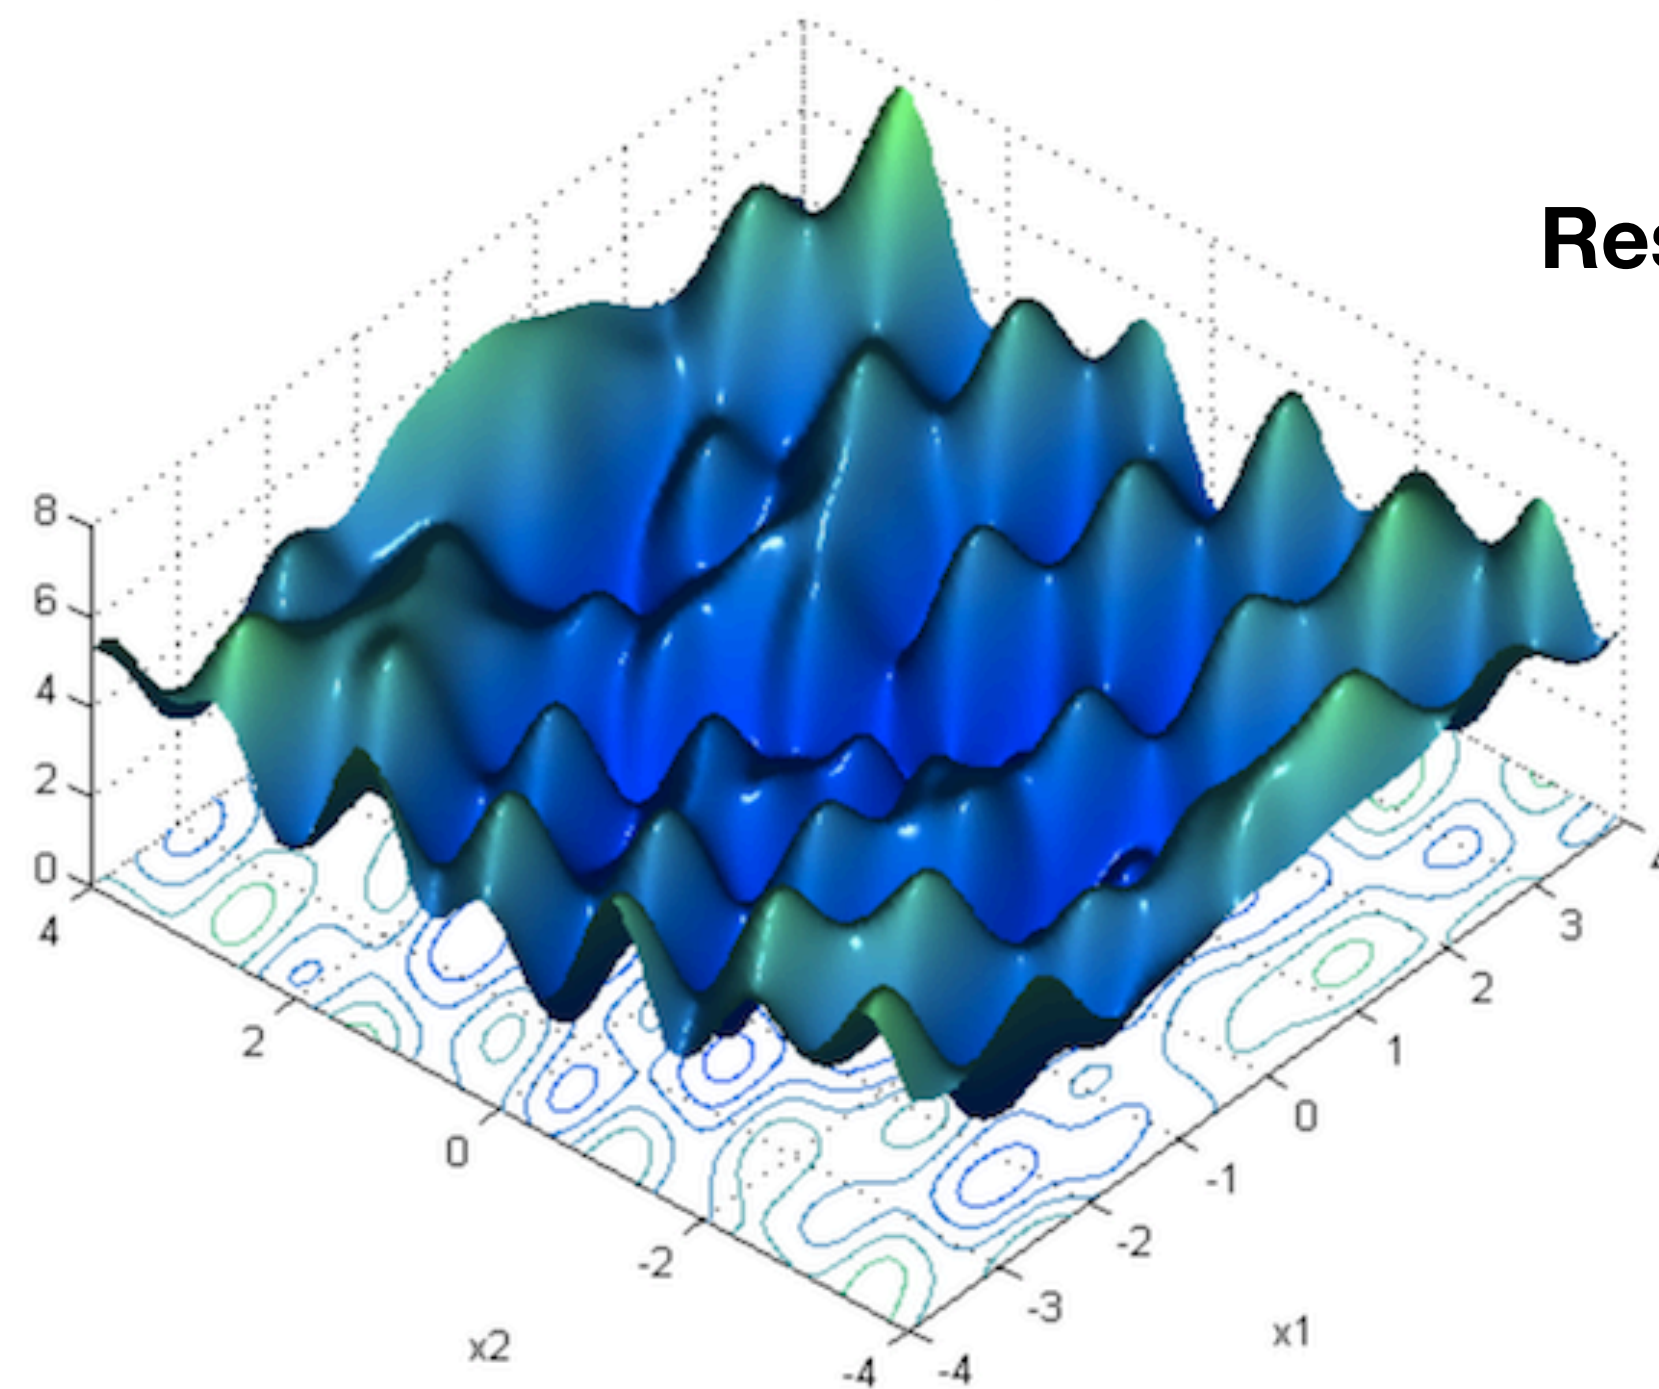

ResNet50 has ~25 million weights!

Strategy #1: A first very bad idea solution: **Random search**

```
# assume X_train is the data where each column is an example (e.g. 3073 x 50,000)
# assume Y_train are the labels (e.g. 1D array of 50,000)
# assume the function L evaluates the loss function

bestloss = float("inf") # Python assigns the highest possible float value
for num in xrange(1000):
    W = np.random.randn(10, 3073) * 0.0001 # generate random parameters
    loss = L(X_train, Y_train, W) # get the loss over the entire training set
    if loss < bestloss: # keep track of the best solution
        bestloss = loss
        bestW = W
    print 'in attempt %d the loss was %f, best %f' % (num, loss, bestloss)

# prints:
# in attempt 0 the loss was 9.401632, best 9.401632
# in attempt 1 the loss was 8.959668, best 8.959668
# in attempt 2 the loss was 9.044034, best 8.959668
# in attempt 3 the loss was 9.278948, best 8.959668
# in attempt 4 the loss was 8.857370, best 8.857370
# in attempt 5 the loss was 8.943151, best 8.857370
# in attempt 6 the loss was 8.605604, best 8.605604
# ... (truncated: continues for 1000 lines)
```

Lets see how well this works on the test set...

```
# Assume X_test is [3073 x 10000], Y_test [10000 x 1]  
scores = Wbest.dot(Xte_cols) # 10 x 10000, the class scores for all test examples  
# find the index with max score in each column (the predicted class)  
Yte_predict = np.argmax(scores, axis = 0)  
# and calculate accuracy (fraction of predictions that are correct)  
np.mean(Yte_predict == Yte)  
# returns 0.1555
```

15.5% accuracy! not bad!
(SOTA is ~95%)

Strategy #2: **Follow the slope**



Strategy #2: **Follow the slope**

In 1-dimension, the derivative of a function:

$$\frac{df(x)}{dx} = \lim_{h \rightarrow 0} \frac{f(x+h) - f(x)}{h}$$

In multiple dimensions, the **gradient** is the vector of (partial derivatives) along each dimension

The slope in any direction is the **dot product** of the direction with the gradient

The direction of steepest descent is the **negative gradient**

current W:

[0.34,
-1.11,
0.78,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss 1.25347

gradient dW:

[?,
?,
?,
?,
?,
?,
?,
?,
?,...]

current W:

[0.34,
-1.11,
0.78,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss 1.25347

W + h (first dim):

[0.34 + **0.0001**,
-1.11,
0.78,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss 1.25322

gradient dW:

[?,
?,
?,
?,
?,
?,
?,
?,
?,...]

current W:

[0.34,
-1.11,
0.78,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss 1.25347

W + h (first dim):

[0.34 + **0.0001**,
-1.11,
0.78,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss 1.25322

gradient dW:

[-2.5,
?,
?,
...

$$(1.25322 - 1.25347)/0.0001 = -2.5$$

$$\frac{df(x)}{dx} = \lim_{h \rightarrow 0} \frac{f(x+h) - f(x)}{h}$$

?,
?,...]

current W:

[0.34,
-1.11,
0.78,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss 1.25347

W + h (second dim):

[0.34,
-1.11 + **0.0001**,
0.78,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss 1.25353

gradient dW:

[-2.5,
?,
?,
?,
?,
?,
?,
?,
?,...]

current W:

[0.34,
-1.11,
0.78,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss 1.25347

W + h (second dim):

[0.34,
-1.11 + **0.0001**,
0.78,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss 1.25353

gradient dW:

[-2.5,
0.6,
?,
?,
?,...]

$$(1.25353 - 1.25347)/0.0001 = 0.6$$

$$\frac{df(x)}{dx} = \lim_{h \rightarrow 0} \frac{f(x+h) - f(x)}{h}$$

?,...]

current W:

[0.34,
-1.11,
0.78,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss 1.25347

W + h (third dim):

[0.34,
-1.11,
0.78 + **0.0001**,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss 1.25347

gradient dW:

[-2.5,
0.6,
?,
?,
?,
?,
?,
?,
?,...]

current W:

[0.34,
-1.11,
0.78,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss 1.25347

W + h (third dim):

[0.34,
-1.11,
0.78 + **0.0001**,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss 1.25347

gradient dW:

[-2.5,
0.6,
0,
?,
?


$$(1.25347 - 1.25347)/0.0001 = 0$$

$$\frac{df(x)}{dx} = \lim_{h \rightarrow 0} \frac{f(x+h) - f(x)}{h}$$

This is silly. The loss is just a function of W :

$$L = \frac{1}{N} \sum_{i=1}^N L_i + \sum_k W_k^2$$

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

$$s = f(x; W) = Wx$$

want $\nabla_W L$

This is silly. The loss is just a function of W :


$$L = \frac{1}{N} \sum_{i=1}^N L_i + \sum_k W_k^2$$

$$L_i = \sum_{j \neq y_i} \max(0, s_j - s_{y_i} + 1)$$

$$s = f(x; W) = Wx$$

want $\nabla_W L$

Use calculus to compute an
analytic gradient

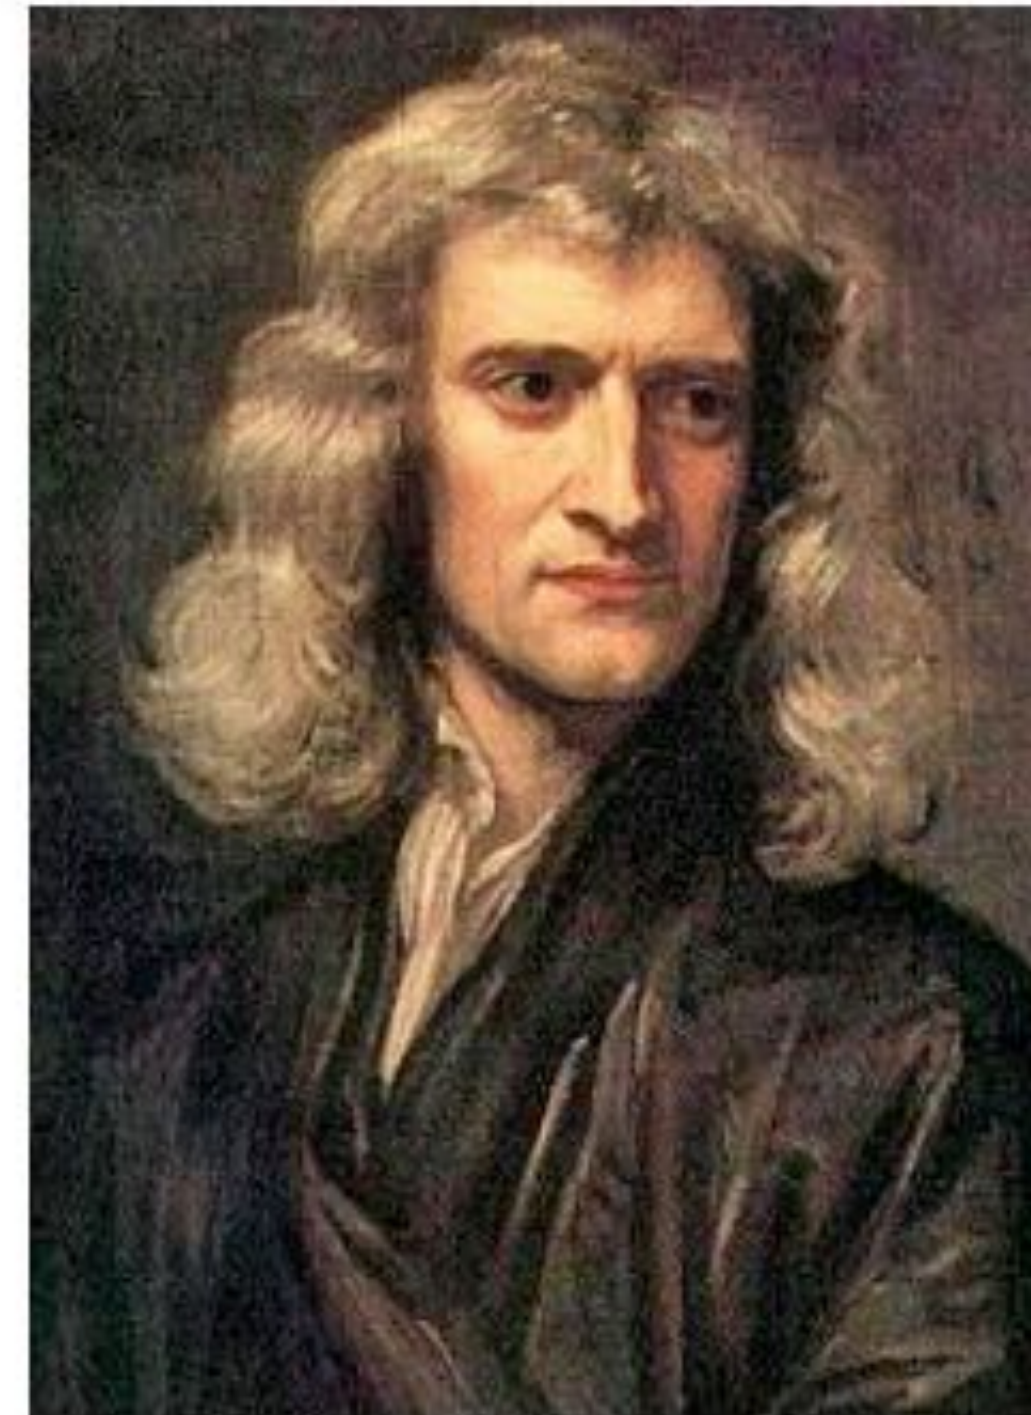

[This image](#) is in the public domain




[This image](#) is in the public domain

current W :

[0.34,
-1.11,
0.78,
0.12,
0.55,
2.81,
-3.1,
-1.5,
0.33,...]

loss 1.25347

$dW = \dots$
(some function
data and W)

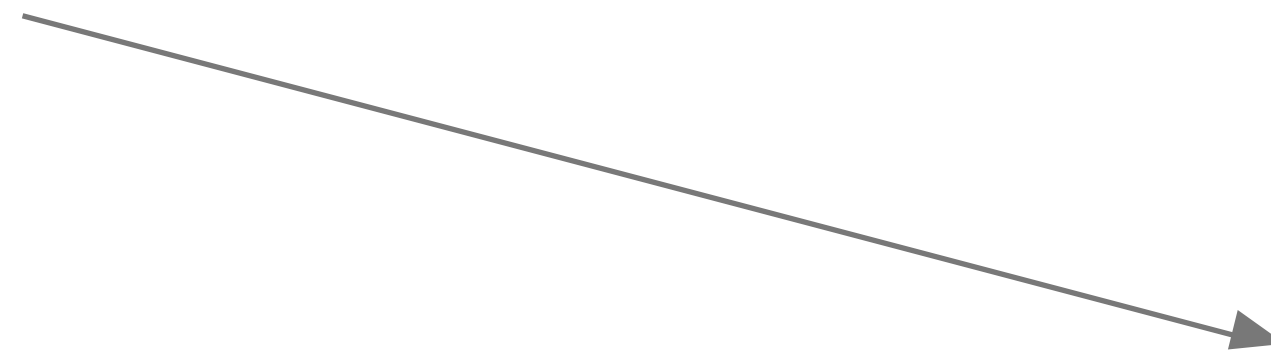

gradient dW :

[-2.5,
0.6,
0,
0.2,
0.7,
-0.5,
1.1,
1.3,
-2.1,...]

In summary:

- Numerical gradient: approximate, slow, easy to write
- Analytic gradient: exact, fast, error-prone

=>

In practice: Always use analytic gradient, but check implementation with numerical gradient. This is called a **gradient check**.


Gradient Descent


```
# Vanilla Gradient Descent
```

```
while True:
```

```
    weights_grad = evaluate_gradient(loss_fun, data, weights)
```

```
    weights += - step_size * weights_grad # perform parameter update
```

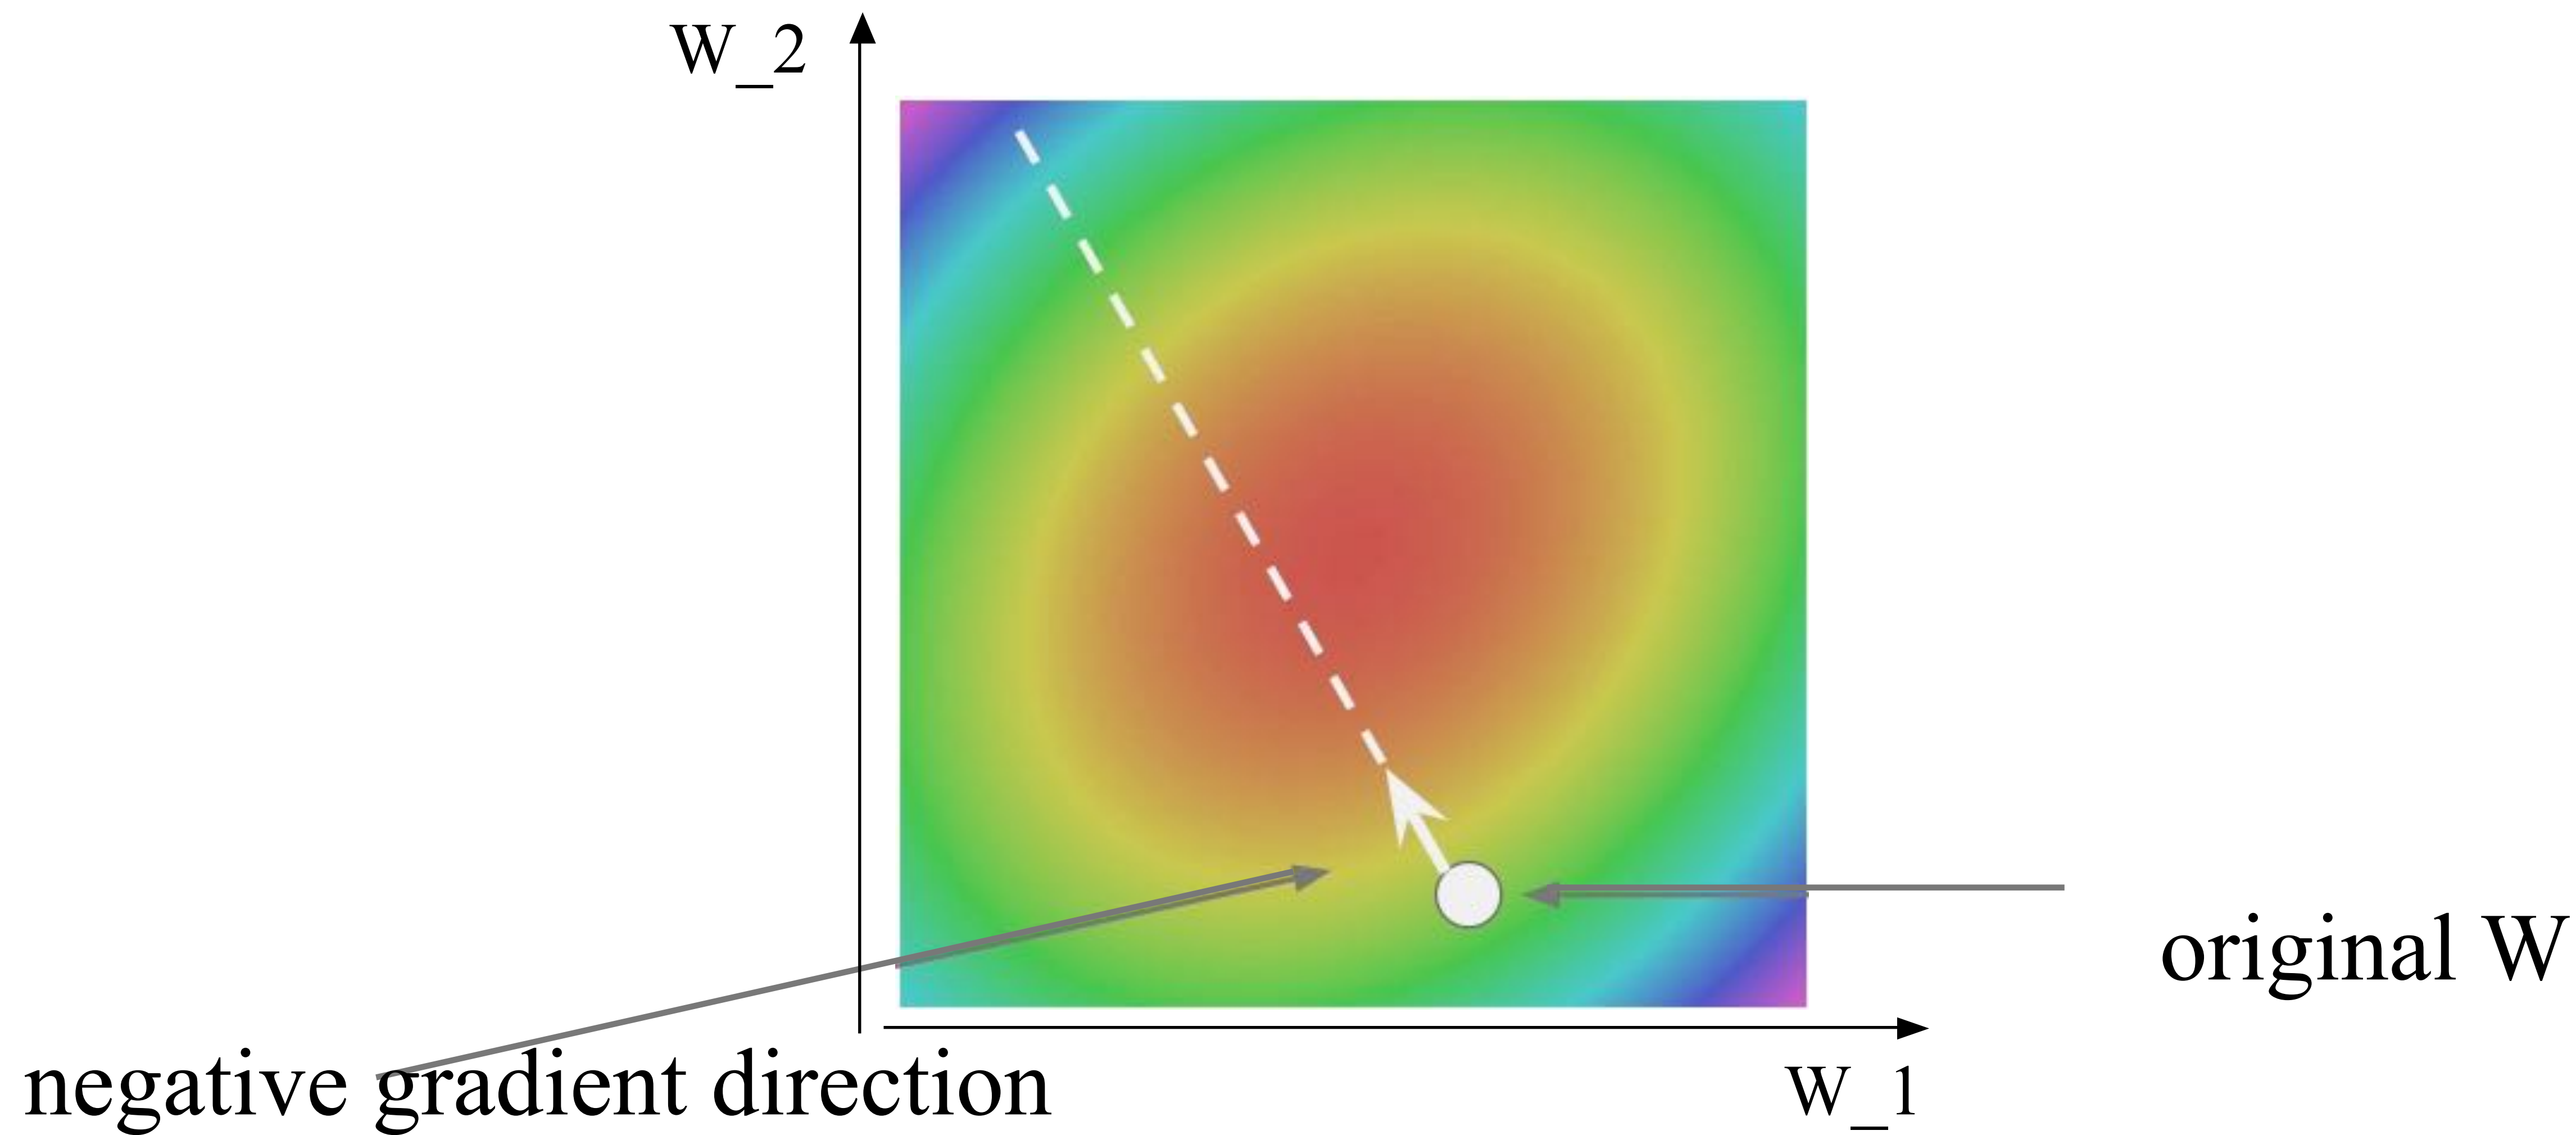



Stochastic Gradient Descent (SGD)

$$L(W) = \frac{1}{N} \sum_{i=1}^N L_i(x_i, y_i, W) + \lambda R(W)$$

$$\nabla_W L(W) = \frac{1}{N} \sum_{i=1}^N \nabla_W L_i(x_i, y_i, W) + \lambda \nabla_W R(W)$$

Full sum expensive
when N is large!

Approximate sum
using a random
minibatch B of examples!

batch size 32 / 64 / 128 common

$$\nabla_W L(W) = \frac{1}{|B|} \sum_{(x,y) \in B} \nabla_W L(x, y, W) + \lambda \nabla_W R(W)$$

```
# Vanilla Minibatch Gradient Descent
```


```
while True:
```

```
    data_batch = sample_training_data(data, 256) # sample 256 examples
```

```
    weights_grad = evaluate_gradient(loss_fun, data_batch, weights)
```

```
    weights += - step_size * weights_grad # perform parameter update
```


Interactive Web Demo time....

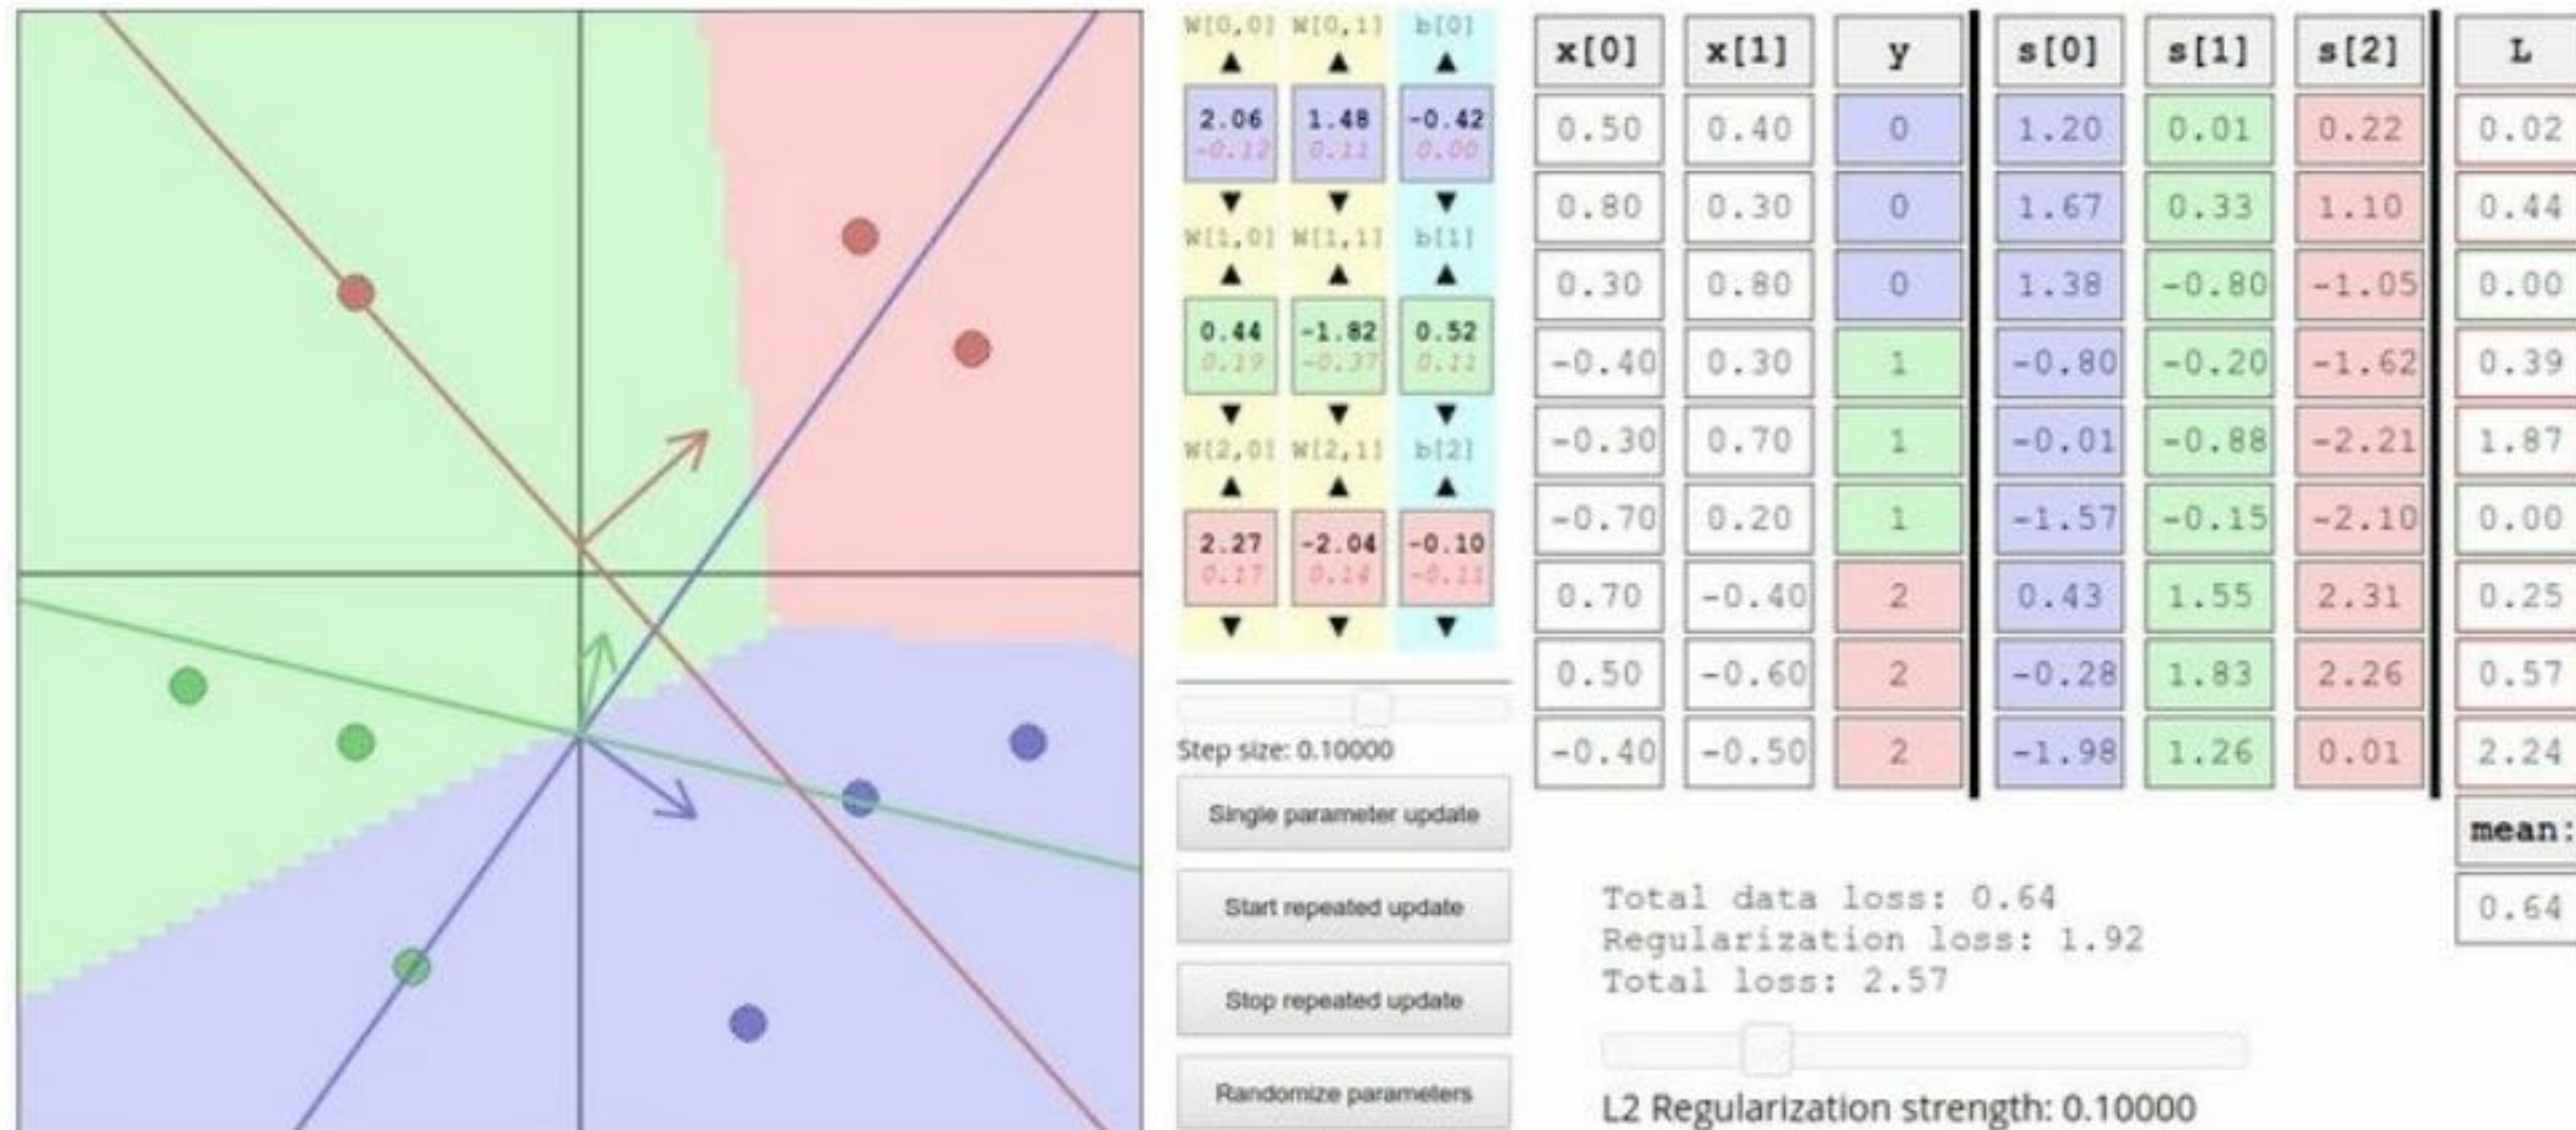

<http://vision.stanford.edu/teaching/cs231n-demos/linear-classify/>