

Get Available Inventory Orchestration Schema


QA L7 endpoint - /v1/orcas/inventory/availability

UBIF Legacy Backend:

UBIF Next Gen Backend:

DAX Americas Api Backend: [/external/items/availability_\[GET\]_\(v1\) - DAX Developer Documentation - Confluence](#)

Current State View

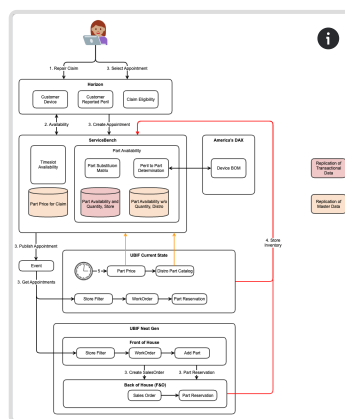

Inventory Availability for SUR - Asurion Stores - Confluence

SSOT for SUR 2024.11.18_V2.pptx

Future State View

 **SUR - SSOT - Inventory Availability Orchestration**

 Confluence Whiteboards

[Open preview modal](#)

L7 Request Headers

Header Field	Usage (Mandatory/Optional)	Value	Description
Asurion-apikey	Mandatory		API key that uniquely identifies the

			consuming application.
Asurion-correlationid	Mandatory	Can be a random string when in DEV or QA.	An identifier used to correlate multiple messages, a series of dependent interactions. All messages created as a result of another message should have the same correlation id. Each distinct action made on a user interface must have a different correlation identifier.
Asurion-client	Mandatory	Asurion Tech Care	The client name.
Authorization	Mandatory		Service Account credentials needs to be passed by the consumer to invoke the api.
Content-Type	Mandatory	'application/json'	The content type.
Accept	Mandatory	'application/json'	The response format.

Request schema

Name	Type	Usage	Description
client	string	Mandatory	
region	string	Mandatory	
lineOfBusiness	string	Mandatory	

skus	list of string	Mandatory	service bench part skus
locations	list of location objects	Mandatory	list of service locations to check

Location object schema

Name	Type	Usage	Description
account	string	Mandatory	Used to identify a store/provider/wareho use in DAX by an external reference
location	string	Mandatory	Used to identify a store/provider/wareho use in DAX by an external reference

Response schema

Name	Type	Description
results	object	List of results
results.account	string	Used to identify a store/provider/warehouse in DAX by an external reference
results.location	string	Used to identify a store/provider/warehouse in DAX by an external reference
results.sku	string	Part sku
results.allowJIT	boolean	indicates if just in time (JIT) is enabled
results.instock	boolean	indicates in stock or not

Error schema

Primary Http Status Codes

Status Code	Meaning
200	Success - Response should not contain any errors
502	Bad Gateway - Used to indicate that an error occurred with trying to hit the backends
500	Internal Error - Used to indicate that while backends responded, the orchestration layer had some unexpected issue

Name	Type	Description	Comments
code	int	error code returned by backend or by orchestration	
message	string	error message returned by backend or by orchestration	
isBackendError	boolean	if true, then the error was thrown the backend system (ie. asurion or mercury). if false, then the error was thrown by the orchestration layer	for tracing
backend	string	asurion or mercury identifier	for tracing

Payload samples

Error Responses

Error

```
1 {  
2   "locations": [],
```

```

3     "errors": [
4         {
5             "isBackEndError": true,
6             "backend": "DAXAPI",
7             "code": 500,
8             "message": "{\\"statusCode\\":500,\\"ErrorMessage\\":\\"No customer account mapping
configured for market on item 'S111-0460-IPH6128GLD' in company 'WCF'.\\"}"
9         },
10        {
11            "isBackEndError": true,
12            "backend": "UBIFLegacyAPI",
13            "code": 400,
14            "message": "{\\"statusCode\\":500,\\"error\\":
{\\"name\\":\\"BadRequestError\\",\\"message\\":\\"Event object failed validation\\",\\"cause\\":
[{\\"instancePath\\":\\"/body/customerCaseNumber\\",\\"schemaPath\\":\\"#/properties/body/propertie
s/customerCaseNumber/maxLength\\",\\"keyword\\":\\"maxLength\\",\\"params\\":
{\\"limit\\":1},\\"message\\":\\"must NOT have fewer than 1
characters\\",\\"schema\\":1,\\"parentSchema\\":
{\\"type\\":\\"string\\",\\"maxLength\\":1},\\"data\\":\\"\\"}],\\"stack\\":\\"BadRequestError: Event
object failed validation\\n    at createError
(webpack://drp/node_modules/@middy/util/index.js:199:1)\\n    at validatorMiddlewareBefore
(webpack://drp/node_modules/@middy/validator/index.js:21:34)\\n    at async runMiddlewares
(webpack://drp/node_modules/@middy/core/index.js:160:1)\\n    at async runRequest
(webpack://drp/node_modules/@middy/core/index.js:114:1)\\n}\\}"
15        }
16    ]
17 }

```

Success example

Request

```

1 {
2     "client": "Asurion Tech Care",
3     "region": "US",
4     "lineOfBusiness": "Replace",
5     "skus":["",""],
6     "locations": [{},{}]
7 }
8
9

```

Response

```

1 {
2     "results": [
3         {
4             "account": "abc",
5             "location": "123456",
6             "sku": "APY-33434",
7             "instock": true,
8             "allowJIT": true
9         }
10    ],
11    "errors": []
12 }

```