


Dropout (1/2)
zero target gNB i^* 's row
in X_t before π_θ reads it

Dropout (2/2)
force-reject every pending
request belonging to i^*

Per-step control loop (evaluation only, training=False)

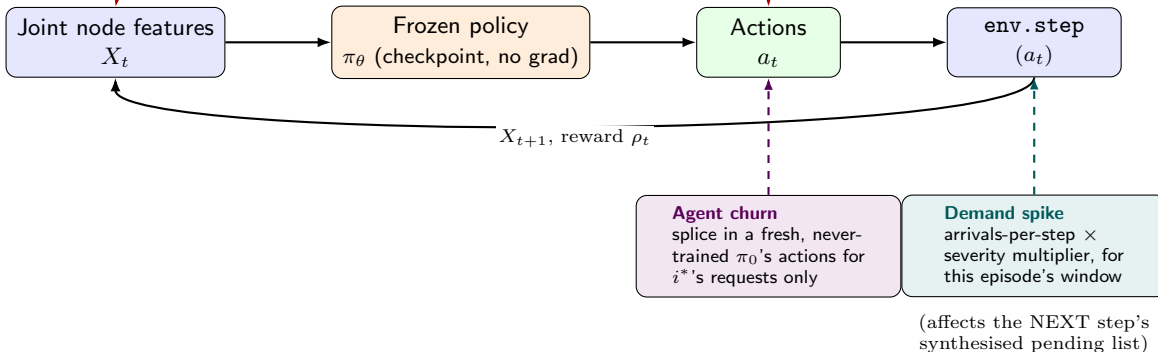

Severity axis: dropout / churn: window length (10% / 30% / 60% of episode) | spike: arrival multiplier (2×/4×/8×) | target gNB i^* & window start: drawn fresh per episode