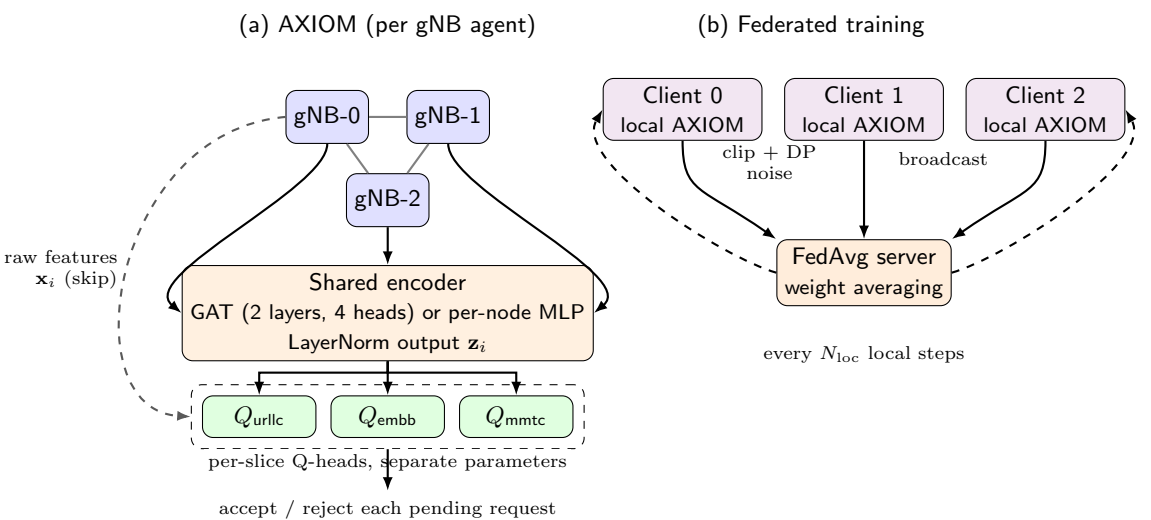

(a) AXIOM (per gNB agent)
(b) Federated training
gNB-0
gNB-1
gNB-2
raw features
$\mathbf{x}_i$ (skip)
Shared encoder
GAT (2 layers, 4 heads) or per-node MLP
LayerNorm output $\mathbf{z}_i$
Q_{urllc}
Q_{embb}
Q_{mmtc}
per-slice Q-heads, separate parameters
accept / reject each pending request
Client 0
local AXIOM
Client 1
local AXIOM
Client 2
local AXIOM
clip + DP
noise
broadcast
FedAvg server
weight averaging
every N_{loc} local steps