

# Lecture 7: Type System Specifications

**Hendrik van Antwerpen**

**CS4200 Compiler Construction**

**TU Delft**

**October 2019**

# This Lecture



Check that names are used correctly and that expressions are well-typed

# Reading Material

The following papers add background, conceptual exposition, and examples to the material from the slides. Some notation and technical details have been changed; check the documentation.

Type checkers are algorithms that check names and types in programs.

This paper introduces the NaBL Name Binding Language, which supports the declarative definition of the name binding and scope rules of programming languages through the definition of scopes, declarations, references, and imports associated.

## Background

SLE 2012

[http://dx.doi.org/10.1007/978-3-642-36089-3\\_18](http://dx.doi.org/10.1007/978-3-642-36089-3_18)

## Declarative Name Binding and Scope Rules

Gabriël Konat, Lennart Kats, Guido Wachsmuth, and Eelco Visser

Delft University of Technology, The Netherlands

g.d.p.konat@student.tudelft.nl,

{l.c.l.kats,g.h.wachsmuth,e.visser}@tudelft.nl

**Abstract.** In textual software languages, names are used to reference elements like variables, methods, classes, etc. Name resolution analyses these names in order to establish references between definition and use sites of elements. In this paper, we identify recurring patterns for name bindings in programming languages and introduce a declarative meta-language for the specification of name bindings in terms of namespaces, definition sites, use sites, and scopes. Based on such declarative name binding specifications, we provide a language-parametric algorithm for static name resolution during compile-time. We discuss the integration of the algorithm into the Spoofax Language Workbench and show how its results can be employed in semantic editor services like reference resolution, constraint checking, and content completion.

### 1 Introduction

Software language engineering is concerned with *linguistic abstraction*, the formalization of our understanding of domains of computation in higher-level software languages. Such languages allow direct expression in terms of the domain, instead of requiring encoding in a less specific language. They raise the level of abstraction and reduce accidental complexity. One of the key goals in the field of language engineering is to apply these techniques to the discipline itself: high-level languages to specify all aspects of software languages. Declarative languages are of particular interest since they enable language engineers to focus on the *What?* instead of the *How?*. Syntax definitions are a prominent example. With declarative formalisms such as EBNF, we can specify the syntactic concepts of a language without specifying how they can be recognized programmatically. This declarativity is crucial for language engineering. Losing it hampers evolution, maintainability, and compositionality of syntax definitions [15].

Despite the success of declarative syntax formalisms, we tend to programmatic specifications for other language aspects. Instead of specifying languages, we build programmatic language processors, following implementation patterns in rather general specification languages. These languages might still be considered domain-specific, when they provide special means for programmatic language processors. They also might be considered declarative, when they abstract over computation order. However, they enable us only to implement language

This paper introduces scope graphs as a language-independent representation for the binding information in programs.

Best EAPLS paper at ETAPS 2015

ESOP 2015

[http://dx.doi.org/10.1007/978-3-662-46669-8\\_9](http://dx.doi.org/10.1007/978-3-662-46669-8_9)

## A Theory of Name Resolution

Pierre Neron<sup>1</sup>, Andrew Tolmach<sup>2</sup>, Eelco Visser<sup>1</sup>, and Guido Wachsmuth<sup>1</sup>

<sup>1)</sup> Delft University of Technology, The Netherlands,

{p.j.m.neron, e.visser, g.wachsmuth}@tudelft.nl,

<sup>2)</sup> Portland State University, Portland, OR, USA

tolmach@pdx.edu

**Abstract.** We describe a language-independent theory for name binding and resolution, suitable for programming languages with complex scoping rules including both lexical scoping and modules. We formulate name resolution as a two-stage problem. First a language-independent scope graph is constructed using language-specific rules from an abstract syntax tree. Then references in the scope graph are resolved to corresponding declarations using a language-independent resolution process. We introduce a resolution calculus as a concise, declarative, and language-independent specification of name resolution. We develop a resolution algorithm that is sound and complete with respect to the calculus. Based on the resolution calculus we develop language-independent definitions of  $\alpha$ -equivalence and rename refactoring. We illustrate the approach using a small example language with modules. In addition, we show how our approach provides a model for a range of name binding patterns in existing languages.

### 1 Introduction

Naming is a pervasive concern in the design and implementation of programming languages. Names identify *declarations* of program entities (variables, functions, types, modules, etc.) and allow these entities to be *referenced* from other parts of the program. Name *resolution* associates each reference to its intended declaration(s), according to the semantics of the language. Name resolution underlies most operations on languages and programs, including static checking, translation, mechanized description of semantics, and provision of editor services in IDEs. Resolution is often complicated, because it cuts across the local inductive structure of programs (as described by an abstract syntax tree). For example, the name introduced by a `let` node in an ML AST may be referenced by an arbitrarily distant child node. Languages with explicit name spaces lead to further complexity; for example, resolving a qualified reference in Java requires first resolving the class or package name to a context, and then resolving the member name within that context. But despite this diversity, it is intuitively clear that the basic concepts of resolution reappear in similar form across a broad range of lexically-scoped languages.

In practice, the name resolution rules of real programming languages are usually described using *ad hoc* and informal mechanisms. Even when a language is formalized, its resolution rules are typically encoded as part of static

Separating type checking into constraint generation and constraint solving provides more declarative definition of type checkers. This paper introduces a constraint language integrating name resolution into constraint resolution through scope graph constraints.

This is the basis for the design of the NaBL2 static semantics specification language.

PEPM 2016

<https://doi.org/10.1145/2847538.2847543>

## A Constraint Language for Static Semantic Analysis based on Scope Graphs

Hendrik van Antwerpen

Delft University of Technology

[h.vanantwerpen@student.tudelft.nl](mailto:h.vanantwerpen@student.tudelft.nl)

Pierre Néron

Delft University of Technology

[p.j.m.neron@tudelft.nl](mailto:p.j.m.neron@tudelft.nl)

Andrew Tolmach

Portland State University

[tolmach@pdx.edu](mailto:tolmach@pdx.edu)

Guido Wachsmuth

Delft University of Technology

[gwac@acm.org](mailto:gwac@acm.org)

Eelco Visser

Delft University of Technology

[visser@acm.org](mailto:visser@acm.org)

### Abstract

In previous work, we introduced *scope graphs* as a formalism for describing program binding structure and performing name resolution in an AST-independent way. In this paper, we show how to use scope graphs to build static semantic analyzers. We use *constraints* extracted from the AST to specify facts about binding, typing, and initialization. We treat name and type resolution as separate building blocks, but our approach can handle language constructs—such as record field access—for which binding and typing are mutually dependent. We also refine and extend our previous scope graph theory to address practical concerns including ambiguity checking and support for a wider range of scope relationships. We describe the details of constraint generation for a model language that illustrates many of the interesting static analysis issues associated with modules and records.

### 1. Introduction

Language workbenches [6] are tools that support the implementation of full-fledged programming environments for (domain-specific) programming languages. Ongoing research investigates how to reduce implementation effort by factoring out language-independent implementation concerns and providing high-level meta-languages for the specification of syntactic and semantic aspects of a language [18]. Such meta-languages should (i) have a clear and clean underlying theory; (ii) handle a broad range of common language features; (iii) be declarative, but be realizable by practical algorithms and tools; (iv) be factored into language-specific and language-independent parts, to maximize re-use; and (v) apply to erroneous programs as well as to correct ones.

In recent work we show how name resolution for lexically-scoped languages can be formalized in a way that meets these criteria [14]. The name binding structure of a program is captured in a *scope graph* which records identifier declarations and references and their scoping relationships, while abstracting away program details. Its basic building blocks are *scopes*, which correspond to sets of program points that behave uniformly with respect to resolution. A scope contains identifier declarations and references, each tagged with its position in the original AST. Scopes can be connected by edges representing lexical nesting or import of named collections of declarations such as modules or records. A scope graph is constructed from the program AST using a language-dependent traversal, but thereafter, it can be processed in a largely language-independent way. A *resolution calculus* gives a formal definition

of what it means for a reference to resolve to a declaration. Resolutions are described as paths in the scope graph obeying certain (language-specific) criteria; a given reference may resolve to one, none, or many declarations. A derived *resolution algorithm* computes the set of declarations to which each reference resolves, and is sound and complete with respect to the calculus.

In this paper, we refine and extend the scope graph framework of [14] to construct a full framework for static semantic analysis. In essence, this involves uniting a type checker with our existing name resolution machinery. Ideally, we would like to keep these two aspects separated as much as possible for maximum modularity. And indeed, for many language constructs, a simple two-stage approach—name resolution using the scope graph followed by a separate type checking step—would work. But the full story is more complicated, because sometimes name resolution also depends on type resolution. For example, in a language that uses dot notation for object field projection, determining the resolution of  $x$  in the expression  $r.x$  requires first determining the object type of  $r$ , which in turn requires name resolution again. Thus, our framework requires a unified mechanism for expressing and solving arbitrarily interdependent naming and typing resolution problems.

To address this challenge, we base our framework on a language of *constraints*. Term equality constraints are a standard choice for describing type inference problems while abstracting away from the details of an AST in a particular language. Adopting constraints to describe both typing and scoping requirements has the advantage of uniform notation, and, more importantly, provides a clean way to combine naming and typing problems. In particular, we extend our previous work to support *incomplete* scope graphs, which correspond to constraint sets with (as yet) unresolved variables.

Our new framework continues to satisfy the criteria outlined above. (i) The resolution calculus and standard term equality constraint theory provide a solid language-independent theory for name and type resolution. (ii) Our framework supports type checking and inference for statically typed, monomorphic languages with user-defined types, and can also express uniqueness and completeness requirements on declarations and initializers. The framework inherits from scope graphs the ability to model a broad range of binding patterns, including many variants of lexical scoping, records, and modules. (iii) The constraint language has a declarative semantics given by a constraint satisfaction relation, which employs the resolution calculus to define the semantics of name resolution relative to a scope graph. We define a constraint resolution algorithm based on our previous name resolution algorithm,

The screenshot shows the left sidebar of the Spooftax documentation. It includes a search bar labeled "Search docs". Below it are links to "The Spooftax Language Workbench", "Examples", and "Publications". The "TUTORIALS" section contains links to "Installing Spooftax", "Creating a Language Project", "Using the API", and "Getting Support". The "REFERENCE MANUAL" section contains links to "Language Definition with Spooftax", "Abstract Syntax with ATerms", "Syntax Definition with SDF3", and "Static Semantics with NaBL2". Under "Static Semantics with NaBL2", there are links to 1. Introduction, 2. Language Reference, 3. Configuration, 4. Examples, 5. Bibliography, 6. NaBL/TS (Deprecated), Transformation with Stratego, Dynamic Semantics with DynSem, Editor Services with ESV, Language Testing with SPT, Building Languages, Programmatic API, and Developing Spooftax.

<http://www.metaborg.org/en/latest/source/langdev/meta/lang/nabl2/index.html>

## Static Semantics Definition with NaBL2

Programs that are syntactically well-formed are not necessarily valid programs. Programming languages typically impose additional *context-sensitive* requirements on programs that cannot be captured in a syntax definition. Languages use names to identify reusable units that can be invoked at multiple parts in a program. In addition, statically typed languages require that expressions are consistently typed. The NaBL2 'Name Binding Language' supports the specification of name binding and type checking rules of a language. NaBL2 uses a constraint-based approach, and uses scope graphs for name resolution.

### Table of Contents

- [1. Introduction](#)
  - [1.1. Name Resolution with Scope Graphs](#)
- [2. Language Reference](#)
  - [2.1. Lexical matters](#)
  - [2.2. Modules](#)
  - [2.3. Signatures](#)
  - [2.4. Rules](#)
  - [2.5. Constraints](#)
- [3. Configuration](#)
  - [3.1. Prepare your project](#)
  - [3.2. Runtime settings](#)
  - [3.3. Customize analysis](#)
  - [3.4. Inspecting analysis results](#)
- [4. Examples](#)
- [5. Bibliography](#)
- [6. NaBL/TS \(Deprecated\)](#)
  - [6.1. Namespaces](#)
  - [6.2. Name Binding Rules](#)
  - [6.3. Interaction with Type System](#)

#### ! Note

The predecessor of NaBL2, the NaBL/TS name binding and type analysis meta-language is deprecated.

<a href="#">Development Release</a>
<a href="#">Release Archive</a>
<a href="#">Migration Guides</a>

This paper describes the next generation of the approach.

Addresses (previously) open issues in expressiveness of scope graphs for type systems:

- Structural types
- Generic types

Addresses open issue with staging of information in type systems.

Introduces Statix DSL for definition of type systems.

Prototype of Statix is available in Spooftax HEAD, but not ready for use in project yet.

The future

OOPSLA 2018

To appear

## Scopes as Types

HENDRIK VAN ANTWERPEN, Delft University of Technology, Netherlands

CASPER BACH POULSEN, Delft University of Technology, Netherlands

ARJEN ROUVOET, Delft University of Technology, Netherlands

EELCO VISSER, Delft University of Technology, Netherlands

Scope graphs are a promising generic framework to model the binding structures of programming languages, bridging formalization and implementation, supporting the definition of type checkers and the automation of type safety proofs. However, previous work on scope graphs has been limited to simple, nominal type systems. In this paper, we show that viewing *scopes as types* enables us to model the internal structure of types in a range of non-simple type systems (including structural records and generic classes) using the generic representation of scopes. Further, we show that relations between such types can be expressed in terms of generalized scope graph queries. We extend scope graphs with scoped relations and queries. We introduce Statix, a new domain-specific meta-language for the specification of static semantics, based on scope graphs and constraints. We evaluate the scopes as types approach and the Statix design in case studies of the simply-typed lambda calculus with records, System F, and Featherweight Generic Java.

CCS Concepts: • Software and its engineering → Semantics; Domain specific languages;

Additional Key Words and Phrases: static semantics, type system, type checker, name resolution, scope graphs, domain-specific language

### ACM Reference Format:

Hendrik van Antwerpen, Casper Bach Poulsen, Arjen Rouvoet, and Eelco Visser. 2018. Scopes as Types. *Proc. ACM Program. Lang.* 2, OOPSLA, Article 114 (November 2018), 30 pages. <https://doi.org/10.1145/3276484>

### 1 INTRODUCTION

The goal of our work is to support high-level specification of type systems that can be used for multiple purposes, including reasoning (about type safety among other things) and the implementation of type checkers [Visser et al. 2014]. Traditional approaches to type system specification do not reflect the commonality underlying the name binding mechanisms for different languages. Furthermore, operationalizing name binding in a type checker requires carefully staging the traversals of the abstract syntax tree in order to collect information before it is needed. In this paper, we introduce an approach to the declarative specification of type systems that is close in abstraction to traditional type system specifications, but can be directly interpreted as type checking rules. The approach is based on scope graphs for name resolution, and constraints to separate traversal order from solving order.

Authors' addresses: Hendrik van Antwerpen, Delft University of Technology, Delft, Netherlands, H.vanAntwerpen@tudelft.nl; Casper Bach Poulsen, Delft University of Technology, Delft, Netherlands, C.B.Poulsen@tudelft.nl; Arjen Rouvoet, Delft University of Technology, Delft, Netherlands, A.J.Rouvoet@tudelft.nl; Eelco Visser, Delft University of Technology, Delft, Netherlands, E.Visser@tudelft.nl.

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the owner/author(s).

© 2018 Copyright held by the owner/author(s).


2475-1421/2018/11-ART114


<https://doi.org/10.1145/3276484>


# Type Checking using High-level Typing Rules



Check that names are used correctly and that expressions are well-typed

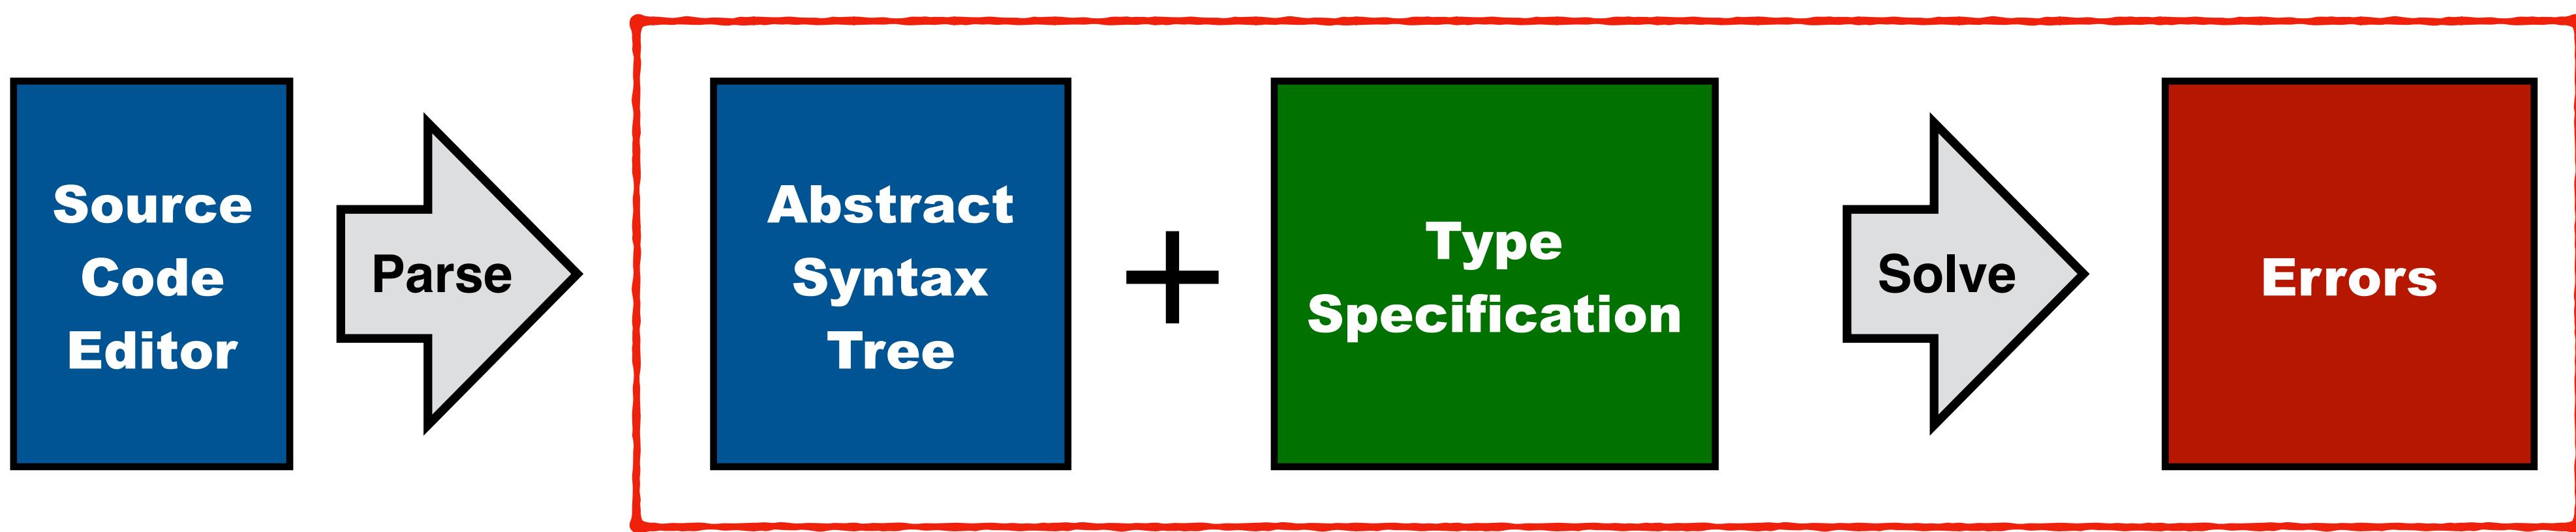

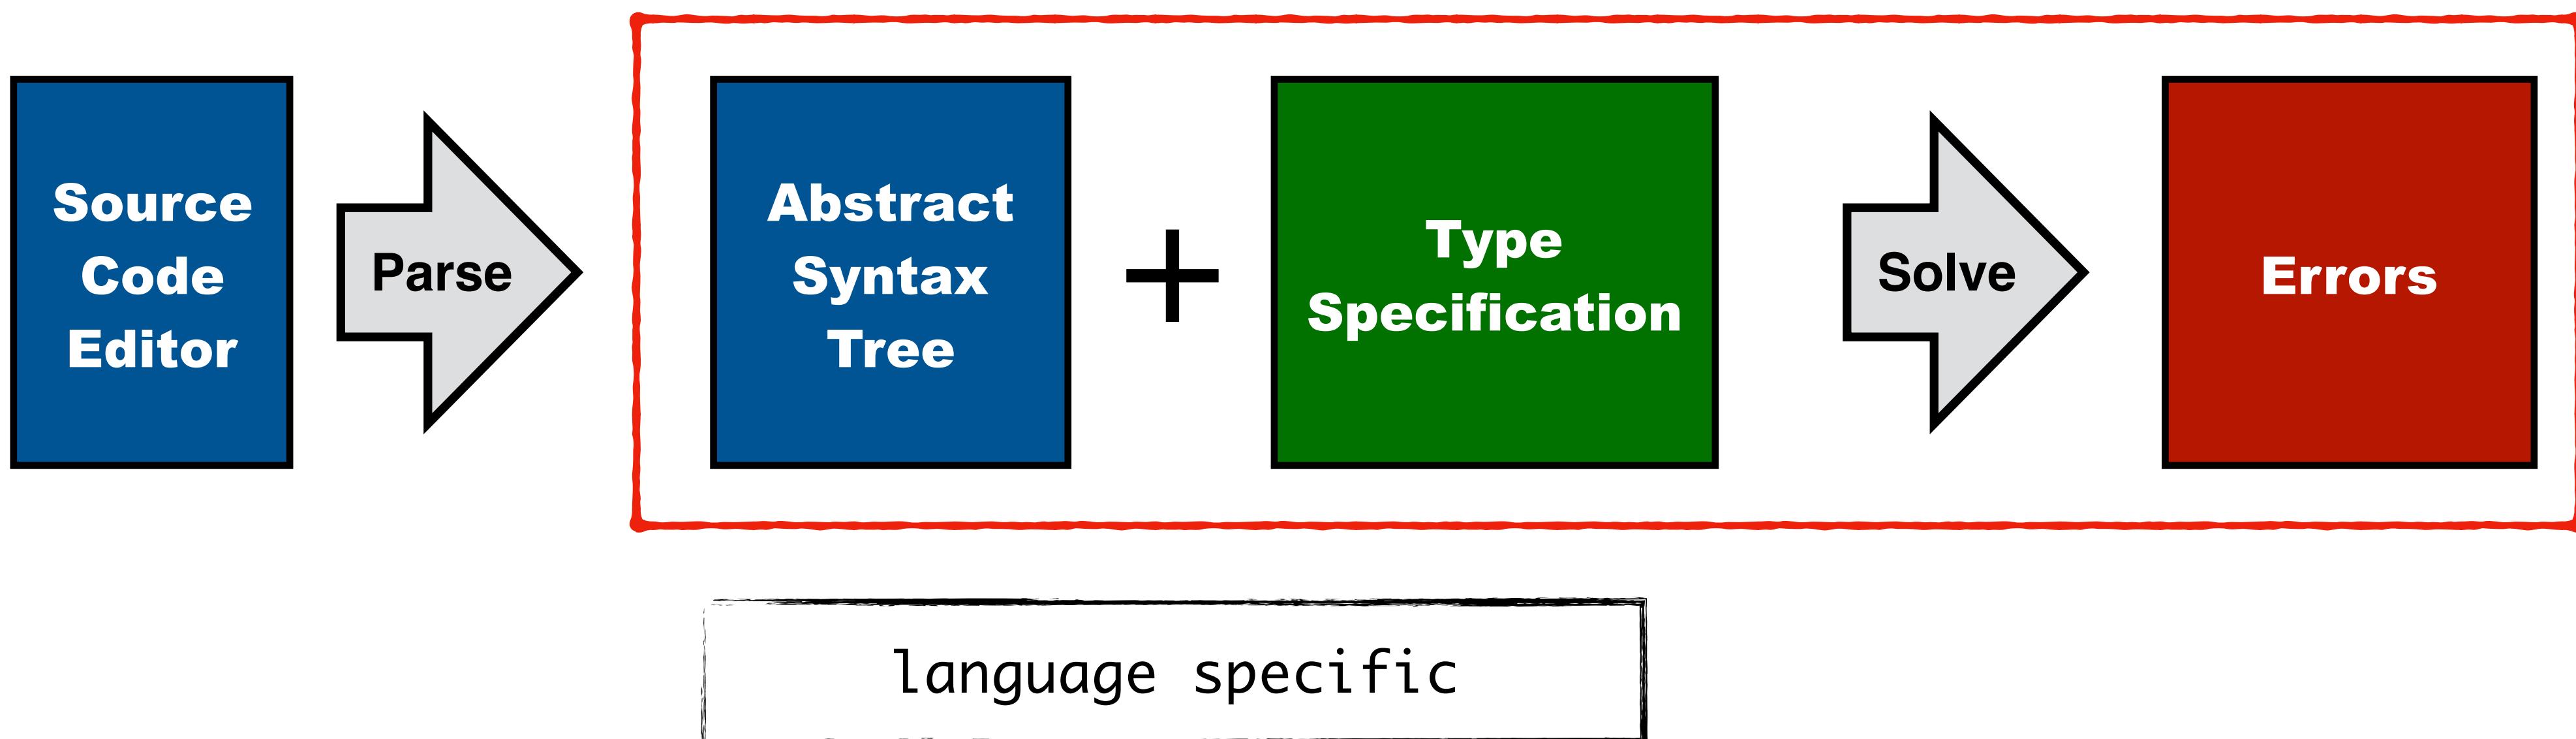

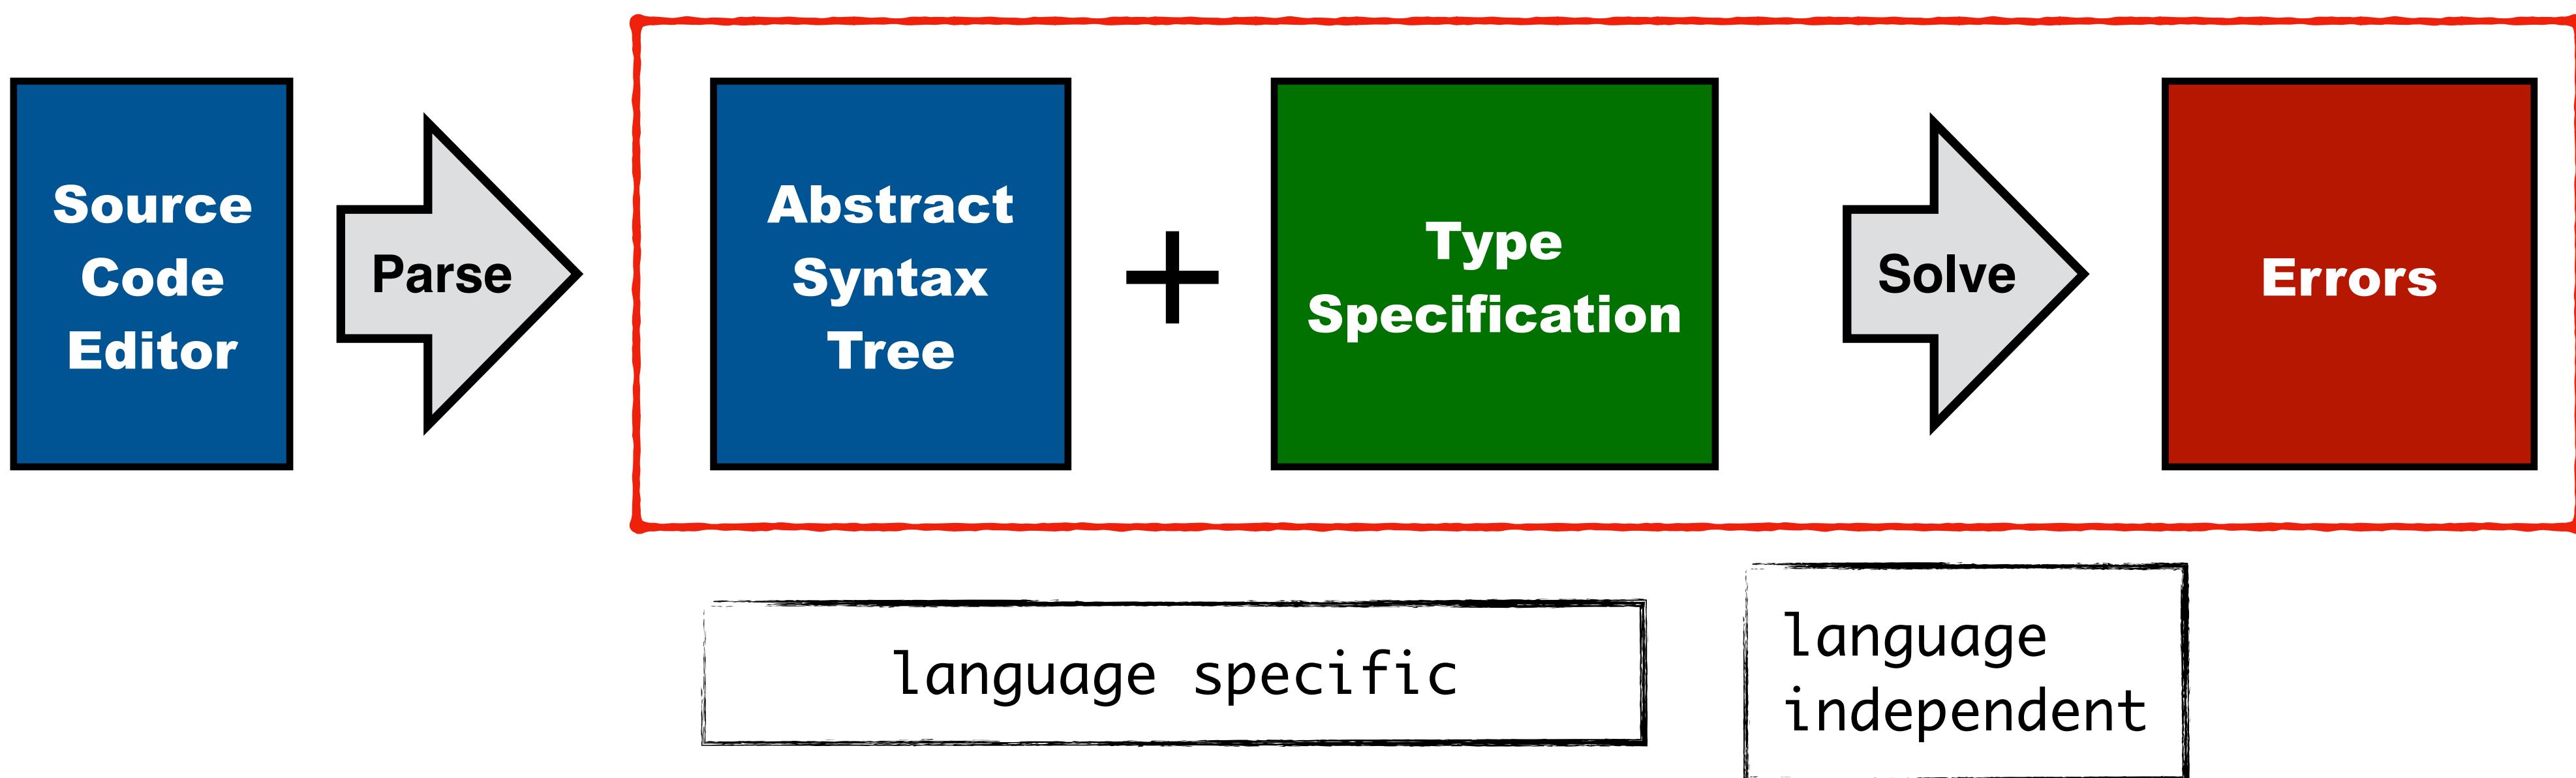

# Type Checking with Specifications

## Separation of concern

# Type Checking with Specifications

## Separation of concern

- Language specific specification in terms of logical formalism

# Type Checking with Specifications

## Separation of concern

- Language specific specification in terms of logical formalism
- Language independent algorithm to interpret specification

# Type Checking with Specifications

## Separation of concern

- Language specific specification in terms of logical formalism
- Language independent algorithm to interpret specification
- Write specification, get an executable checker

# Type Checking with Specifications

## Separation of concern

- Language specific specification in terms of logical formalism
- Language independent algorithm to interpret specification
- Write specification, get an executable checker

## Advantages

# Type Checking with Specifications

## Separation of concern

- Language specific specification in terms of logical formalism
- Language independent algorithm to interpret specification
- Write specification, get an executable checker

## Advantages

- High-level, declarative specification

# Type Checking with Specifications

## Separation of concern

- Language specific specification in terms of logical formalism
- Language independent algorithm to interpret specification
- Write specification, get an executable checker

## Advantages

- High-level, declarative specification
- Abstract over algorithmic concerns

# Type Checking with Specifications

## Separation of concern

- Language specific specification in terms of logical formalism
- Language independent algorithm to interpret specification
- Write specification, get an executable checker

## Advantages

- High-level, declarative specification
- Abstract over algorithmic concerns
  - ▶ Execution order

# Type Checking with Specifications

## Separation of concern

- Language specific specification in terms of logical formalism
- Language independent algorithm to interpret specification
- Write specification, get an executable checker

## Advantages

- High-level, declarative specification
- Abstract over algorithmic concerns
  - ▶ Execution order
  - ▶ Transparently support for inference

# Type Checking with Specifications

## Separation of concern

- Language specific specification in terms of logical formalism
- Language independent algorithm to interpret specification
- Write specification, get an executable checker

## Advantages

- High-level, declarative specification
- Abstract over algorithmic concerns
  - ▶ Execution order
  - ▶ Transparently support for inference
- Logical variables act as interface between different kinds of premises

# Statix

## What is Statix?

- Domain-specific specification language...
- ... to write typing and name binding specification
- Comes with a solver to use for type checking

## What is Statix?

- Domain-specific specification language...
- ... to write typing and name binding specification
- Comes with a solver to use for type checking

## What features does it support?

- Predicates defined by logical (Horn-clause) rules
- Rich binding structures using scope graphs
- Unification based inference

## What is Statix?

- Domain-specific specification language...
- ... to write typing and name binding specification
- Comes with a solver to use for type checking

## What features does it support?

- Predicates defined by logical (Horn-clause) rules
- Rich binding structures using scope graphs
- Unification based inference

## Limitations


- Restricted to the domain-specific (= restricted) model
  - ▶ Not all name binding patterns in the wild can be expressed
- Hypothesis is that all sensible patterns are expressible

# Predicate Rules


## rules

```
programOK : Module  
  
programOK(Mod(e)) :- {s T}  
  new s, init(s),  
  typeOfExp(s, e) == T.
```

# Predicate Rules

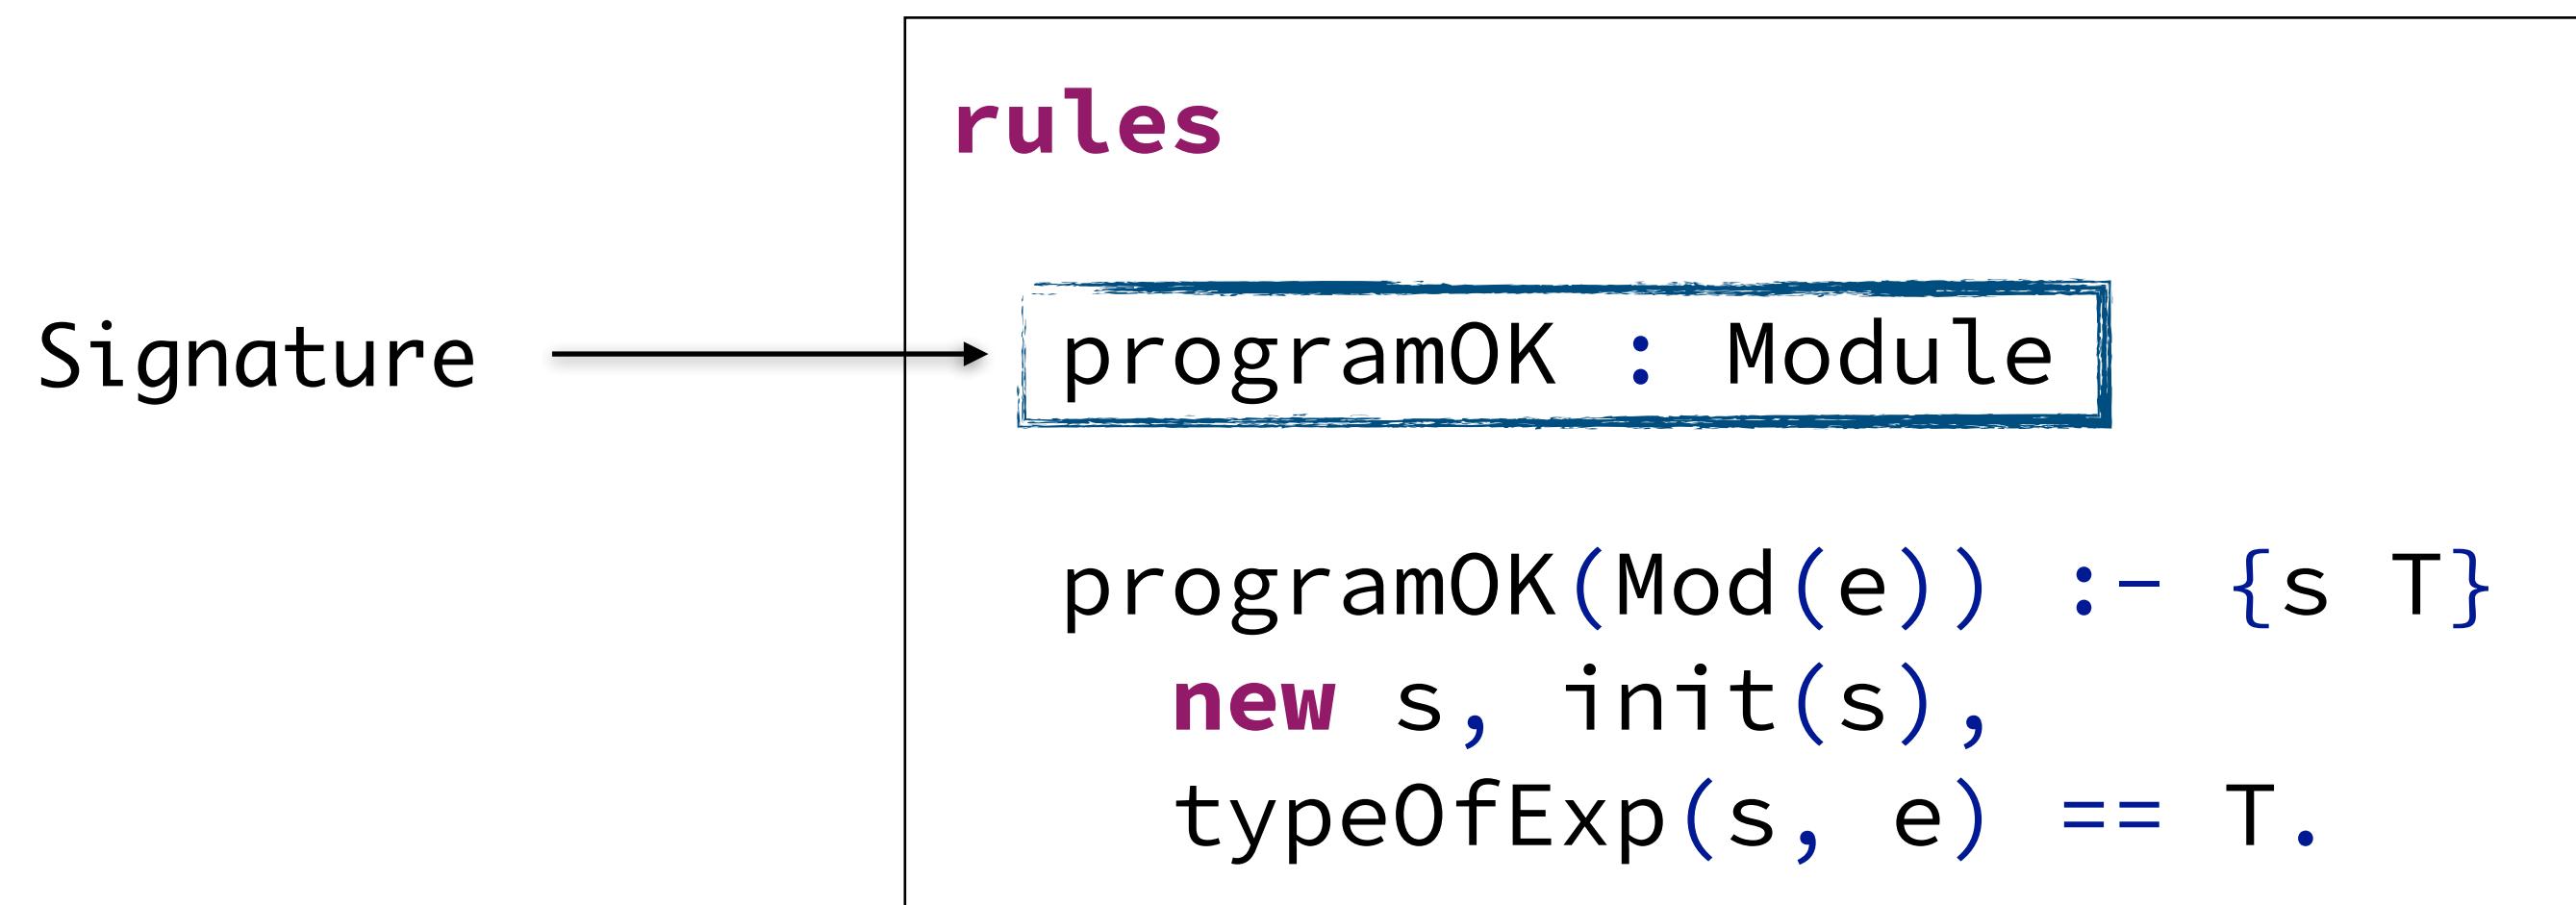

# Predicate Rules

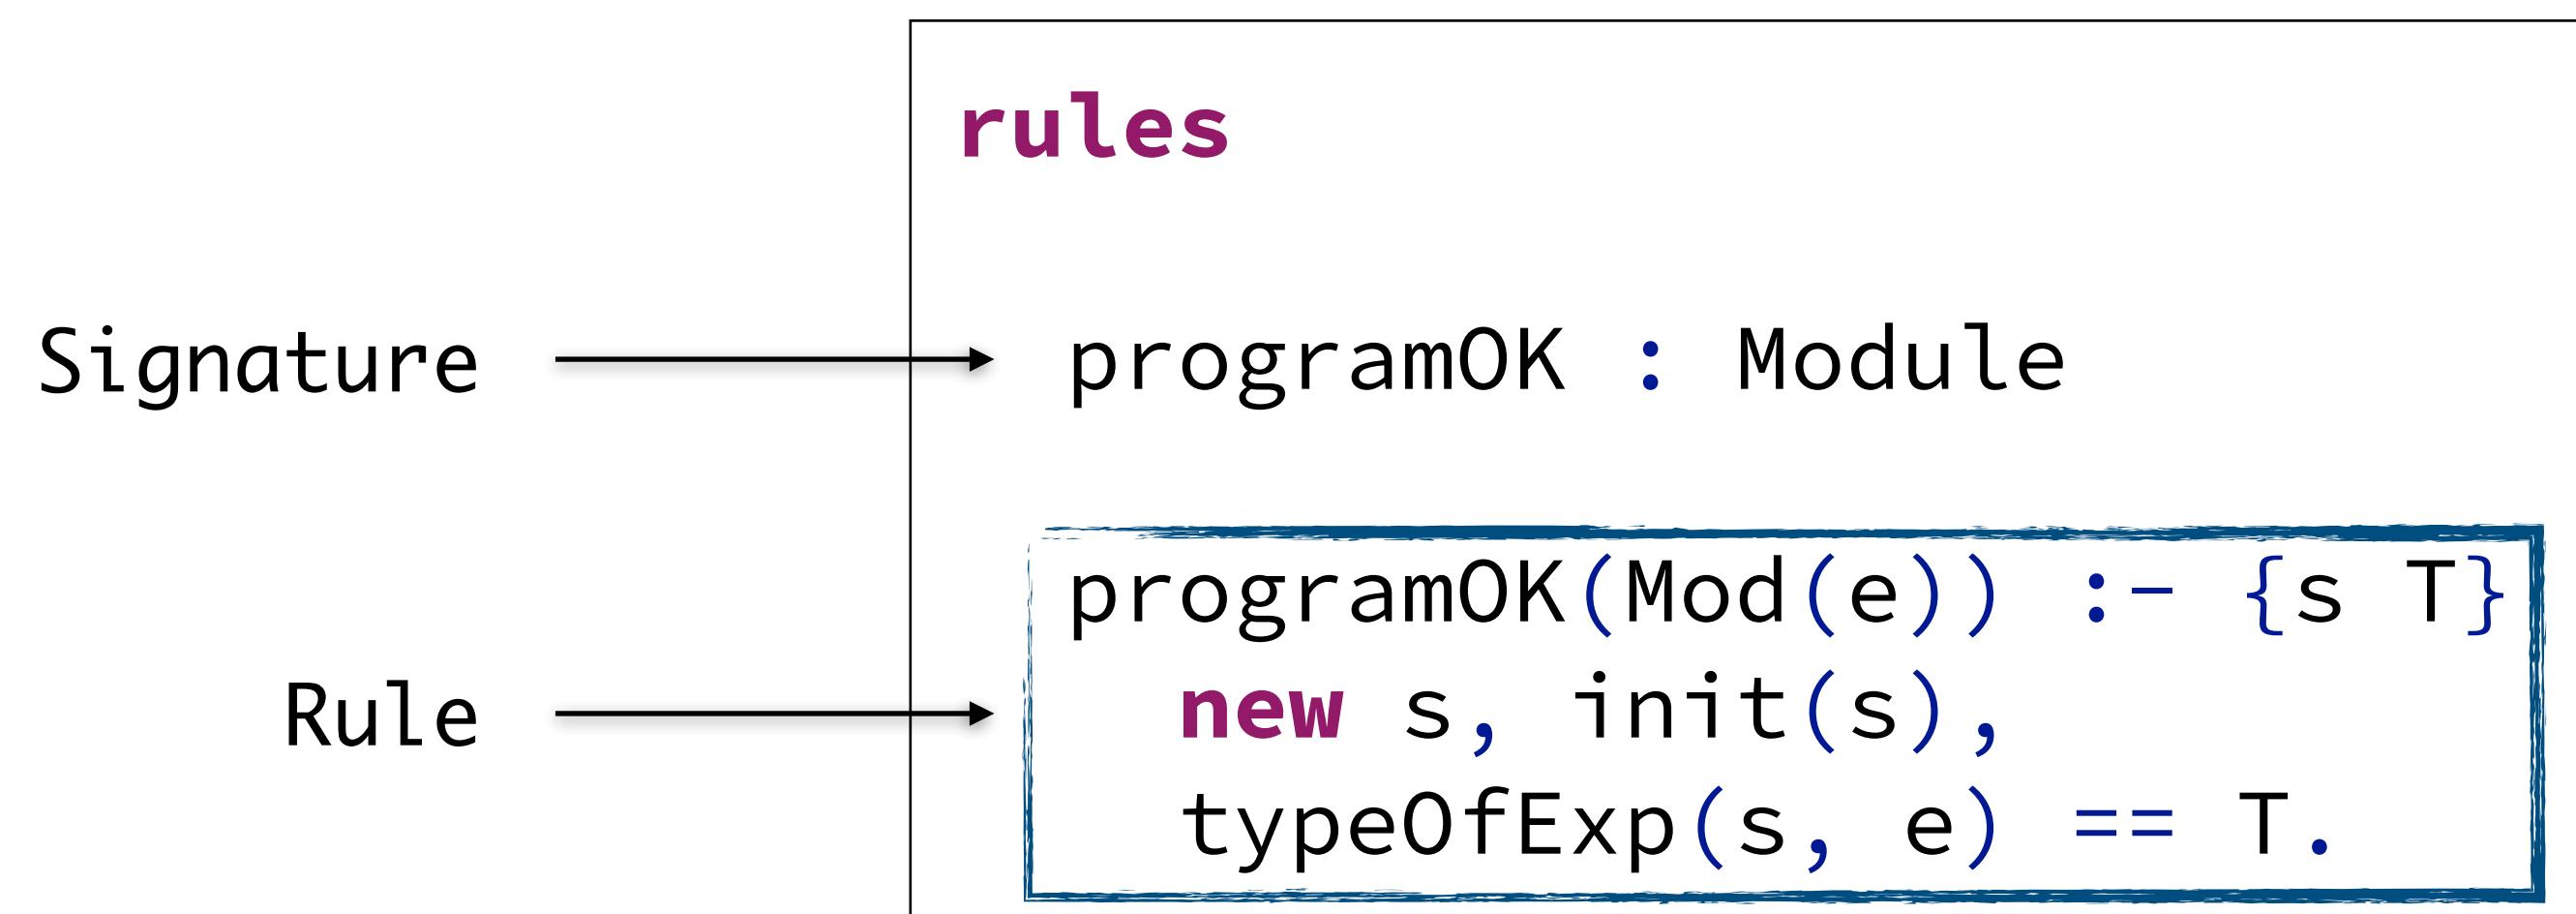


# Predicate Rules


## rules

```
programOK : Module  
  
programOK(Mod(e)) :- {s T}  
  new s, init(s),  
  typeOfExp(s, e) == T.
```


# Predicate Rules

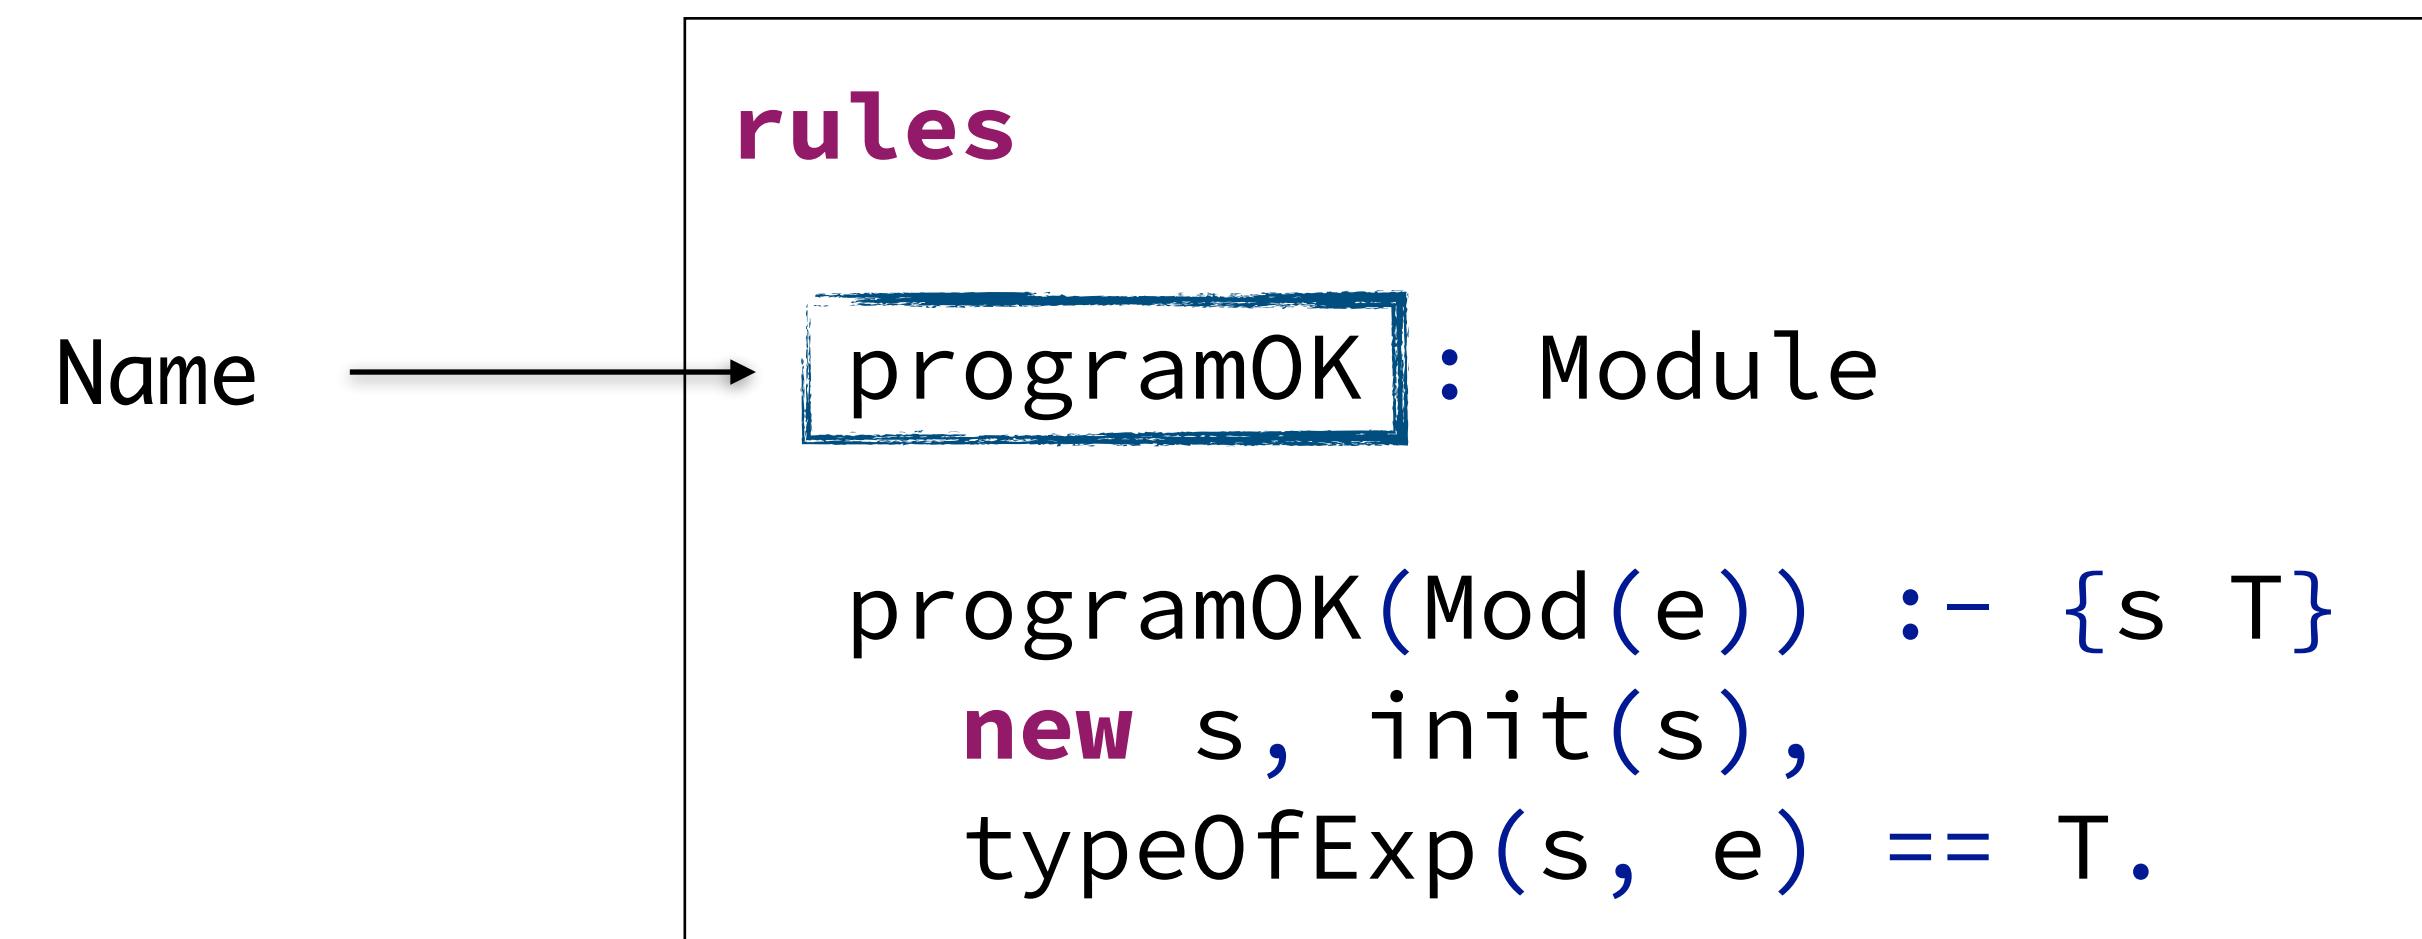


# Predicate Rules

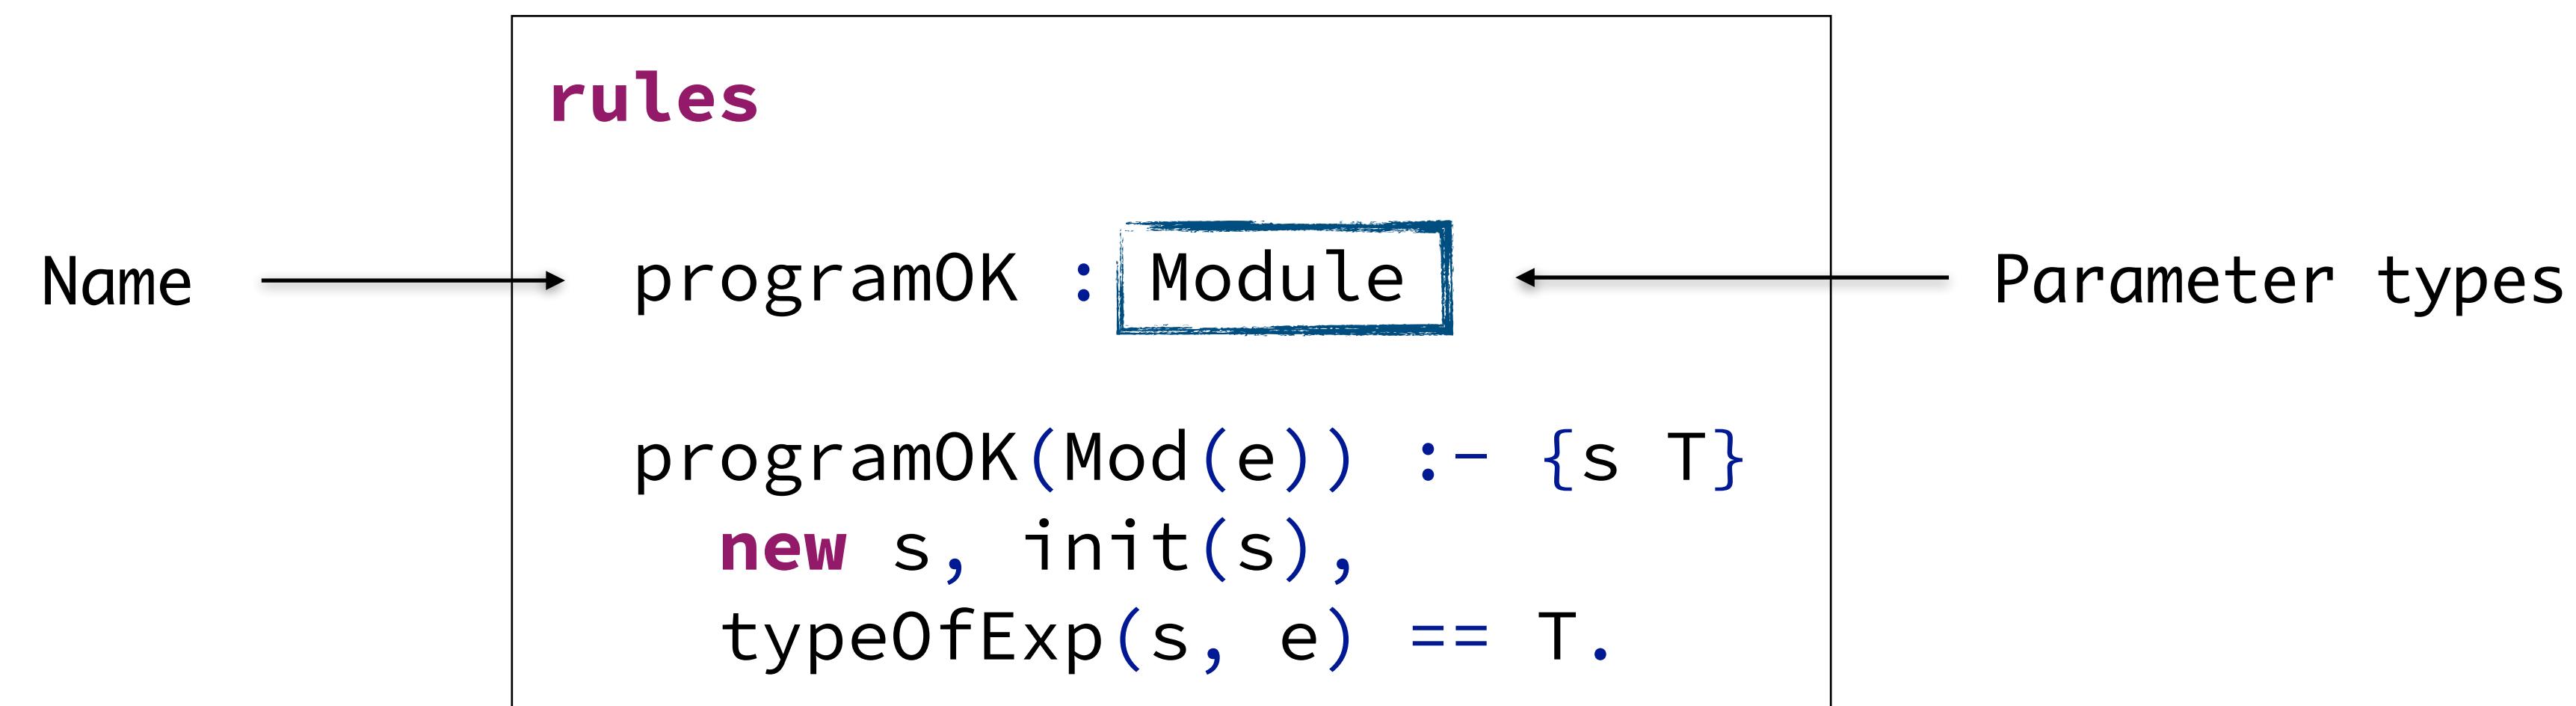

# Predicate Rules

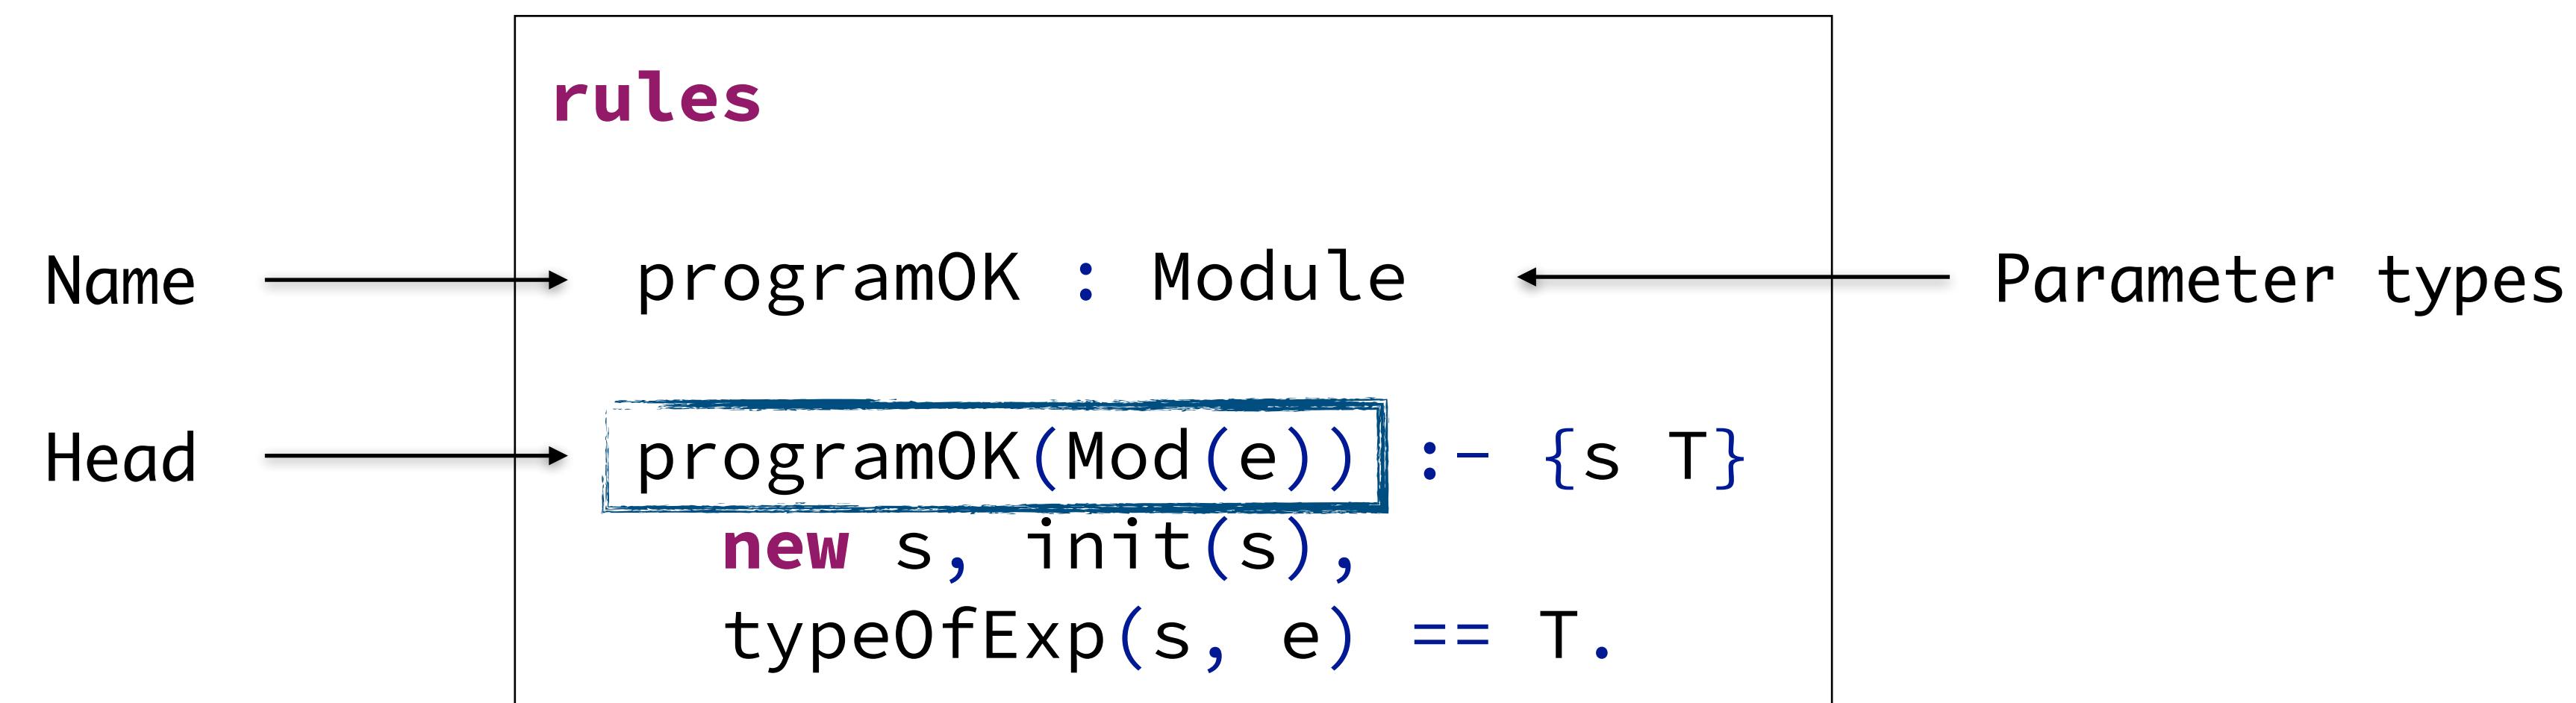

# Predicate Rules

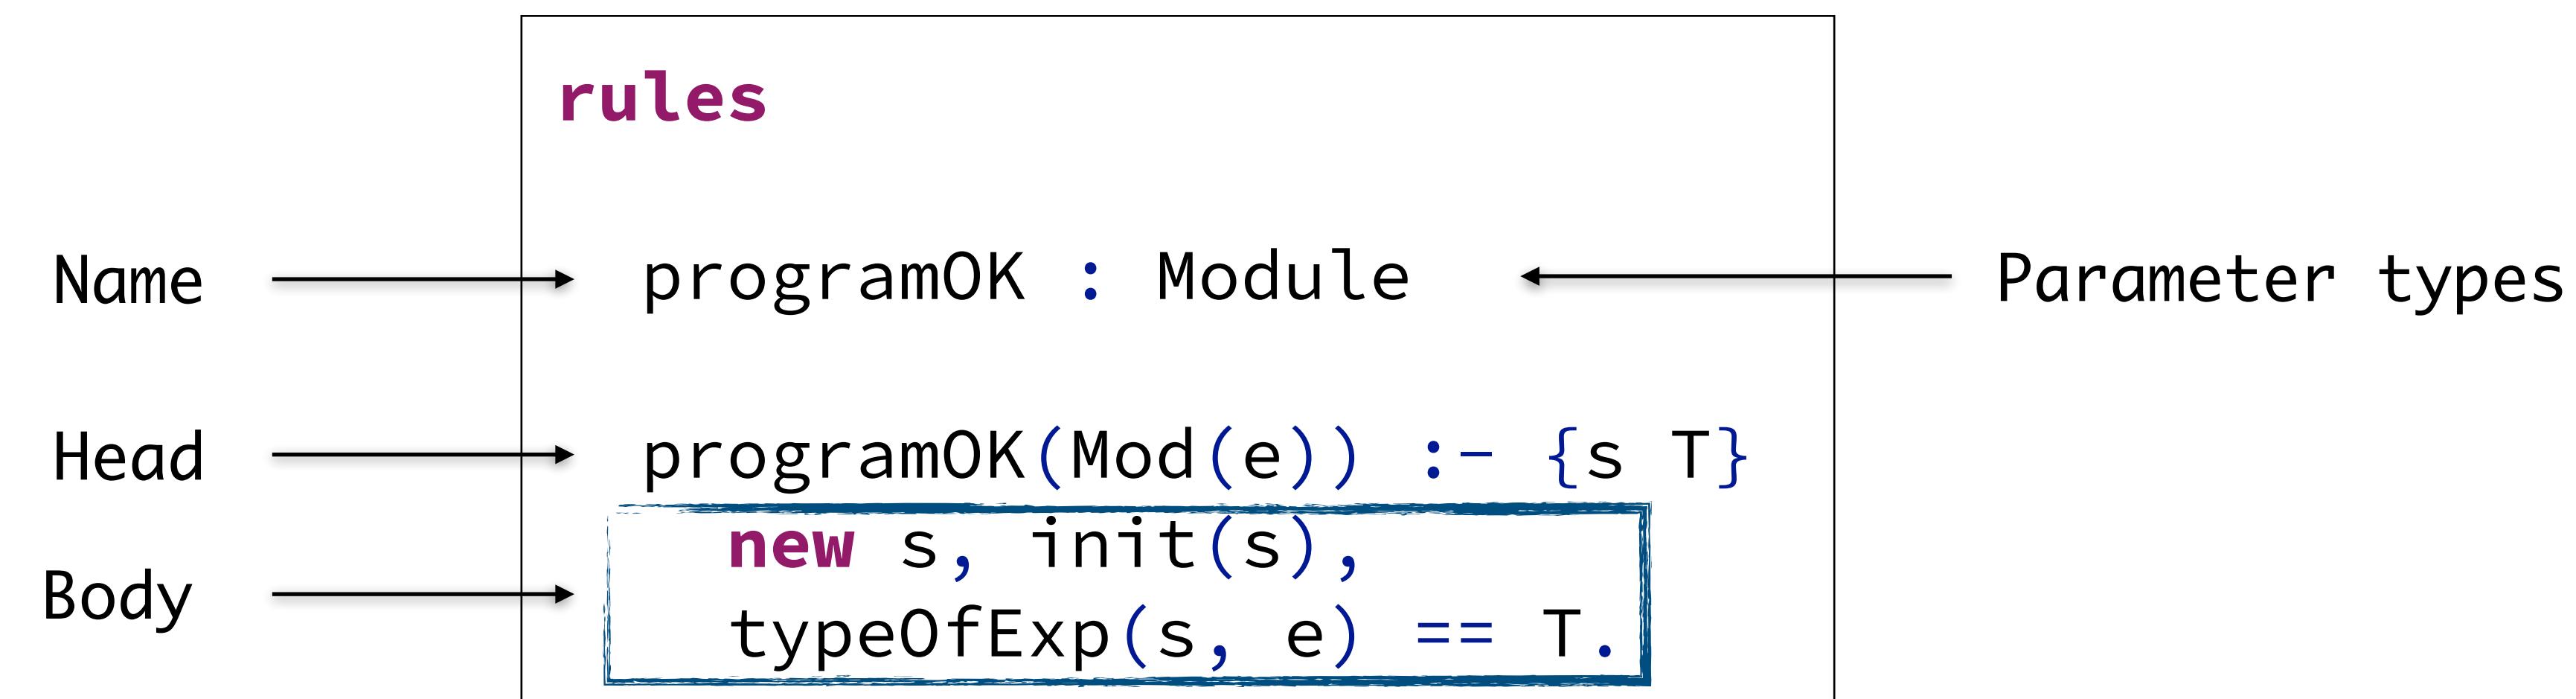

# Predicate Rules

## rules

```
programOK : Module  
  
programOK(Mod(e)) :- {s T}  
  new s, init(s),  
  typeOfExp(s, e) == T.
```

# Predicate Rules

## rules

programOK : Module

programOK(**Mod(e)**) :- {s T}  
**new** s, init(s),  
typeOfExp(s, e) == T.

Match

# Predicate Rules

## rules

programOK : Module

programOK(Mod(e)) :- {s T}

**new s, init(s),  
typeOfExp(s, e) == T**

Match

Premises

# Predicate Rules

## rules

```
programOK : Module  
  
programOK(Mod(e)) :- {s T}  
  new s, init(s),  
  typeOfExp(s, e) == T.
```

# Predicate Rules

## rules

```
programOK : Module  
  
programOK(Mod(e) :- {s T}  
    new s, init(s),  
    typeOfExp(s, e) == T.
```

Match variables

# Predicate Rules

## rules

programOK : Module

programOK(Mod(e)) :- {**s T**}  
**new** s, init(s),  
typeOfExp(s, e) == T.

Match variables

Local variables

# Predicate Rules

## rules

```
programOK : Module
```

```
programOK(Mod(e)) :- {s T}  
  new s, init(s),  
  typeOfExp(s, e) == T.
```

Match variables

Local variables

Meta variables are the variables of the *meta language* (Statix),  
not the variables of the *object language* (Tiger)!

# How to interpret these rules?

## rules

```
programOK : Module  
  
programOK(Mod(e)) :- {s T}  
  new s, init(s),  
  typeOfExp(s, e) == T.
```

# How to interpret these rules?

## rules

```
programOK : Module  
  
programOK(Mod(e)) :- {s T}  
    new s, init(s),  
    typeOfExp(s, e) == T.
```

## What are they?

- Logical predicates
- Not functions, no implied input/output or evaluation order
- The predicate holds when the premises hold

# How to interpret these rules?

## rules

```
programOK : Module  
  
programOK(Mod(e)) :- {s T}  
    new s, init(s),  
    typeOfExp(s, e) == T.
```

## What are they?

- Logical predicates
- Not functions, no implied input/output or evaluation order
- The predicate holds when the premises hold

## Possible interpretations

- Type checking = solve `programOK(p)` with p as input
- Program synthesis = solve `programOK(p)` with p as output

# How to interpret these rules?

## rules

```
programOK : Module  
  
programOK(Mod(e)) :- {s T}  
    new s, init(s),  
    typeOfExp(s, e) == T.
```

Next week we discuss this more formally!

## What are they?

- Logical predicates
- Not functions, no implied input/output or evaluation order
- The predicate holds when the premises hold

## Possible interpretations

- Type checking = solve `programOK(p)` with p as input
- Program synthesis = solve `programOK(p)` with p as output

# Functional Style Rules

## rules

```
typeOfExp  : scope * Exp -> TYPE  
  
typeOfExp(s, Eq(e1, e2)) = INT() :- {T S}  
    typeOfExp(s, e1) == T,  
    typeOfExp(s, e2) == S,  
    equitype(T, S).
```

# Functional Style Rules

## rules

typeOfExp : **scope** \* Exp  $\rightarrow$  TYPE

Functional signature

```
typeOfExp(s, Eq(e1, e2)) = INT() :- {T S}  
typeOfExp(s, e1) == T,  
typeOfExp(s, e2) == S,  
equitype(T, S).
```

# Functional Style Rules


## rules

```
typeOfExp  : scope * Exp -> TYPE
typeOfExp(s, Eq(e1, e2)) = INT() :- {T S}
    typeOfExp(s, e1) == T,
    typeOfExp(s, e2) == S,
    equitype(T, S).
```


Functional signature

Functional rule

# Functional Style Rules

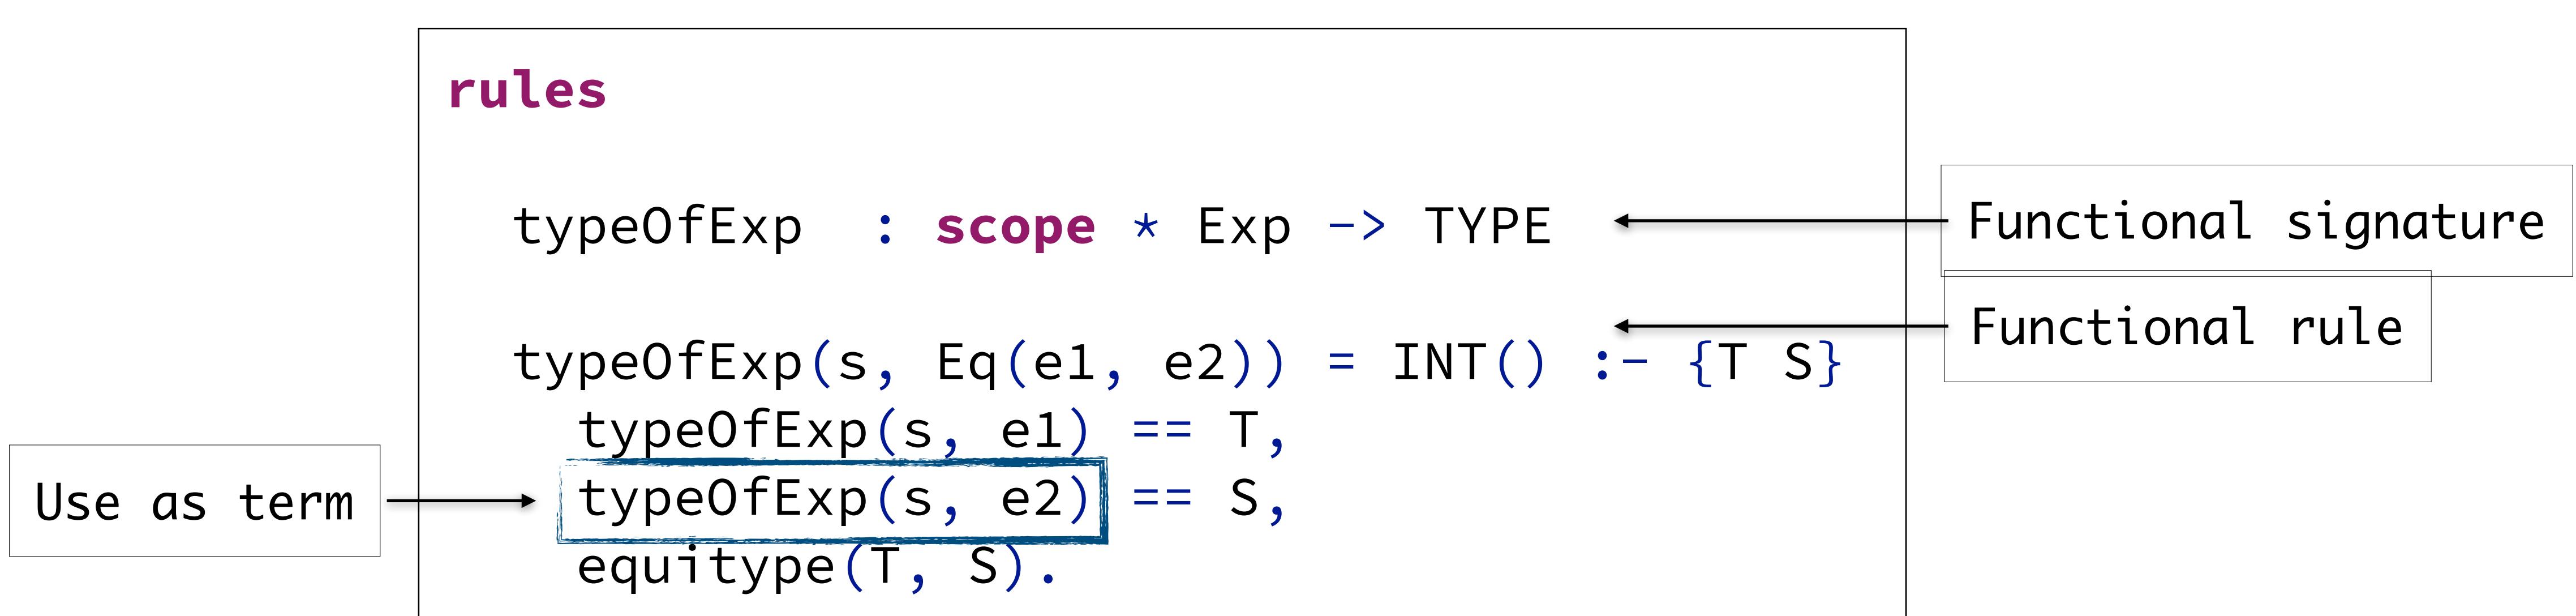

# Functional Style Rules

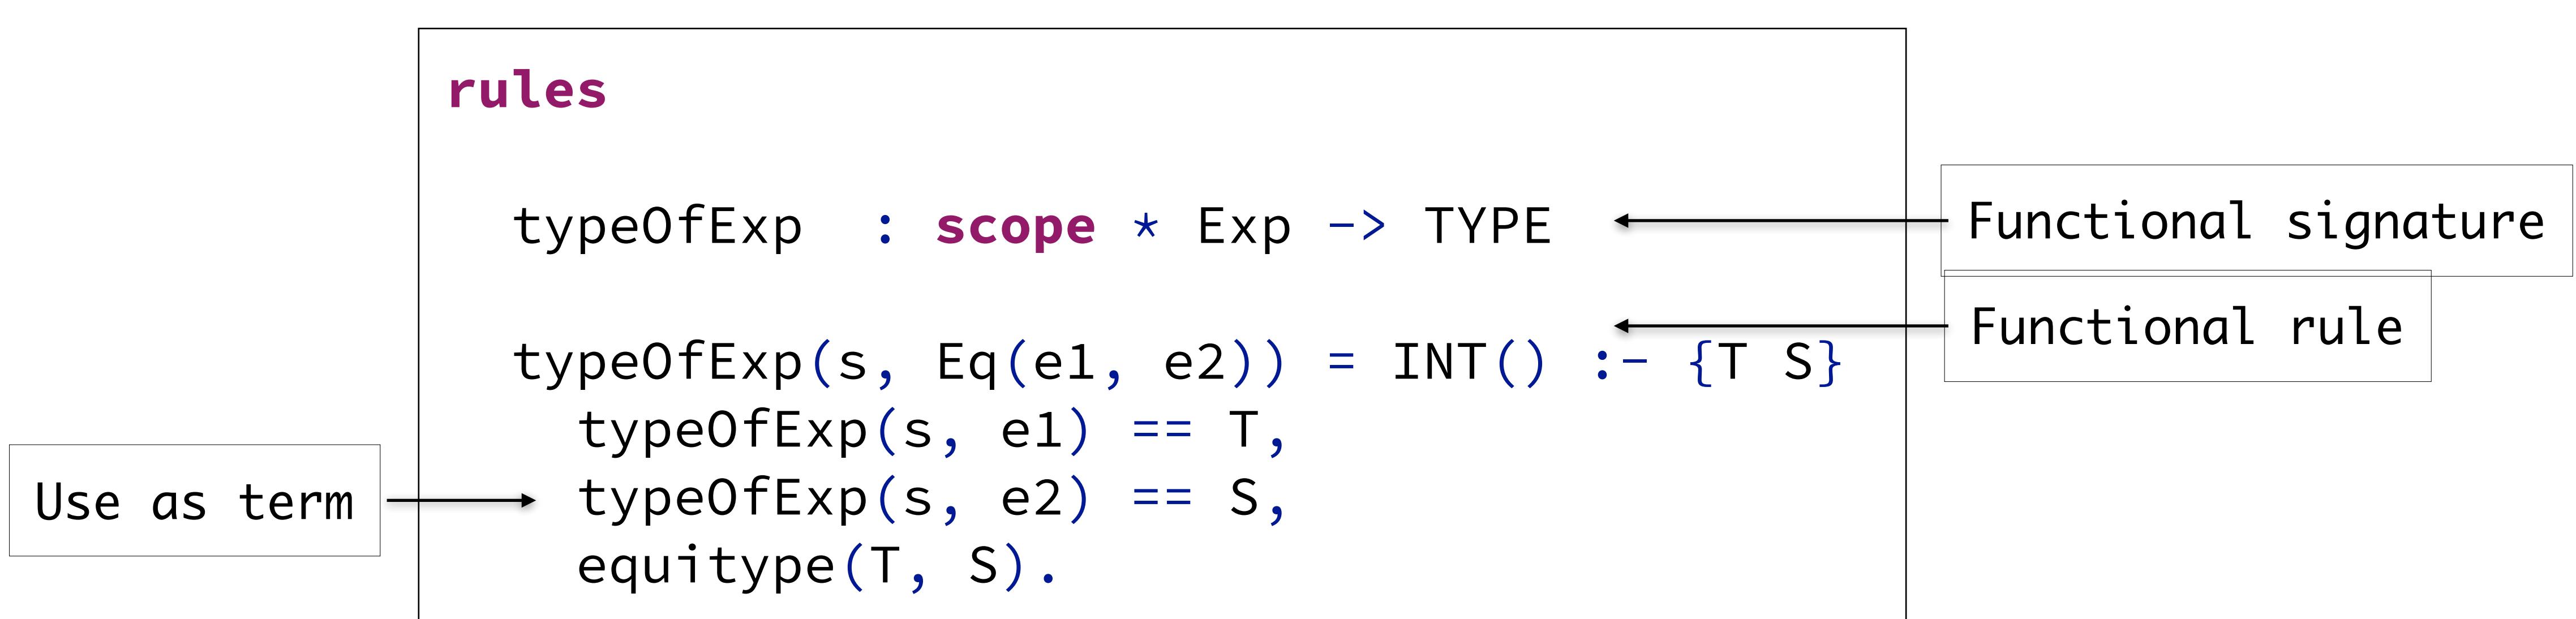

Functional rules are equivalent to regular predicates,  
but they can improve readability of the specification

# Lifting Rules to Lists

rules

typeOfExp : scope \* Exp -> TYPE

typeOfExps maps typeOfExp(\*, list(\*)) = list(\*)

# Lifting Rules to Lists

rules

typeOfExp : scope \* Exp -> TYPE


typeOfExps maps typeOfExp(\*, list(\*)) = list(\*)

# Lifting Rules to Lists

rules

```
typeOfExp  : scope * Exp -> TYPE
```

```
typeOfExps maps typeOfExp(*, list(*)) = list(*)
```

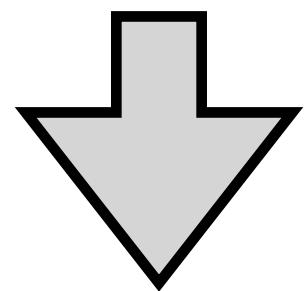

rules

```
typeOfExps : scope * list(Exp) * list(TYPE)
```

```
typeOfExps(_, [], []).
```


```
typeOfExps(x_1, [x_2|xs_2], [y_1|ys_1]) :-  
    typeOfExp(x_1, x_2) == y_1,  
    typeOfExps(x_1, xs_2) == ys_1.
```

# Tiger in Statix

# Variable Declarations and References

```
let           s0
  var x1 : int := 1
in            s1
  x2 + 1
end
```

```
Let(
  [VarDec("x", INT(), Int("1"))]
, [Plus(Var("x"), Int("1"))]
)
```

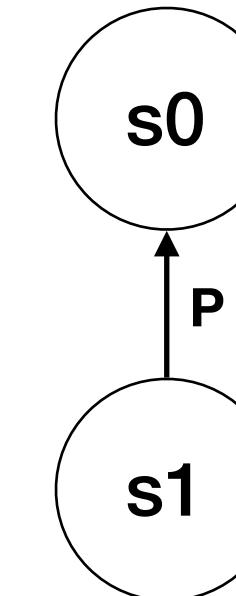


```
signature
relations
  typeOfDecl : occurrence -> TYPE // :
namespaces
  Var : string // Var{x}
name-resolution
  labels P
  resolve Var filter P* min $ < P
```

# Variable Declarations and References

```
let           s0
  var x1 : int := 1
in           s1
  x2 + 1
end
```

```
Let(
  [VarDec("x", INT(), Int("1"))]
, [Plus(Var("x"), Int("1"))]
)
```

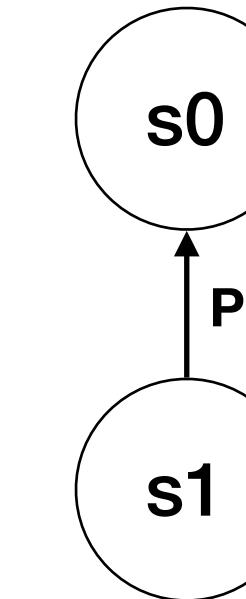

```
dec0k(s, s_outer, VarDec(x, t, e)) :- {T S}
  type0fType(s_outer, t) == T,
  type0fExp(s_outer, e) == S,
  subtype(S, T),
  declareVar(s, x, T).

declareVar(s, x, T) :-
  s -> Var{x} with type0fDecl T,
  // declaration is distinct
  type0fDecl of Var{x} in s |-> [(_, _, T)].


lookupVar(s, x) = T :- {x'} @x.ref := x',
  type0fDecl of Var{x} in s |-> [(_, (Var{x'}, T))].
```

**signature**  
**relations**  
type0fDecl : **occurrence** → TYPE // :  
**namespaces**  
Var : string // Var{x}  
**name-resolution**  
**labels** P  
**resolve** Var **filter** P\* **min** \$ < P

# Variable Declarations and References

```
let          s0
  var x1 : int := 1
in          s1
  x2 + 1
end
```

```
Let(
  [VarDec("x", INT(), Int("1"))]
, [Plus(Var("x"), Int("1"))]
)
```

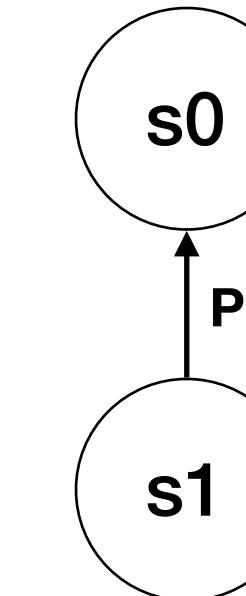

```
dec0k(s, s_outer, VarDec(x, t, e)) :- {T S}
  type0fType(s_outer, t) == T,
  type0fExp(s_outer, e) == S,
  subtype(S, T),
  declareVar(s, x, T).

declareVar(s, x, T) :-
  s -> Var{x} with type0fDecl T,
  // declaration is distinct
  type0fDecl of Var{x} in s !-> [(_, _, T)].


lookupVar(s, x) = T :- {x'} @x.ref := x',
  type0fDecl of Var{x} in s !-> [(_, (Var{x'}, T))].
```

**signature**  
**relations**  
type0fDecl : **occurrence** → TYPE // :  
**namespaces**  
Var : string // Var{x}  
**name-resolution**  
**labels** P  
**resolve** Var **filter** P\* **min** \$ < P

# Variable Declarations and References

```
let          s0
  var x1 : int := 1
in          s1
  x2 + 1
end
```

```
Let(
  [VarDec("x", INT(), Int("1"))]
, [Plus(Var("x"), Int("1"))]
)
```

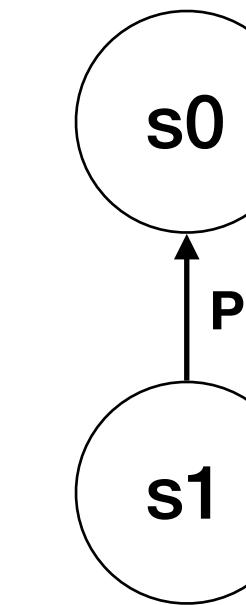

```
dec0k(s, s_outer, VarDec(x, t, e)) :- {T S}
  type0fType(s_outer, t) == T,
  type0fExp(s_outer, e) == S,
  subtype(S, T),
  declareVar(s, x, T).

declareVar(s, x, T) :-
  s -> Var{x} with type0fDecl T,
  // declaration is distinct
  type0fDecl of Var{x} in s !-> [(_, _, T)].


lookupVar(s, x) = T :- {x'} @x.ref := x',
  type0fDecl of Var{x} in s !-> [(_, (Var{x'}, T))].
```

**signature**  
**relations**  
type0fDecl : **occurrence** → TYPE // :  
**namespaces**  
Var : string // Var{x}  
**name-resolution**  
**labels** P  
**resolve** Var **filter** P\* **min** \$ < P

# Variable Declarations and References

```
let          s0
  var x1 : int := 1
in          s1
  x2 + 1
end
```

```
Let(
  [VarDec("x", INT(), Int("1"))]
, [Plus(Var("x"), Int("1"))]
)
```

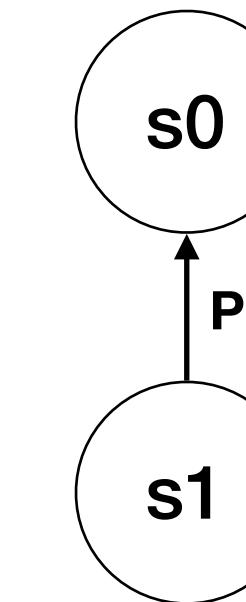

```
dec0k(s, s_outer, VarDec(x, t, e)) :- {T S}
  typeOfType(s_outer, t) == T,
  typeOfExp(s_outer, e) == S,
  subtype(S, T),
  declareVar(s, x, T).

declareVar(s, x, T) :-
  s -> Var{x} with typeOfDecl T,
  // declaration is distinct
  typeOfDecl of Var{x} in s !-> [(_, _, T)].


lookupVar(s, x) = T :- {x'} @x.ref := x',
  typeOfDecl of Var{x} in s !-> [(_, (Var{x'}, T))].
```

**signature**  
**relations**  
typeOfDecl : **occurrence** → TYPE // :  
**namespaces**  
Var : string // Var{x}  
**name-resolution**  
**labels** P  
**resolve** Var **filter** P\* **min** \$ < P

# Variable Declarations and References

```
let          s0
  var x1 : int := 1
in          s1
  x2 + 1
end
```

```
Let(
  [VarDec("x", INT(), Int("1"))]
, [Plus(Var("x"), Int("1"))]
)
```

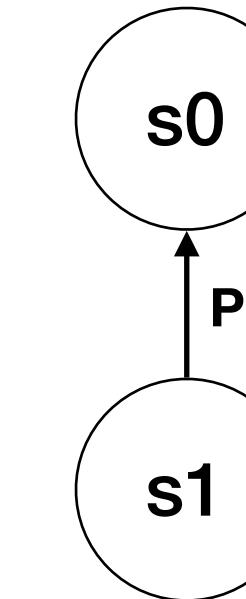

```
dec0k(s, s_outer, VarDec(x, t, e)) :- {T S}
  type0fType(s_outer, t) == T,
  type0fExp(s_outer, e) == S,
  subtype(S, T),
  declareVar(s, x, T).
```

```
declareVar(s, x, T) :-
  s -> Var{x} with type0fDecl T,
  // declaration is distinct
  type0fDecl of Var{x} in s !-> [(_, _, T)].
```


```
lookupVar(s, x) = T :- {x'} @x.ref := x',
  type0fDecl of Var{x} in s !-> [(_, (Var{x'}, T))].
```

**signature**  
**relations**  
type0fDecl : **occurrence** → TYPE // :  
**namespaces**  
Var : string // Var{x}  
**name-resolution**  
**labels** P  
**resolve** Var **filter** P\* **min** \$ < P

# Variable Declarations and References

```
let          s0
  var x1 : int := 1
in          s1
  x2 + 1
end
```

```
Let(
  [VarDec("x", INT(), Int("1"))]
, [Plus(Var("x"), Int("1"))]
)
```

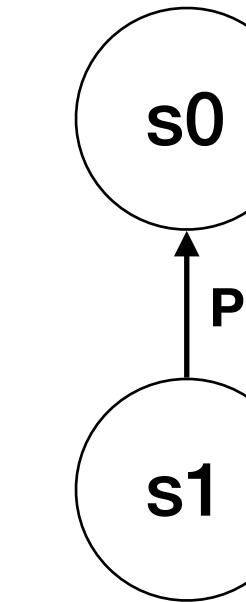

```
dec0k(s, s_outer, VarDec(x, t, e)) :- {T S}
  type0fType(s_outer, t) == T,
  type0fExp(s_outer, e) == S,
  subtype(S, T),
  declareVar(s, x, T).

declareVar(s, x, T) :-
  s -> Var{x} with type0fDecl T,
  // declaration is distinct
  type0fDecl of Var{x} in s !-> [(_, _, T)].


lookupVar(s, x) = T :- {x'} @x.ref := x',
  type0fDecl of Var{x} in s !-> [(_, (Var{x'}, T))].
```

**signature**  
**relations**  
type0fDecl : **occurrence** → TYPE // :  
**namespaces**  
Var : string // Var{x}  
**name-resolution**  
**labels** P  
**resolve** Var **filter** P\* **min** \$ < P

# Variable Declarations and References

```
let          s0
  var x1 : int := 1
in          s1
  x2 + 1
end
```

```
Let(
  [VarDec("x", INT(), Int("1"))]
, [Plus(Var("x"), Int("1"))]
)
```

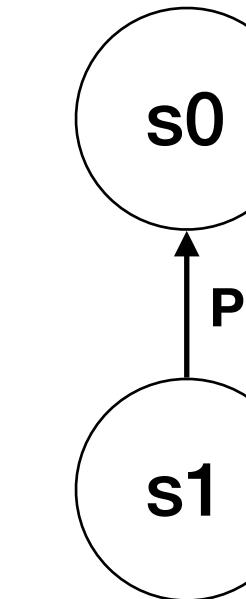

```
dec0k(s, s_outer, VarDec(x, t, e)) :- {T S}
  type0fType(s_outer, t) == T,
  type0fExp(s_outer, e) == S,
  subtype(S, T),
  declareVar(s, x, T).

declareVar(s, x, T) :-
  s -> Var{x} with type0fDecl T,
  // declaration is distinct
  type0fDecl of Var{x} in s |-> [(_, _, T)].


lookupVar(s, x) = T :- {x'} @x.ref := x',
  type0fDecl of Var{x} in s |-> [(_, (Var{x'}, T))].
```

**signature**  
**relations**  
type0fDecl : **occurrence** → TYPE // :  
**namespaces**  
Var : string // Var{x}  
**name-resolution**  
**labels** P  
**resolve** Var **filter** P\* min \$ < P

# Variable Declarations and References

```
let           s0
  var x1 : int := 1
in           s1
  x2 + 1
end
```

```
Let(
  [VarDec("x", INT(), Int("1"))]
, [Plus(Var("x"), Int("1"))]
)
```

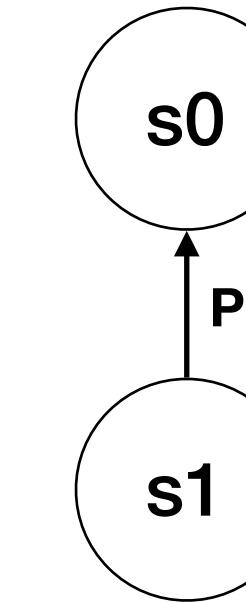

```
dec0k(s, s_outer, VarDec(x, t, e)) :- {T S}
  type0fType(s_outer, t) == T,
  type0fExp(s_outer, e) == S,
  subtype(S, T),
  declareVar(s, x, T).

declareVar(s, x, T) :-
  s -> Var{x} with type0fDecl T,
  // declaration is distinct
  type0fDecl of Var{x} in s |-> [(_, _, T)].

lookupVar(s, x) = T :- {x'} @x.ref := x',
  type0fDecl of Var{x} in s |-> [(_, (Var{x'}, T))].
```

**signature**

**relations**

```
type0fDecl : occurrence -> TYPE // :
```

**namespaces**

```
Var : string // Var{x}
```

**name-resolution**

**labels** P

**resolve** Var filter P\* min \$ < P


# Variable Declarations and References

```

let           s0
  var x1 : int := 1
in           s1
  x2 + 1
end
  
```

```

Let(
  [VarDec("x", INT(), Int("1"))]
, [Plus(Var("x"), Int("1"))]
)
  
```

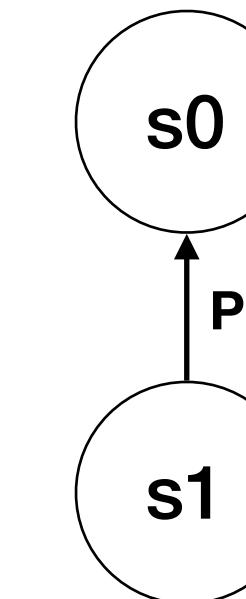

```

dec0k(s, s_outer, VarDec(x, t, e)) :- {T S}
  type0fType(s_outer, t) == T,
  type0fExp(s_outer, e) == S,
  subtype(S, T),
  declareVar(s, x, T).

declareVar(s, x, T) :-
  s -> Var{x} with type0fDecl T,
  // declaration is distinct
  type0fDecl of Var{x} in s I-> [(_, _, T)].

  
```

```

lookupVar(s, x) = T :- {x'} @x.ref := x',
  type0fDecl of Var{x} in s I-> [(_, (Var{x'}, T))].
  
```

**signature**  
**relations**


```

type0fDecl : occurrence -> TYPE // :
  namespaces
    Var : string // Var{x}
  name-resolution
    labels P
    resolve Var filter P* min $ < P
  
```

# Variable Declarations and References

```
let           s0
  var x1 : int := 1
in           s1
  x2 + 1
end
```

```
Let(
  [VarDec("x", INT(), Int("1"))]
, [Plus(Var("x"), Int("1"))]
)
```

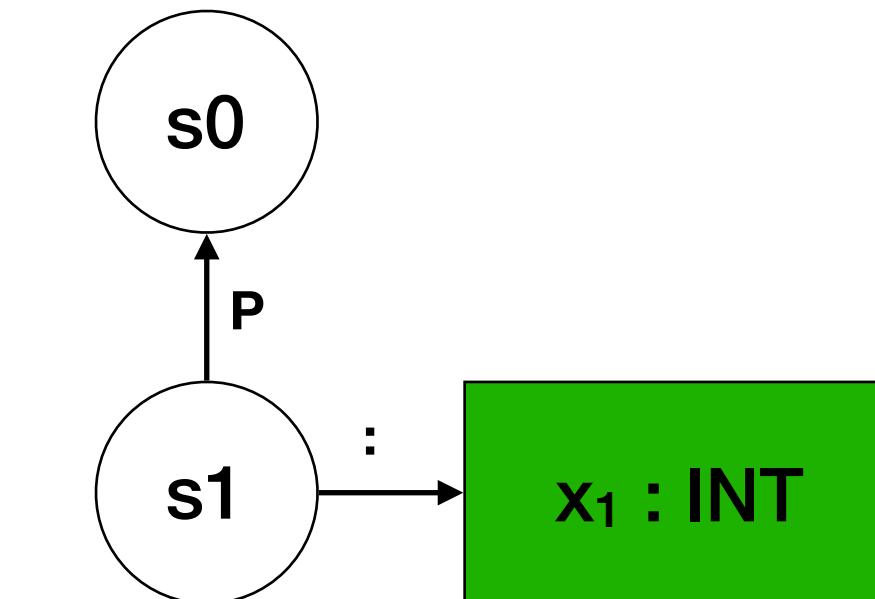

```
dec0k(s, s_outer, VarDec(x, t, e)) :- {T S}
  type0fType(s_outer, t) == T,
  type0fExp(s_outer, e) == S,
  subtype(S, T),
  declareVar(s, x, T).

declareVar(s, x, T) :-
  s -> Var{x} with type0fDecl T,
  // declaration is distinct
  type0fDecl of Var{x} in s |-> [(_, _, T)].

lookupVar(s, x) = T :- {x'} @x.ref := x',
  type0fDecl of Var{x} in s |-> [(_, (Var{x'}, T))].
```

**signature**  
**relations**

```
type0fDecl : occurrence -> TYPE // :
namespaces
```

**Var** : string // Var{x}

**name-resolution**

**labels** P

**resolve** Var filter P\* min \$ < P


# Variable Declarations and References

```

let           s0
  var x1 : int := 1
in           s1
  x2 + 1
end
  
```

```

Let(
  [VarDec("x", INT(), Int("1"))]
, [Plus(Var("x"), Int("1"))]
)
  
```

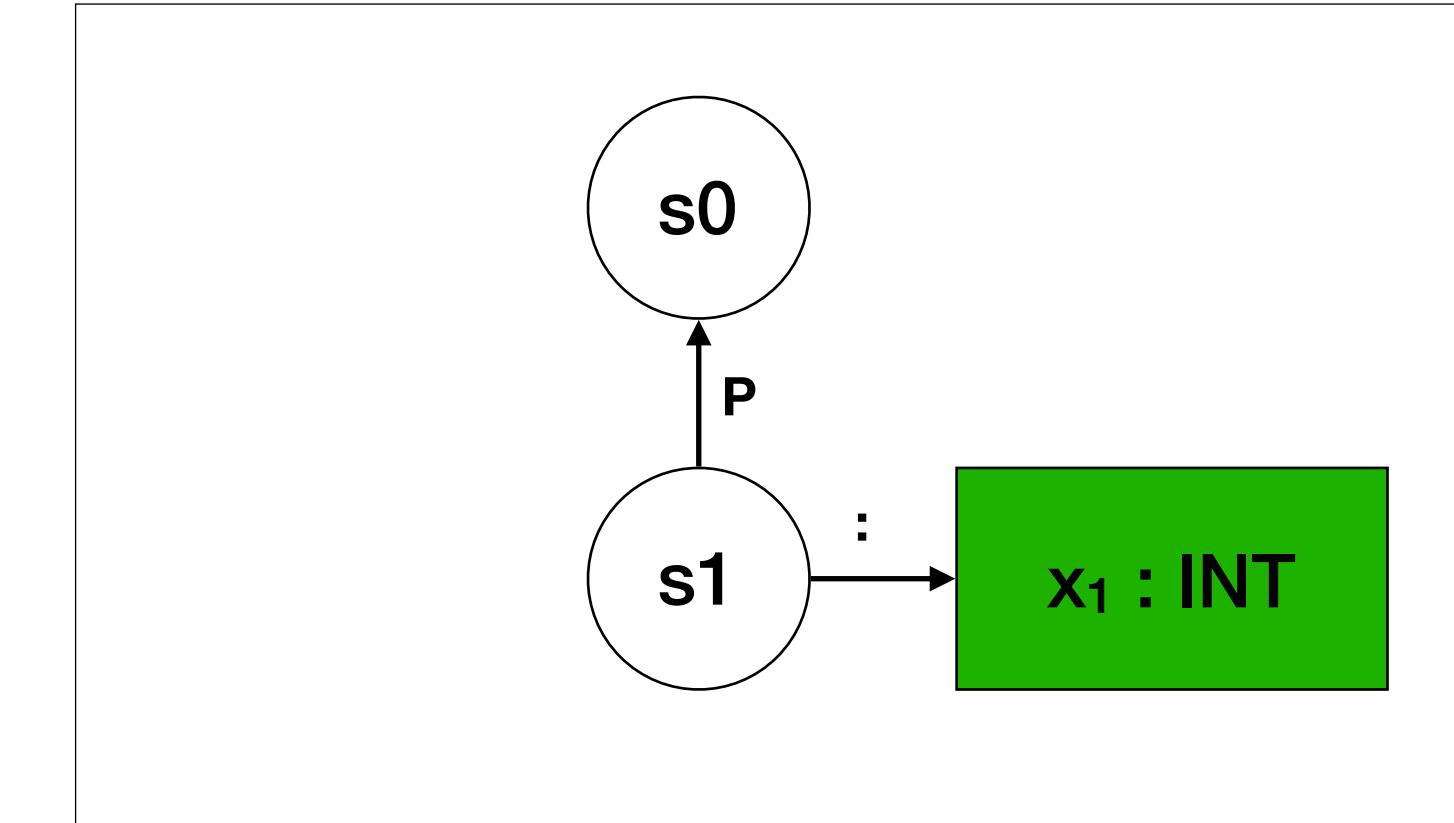

```

dec0k(s, s_outer, VarDec(x, t, e)) :- {T S}
  type0fType(s_outer, t) == T,
  type0fExp(s_outer, e) == S,
  subtype(S, T),
  declareVar(s, x, T).

declareVar(s, x, T) :-
  s -> Var{x} with type0fDecl T,
  // declaration is distinct
  type0fDecl of Var{x} in s !-> [(_, _, T)].

lookupVar(s, x) = T :- {x'} @x.ref := x',
  type0fDecl of Var{x} in s !-> [(_, (Var{x'}, T))].
  
```

**signature**  
**relations**

```

type0fDecl : occurrence -> TYPE // :
namespaces
  Var : string // Var{x}
name-resolution
  labels P
  resolve Var filter P* min $ < P
  
```


# Variable Declarations and References

```

let           s0
  var x1 : int := 1
in           s1
  x2 + 1
end
  
```

```

Let(
  [VarDec("x", INT(), Int("1"))]
, [Plus(Var("x"), Int("1"))]
)
  
```

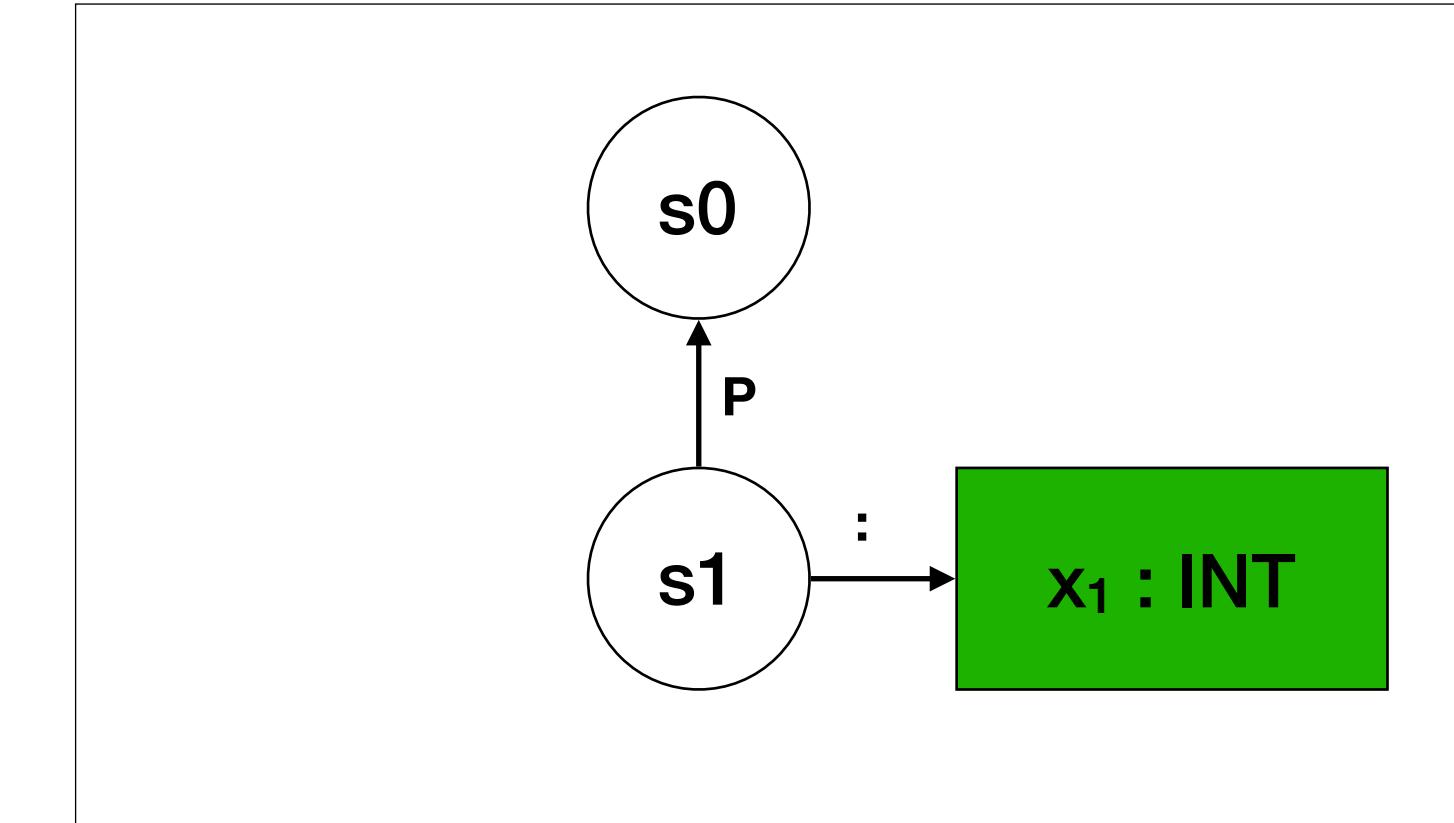

```

dec0k(s, s_outer, VarDec(x, t, e)) :- {T S}
  type0fType(s_outer, t) == T,
  type0fExp(s_outer, e) == S,
  subtype(S, T),
  declareVar(s, x, T).

declareVar(s, x, T) :-
  s -> Var{x} with type0fDecl T,
  // declaration is distinct
  type0fDecl of Var{x} in s !-> [(_, _, T)].

lookupVar(s, x) = T :- {x'} @x.ref := x',
  type0fDecl of Var{x} in s !-> [(_, (Var{x'}, T))].
  
```

**signature**  
**relations**

```

type0fDecl : occurrence -> TYPE // :
namespaces
  Var : string // Var{x}
name-resolution
  labels P
  resolve Var filter P* min $ < P
  
```


# Variable Declarations and References

```

let           s0
  var x1 : int := 1
in           s1
  x2 + 1
end
  
```

```

Let(
  [VarDec("x", INT(), Int("1"))]
, [Plus(Var("x"), Int("1"))]
)
  
```

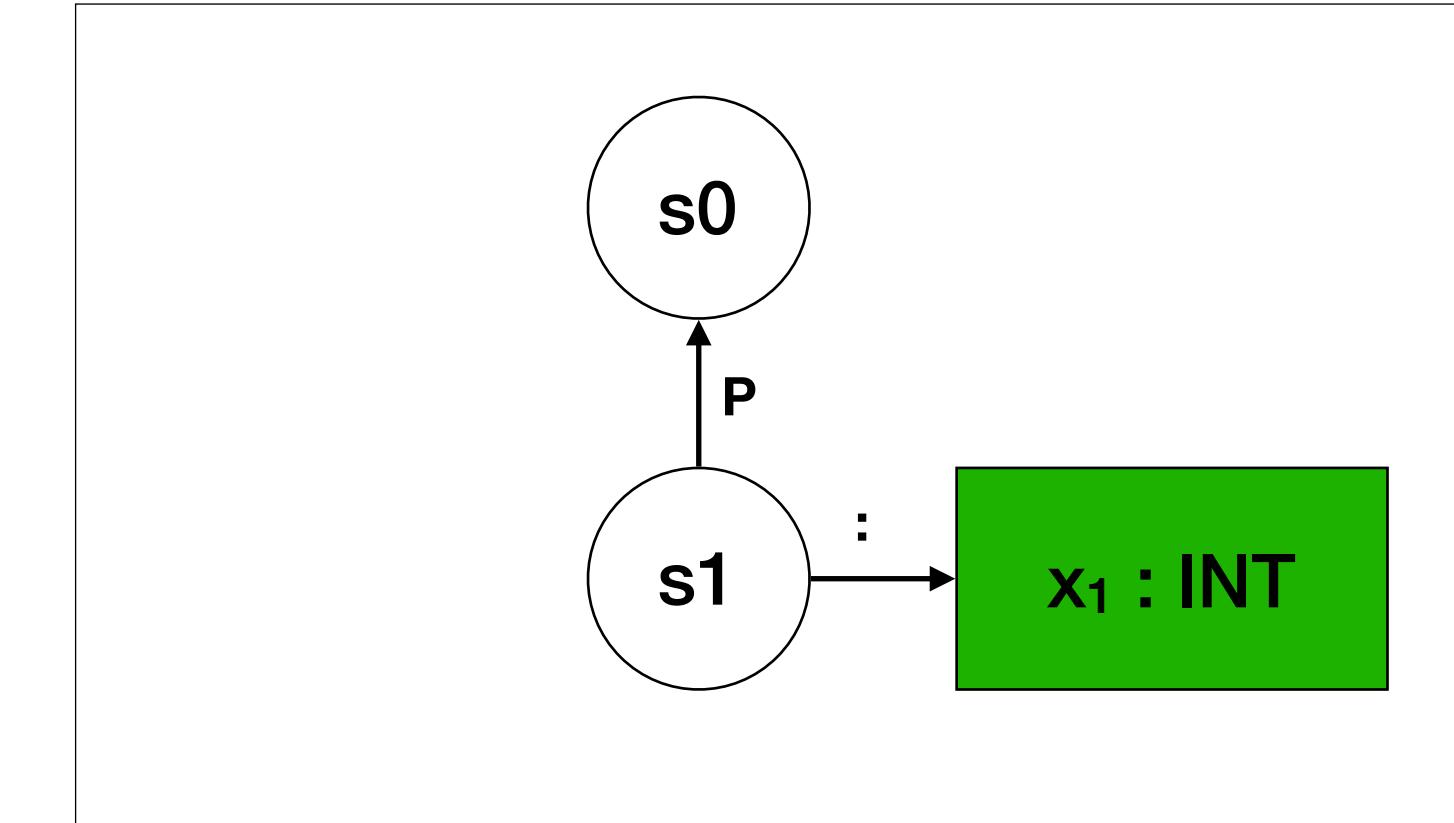

```

dec0k(s, s_outer, VarDec(x, t, e)) :- {T S}
  type0fType(s_outer, t) == T,
  type0fExp(s_outer, e) == S,
  subtype(S, T),
  declareVar(s, x, T).

declareVar(s, x, T) :-
  s -> Var{x} with type0fDecl T,
  // declaration is distinct
  type0fDecl of Var{x} in s !-> [(_, _, T)].

lookupVar(s, x) = T :- {x'} @x.ref := x',
  type0fDecl of Var{x} in s !-> [(_, (Var{x'}, T))].
  
```

**signature**  
**relations**

```

type0fDecl : occurrence -> TYPE // :
namespaces
  Var : string // Var{x}
name-resolution
  labels P
  resolve Var filter P* min $ < P
  
```


# Variable Declarations and References

```

let           s0
  var x1 : int := 1
in           s1
  x2 + 1
end
  
```

```

Let(
  [VarDec("x", INT(), Int("1"))]
, [Plus(Var("x"), Int("1"))]
)
  
```

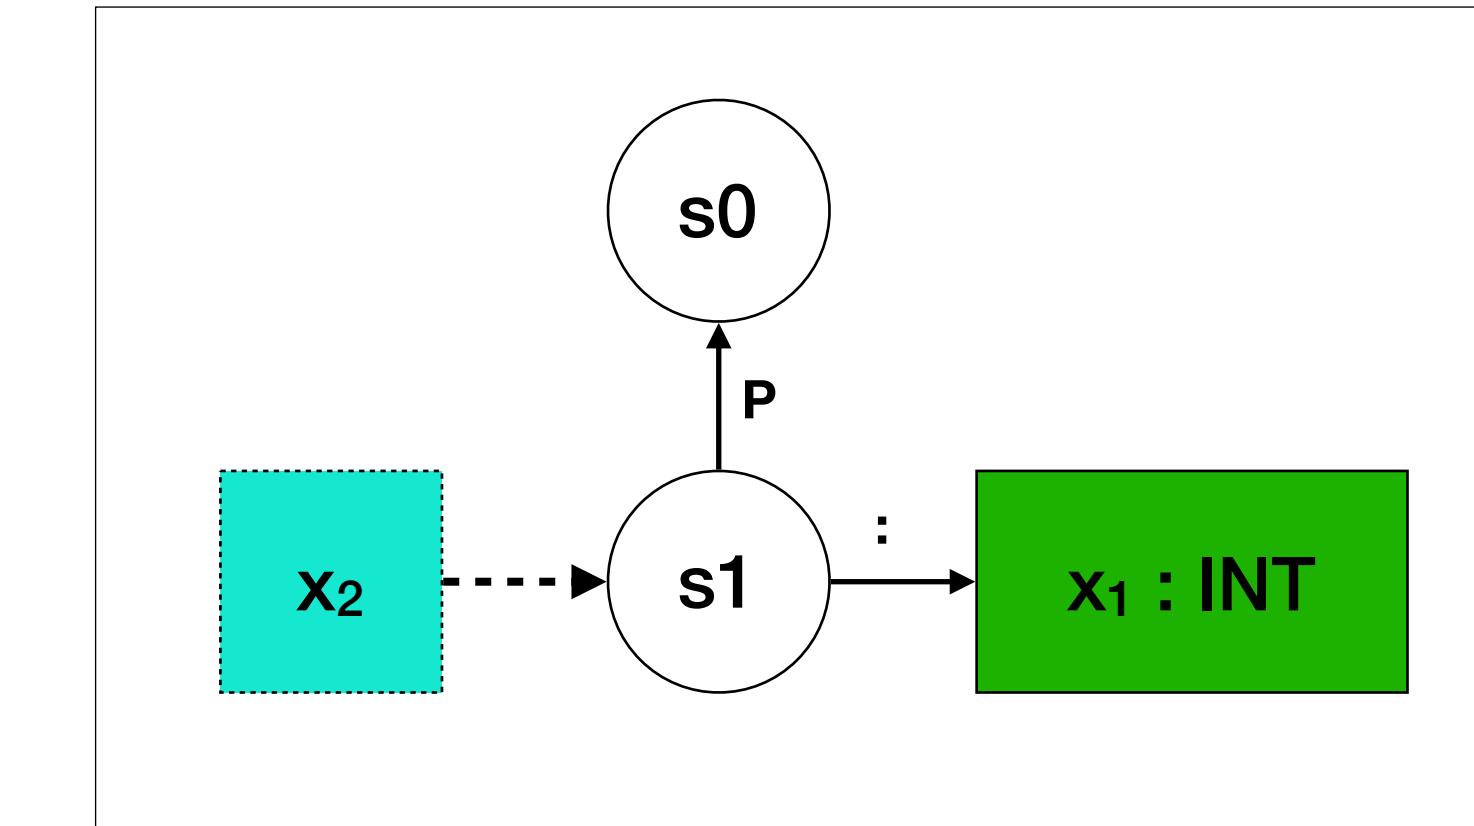

```

dec0k(s, s_outer, VarDec(x, t, e)) :- {T S}
  type0fType(s_outer, t) == T,
  type0fExp(s_outer, e) == S,
  subtype(S, T),
  declareVar(s, x, T).

declareVar(s, x, T) :-
  s -> Var{x} with type0fDecl T,
  // declaration is distinct
  type0fDecl of Var{x} in s !-> [(_, _, T)].

lookupVar(s, x) = T :- {x'} @x.ref := x',
  type0fDecl of Var{x} in s !-> [(_, (Var{x'}, T))].
  
```

**signature**  
**relations**

```

type0fDecl : occurrence -> TYPE // :
namespaces
  Var : string // Var{x}
name-resolution
  labels P
  resolve Var filter P* min $ < P
  
```


# Variable Declarations and References

```

let           s0
  var x1 : int := 1
in           s1
  x2 + 1
end
  
```

```

Let(
  [VarDec("x", INT(), Int("1"))]
, [Plus(Var("x"), Int("1"))]
)
  
```

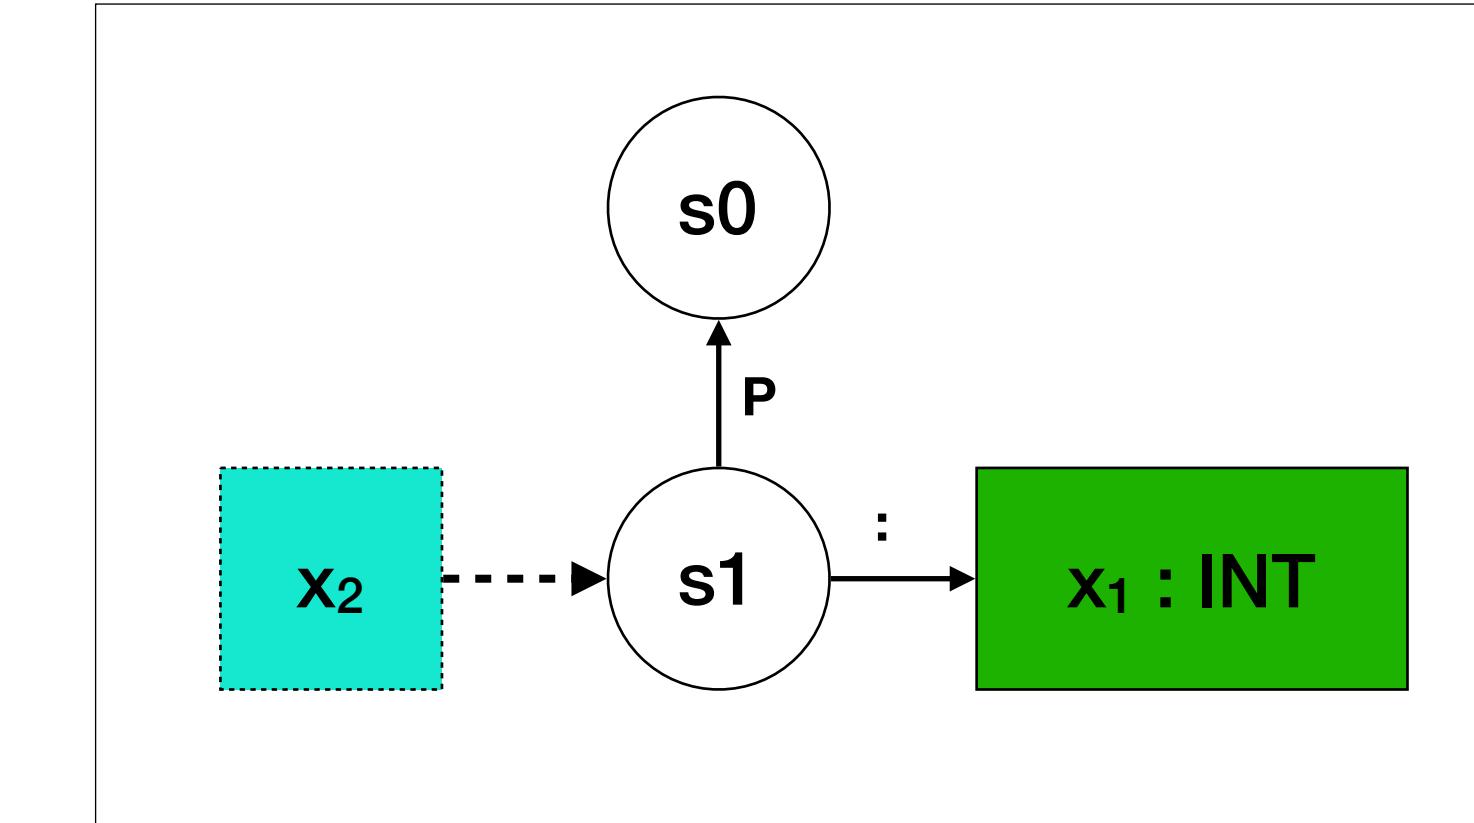

```

dec0k(s, s_outer, VarDec(x, t, e)) :- {T S}
  type0fType(s_outer, t) == T,
  type0fExp(s_outer, e) == S,
  subtype(S, T),
  declareVar(s, x, T).

declareVar(s, x, T) :-
  s -> Var{x} with type0fDecl T,
  // declaration is distinct
  type0fDecl of Var{x} in s !-> [(_, _, T)].

lookupVar(s, x) = T :- {x'} @x.ref := x',
  type0fDecl of Var{x} in s !-> [(_, (Var{x'}, T))].
  
```

**signature relations**

```

type0fDecl : occurrence -> TYPE // :
namespaces
  Var : string // Var{x}
  
```

**name-resolution**

```

labels P
  resolve Var filter P* min $ < P
  
```


# Variable Declarations and References

```

let           s0
  var x1 : int := 1
in           s1
  x2 + 1
end
  
```

```

Let(
  [VarDec("x", INT(), Int("1"))]
, [Plus(Var("x"), Int("1"))]
)
  
```

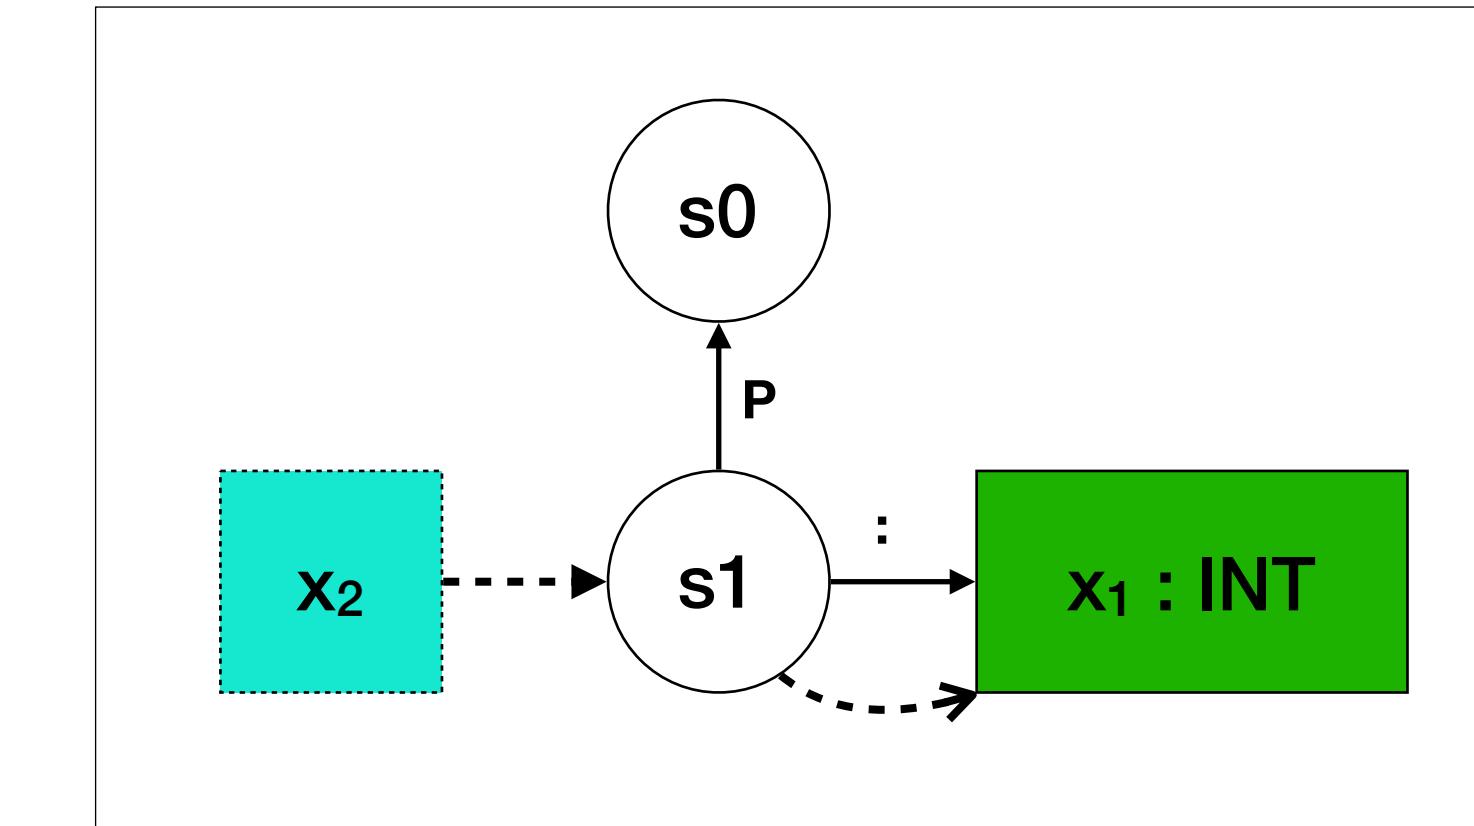

```

dec0k(s, s_outer, VarDec(x, t, e)) :- {T S}
  type0fType(s_outer, t) == T,
  type0fExp(s_outer, e) == S,
  subtype(S, T),
  declareVar(s, x, T).

declareVar(s, x, T) :-
  s -> Var{x} with type0fDecl T,
  // declaration is distinct
  type0fDecl of Var{x} in s !-> [(_, _, T)].

lookupVar(s, x) = T :- {x'} @x.ref := x',
  type0fDecl of Var{x} in s !-> [(_, (Var{x'}, T))].
  
```

**signature**  
**relations**

```

type0fDecl : occurrence -> TYPE // :
namespaces
  Var : string // Var{x}
name-resolution
  labels P
  resolve Var filter P* min $ < P
  
```


# Variable Declarations and References

```

let           s0
  var x1 : int := 1
in           s1
  x2 + 1
end
  
```

```

Let(
  [VarDec("x", INT(), Int("1"))]
, [Plus(Var("x"), Int("1"))]
)
  
```

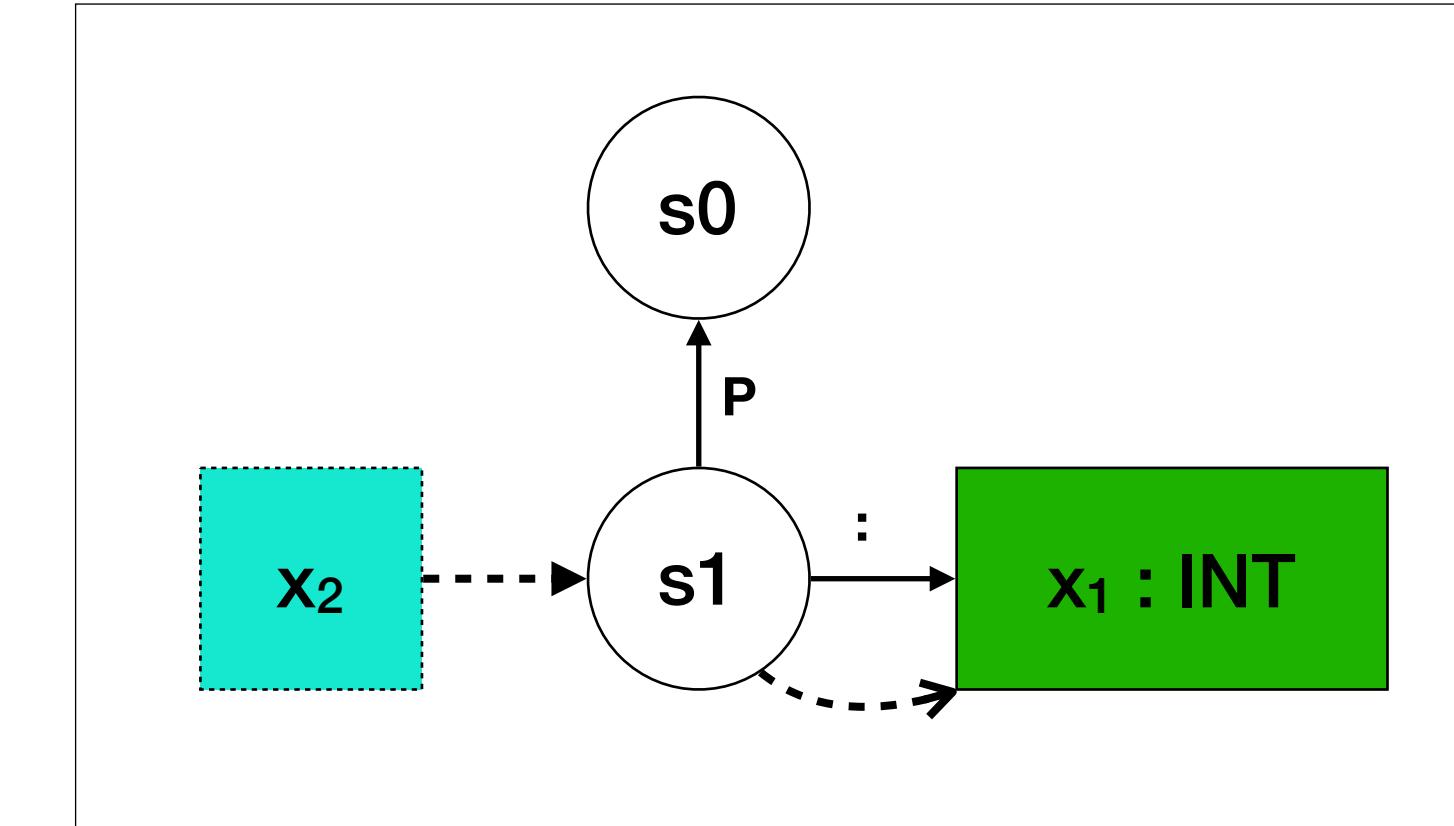

```

dec0k(s, s_outer, VarDec(x, t, e)) :- {T S}
  type0fType(s_outer, t) == T,
  type0fExp(s_outer, e) == S,
  subtype(S, T),
  declareVar(s, x, T).

declareVar(s, x, T) :-
  s -> Var{x} with type0fDecl T,
  // declaration is distinct
  type0fDecl of Var{x} in s !-> [(_, _, T)].

lookupVar(s, x) = T :- {x'} @x.ref := x',
  type0fDecl of Var{x} in s !-> [(_, (Var{x'}, T))].
  
```

**signature**  
**relations**

```

type0fDecl : occurrence -> TYPE // :
namespaces
  Var : string // Var{x}
name-resolution
  labels P
  resolve Var filter P* min $ < P
  
```

# Namespaces

```

signature
relations
    typeOfDecl : occurrence -> TYPE // :
namespaces
    Var  : string // Var{x}
    Type : string // Type{x}
name-resolution
    labels P
    resolve Var filter P* min $ < P
    resolve Type filter P* min $ < P

rules
declareType : scope * string * TYPE
declareType(s, x, T) :-
    s -> Type{x} with typeOfDecl T,
    // declaration is distinct
    typeOfDecl of Type{x} in s |-> [(_, _, T)].

declareVar : scope * string * TYPE
declareVar(s, x, T) :-
    s -> Var{x} with typeOfDecl T,
    // declaration is distinct
    typeOfDecl of Var{x} in s |-> [(_, _, T)].


```

let

type foo <sub>1</sub> = int	s <sub>0</sub>
var foo <sub>2</sub> : int := 24	s <sub>1</sub>
var x <sub>3</sub> : foo <sub>4</sub> := foo <sub>5</sub>	s <sub>2</sub>
x <sub>6</sub>	s <sub>3</sub>


in

end

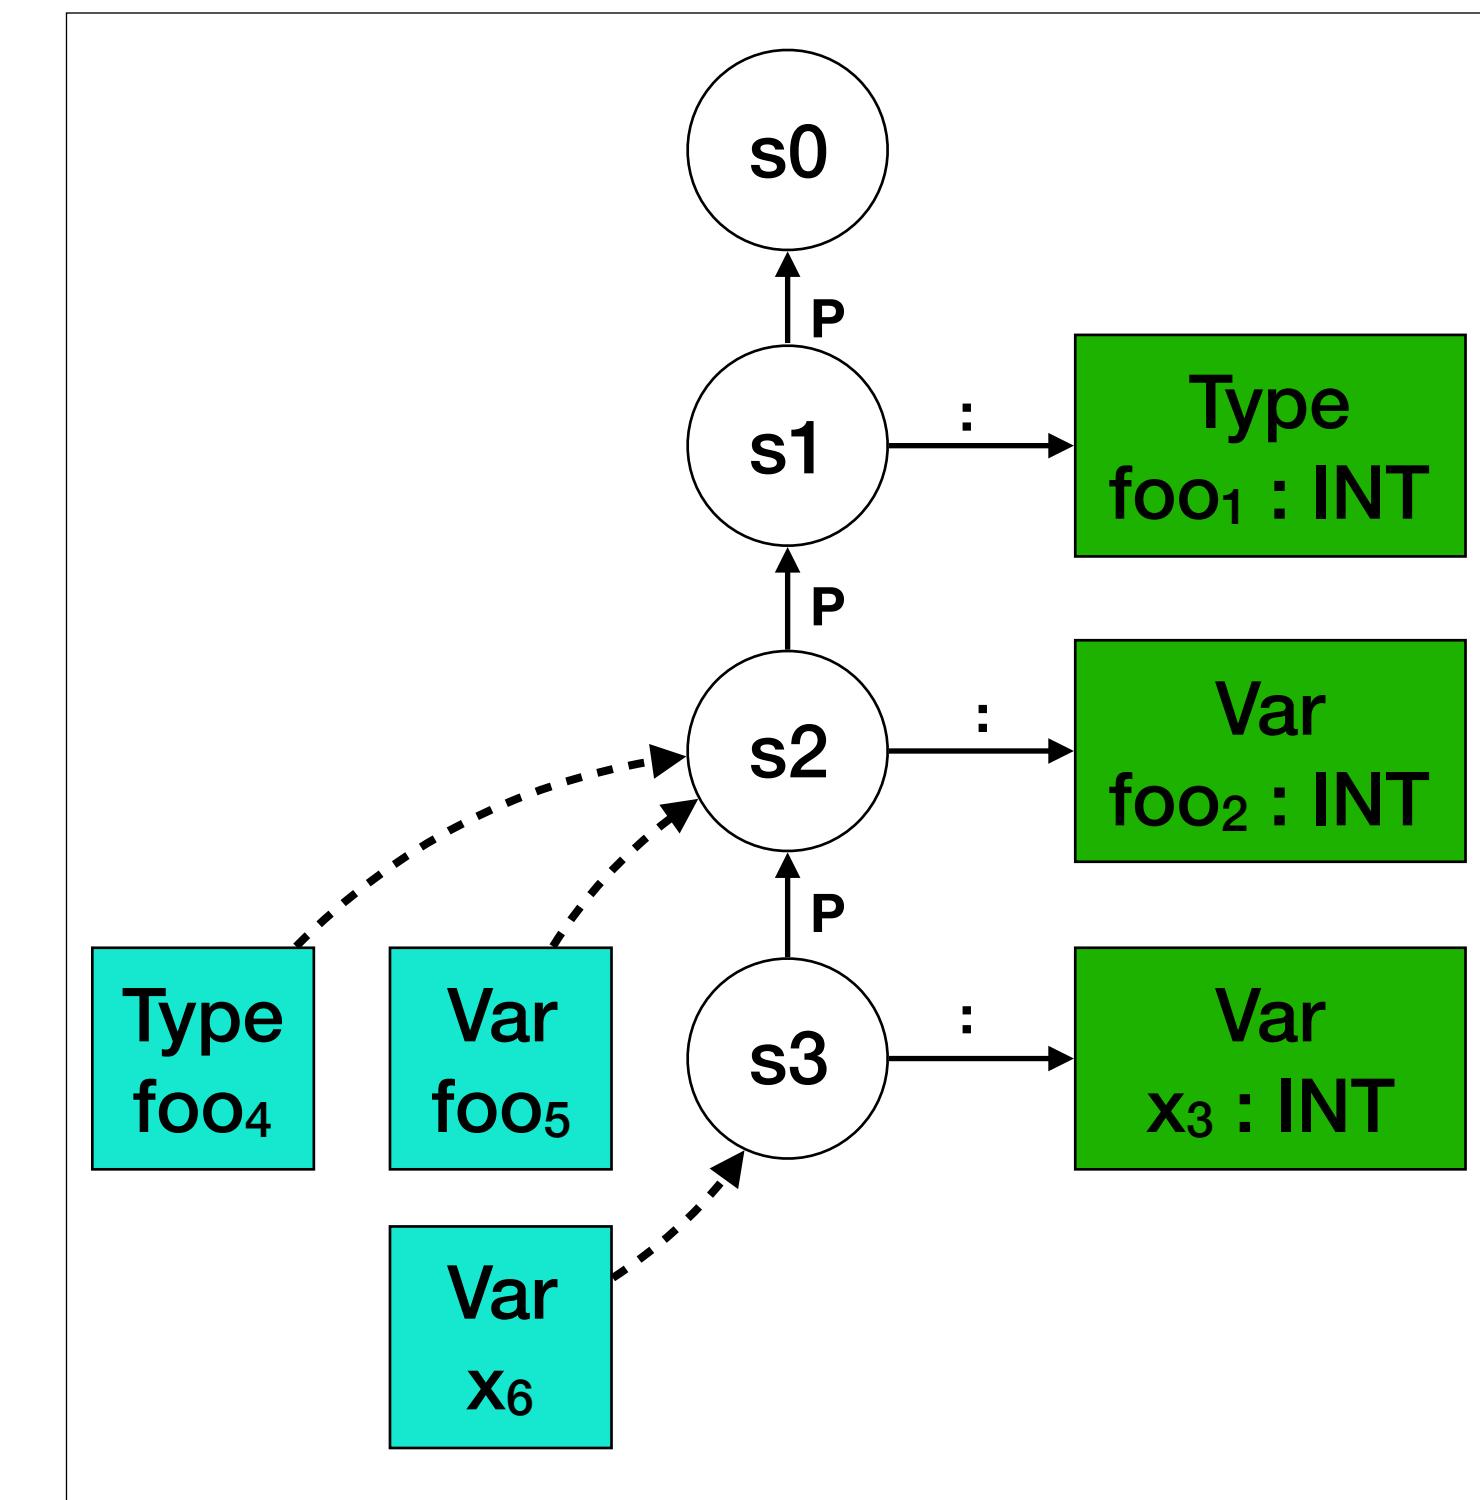

# Scoping of Loop Variable


```
let          s0
  var x1 : int := 0
in           s1
  for i2 := 1 to 4 do
    x3 := x4 + i5;
    x6 * 7
end
```

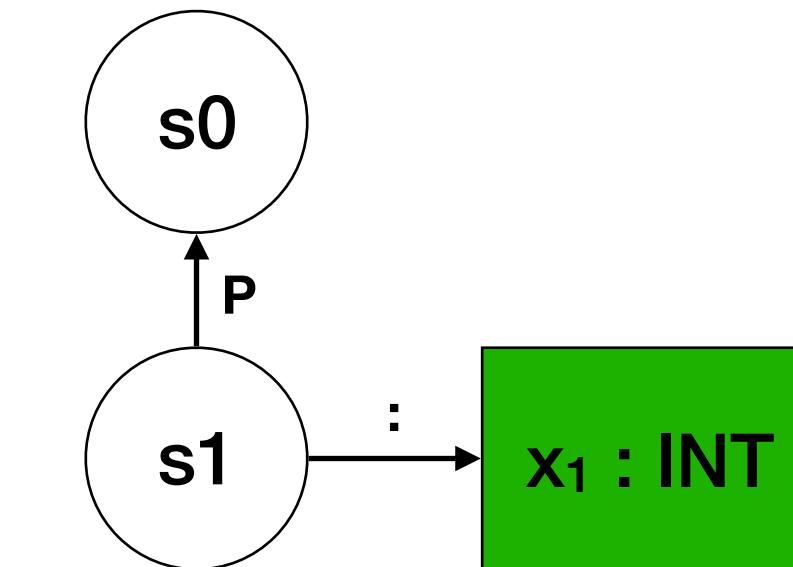

# Scoping of Loop Variable


```
let           s0
  var x1 : int := 0
in            s1
  for i2 := 1 to 4 do
    x3 := x4 + i5;
    x6 * 7
end
```

```
typeOfExp(s, For(Var(x), e1, e2, e3)) = UNIT() :- {s_for}
  new s_for,
  s_for -P-> s,
  declareVar(s_for, x, INT()),
  s_for -> Loop{"break"} with typeOfDecl UNIT(),
  typeOfExp(s, e1) == INT(),
  typeOfExp(s, e2) == INT(),
  typeOfExp(s_for, e3) == UNIT().
```

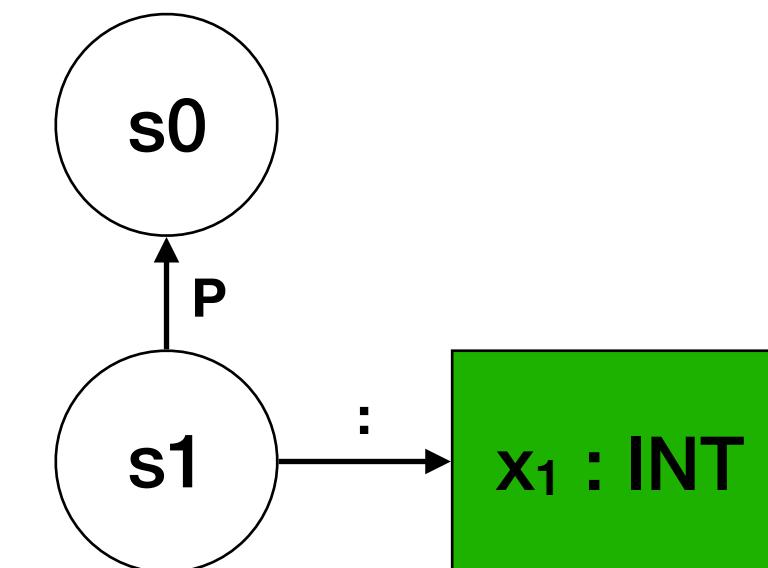

# Scoping of Loop Variable


```
let           s0
  var x1 : int := 0
in            s1
  for i2 := 1 to 4 do
    x3 := x4 + i5;
    x6 * 7
end
```

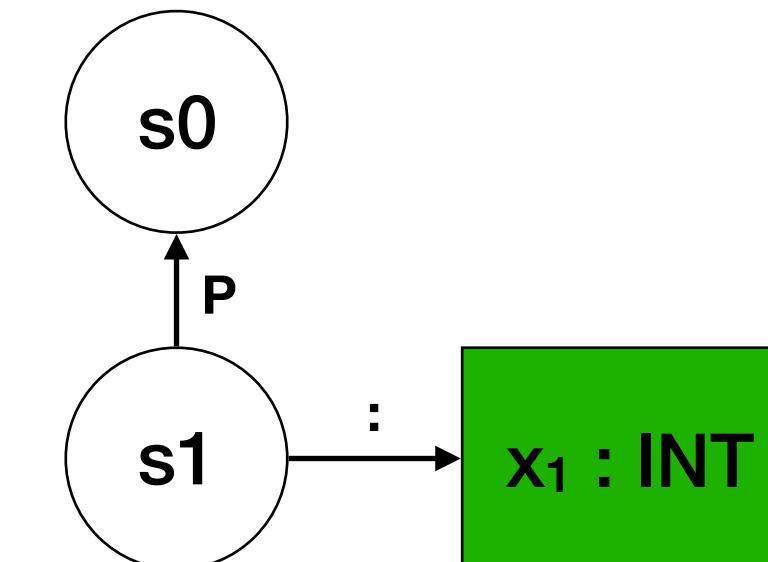

```
typeOfExp(s For(Var(x), e1, e2, e3)) = UNIT() :- {s_for}
  new s_for,
  s_for -P-> s,
  declareVar(s_for, x, INT()),
  s_for -> Loop{"break"} with typeOfDecl UNIT(),
  typeOfExp(s, e1) == INT(),
  typeOfExp(s, e2) == INT(),
  typeOfExp(s_for, e3) == UNIT().
```

# Scoping of Loop Variable


```
let           s0
  var x1 : int := 0
in            s1
  for i2 := 1 to 4 do
    x3 := x4 + i5;
    x6 * 7
end
```

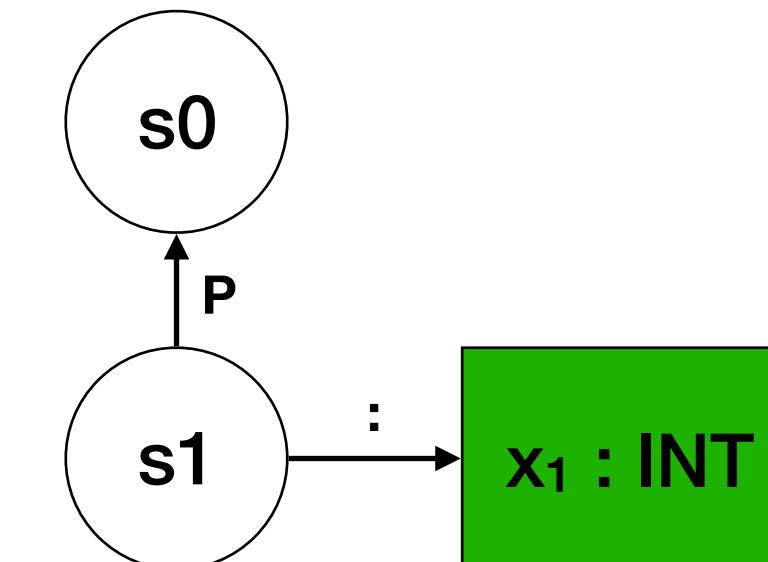

```
typeOfExp(s For(Var(x), e1, e2, e3)) = UNIT() :- {s_for}
  new s_for,
  s_for -P-> s,
  declareVar(s_for, x, INT()),
  s_for -> Loop{"break"} with typeOfDecl UNIT(),
  typeOfExp(s, e1) == INT(),
  typeOfExp(s, e2) == INT(),
  typeOfExp(s_for, e3) == UNIT().
```

# Scoping of Loop Variable

```
let           s0
  var x1 : int := 0
in            s1
  for i2 := 1 to 4 do
    x3 := x4 + i5;
    x6 * 7
end
```

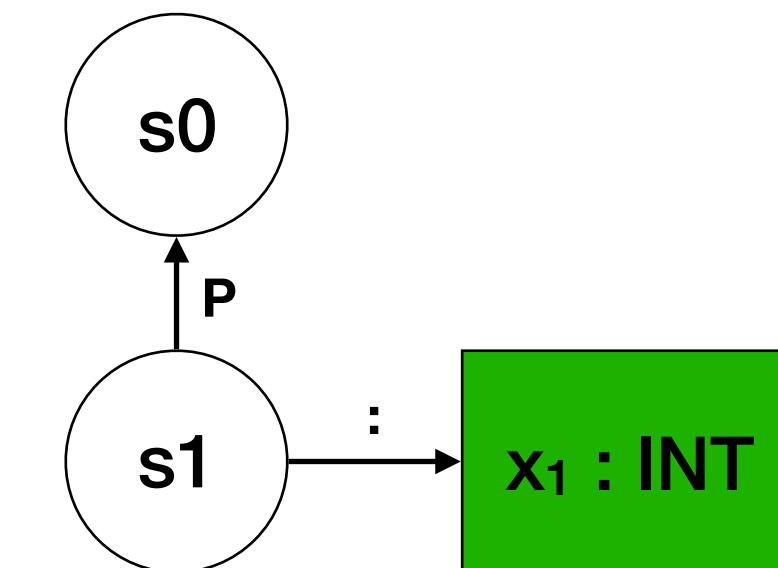


```
typeOfExp(s, For(Var(x), e1, e2, e3)) = UNIT() :- {s_for}
  new s_for,
  s_for -P-> s,
  declareVar(s_for, x, INT()),
  s_for -> Loop{"break"} with typeOfDecl UNIT(),
  typeOfExp(s, e1) == INT(),
  typeOfExp(s, e2) == INT(),
  typeOfExp(s_for, e3) == UNIT().
```

# Scoping of Loop Variable

```
let          s0
  var x1 : int := 0
in           s1
  for i2 := 1 to 4 do
    x3 := x4 + i5;      s2
    x6 * 7
end
```


```
typeOfExp(s, For(Var(x), e1, e2, e3)) = UNIT() :- {s_for}
  new s_for,
  s_for -P-> s,
  declareVar(s_for, x, INT()),
  s_for -> Loop{"break"} with typeOfDecl UNIT(),
  typeOfExp(s, e1) == INT(),
  typeOfExp(s, e2) == INT(),
  typeOfExp(s_for, e3) == UNIT().
```

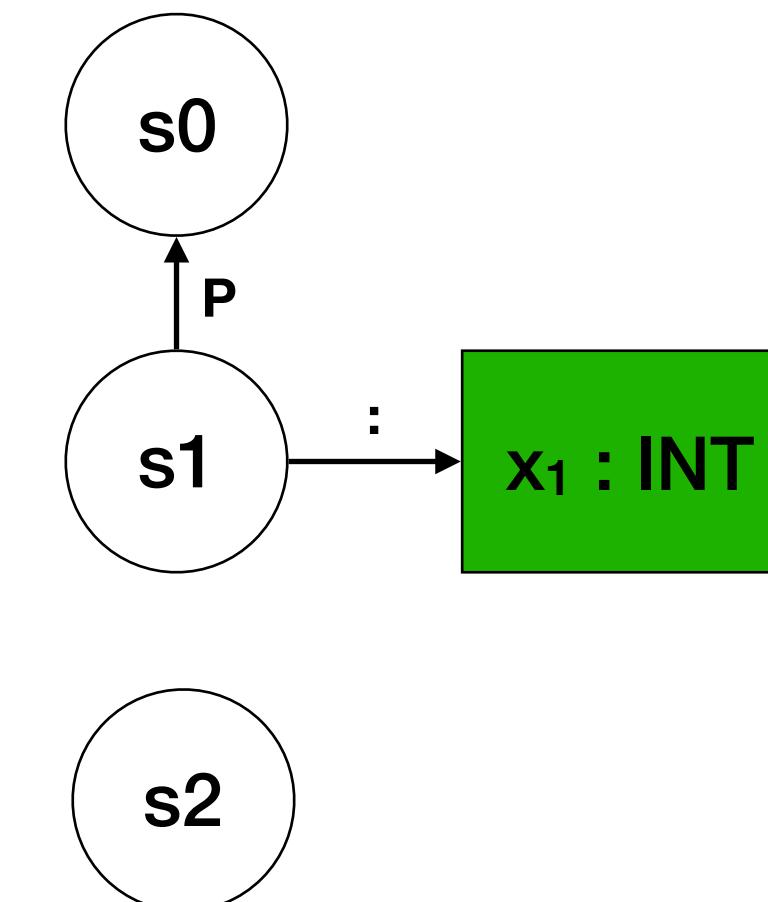

# Scoping of Loop Variable

```
let           s0
  var x1 : int := 0
in           s1
  for i2 := 1 to 4 do
    x3 := x4 + i5;           s2
    x6 * 7
end
```


```
typeOfExp(s, For(Var(x), e1, e2, e3)) = UNIT() :- {s_for}
  new s_for,
  s_for -P-> s,
  declareVar(s_for, x, INT()),
  s_for -> Loop{"break"} with typeOfDecl UNIT(),
  typeOfExp(s, e1) == INT(),
  typeOfExp(s, e2) == INT(),
  typeOfExp(s_for, e3) == UNIT().
```

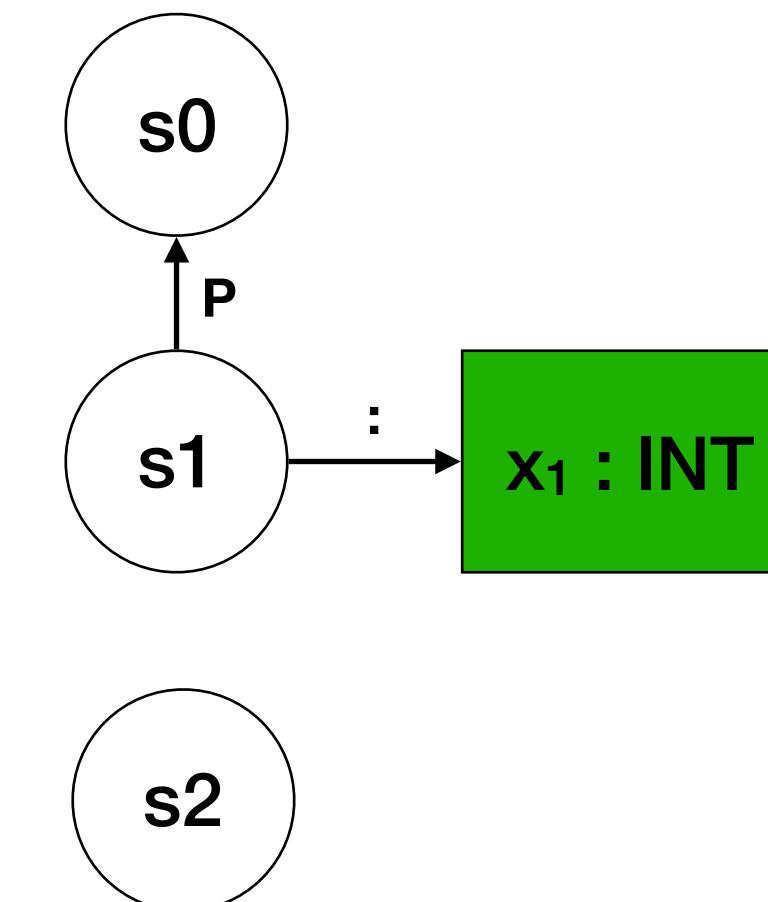

# Scoping of Loop Variable

```
let          s0
  var x1 : int := 0
in           s1
  for i2 := 1 to 4 do
    x3 := x4 + i5;      s2
    x6 * 7
end
```


```
typeOfExp(s, For(Var(x), e1, e2, e3)) = UNIT() :- {s_for}
  new s_for,
  s_for -P-> s,
  declareVar(s_for, x, INT()),
  s_for -> Loop{"break"} with typeOfDecl UNIT(),
  typeOfExp(s, e1) == INT(),
  typeOfExp(s, e2) == INT(),
  typeOfExp(s_for, e3) == UNIT().
```

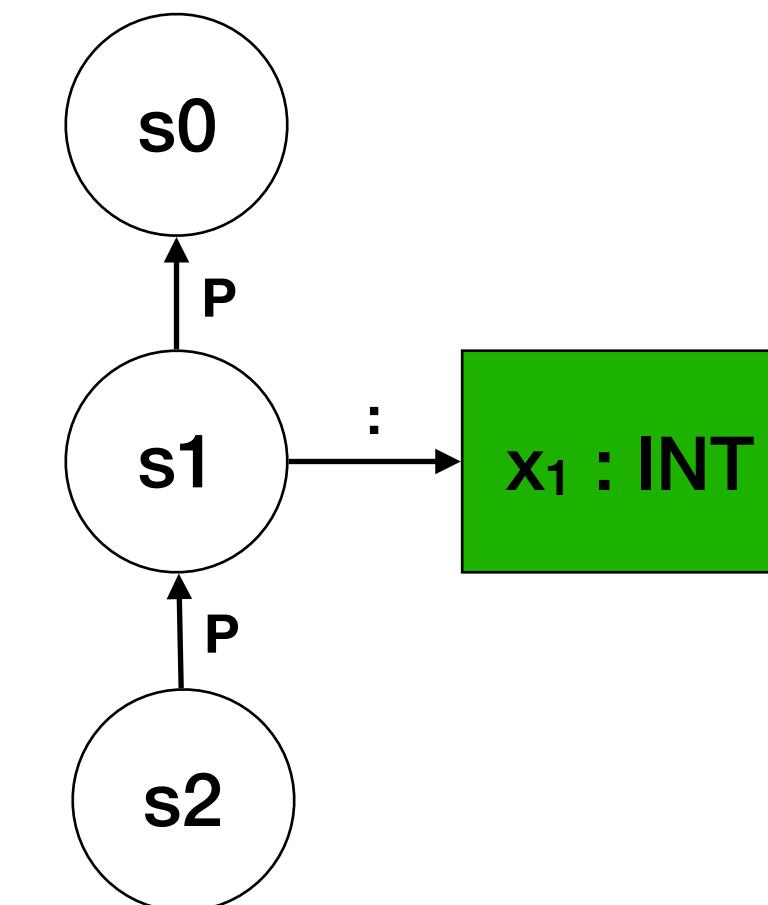

# Scoping of Loop Variable

```
let          s0
  var x1 : int := 0
in           s1
  for i2 := 1 to 4 do
    x3 := x4 + i5;      s2
    x6 * 7
end
```


```
typeOfExp(s, For(Var(x), e1, e2, e3)) = UNIT() :- {s_for}
  new s_for,
  s_for -P-> s,
  declareVar(s_for, x, INT())
  s_for -> Loop{"break"} with typeOfDecl UNIT(),
  typeOfExp(s, e1) == INT(),
  typeOfExp(s, e2) == INT(),
  typeOfExp(s_for, e3) == UNIT().
```

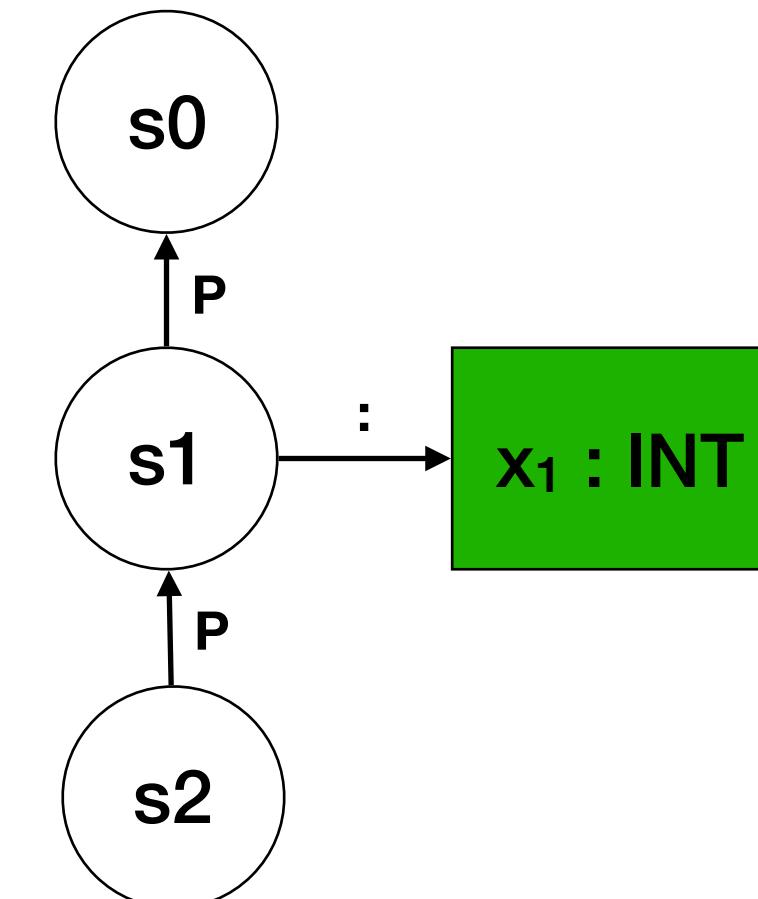

# Scoping of Loop Variable

```
let          s0
  var x1 : int := 0
in          s1
  for i2 := 1 to 4 do
    x3 := x4 + i5;           s2
    x6 * 7
end
```


```
typeOfExp(s, For(Var(x), e1, e2, e3)) = UNIT() :- {s_for}
  new s_for,
  s_for -P-> s,
  declareVar(s_for, x, INT())
  s_for -> Loop{"break"} with typeOfDecl UNIT(),
  typeOfExp(s, e1) == INT(),
  typeOfExp(s, e2) == INT(),
  typeOfExp(s_for, e3) == UNIT().
```

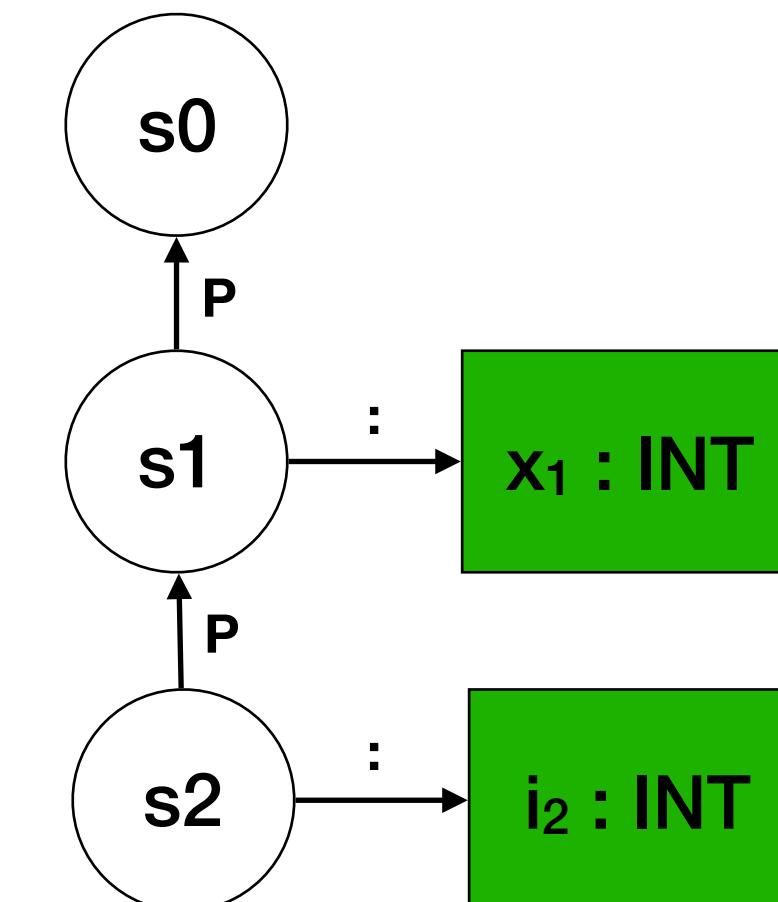

# Scoping of Loop Variable

```
let          s0
  var x1 : int := 0
in          s1
  for i2 := 1 to 4 do
    x3 := x4 + i5;           s2
    x6 * 7
end
```


```
typeOfExp(s, For(Var(x), e1, e2, e3)) = UNIT() :- {s_for}
  new s_for,
  s_for -P-> s,
  declareVar(s_for, x, INT()),
  s_for -> Loop{"break"} with typeOfDecl UNIT(),
  typeOfExp(s, e1) == INT(),
  typeOfExp(s, e2) == INT(),
  typeOfExp(s_for, e3) == UNIT().
```

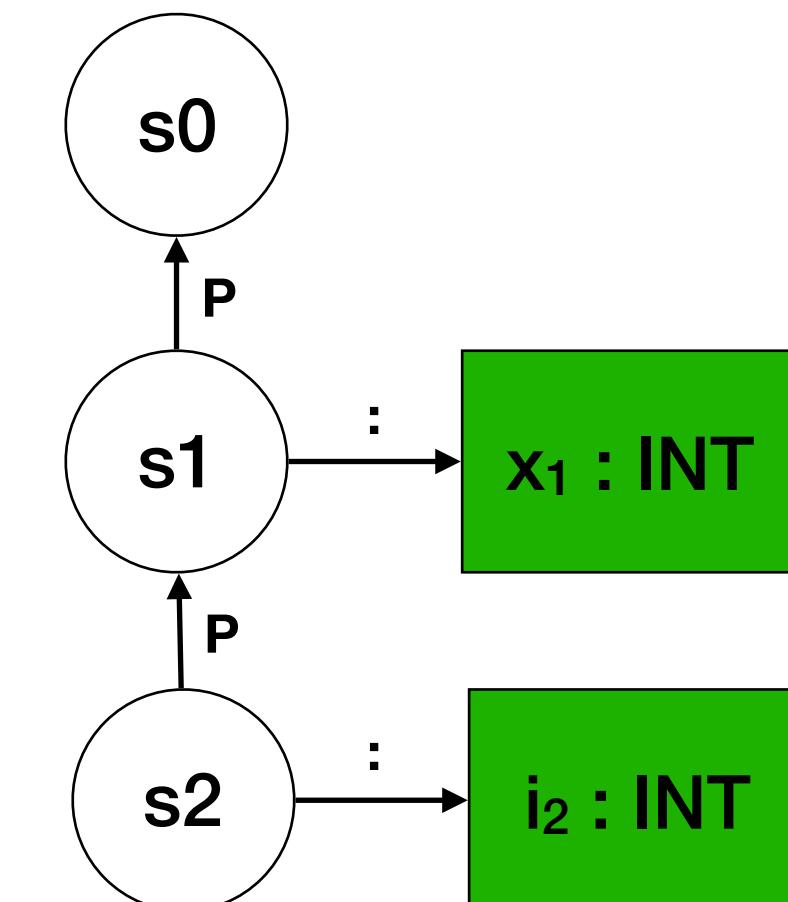

# Scoping of Loop Variable

```
let          s0
  var x1 : int := 0
in          s1
  for i2 := 1 to 4 do
    x3 := x4 + i5;           s2
    x6 * 7
end
```


```
typeOfExp(s, For(Var(x), e1, e2, e3)) = UNIT() :- {s_for}
  new s_for,
  s_for -P-> s,
  declareVar(s_for, x, INT()),
  s_for -> Loop{"break"} with typeOfDecl UNIT(),
  typeOfExp(s, e1) == INT(),
  typeOfExp(s, e2) == INT(),
  typeOfExp(s_for, e3) == UNIT().
```

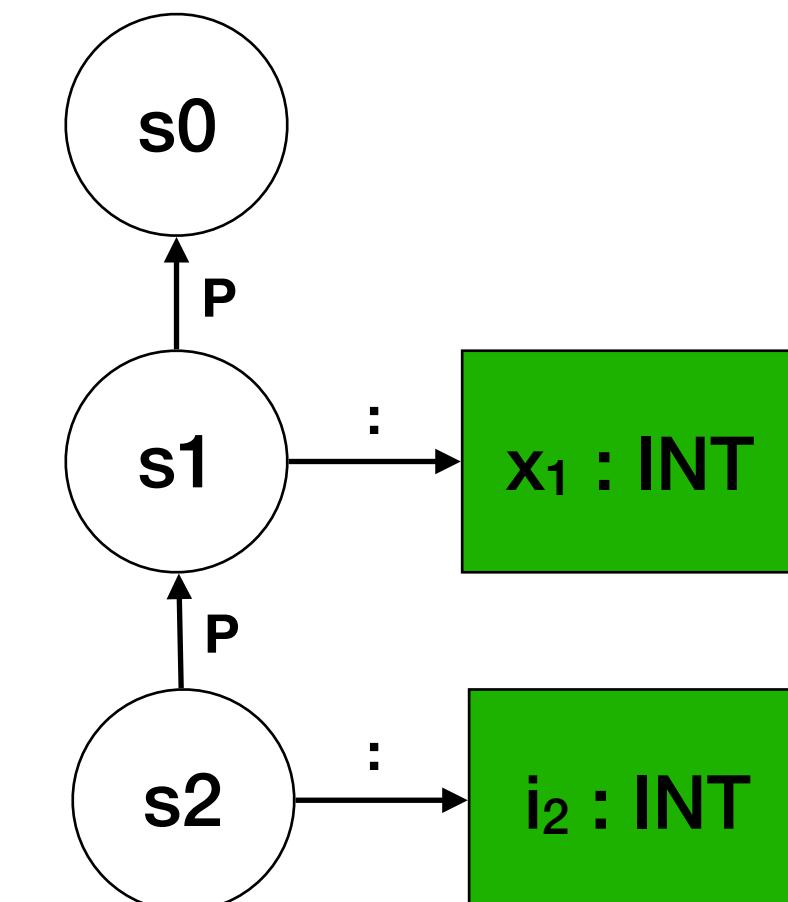

# Scoping of Loop Variable

```
let          s0
  var x1 : int := 0
in          s1
  for i2 := 1 to 4 do
    x3 := x4 + i5;           s2
    x6 * 7
end
```


```
typeOfExp(s, For(Var(x), e1, e2, e3)) = UNIT() :- {s_for}
  new s_for,
  s_for -P-> s,
  declareVar(s_for, x, INT()),
  s_for -> Loop{"break"} with typeOfDecl UNIT(),
  typeOfExp(s, e1) == INT(),
  typeOfExp(s, e2) == INT(),
  typeOfExp(s_for, e3) == UNIT().
```

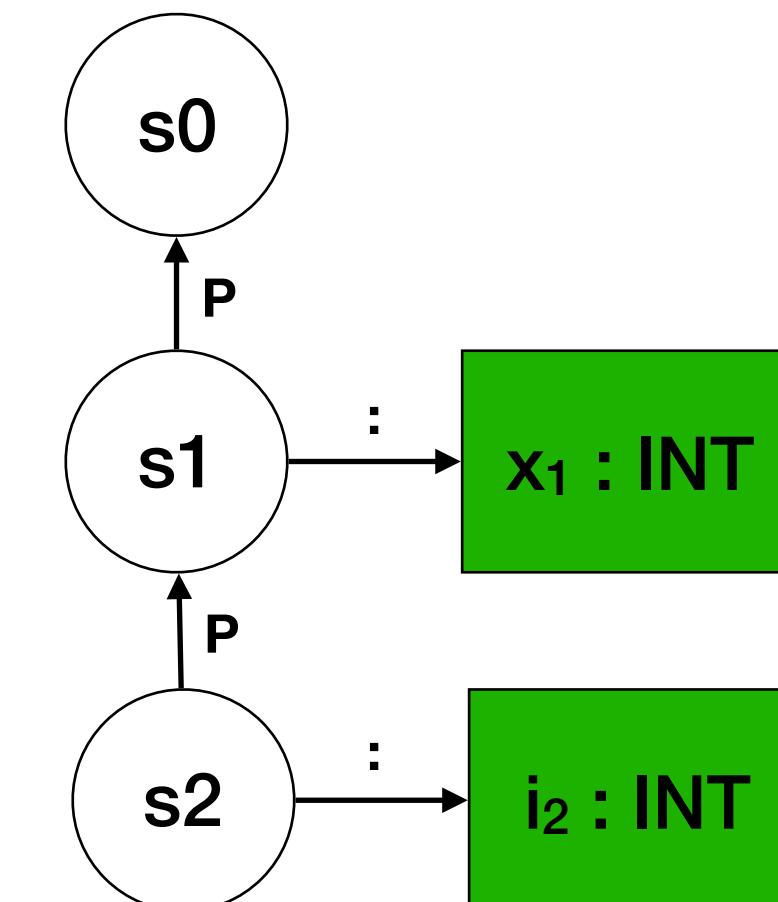

# Scoping of Loop Variable

```
let          s0
  var x1 : int := 0
in           s1
  for i2 := 1 to 4 do
    x3 := x4 + i5;      s2
    x6 * 7
end
```


```
typeOfExp(s, For(Var(x), e1, e2, e3)) = UNIT() :- {s_for}
  new s_for,
  s_for -P-> s,
  declareVar(s_for, x, INT()),
  s_for -> Loop{"break"} with typeOfDecl UNIT(),
  typeOfExp(s, e1) == INT(),
  typeOfExp(s, e2) == INT(),
  typeOfExp(s_for, e3) == UNIT().
```

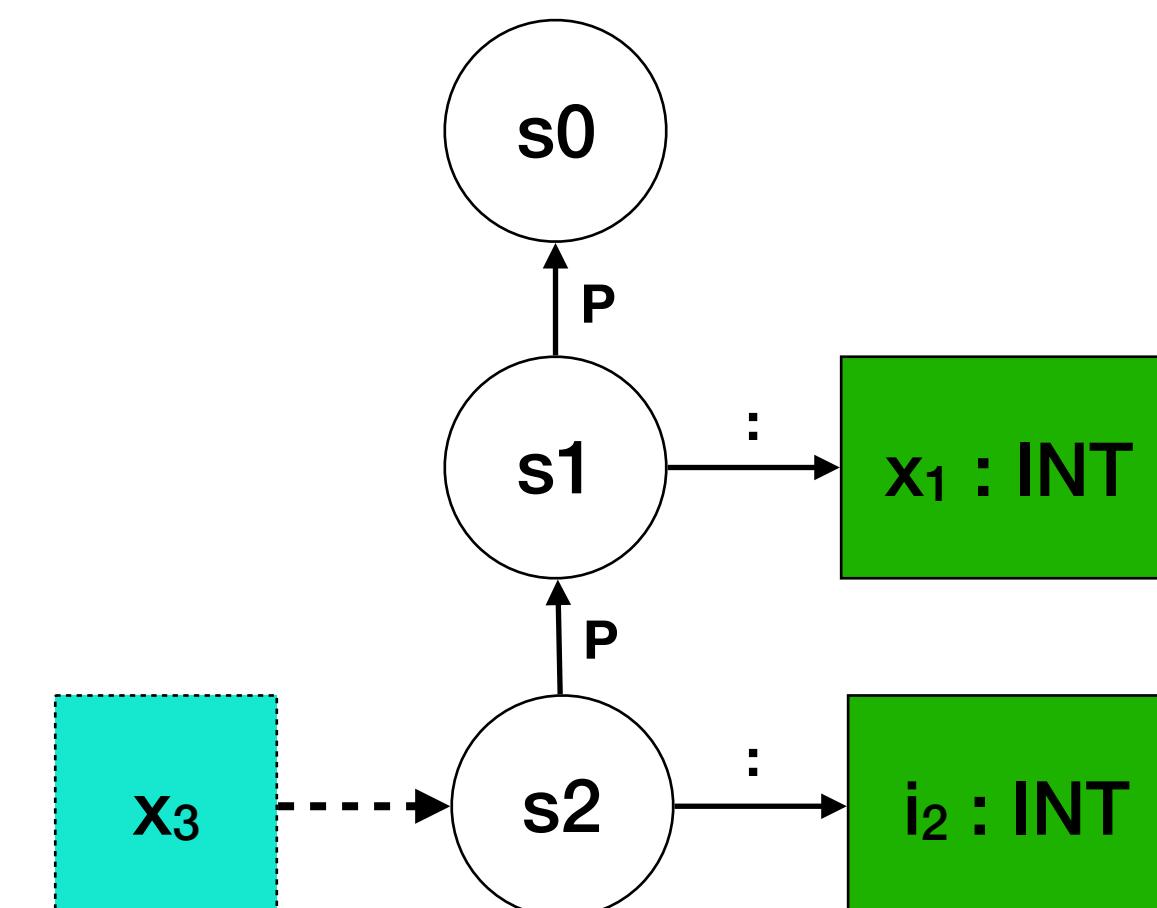

# Scoping of Loop Variable

```
let          s0
  var x1 : int := 0
in           s1
  for i2 := 1 to 4 do
    x3 := x4 + i5;      s2
    x6 * 7
end
```


```
typeOfExp(s, For(Var(x), e1, e2, e3)) = UNIT() :- {s_for}
  new s_for,
  s_for -P-> s,
  declareVar(s_for, x, INT()),
  s_for -> Loop{"break"} with typeOfDecl UNIT(),
  typeOfExp(s, e1) == INT(),
  typeOfExp(s, e2) == INT(),
  typeOfExp(s_for, e3) == UNIT().
```

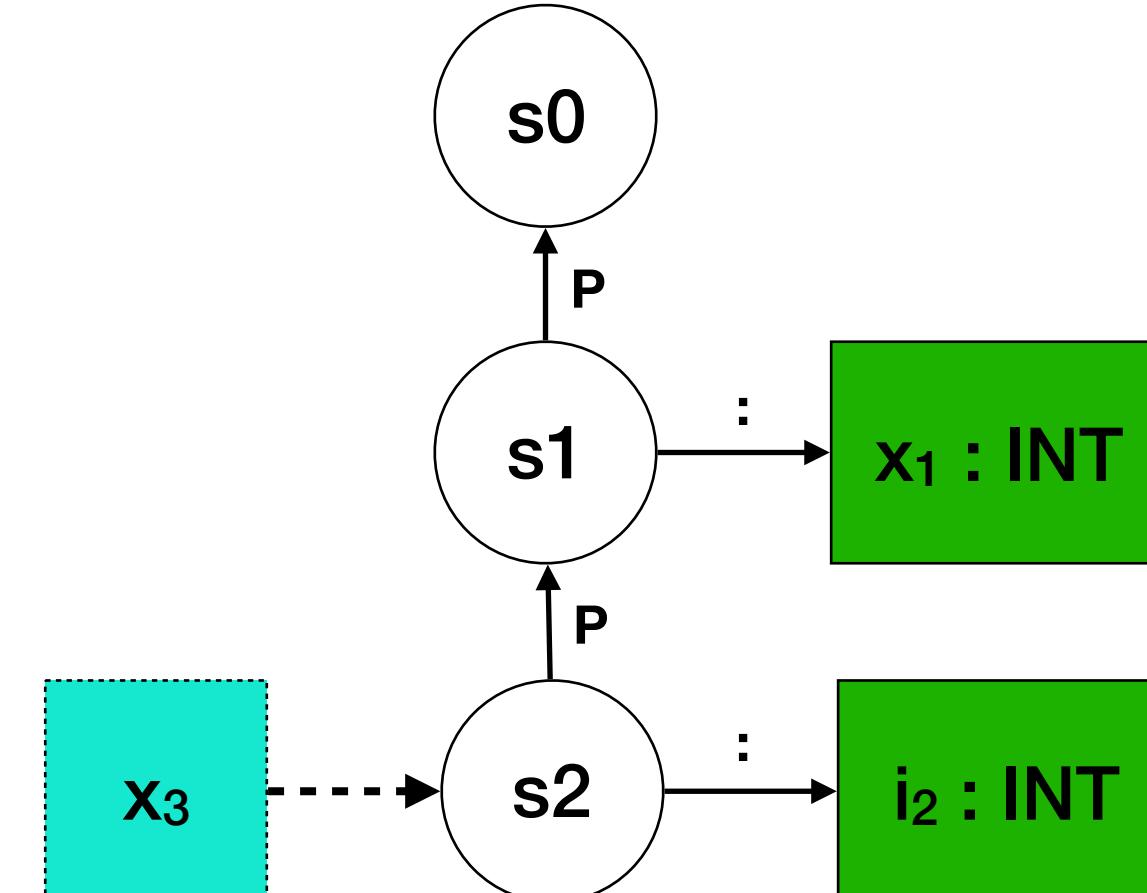

# Scoping of Loop Variable

```
let          s0
  var x1 : int := 0
in           s1
  for i2 := 1 to 4 do
    x3 := x4 + i5;      s2
    x6 * 7
end
```


```
typeOfExp(s, For(Var(x), e1, e2, e3)) = UNIT() :- {s_for}
  new s_for,
  s_for -P-> s,
  declareVar(s_for, x, INT()),
  s_for -> Loop{"break"} with typeOfDecl UNIT(),
  typeOfExp(s, e1) == INT(),
  typeOfExp(s, e2) == INT(),
  typeOfExp(s_for, e3) == UNIT().
```

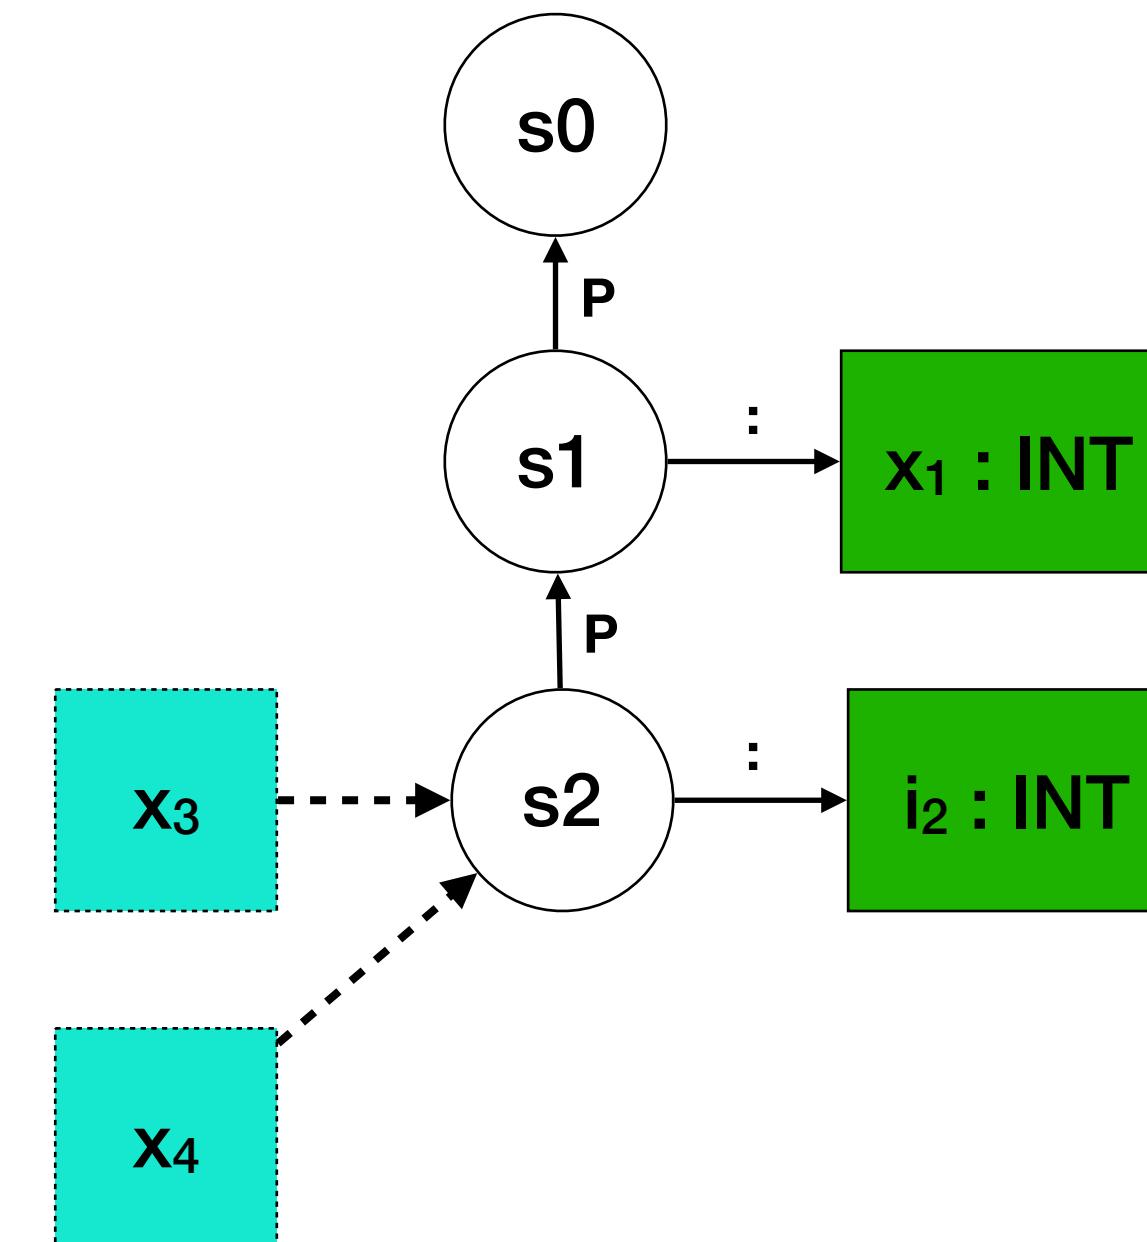

# Scoping of Loop Variable

```
let          s0
  var x1 : int := 0
in          s1
  for i2 := 1 to 4 do
    x3 := x4 + i5;           s2
    x6 * 7
end
```


```
typeOfExp(s, For(Var(x), e1, e2, e3)) = UNIT() :- {s_for}
  new s_for,
  s_for -P-> s,
  declareVar(s_for, x, INT()),
  s_for -> Loop{"break"} with typeOfDecl UNIT(),
  typeOfExp(s, e1) == INT(),
  typeOfExp(s, e2) == INT(),
  typeOfExp(s_for, e3) == UNIT().
```

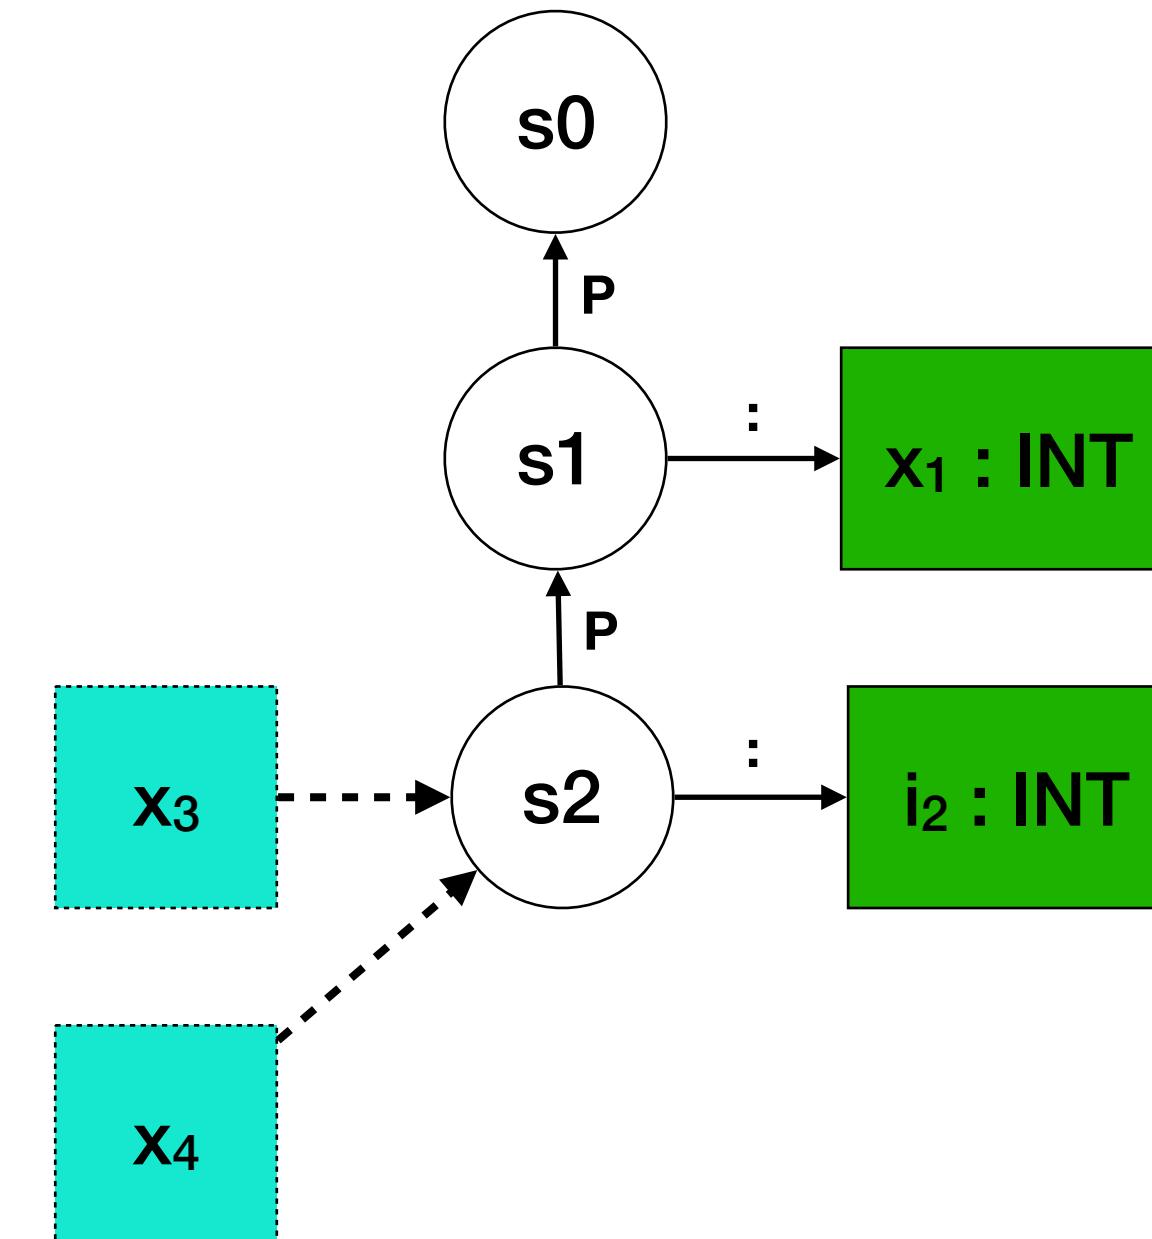

# Scoping of Loop Variable

```
let          s0
  var x1 : int := 0
in           s1
  for i2 := 1 to 4 do
    x3 := x4 + i5;           s2
    x6 * 7
end
```


```
typeOfExp(s, For(Var(x), e1, e2, e3)) = UNIT() :- {s_for}
  new s_for,
  s_for -P-> s,
  declareVar(s_for, x, INT()),
  s_for -> Loop{"break"} with typeOfDecl UNIT(),
  typeOfExp(s, e1) == INT(),
  typeOfExp(s, e2) == INT(),
  typeOfExp(s_for, e3) == UNIT().
```

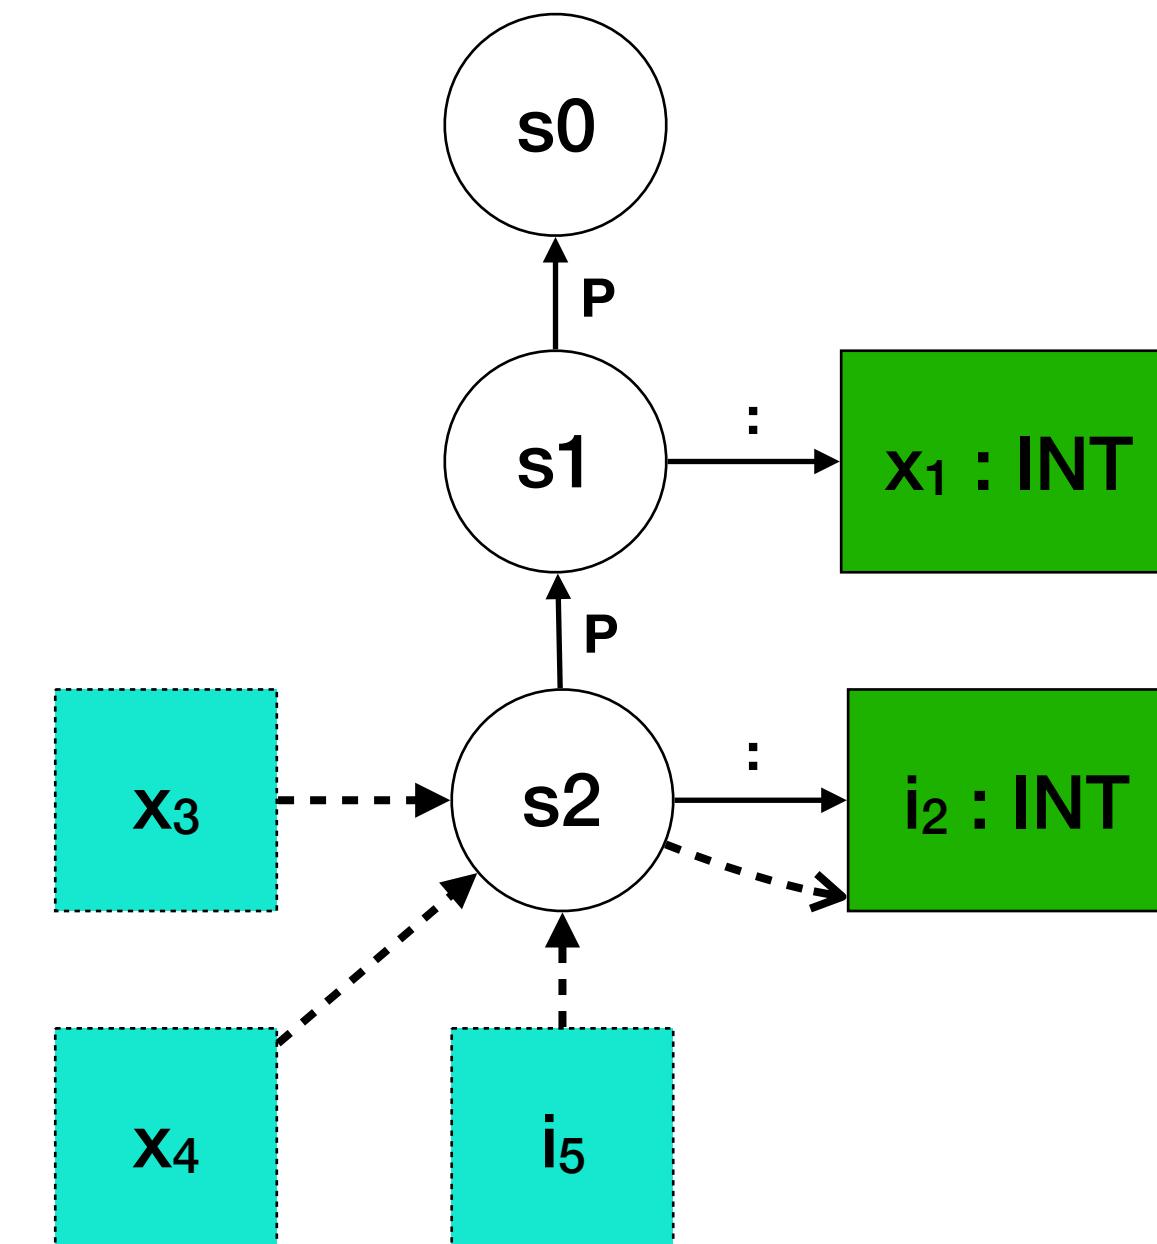

# Scoping of Loop Variable

```
let           s0
  var x1 : int := 0
in           s1
  for i2 := 1 to 4 do
    x3 := x4 + i5;           s2
    x6 * 7
end
```


```
typeOfExp(s, For(Var(x), e1, e2, e3)) = UNIT() :- {s_for}
  new s_for,
  s_for -P-> s,
  declareVar(s_for, x, INT()),
  s_for -> Loop{"break"} with typeOfDecl UNIT(),
  typeOfExp(s, e1) == INT(),
  typeOfExp(s, e2) == INT(),
  typeOfExp(s_for, e3) == UNIT().
```

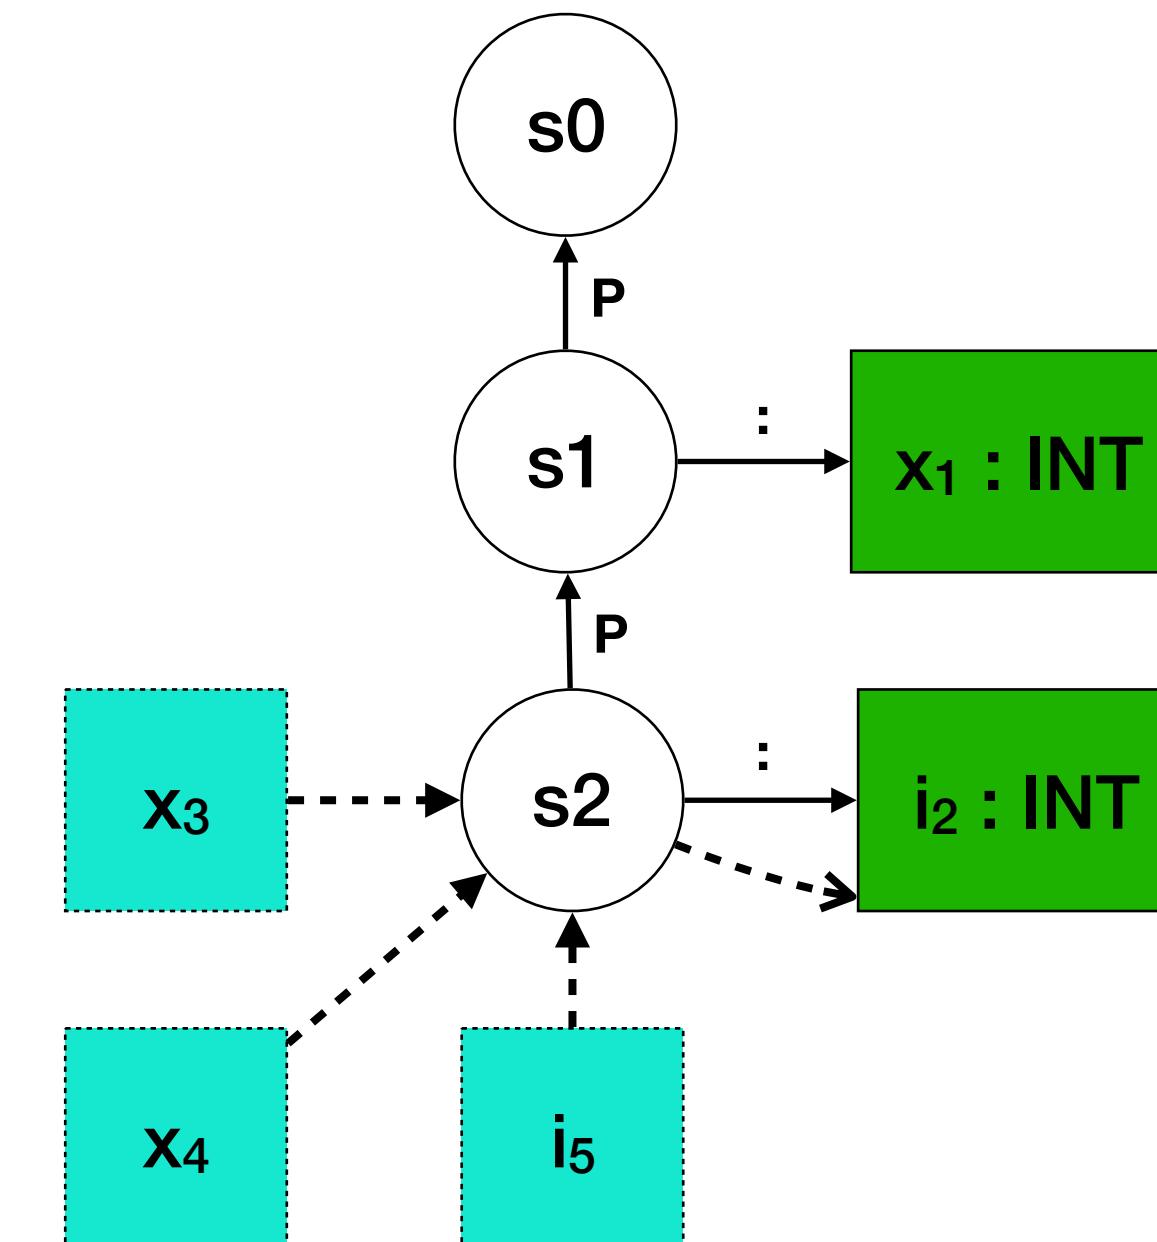

# Scoping of Loop Variable

```
let          s0
  var x1 : int := 0
in           s1
  for i2 := 1 to 4 do
    x3 := x4 + i5;           s2
    x6 * 7
end
```

```
typeOfExp(s, For(Var(x), e1, e2, e3)) = UNIT() :- {s_for}
  new s_for,
  s_for -P-> s,
  declareVar(s_for, x, INT()),
  s_for -> Loop{"break"} with typeOfDecl UNIT(),
  typeOfExp(s, e1) == INT(),
  typeOfExp(s, e2) == INT(),
  typeOfExp(s_for, e3) == UNIT().
```

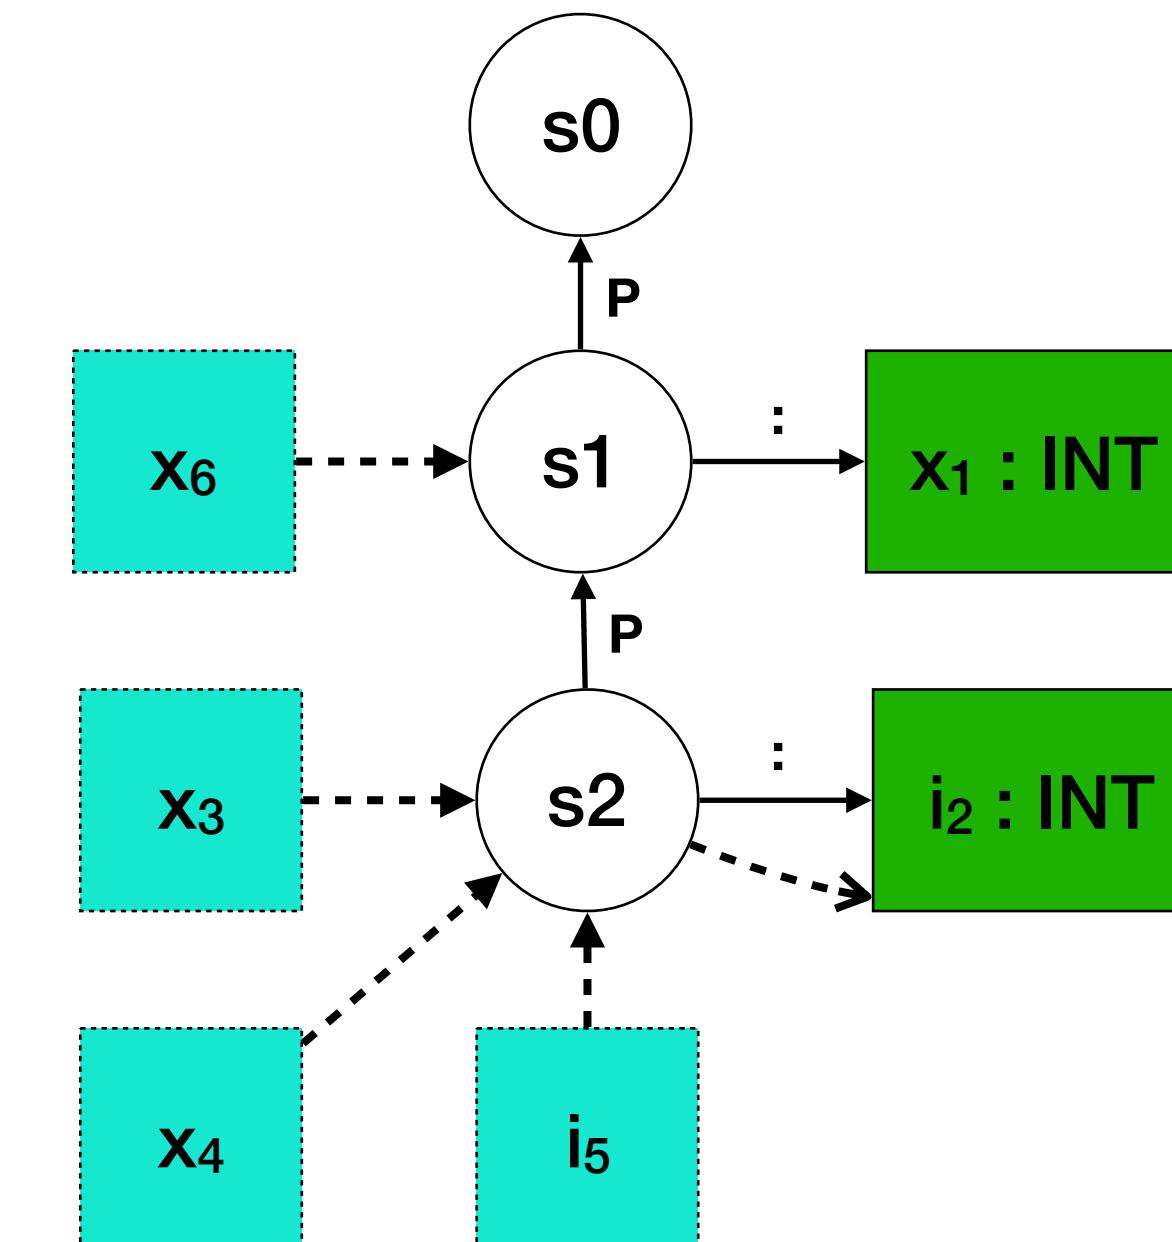


# Function Declarations and References

```
let
  function pow1(b2 : int, n3 : int) : int =
    if n4 < 1
      then 1
      else (b5 * pow6(b7, n8 - 1))
in
  pow9(2, 7)
end
```

s0

s1

s2

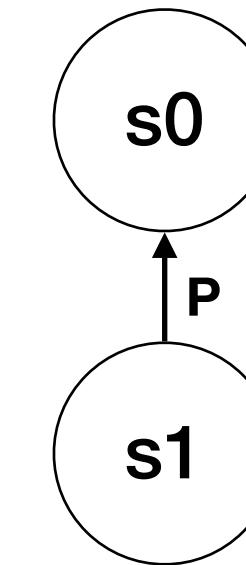


# Function Declarations and References

```
let
  function pow1(b2 : int, n3 : int) : int =
    if n4 < 1
      then 1
      else (b5 * pow6(b7, n8 - 1))
in
  pow9(2, 7)
end
```

```
fdec0k(s, s_outer, d@FunDec(f, args, t, e)) :- {s_fun Ts T S}
  new s_fun, s_fun -P-> s,
  types0fArgs(s_fun, s_outer, args) == Ts,
  type0fType(s_outer, t) == T,
  declareVar(s, f, FUN(Ts, T)),
  type0fExp(s_fun, e) == S,
  subtype0(t, S, T).
```

```
type0fArg(s_fun, s_outer, FArg(x, t)) = T :-
  type0fType(s_outer, t) == T,
  declareVar(s_fun, x, T).
```

```
type0fExp(s, Call(f, es)) = T :- {Ts Ss}
  lookupVar(s, f) == FUN(Ts, T),
  type0fExps(s, es) == Ss,
  subtypes(Ss, Ts).
```

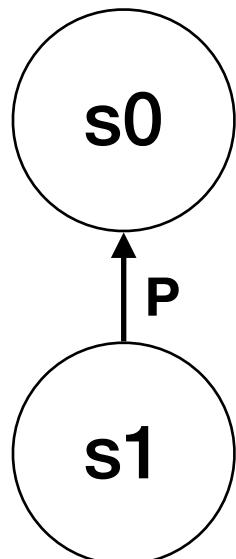

# Function Declarations and References


```
let
  function pow1(b2 : int, n3 : int) : int =
    if n4 < 1
      then 1
      else (b5 * pow6(b7, n8 - 1))
in
  pow9(2, 7)
end
```

s0  
s1  
s2

```
fdec0k(s, s_outer, d@FunDec(f, args, t, e)) :- {s_fun Ts T S}
  new s_fun, s_fun -P-> s,
  typesOfArgs(s_fun, s_outer, args) == Ts,
  typeOfType(s_outer, t) == T,
  declareVar(s, f, FUN(Ts, T)),
  typeOfExp(s_fun, e) == S,
  subtype0(t, S, T).
```

```
typeOfArg(s_fun, s_outer, FArg(x, t)) = T :-
  typeOfType(s_outer, t) == T,
  declareVar(s_fun, x, T).
```

```
typeOfExp(s, Call(f, es)) = T :- {Ts Ss}
  lookupVar(s, f) == FUN(Ts, T),
  typeOfExps(s, es) == Ss,
  subtypes(Ss, Ts).
```

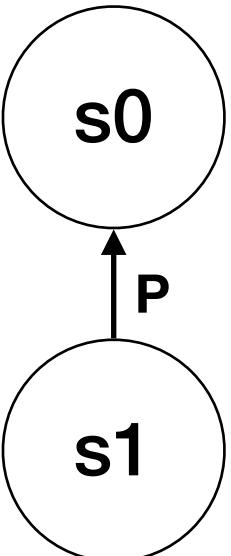

# Function Declarations and References


```
let
  function pow1(b2 : int, n3 : int) : int =
    if n4 < 1
      then 1
      else (b5 * pow6(b7, n8 - 1))
in
  pow9(2, 7)
end
```

s0  
s1  
s2

```
fdec0k(s, s_outer, d@FunDec(f, args, t, e)) :- {s_fun Ts T S}
  new s_fun, s_fun -P-> s,
  types0fArgs(s_fun, s_outer, args) == Ts,
  type0fType(s_outer, t) == T,
  declareVar(s, f, FUN(Ts, T)),
  type0fExp(s_fun, e) == S,
  subtype0(t, S, T).
```

```
type0fArg(s_fun, s_outer, FArg(x, t)) = T :-
  type0fType(s_outer, t) == T,
  declareVar(s_fun, x, T).
```

```
type0fExp(s, Call(f, es)) = T :- {Ts Ss}
  lookupVar(s, f) == FUN(Ts, T),
  type0fExps(s, es) == Ss,
  subtypes(Ss, Ts).
```

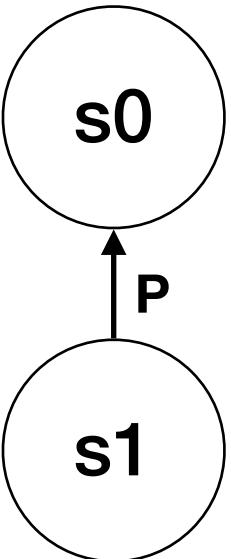

# Function Declarations and References


```
let
  function pow1(b2 : int, n3 : int) : int =
    if n4 < 1
      then 1
      else (b5 * pow6(b7, n8 - 1))
in
  pow9(2, 7)
end
```

s0  
s1  
s2

```
fdec0k(s, s_outer, d@FunDec(f, args, t, e)) :- {s_fun Ts T S}
  new s_fun, s_fun -P-> s,
  types0fArgs(s_fun, s_outer, args) == Ts,
  type0fType(s_outer, t) == T,
  declareVar(s, f, FUN(Ts, T)),
  type0fExp(s_fun, e) == S,
  subtype0(t, S, T).
```

```
type0fArg(s_fun, s_outer, FArg(x, t)) = T :-
  type0fType(s_outer, t) == T,
  declareVar(s_fun, x, T).
```

```
type0fExp(s, Call(f, es)) = T :- {Ts Ss}
  lookupVar(s, f) == FUN(Ts, T),
  type0fExps(s, es) == Ss,
  subtypes(Ss, Ts).
```

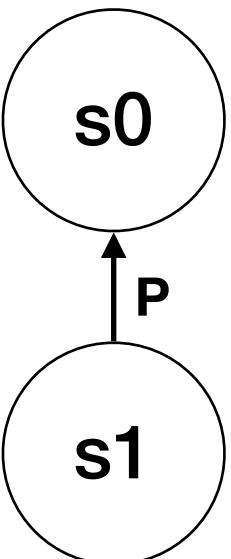

# Function Declarations and References


```
let
  function pow1(b2 : int, n3 : int) : int =
    if n4 < 1
      then 1
      else (b5 * pow6(b7, n8 - 1))
in
  pow9(2, 7)
end
```

s0  
s1  
s2

```
fdec0k(s, s_outer, d@FunDec(f, args, t, e)) :- {s_fun Ts T S}
  new s_fun, s_fun -P-> s,
  typesOfArgs(s_fun, s_outer, args) == Ts,
  typeOfType(s_outer, t) == T,
  declareVar(s, f, FUN(Ts, T)),
  typeOfExp(s_fun, e) == S,
  subtype0(t, S, T).
```

```
typeOfArg(s_fun, s_outer, FArg(x, t)) = T :-
  typeOfType(s_outer, t) == T,
  declareVar(s_fun, x, T).
```

```
typeOfExp(s, Call(f, es)) = T :- {Ts Ss}
  lookupVar(s, f) == FUN(Ts, T),
  typeOfExps(s, es) == Ss,
  subtypes(Ss, Ts).
```

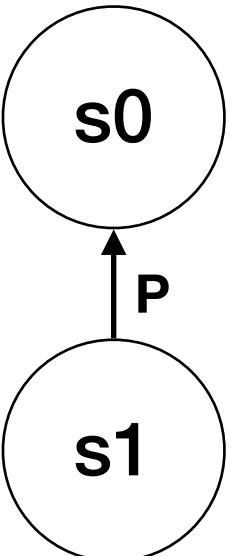

# Function Declarations and References


```
let
  function pow1(b2 : int, n3 : int) : int =
    if n4 < 1
      then 1
      else (b5 * pow6(b7, n8 - 1))
in
  pow9(2, 7)
end
```

s0  
s1  
s2

```
fdec0k(s, s_outer, d@FunDec(f, args, t, e)) :- {s_fun Ts T S}
  new s_fun, s_fun -P-> s,
  typesOfArgs(s_fun, s_outer, args) == Ts,
  typeOfType(s_outer, t) == T,
  declareVar(s, f, FUN(Ts, T)),
  typeOfExp(s_fun, e) == S,
  subtype0(t, S, T).
```

```
typeOfArg(s_fun, s_outer, FArg(x, t)) = T :-
  typeOfType(s_outer, t) == T,
  declareVar(s_fun, x, T).
```

```
typeOfExp(s, Call(f, es)) = T :- {Ts Ss}
  lookupVar(s, f) == FUN(Ts, T),
  typeOfExps(s, es) == Ss,
  subtypes(Ss, Ts).
```

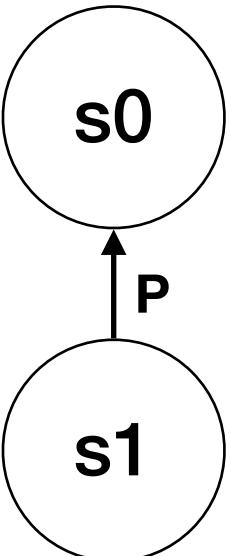

# Function Declarations and References

```
let
```

```
  function pow1(b2 : int, n3 : int) : int =  
    if n4 < 1  
    then 1  
    else (b5 * pow6(b7, n8 - 1))
```

```
in
```

```
  pow9(2, 7)
```

```
end
```

s0


s1

s2

```
fdec0k(s, s_outer, d@FunDec(f, args, t, e)) :- {s_fun Ts T S}  
new s_fun, s_fun -P-> s,  
types0fArgs(s_fun, s_outer, args) == Ts,  
type0fType(s_outer, t) == T,  
declareVar(s, f, FUN(Ts, T)),  
type0fExp(s_fun, e) == S,  
subtype0(t, S, T).
```

```
type0fArg(s_fun, s_outer, FArg(x, t)) = T :-  
type0fType(s_outer, t) == T,  
declareVar(s_fun, x, T).
```

```
type0fExp(s, Call(f, es)) = T :- {Ts Ss}  
lookupVar(s, f) == FUN(Ts, T),  
type0fExps(s, es) == Ss,  
subtypes(Ss, Ts).
```

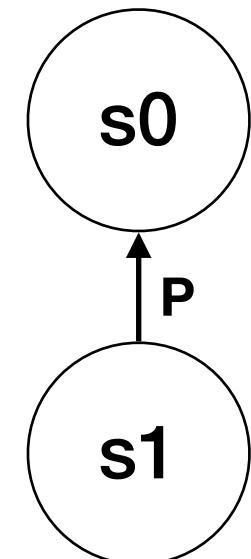

# Function Declarations and References

```
let
```

```
  function pow1(b2 : int, n3 : int) : int =  
    if n4 < 1  
    then 1  
    else (b5 * pow6(b7, n8 - 1))
```

```
in
```

```
  pow9(2, 7)
```

```
end
```

s0


s1

s2

```
fdec0k(s, s_outer, d@FunDec(f, args, t, e)) :- {s_fun Ts T S}  
new s_fun, s_fun -P-> s,  
types0fArgs(s_fun, s_outer, args) == Ts,  
type0fType(s_outer, t) == T,  
declareVar(s, f, FUN(Ts, T)),  
type0fExp(s_fun, e) == S,  
subtype0(t, S, T).
```

```
type0fArg(s_fun, s_outer, FArg(x, t)) = T :-  
type0fType(s_outer, t) == T,  
declareVar(s_fun, x, T).
```

```
type0fExp(s, Call(f, es)) = T :- {Ts Ss}  
lookupVar(s, f) == FUN(Ts, T),  
type0fExps(s, es) == Ss,  
subtypes(Ss, Ts).
```

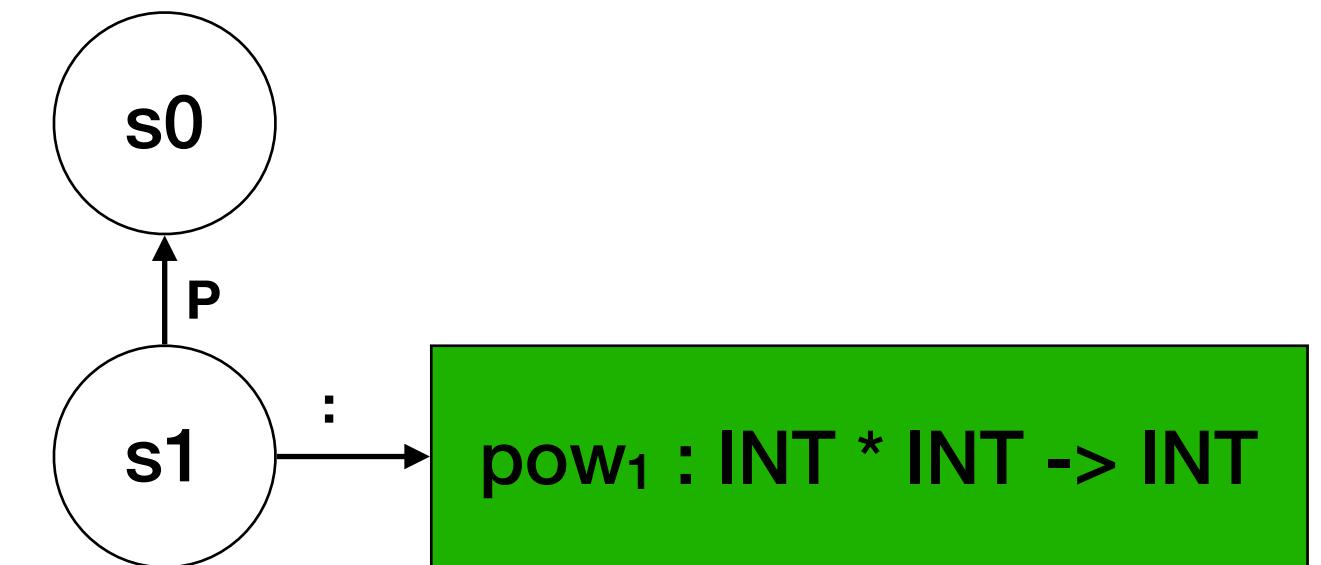

# Function Declarations and References


```
let
  function pow1(b2 : int, n3 : int) : int =
    if n4 < 1
      then 1
      else (b5 * pow6(b7, n8 - 1))
in
  pow9(2, 7)
end
```

```
fdec0k(s, s_outer, d@FunDec(f, args, t, e)) :- {s_fun Ts T S}
```

```
new s_fun, s_fun -P-> s,
typesOfArgs(s_fun, s_outer, args) == Ts,
typeOfType(s_outer, t) == T,
declareVar(s, f, FUN(Ts, T)),
typeOfExp(s_fun, e) == S,
subtype0(t, S, T).
```

```
typeOfArg(s_fun, s_outer, FArg(x, t)) = T :-
typeOfType(s_outer, t) == T,
declareVar(s_fun, x, T).
```

```
typeOfExp(s, Call(f, es)) = T :- {Ts Ss}
lookupVar(s, f) == FUN(Ts, T),
typeOfExps(s, es) == Ss,
subtypes(Ss, Ts).
```

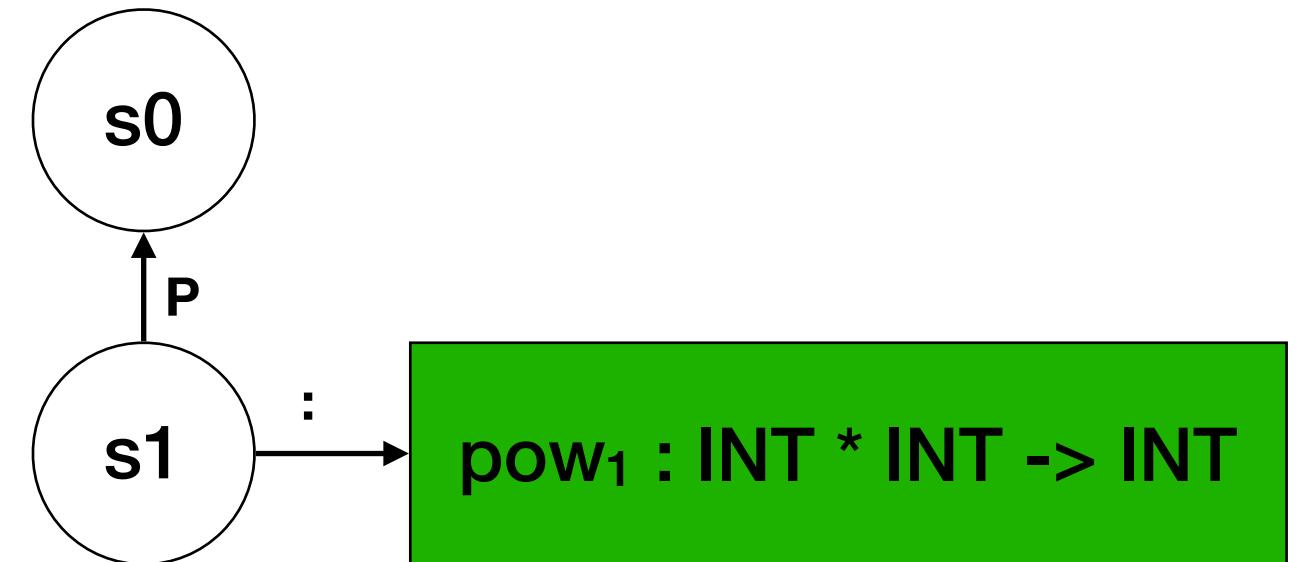

# Function Declarations and References


```
let
  function pow1(b2 : int, n3 : int) : int =
    if n4 < 1
      then 1
      else (b5 * pow6(b7, n8 - 1))
in
  pow9(2, 7)
end
```

```
fdec0k(s, s_outer, d@FunDec(f, args, t, e)) :- {s_fun Ts T S}
```

```
new s_fun, s_fun -P-> s,
typesOfArgs(s_fun, s_outer, args) == Ts,
typeOfType(s_outer, t) == T,
declareVar(s, f, FUN(Ts, T)),
typeOfExp(s_fun, e) == S,
subtype0(t, S, T).
```

```
typeOfArg(s_fun, s_outer, FArg(x, t)) = T :-
typeOfType(s_outer, t) == T,
declareVar(s_fun, x, T).
```

```
typeOfExp(s, Call(f, es)) = T :- {Ts Ss}
lookupVar(s, f) == FUN(Ts, T),
typeOfExps(s, es) == Ss,
subtypes(Ss, Ts).
```

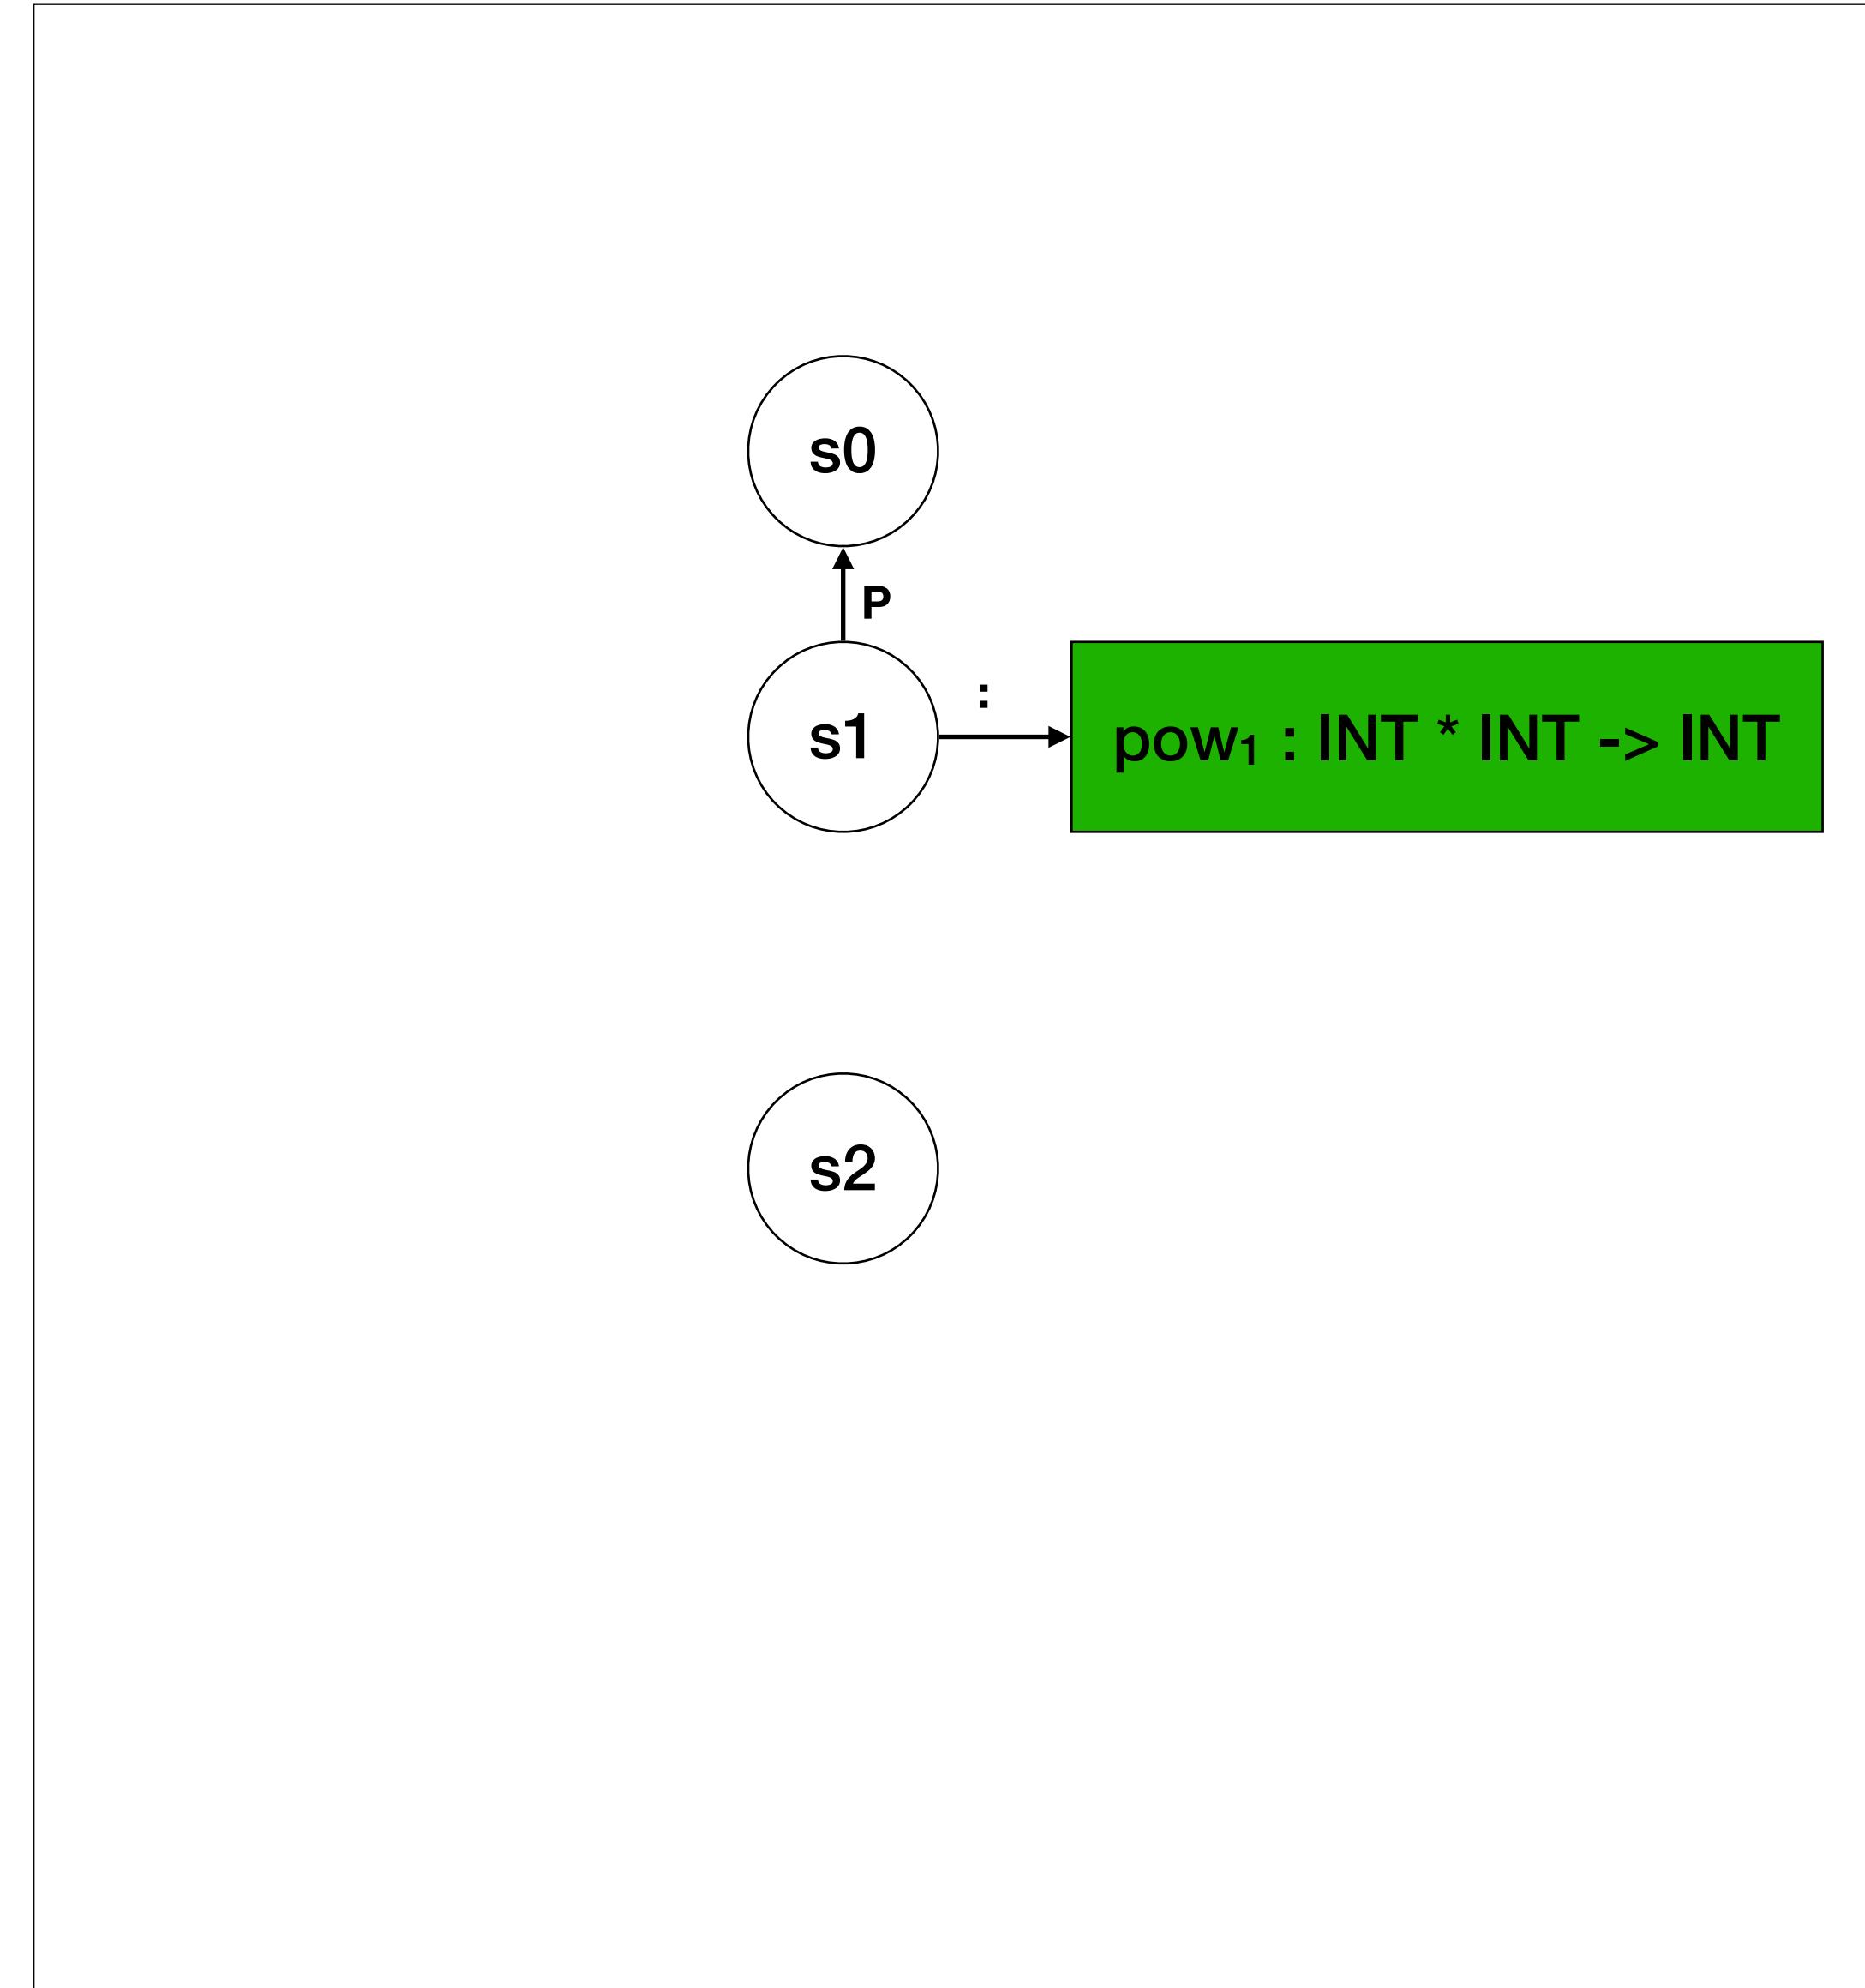

# Function Declarations and References

```

let
  function pow1(b2 : int, n3 : int) : int =
    if n4 < 1
      then 1
      else (b5 * pow6(b7, n8 - 1))
in
  pow9(2, 7)
end

```

```

fdec0k(s, s_outer, d@FunDec(f, args, t, e)) :- {s_fun Ts T S}
  new s_fun, [s_fun -P-> s,
  types0fArgs(s_fun, s_outer, args) == Ts,
  type0fType(s_outer, t) == T,
  declareVar(s, f, FUN(Ts, T)),
  type0fExp(s_fun, e) == S,
  subtype0(t, S, T).

```

```


type0fArg(s_fun, s_outer, FArg(x, t)) = T :-
  type0fType(s_outer, t) == T,
  declareVar(s_fun, x, T).

```

```

type0fExp(s, Call(f, es)) = T :- {Ts Ss}
  lookupVar(s, f) == FUN(Ts, T),
  type0fExps(s, es) == Ss,
  subtypes(Ss, Ts).

```

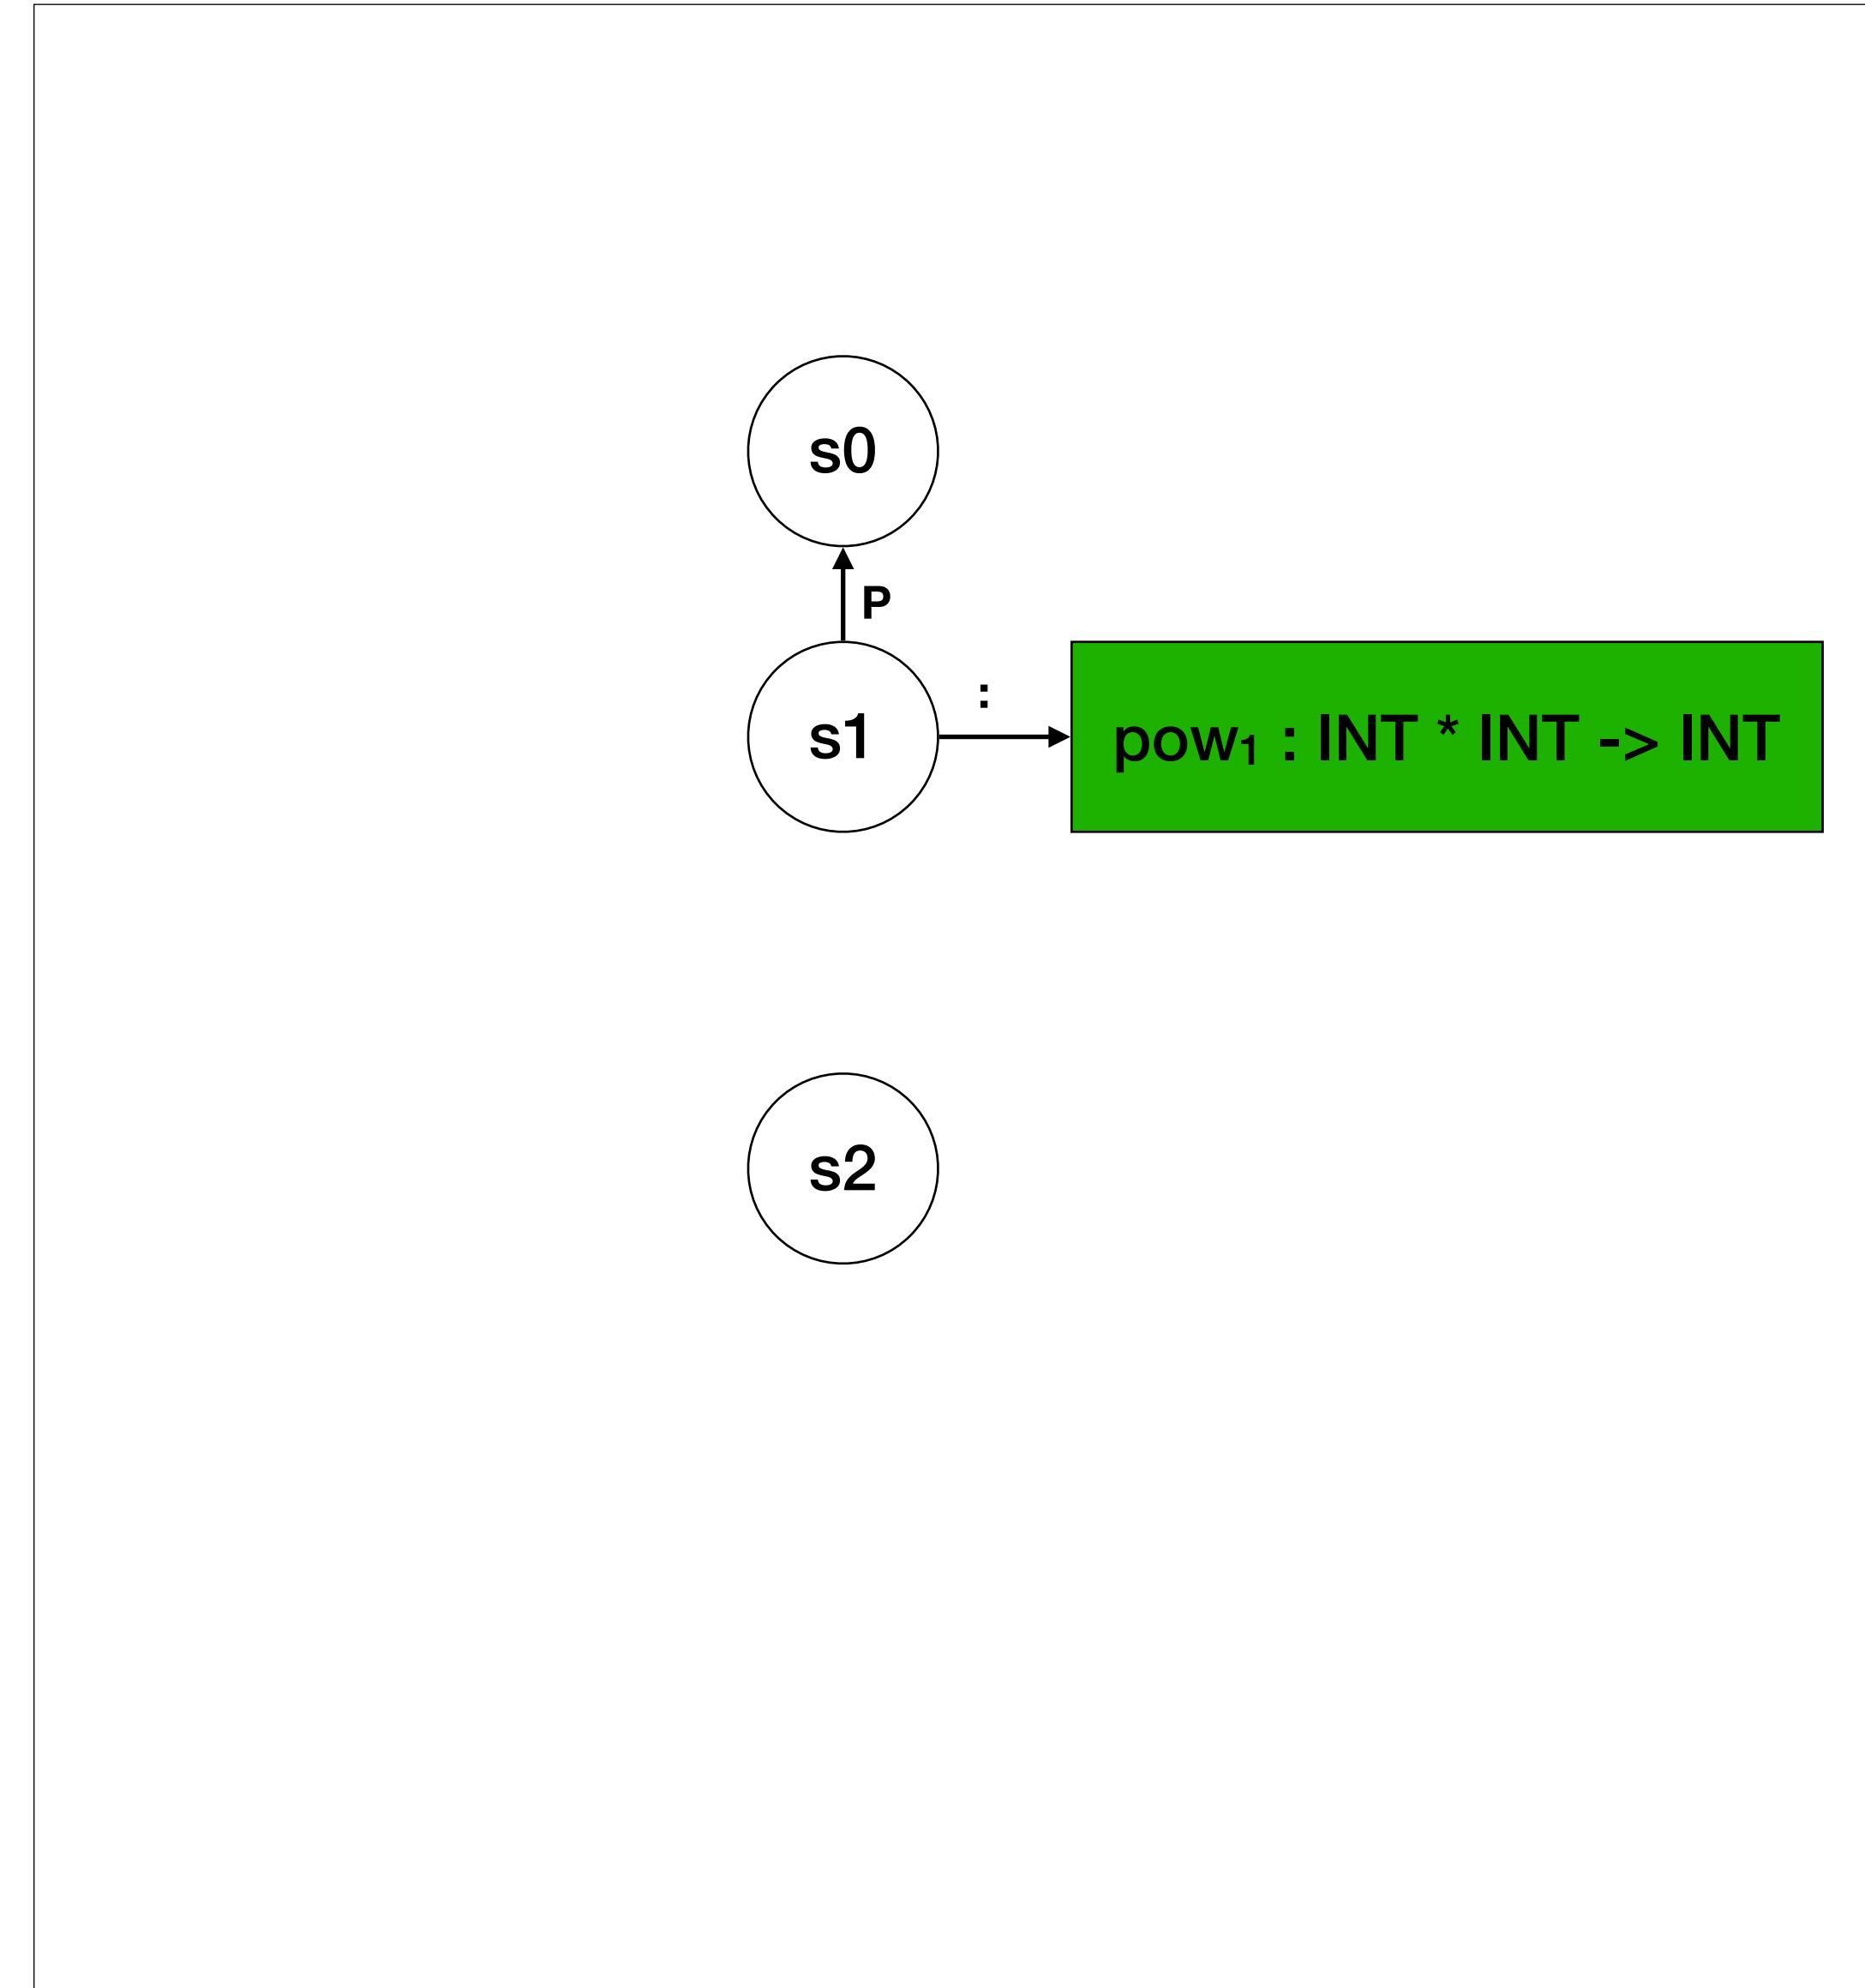

# Function Declarations and References

```
let
```

```
    function pow1(b2 : int, n3 : int) : int =  
        if n4 < 1  
        then 1  
        else (b5 * pow6(b7, n8 - 1))
```

```
in
```

```
    pow9(2, 7)
```

```
end
```

s0

s1


s2

```
fdec0k(s, s_outer, d@FunDec(f, args, t, e)) :- {s_fun Ts T S}
```

```
new s_fun, [s_fun -P-> s,  
types0fArgs(s_fun, s_outer, args) == Ts,  
type0fType(s_outer, t) == T,  
declareVar(s, f, FUN(Ts, T)),  
type0fExp(s_fun, e) == S,  
subtype0(t, S, T).
```

```
type0fArg(s_fun, s_outer, FArg(x, t)) = T :-  
type0fType(s_outer, t) == T,  
declareVar(s_fun, x, T).
```

```
type0fExp(s, Call(f, es)) = T :- {Ts Ss}  
lookupVar(s, f) == FUN(Ts, T),  
type0fExps(s, es) == Ss,  
subtypes(Ss, Ts).
```

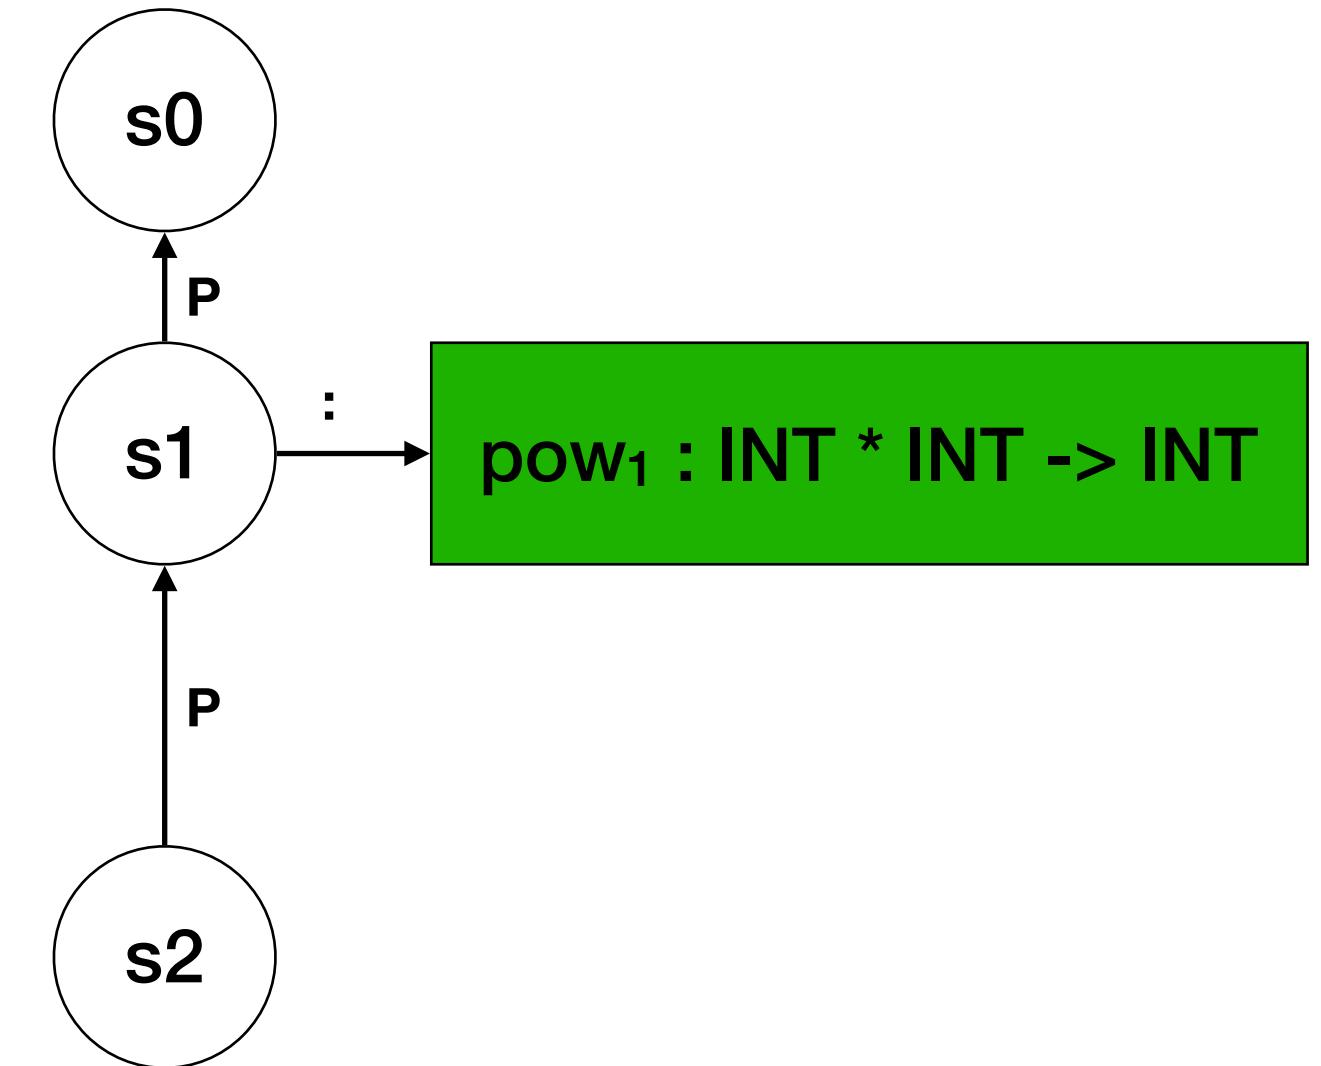

# Function Declarations and References

let

```
function pow1(b2 : int, n3 : int) : int =
  if n4 < 1
    then 1
    else (b5 * pow6(b7, n8 - 1))
```

in

pow<sub>9</sub>(2, 7)

end

s<sub>0</sub>

s<sub>1</sub>

s<sub>2</sub>

fdec0k(s, s\_outer, d@FunDec(f, args, t, e)) :- {s\_fun Ts T S}

new s\_fun, s\_fun -P-> s,

typesOfArgs(s\_fun, s\_outer, args) == Ts,

typeOfType(s\_outer, t) == T,

declareVar(s, f, FUN(Ts, T)),

typeOfExp(s\_fun, e) == S,

subtype0(t, S, T).

typeOfArg(s\_fun, s\_outer, FArg(x, t)) = T :-

typeOfType(s\_outer, t) == T,


declareVar(s\_fun, x, T).

typeOfExp(s, Call(f, es)) = T :- {Ts Ss}

lookupVar(s, f) == FUN(Ts, T),

typeOfExps(s, es) == Ss,

subtypes(Ss, Ts).

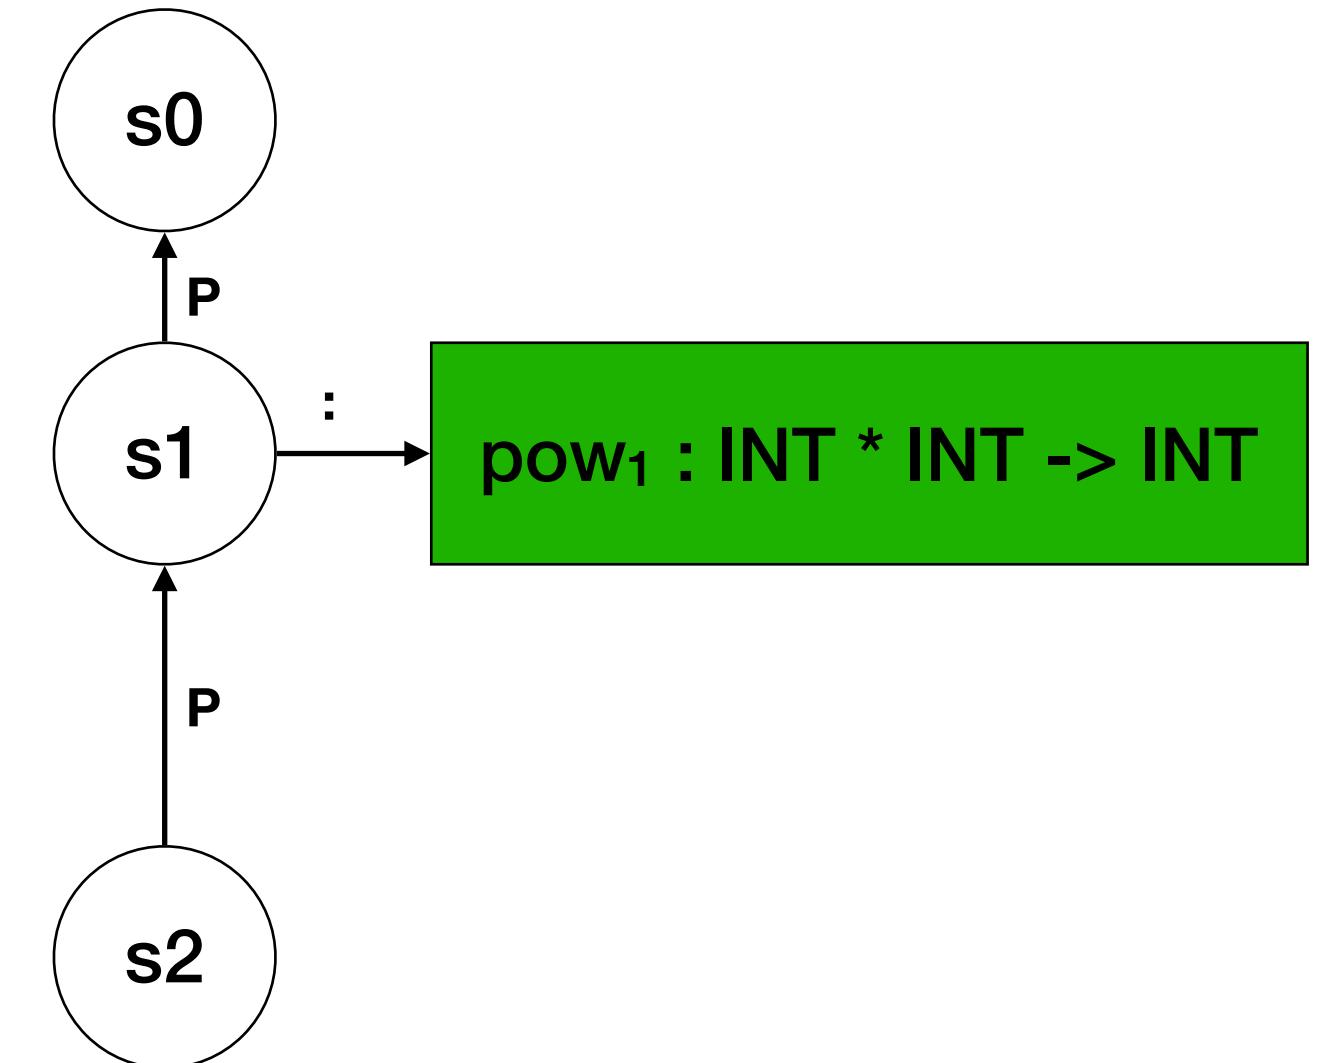

# Function Declarations and References

```
let
```

```
function pow1(b2 : int, n3 : int) : int =  
    if n4 < 1  
        then 1  
        else (b5 * pow6(b7, n8 - 1))
```

```
in
```

```
pow9(2, 7)
```

```
end
```

s0


s1

s2

```
fdec0k(s, s_outer, d@FunDec(f, args, t, e)) :- {s_fun Ts T S}  
new s_fun, s_fun -P-> s,  
types0fArgs(s_fun, s_outer, args) == Ts,  
type0fType(s_outer, t) == T,  
declareVar(s, f, FUN(Ts, T)),  
type0fExp(s_fun, e) == S,  
subtype0(t, S, T).
```

```
type0fArg(s_fun, s_outer, FArg(x, t)) = T :-  
type0fType(s_outer, t) == T,  
declareVar(s_fun, x, T).
```

```
type0fExp(s, Call(f, es)) = T :- {Ts Ss}  
lookupVar(s, f) == FUN(Ts, T),  
type0fExps(s, es) == Ss,  
subtypes(Ss, Ts).
```

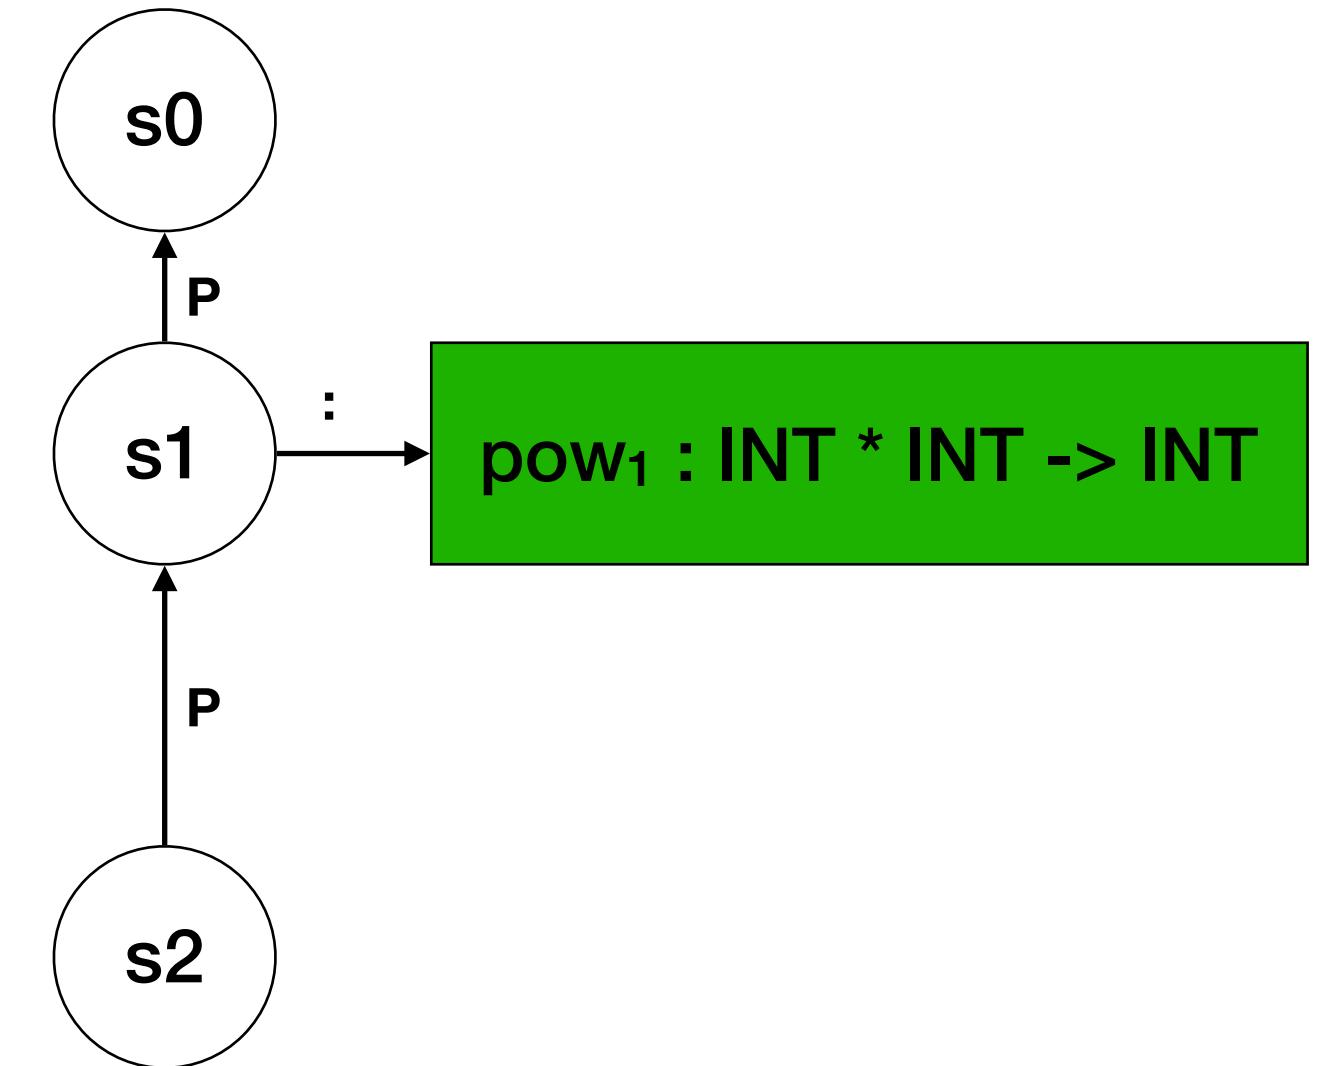

# Function Declarations and References

let

```
function pow1(b2 : int, n3 : int) : int =
  if n4 < 1
    then 1
    else (b5 * pow6(b7, n8 - 1))
```

in

```
pow9(2, 7)
```

end

s<sub>0</sub>


s<sub>1</sub>

s<sub>2</sub>

```
fdec0k(s, s_outer, d@FunDec(f, args, t, e)) :- {s_fun Ts T S}
  new s_fun, s_fun -P-> s,
  typesOfArgs(s_fun, s_outer, args) == Ts,
  typeOfType(s_outer, t) == T,
  declareVar(s, f, FUN(Ts, T)),
  typeOfExp(s_fun, e) == S,
  subtype0(t, S, T).
```

```
typeOfArg(s_fun, s_outer, FArg(x, t)) = T :-
  typeOfType(s_outer, t) == T,
  declareVar(s_fun, x, T).
```

```
typeOfExp(s, Call(f, es)) = T :- {Ts Ss}
  lookupVar(s, f) == FUN(Ts, T),
  typeOfExps(s, es) == Ss,
  subtypes(Ss, Ts).
```

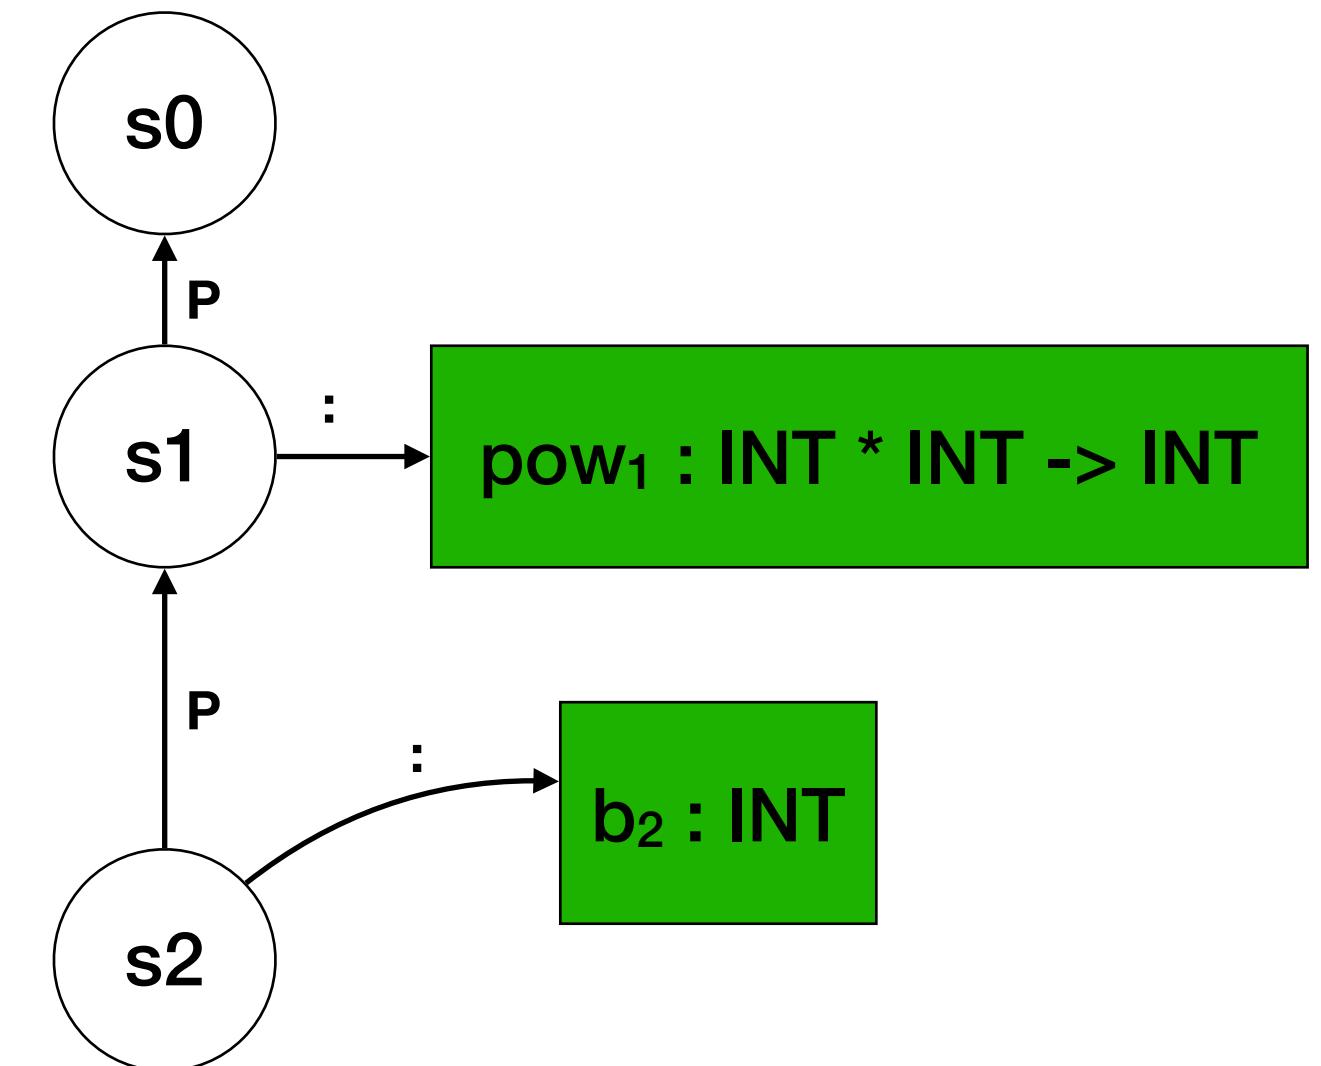

# Function Declarations and References

let

```
function pow1(b2 : int, n3 : int) : int =
  if n4 < 1
    then 1
    else (b5 * pow6(b7, n8 - 1))
```

in

```
pow9(2, 7)
```

end

s<sub>0</sub>


s<sub>1</sub>

s<sub>2</sub>

```
fdec0k(s, s_outer, d@FunDec(f, args, t, e)) :- {s_fun Ts T S}
  new s_fun, s_fun -P-> s,
  types0fArgs(s_fun, s_outer, args) == Ts,
  type0fType(s_outer, t) == T,
  declareVar(s, f, FUN(Ts, T)),
  type0fExp(s_fun, e) == S,
  subtype0(t, S, T).
```

```
type0fArg(s_fun, s_outer, FArg(x, t)) = T :-
  type0fType(s_outer, t) == T,
  declareVar(s_fun, x, T).
```

```
type0fExp(s, Call(f, es)) = T :- {Ts Ss}
  lookupVar(s, f) == FUN(Ts, T),
  type0fExps(s, es) == Ss,
  subtypes(Ss, Ts).
```

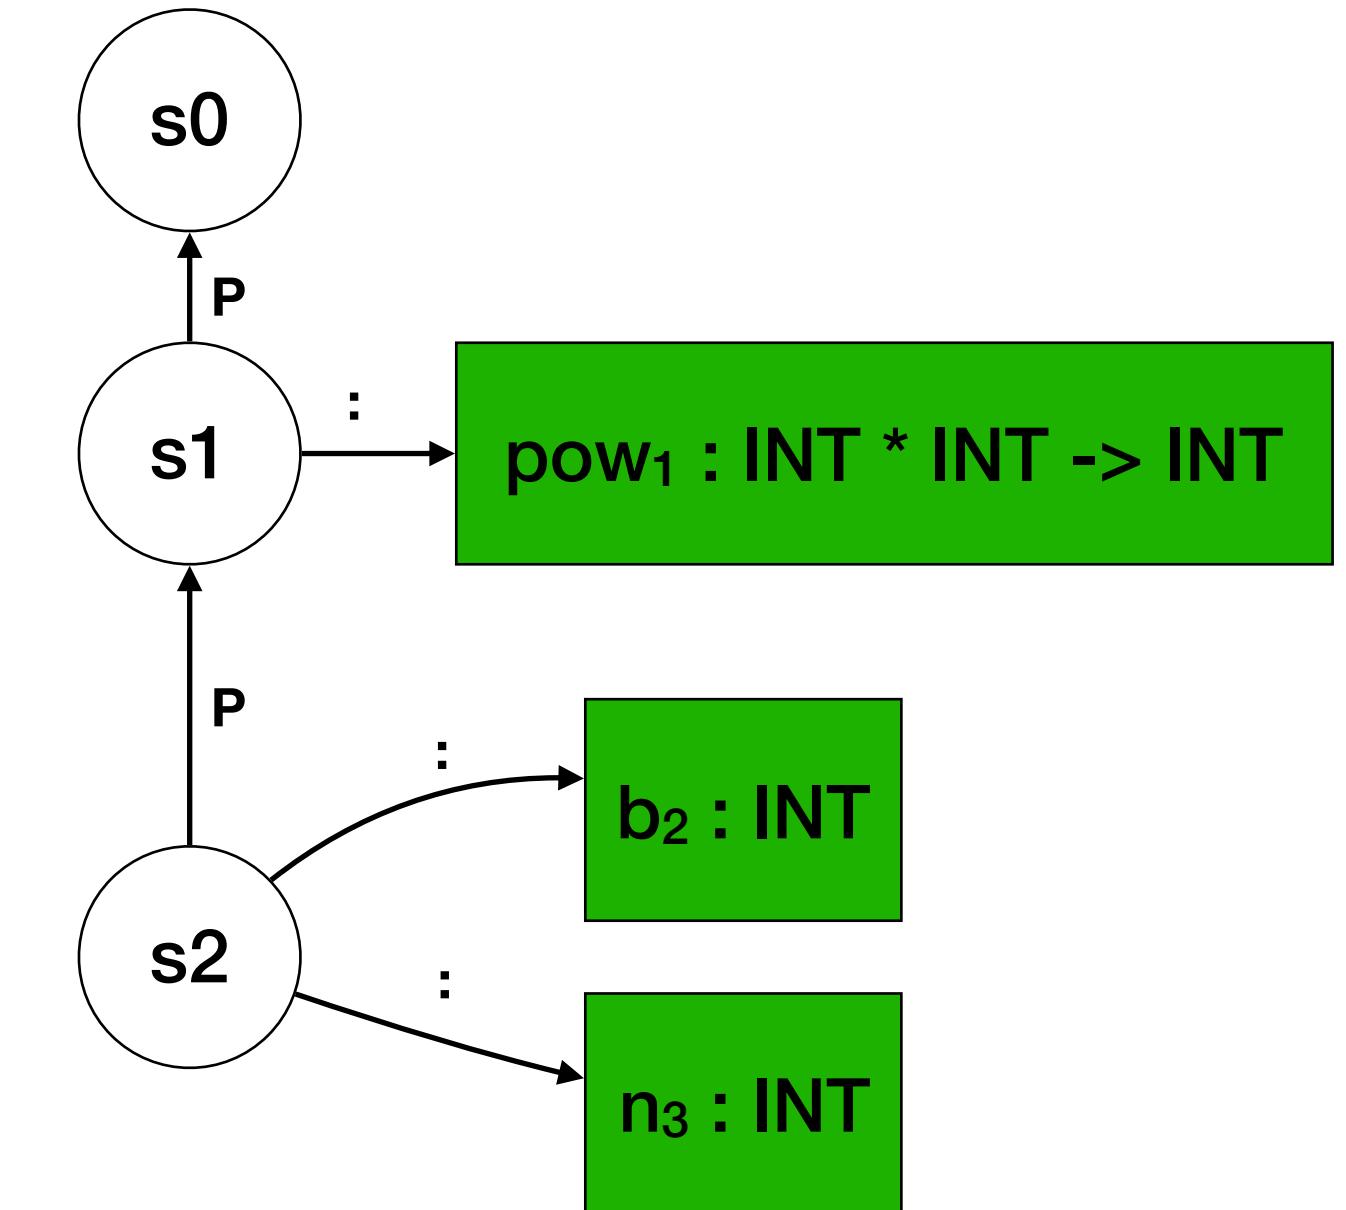

# Function Declarations and References

```

let
  function pow1(b2 : int, n3 : int) : int =
    if n4 < 1
      then 1
      else (b5 * pow6(b7, n8 - 1))
in
  pow9(2, 7)
end

```

```

fdec0k(s, s_outer, d@FunDec(f, args, t, e)) :- {s_fun Ts T S}
  new s_fun, s_fun -P-> s,
  types0fArgs(s_fun, s_outer, args) == Ts,
  type0fType(s_outer, t) == T,
  declareVar(s, f, FUN(Ts, T)),
  type0fExp(s_fun, e) == S,
  subtype0(t, S, T).

```

```


type0fArg(s_fun, s_outer, FArg(x, t)) = T :-
  type0fType(s_outer, t) == T,
  declareVar(s_fun, x, T).

```

```

type0fExp(s, Call(f, es)) = T :- {Ts Ss}
  lookupVar(s, f) == FUN(Ts, T),
  type0fExps(s, es) == Ss,
  subtypes(Ss, Ts).

```

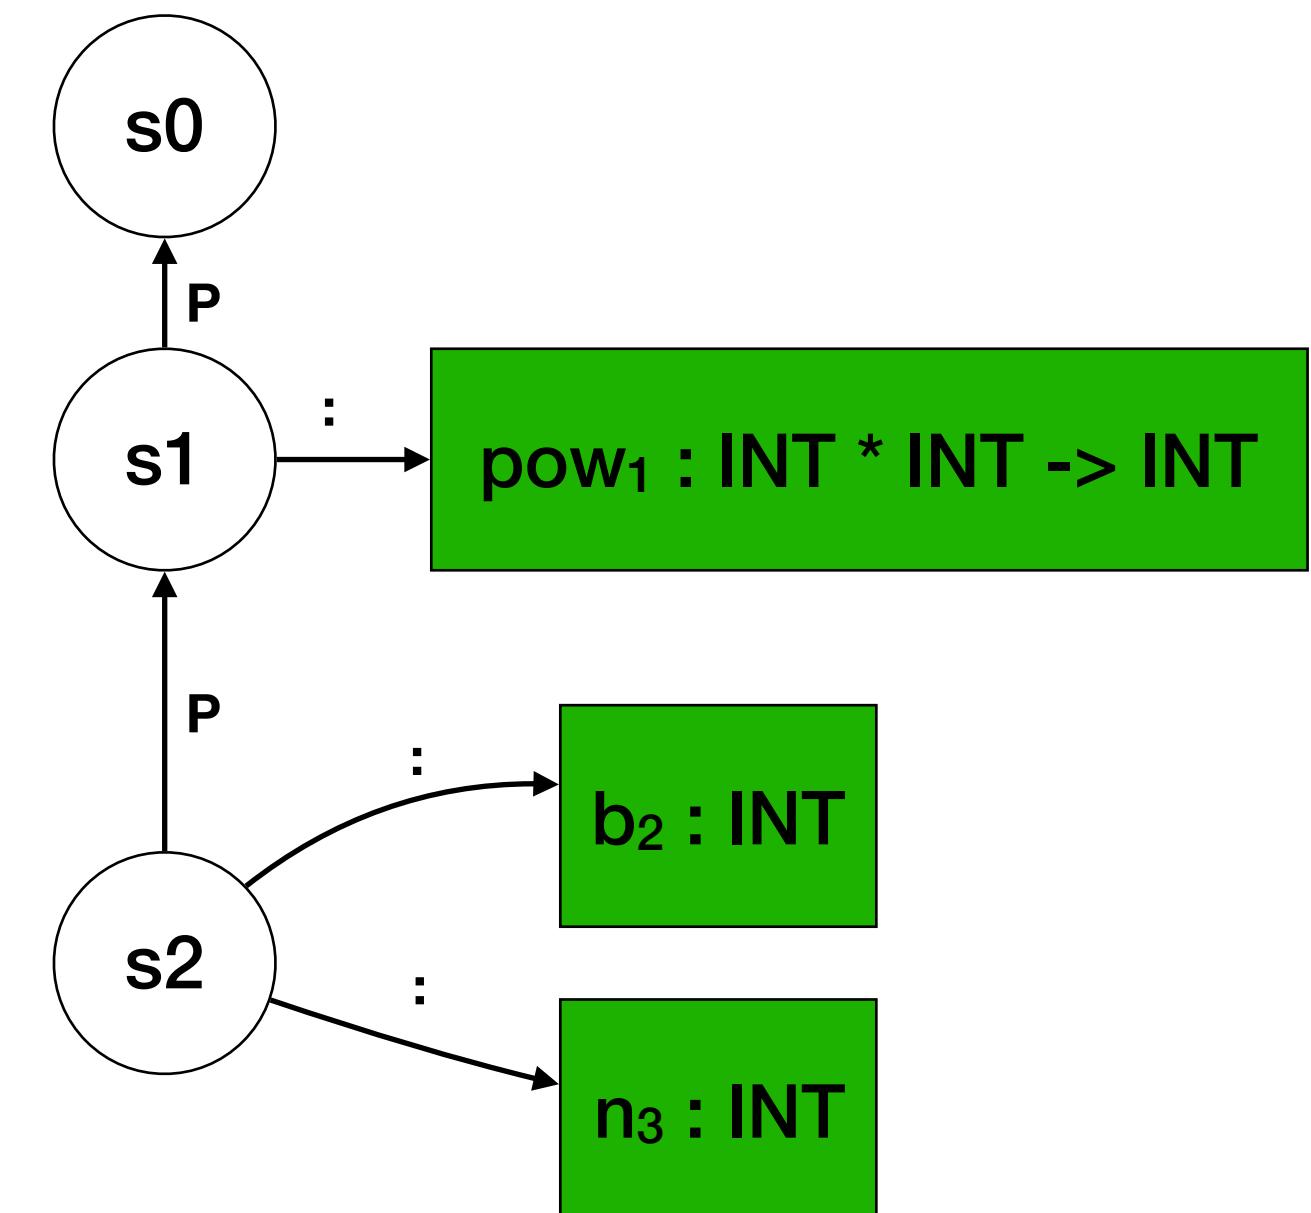

# Function Declarations and References

```

let
  function pow1(b2 : int, n3 : int) : int =
    if n4 < 1
      then 1
      else (b5 * pow6(b7, n8 - 1))
in
  pow9(2, 7)
end

```

```

fdec0k(s, s_outer, d@FunDec(f, args, t, e)) :- {s_fun Ts T S}
  new s_fun, s_fun -P-> s,
  typesOfArgs(s_fun, s_outer, args) == Ts,
  typeOfType(s_outer, t) == T,
  declareVar(s, f, FUN(Ts, T)),
  typeOfExp(s_fun, e) == S,
  subtype0(t, S, T).

```

```


typeOfArg(s_fun, s_outer, FArg(x, t)) = T :-
  typeOfType(s_outer, t) == T,
  declareVar(s_fun, x, T).

```

```

typeOfExp(s, Call(f, es)) = T :- {Ts Ss}
  lookupVar(s, f) == FUN(Ts, T),
  typeOfExps(s, es) == Ss,
  subtypes(Ss, Ts).

```

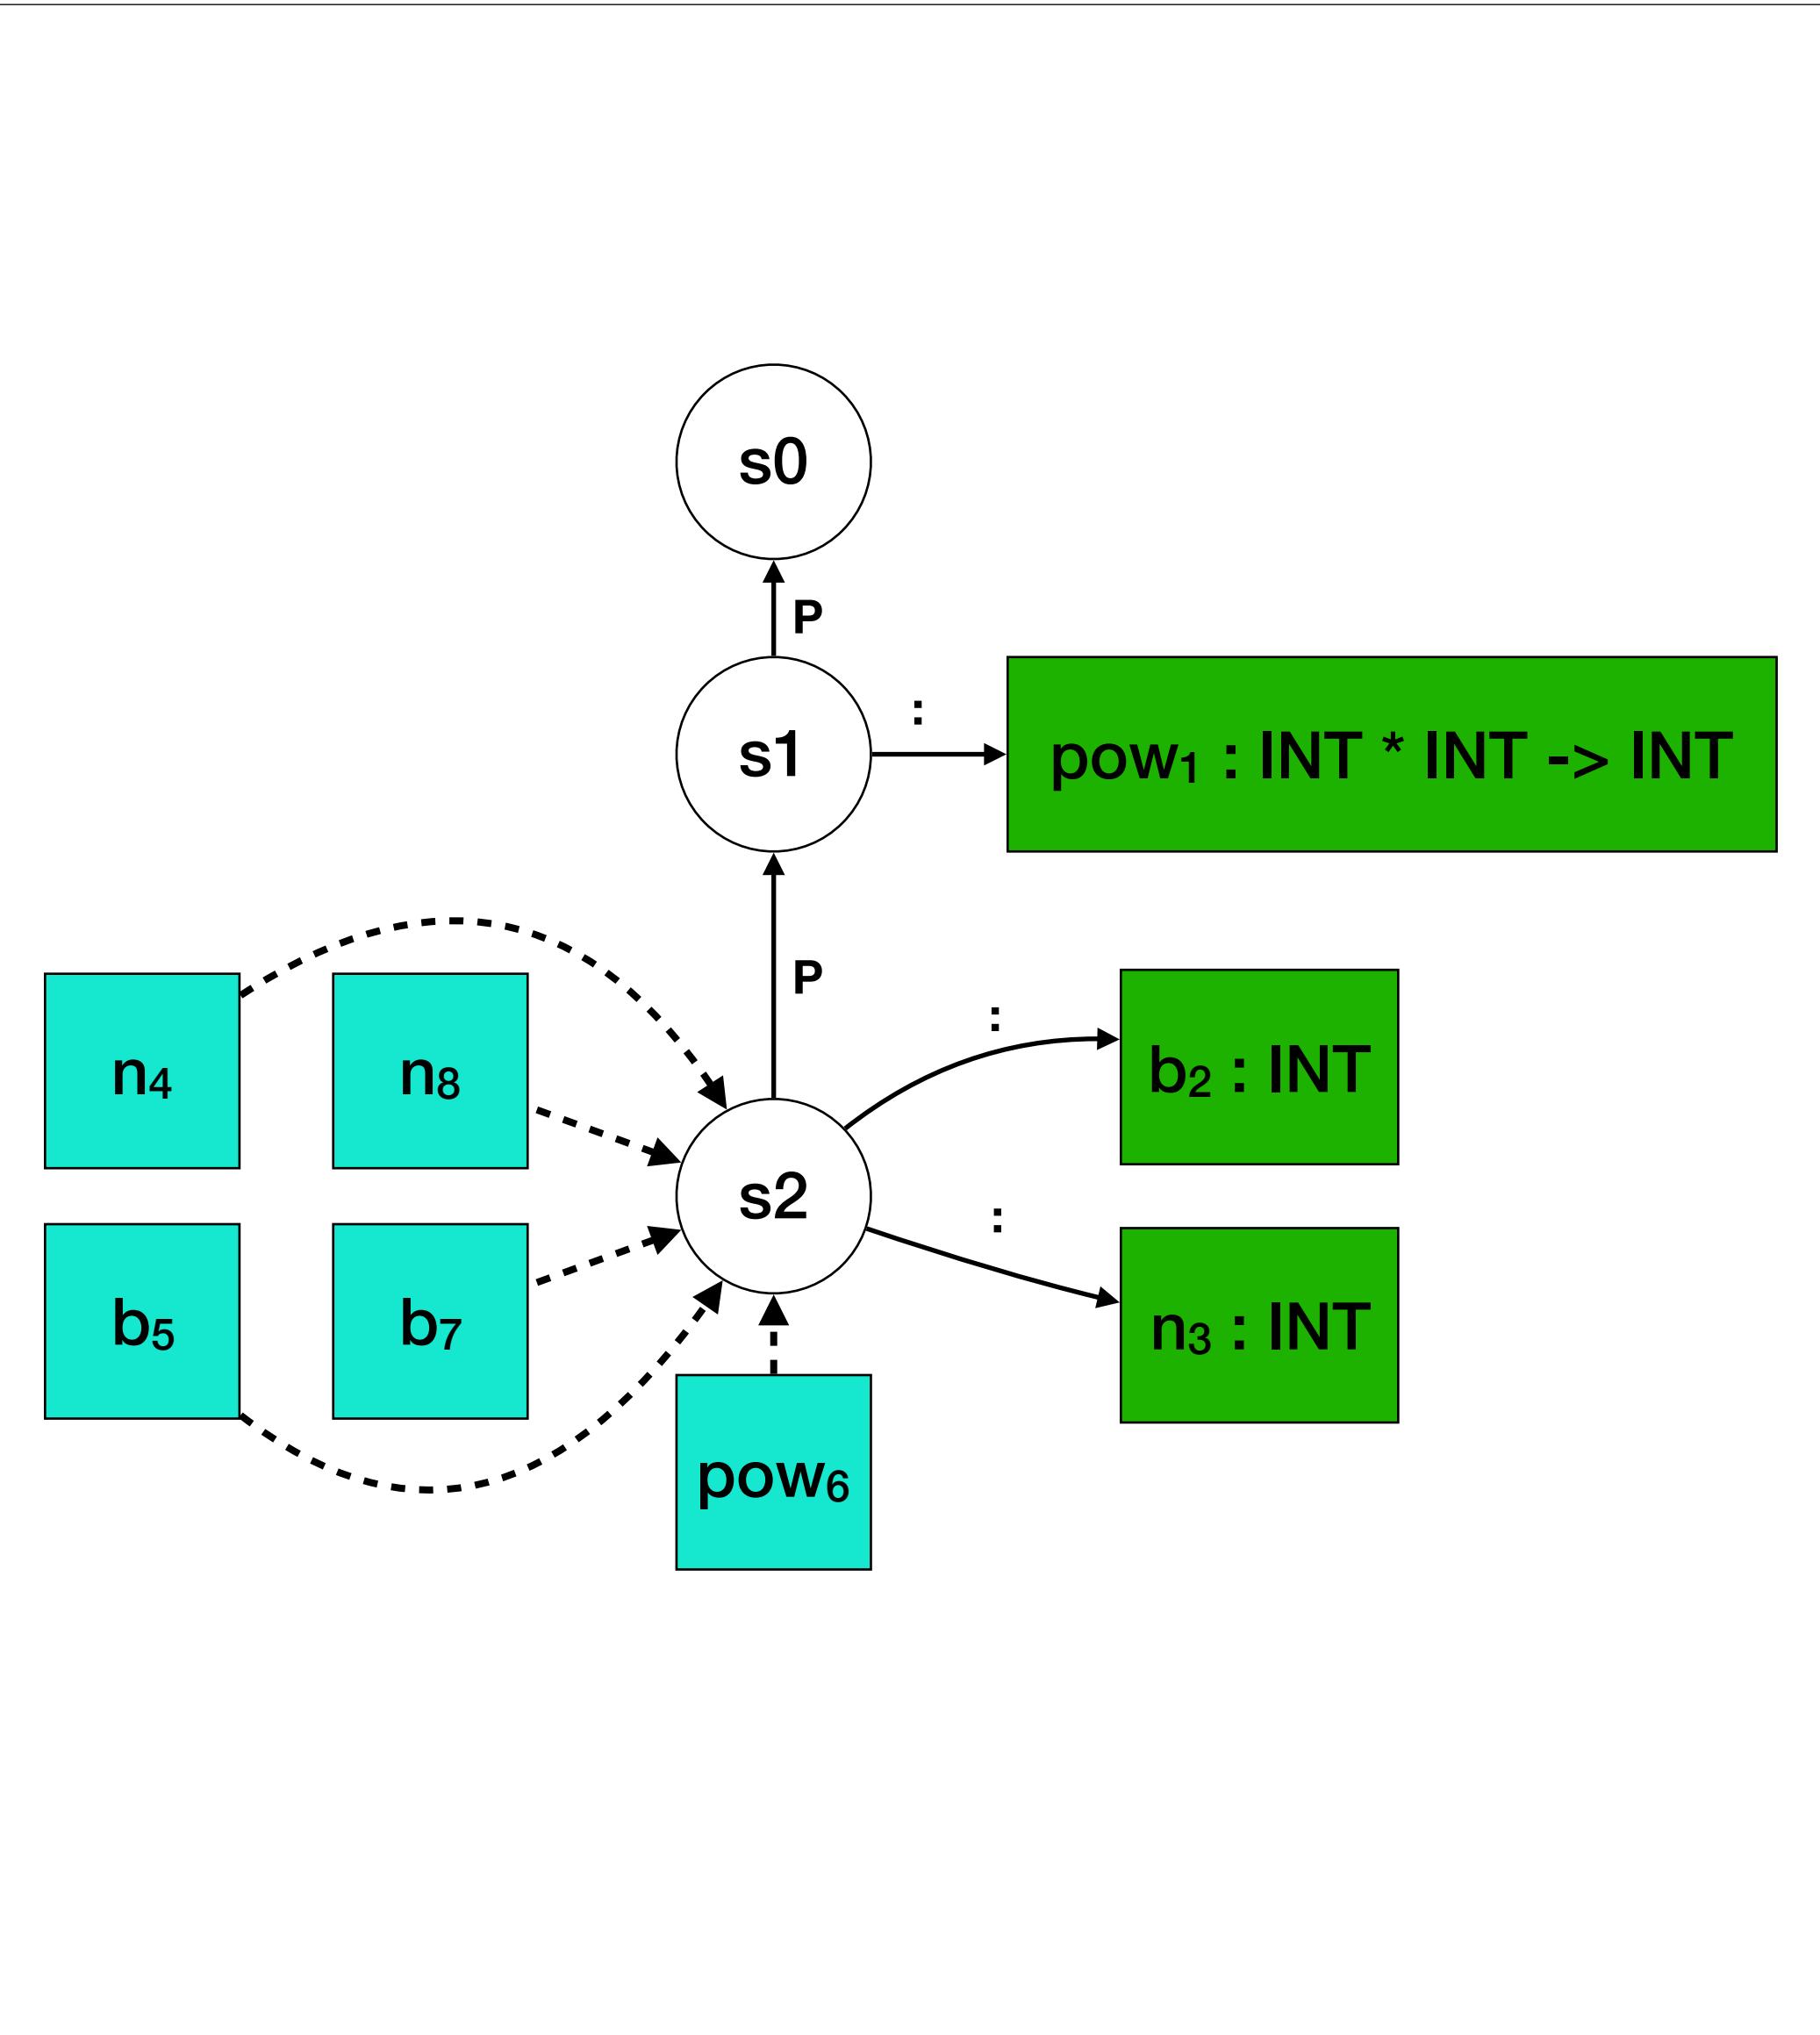

# Function Declarations and References

```

let
  function pow1(b2 : int, n3 : int) : int =
    if n4 < 1
      then 1
      else (b5 * pow6(b7, n8 - 1))
in
  pow9(2, 7)
end

```


```

fdec0k(s, s_outer, d@FunDec(f, args, t, e)) :- {s_fun Ts T S}
  new s_fun, s_fun -P-> s,
  types0fArgs(s_fun, s_outer, args) == Ts,
  type0fType(s_outer, t) == T,
  declareVar(s, f, FUN(Ts, T)),
  type0fExp(s_fun, e) == S,
  subtype0(t, S, T).

type0fArg(s_fun, s_outer, FArg(x, t)) = T :-
  type0fType(s_outer, t) == T,
  declareVar(s_fun, x, T).

type0fExp(s, Call(f, es)) = T :- {Ts Ss}
  lookupVar(s, f) == FUN(Ts, T),
  type0fExps(s, es) == Ss,
  subtypes(Ss, Ts).

```

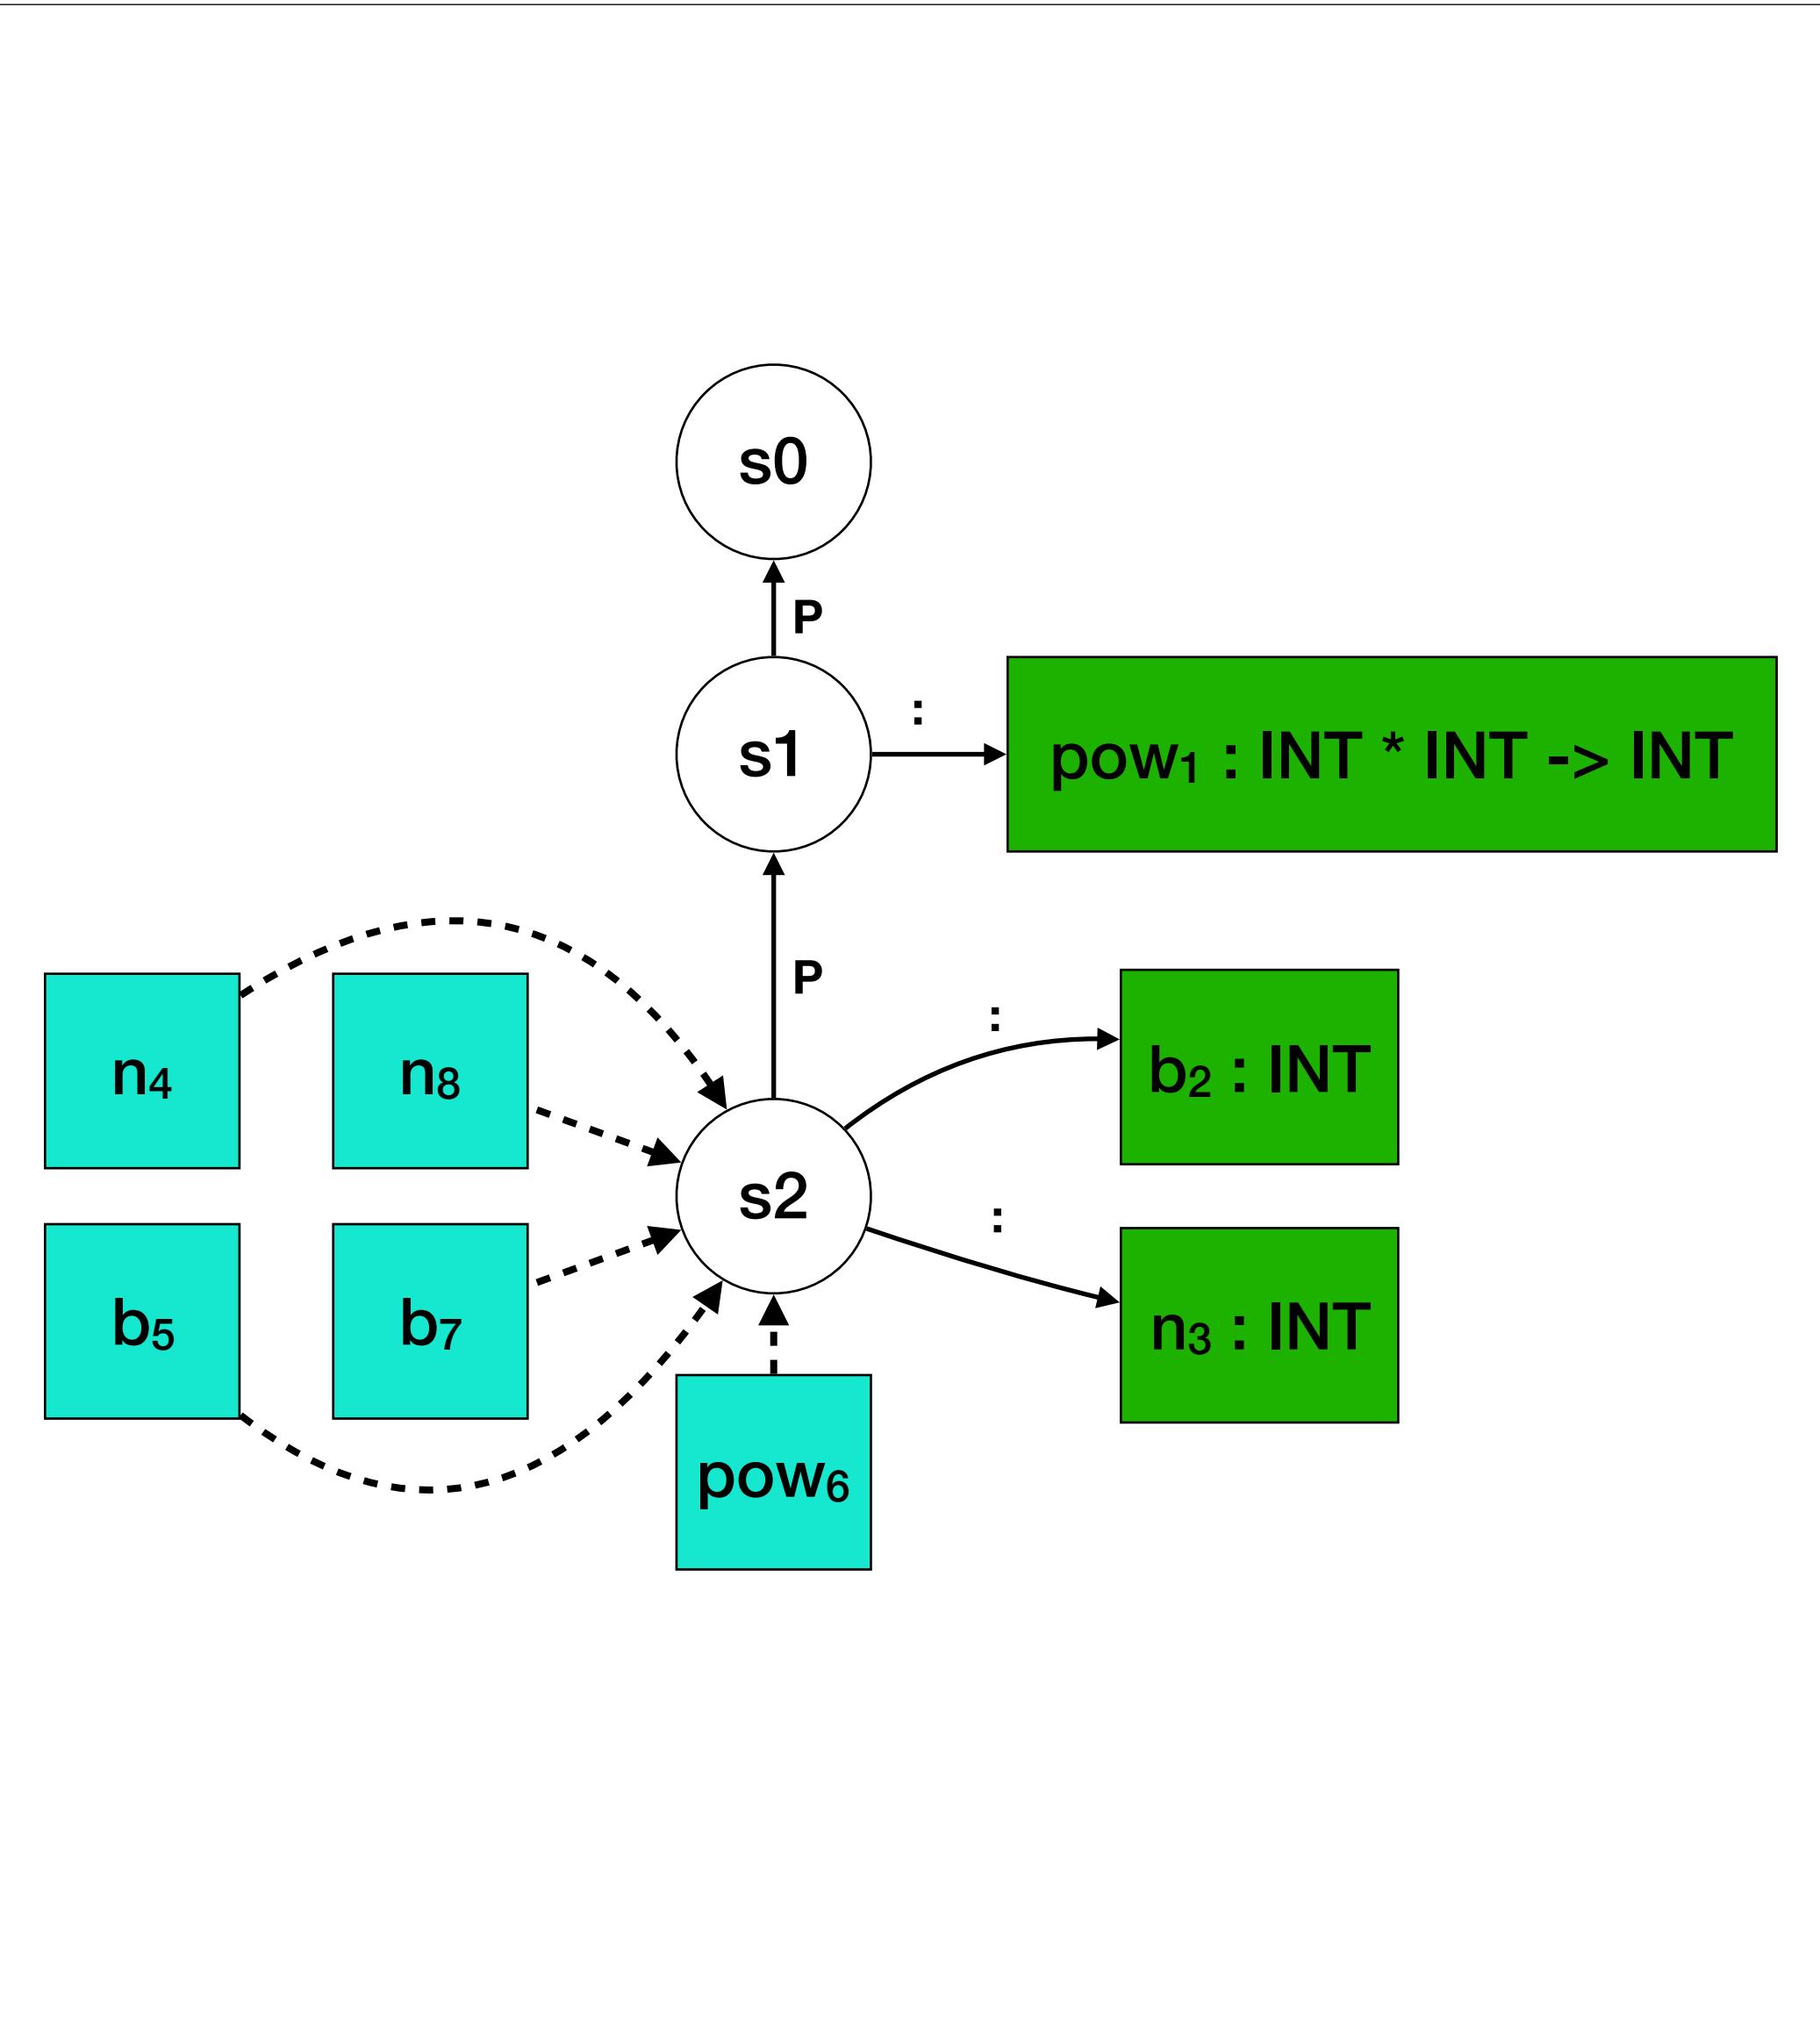

# Function Declarations and References

```

let
  function pow1(b2 : int, n3 : int) : int =
    if n4 < 1
      then 1
      else (b5 * pow6(b7, n8 - 1))
in
  pow9(2, 7)
end

```

```

fdec0k(s, s_outer, d@FunDec(f, args, t, e)) :- {s_fun Ts T S}
  new s_fun, s_fun -P-> s,
  types0fArgs(s_fun, s_outer, args) == Ts,
  type0fType(s_outer, t) == T,
  declareVar(s, f, FUN(Ts, T)),
  type0fExp(s_fun, e) == S,
  subtype0(t, S, T).

```

```


type0fArg(s_fun, s_outer, FArg(x, t)) = T :-
  type0fType(s_outer, t) == T,
  declareVar(s_fun, x, T).

```

```

type0fExp(s, Call(f, es)) = T :- {Ts Ss}
  lookupVar(s, f) == FUN(Ts, T),
  type0fExps(s, es) == Ss,
  subtypes(Ss, Ts).

```

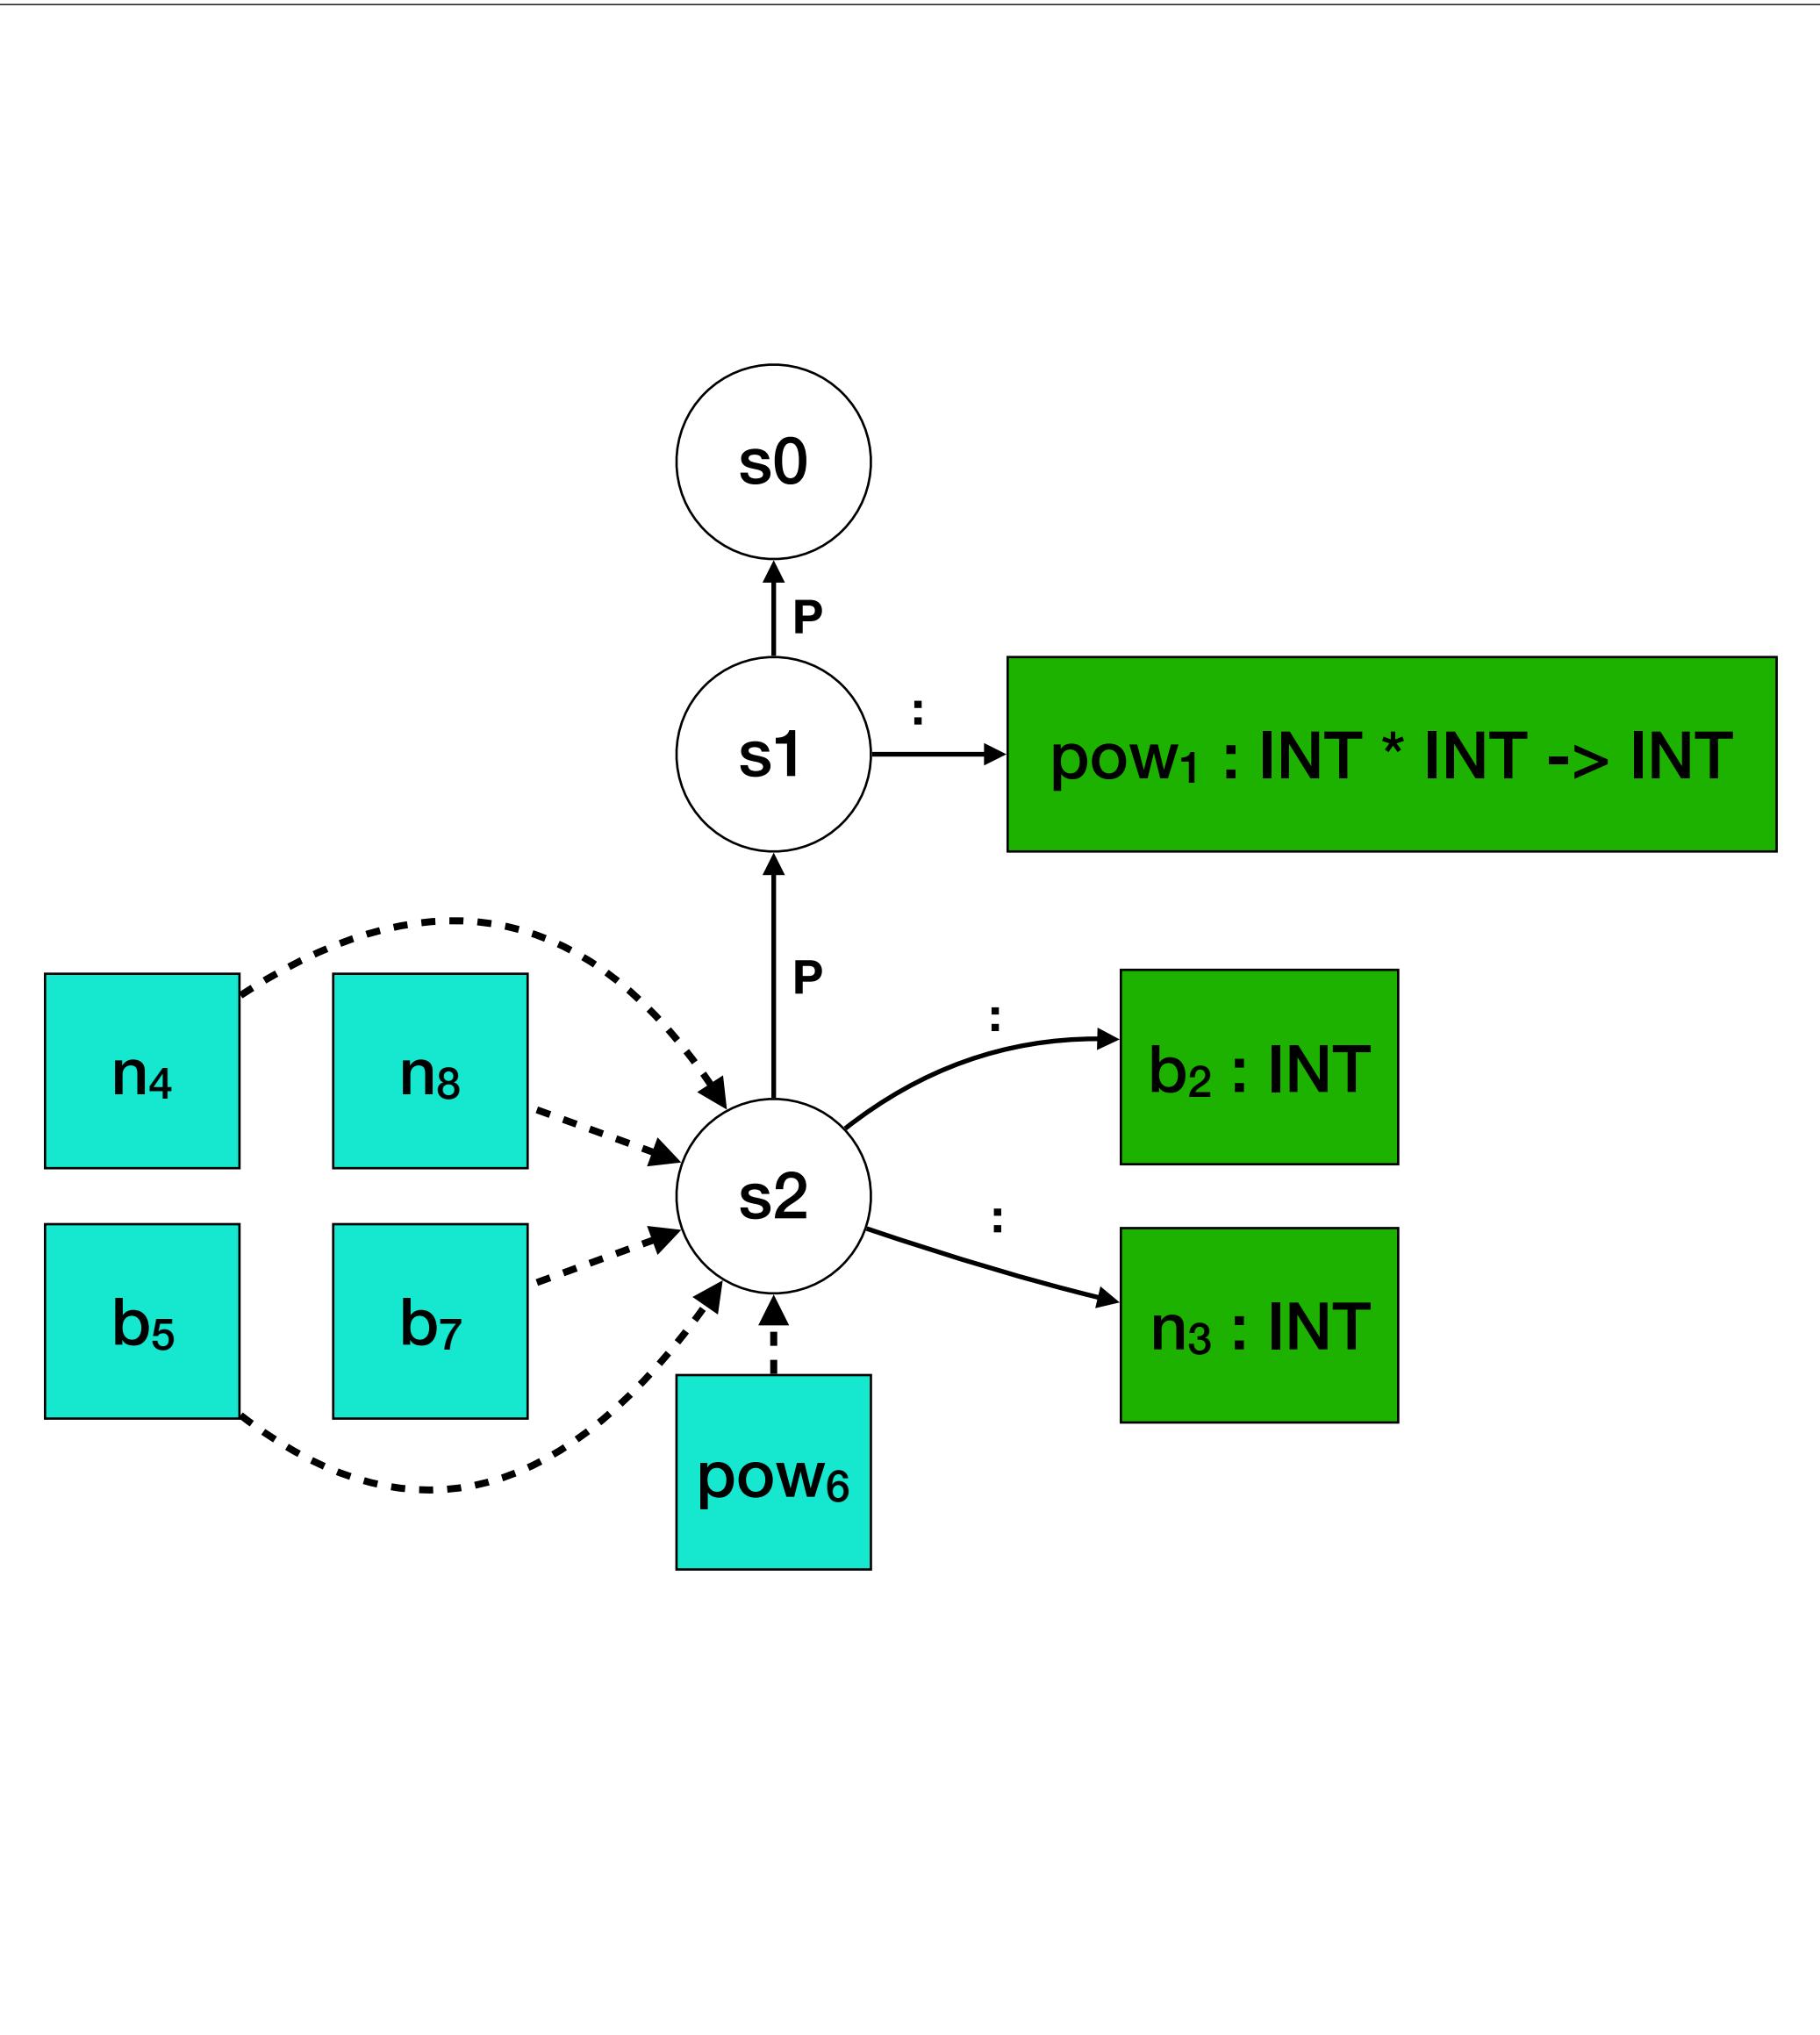

# Function Declarations and References

```

let
  function pow1(b2 : int, n3 : int) : int =
    if n4 < 1
      then 1
      else (b5 * pow6(b7, n8 - 1))
in
  pow9(2, 7)
end

```

```

fdec0k(s, s_outer, d@FunDec(f, args, t, e)) :- {s_fun Ts T S}
  new s_fun, s_fun -P-> s,
  types0fArgs(s_fun, s_outer, args) == Ts,
  type0fType(s_outer, t) == T,
  declareVar(s, f, FUN(Ts, T)),
  type0fExp(s_fun, e) == S,
  subtype0(t, S, T).

```

```


type0fArg(s_fun, s_outer, FArg(x, t)) = T :-
  type0fType(s_outer, t) == T,
  declareVar(s_fun, x, T).

```

```

type0fExp(s, Call(f, es)) = T :- {Ts Ss}
  lookupVar(s, f) == FUN(Ts, T),
  type0fExps(s, es) == Ss,
  subtypes(Ss, Ts).

```

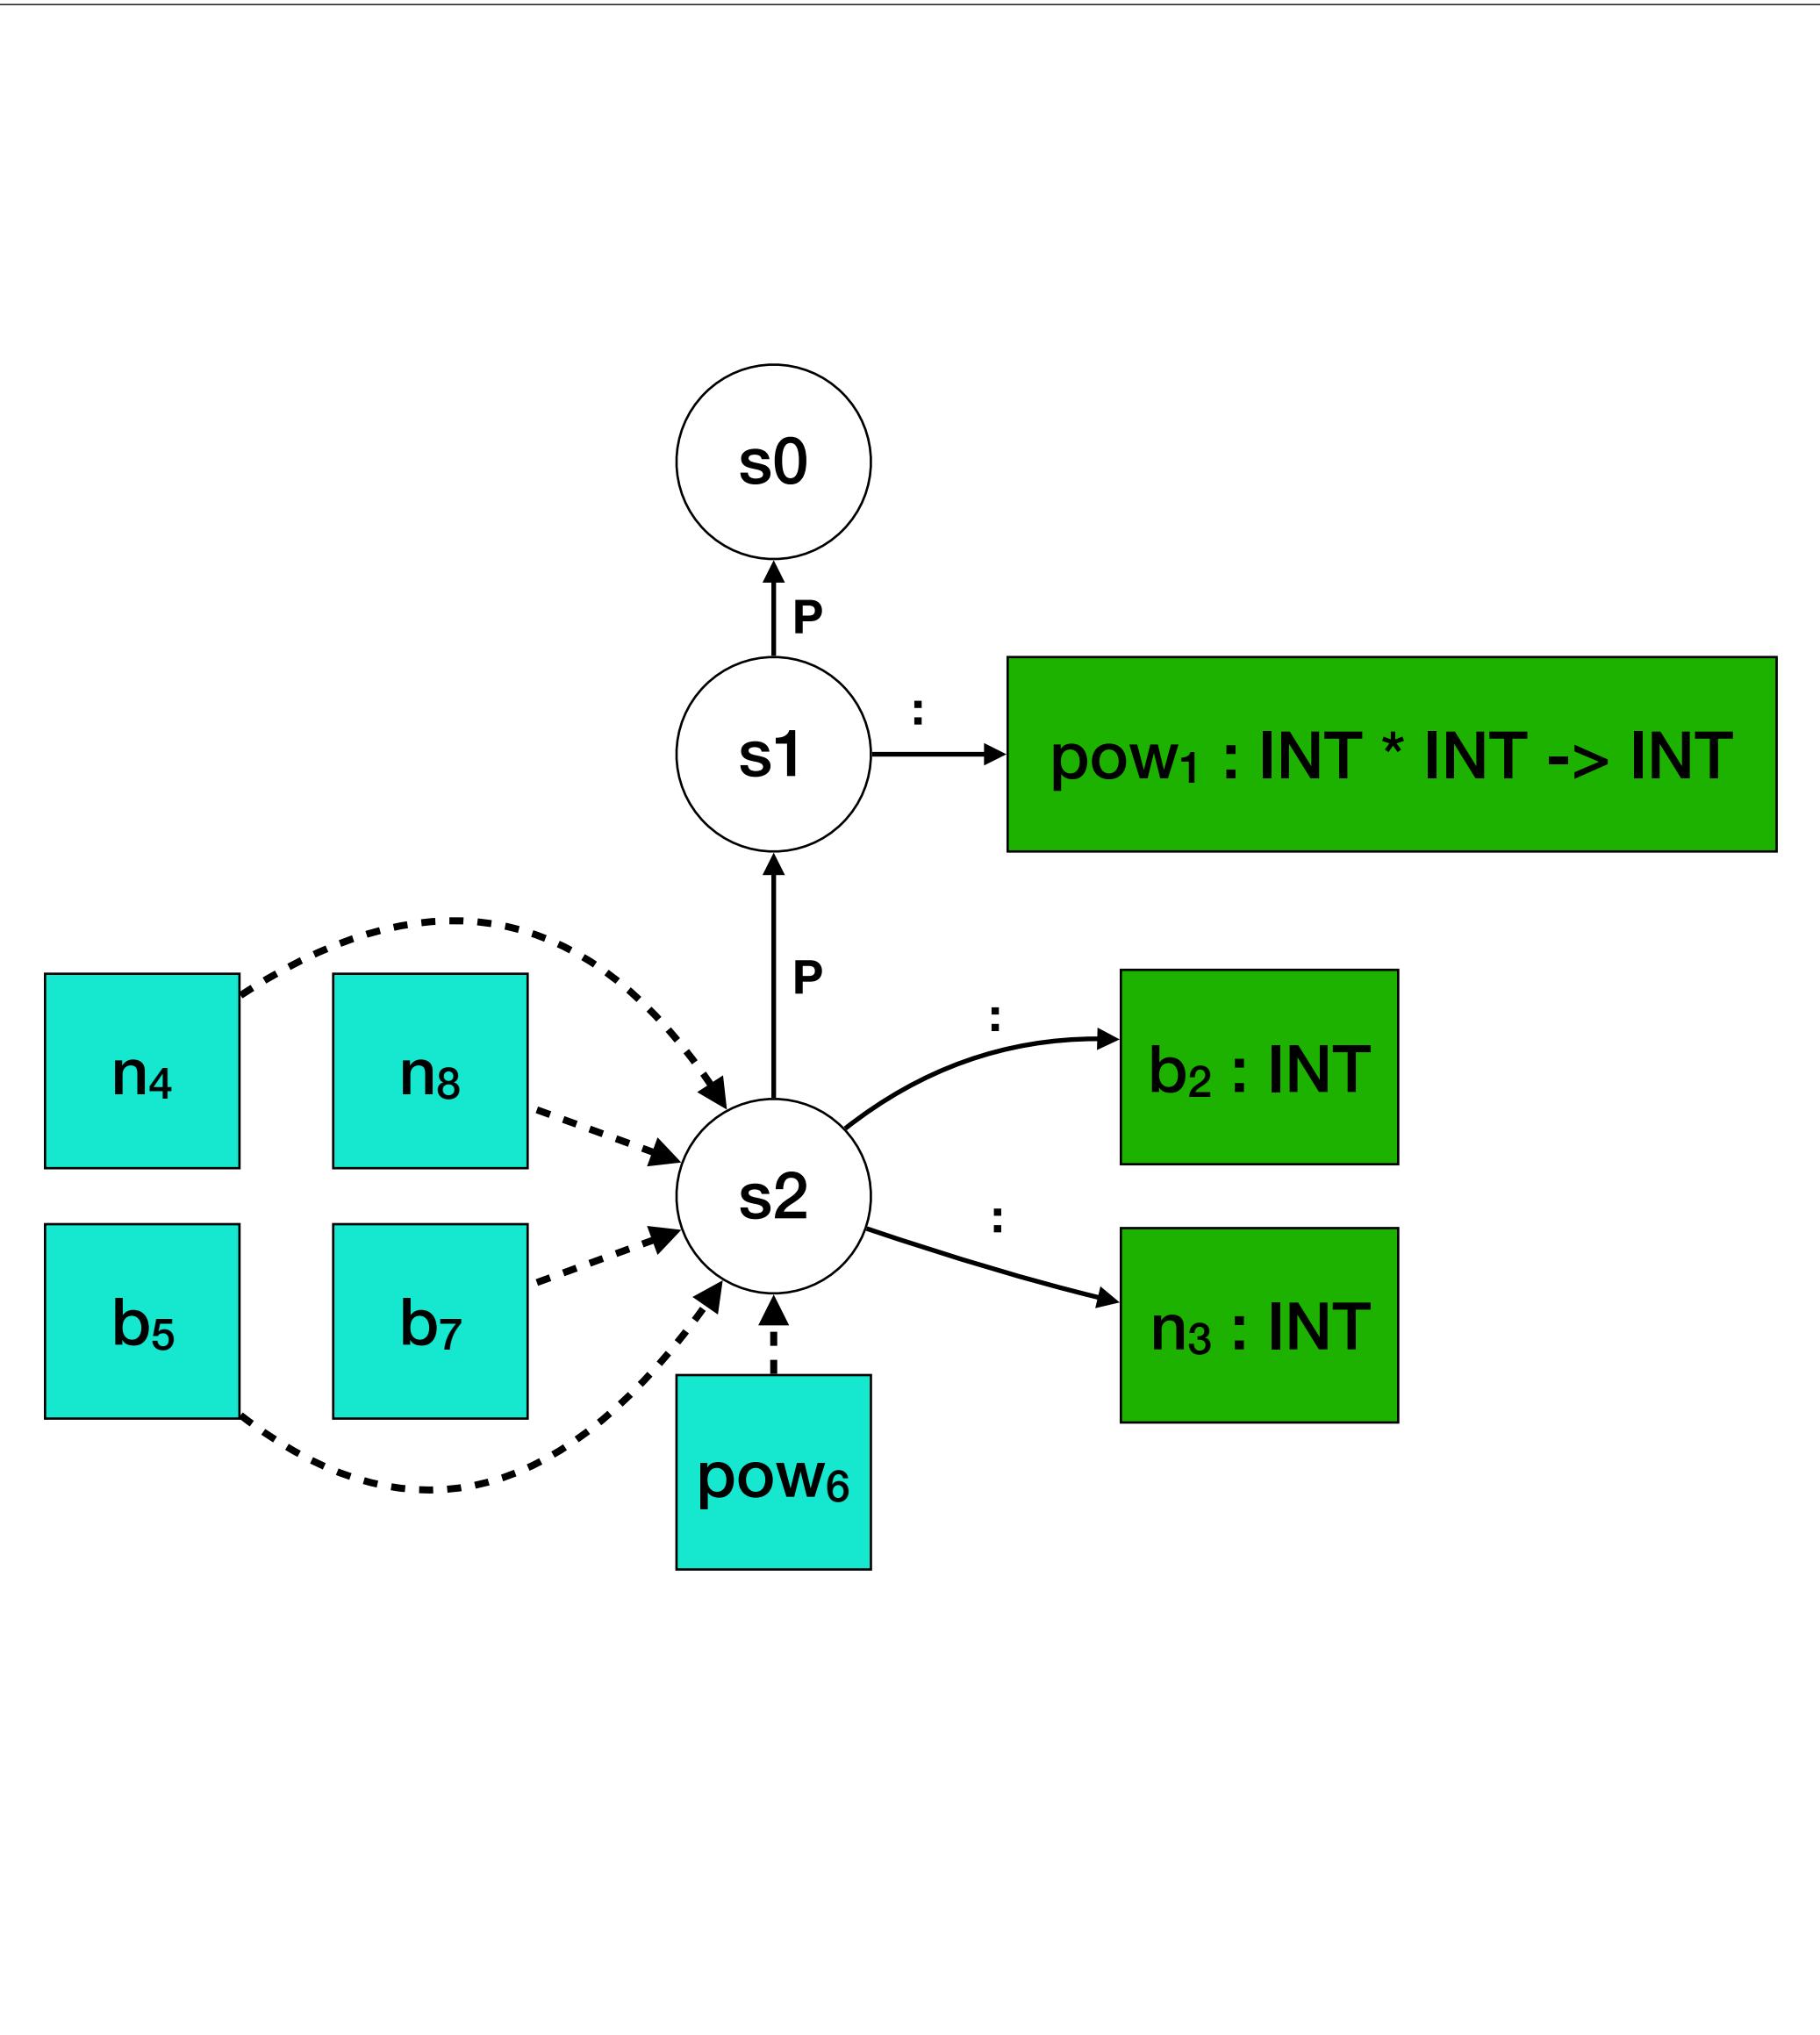

# Function Declarations and References

```

let
  function pow1(b2 : int, n3 : int) : int =
    if n4 < 1
      then 1
      else (b5 * pow6(b7, n8 - 1))
in
  pow9(2, 7)
end

```

```

fdec0k(s, s_outer, d@FunDec(f, args, t, e)) :- {s_fun Ts T S}
  new s_fun, s_fun -P-> s,
  types0fArgs(s_fun, s_outer, args) == Ts,
  type0fType(s_outer, t) == T,
  declareVar(s, f, FUN(Ts, T)),
  type0fExp(s_fun, e) == S,
  subtype0(t, S, T).

```

```


type0fArg(s_fun, s_outer, FArg(x, t)) = T :-
  type0fType(s_outer, t) == T,
  declareVar(s_fun, x, T).

```

```

type0fExp(s, Call(f, es)) = T :- {Ts Ss}
  lookupVar(s, f) == FUN(Ts, T),
  type0fExps(s, es) == Ss,
  subtypes(Ss, Ts).

```

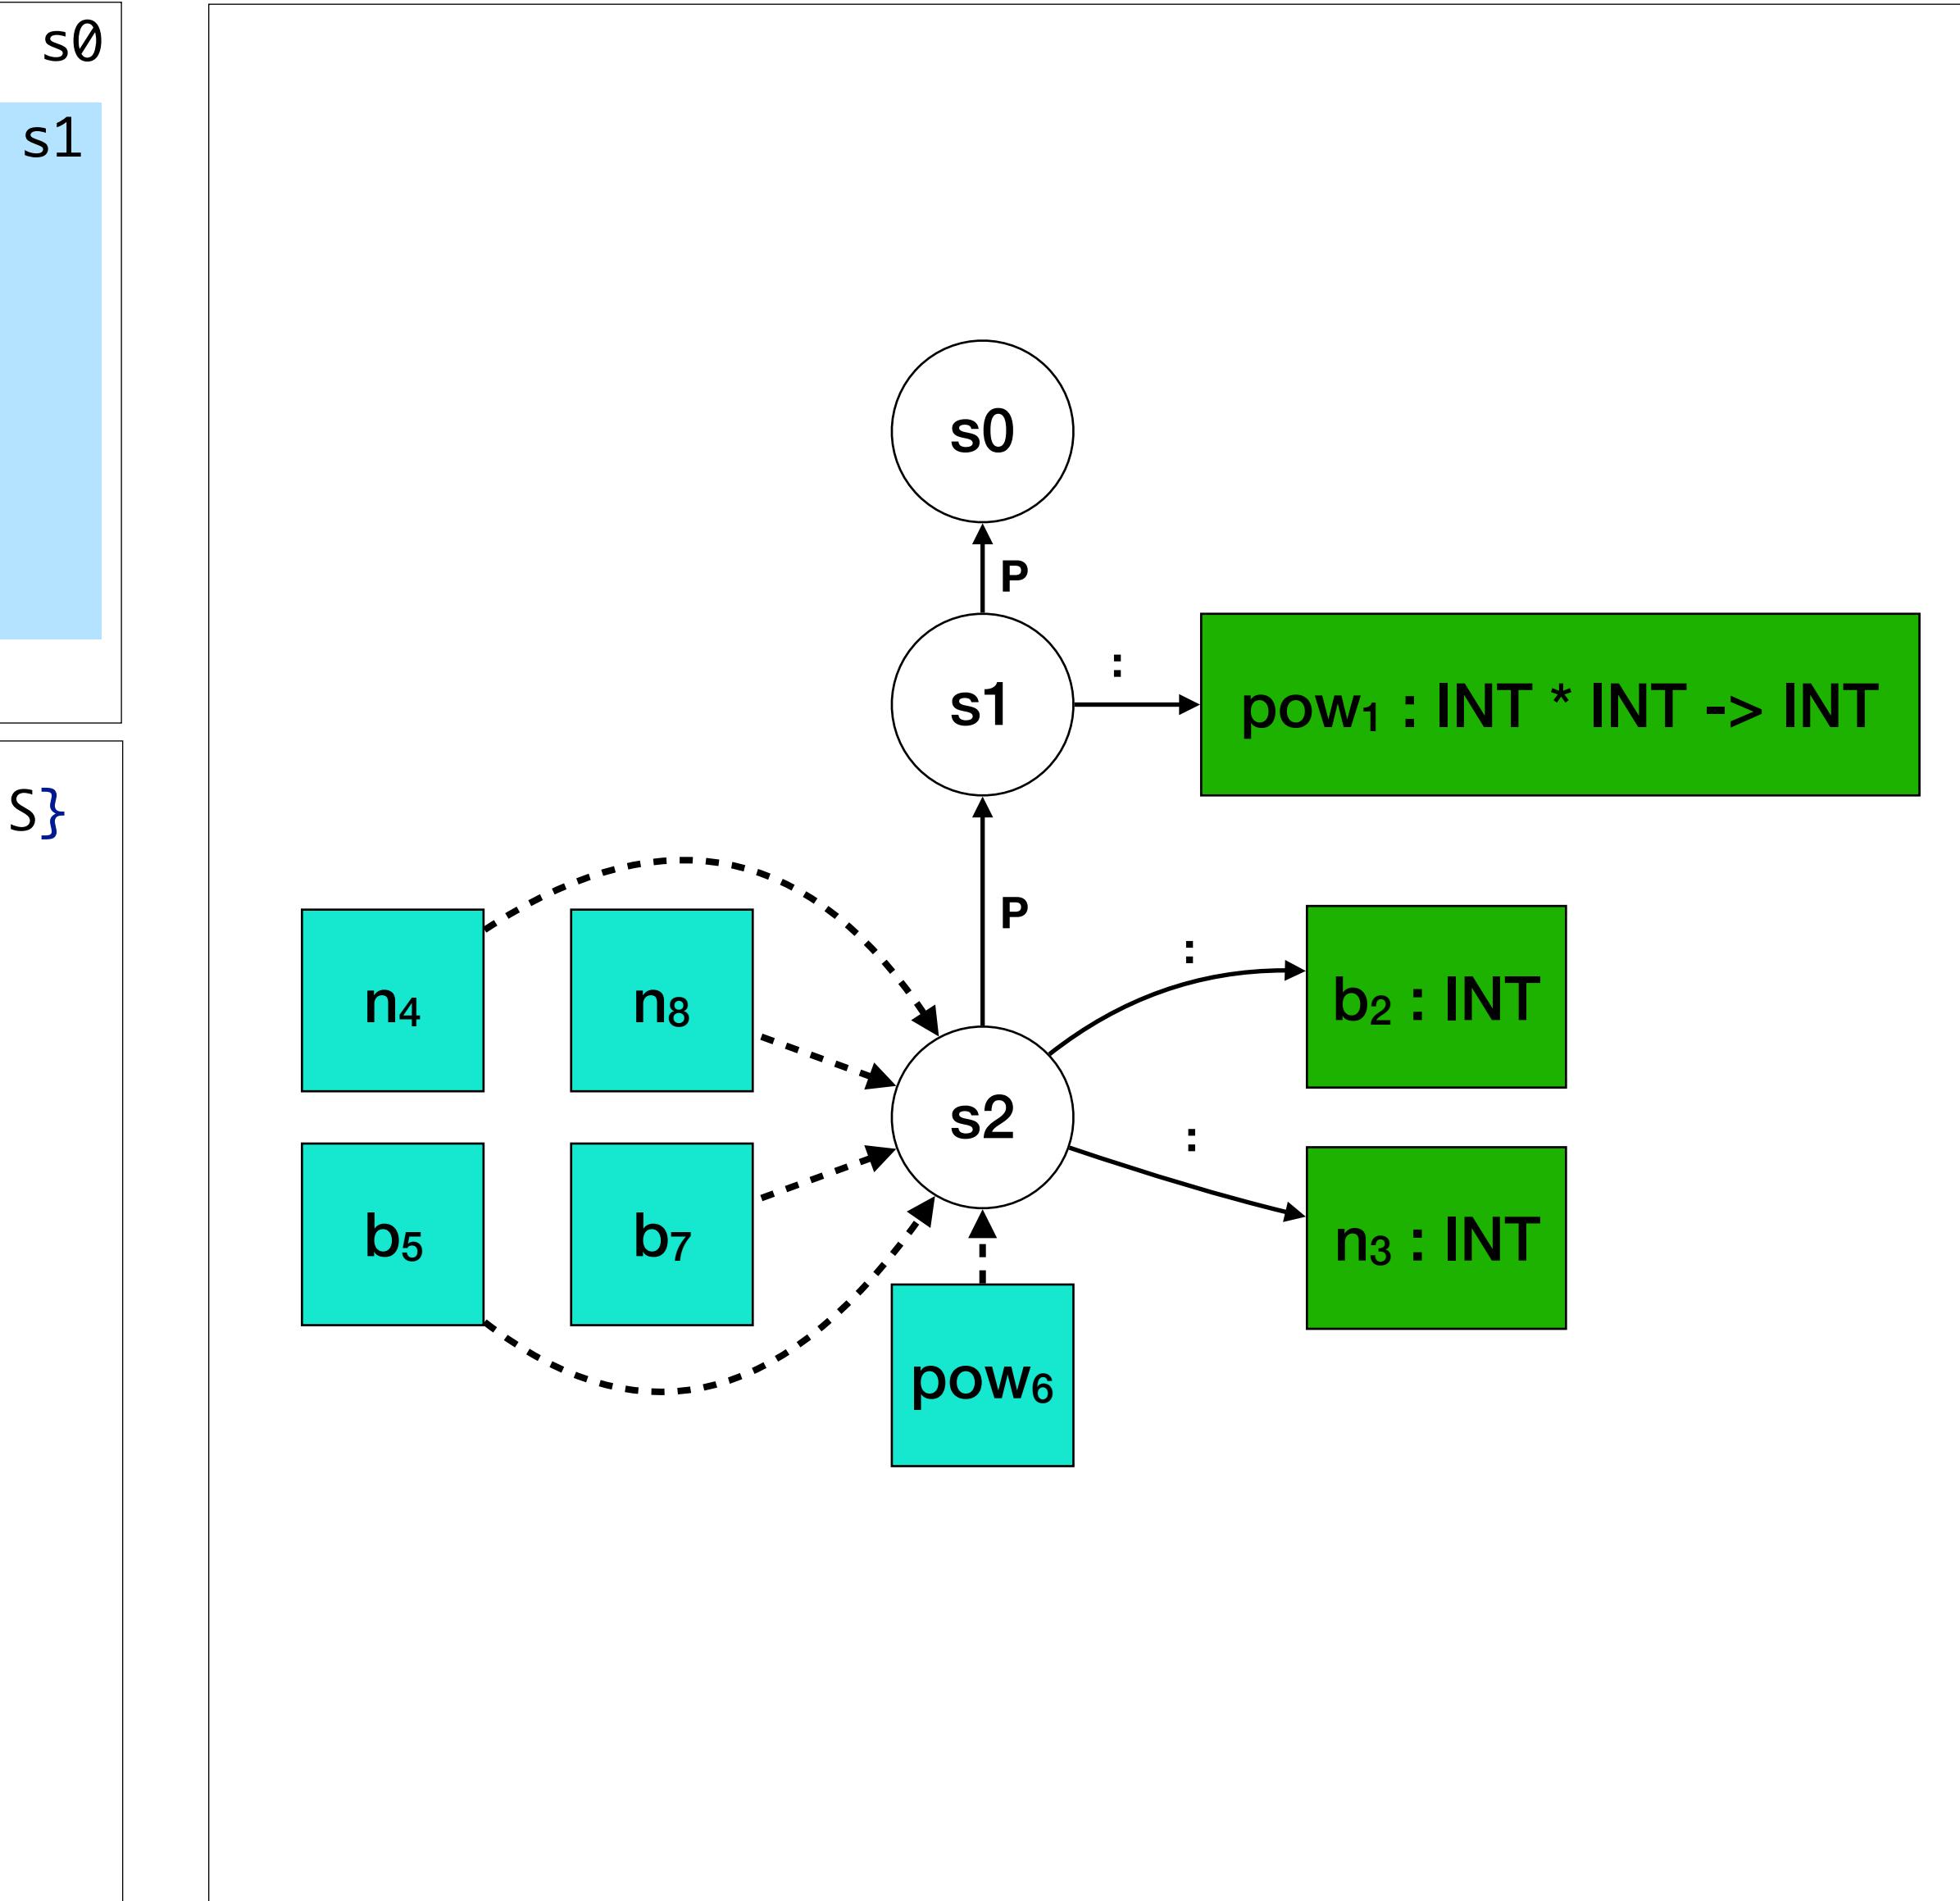

# Function Declarations and References

```

let
  function pow1(b2 : int, n3 : int) : int =
    if n4 < 1
      then 1
      else (b5 * pow6(b7, n8 - 1))
in
  pow9(2, 7)
end

```

```

fdec0k(s, s_outer, d@FunDec(f, args, t, e)) :- {s_fun Ts T S}
  new s_fun, s_fun -P-> s,
  types0fArgs(s_fun, s_outer, args) == Ts,
  type0fType(s_outer, t) == T,
  declareVar(s, f, FUN(Ts, T)),
  type0fExp(s_fun, e) == S,
  subtype0(t, S, T).

```

```


type0fArg(s_fun, s_outer, FArg(x, t)) = T :-
  type0fType(s_outer, t) == T,
  declareVar(s_fun, x, T).

```

```

type0fExp(s, Call(f, es)) = T :- {Ts Ss}
  lookupVar(s, f) == FUN(Ts, T),
  type0fExps(s, es) == Ss,
  subtypes(Ss, Ts).

```

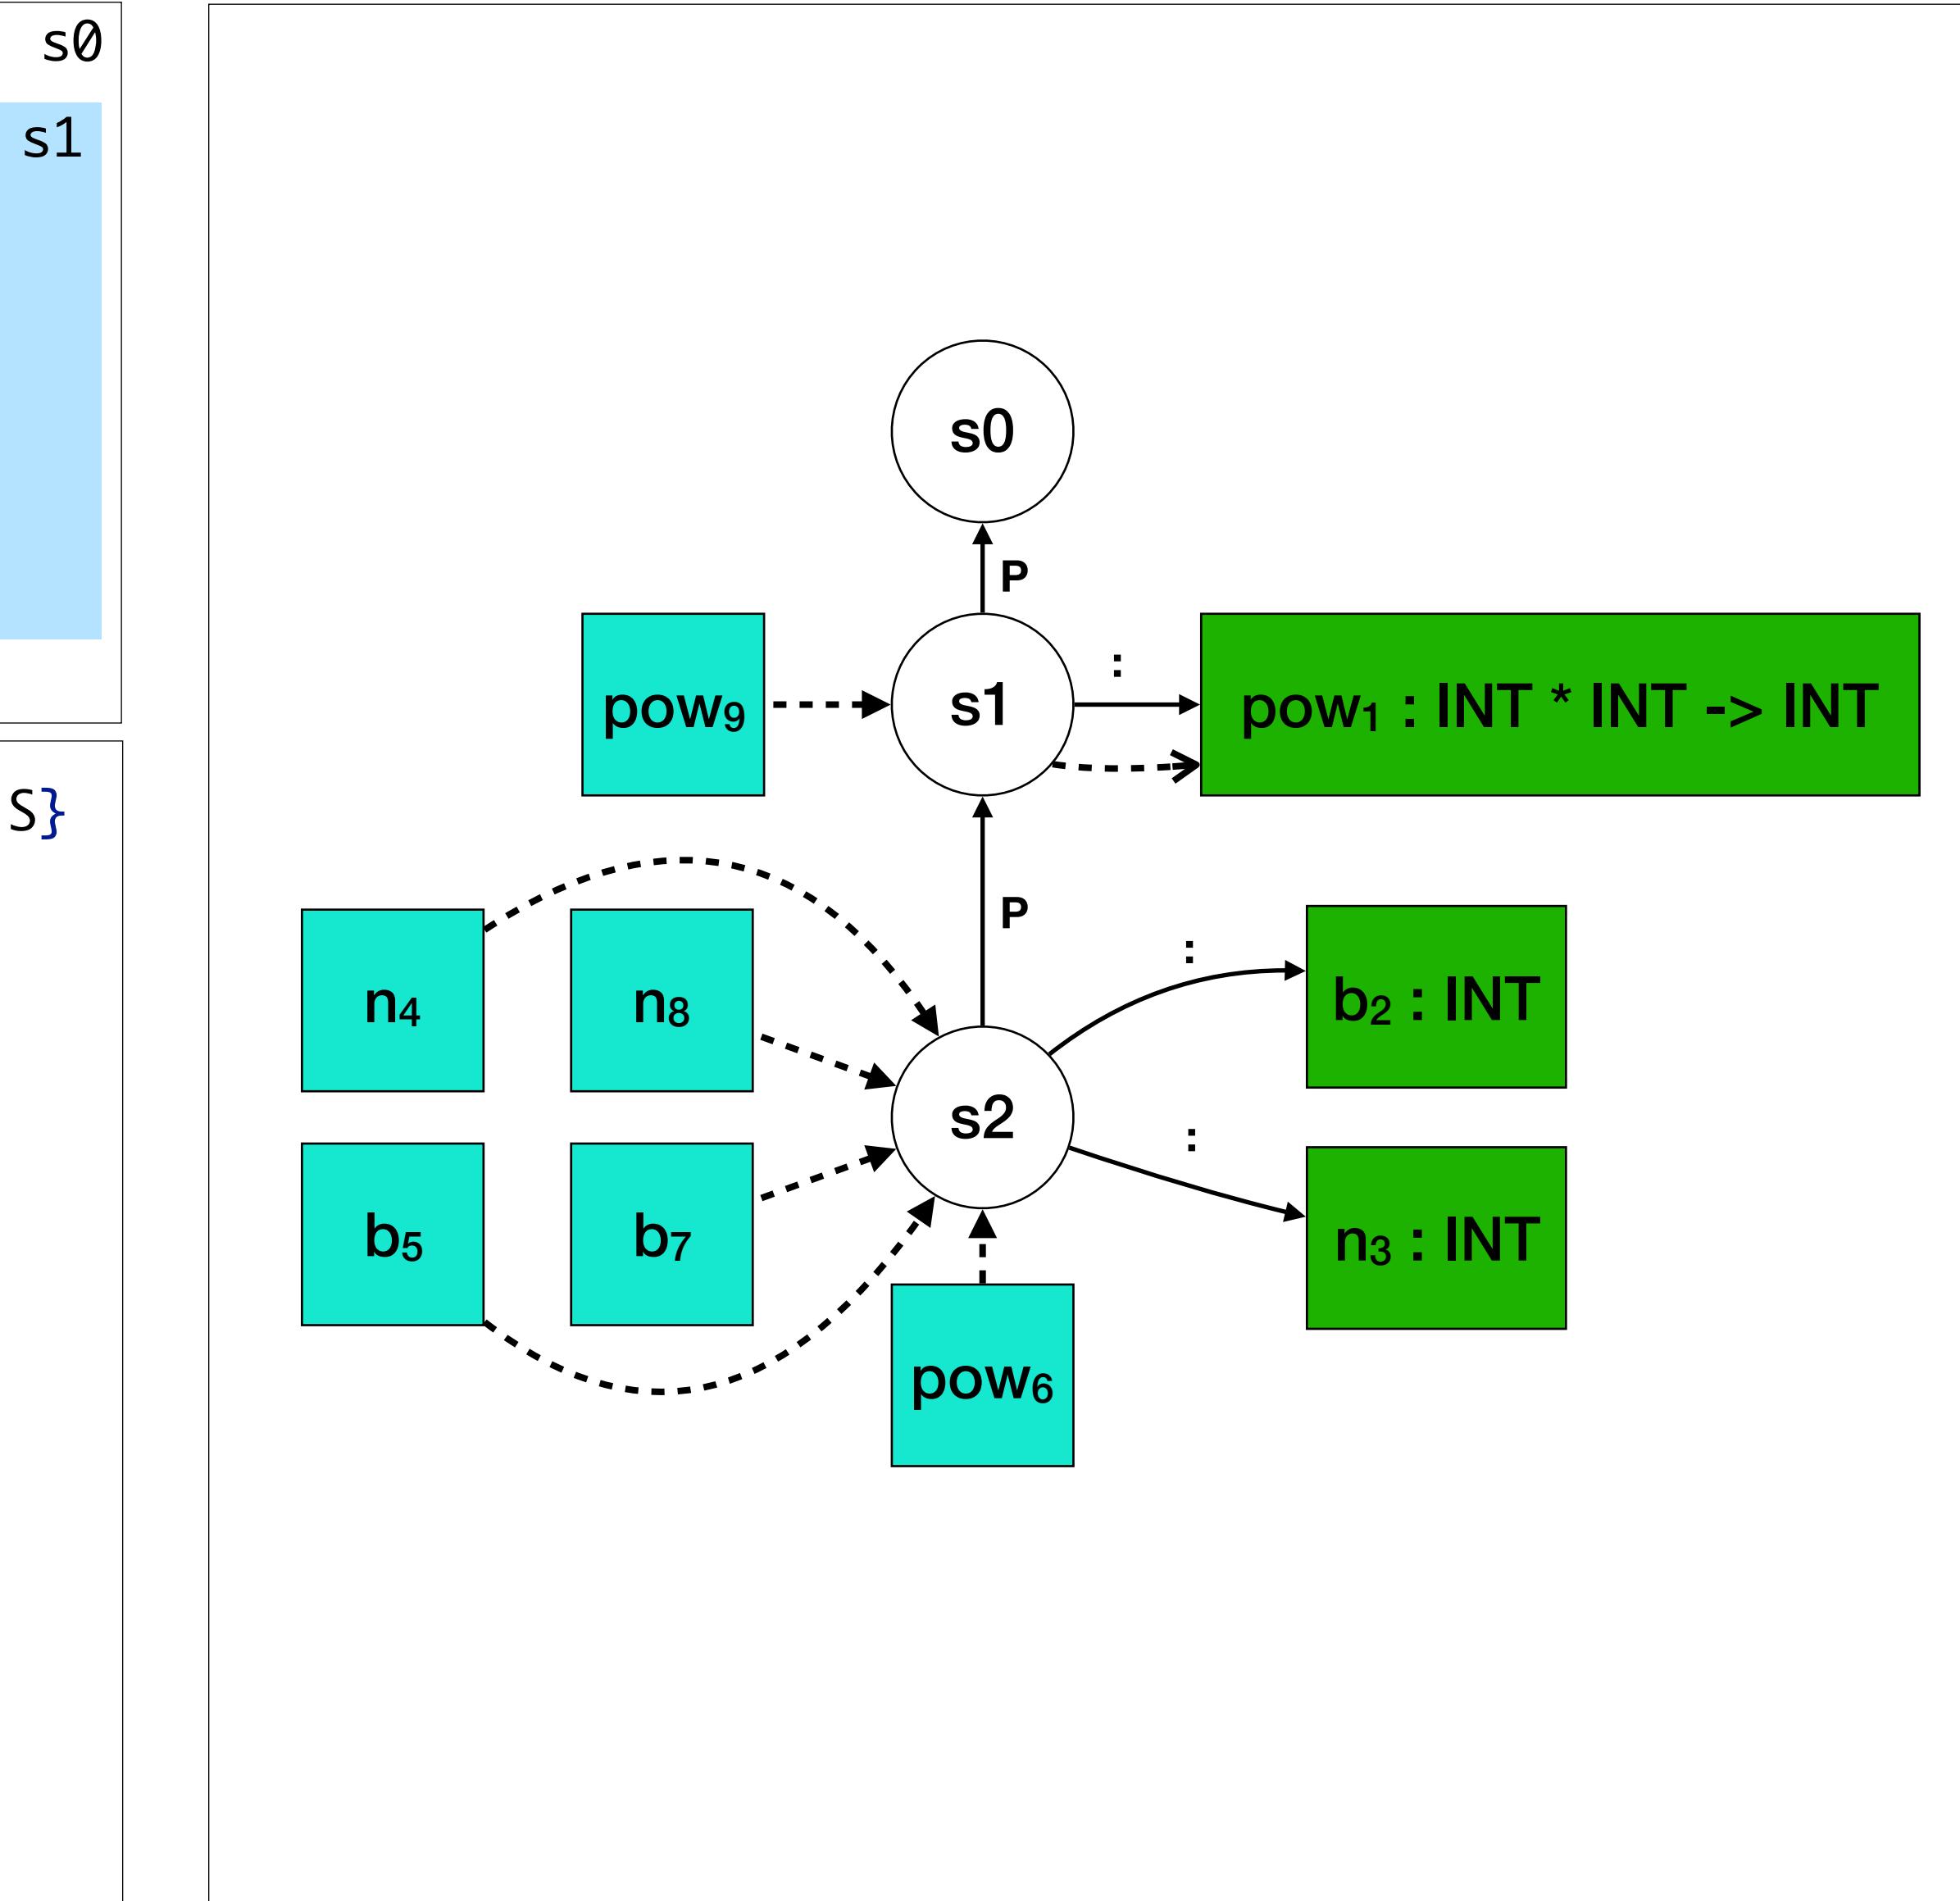

# Function Declarations and References

```

let
  function pow1(b2 : int, n3 : int) : int =
    if n4 < 1
      then 1
      else (b5 * pow6(b7, n8 - 1))
in
  pow9(2, 7)
end

```


```

fdec0k(s, s_outer, d@FunDec(f, args, t, e)) :- {s_fun Ts T S}
  new s_fun, s_fun -P-> s,
  types0fArgs(s_fun, s_outer, args) == Ts,
  type0fType(s_outer, t) == T,
  declareVar(s, f, FUN(Ts, T)),
  type0fExp(s_fun, e) == S,
  subtype0(t, S, T).

type0fArg(s_fun, s_outer, FArg(x, t)) = T :-
  type0fType(s_outer, t) == T,
  declareVar(s_fun, x, T).

type0fExp(s, Call(f, es)) = T :- {Ts Ss}
  lookupVar(s, f) == FUN(Ts, T),
  type0fExps(s, es) == Ss,
  subtypes(Ss, Ts).


```

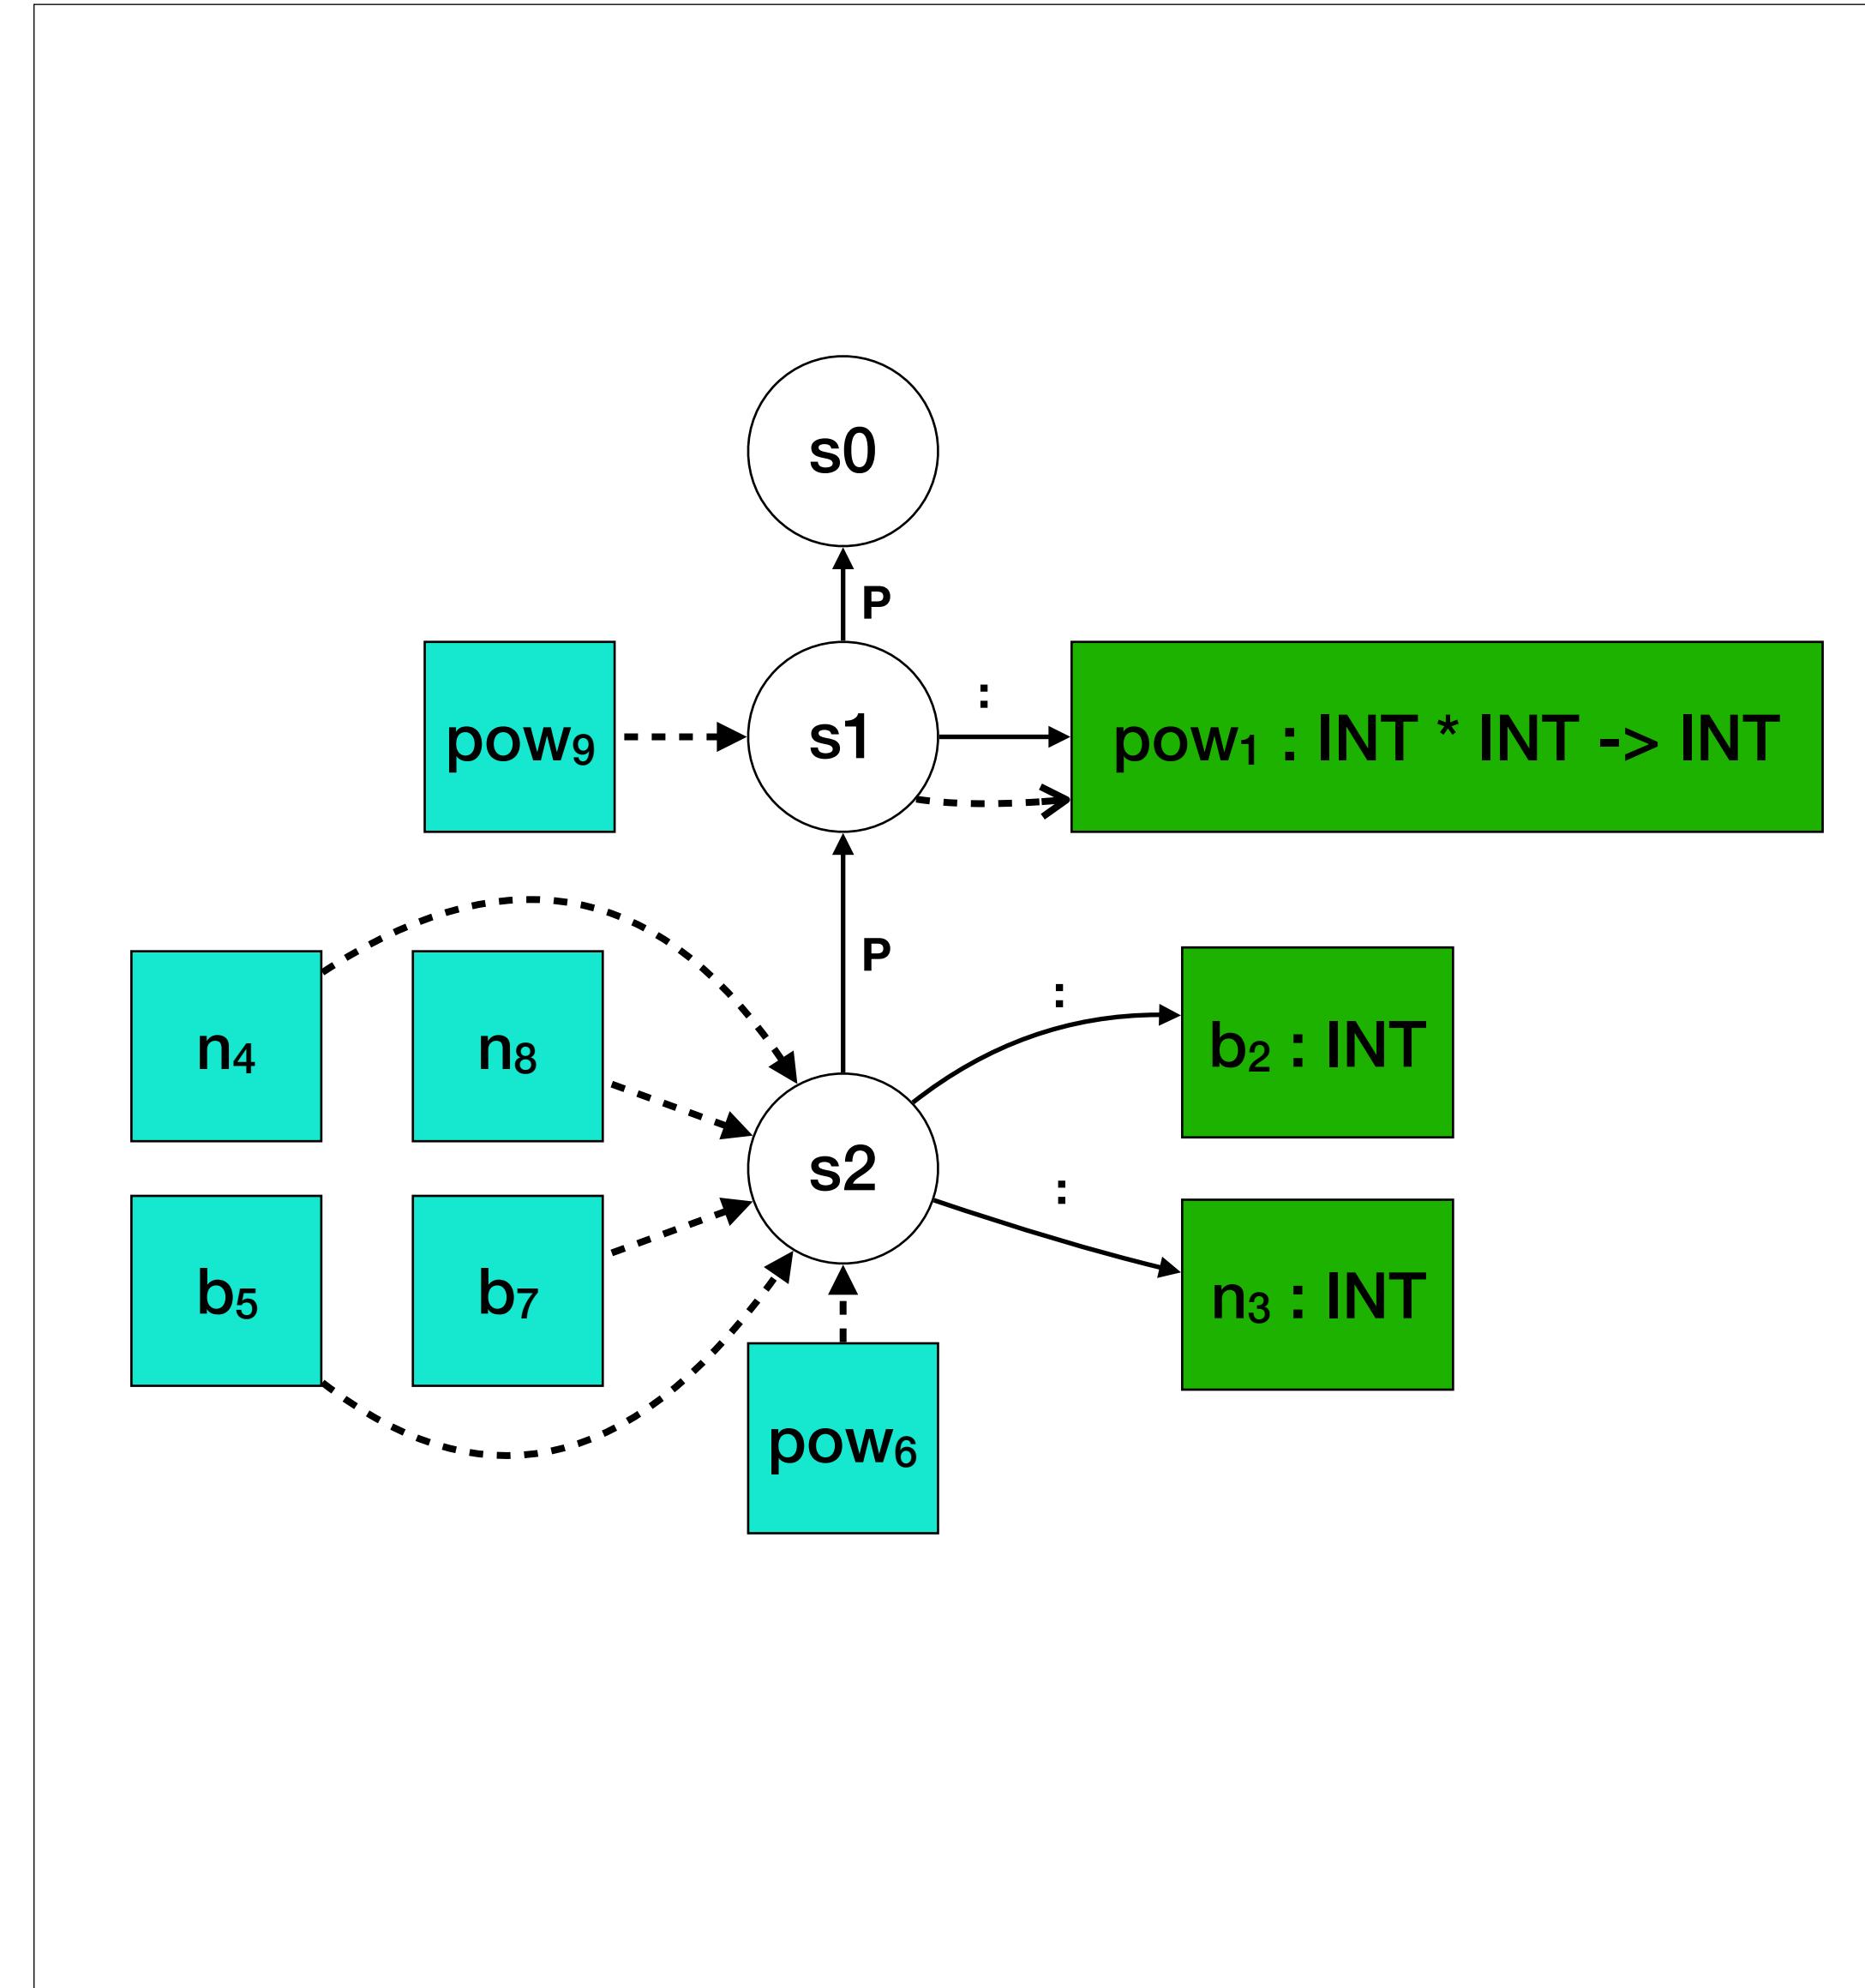

# Sequential Let


```
let  
  var x1 := 2  
  var y2 := z3 + 11  
  var z4 := x5 * y6  
in z7 end
```

s0



# Sequential Let

```
s0
let
  var x1 := 2
  var y2 := z3 + 11
  var z4 := x5 * y6
in z7 end
```



```
typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.

decs0k(s_outer, s_body, []) :-  

  s_body -P-> s_outer.

decs0k(s_outer, s_body, [dec]) :-  

  s_body -P-> s_outer,
  dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,
  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).
```

# Sequential Let

```
let
  var x1 := 2
  var y2 := z3 + 11
  var z4 := x5 * y6
in z7 end
```

s0

s0

```
typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.

decs0k(s_outer, s_body, []) :-  

  s_body -P-> s_outer.

decs0k(s_outer, s_body, [dec]) :-  

  s_body -P-> s_outer,
  dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,
  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).
```

# Sequential Let

```
let
  var x1 := 2
  var y2 := z3 + 11
  var z4 := x5 * y6
in z7 end
```

s0

s0

```
typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.

decs0k(s_outer, s_body, []) :-  

  s_body -P-> s_outer.

decs0k(s_outer, s_body, [dec]) :-  

  s_body -P-> s_outer,
  dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,
  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).
```

# Sequential Let

```
let
  var x1 := 2
  var y2 := z3 + 11
  var z4 := x5 * y6
in z7 end
```

s0

s0

```
typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.

decs0k(s_outer, s_body, []) :-  

  s_body -P-> s_outer.

decs0k(s_outer, s_body, [dec]) :-  

  s_body -P-> s_outer,
  dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,
  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).
```

# Sequential Let

```
let
  var x1 := 2
  var y2 := z3 + 11
  var z4 := x5 * y6
in z7 end
```

s0

s0

```
typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.

decs0k(s_outer, s_body, []) :-  

  s_body -P-> s_outer.

decs0k(s_outer, s_body, [dec]) :-  


  s_body -P-> s_outer,  

  dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,  

  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).
```

# Sequential Let


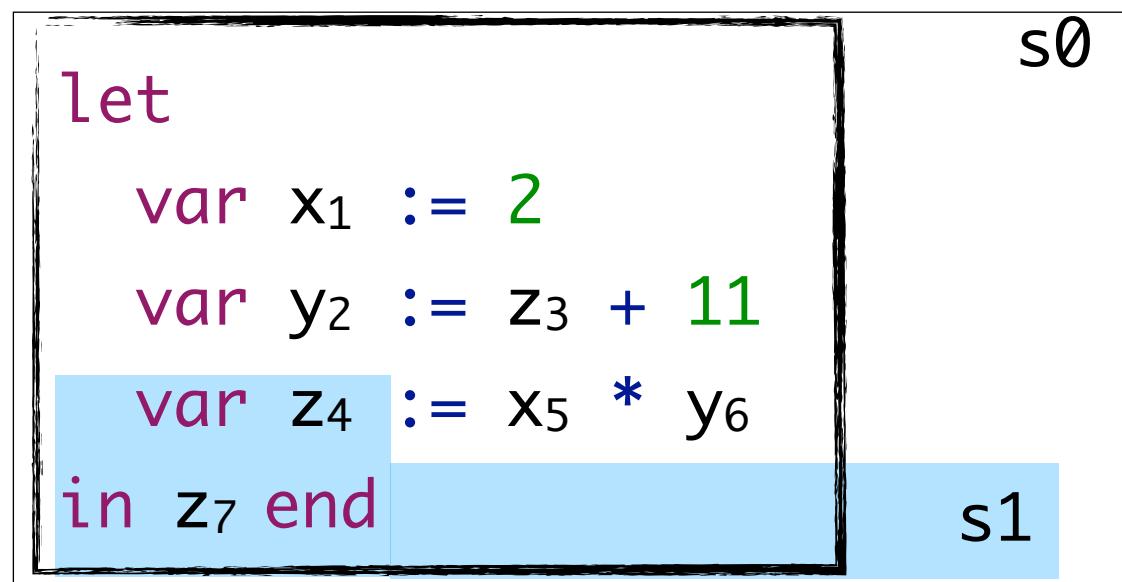


```
typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.



decs0k(s_outer, s_body, []) :-  
  s_body -P-> s_outer.

decs0k(s_outer, s_body, [dec]) :-  
  s_body -P-> s_outer,  
  dec0k(s_body, s_outer, dec).


decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,  
  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).
```



# Sequential Let

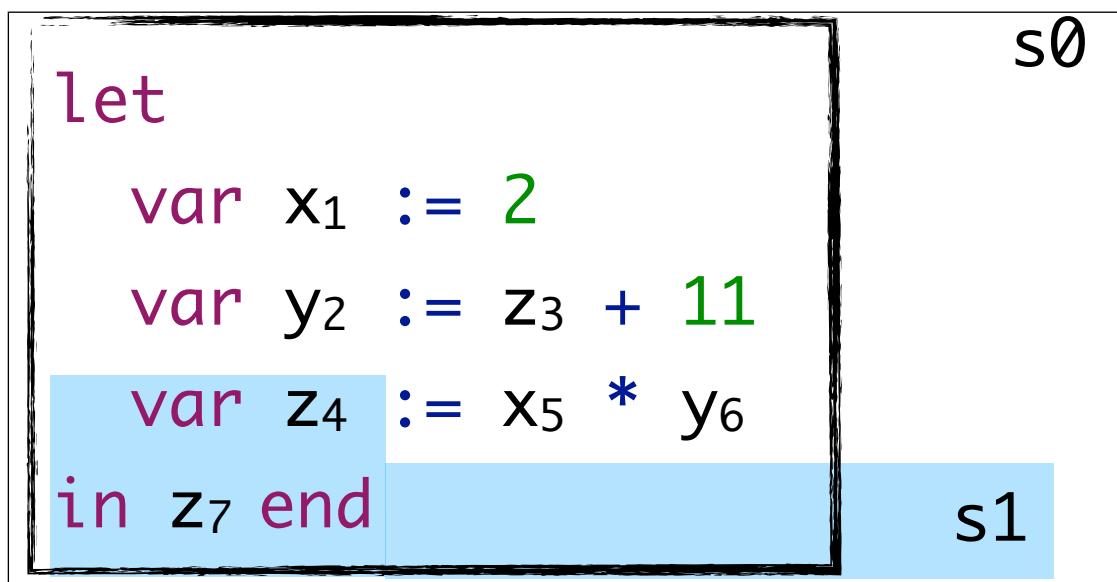

```
typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}  
  new s_body,  
  decs0k(s_outer, s_body, ds),  
  typeOfSeq(s_body, es) == T.  
  
decs0k(s_outer, s_body, []) :-  
  s_body -P-> s_outer.  
  
decs0k(s_outer, s_body, [dec]) :-  
  s_body -P-> s_outer,  
  dec0k(s_body, s_outer, dec).  
  
decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}  
  new s_dec,  
  s_dec -P-> s_outer,  
  dec0k(s_dec, s_outer, dec),  
  decs0k(s_dec, s_body, decs).
```



# Sequential Let



```
let s0
  var x1 := 2
  var y2 := z3 + 11
  var z4 := x5 * y6
in z7 end s1
```

```
typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.

decs0k(s_outer, s_body, []) :-  
  s_body -P-> s_outer.

decs0k(s_outer, s_body, [dec]) :-  
  s_body -P-> s_outer,  
  dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,  
  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).
```



# Sequential Let

```
let s0
  var x1 := 2
  var y2 := z3 + 11
  var z4 := x5 * y6
in z7 end s1
```

```
typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.

decs0k(s_outer, s_body, []) :-  

  s_body -P-> s_outer.



decs0k(s_outer, s_body, [dec]) :-  

  s_body -P-> s_outer,  

  dec0k(s_body, s_outer, dec).

decs0k(s_outer s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,  

  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).
```



# Sequential Let



```
let s0
  var x1 := 2
  var y2 := z3 + 11
  var z4 := x5 * y6
in z7 end s1
```

```
typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.

decs0k(s_outer, s_body, []) :-  
  s_body -P-> s_outer.

decs0k(s_outer, s_body, [dec]) :-  
  s_body -P-> s_outer,  
  dec0k(s_body, s_outer, dec).

decs0k(s_outer s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,
  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).
```



# Sequential Let

```
let s0
  var x1 := 2
  var y2 := z3 + 11
  var z4 := x5 * y6
in z7 end s1
```

```
typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.

decs0k(s_outer, s_body, []) :-  

  s_body -P-> s_outer.



decs0k(s_outer, s_body, [dec]) :-  

  s_body -P-> s_outer,  

  dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,  

  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).
```



# Sequential Let

```
let s0
  var x1 := 2
  var y2 := z3 + 11
  var z4 := x5 * y6
in z7 end s1
```

```
typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.

decs0k(s_outer, s_body, []) :-  

  s_body -P-> s_outer.



decs0k(s_outer, s_body, [dec]) :-  

  s_body -P-> s_outer,  

  dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,  

  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).
```



# Sequential Let



```
let s0
  var x1 := 2
  var y2 := z3 + 11
  var z4 := x5 * y6
in z7 end s1
```

```
typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.

decs0k(s_outer, s_body, []) :-  
  s_body -P-> s_outer.

decs0k(s_outer, s_body, [dec]) :-  
  s_body -P-> s_outer,  
  dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,  
  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).
```



# Sequential Let


```
let s0
  var x1 := 2
  var y2 := z3 + 11      s2
  var z4 := x5 * y6
in z7 end               s1
```

```
typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.

decs0k(s_outer, s_body, []) :-  
  s_body -P-> s_outer.

decs0k(s_outer, s_body, [dec]) :-  
  s_body -P-> s_outer,  
  dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,  
  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).
```



# Sequential Let

```
let s0
  var x1 := 2
  var y2 := z3 + 11      s2
  var z4 := x5 * y6
in z7 end               s1
```

```
typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.

decs0k(s_outer, s_body, []) :-  

  s_body -P-> s_outer.




decs0k(s_outer, s_body, [dec]) :-  

  s_body -P-> s_outer,  

  dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,  

  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).
```



# Sequential Let

```
let s0
  var x1 := 2
  var y2 := z3 + 11      s2
  var z4 := x5 * y6
in z7 end               s1
```



```
typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.

decs0k(s_outer, s_body, []) :-  
  s_body -P-> s_outer.

decs0k(s_outer, s_body, [dec]) :-  
  s_body -P-> s_outer,  
  dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,  

  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).
```

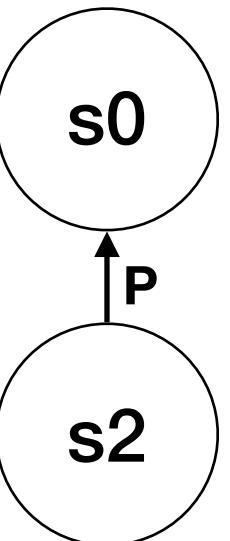

# Sequential Let

```
let s0
  var x1 := 2
  var y2 := z3 + 11      s2
  var z4 := x5 * y6
in z7 end               s1
```

```
typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.

decs0k(s_outer, s_body, []) :-  

  s_body -P-> s_outer.



decs0k(s_outer, s_body, [dec]) :-  

  s_body -P-> s_outer,  


  dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,  

  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).
```

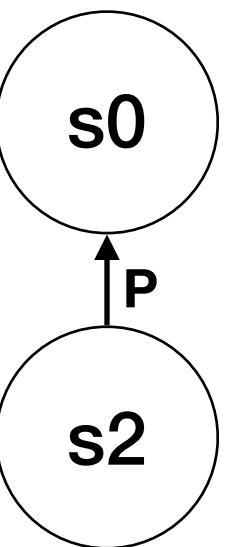

# Sequential Let

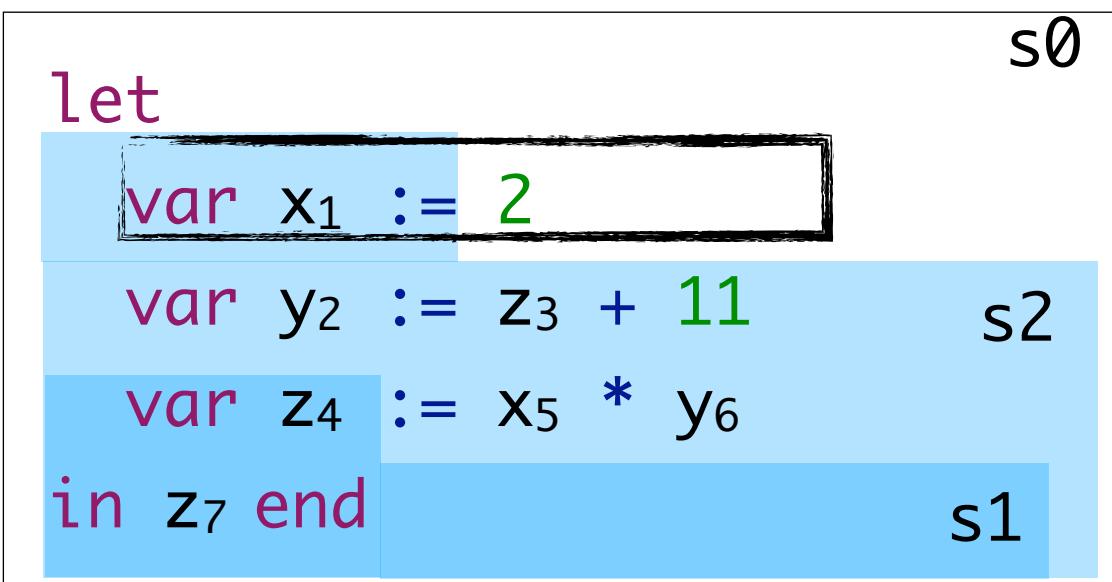

```

typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.

decs0k(s_outer, s_body, []) :-  

  s_body -P-> s_outer.


decs0k(s_outer, s_body, [dec]) :-  

  s_body -P-> s_outer,  


  dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,  

  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).
  
```

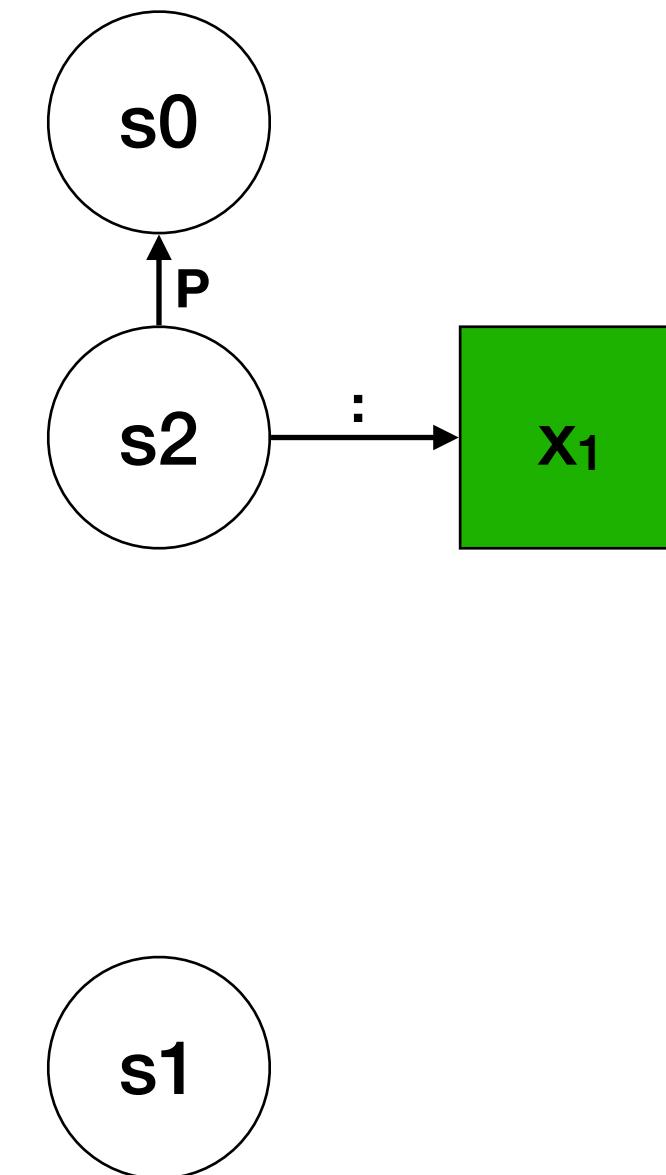

# Sequential Let

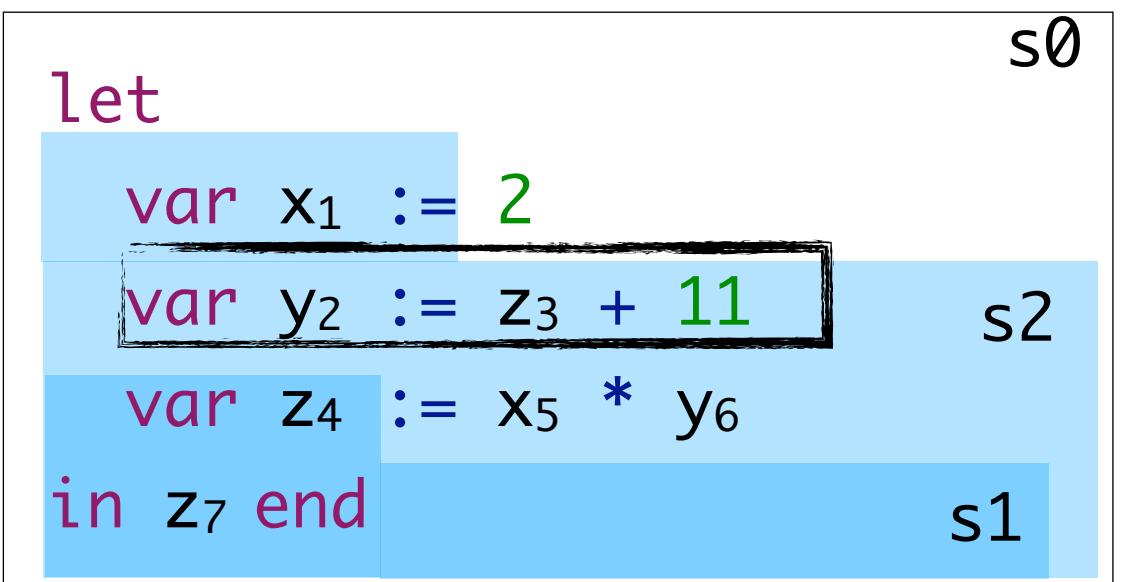


```
typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.


decs0k(s_outer, s_body, []) :-  
  s_body -P-> s_outer.

decs0k(s_outer, s_body, [dec]) :-  
  s_body -P-> s_outer,  
  dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,  
  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).
```

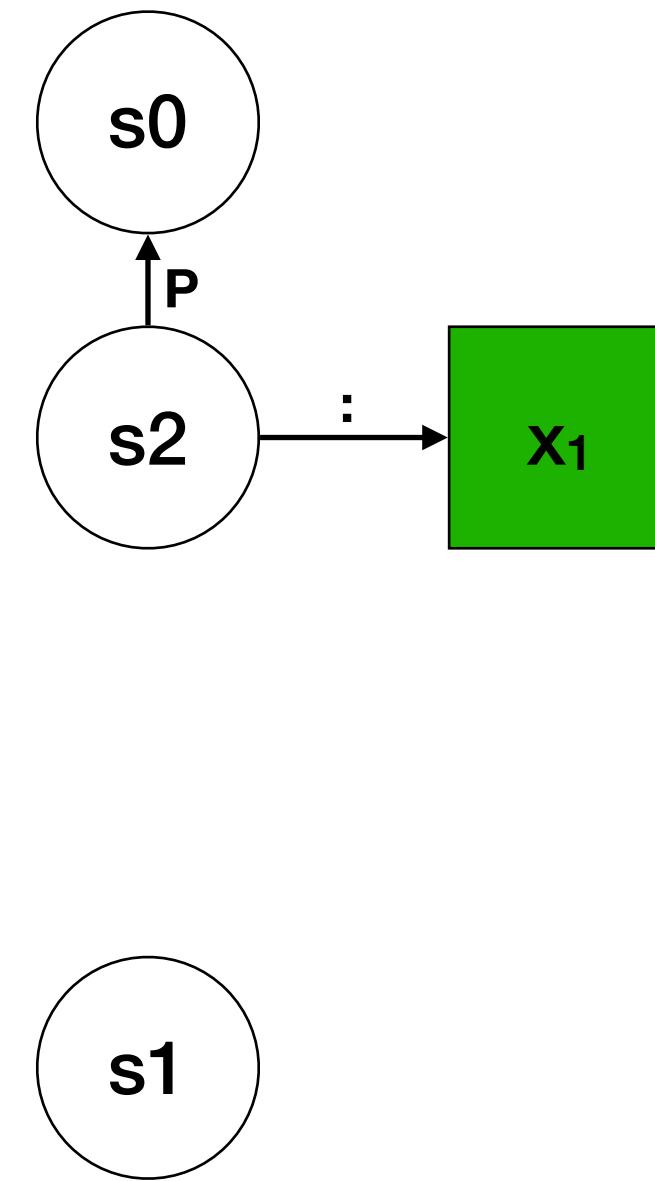

# Sequential Let

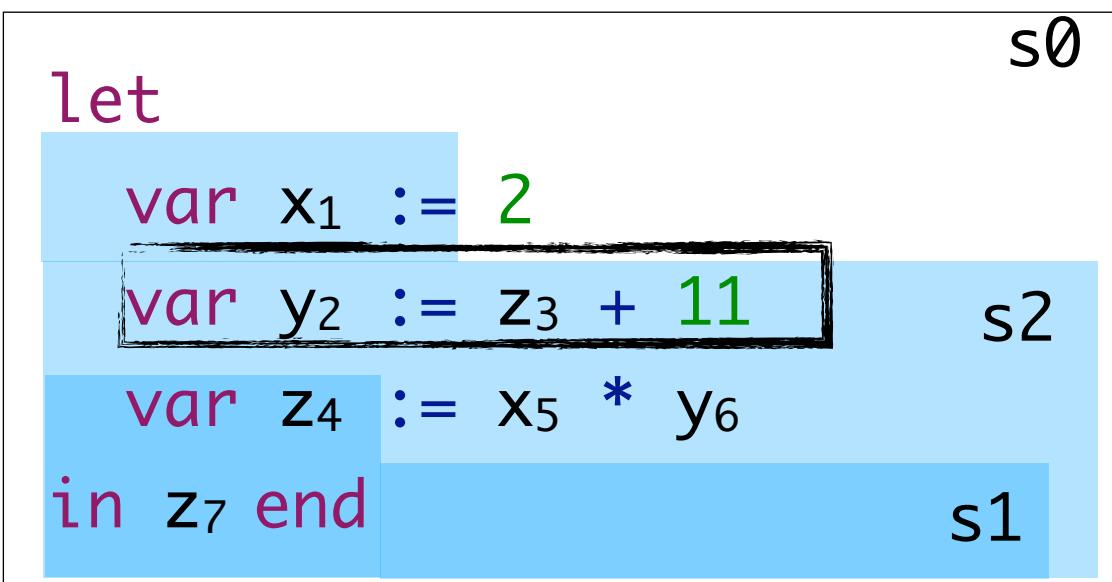


```

typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.


decs0k(s_outer, s_body, []) :- 
  s_body -P-> s_outer.

decs0k(s_outer, s_body, [dec]) :- 
  s_body -P-> s_outer,
  dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,
  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).
    
```

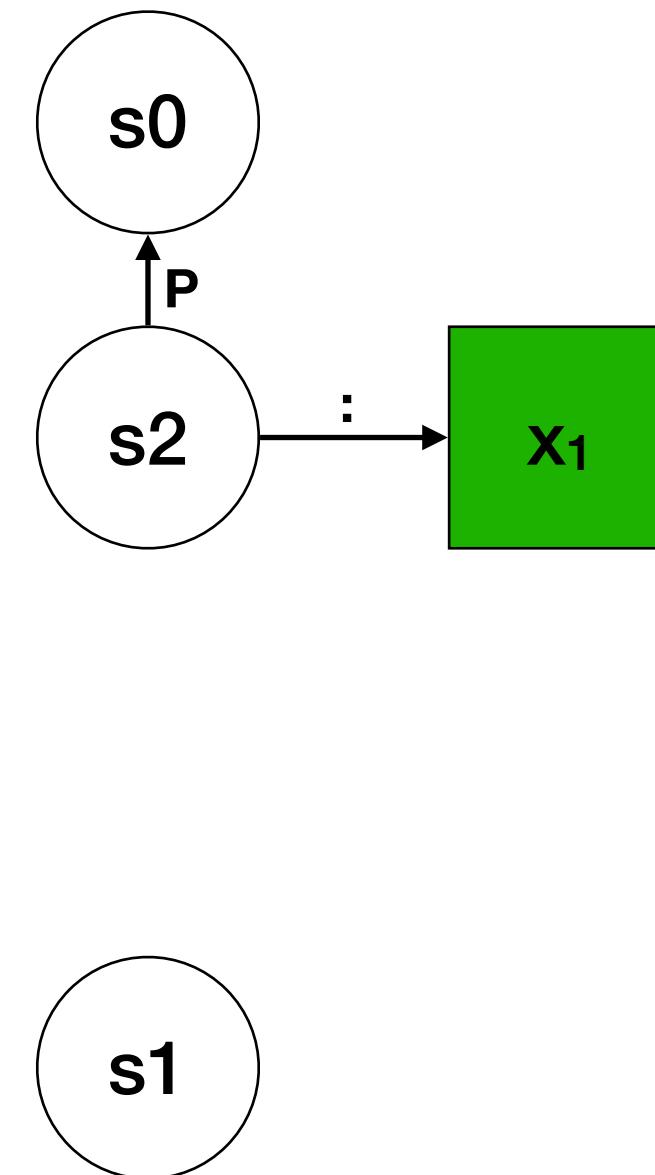

# Sequential Let

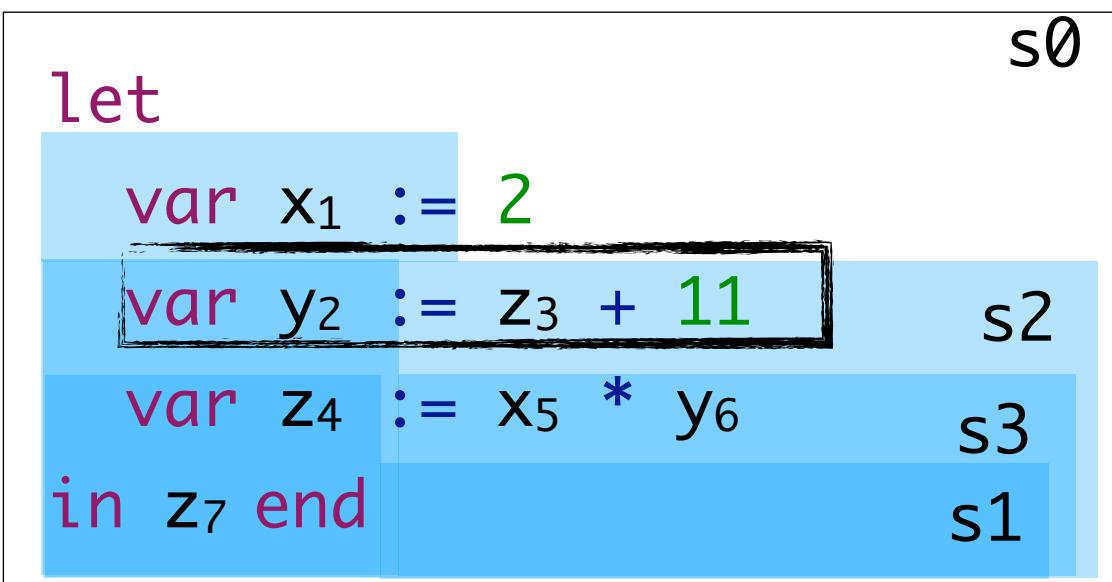


```

typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.


decs0k(s_outer, s_body, []) :- 
  s_body -P-> s_outer.

decs0k(s_outer, s_body, [dec]) :- 
  s_body -P-> s_outer,
  dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,
  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).
  
```

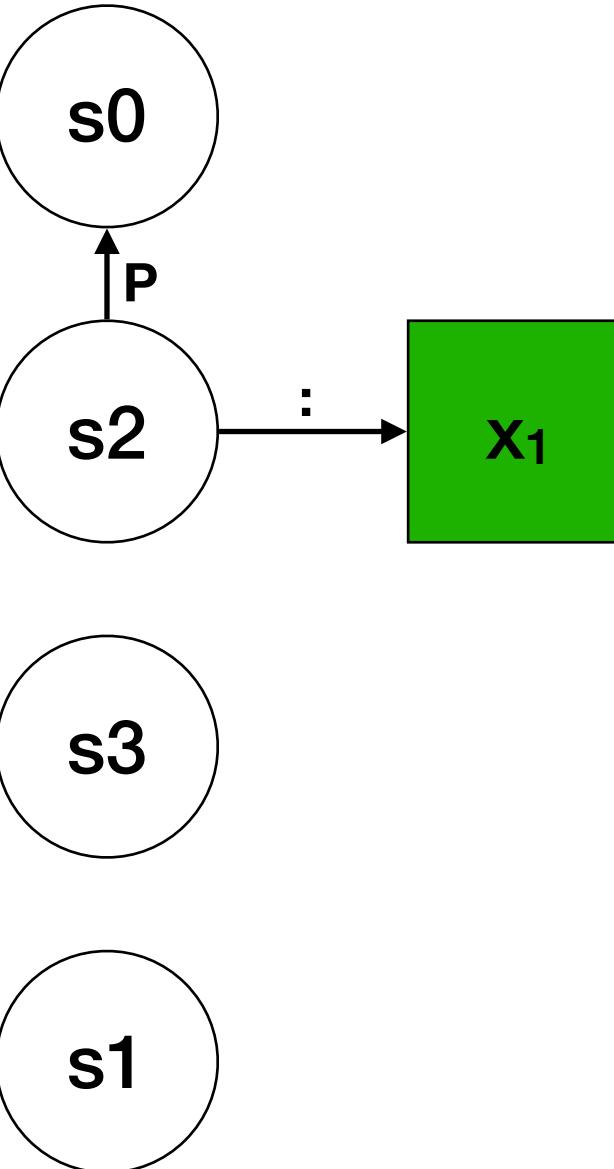

# Sequential Let

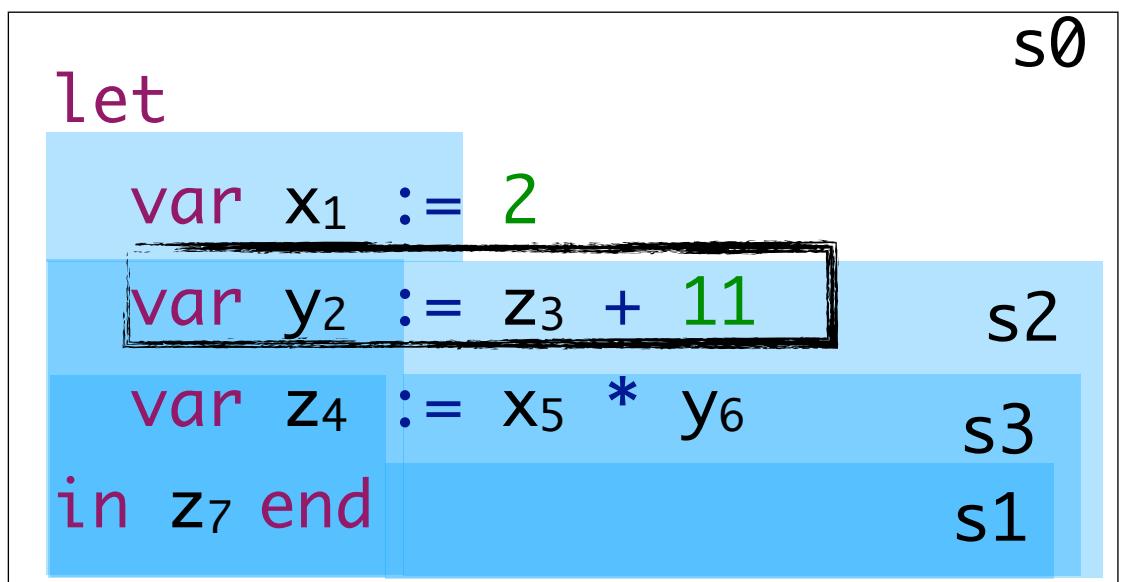


```
typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.


decs0k(s_outer, s_body, []) :-  
  s_body -P-> s_outer.

decs0k(s_outer, s_body, [dec]) :-  
  s_body -P-> s_outer,  
  dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,  
  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).
```

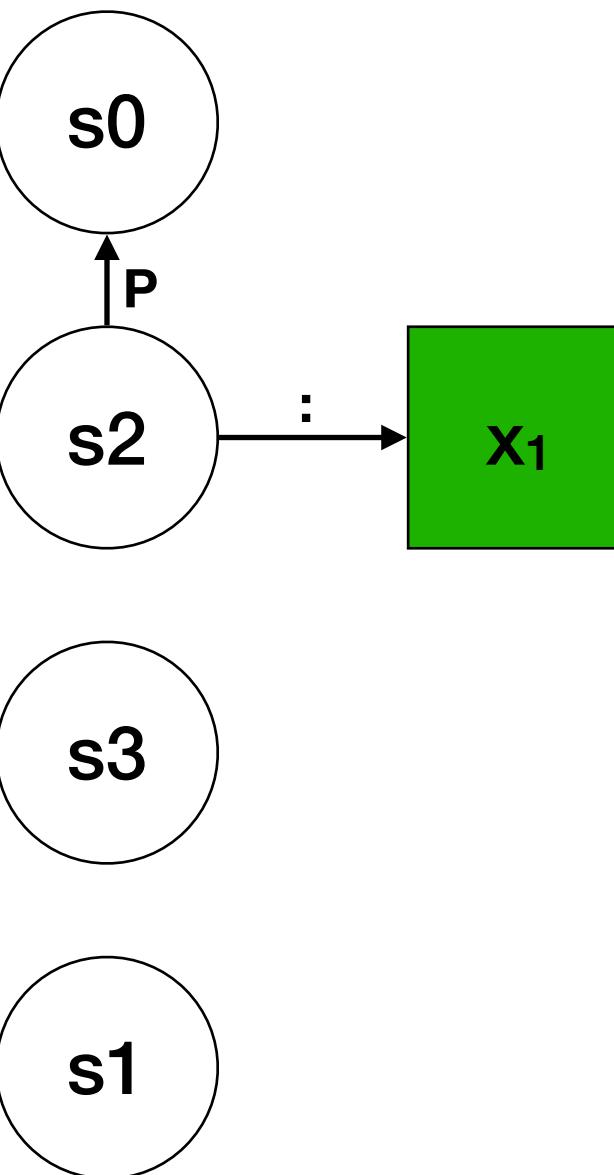

# Sequential Let

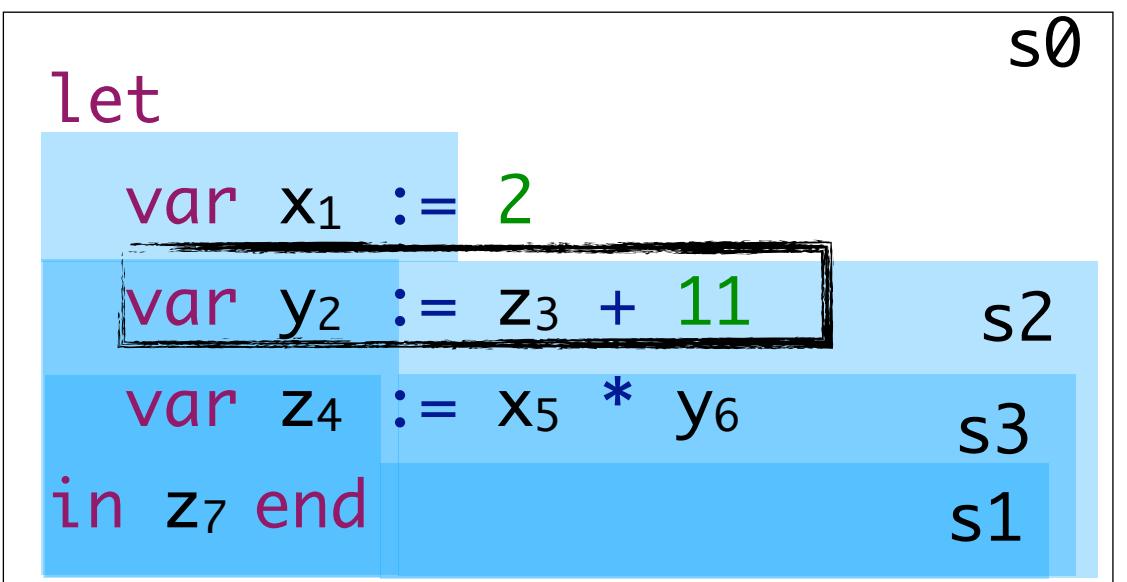


```
typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.


decs0k(s_outer, s_body, []) :-  
  s_body -P-> s_outer.

decs0k(s_outer, s_body, [dec]) :-  
  s_body -P-> s_outer,  
  dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,  
  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).
```

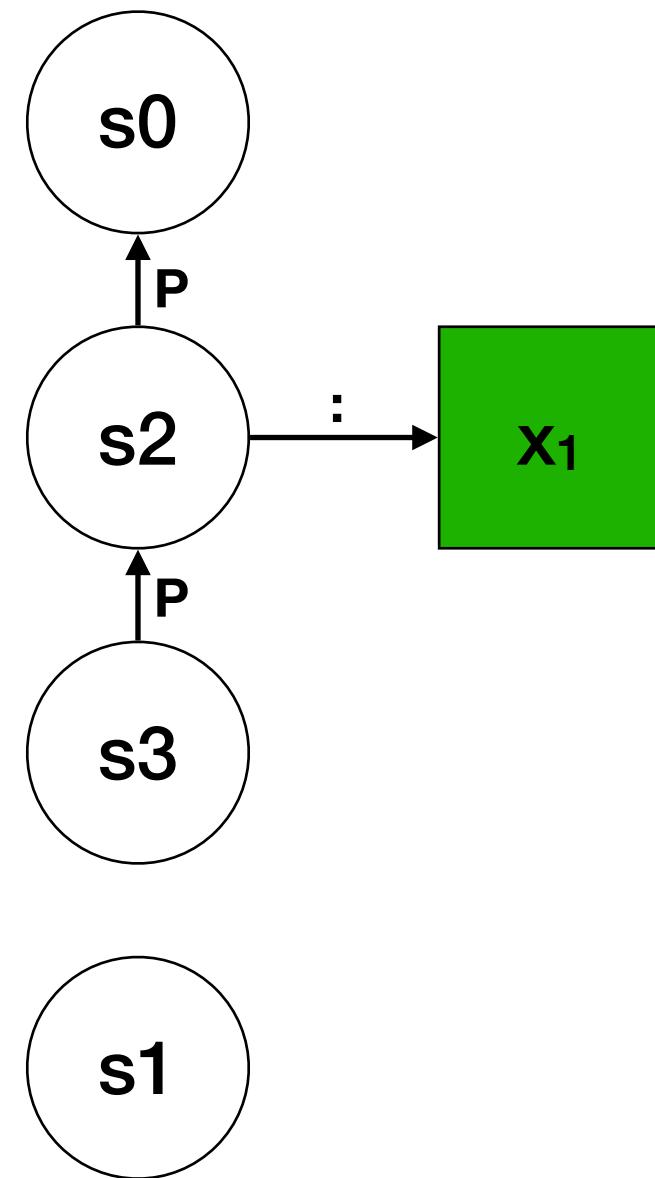

# Sequential Let

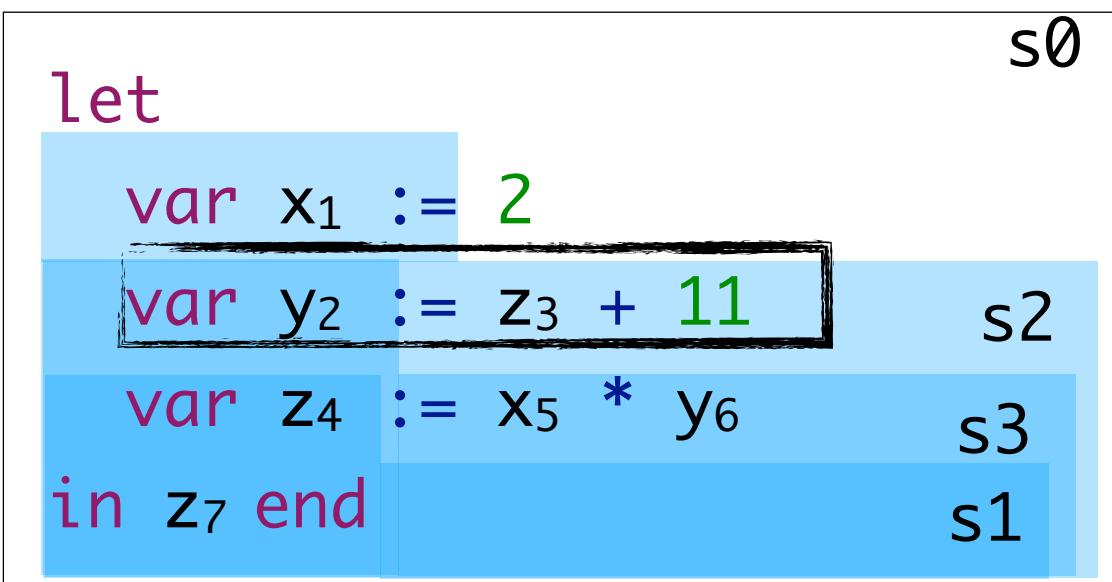

```

typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.


decs0k(s_outer, s_body, []) :-  

  s_body -P-> s_outer.


decs0k(s_outer, s_body, [dec]) :-  

  s_body -P-> s_outer,
  dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,
  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).
  
```

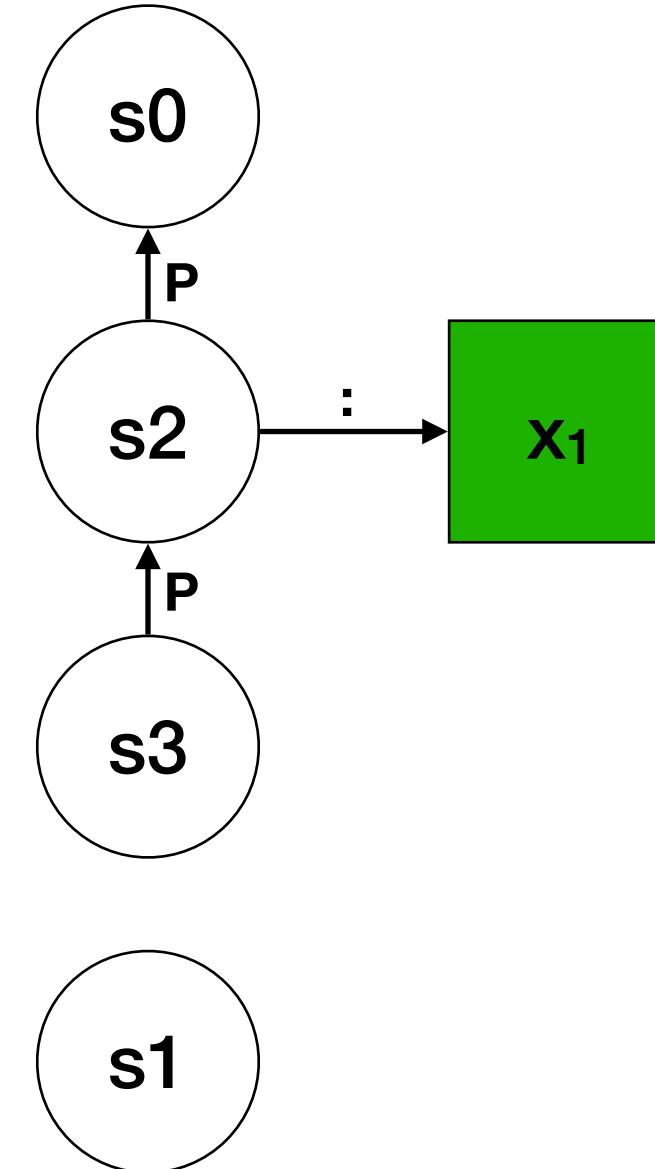

# Sequential Let

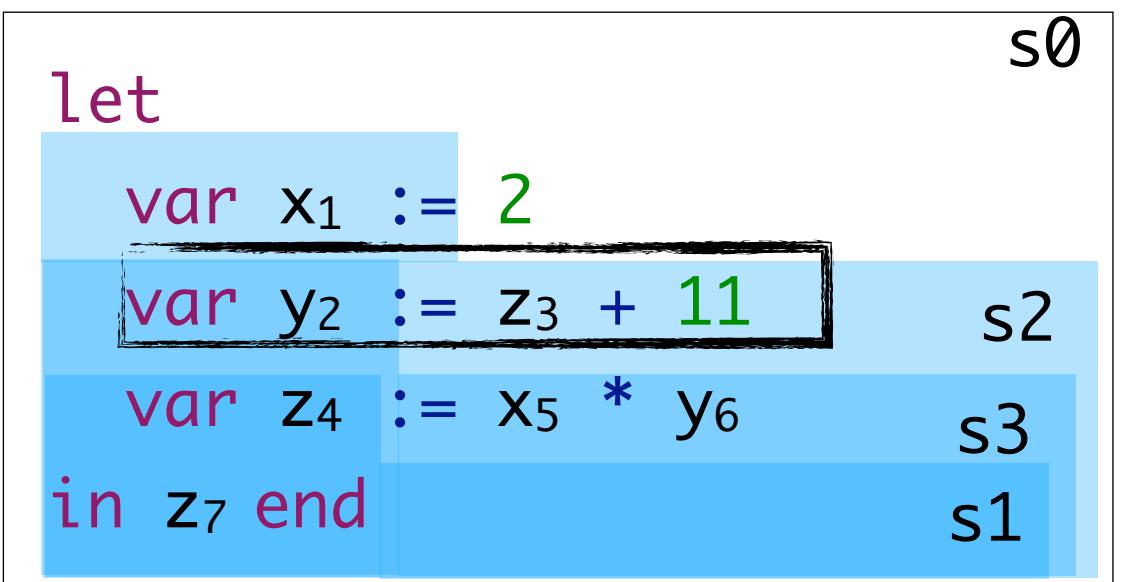

```

typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
    new s_body,
    decs0k(s_outer, s_body, ds),
    typeOfSeq(s_body, es) == T.

decs0k(s_outer, s_body, []) :-  


    s_body -P-> s_outer.

decs0k(s_outer, s_body, [dec]) :-  


    s_body -P-> s_outer,
    dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
    new s_dec,
    s_dec -P-> s_outer,
    dec0k(s_dec, s_outer, dec),
    decs0k(s_dec, s_body, decs).

```

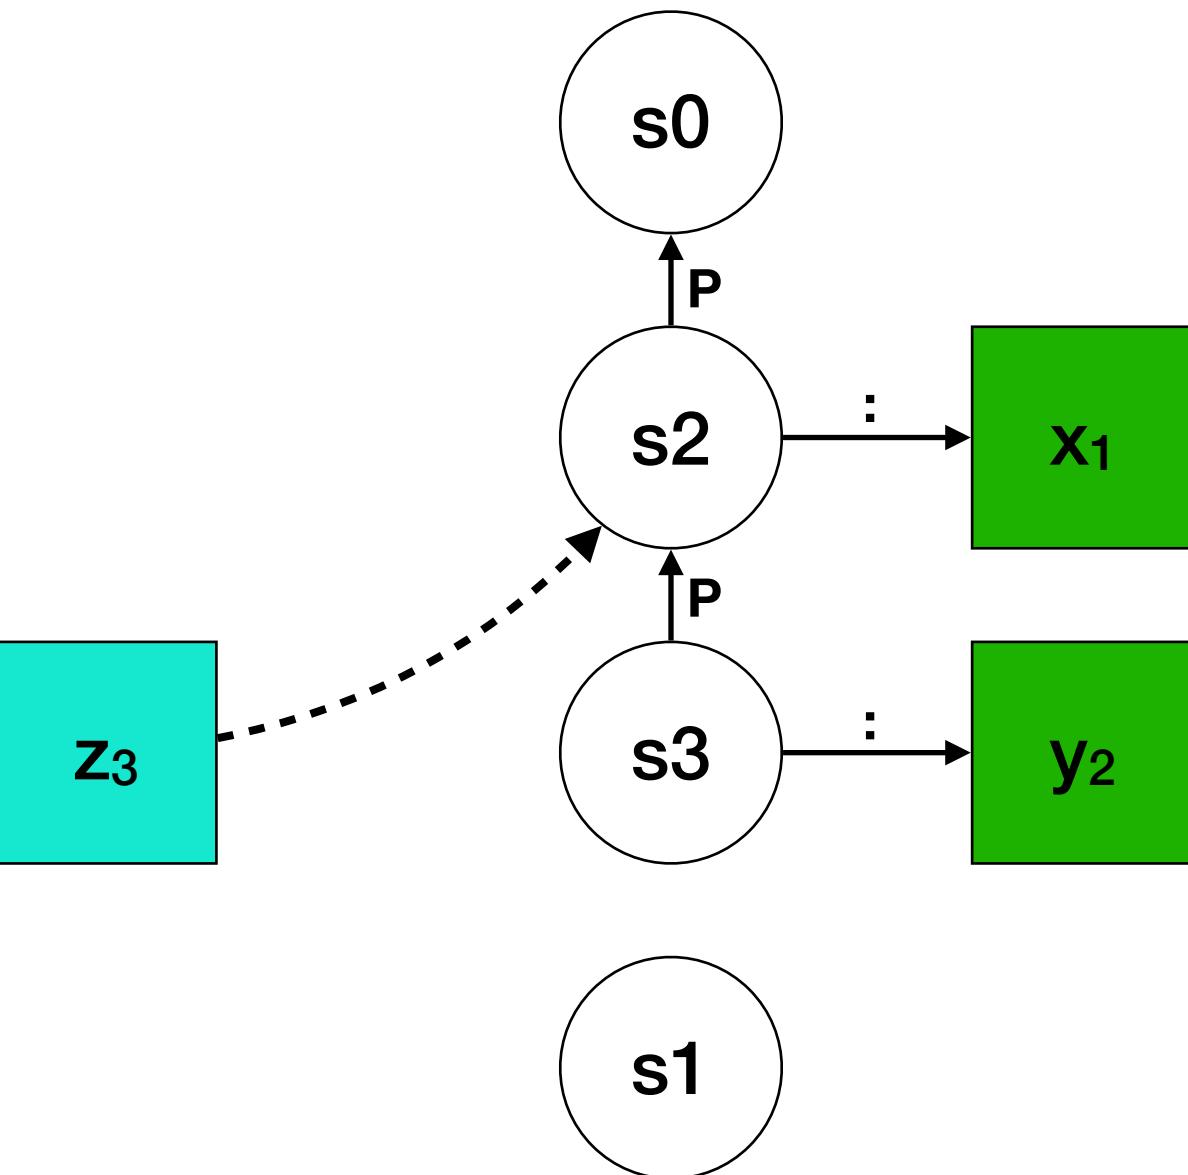

# Sequential Let

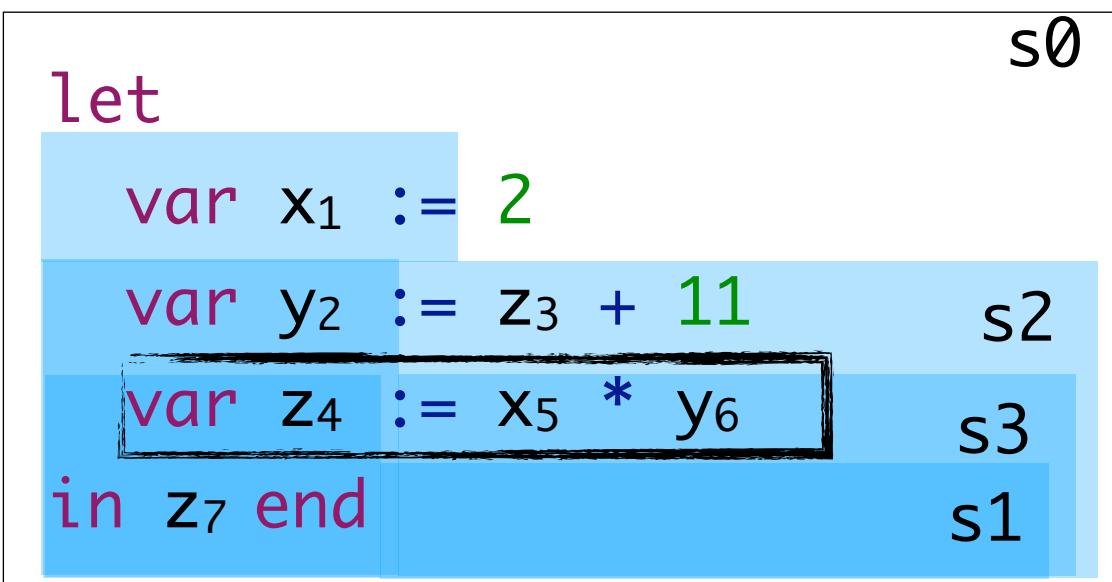


```
typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.


decs0k(s_outer, s_body, []) :-
  s_body -P-> s_outer.

decs0k(s_outer, s_body, [dec]) :-
  s_body -P-> s_outer,
  dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,
  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).
```

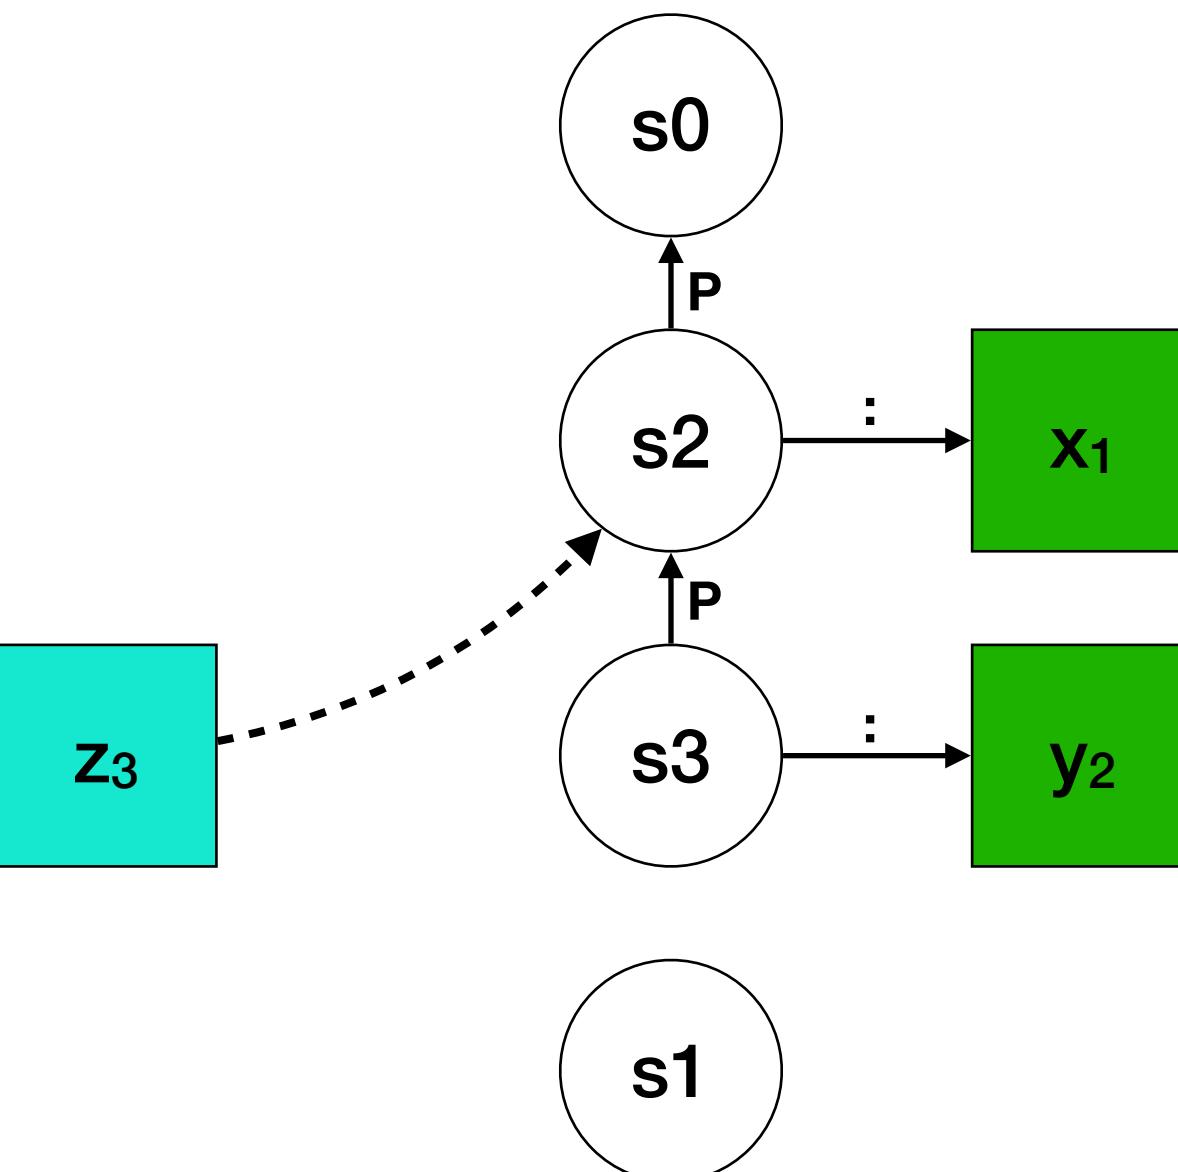

# Sequential Let

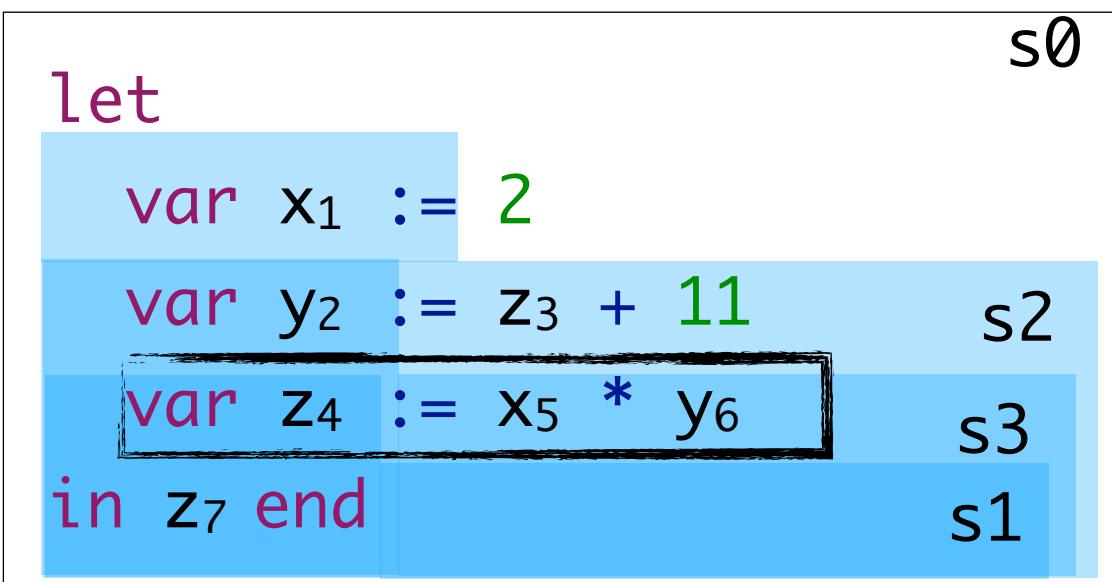

```

typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
    new s_body,
    decs0k(s_outer, s_body, ds),
    typeOfSeq(s_body, es) == T.

decs0k(s_outer, s_body, []) :-  

    s_body -P-> s_outer.


decs0k(s_outer, s_body, [dec]) :-  

    s_body -P-> s_outer,  


    dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
    new s_dec,
    s_dec -P-> s_outer,
    dec0k(s_dec, s_outer, dec),
    decs0k(s_dec, s_body, decs).

```

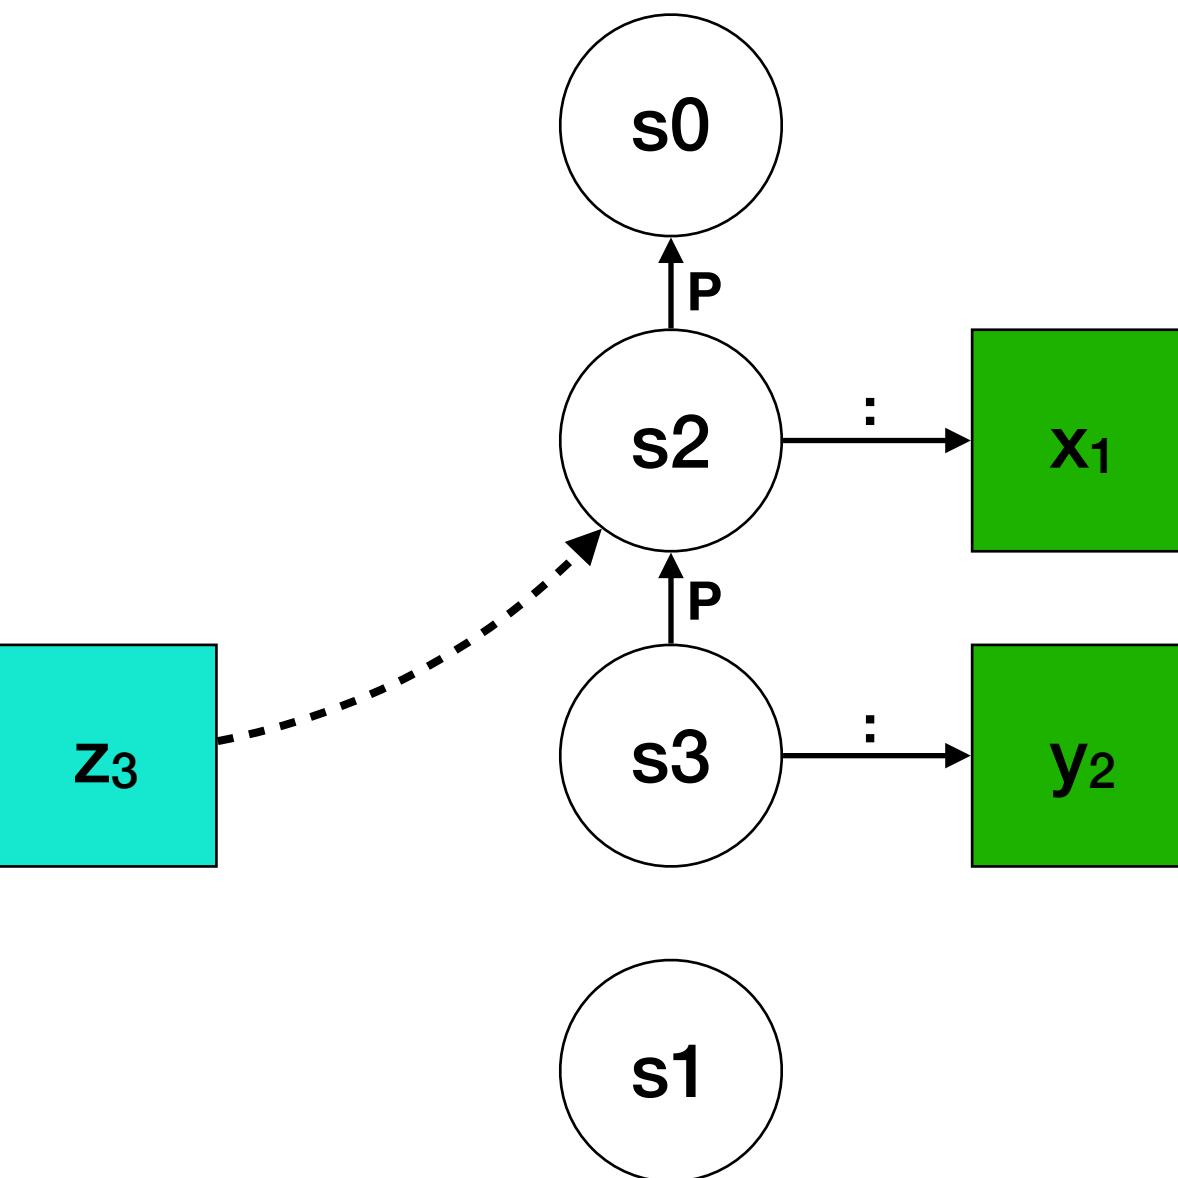

# Sequential Let

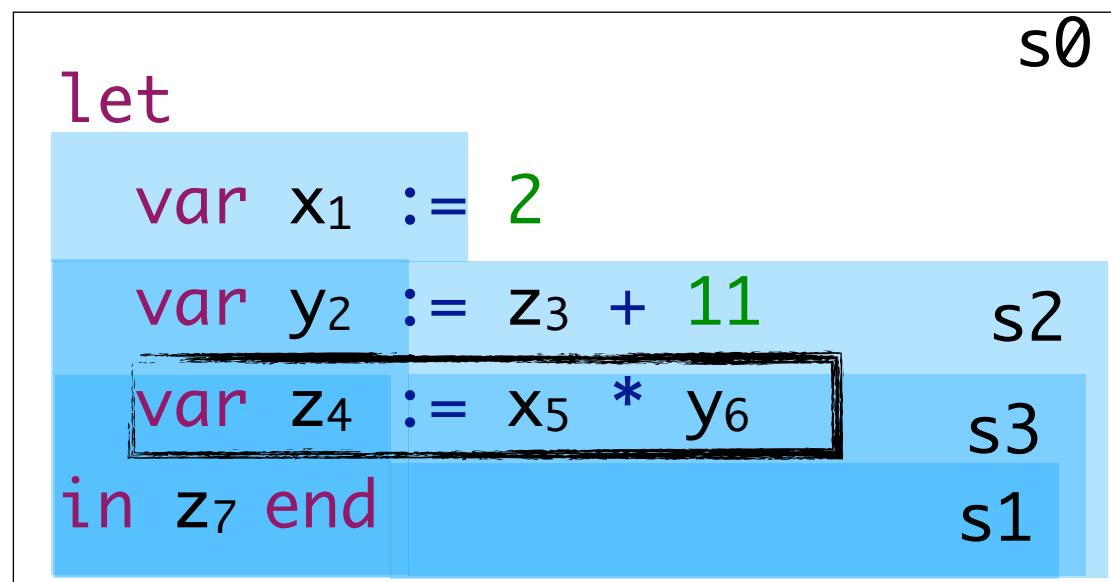

```

typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
    new s_body,
    decs0k(s_outer, s_body, ds),
    typeOfSeq(s_body, es) == T.

decs0k(s_outer, s_body, []) :-  

    s_body -P-> s_outer.


decs0k(s_outer, s_body, [dec]) :-  

    s_body -P-> s_outer,  


    dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
    new s_dec,
    s_dec -P-> s_outer,
    dec0k(s_dec, s_outer, dec),
    decs0k(s_dec, s_body, decs).

```

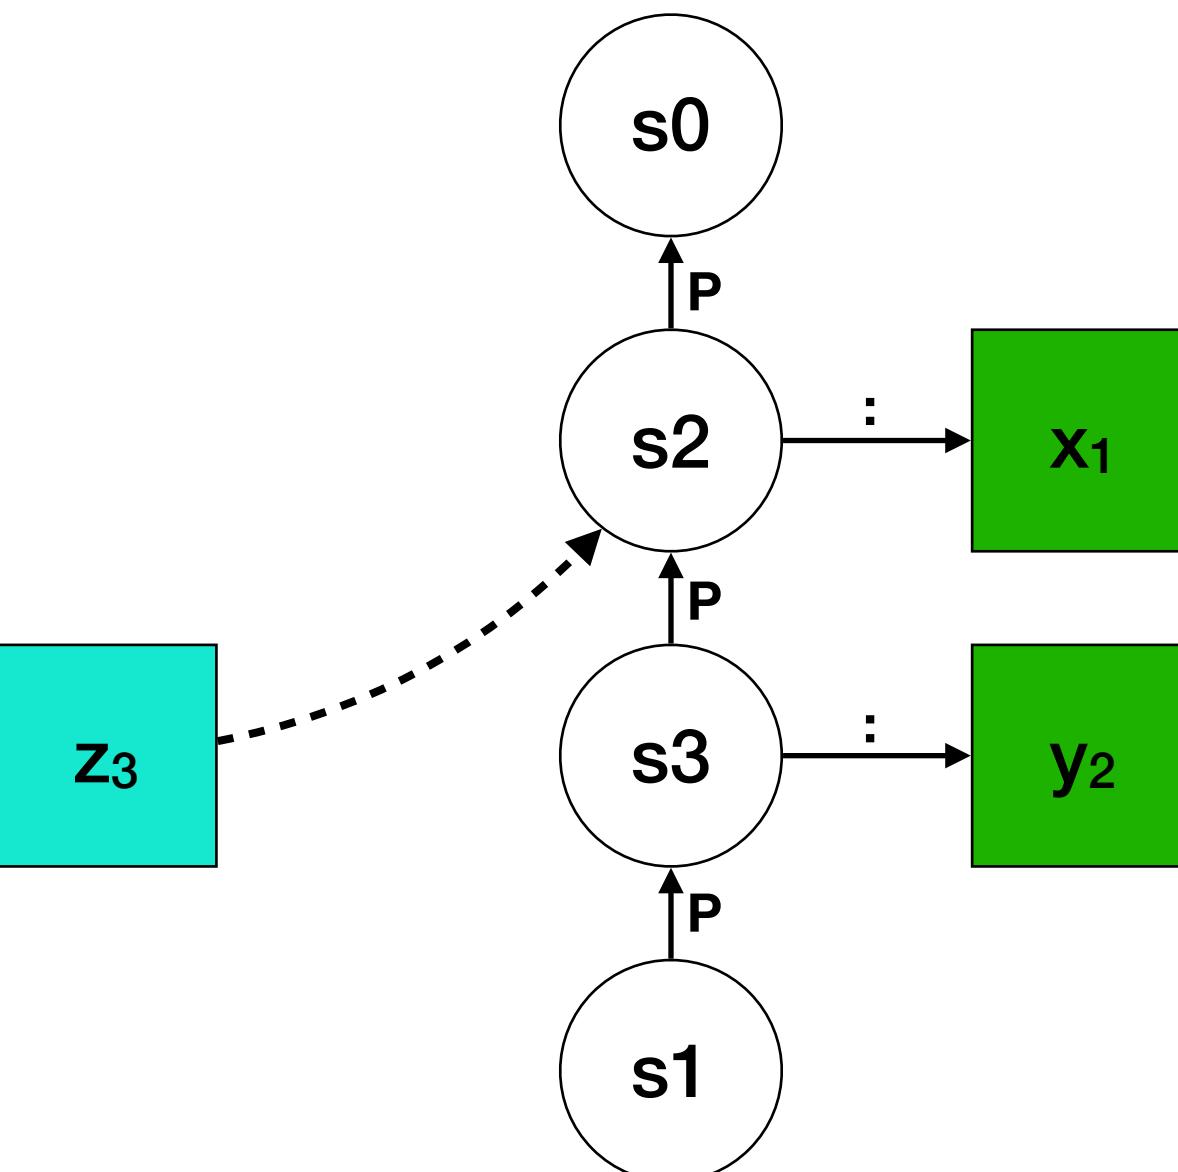

# Sequential Let

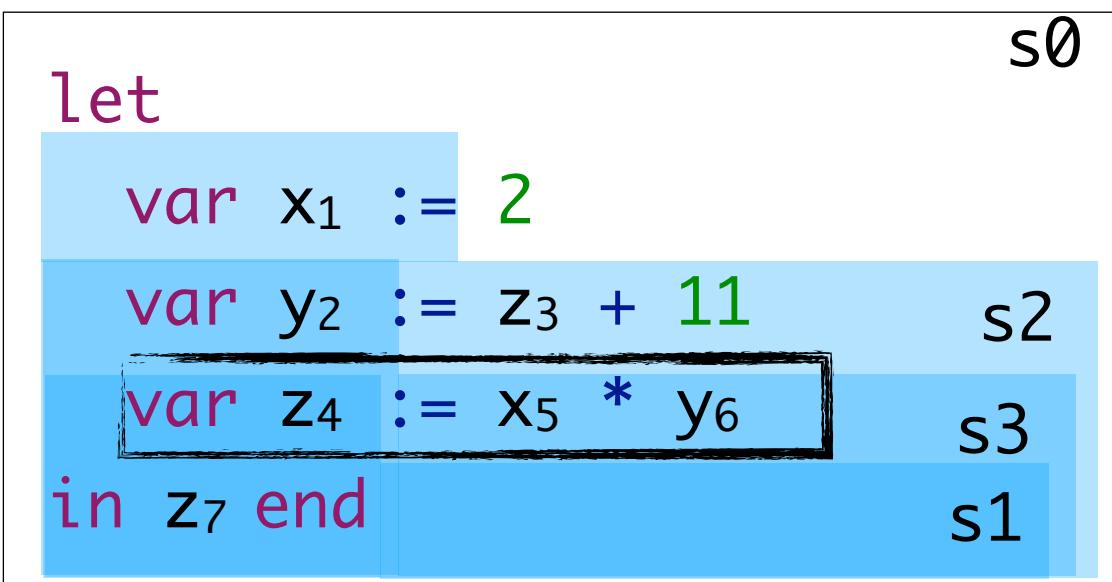

```

typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
    new s_body,
    decs0k(s_outer, s_body, ds),
    typeOfSeq(s_body, es) == T.

decs0k(s_outer, s_body, []) :-  

    s_body -P-> s_outer.


decs0k(s_outer, s_body, [dec]) :-  

    s_body -P-> s_outer,  

    dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
    new s_dec,
    s_dec -P-> s_outer,
    dec0k(s_dec, s_outer, dec),
    decs0k(s_dec, s_body, decs).

```

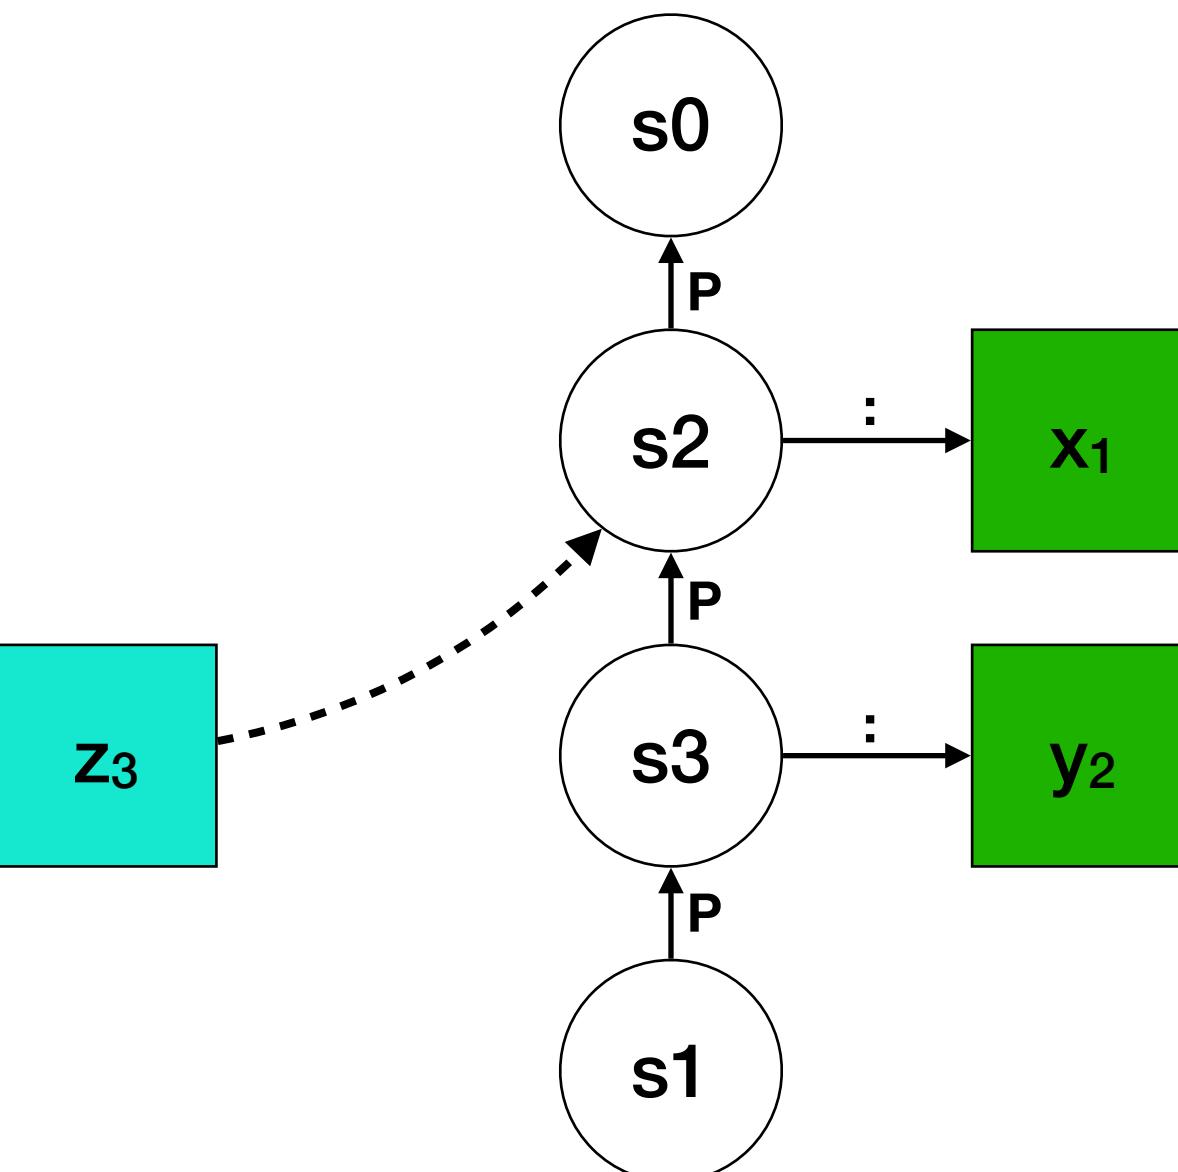

# Sequential Let

```

let
  var x1 := 2
  var y2 := z3 + 11      s2
  var z4 := x5 * y6      s3
in z7 end               s1

```

```


typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.

decs0k(s_outer, s_body, []) :-
  s_body -P-> s_outer.

decs0k(s_outer, s_body, [dec]) :-
  s_body -P-> s_outer,
  dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,
  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).

```

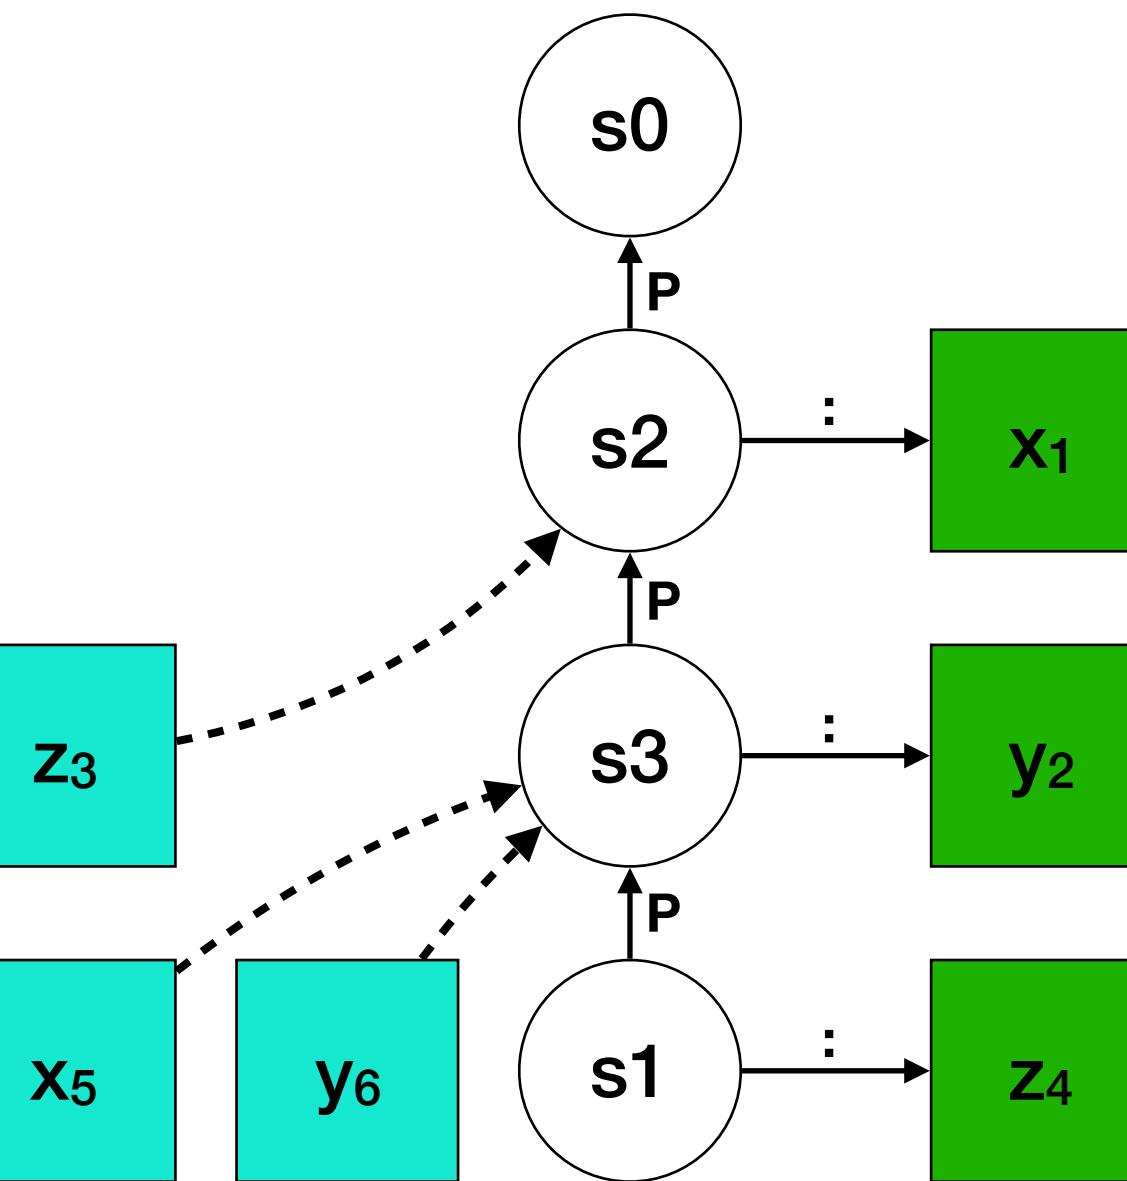

# Sequential Let

```

let
  var x1 := 2
  var y2 := z3 + 11      s2
  var z4 := x5 * y6      s3
in z7 end               s1

```

```


typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.

decs0k(s_outer, s_body, []) :-
  s_body -P-> s_outer.

decs0k(s_outer, s_body, [dec]) :-
  s_body -P-> s_outer,
  dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,
  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).

```

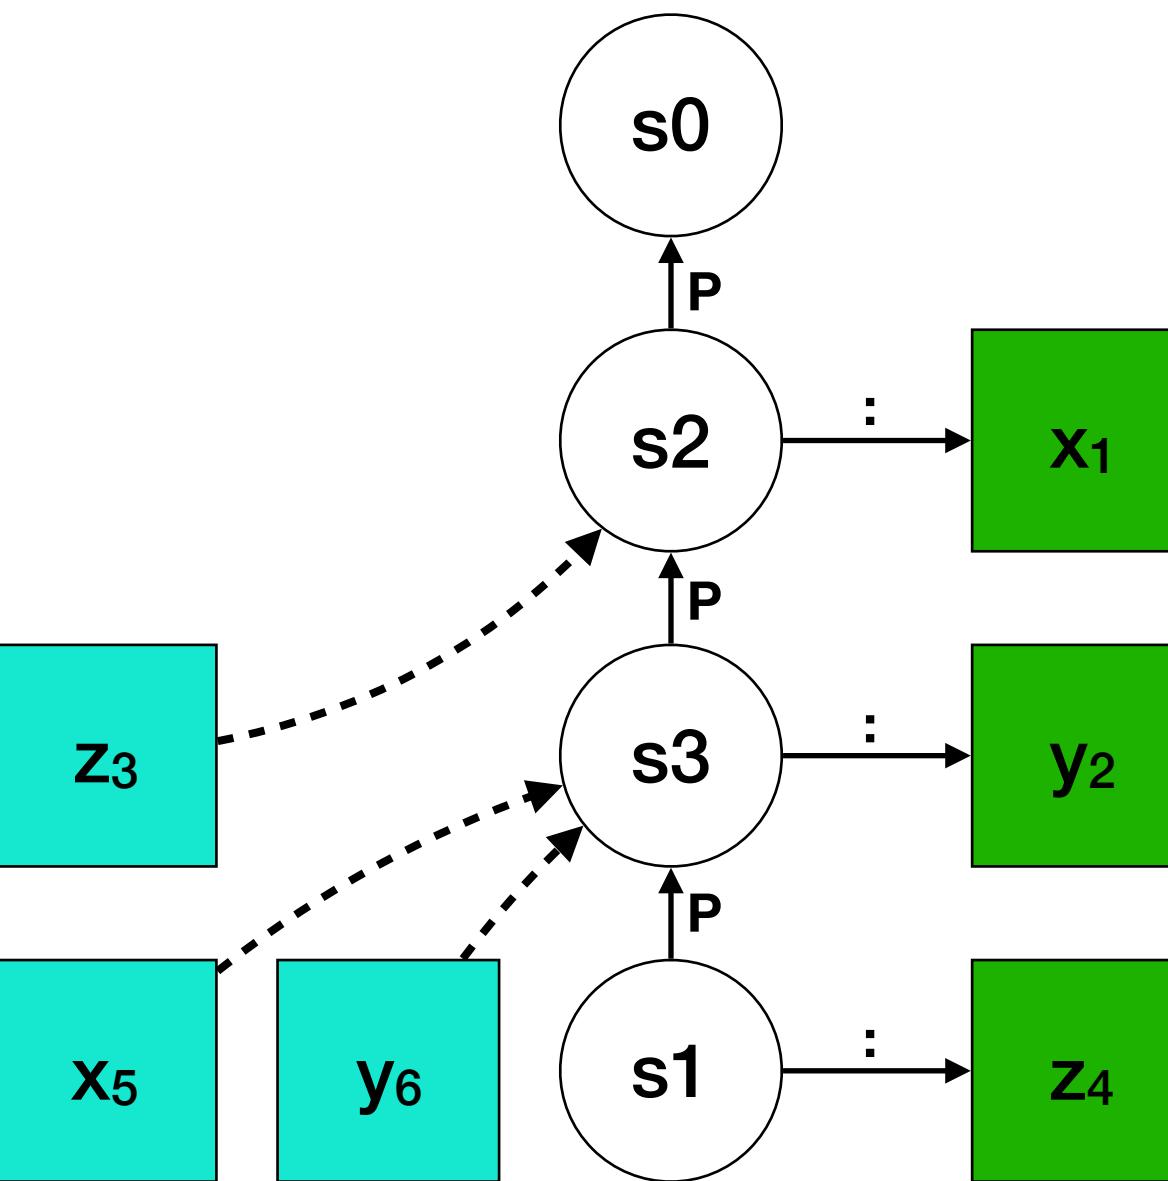

# Sequential Let

```

let
  var x1 := 2
  var y2 := z3 + 11      s2
  var z4 := x5 * y6      s3
in z7 end               s1

```

```

typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.

decs0k(s_outer, s_body, []) :-  


  s_body -P-> s_outer.

decs0k(s_outer, s_body, [dec]) :-  

  s_body -P-> s_outer,
  dec0k(s_body, s_outer, dec).

decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,
  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).

```

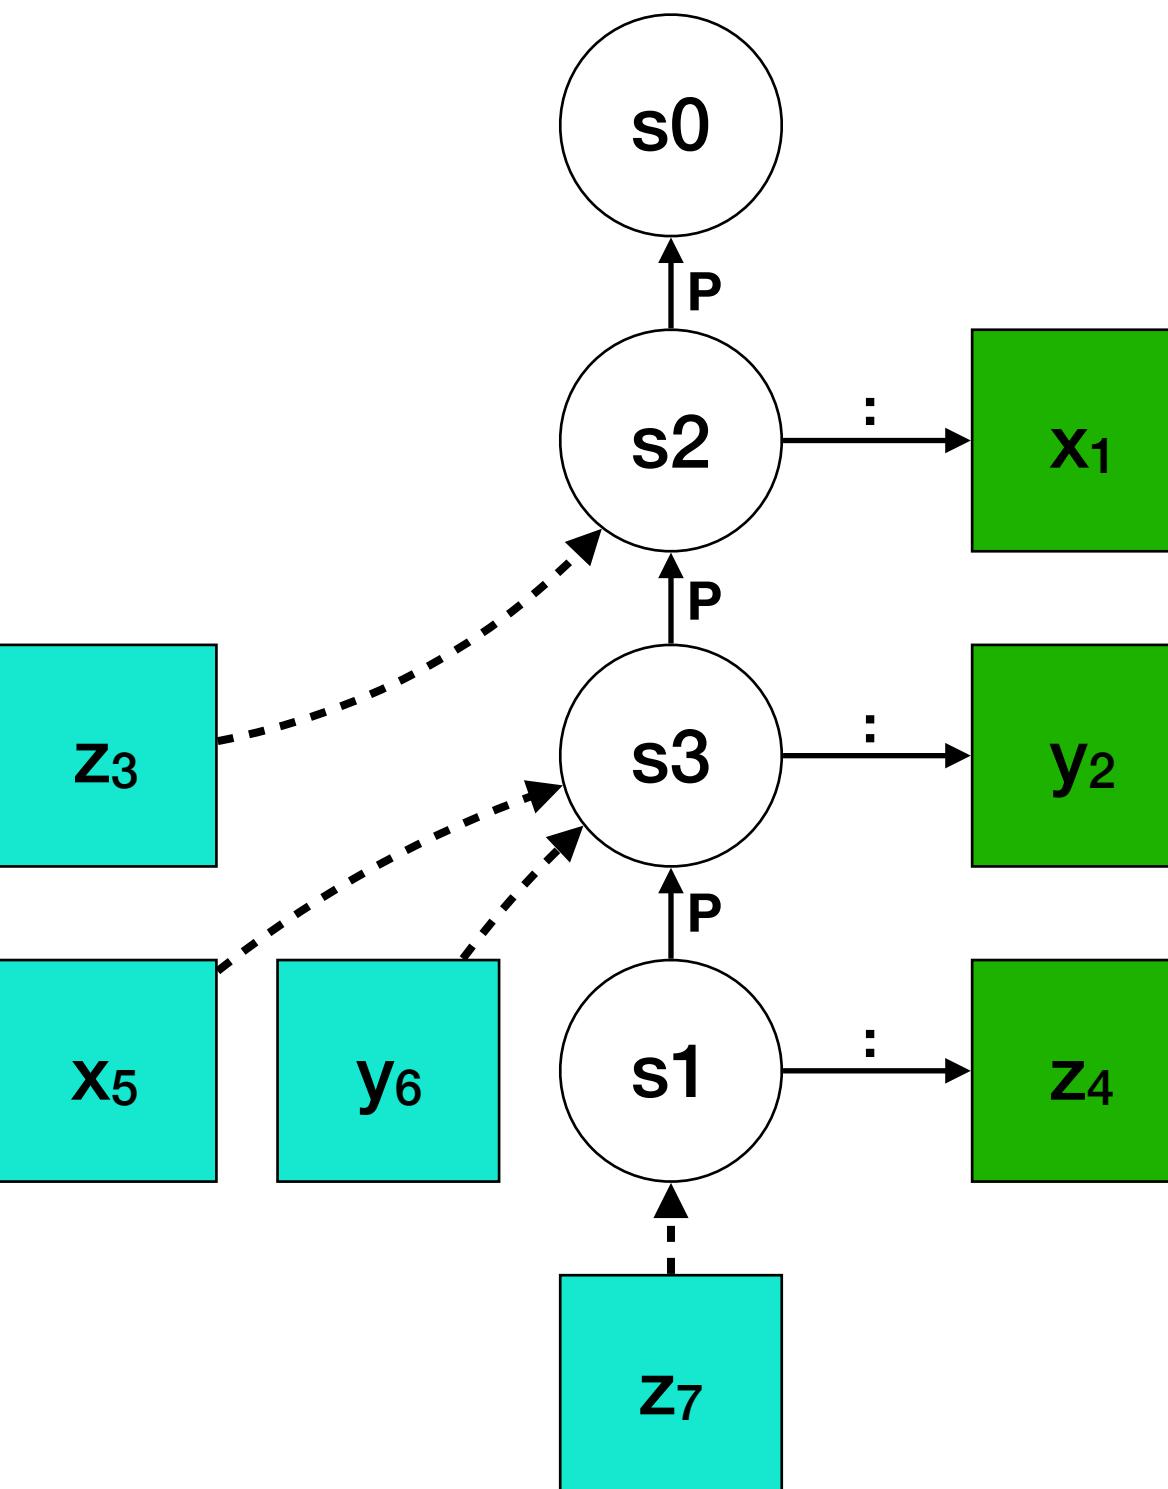

# Sequential Let

```

let
  var x1 := 2
  var y2 := z3 + 11      s2
  var z4 := x5 * y6      s3
in z7 end               s1

```

```


typeOfExp(s_outer, Let(ds, es)) = T :- {s_body}
  new s_body,
  decs0k(s_outer, s_body, ds),
  typeOfSeq(s_body, es) == T.

decs0k(s_outer, s_body, []) :-
  s_body -P-> s_outer.

decs0k(s_outer, s_body, [dec]) :-
  s_body -P-> s_outer,
  dec0k(s_body, s_outer, dec).


decs0k(s_outer, s_body, [dec | decs@[_|_]]) :- {s_dec}
  new s_dec,
  s_dec -P-> s_outer,
  dec0k(s_dec, s_outer, dec),
  decs0k(s_dec, s_body, decs).

```

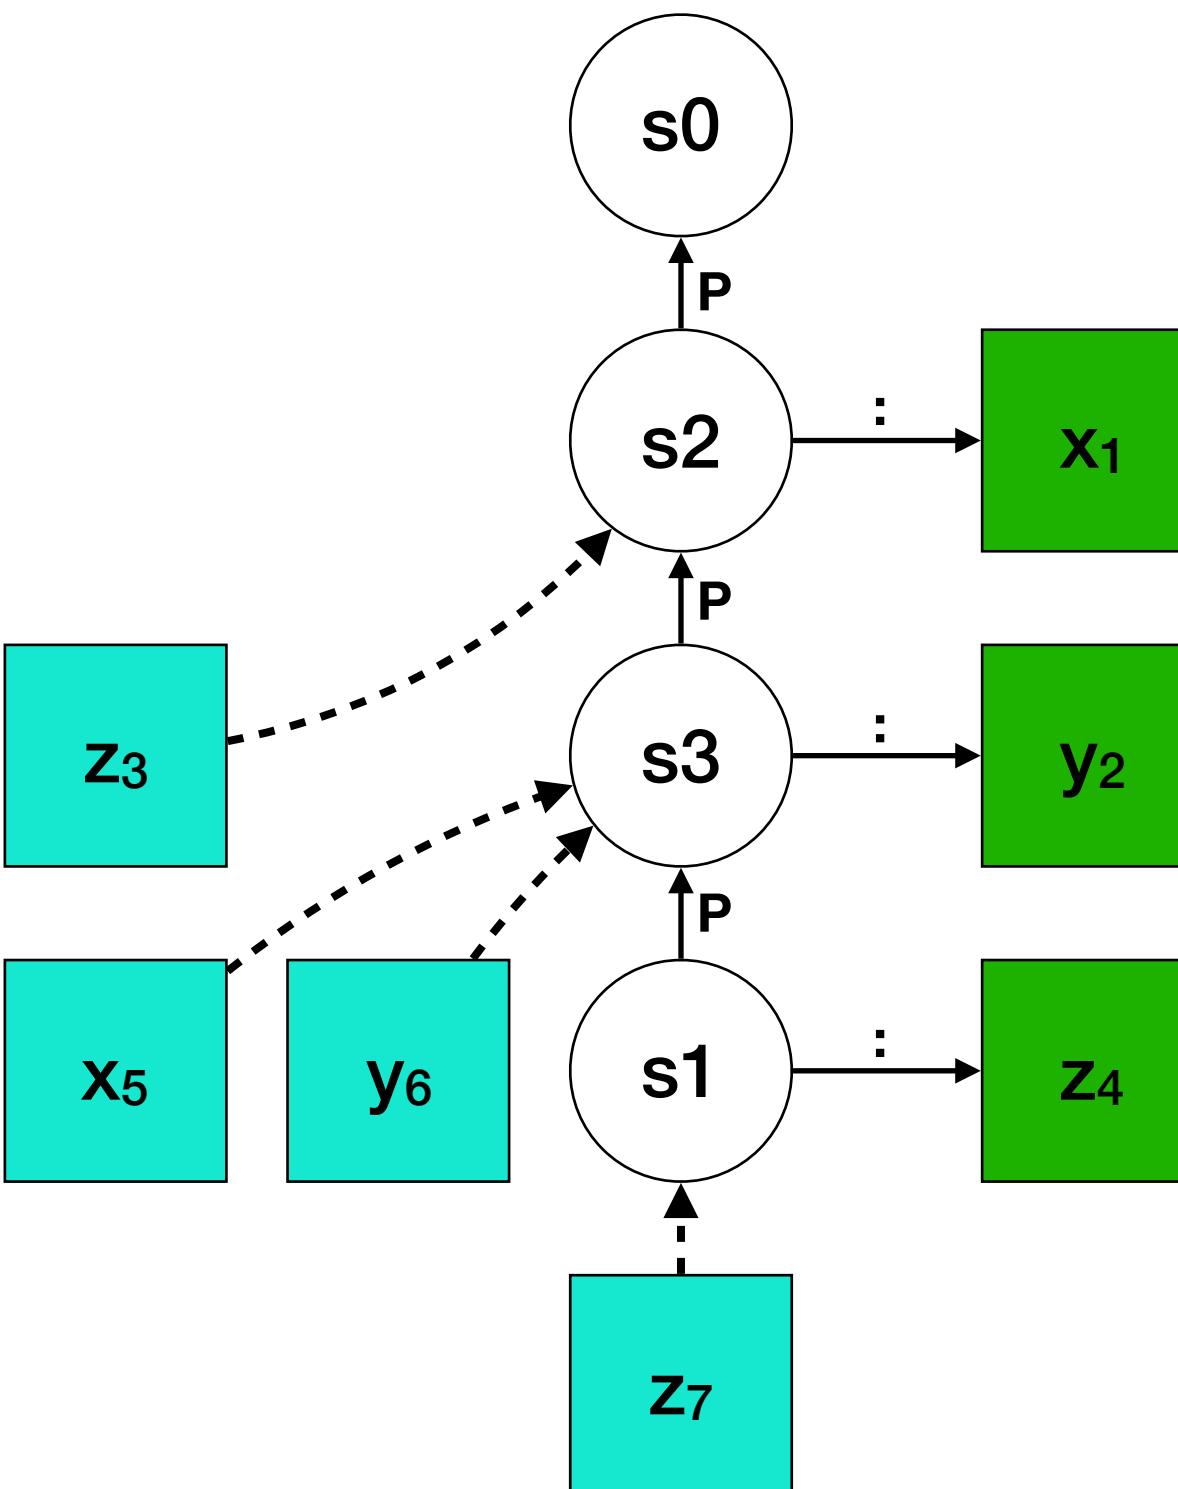

# Record Definitions


```
let                                s0
  type point1 = { x2 : int, y3 : int }
  var p4 := point5{ x6 = 4, y7 = 5 }      s1
in                                s3
  p8.x9
end
```

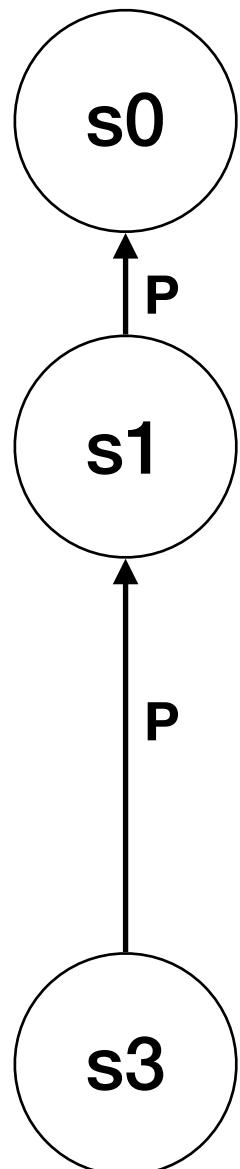

# Record Definitions

```
let                                s0
  type point1 = { x2 : int, y3 : int }
  var p4 := point5{ x6 = 4, y7 = 5 }    s1
  in                                s3
    p8.x9
  end
```


```
typeOfType(s, RecordTy(fields)) = RECORD(s_rec) :-  
  new s_rec,  
  fields0k(s_rec, s, fields).  
  
field0k(s_rec, s_outer, Field(x, t)) :- {T}  
  typeOfType(s_outer, Tid(t)) == T,  
  declareField(s_rec, x, T).  
  
declareField(s, x, T) :-  
  s -> Field{x} with typeOfDecl T,  
  // declaration is distinct  
  typeOfDecl of Field{x} in s |-> [(_, _, T)].
```

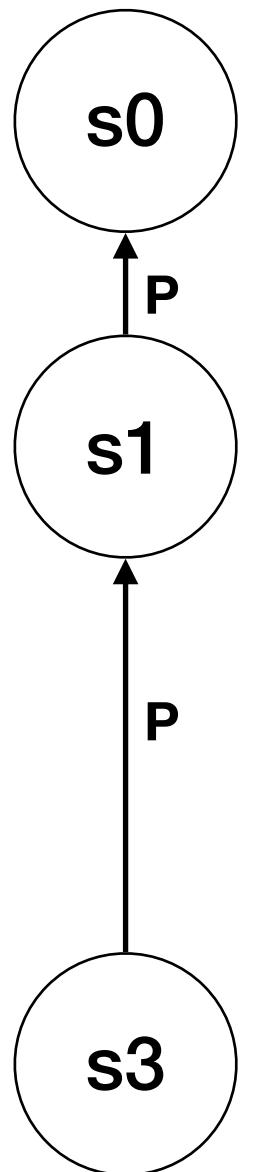

# Record Definitions

```
let
  type point1 = { x2 : int, y3 : int }    s0
  var p4 := point5{ x6 = 4, y7 = 5 }      s1
in
  p8.x9                                s3
end
```


```
typeOfType(s, RecordTy(fields)) = RECORD(s_rec) :-  
  new s_rec,  
  fields0k(s_rec, s, fields).  
  
field0k(s_rec, s_outer, Field(x, t)) :- {T}  
  typeOfType(s_outer, Tid(t)) == T,  
  declareField(s_rec, x, T).  
  
declareField(s, x, T) :-  
  s -> Field{x} with typeOfDecl T,  
  // declaration is distinct  
  typeOfDecl of Field{x} in s |-> [(_, (_, T))].
```

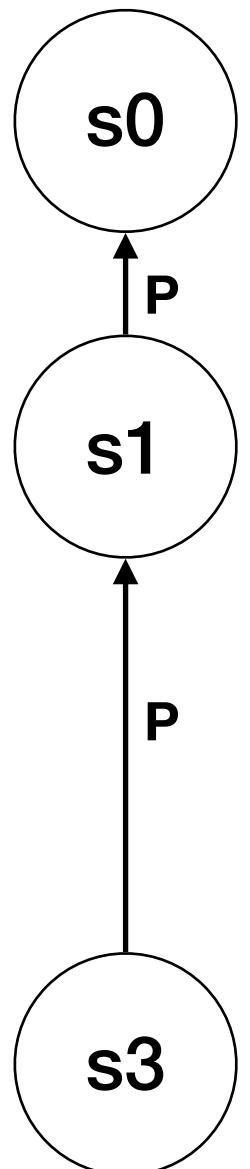

# Record Definitions

```
let
  type point1 = { x2 : int, y3 : int }    s0
  var p4 := point5{ x6 = 4, y7 = 5 }      s1
in
  p8.x9                                s3
end
```


```
typeOfType(s, RecordTy(fields)) = RECORD(s_rec) :-  
  new s_rec,  
  fields0k(s_rec, s, fields).  
  
field0k(s_rec, s_outer, Field(x, t)) :- {T}  
  typeOfType(s_outer, Tid(t)) == T,  
  declareField(s_rec, x, T).  
  
declareField(s, x, T) :-  
  s -> Field{x} with typeOfDecl T,  
  // declaration is distinct  
  typeOfDecl of Field{x} in s |-> [(_, (_, T))].
```



# Record Definitions

```
let
  type point1 = { x2 : int, y3 : int }    s0
  var p4 := point5{ x6 = 4, y7 = 5 }      s1
in
  p8.x9                                s3
end
```

```
typeOfType(s, RecordTy(fields)) = RECORD(s_rec) :-  
  new s_rec,  
  fields0k(s_rec, s, fields).  
  
field0k(s_rec, s_outer, Field(x, t)) :- {T}  
  typeOfType(s_outer, Tid(t)) == T,  
  declareField(s_rec, x, T).  
  
declareField(s, x, T) :-  
  s -> Field{x} with typeOfDecl T,  
  // declaration is distinct  
  typeOfDecl of Field{x} in s |-> [(_, (_, T))].
```



# Record Definitions

```

let
  type point1 = { x2 : int, y3 : int }    s0
  var p4 := point5{ x6 = 4, y7 = 5 }      s1
in
  p8.x9                                s3
end

```

```

typeOfType(s, RecordTy(fields)) = RECORD(s_rec) :-  

  new s_rec,  

  fields0k(s_rec, s, fields).  
  

field0k(s_rec, s_outer, Field(x, t)) :- {T}  

  typeOfType(s_outer, Tid(t)) == T,  

  declareField(s_rec, x, T).  
  


declareField(s, x, T) :-  

  s -> Field{x} with typeOfDecl T,  

  // declaration is distinct  

  typeOfDecl of Field{x} in s |-> [(_, (_, T))].

```

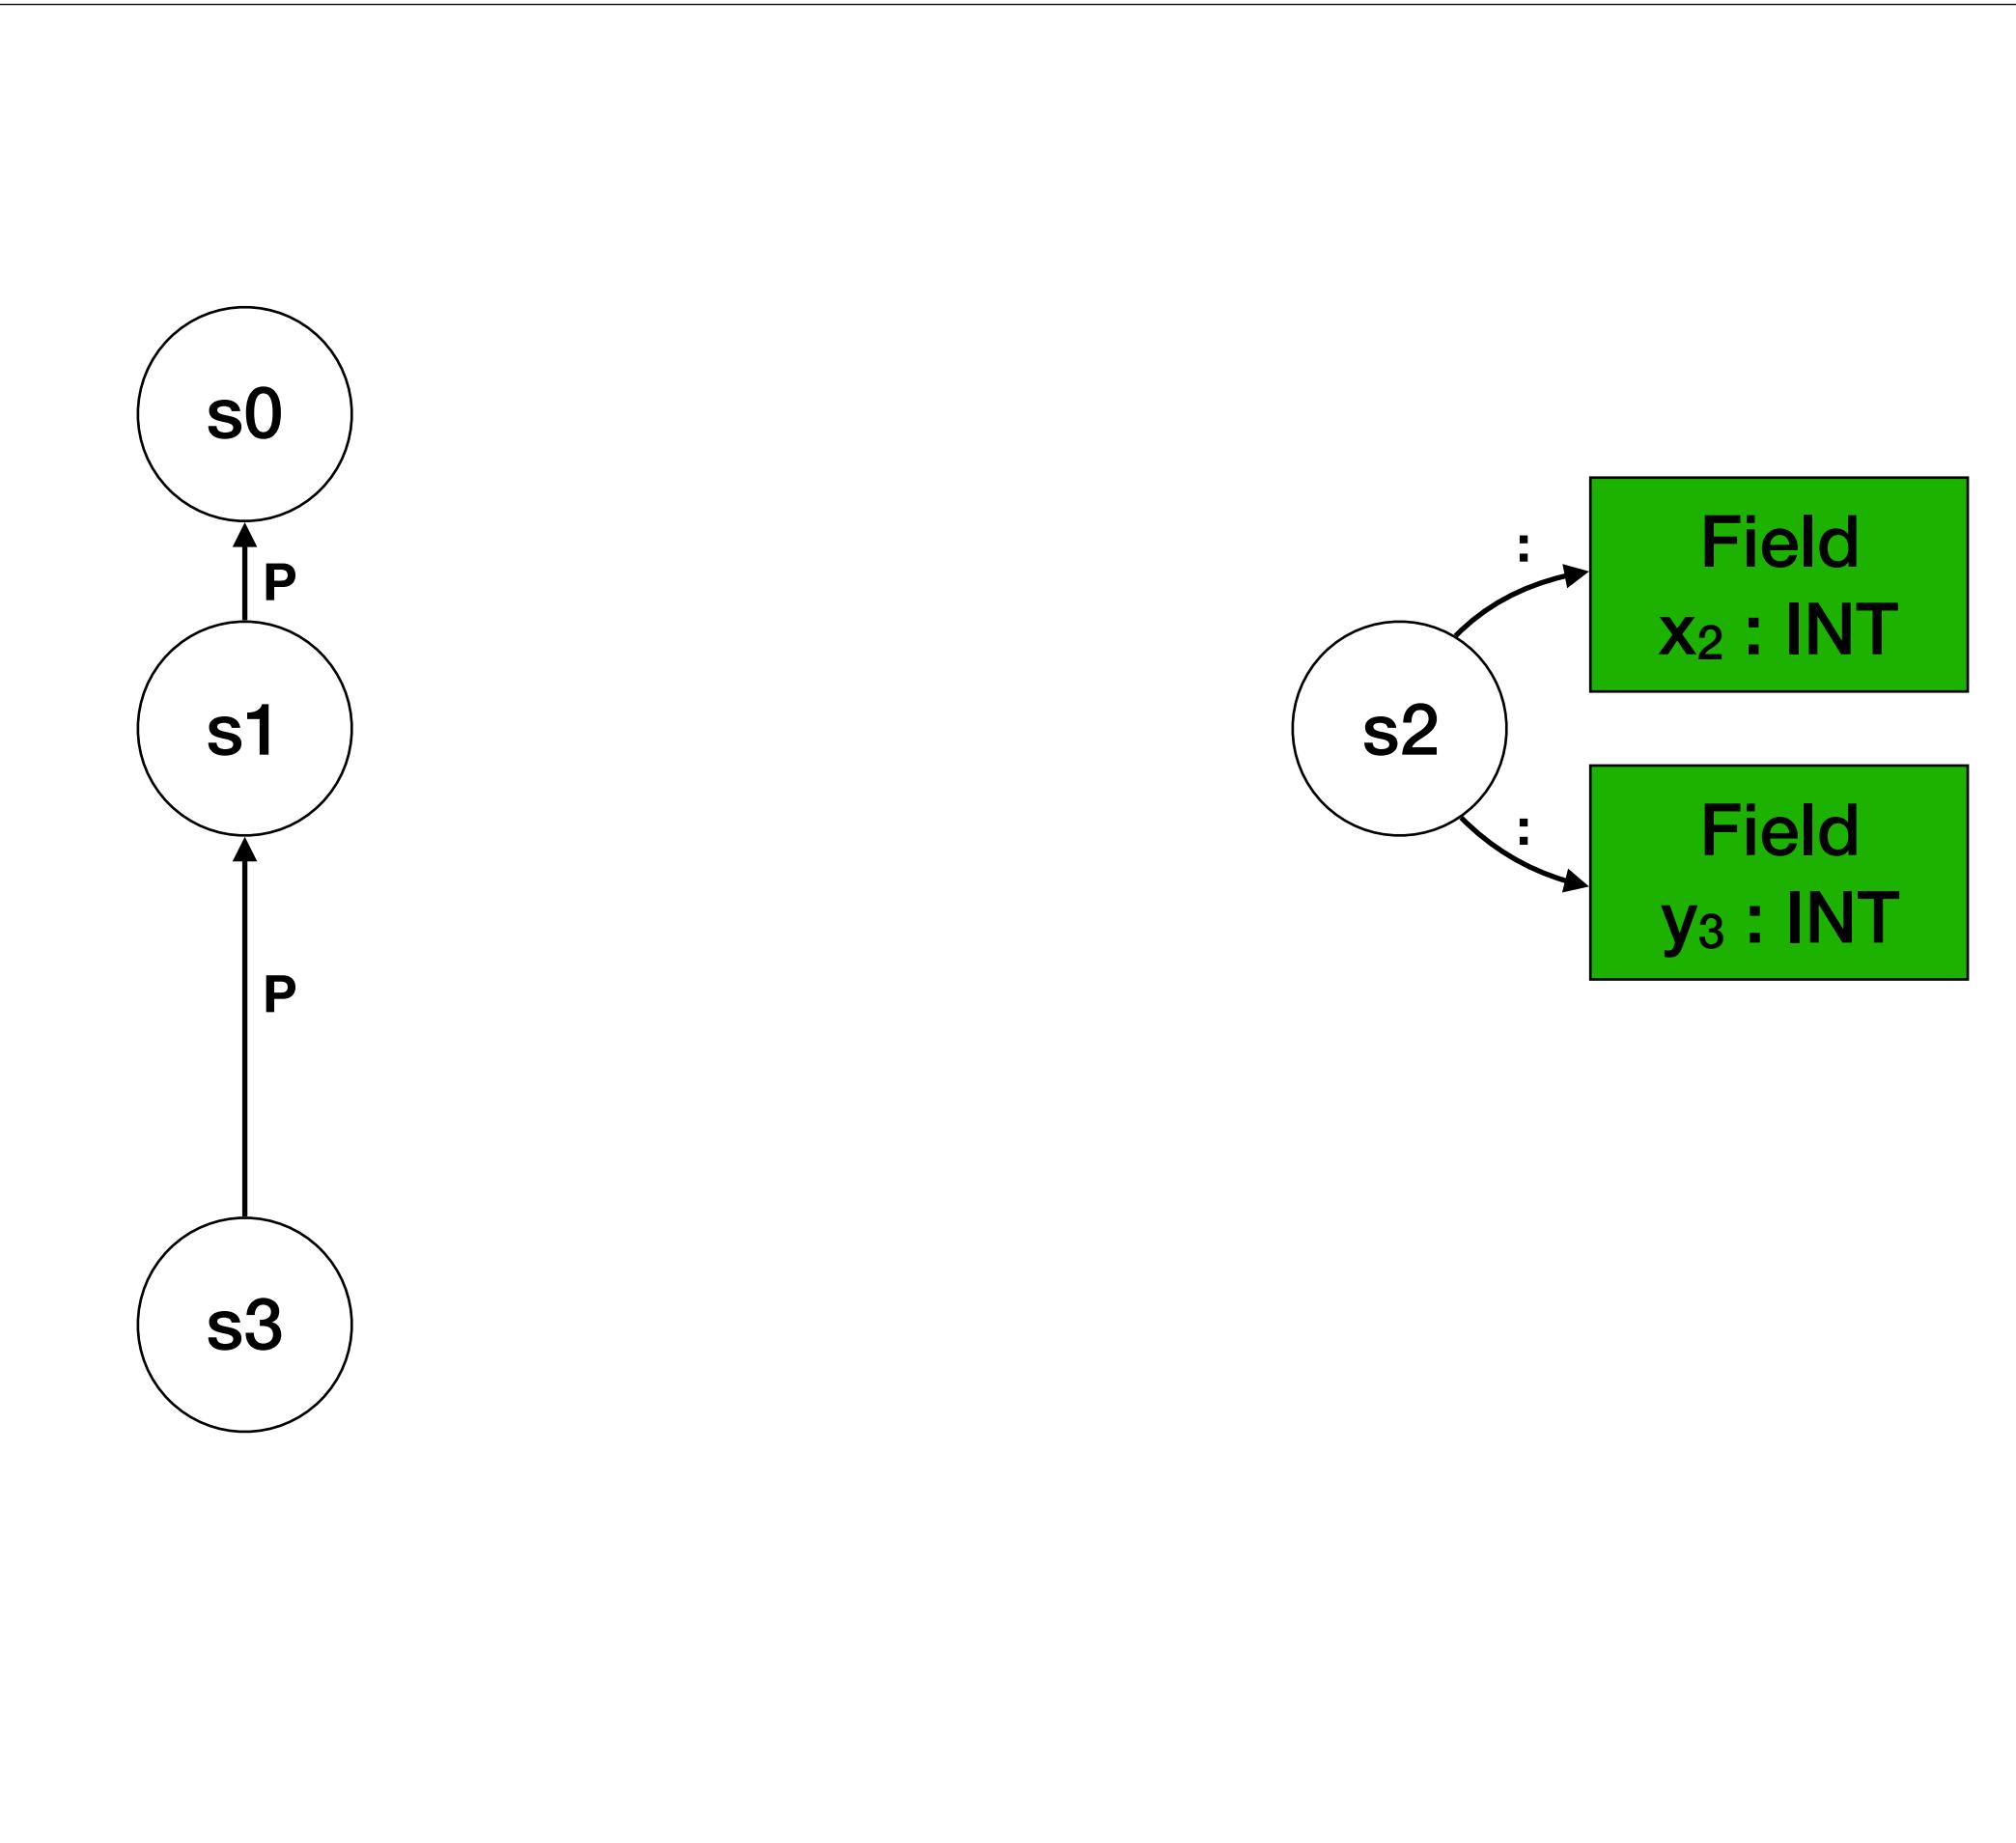

# Record Definitions

```

let
  type point1 = { x2 : int, y3 : int }    s0
  var p4 := point5{ x6 = 4, y7 = 5 }      s1
in
  p8.x9                                s3
end

```

```

typeOfType(s, RecordTy(fields)) = RECORD(s_rec) :-  

  new s_rec,  

  fields0k(s_rec, s, fields).  
  

field0k(s_rec, s_outer, Field(x, t)) :- {T}  

  typeOfType(s_outer, Tid(t)) == T,  

  declareField(s_rec, x, T).  
  


declareField(s, x, T) :-  

  s -> Field{x} with typeOfDecl T,  

  // declaration is distinct  

  typeOfDecl of Field{x} in s |-> [(_, (_, T))].

```

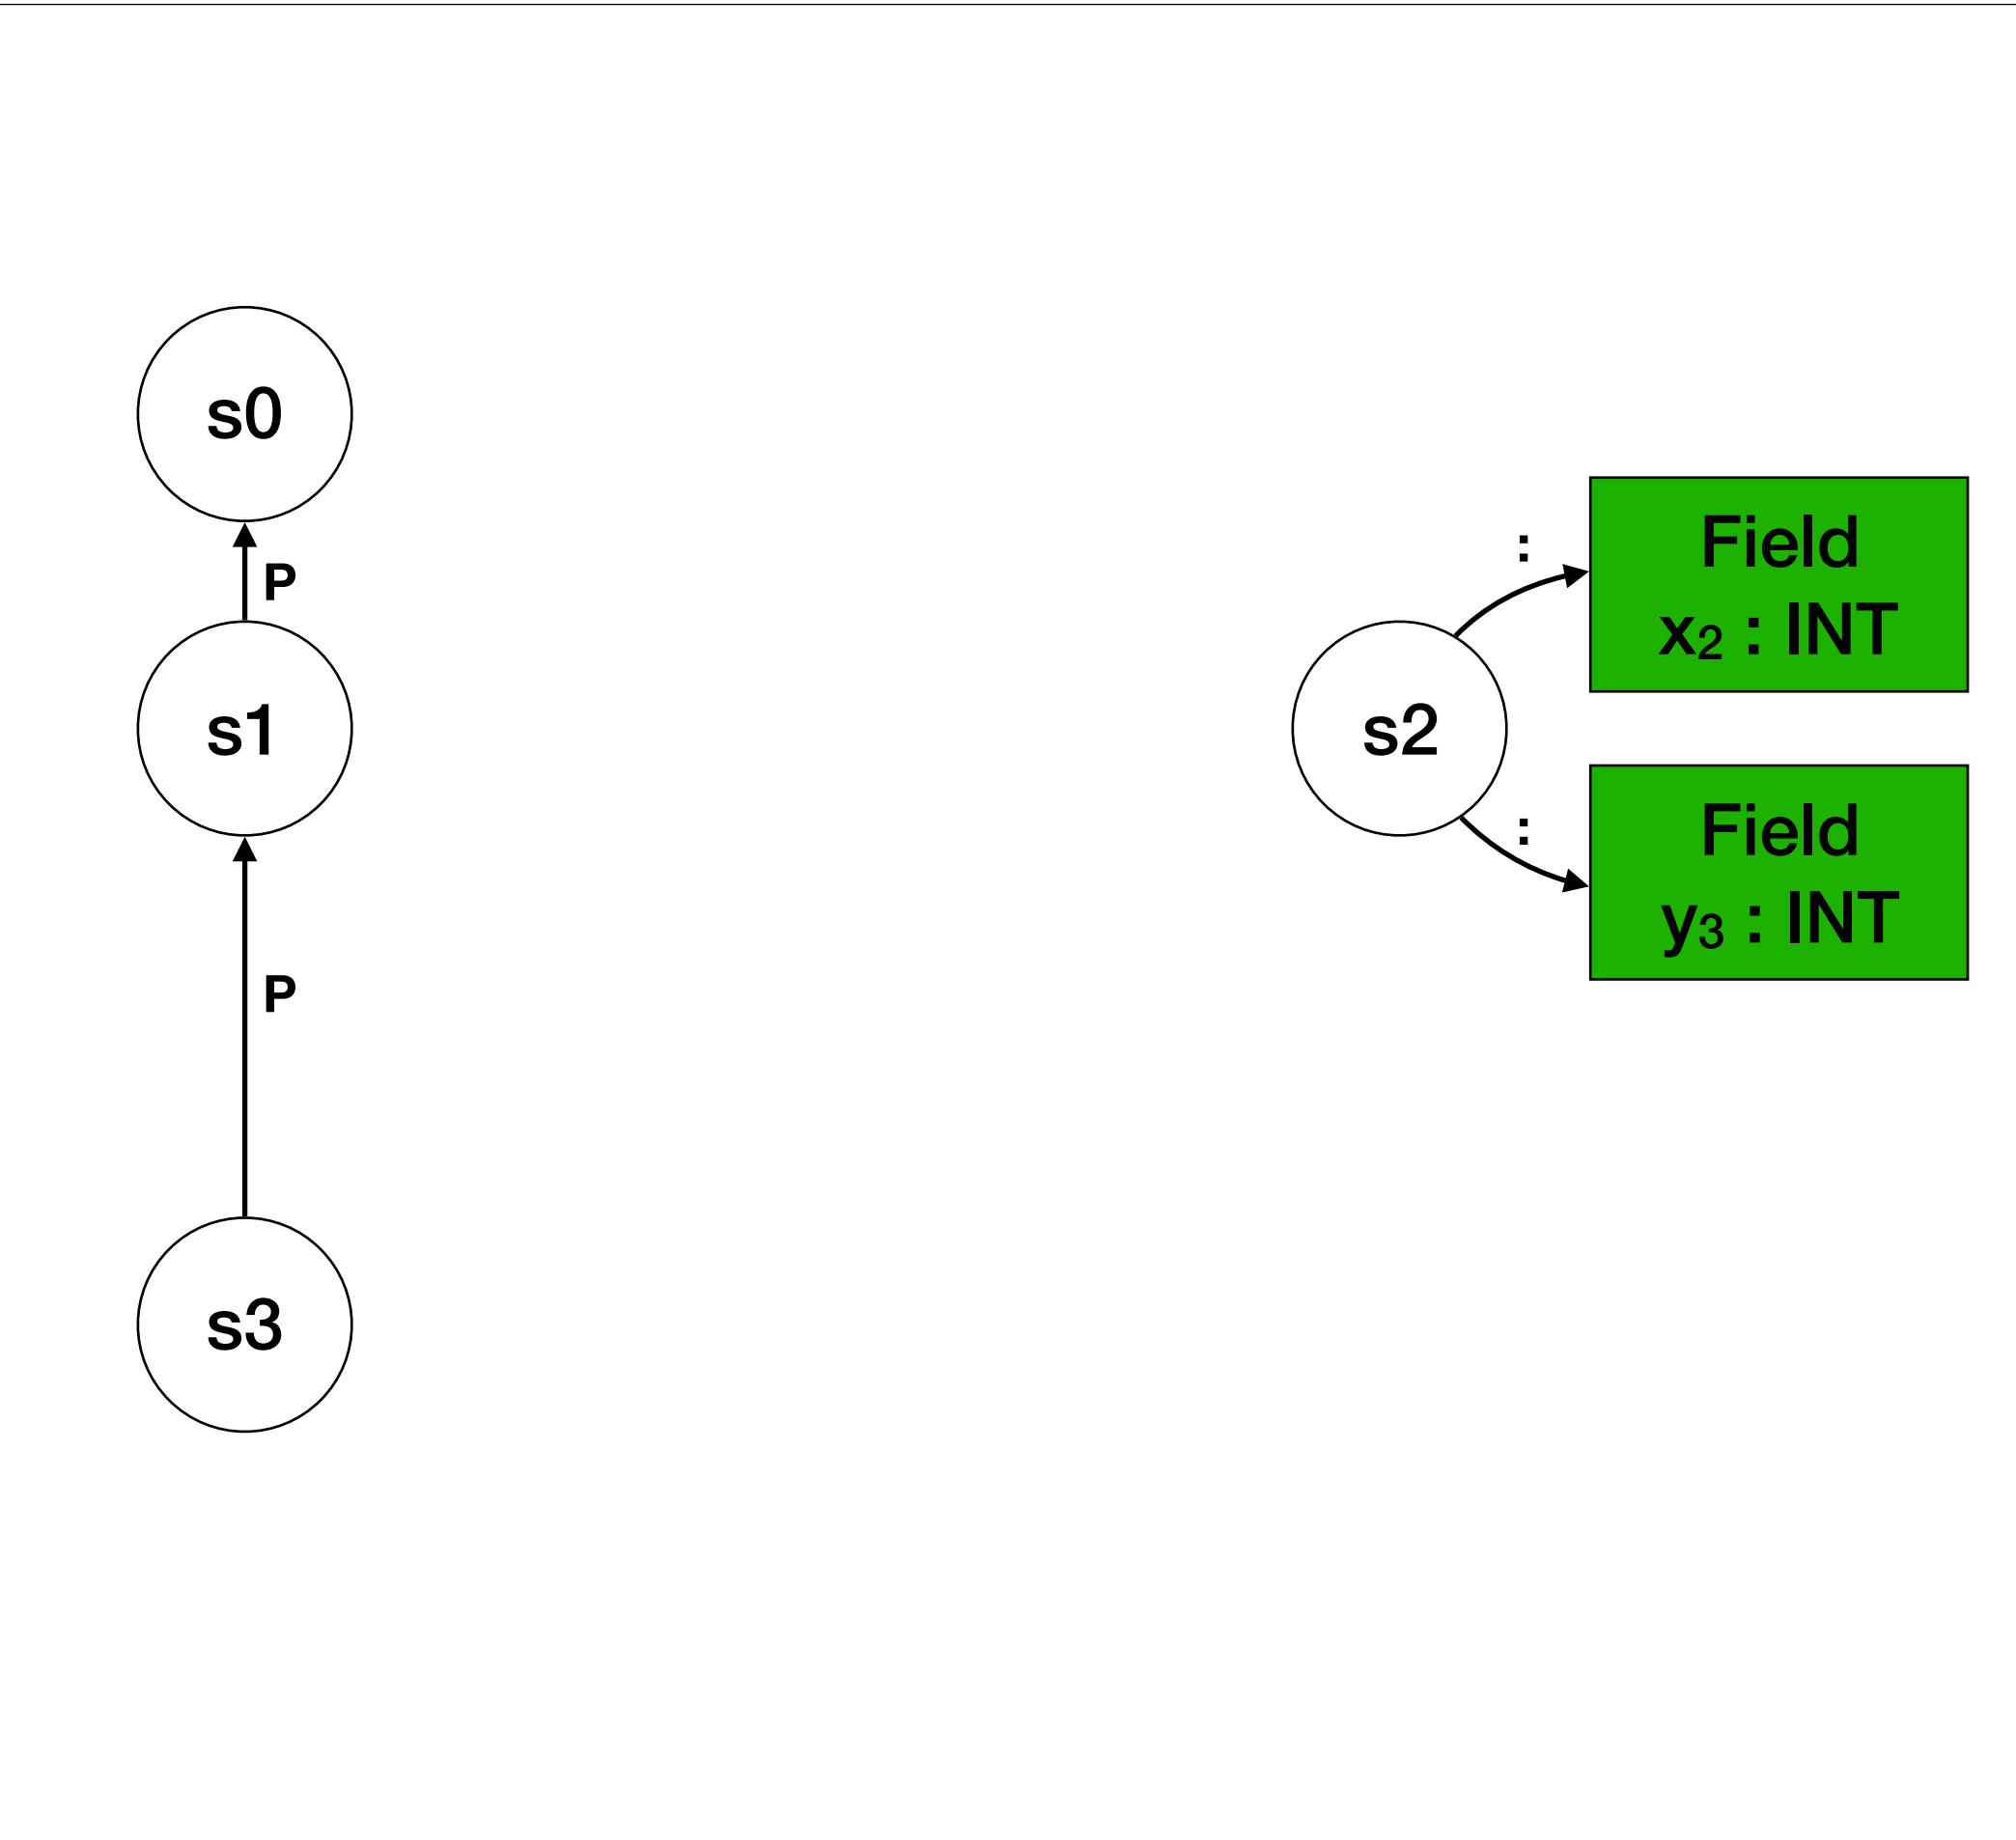

# Record Definitions

```

let
  type point1 = { x2 : int, y3 : int }    s2
  var p4 := point5{ x6 = 4, y7 = 5 }      s1
in
  p8.x9                                s3
end

```

```

typeOfType(s, RecordTy(fields)) = RECORD(s_rec) :-  

  new s_rec,  

  fields0k(s_rec, s, fields).  
  

field0k(s_rec, s_outer, Field(x, t)) :- {T}  

  typeOfType(s_outer, Tid(t)) == T,  

  declareField(s_rec, x, T).  
  


declareField(s, x, T) :-  

  s -> Field{x} with typeOfDecl T,  

  // declaration is distinct  

  typeOfDecl of Field{x} in s |-> [(_, (_, T))].

```

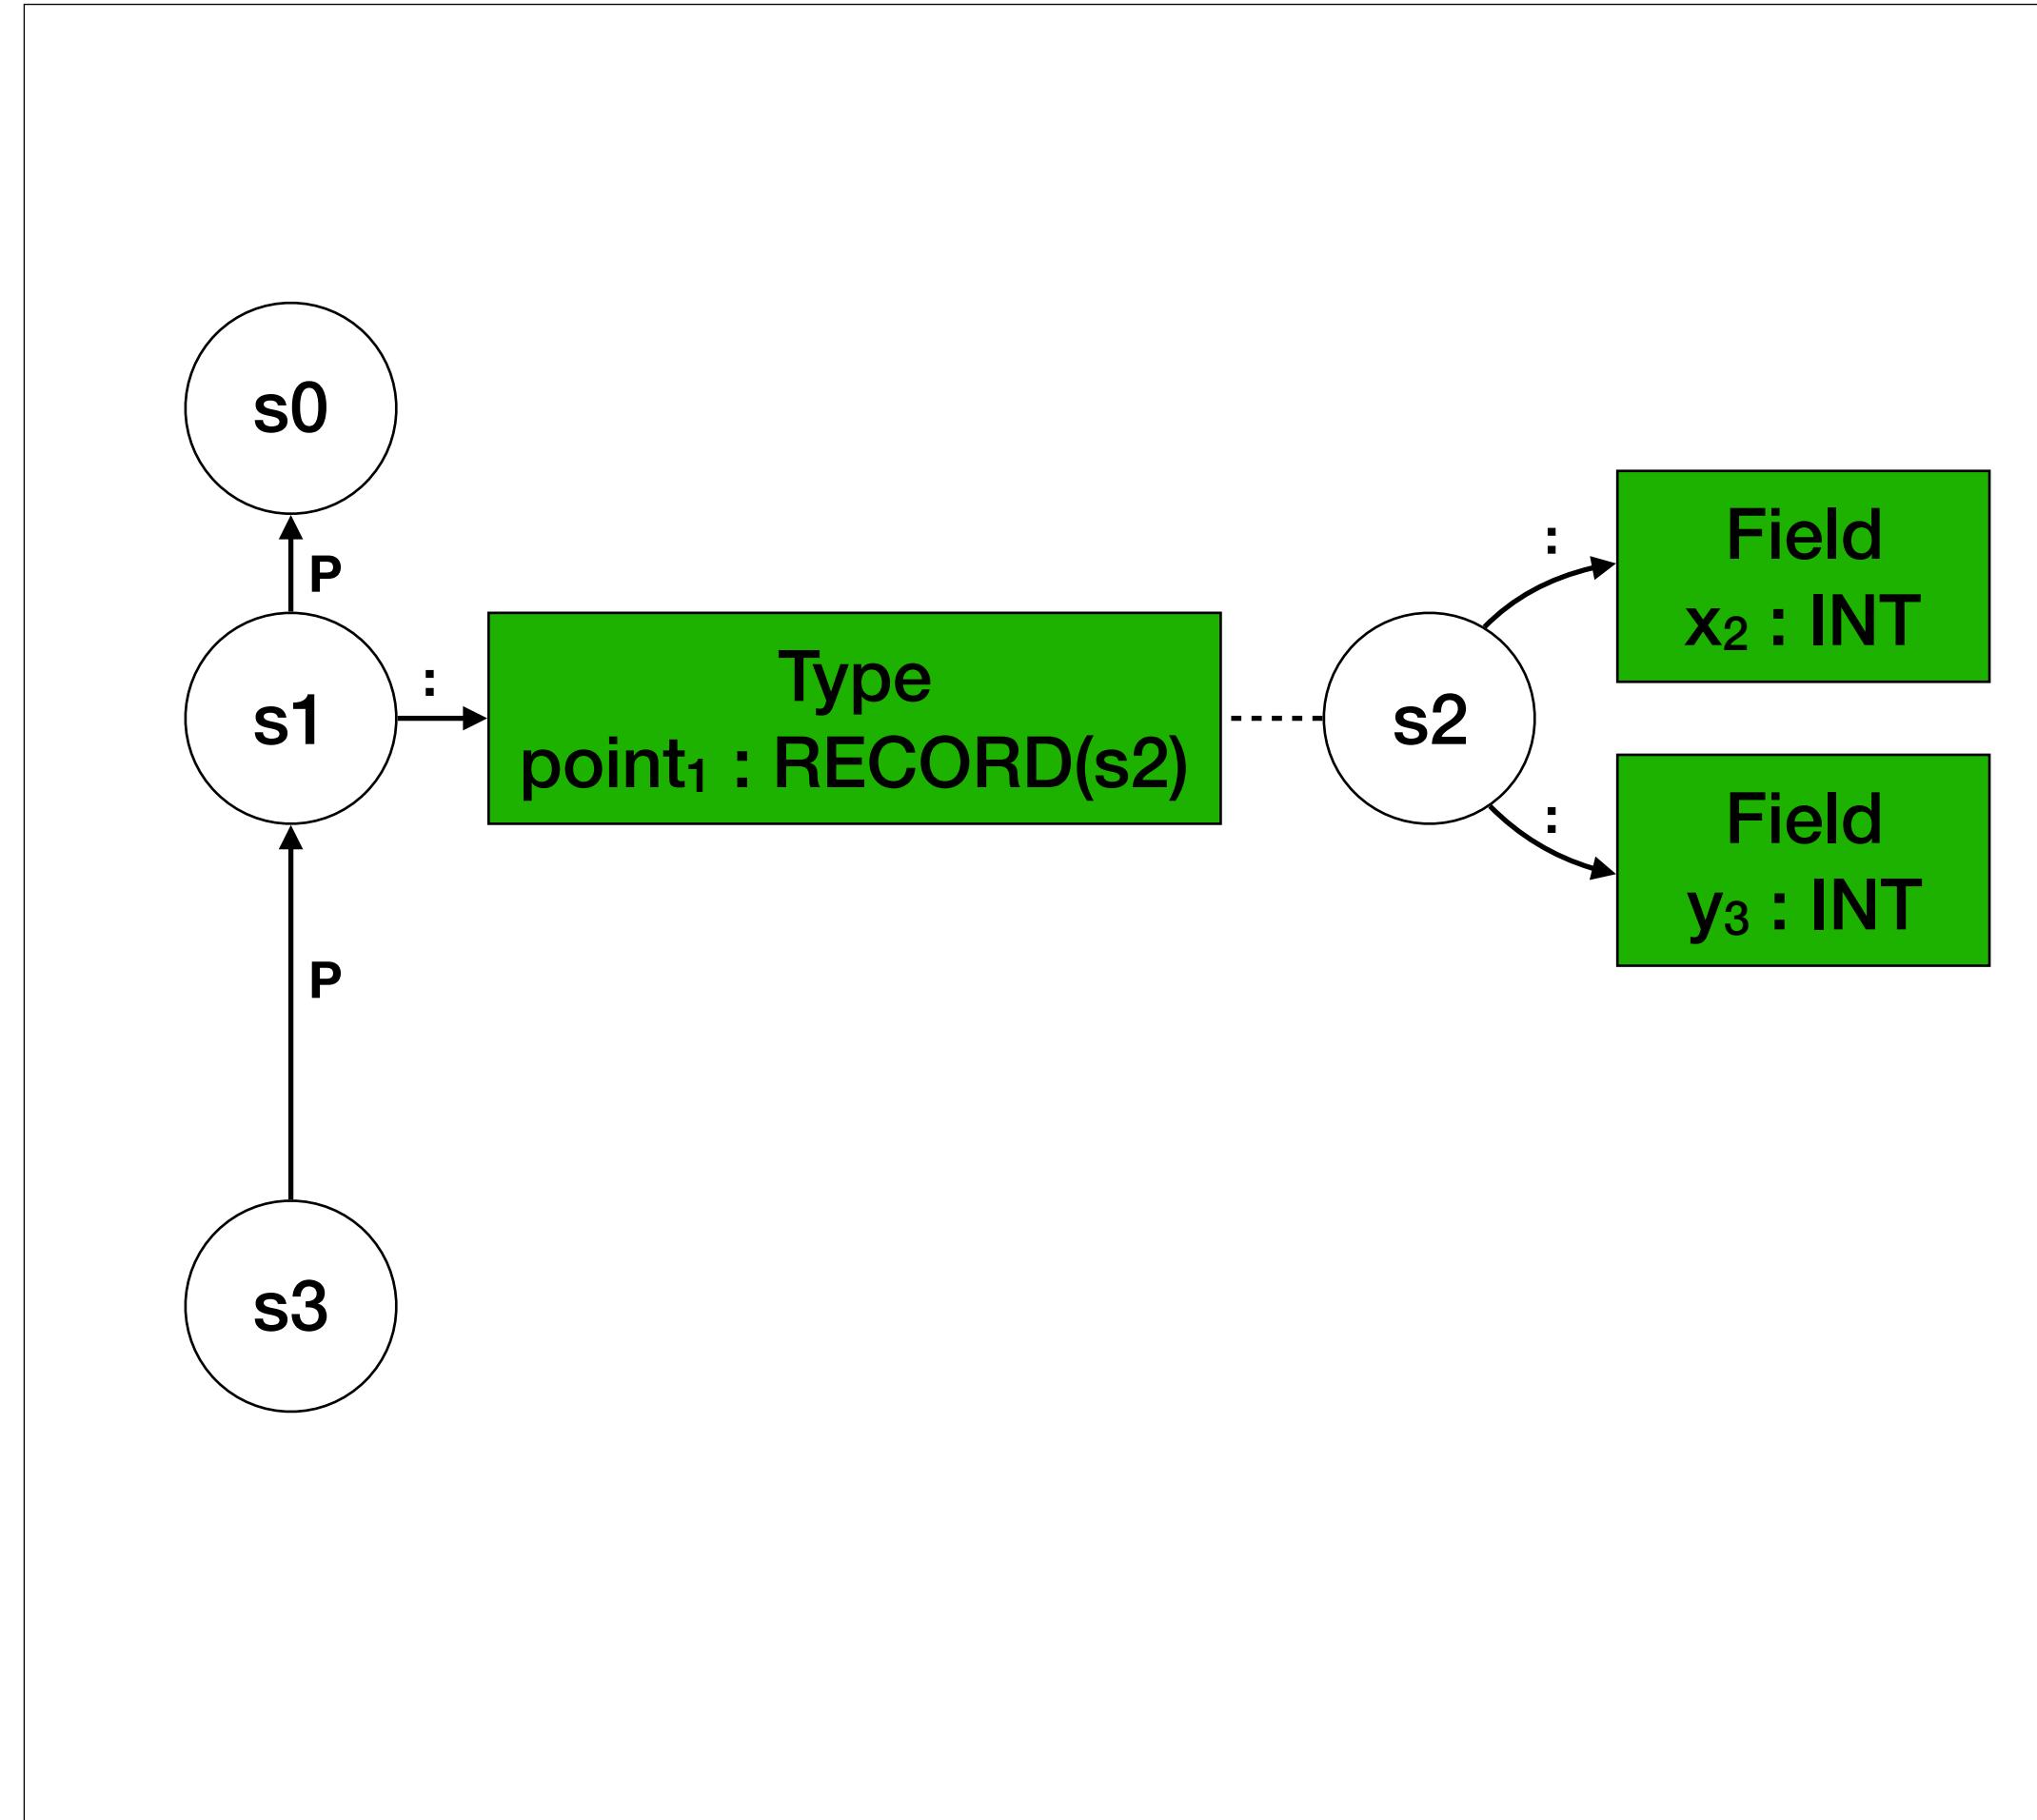

# Record Definitions

```

let
  type point1 = { x2 : int, y3 : int }    s2
  var p4 := point5{ x6 = 4, y7 = 5 }      s1
in
  p8.x9                                s3
end

```

```

typeOfType(s, RecordTy(fields)) = RECORD(s_rec) :-  

  new s_rec,  

  fields0k(s_rec, s, fields).  
  

field0k(s_rec, s_outer, Field(x, t)) :- {T}  

  typeOfType(s_outer, Tid(t)) == T,  

  declareField(s_rec, x, T).  
  


declareField(s, x, T) :-  

  s -> Field{x} with typeOfDecl T,  

  // declaration is distinct  


  typeOfDecl of Field{x} in s |-> [(_, (_, T))].

```

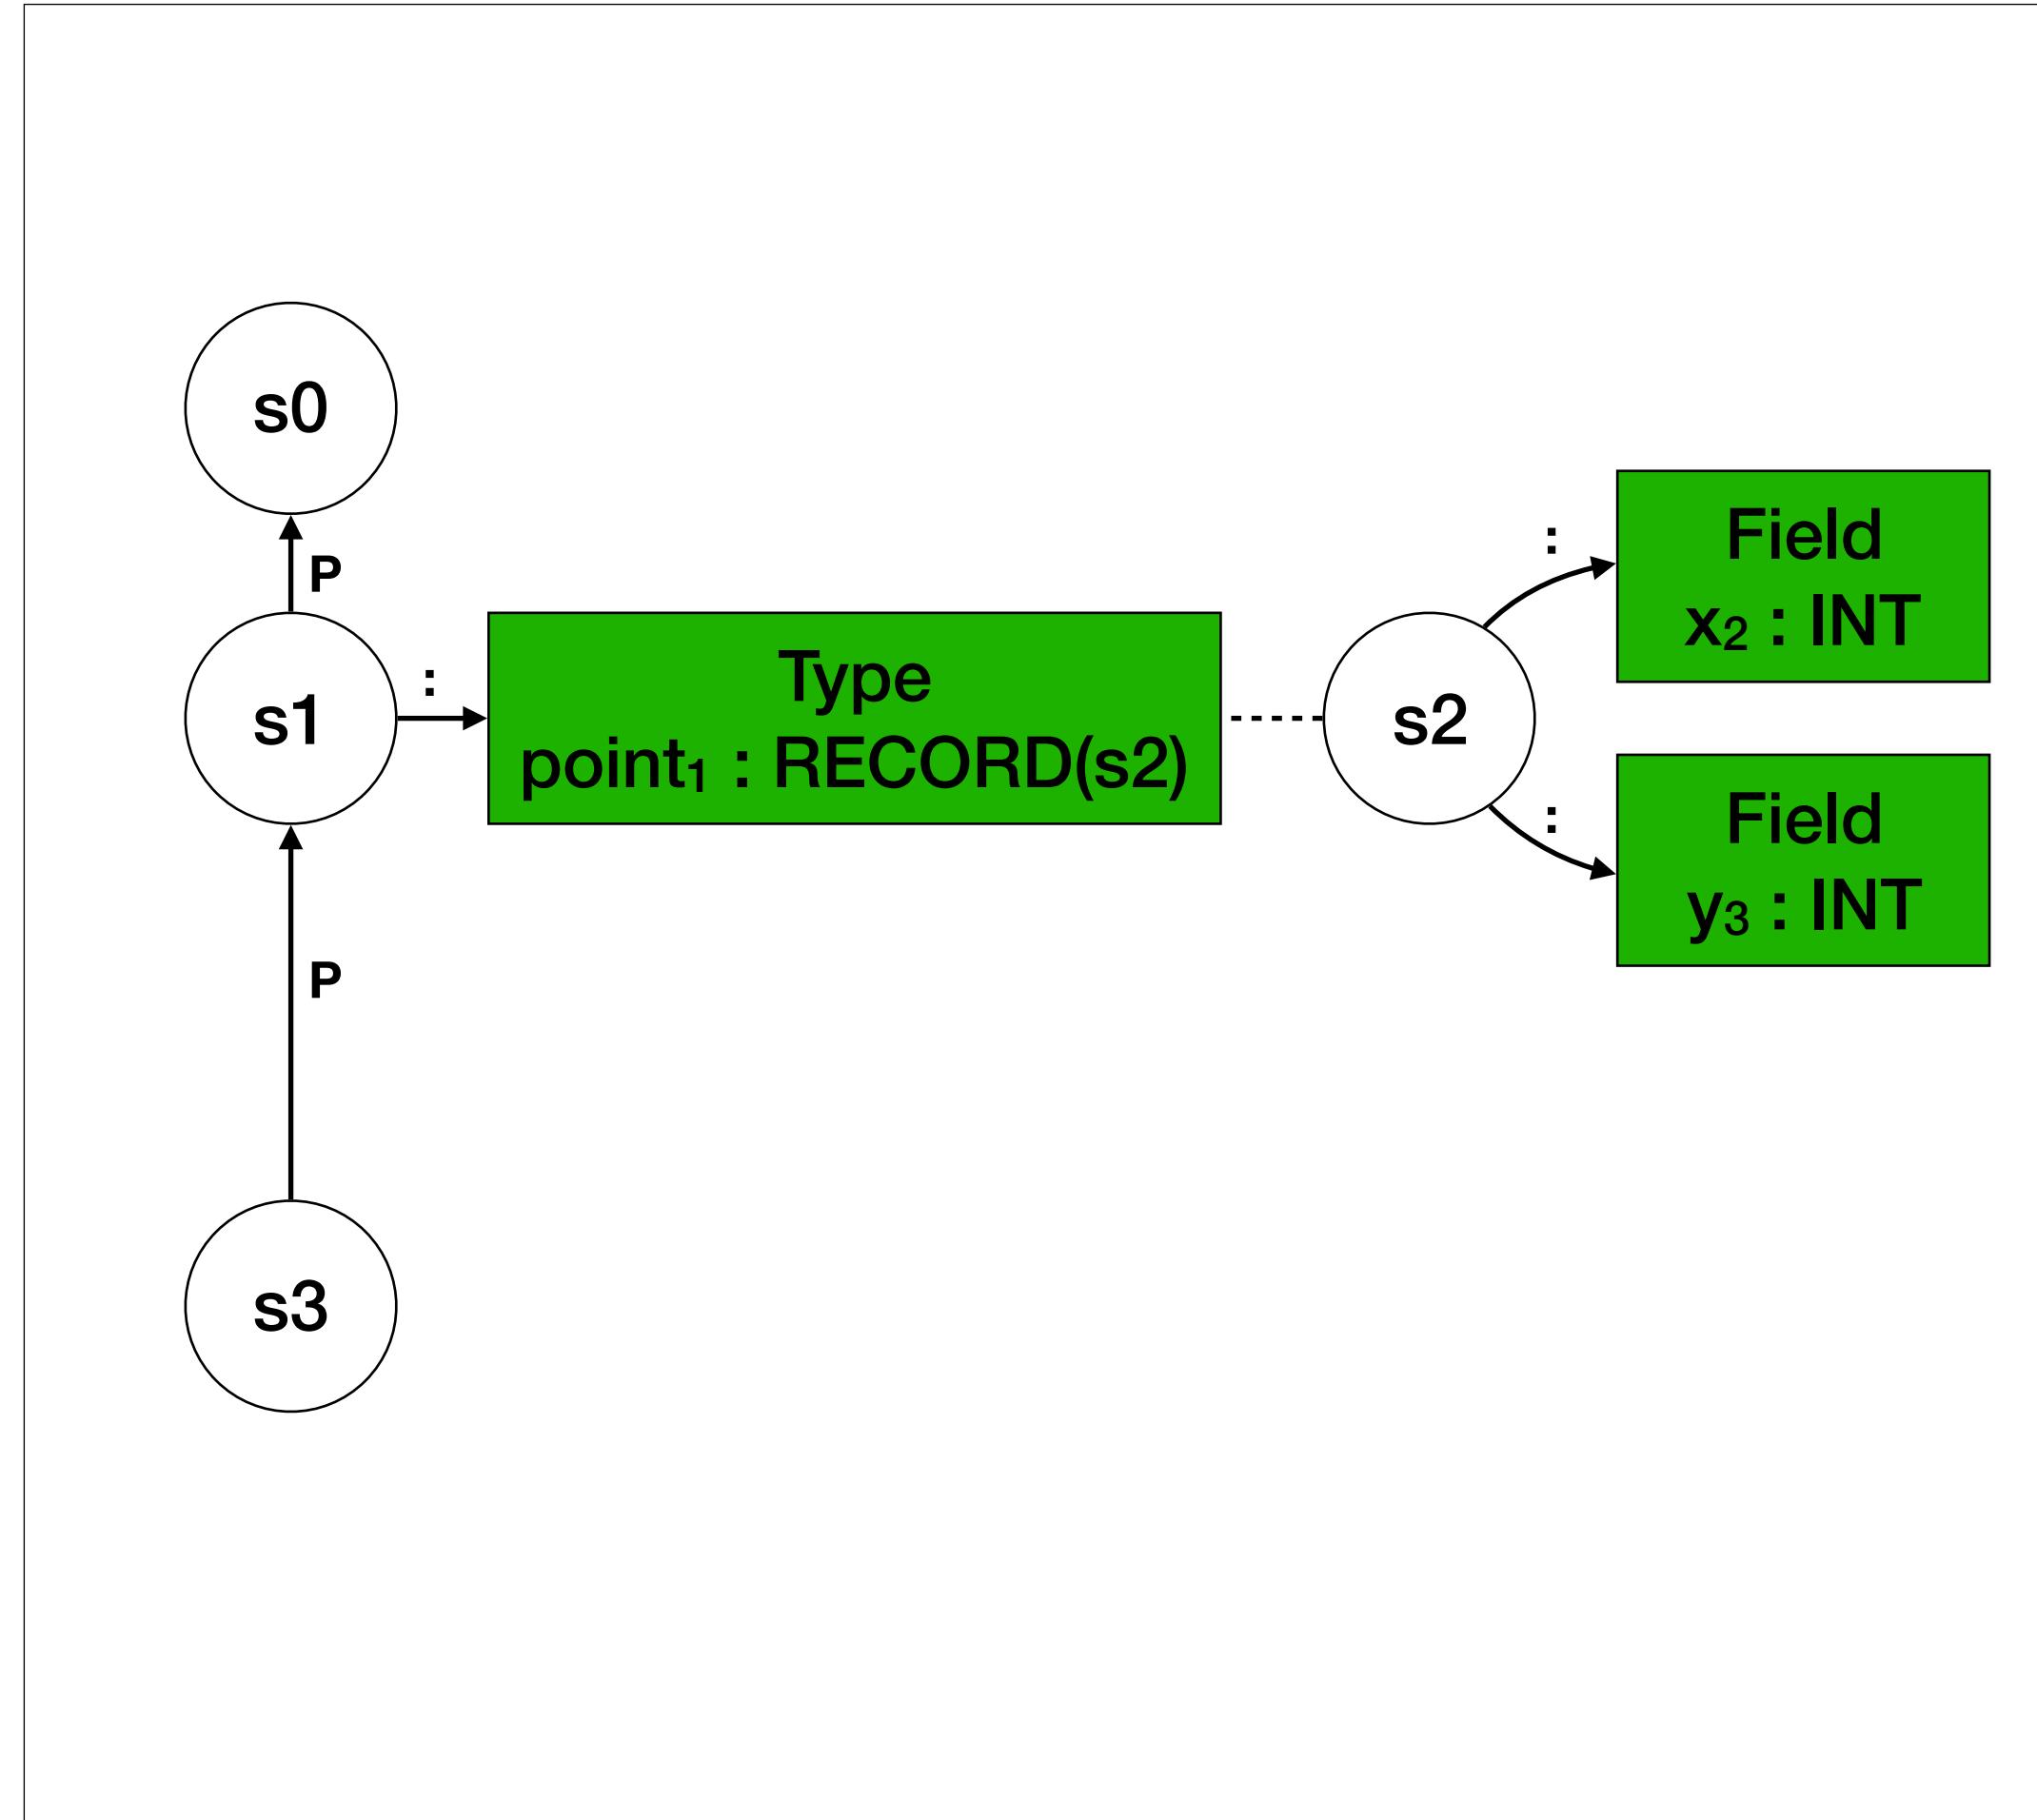

# Record Creation

```
let
  type point1 = { x2 : int, y3 : int }    s2
  var p4 := point5{ x6 = 4, y7 = 5 }
in
  p8.x9
end
```

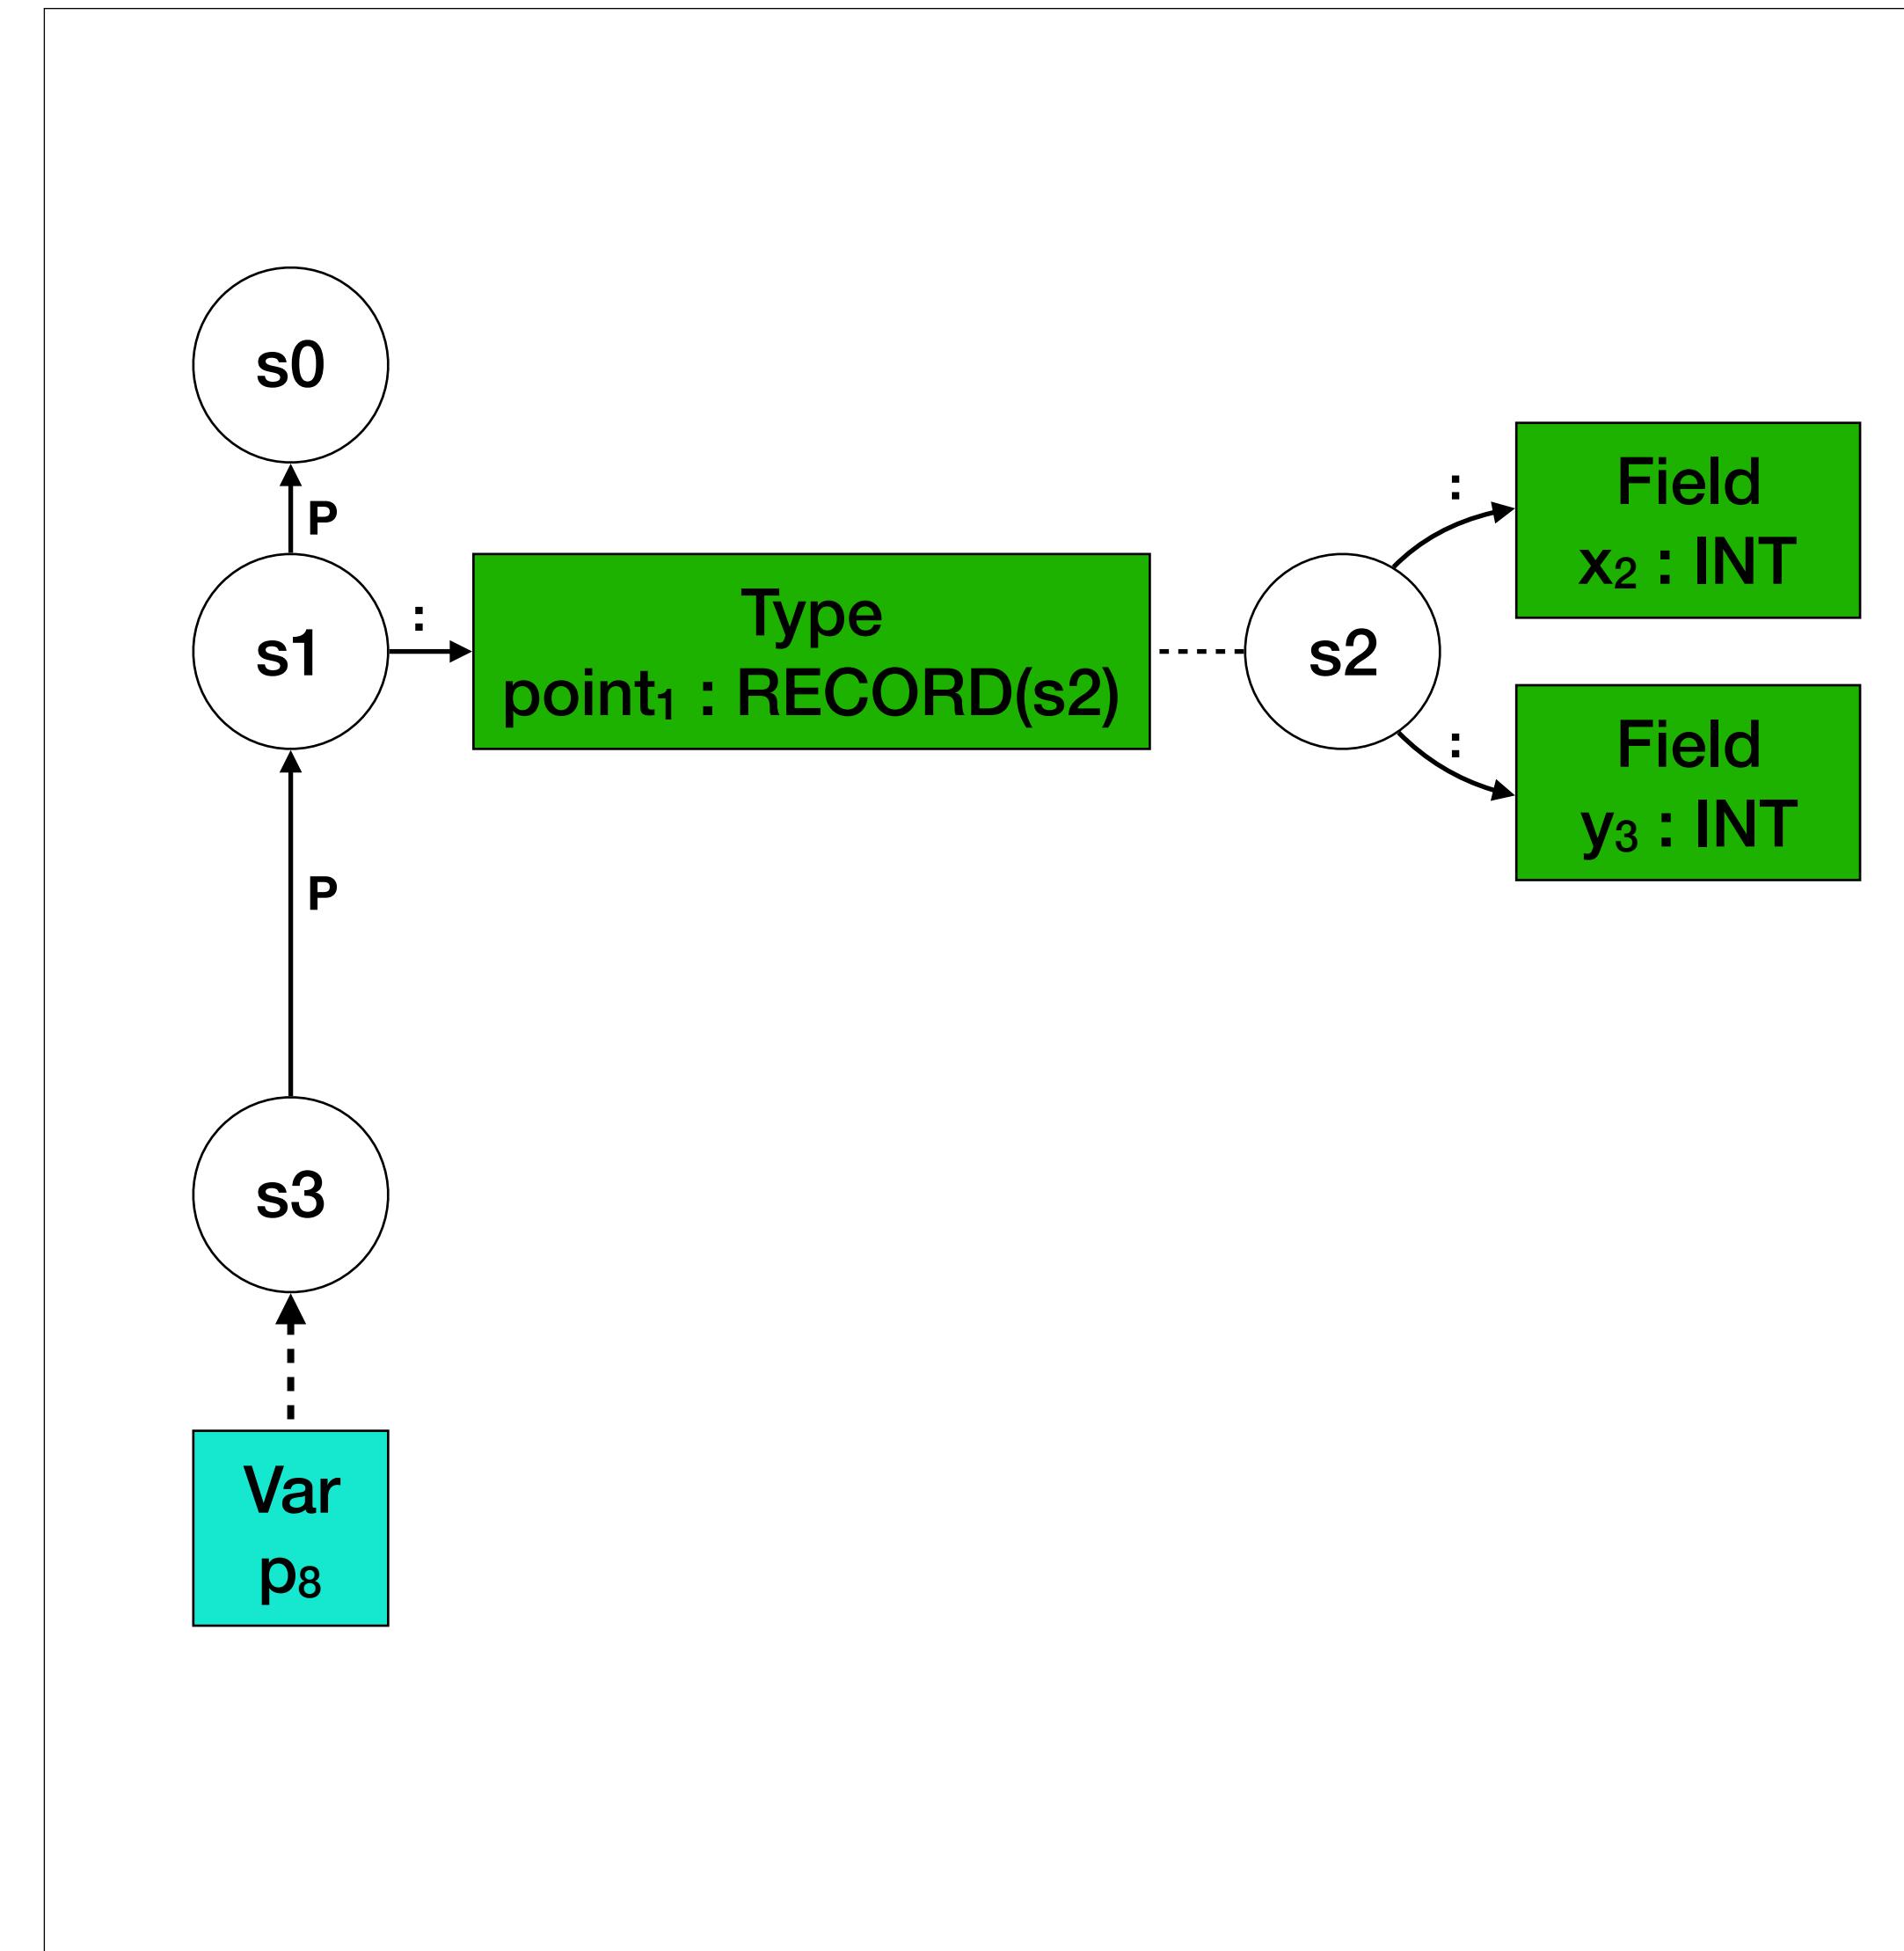

# Record Creation

```

let
  type point1 = { x2 : int, y3 : int }    s2
  var p4 := point5{ x6 = 4, y7 = 5 }      s1
in
  p8.x9                                s3
end


```

```

typeOfExp(s, e@Record(t, inits)) = RECORD(s_rec) :-
  {s_init ds}
  typeOfType(s, Tid(t)) == RECORD(s_rec),
  new s_init,
  initsOk(s, s_rec, s_init, inits),
  typeOfDecl of Field{} in s_rec l-> ds,
  allFieldsInitialized(t, ds, s_init).

initOk(s, s_rec, s_init, InitField(x, e)) :- {S T}
  lookupField(s_rec, x) == T,
  typeOfExp(s, e) == S,
  declareField(s_init, x, S),
  subtype(S, T).

```

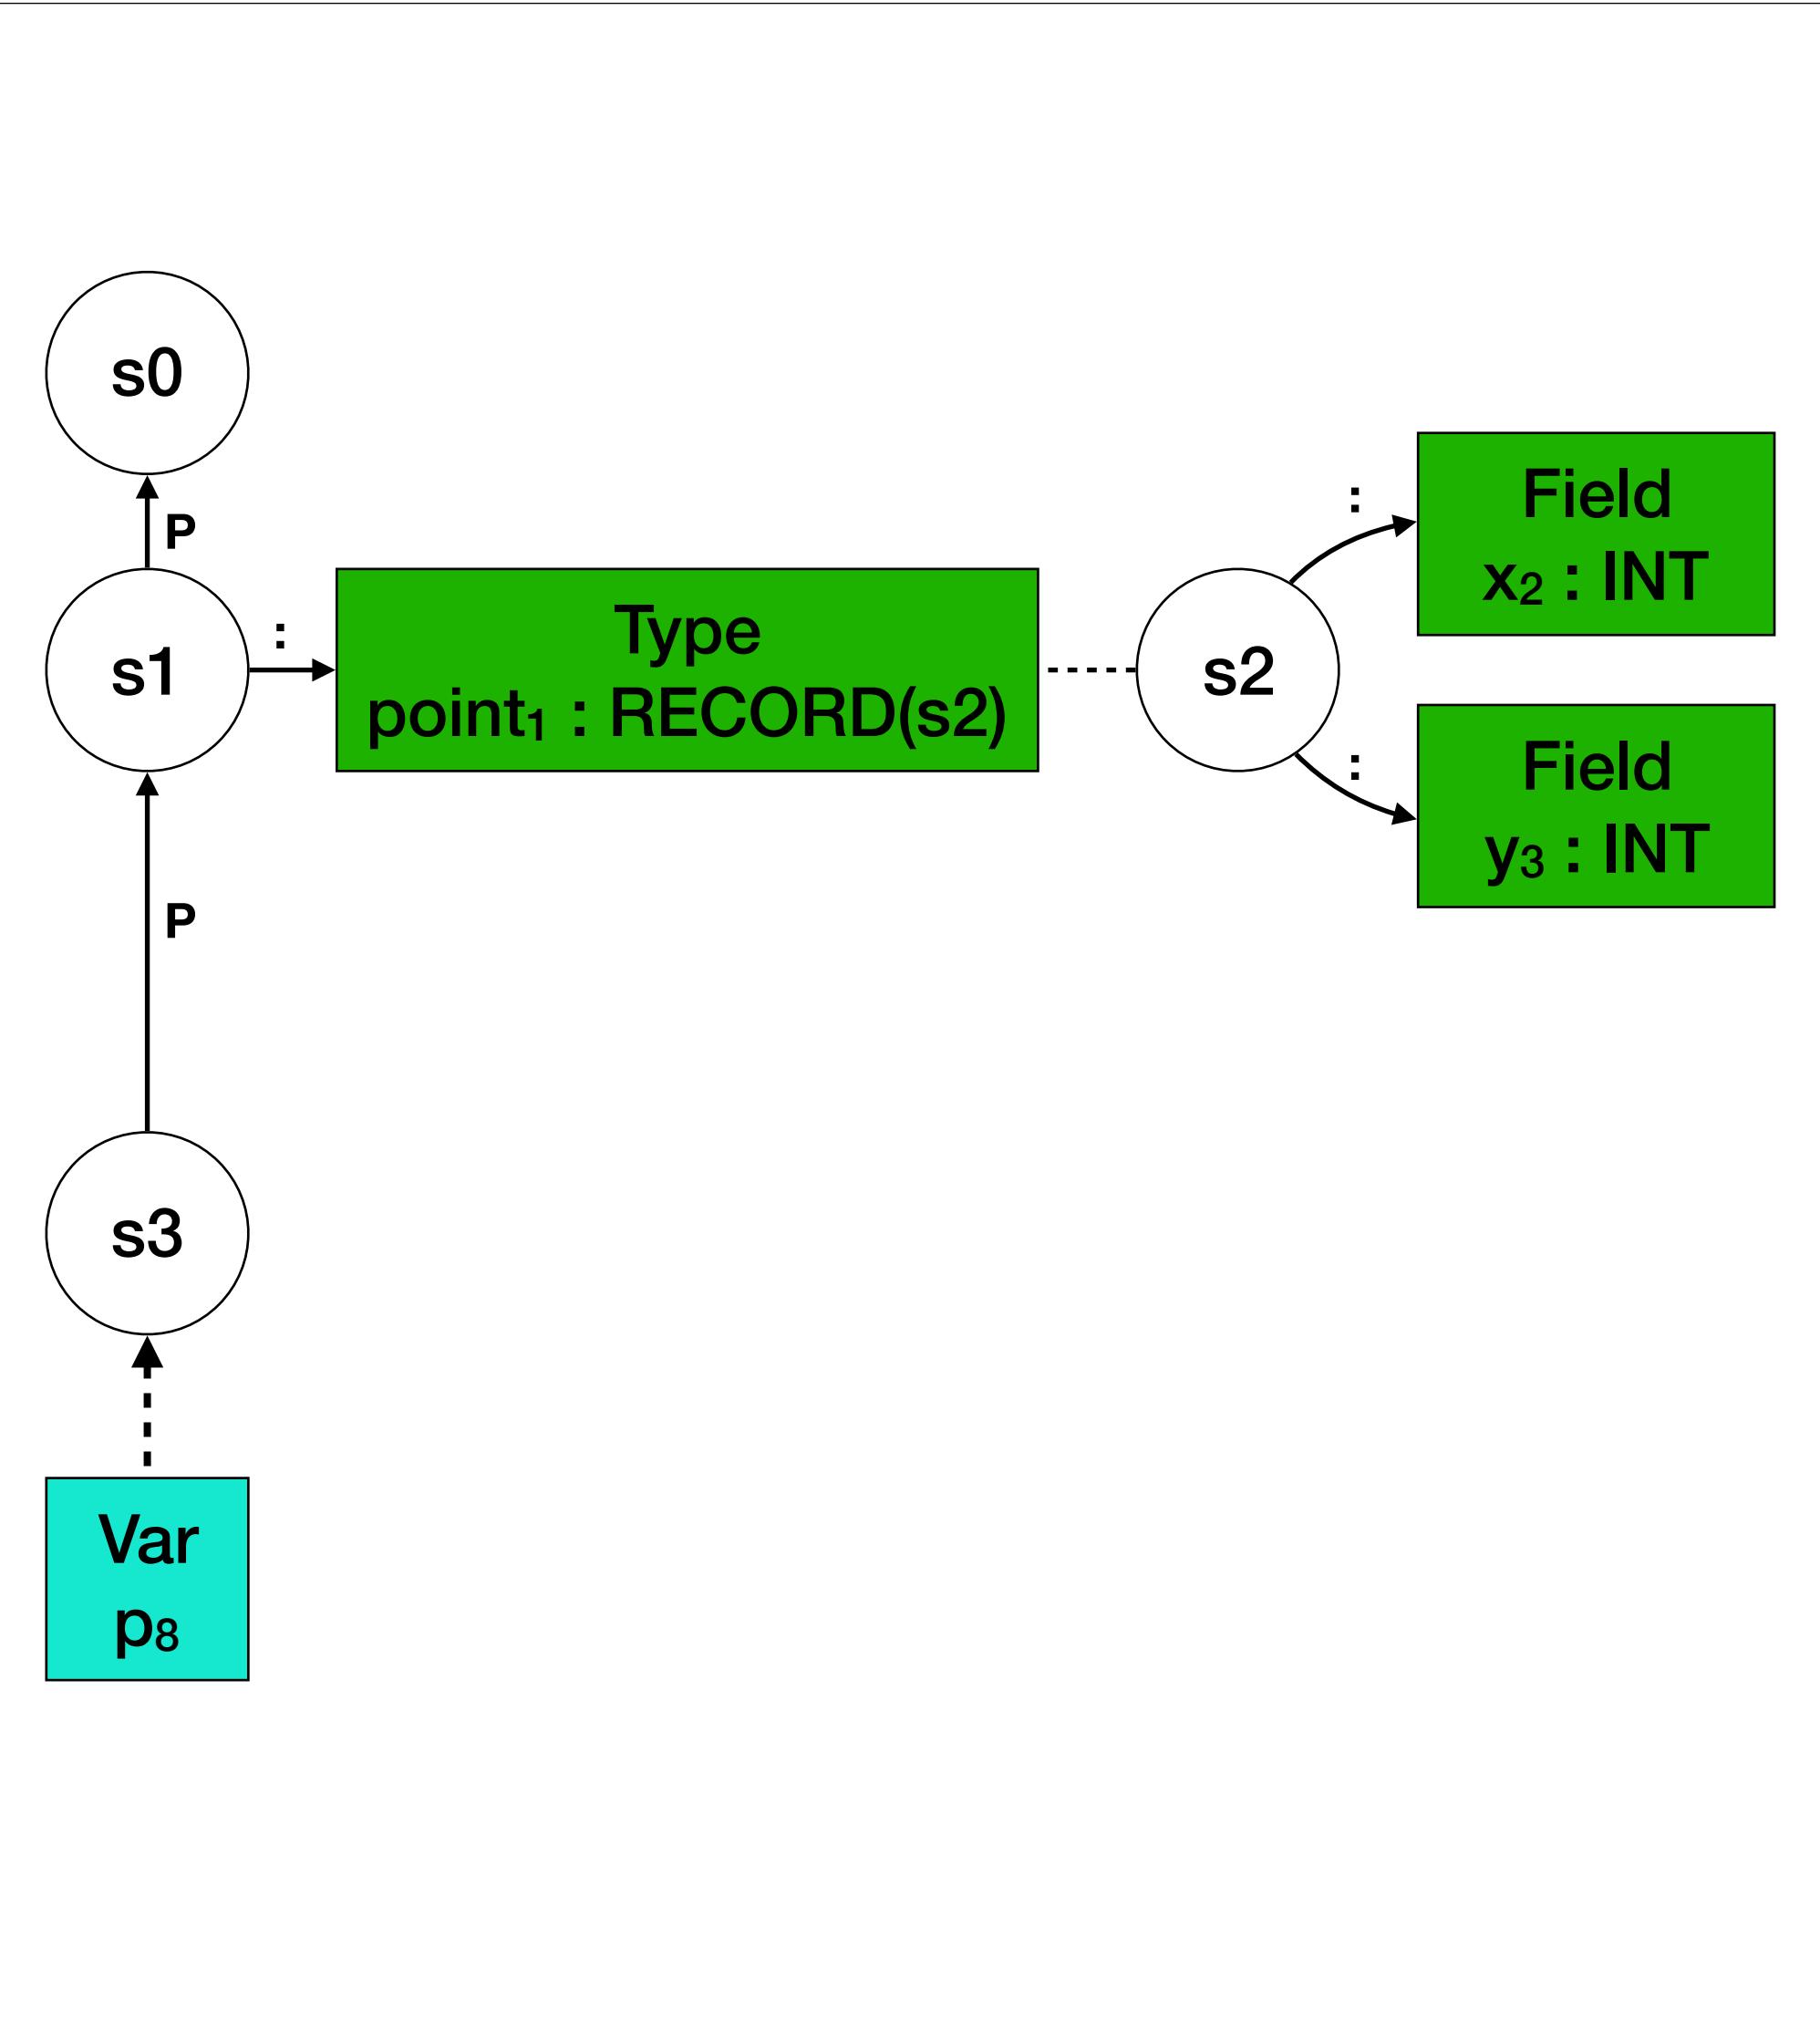

# Record Creation

```

let
  type point1 = { x2 : int, y3 : int } s2
  var p4 := point5{ x6 = 4, y7 = 5 }
in
  p8.x9
end

```

```


typeOfExp(s, e@Record(t, inits)) = RECORD(s_rec) :-
  {s_init ds}
  typeOfType(s, Tid(t)) == RECORD(s_rec),
  new s_init,
  initsOk(s, s_rec, s_init, inits),
  typeOfDecl of Field{} in s_rec l-> ds,
  allFieldsInitialized(t, ds, s_init).

```

```

initOk(s, s_rec, s_init, InitField(x, e)) :- {S T}
  lookupField(s_rec, x) == T,
  typeOfExp(s, e) == S,
  declareField(s_init, x, S),
  subtype(S, T).

```

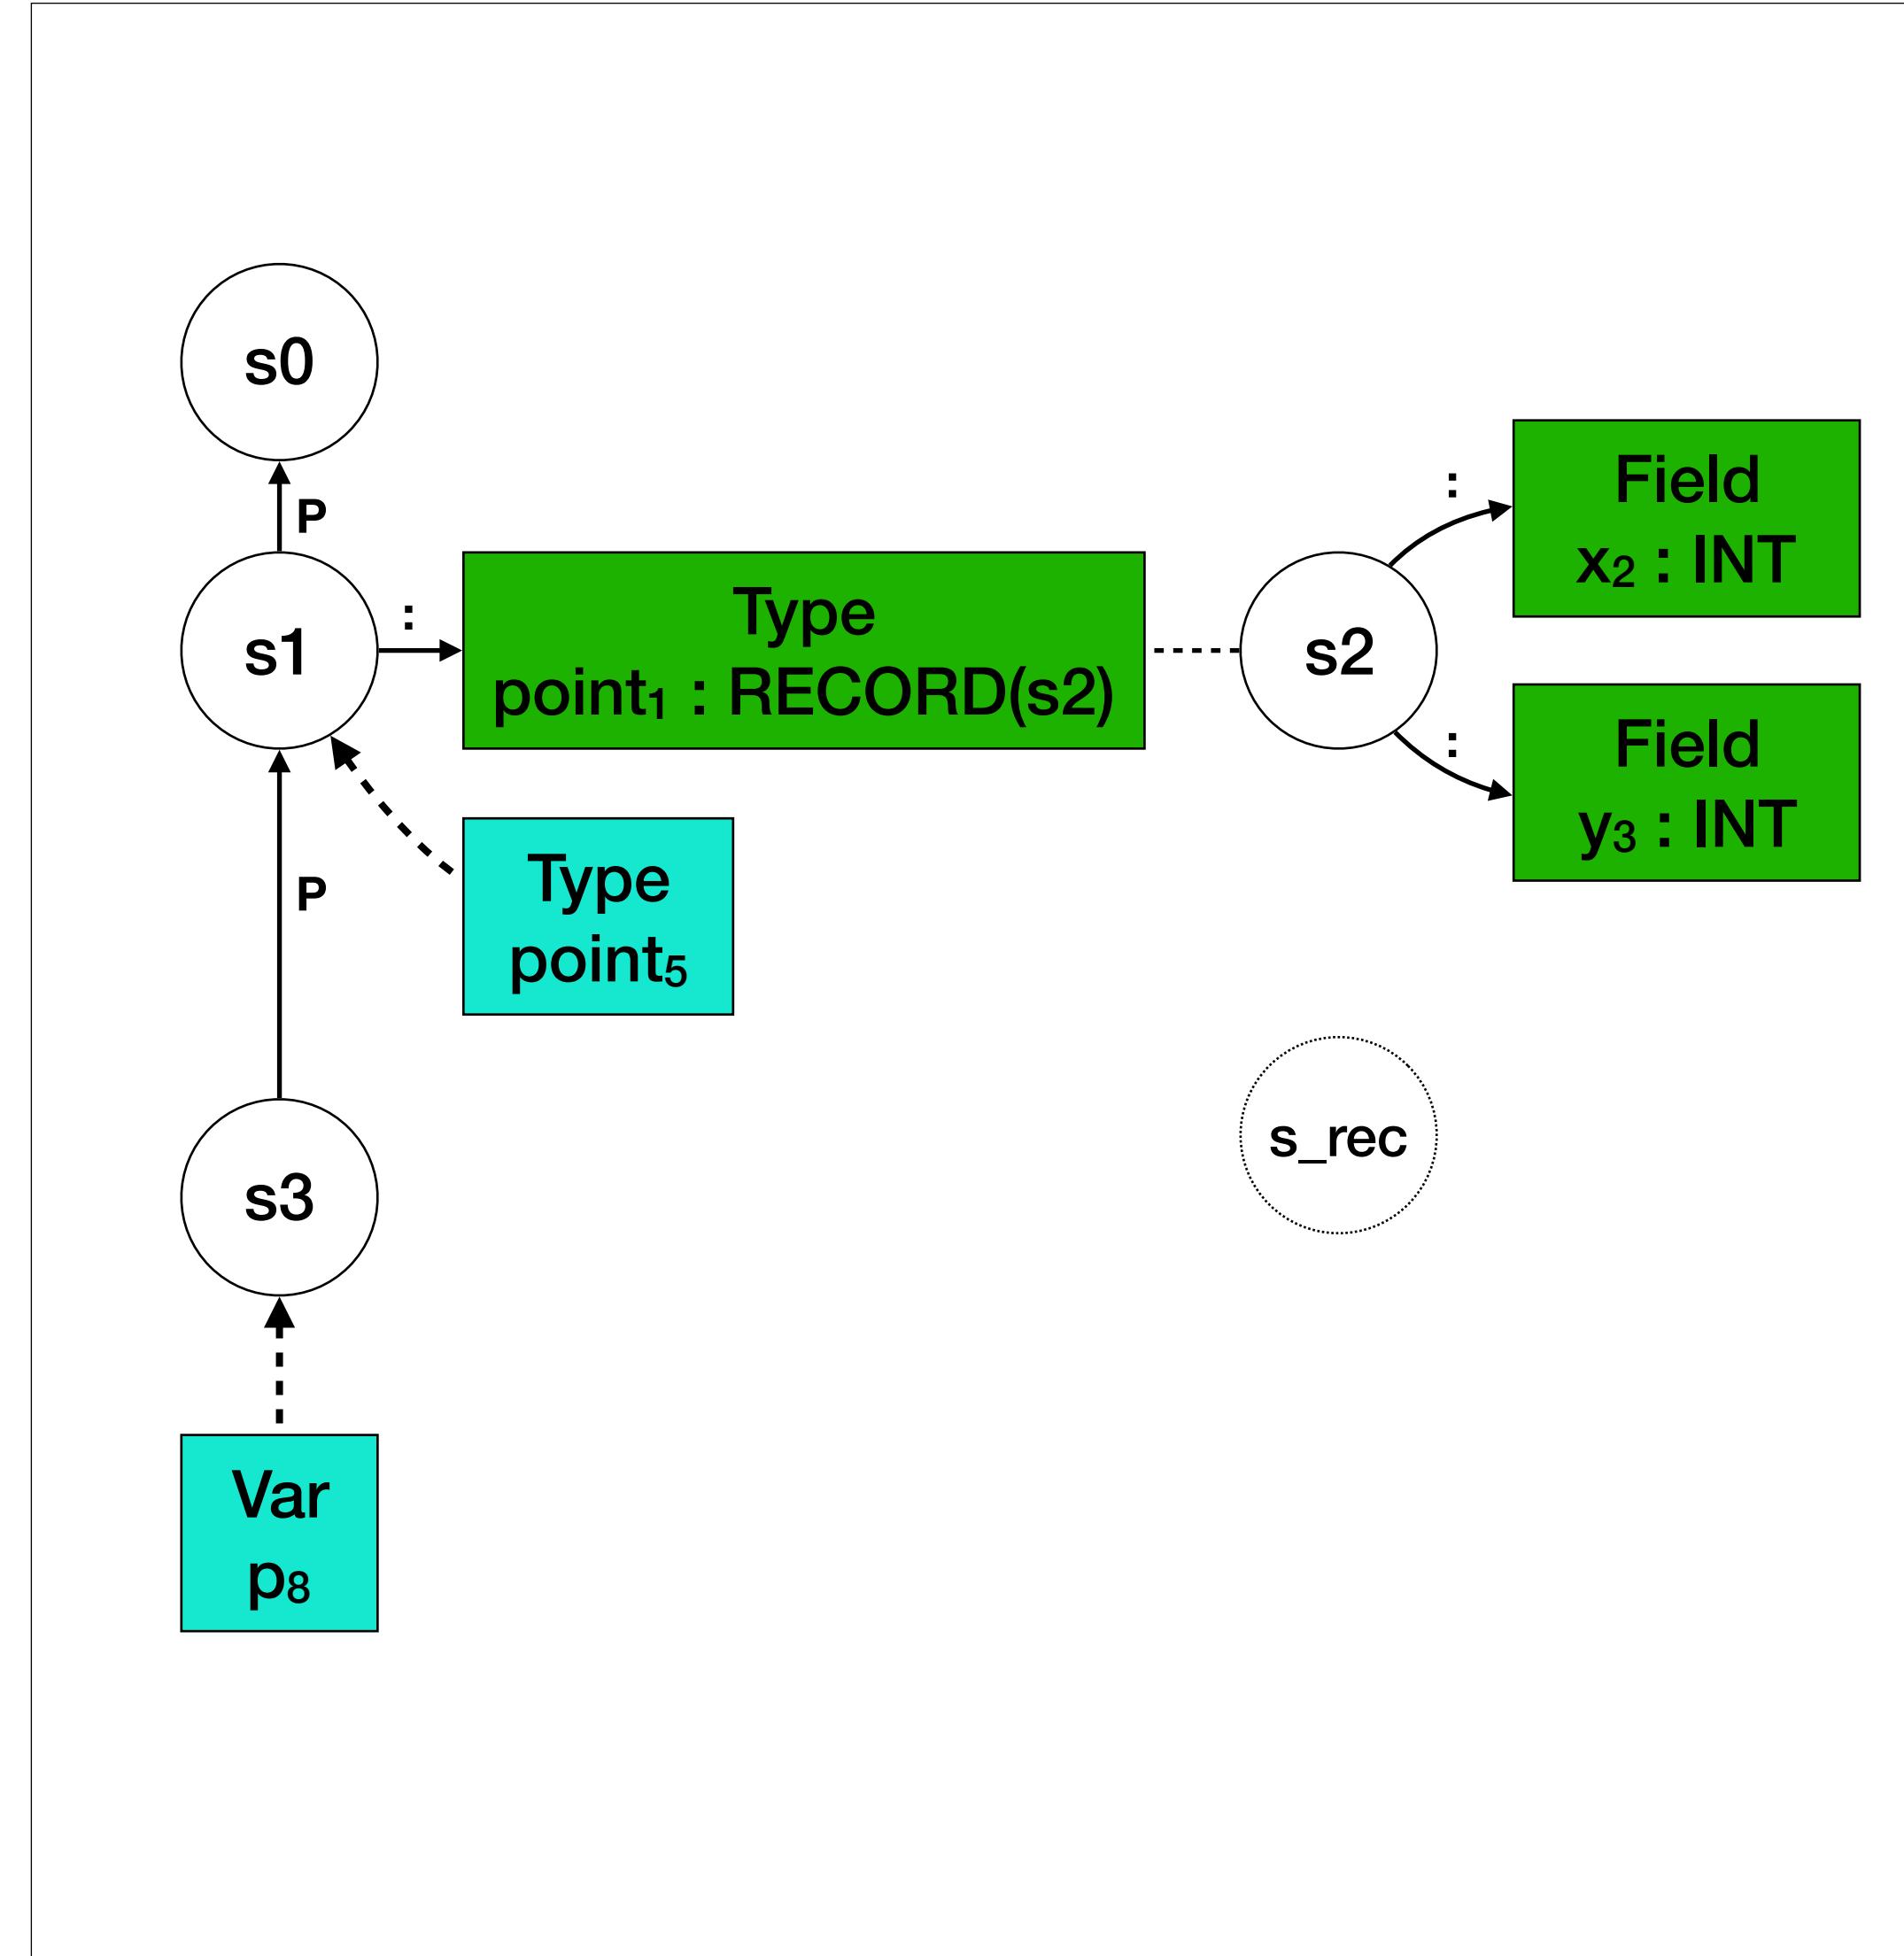

# Record Creation

```

let
  type point1 = { x2 : int, y3 : int }    s2
  var p4 := point5{ x6 = 4, y7 = 5 }      s1
in
  p8.x9                                s3
end

```

```


typeOfExp(s, e@Record(t, inits)) = RECORD(s_rec) :-
  {s_init ds}
typeOfType(s, Tid(t)) == RECORD(s_rec),
  new s_init,
  initsOk(s, s_rec, s_init, inits),
  typeOfDecl of Field{} in s_rec l-> ds,
  allFieldsInitialized(t, ds, s_init).

```

```

initOk(s, s_rec, s_init, InitField(x, e)) :- {S T}
  lookupField(s_rec, x) == T,
  typeOfExp(s, e) == S,
  declareField(s_init, x, S),
  subtype(S, T).

```

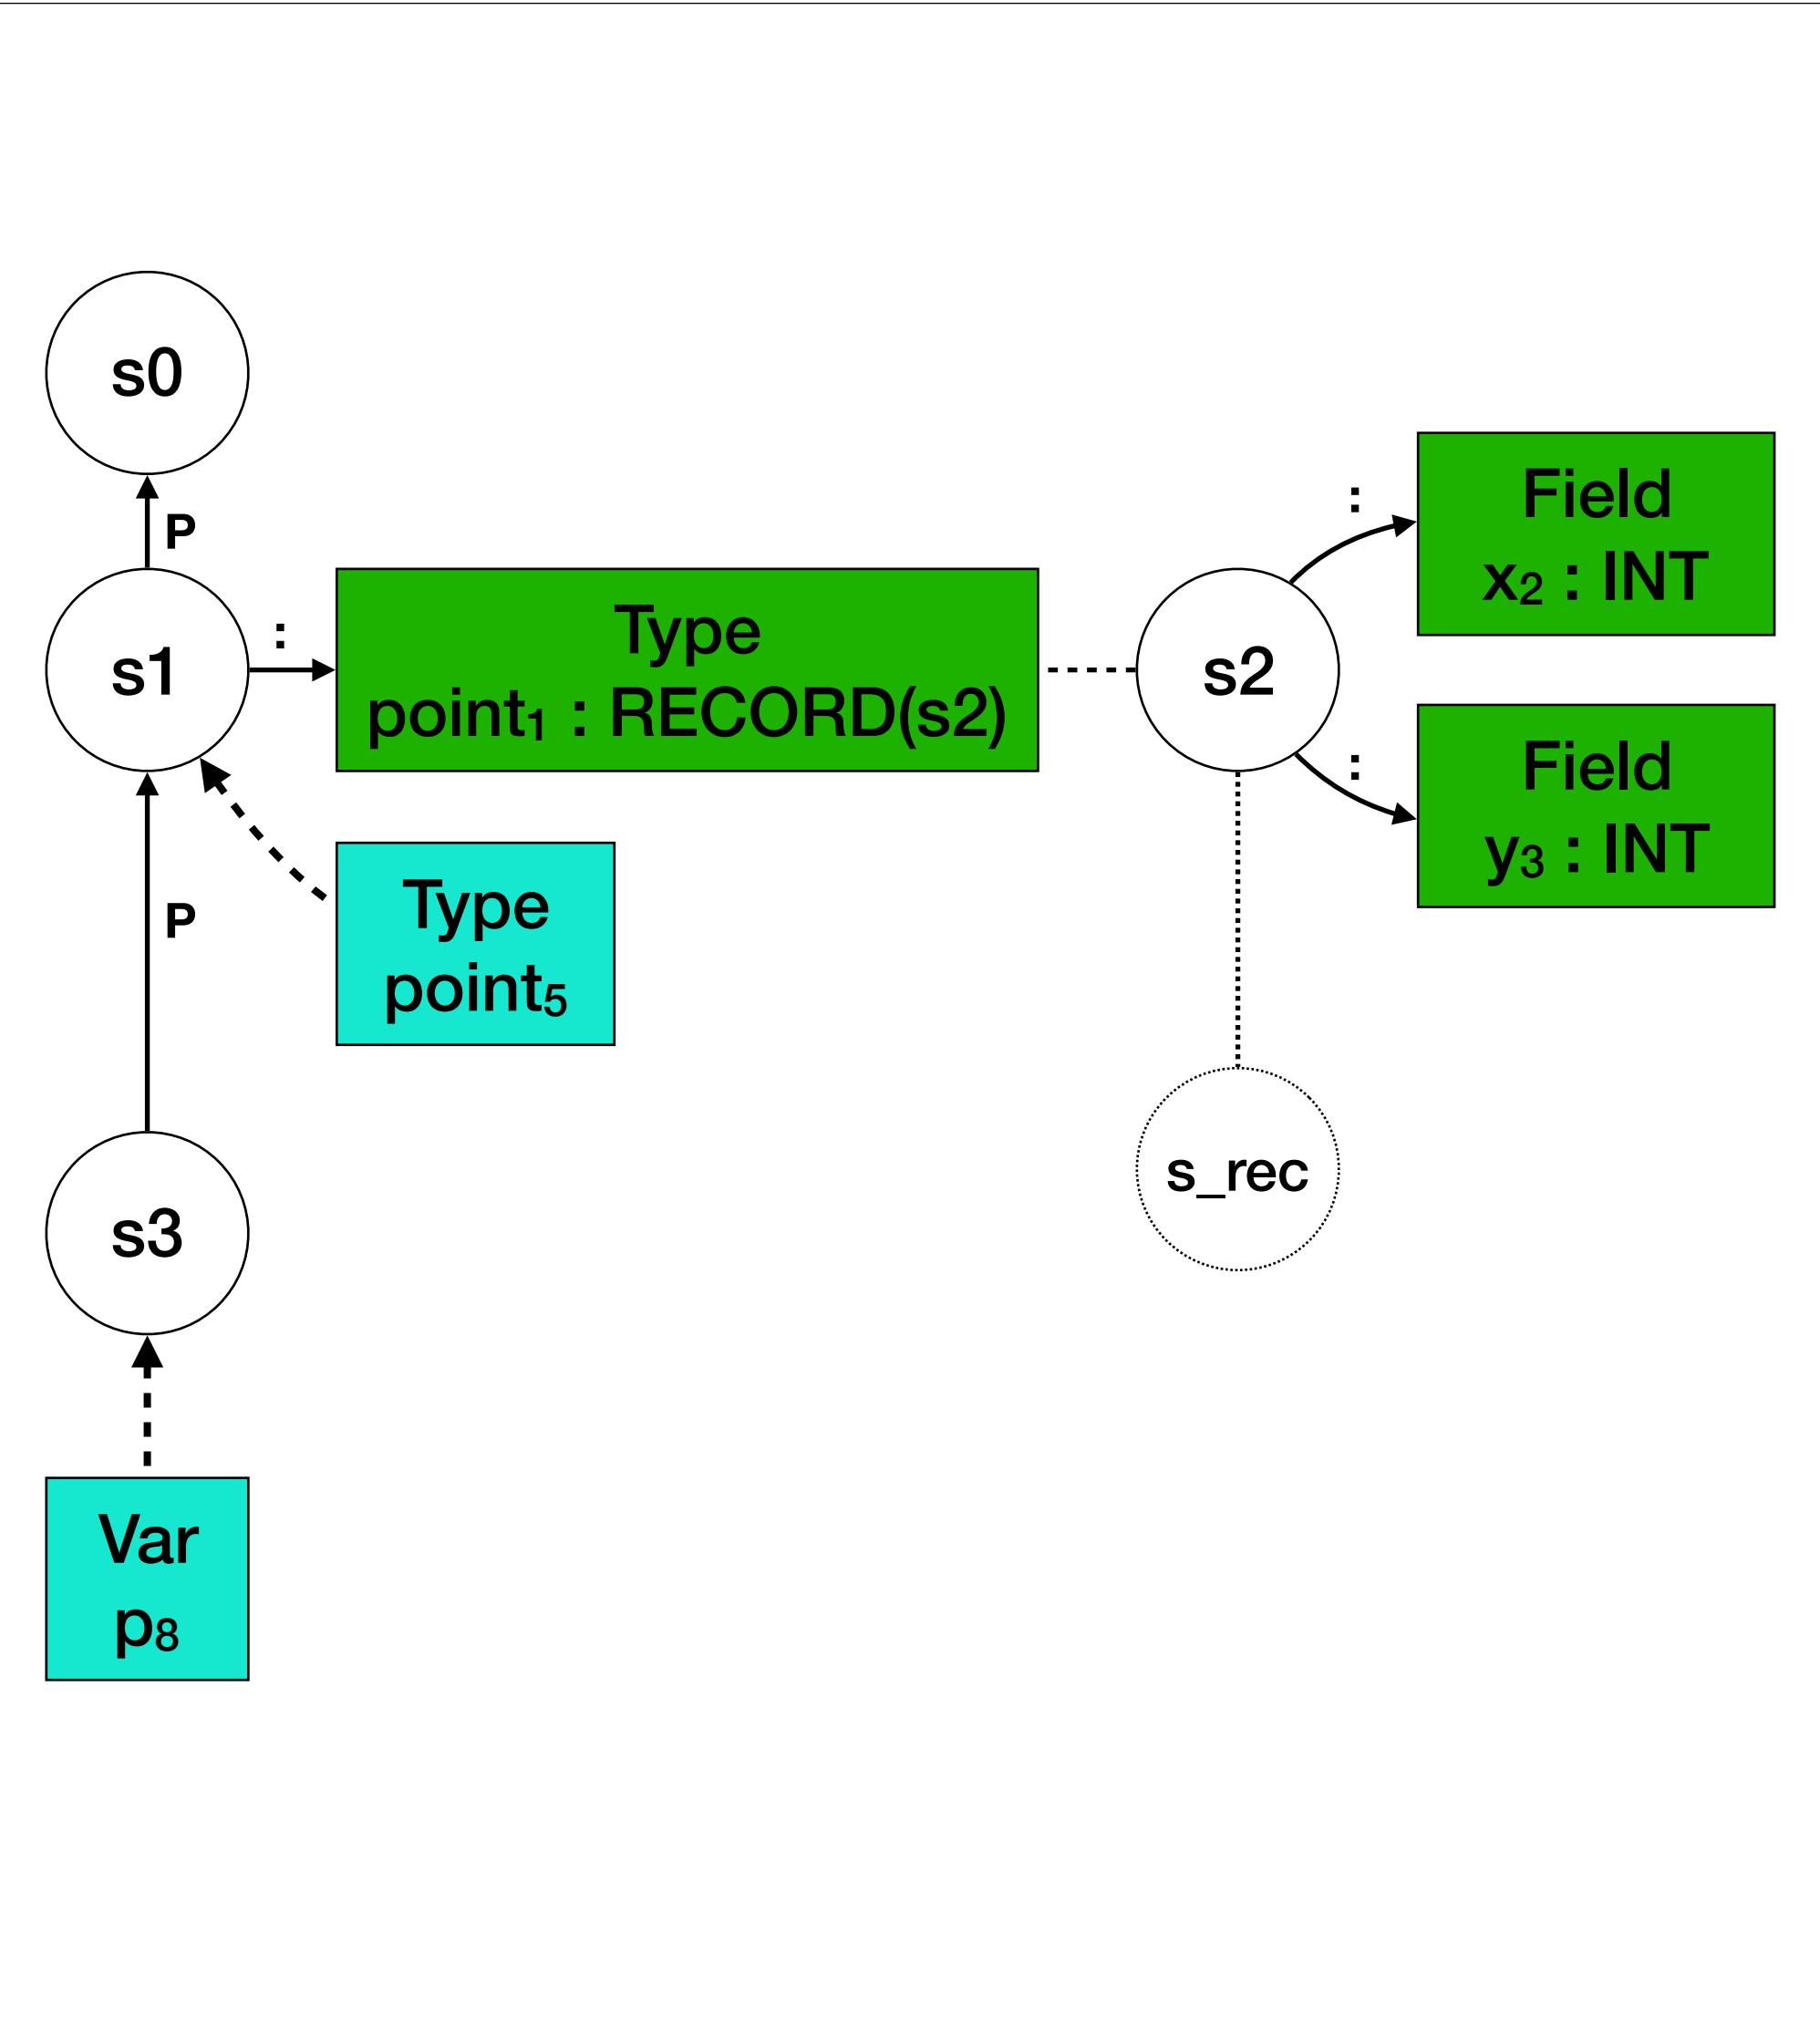

# Record Creation


```

let
  type point1 = { x2 : int, y3 : int } s2
  var p4 := point5{ x6 = 4, y7 = 5 }
in
  p8.x9
end
  
```

```

typeOfExp(s, e@Record(t, inits)) = RECORD(s_rec) :-
  {s_init ds}
typeOfType(s, Tid(t)) == RECORD(s_rec),
  new s_init,
  initsOk(s, s_rec, s_init, inits),
  typeOfDecl of Field{} in s_rec l-> ds,
  allFieldsInitialized(t, ds, s_init).

initOk(s, s_rec, s_init, InitField(x, e)) :- {S T}
  lookupField(s_rec, x) == T,
  typeOfExp(s, e) == S,
  declareField(s_init, x, S),
  subtype(S, T).
  
```

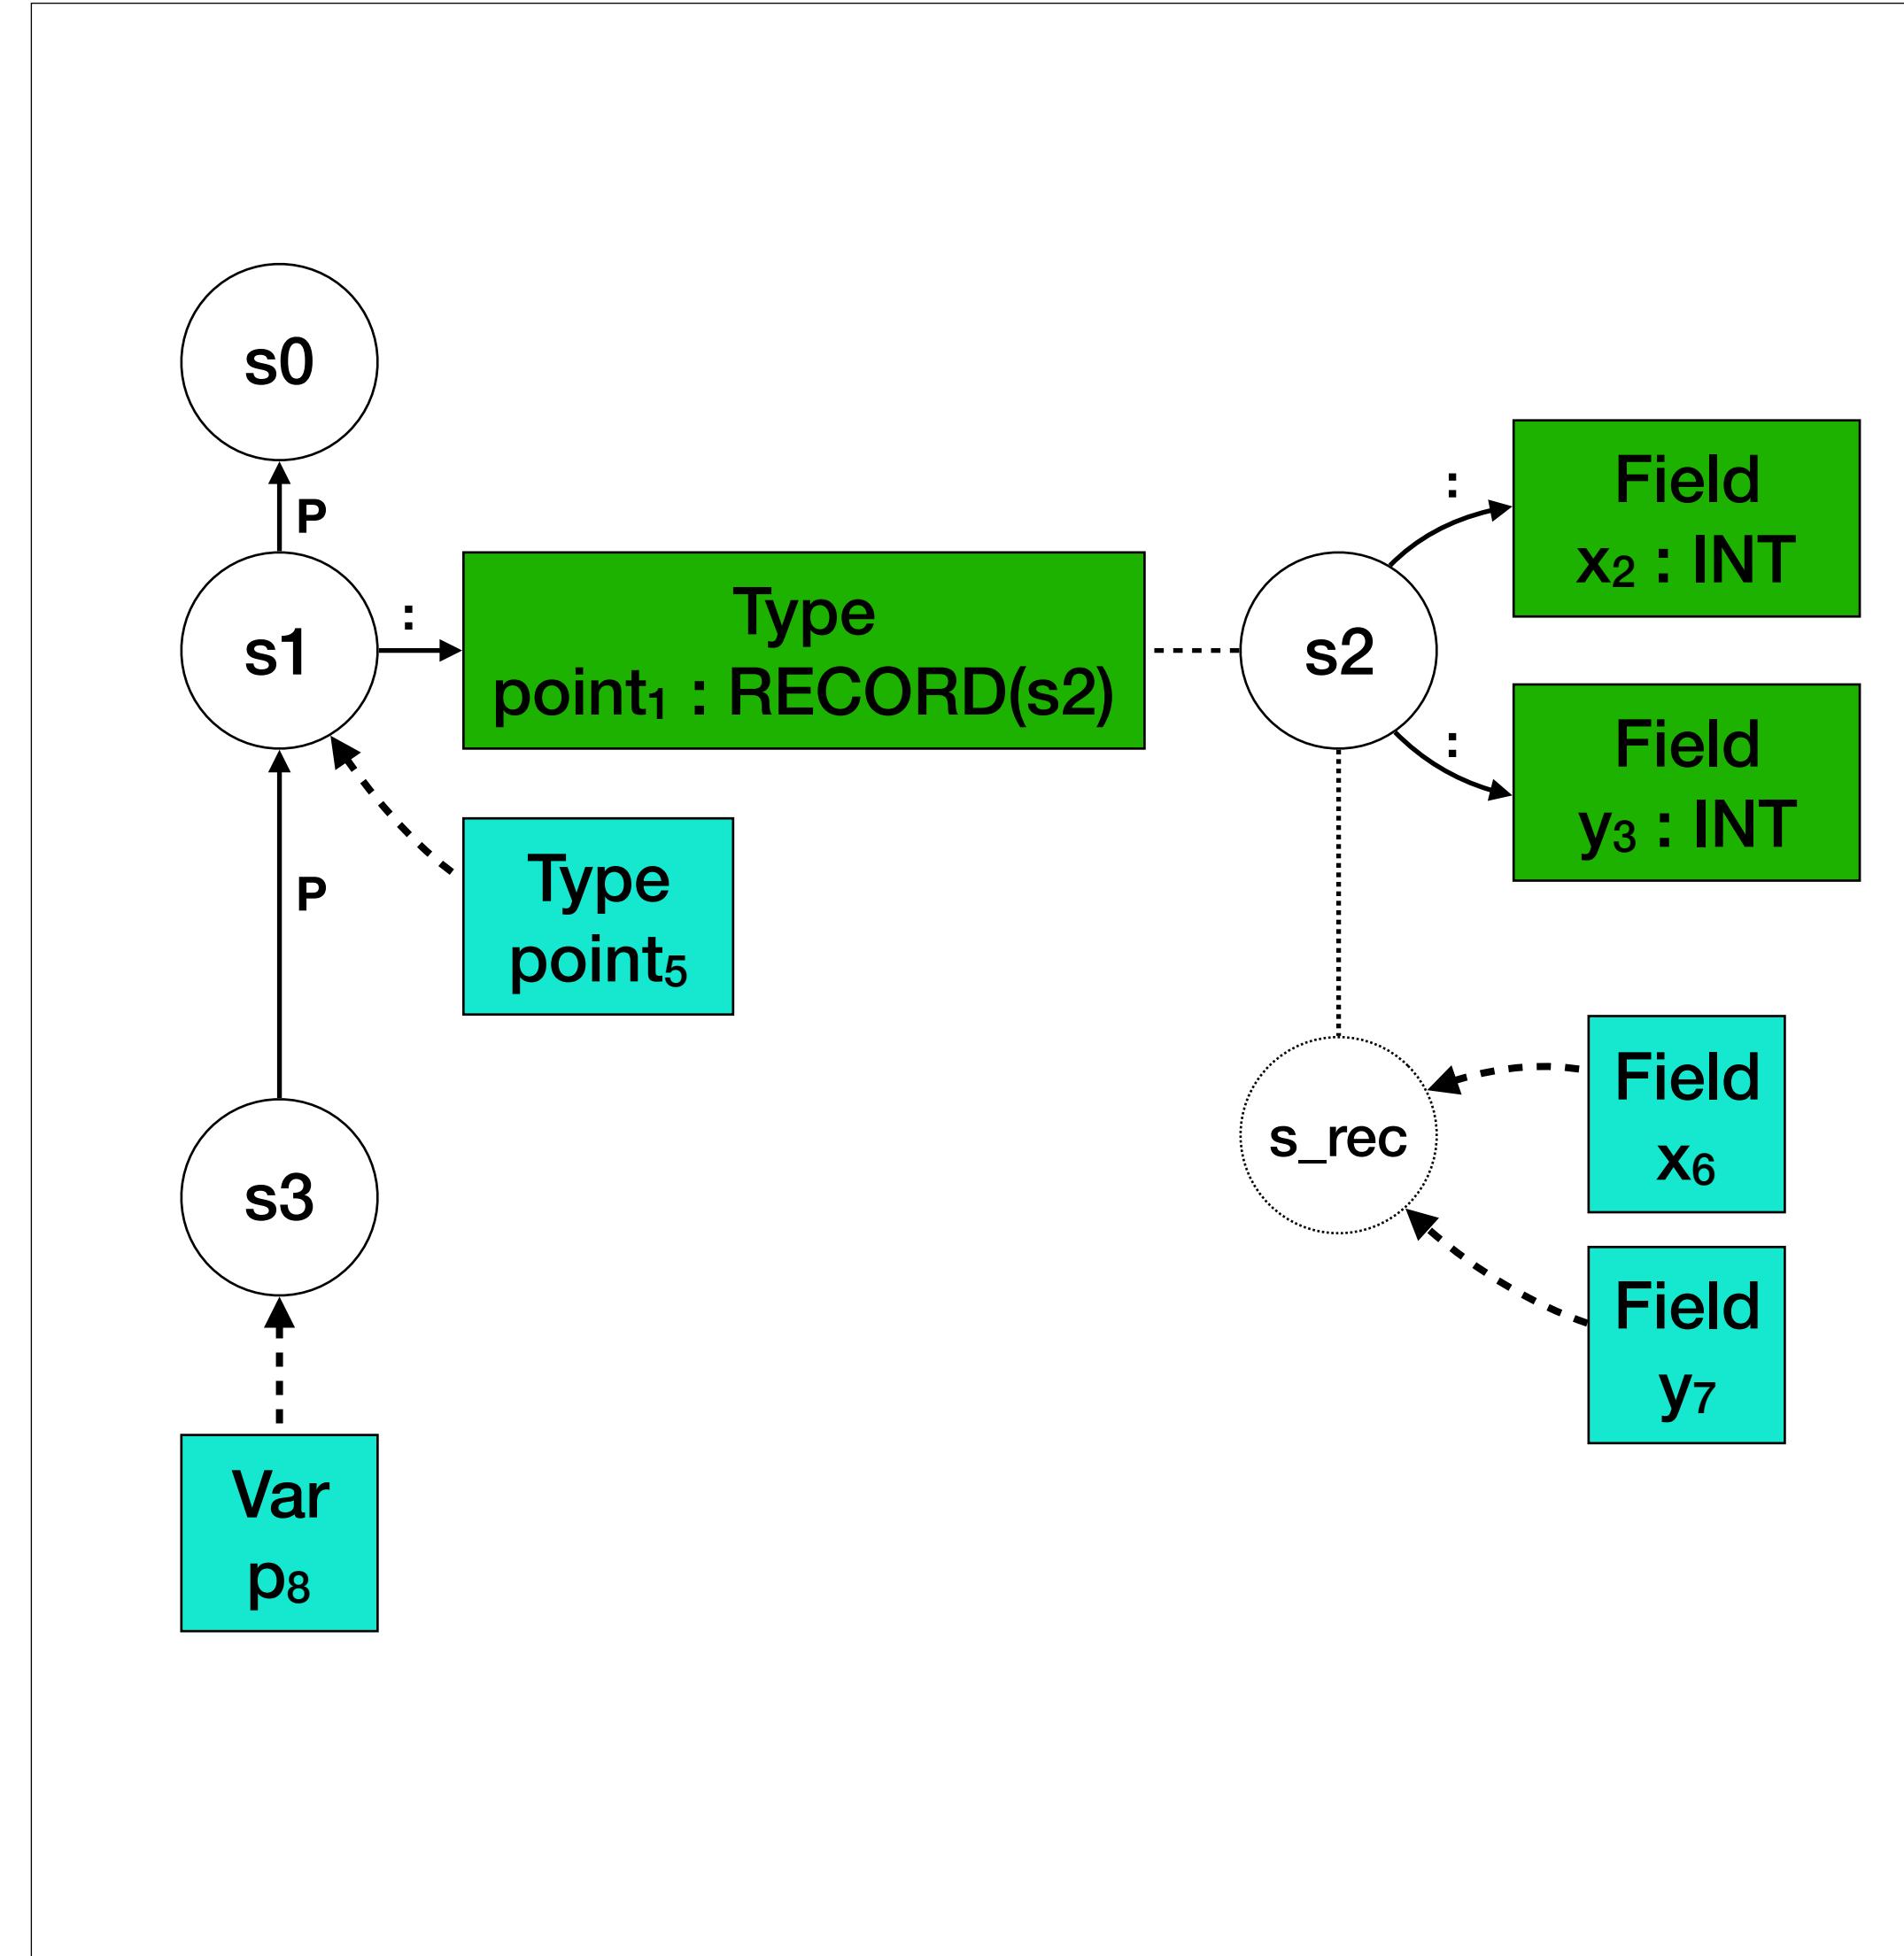

# Record Creation


```

let
  type point1 = { x2 : int, y3 : int } s2
  var p4 := point5{ x6 = 4, y7 = 5 }
in
  p8.x9
end
  
```

```

typeOfExp(s, e@Record(t, inits)) = RECORD(s_rec) :-
  {s_init ds}
typeOfType(s, Tid(t)) == RECORD(s_rec),
  new s_init,
  initsOk(s, s_rec, s_init, inits),
  typeOfDecl of Field{} in s_rec l-> ds,
  allFieldsInitialized(t, ds, s_init).

initOk(s, s_rec, s_init, InitField(x, e)) :- {S T}
  lookupField(s_rec, x) == T,
  typeOfExp(s, e) == S,
  declareField(s_init, x, S),
  subtype(S, T).
  
```

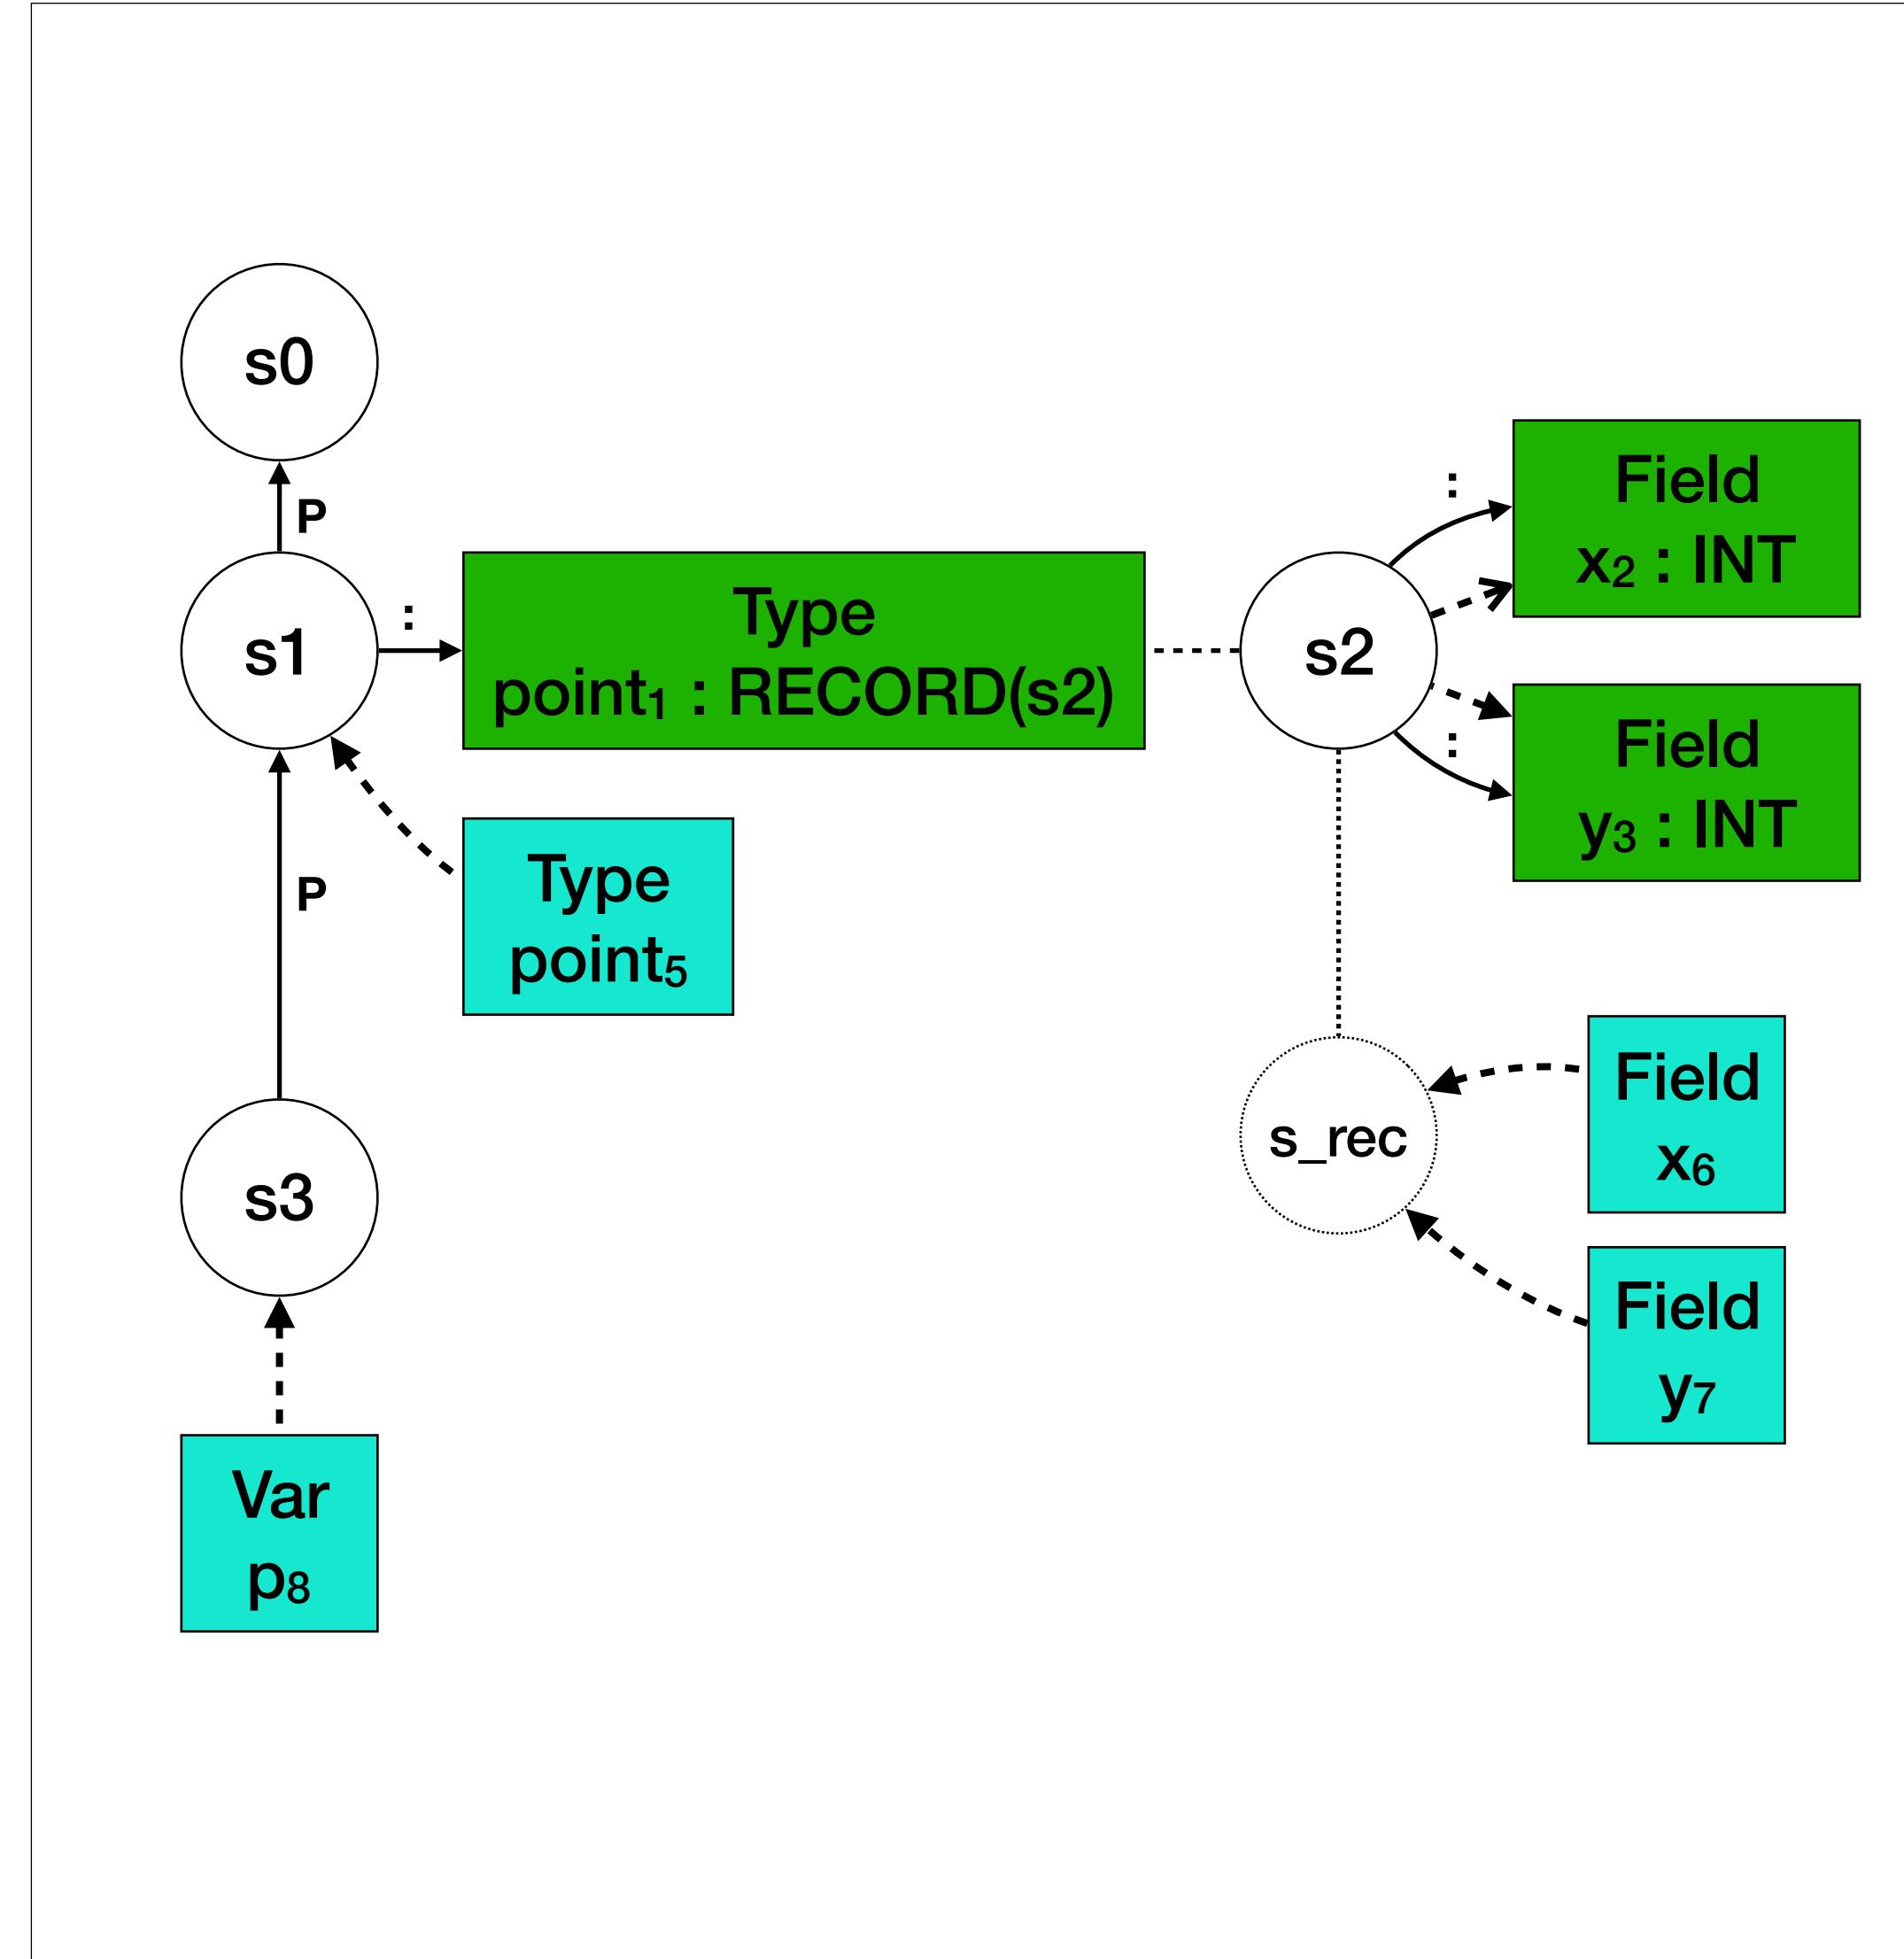

# Record Creation

```

let
  type point1 = { x2 : int, y3 : int }    s2
  var p4 := point5{ x6 = 4, y7 = 5 }      s1
in
  p8.x9                                s3
end

```

```

typeOfExp(s, e@Record(t, inits)) = RECORD(s_rec) :-  

  {s_init ds}  

  typeOfType(s, Tid(t)) == RECORD(s_rec),  

  new s_init,  

  initsOk(s, s_rec, s_init, inits),  

  typeOfDecl of Field{} in s_rec l-> ds,  

  allFieldsInitialized(t, ds, s_init).  
  

initOk(s, s_rec, s_init, InitField(x, e)) :- {S T}  


  lookupField(s_rec, x) == T,  

  typeOfExp(s, e) == S,  

  declareField(s_init, x, S),  

  subtype(S, T).

```

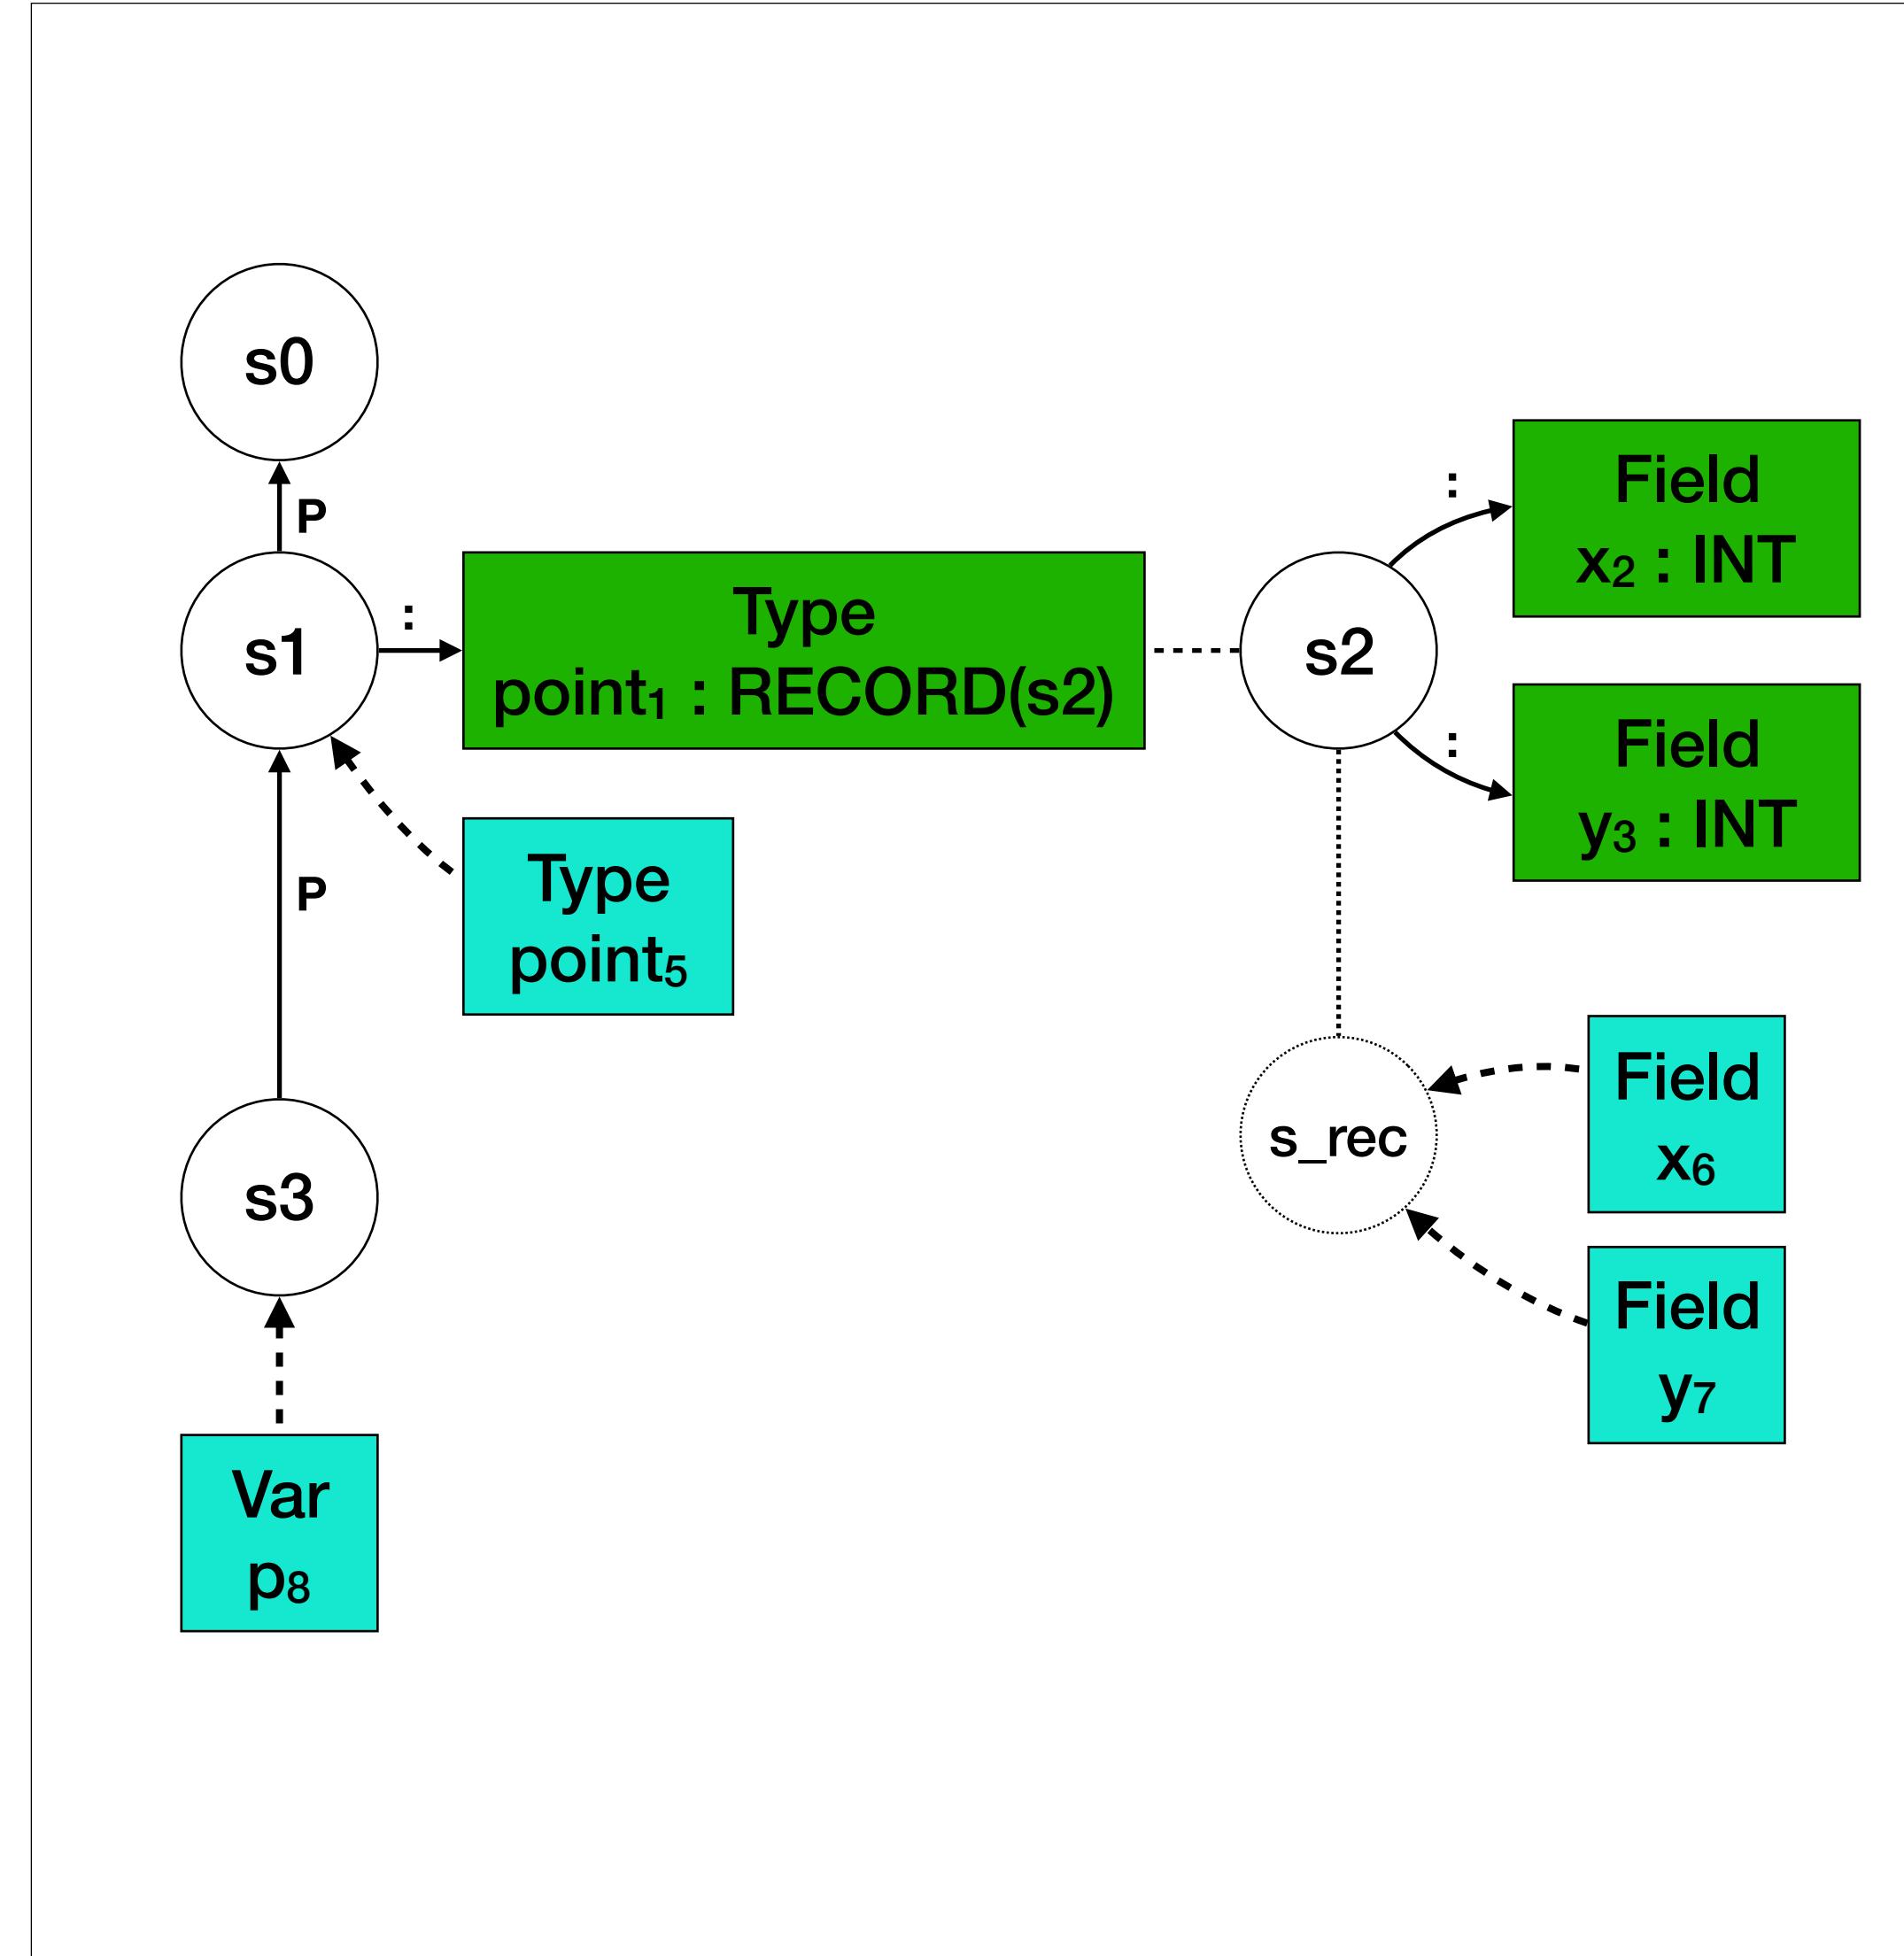

# Record Creation


```

let
  type point1 = { x2 : int, y3 : int }    s2
  var p4 := point5{ x6 = 4, y7 = 5 }
in
  p8.x9
end
  
```

```


typeOfExp(s, e@Record(t, inits)) = RECORD(s_rec) :-
  {s_init ds}
typeOfType(s, Tid(t)) == RECORD(s_rec),
new s_init,
initsOk(s, s_rec, s_init, inits),
typeOfDecl of Field{} in s_rec l-> ds,
allFieldsInitialized(t, ds, s_init).

initOk(s, s_rec, s_init, InitField(x, e)) :- {S T}
  lookupField(s_rec, x) == T,
  typeOfExp(s, e) == S,
  declareField(s_init, x, S),
  subtype(S, T).
  
```

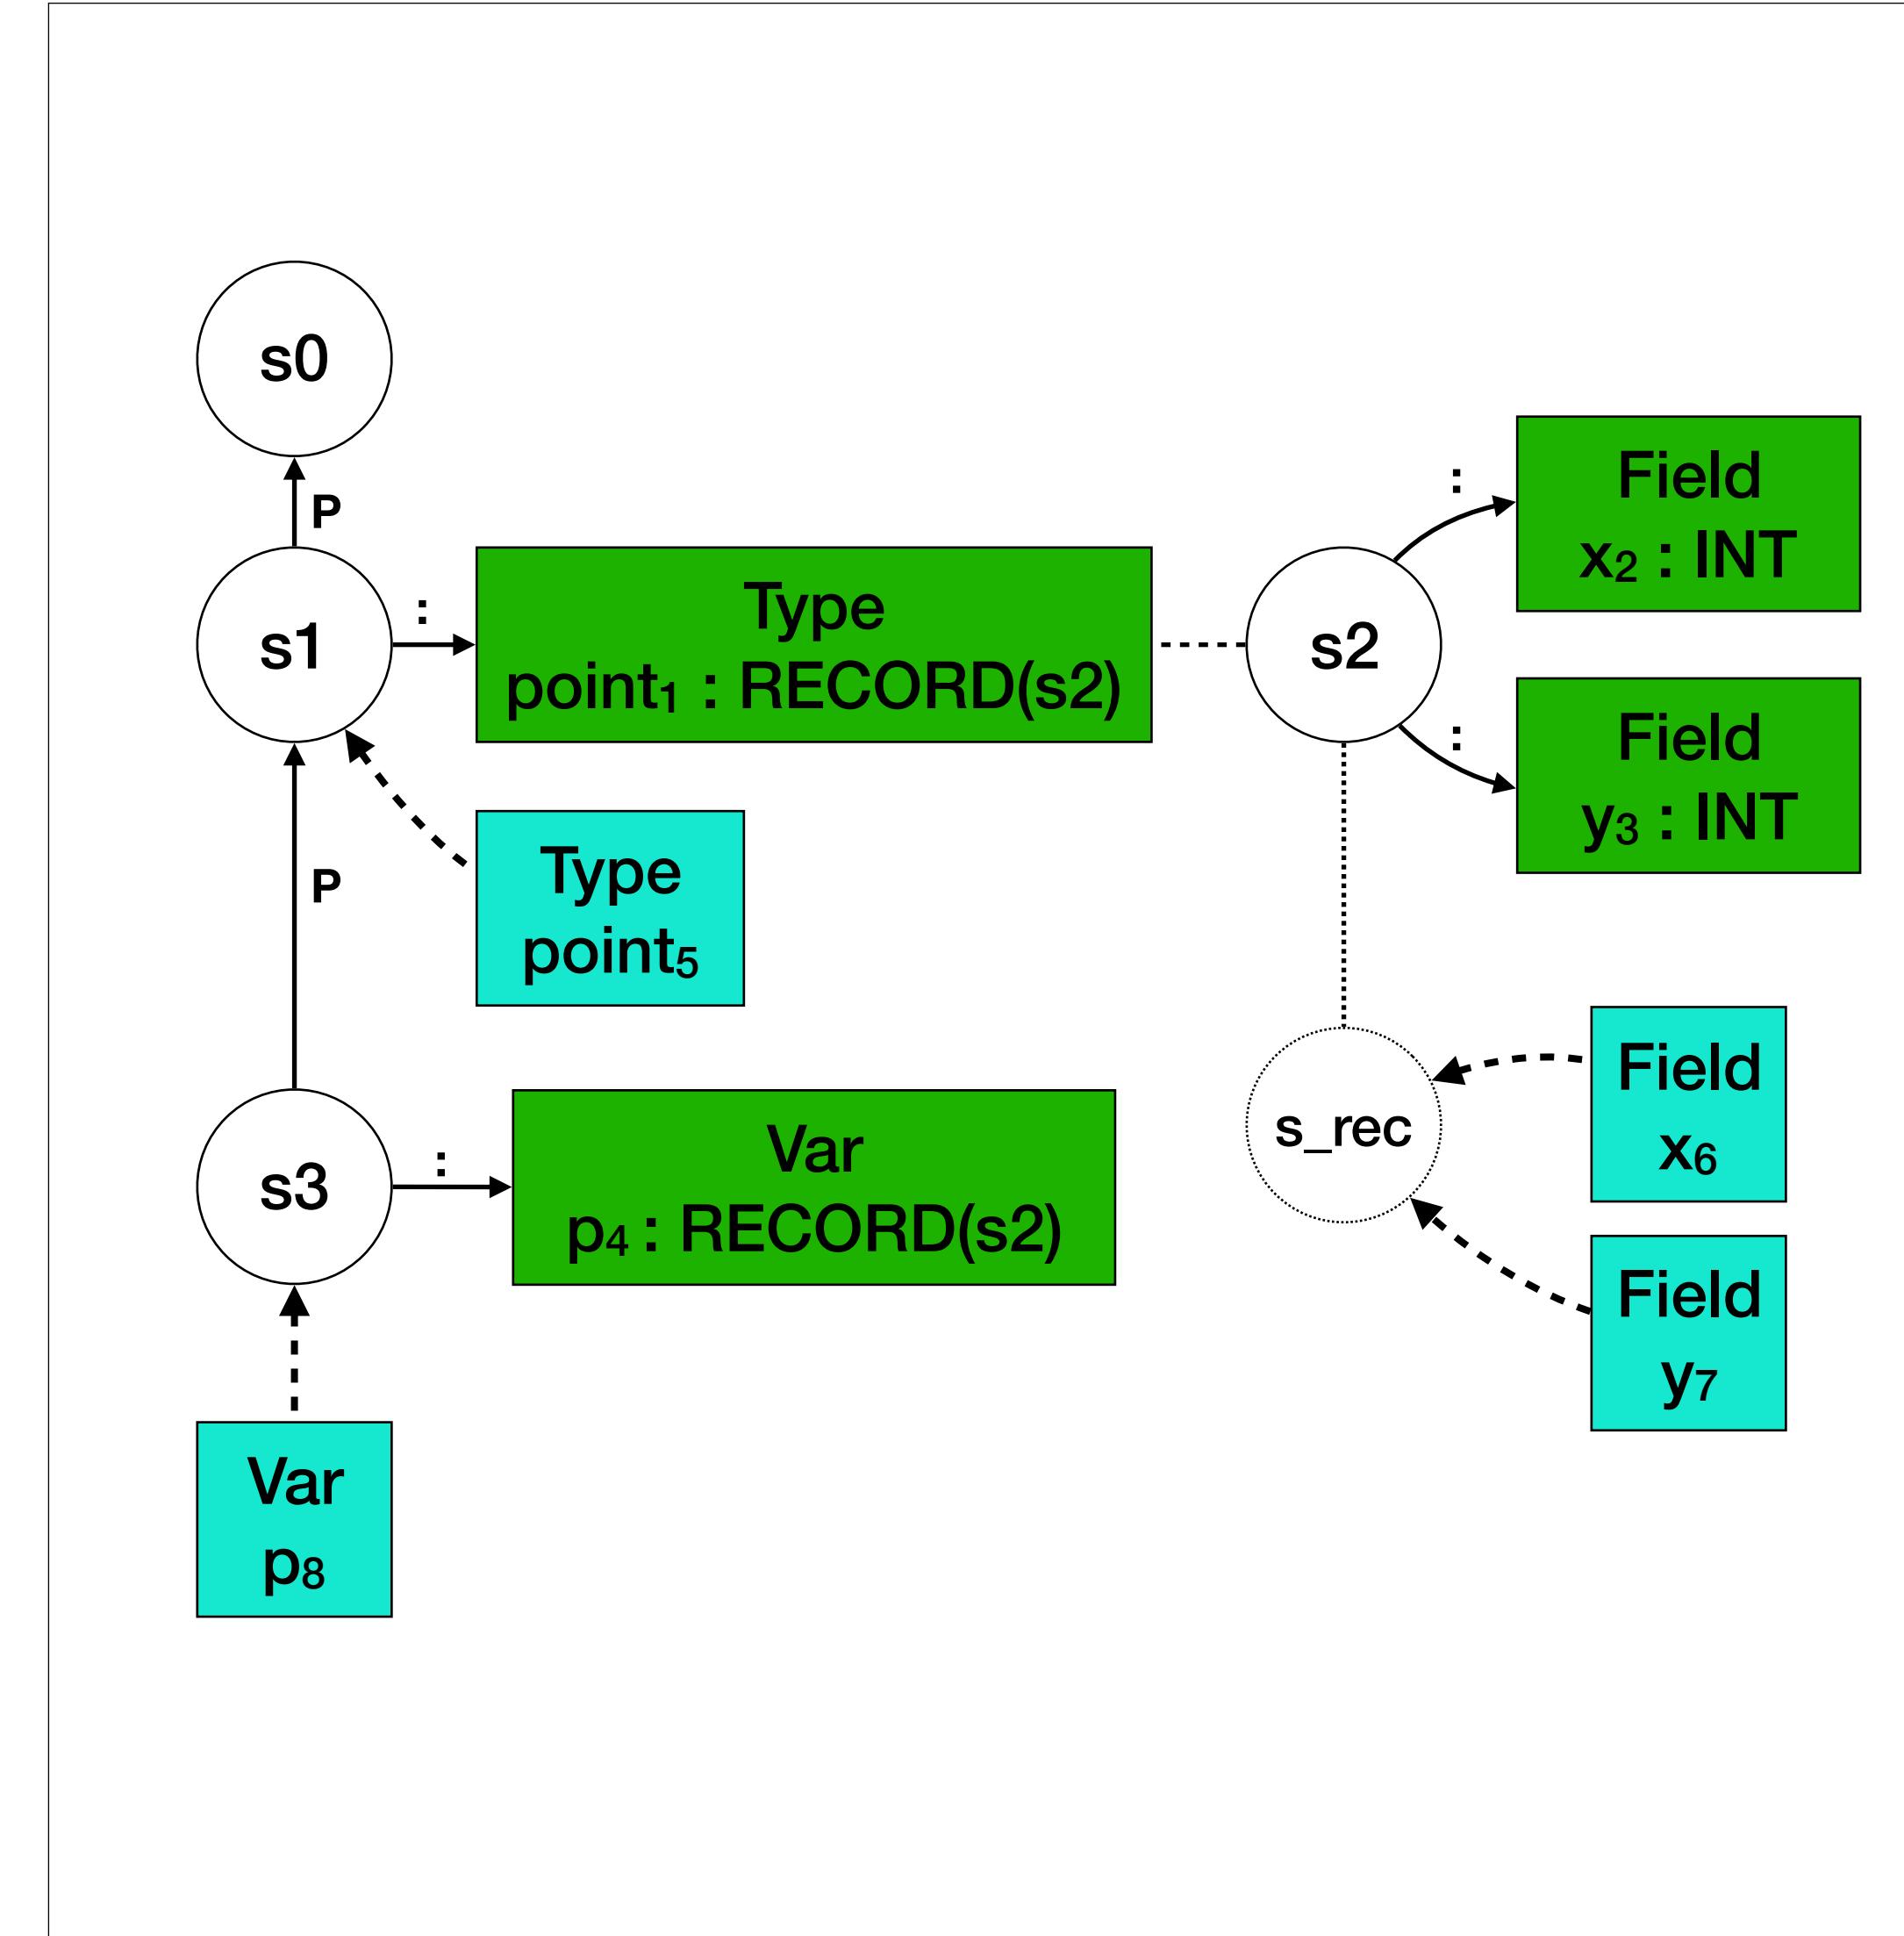

# Record Field Access


```
let
  type point1 = { x2 : int, y3 : int } s2
  var p4 := point5{ x6 = 4, y7 = 5 } s4 s1
in
  p8.x9
end
```

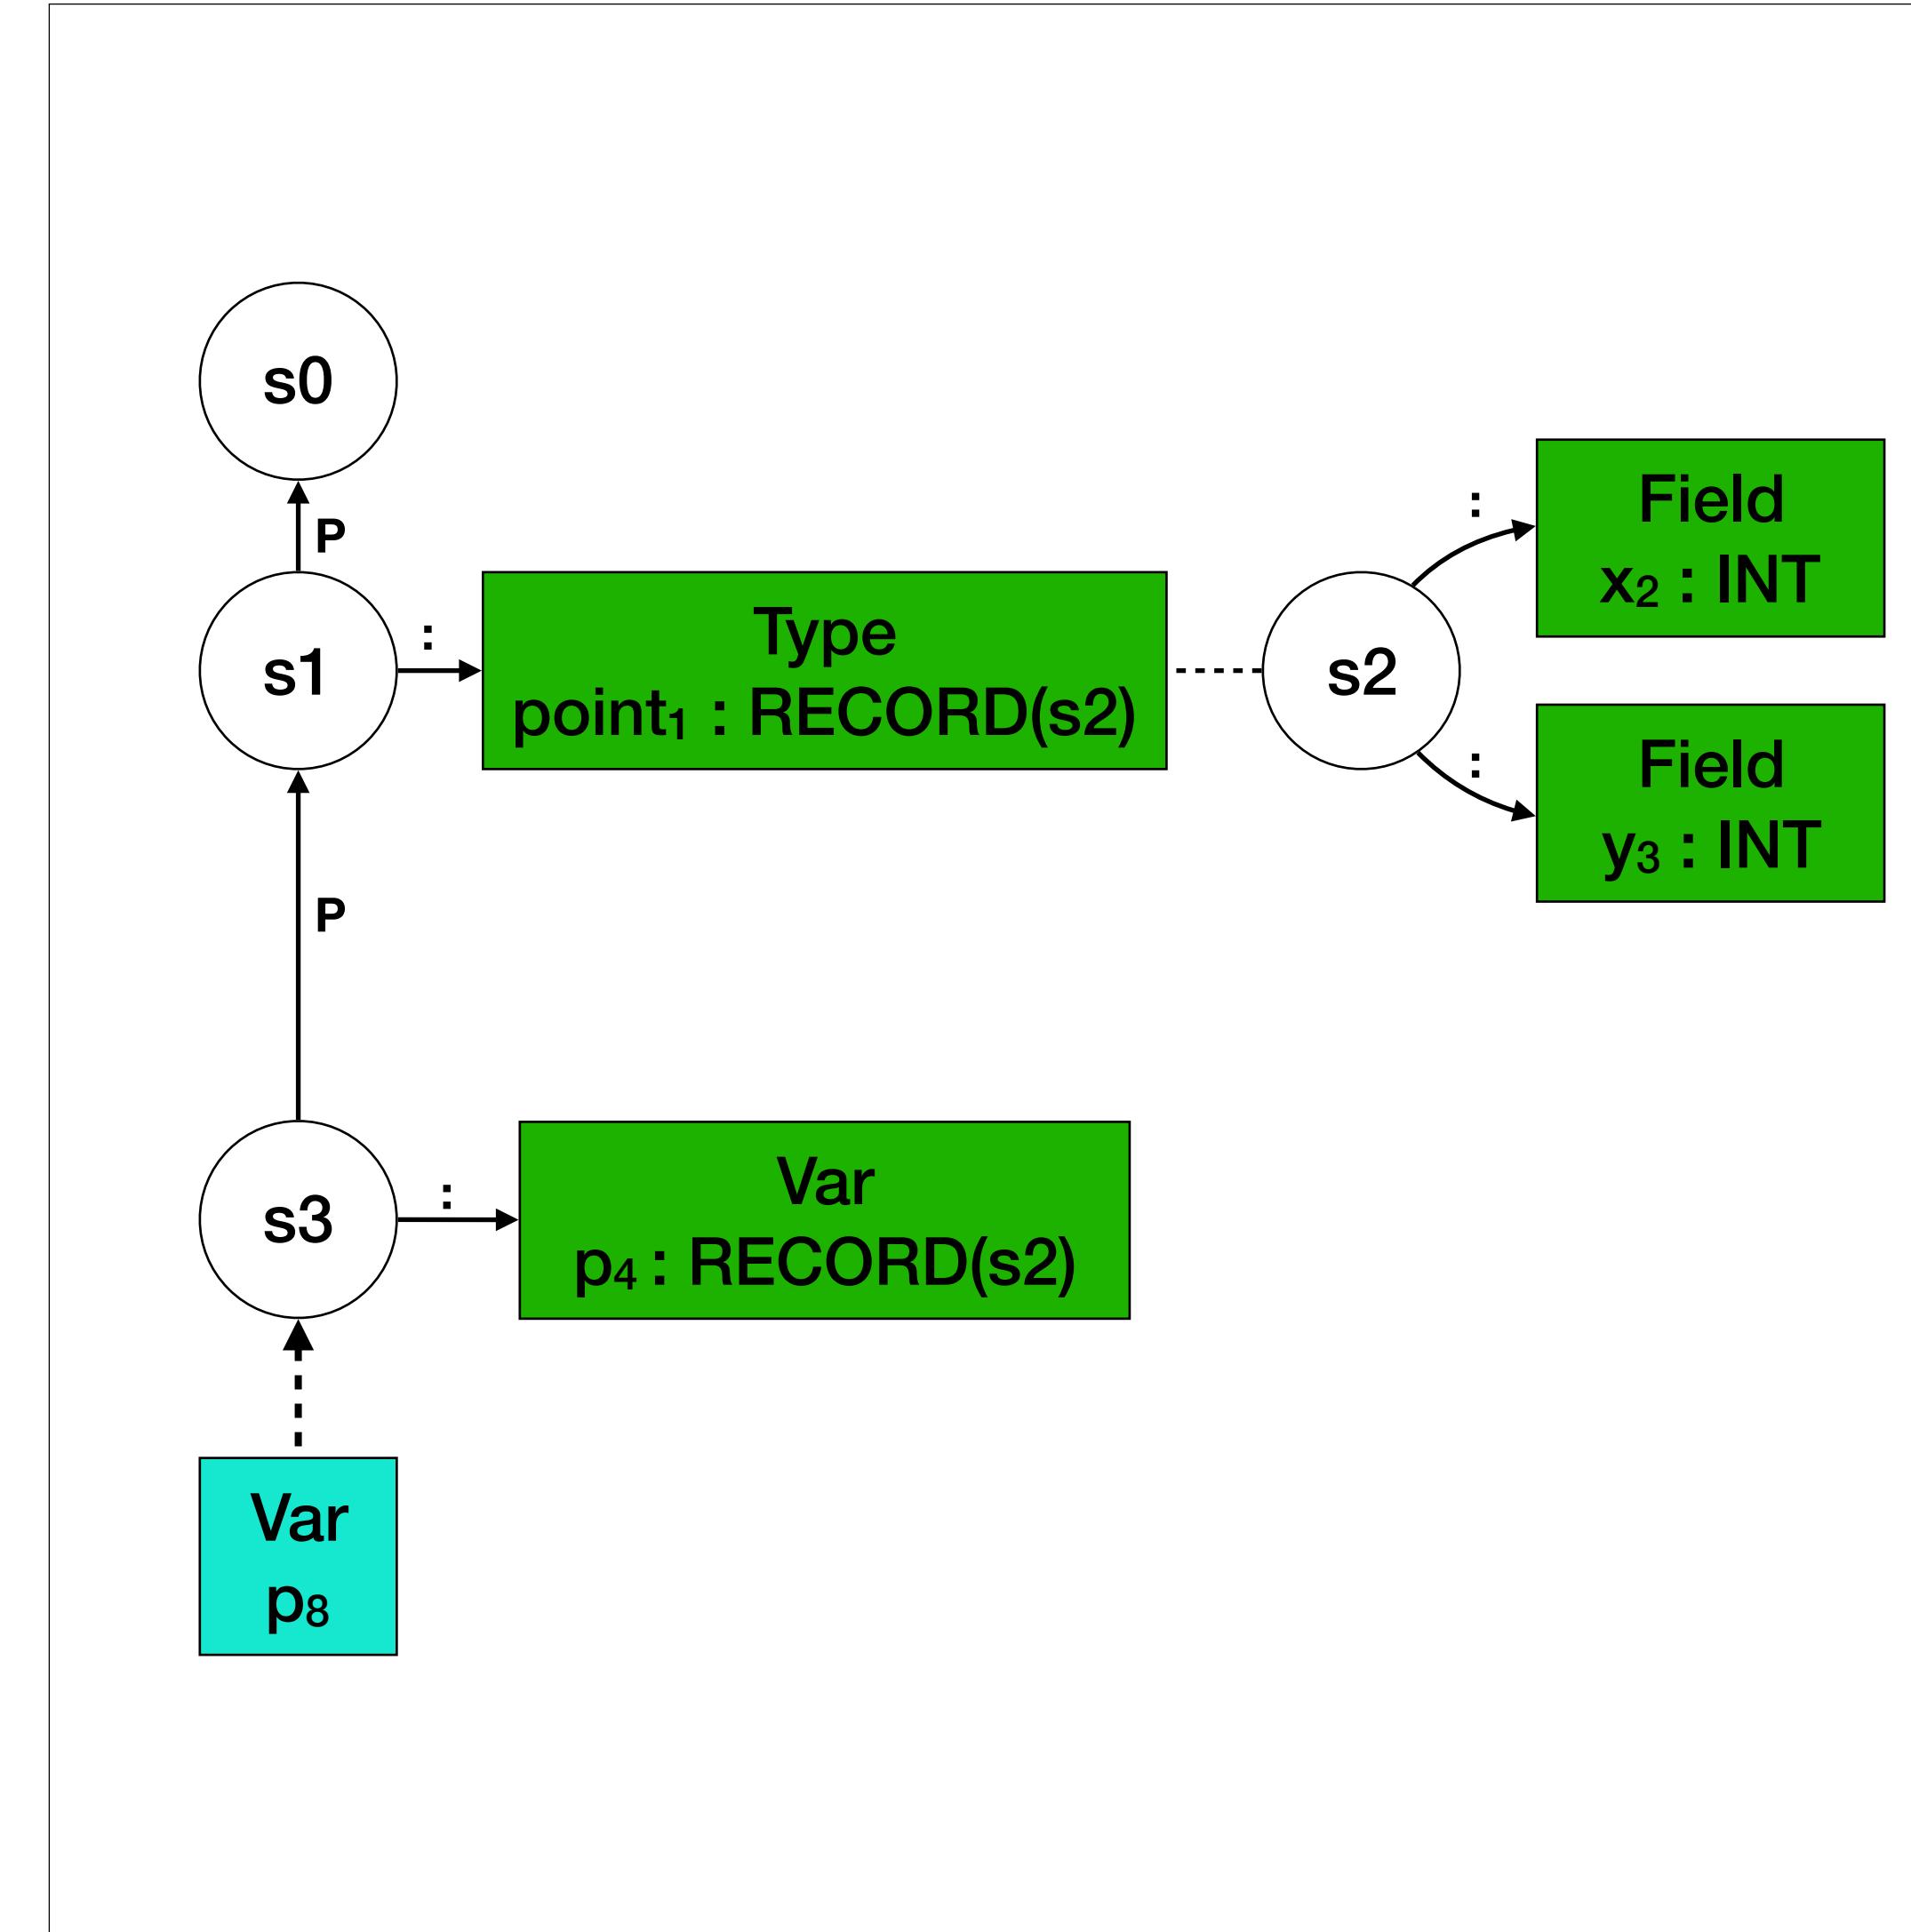

# Record Field Access

```
let
  type point1 = { x2 : int, y3 : int } s2
  var p4 := point5{ x6 = 4, y7 = 5 } s4 s1
in
  p8.x9
end
```


```
typeOfLVal(s, FieldVar(lval, x)) = T :- {s_rec}
typeOfLVal(s, lval) == RECORD(s_rec),
lookupField(s_rec, x) == T.
```

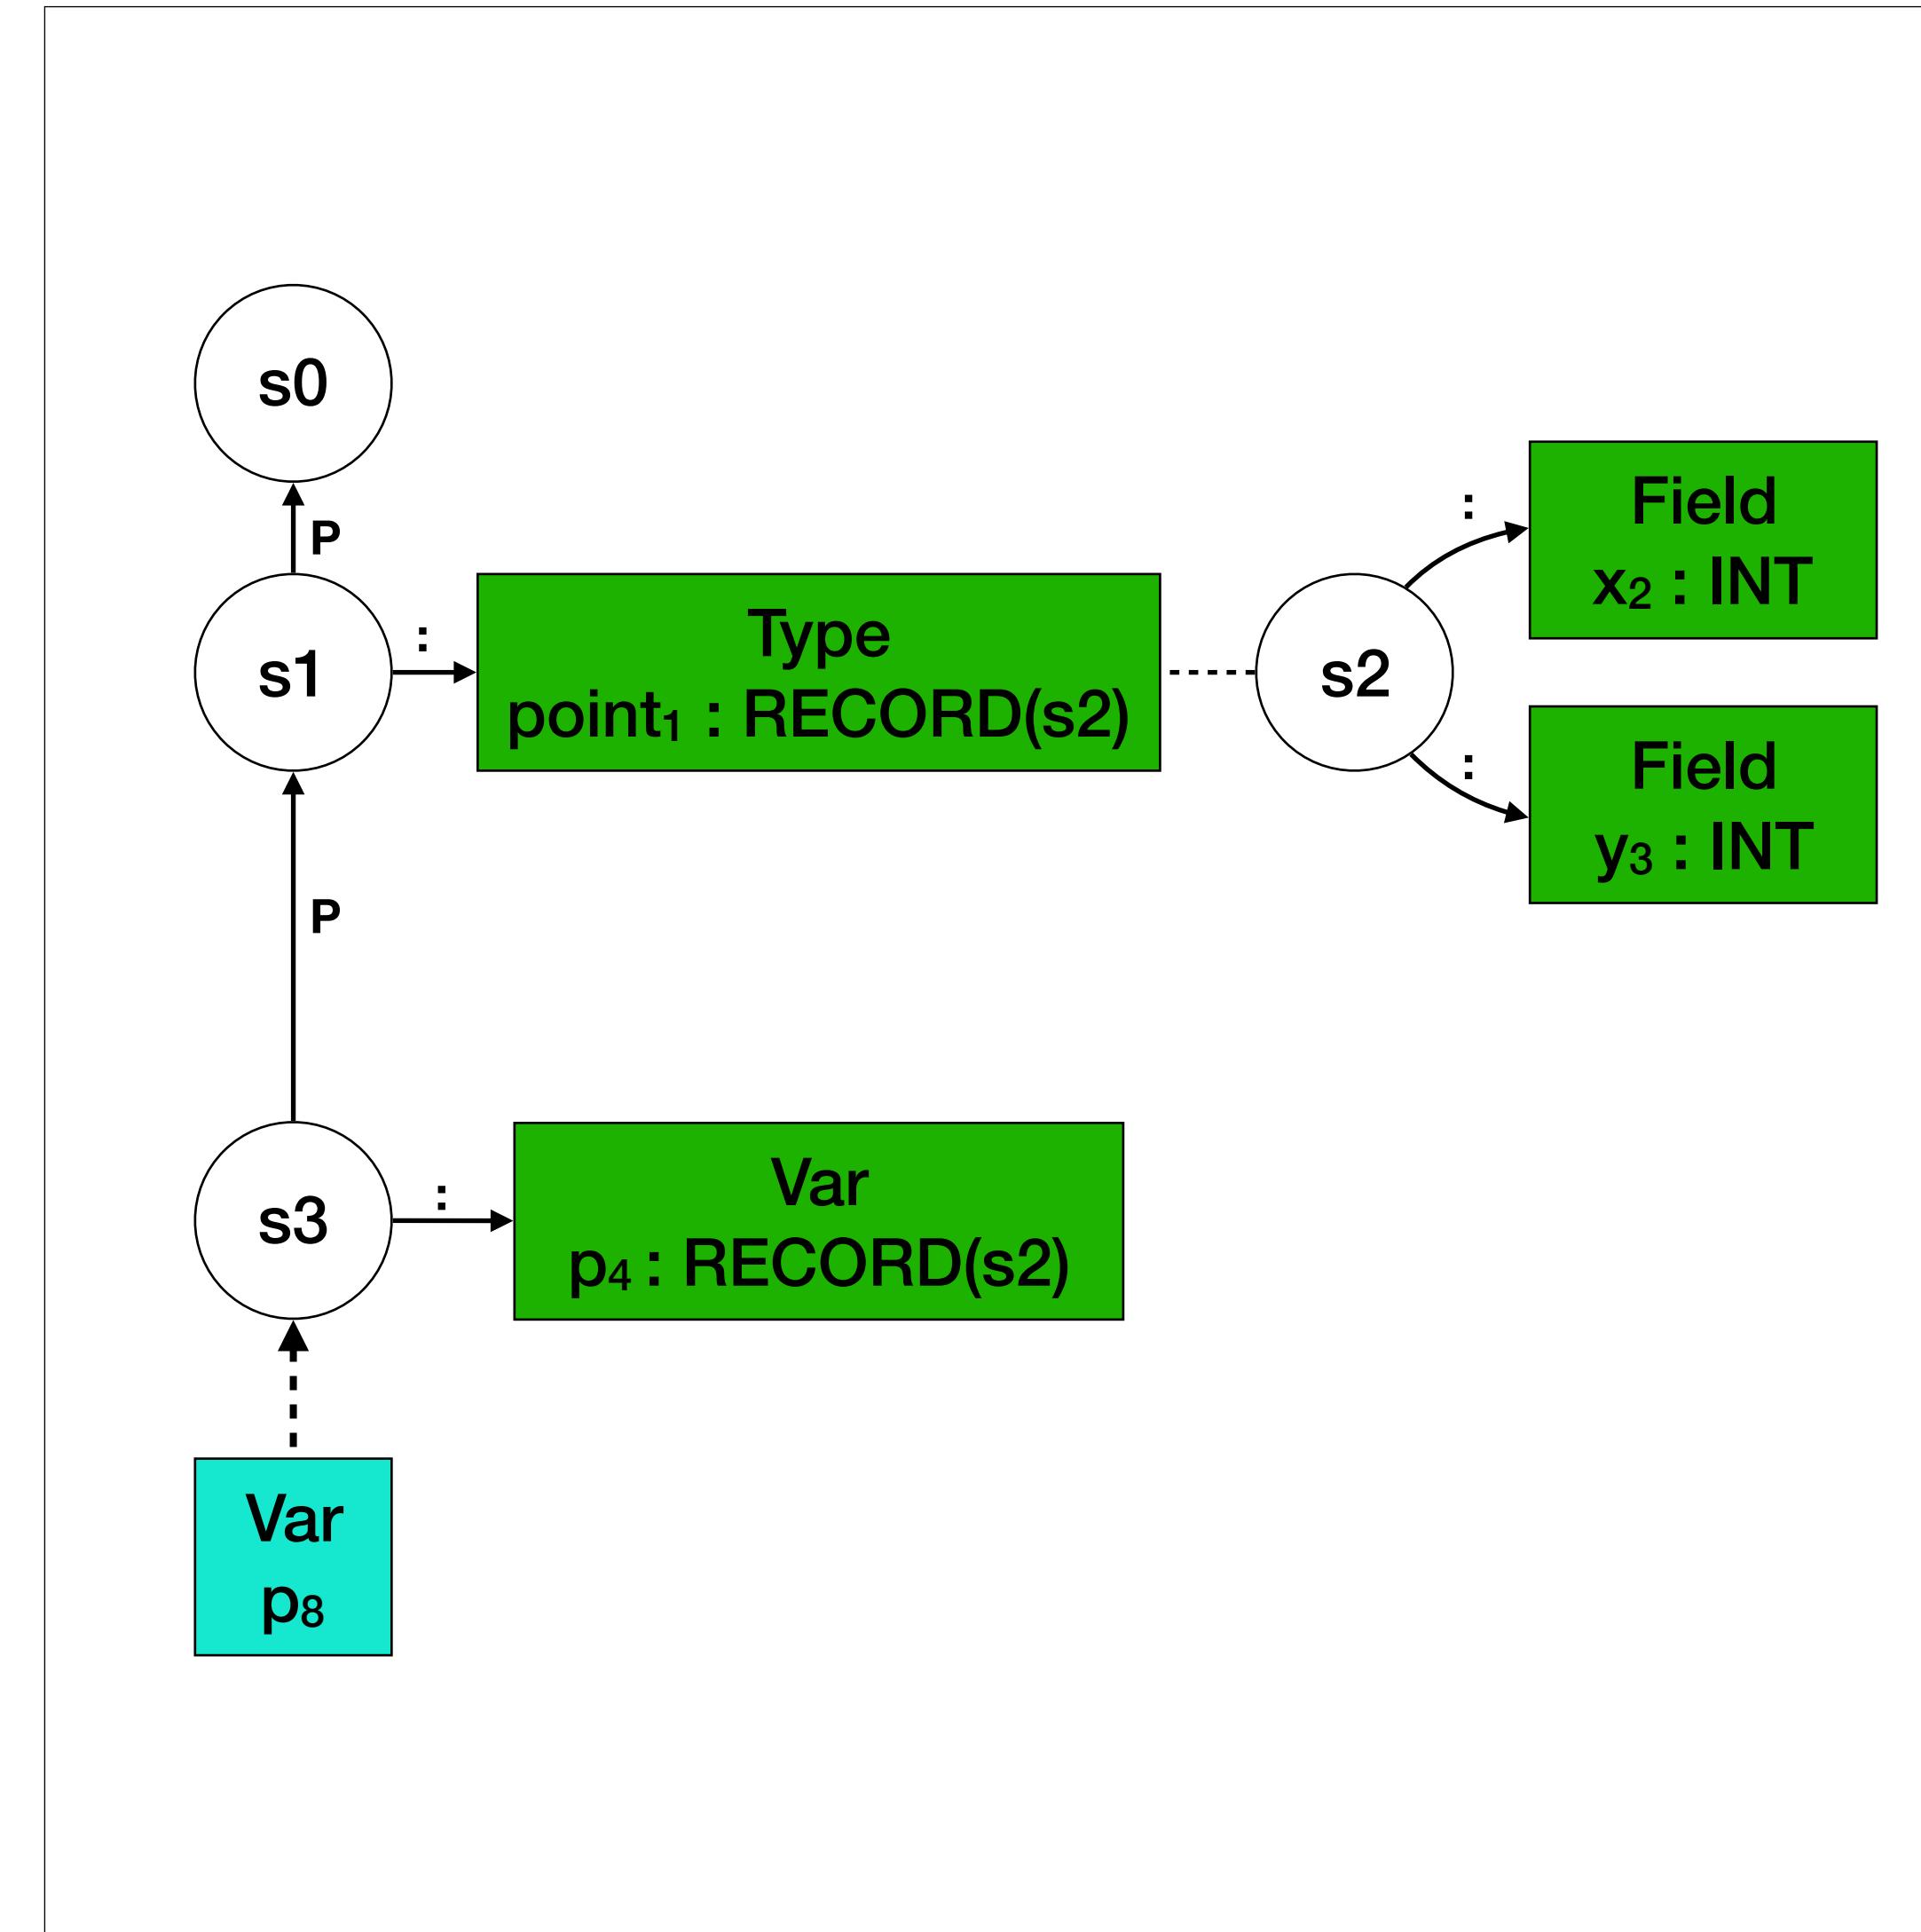

# Record Field Access

```
let
  type point1 = { x2 : int, y3 : int } s2
  var p4 := point5{ x6 = 4, y7 = 5 } s4 s1
in
  p8.x9
end
```

```
typeOfLVal(s, FieldVar(lval, x)) = T :- {s_rec}
typeOfLVal(s, lval) == RECORD(s_rec),
lookupField(s_rec, x) == T.
```

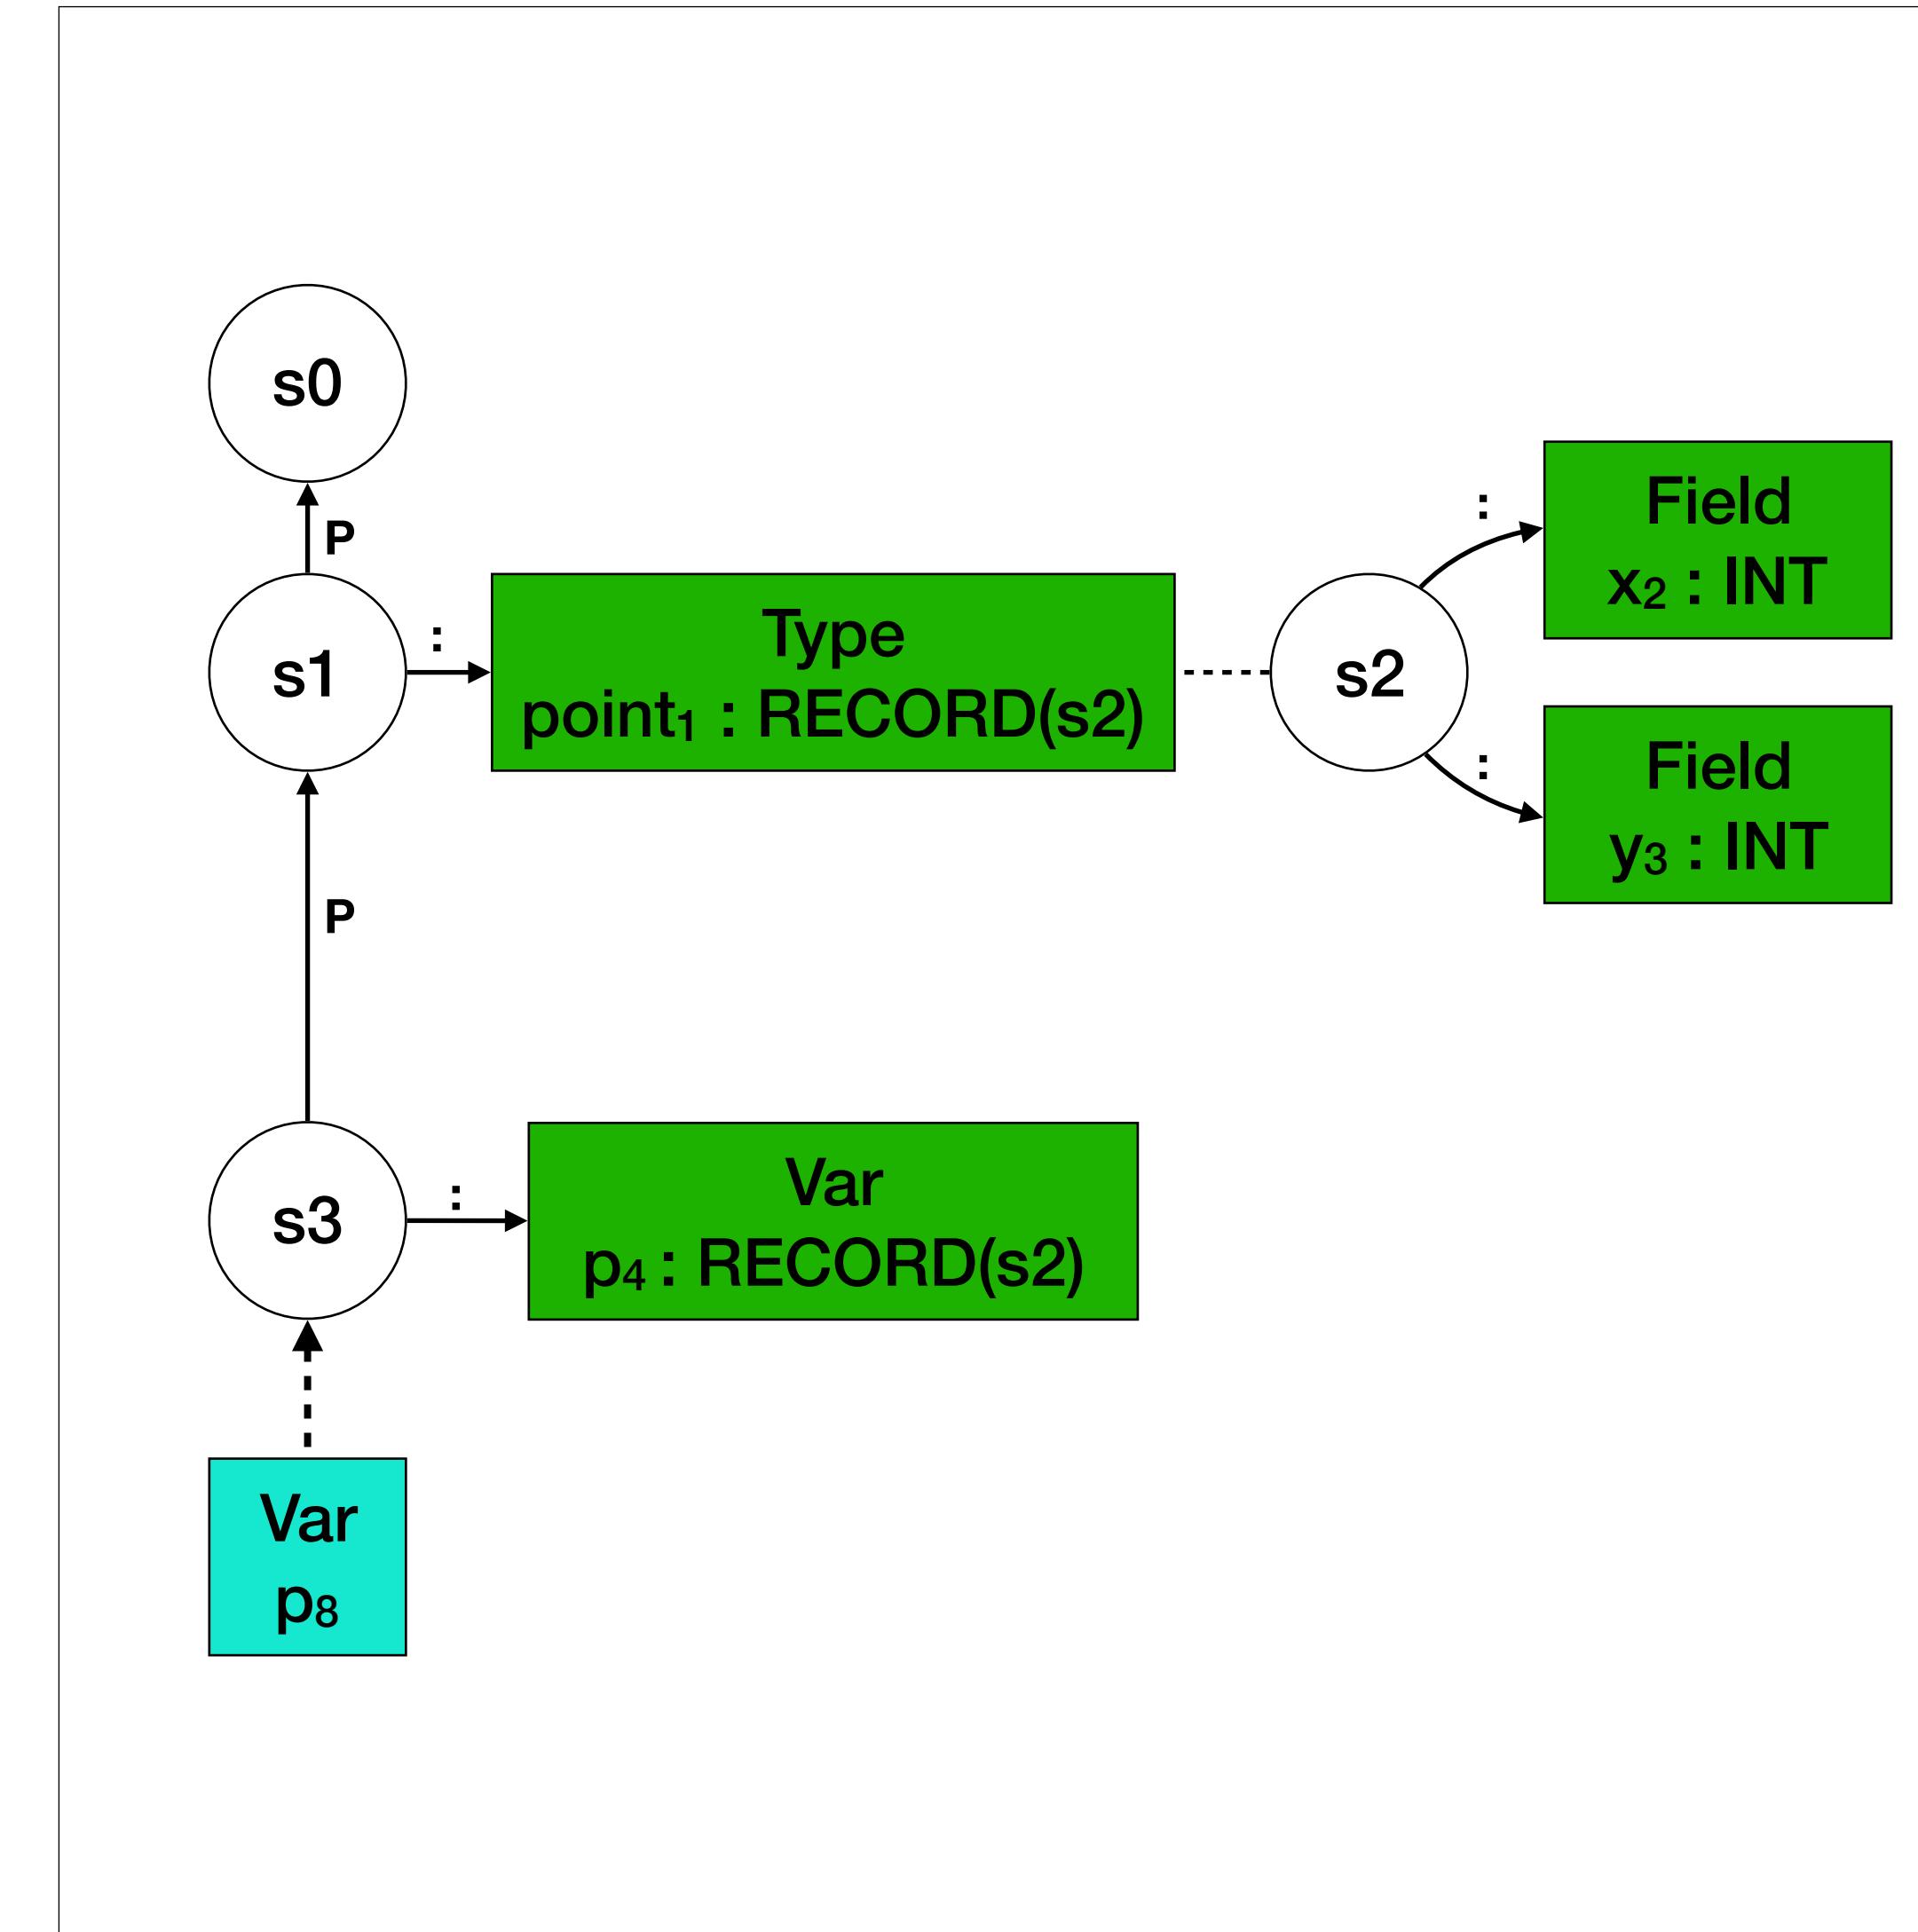

# Record Field Access

```

let
  type point1 = { x2 : int, y3 : int } s2
  var p4 := point5{ x6 = 4, y7 = 5 } s4 s1
in
  p8.x9
end

```


s<sub>0</sub>

```

typeOfLVal(s, FieldVar(lval, x)) = T :- {s_rec}
typeOfLVal(s, lval) == RECORD(s_rec),
lookupField(s_rec, x) == T.

```

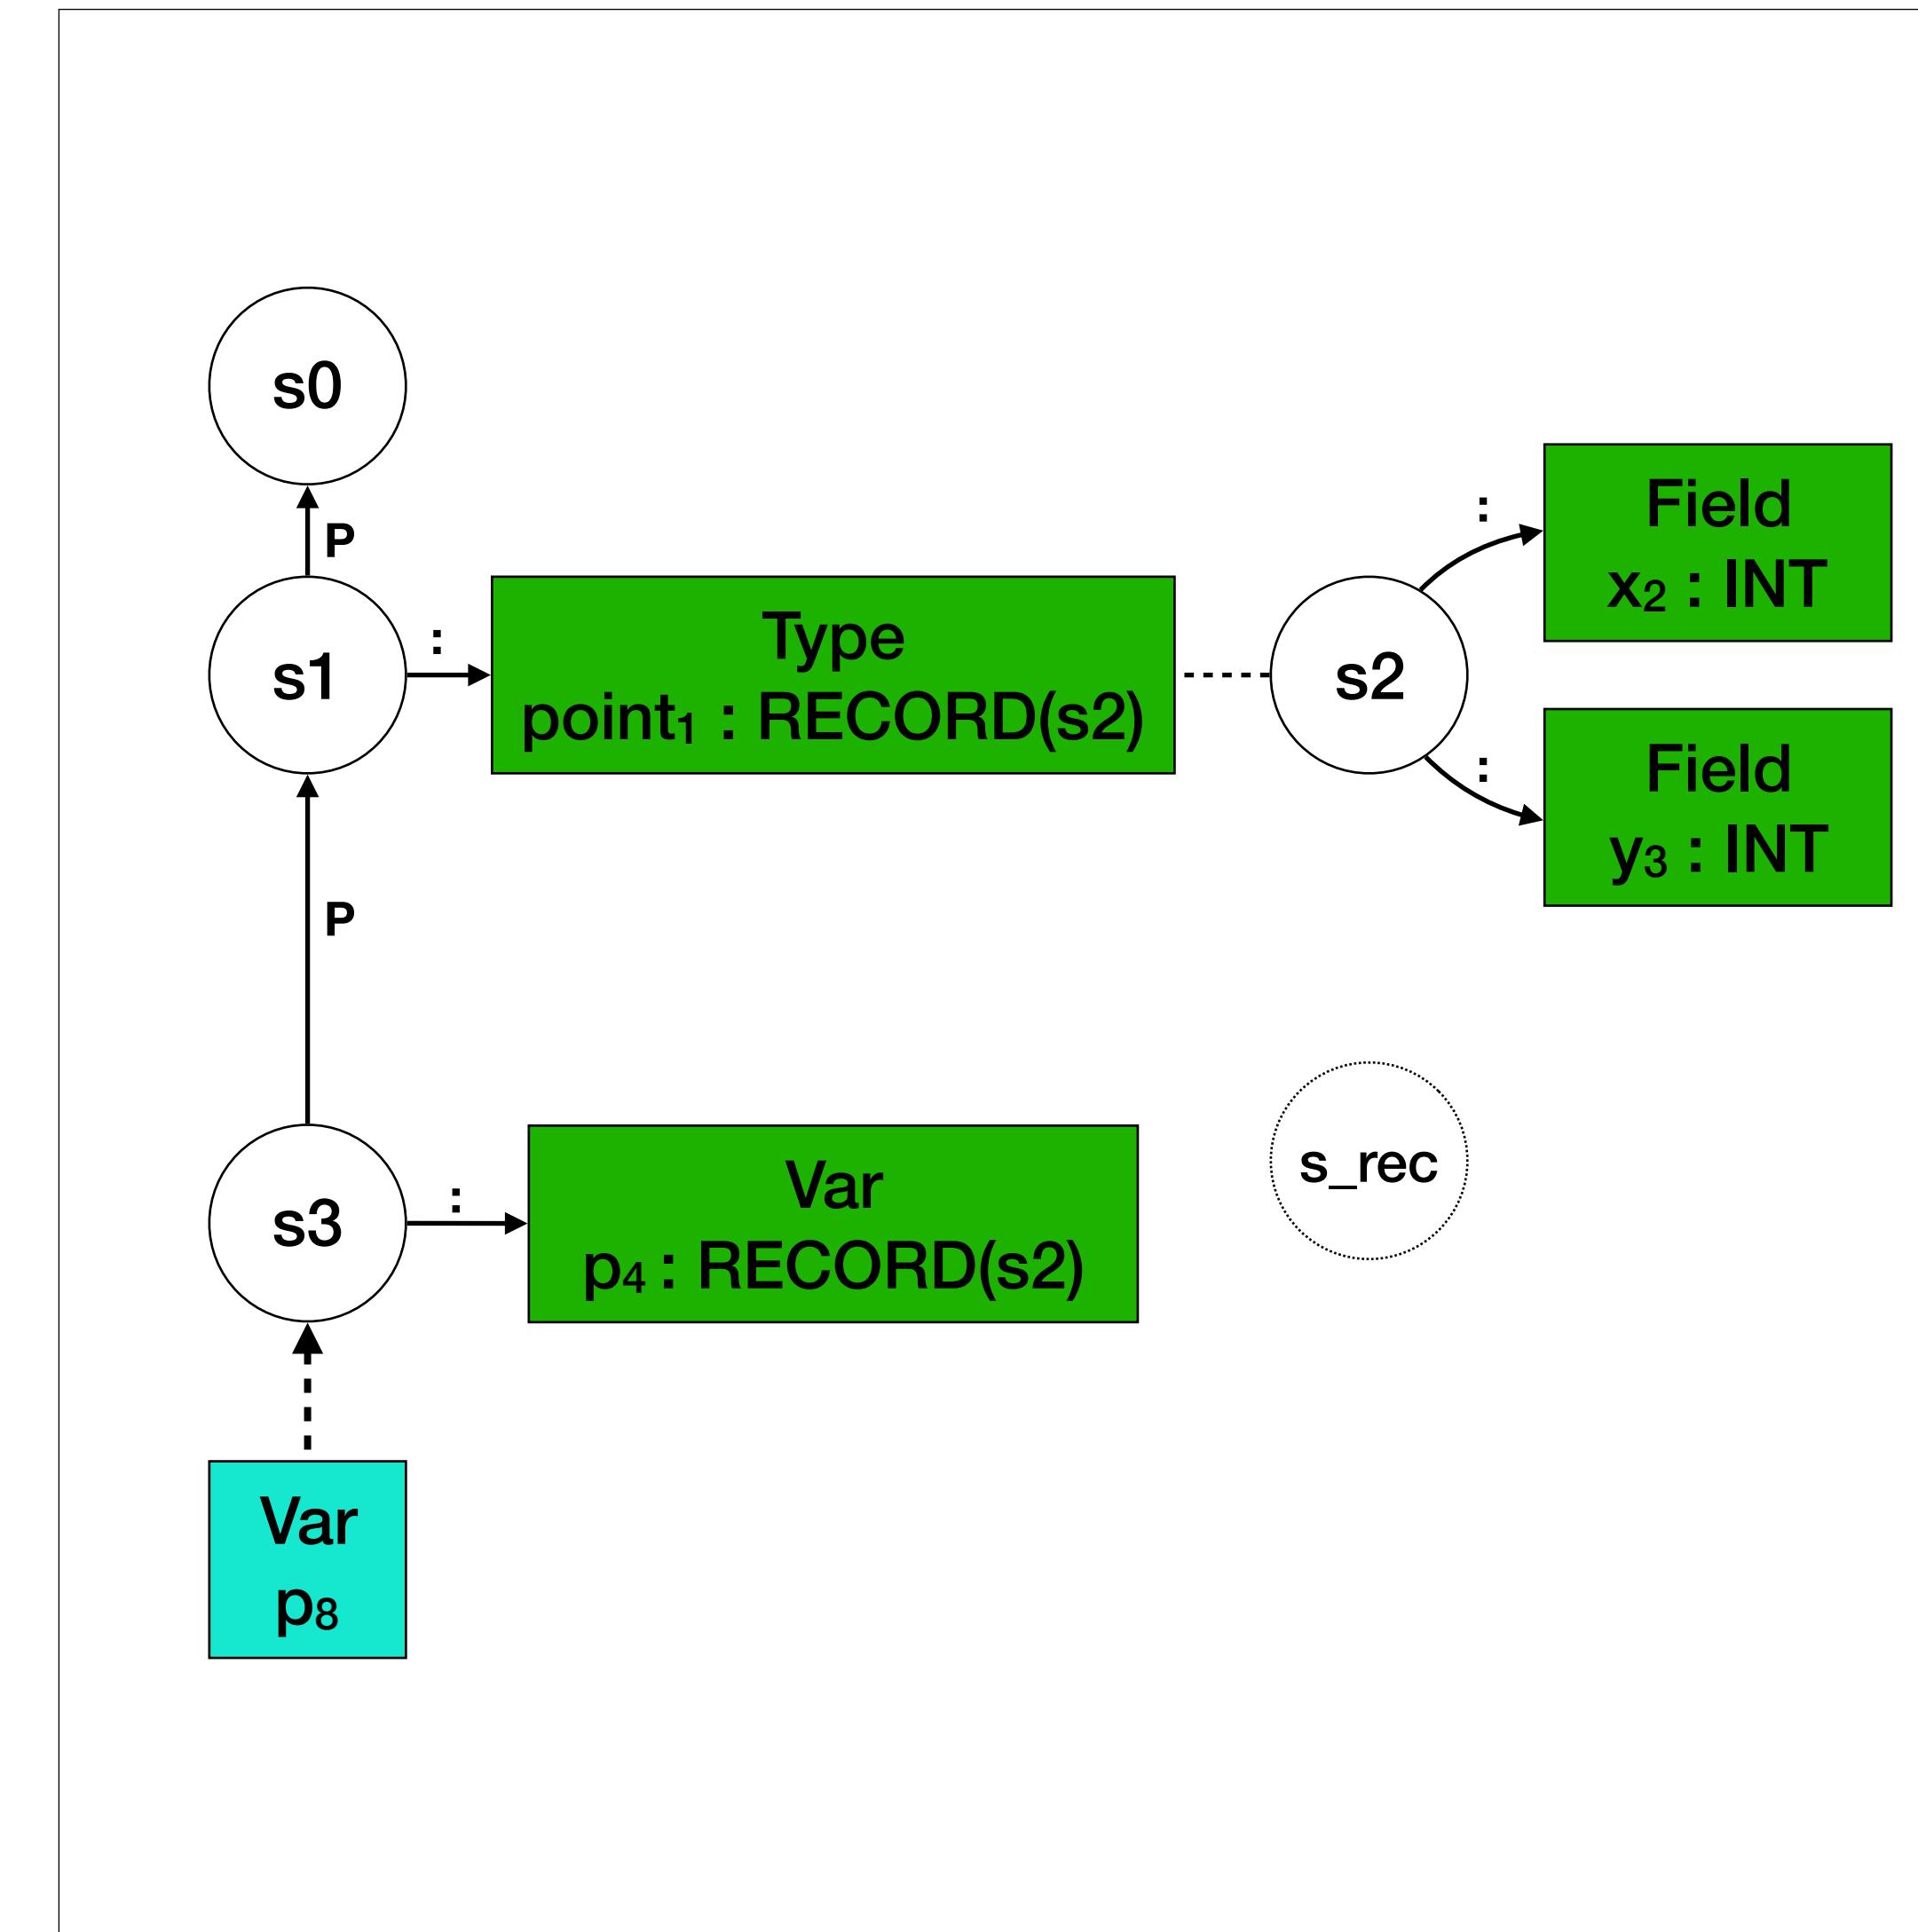


# Record Field Access

```

let
  type point1 = { x2 : int, y3 : int } s2
  var p4 := point5{ x6 = 4, y7 = 5 } s4 s1
in
  p8.x9
end
  
```

```

typeOfLVal(s, FieldVar(lval, x)) = T :- {s_rec}
typeOfLVal(s, lval) == RECORD(s_rec),
lookupField(s_rec, x) == T.
  
```

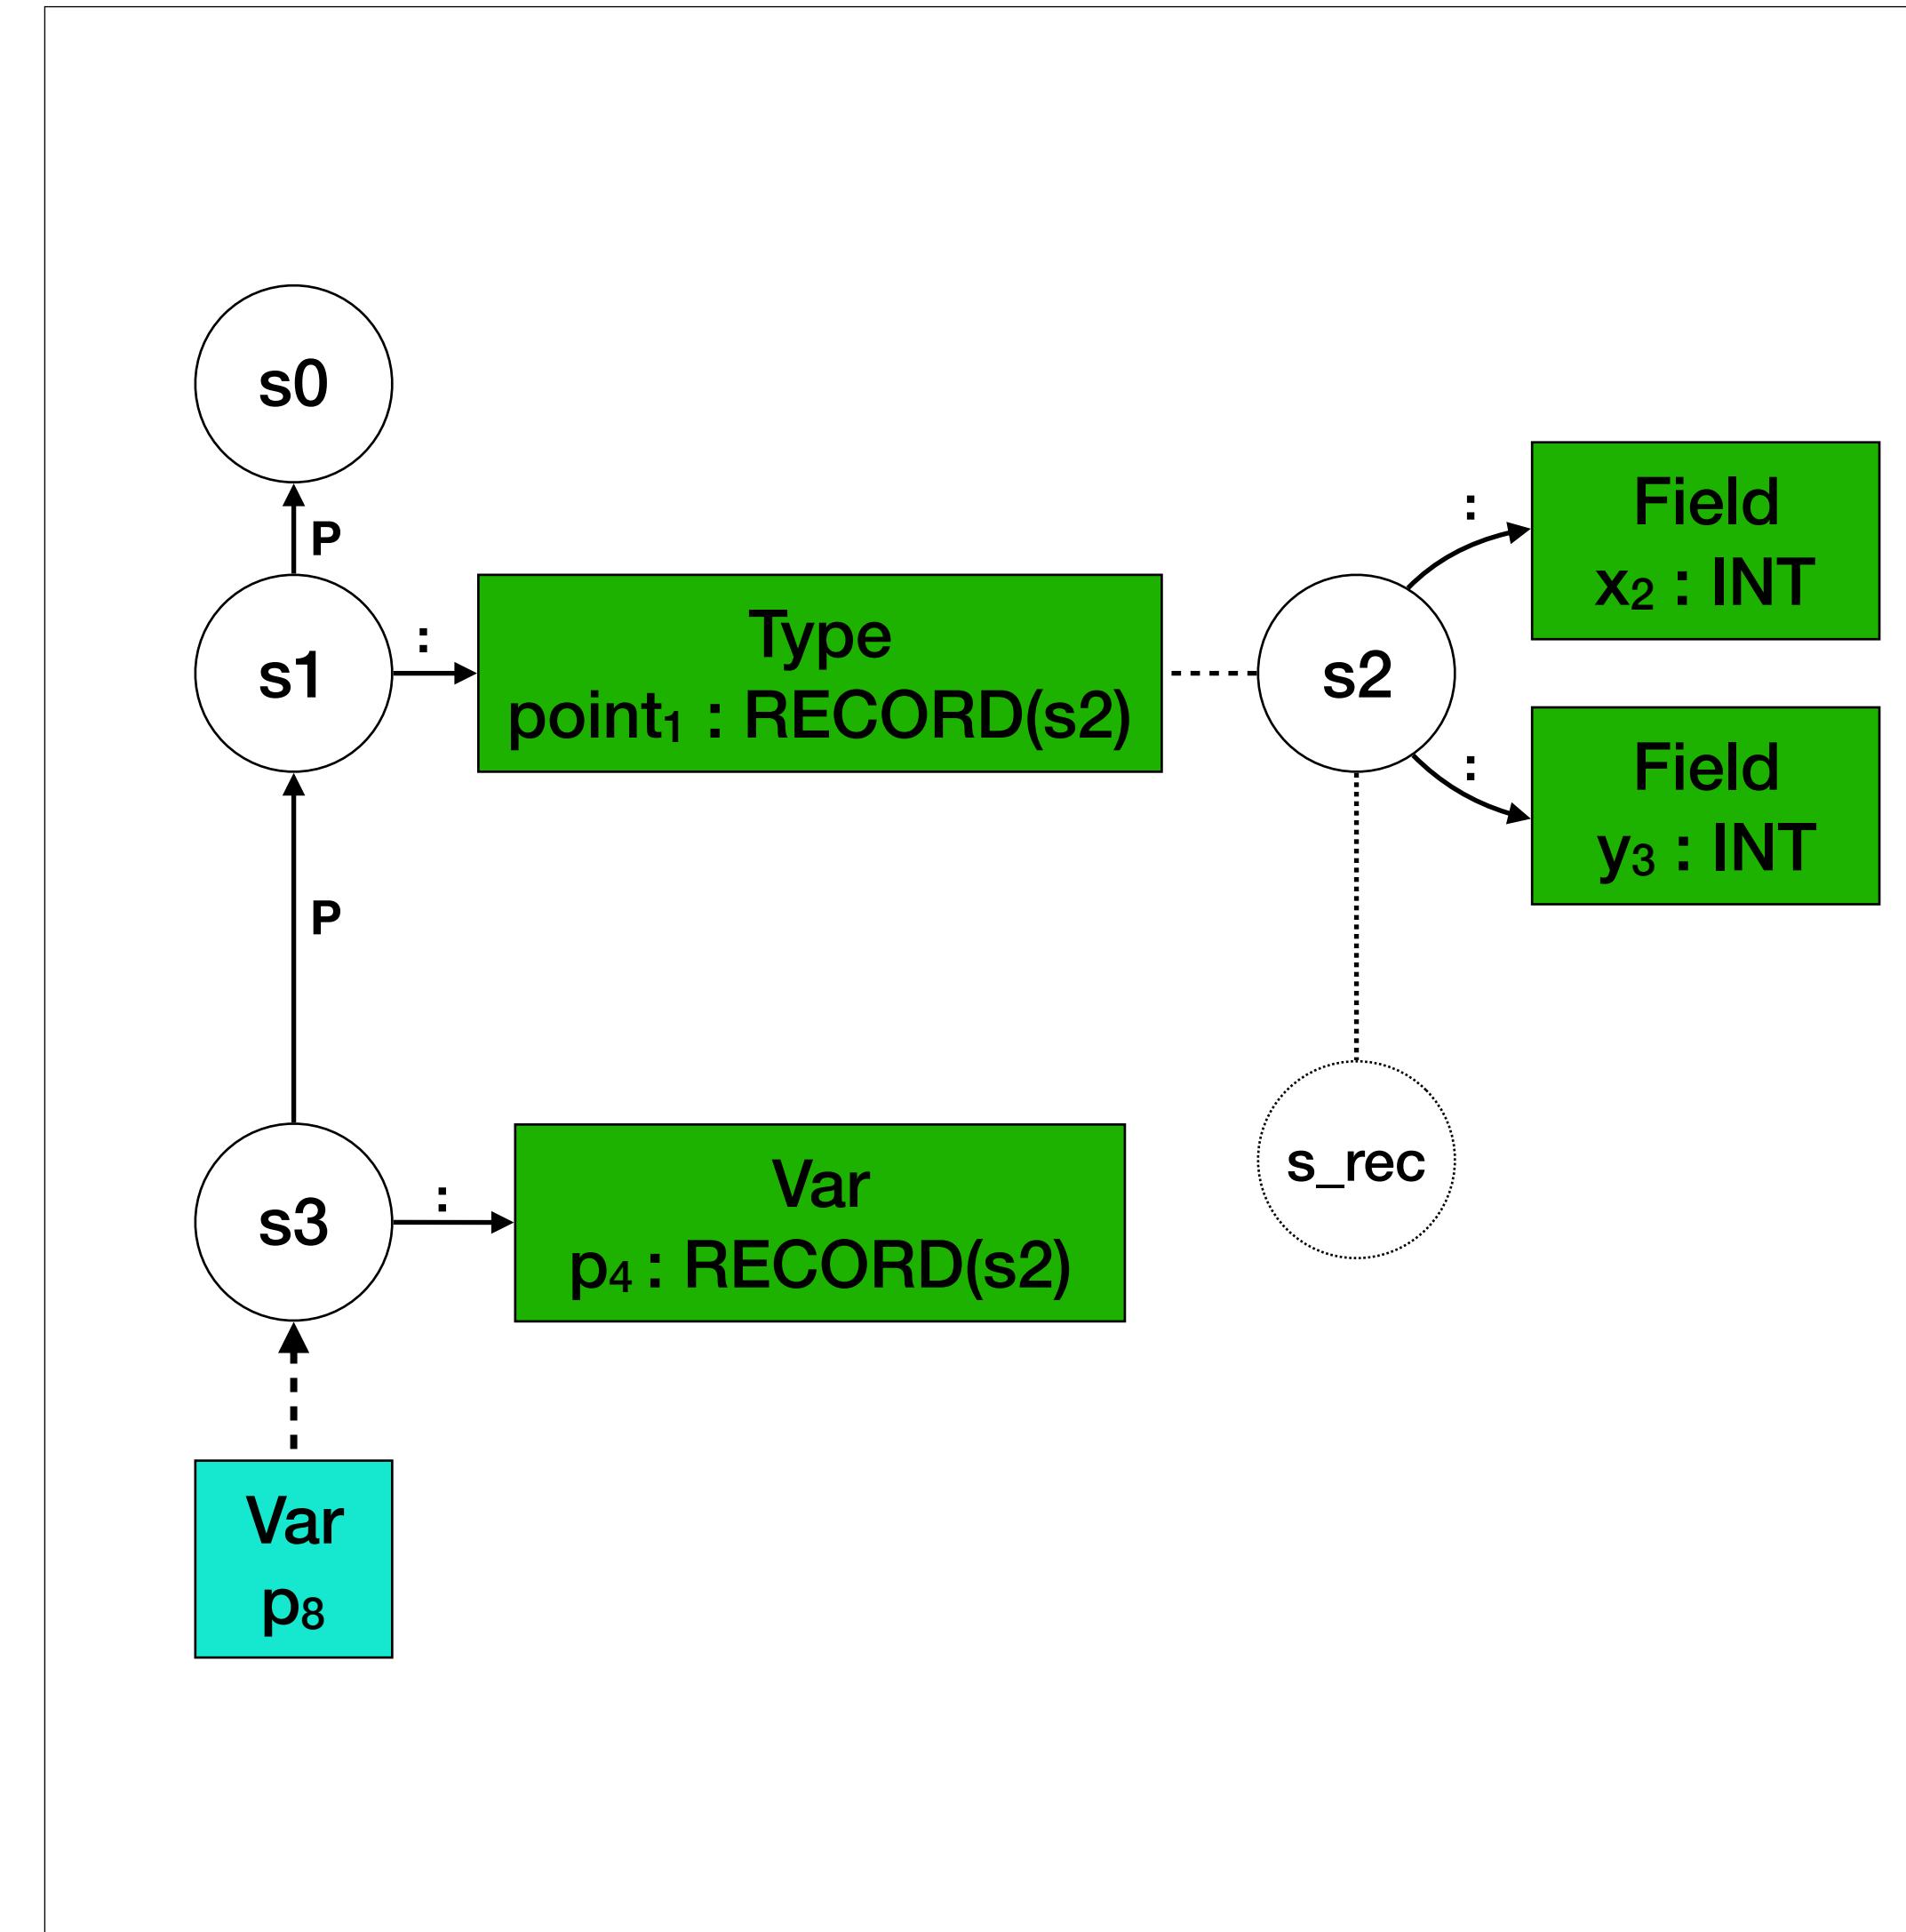

# Record Field Access

```

let
  type point1 = { x2 : int, y3 : int } s2
  var p4 := point5{ x6 = 4, y7 = 5 } s4 s1
in
  p8.x9
end


```

s0  
s1  
s3

```

typeOfLVal(s, FieldVar(lval, x)) = T :- {s_rec}
typeOfLVal(s, lval) == RECORD(s_rec),
lookupField(s_rec, x) == T.

```

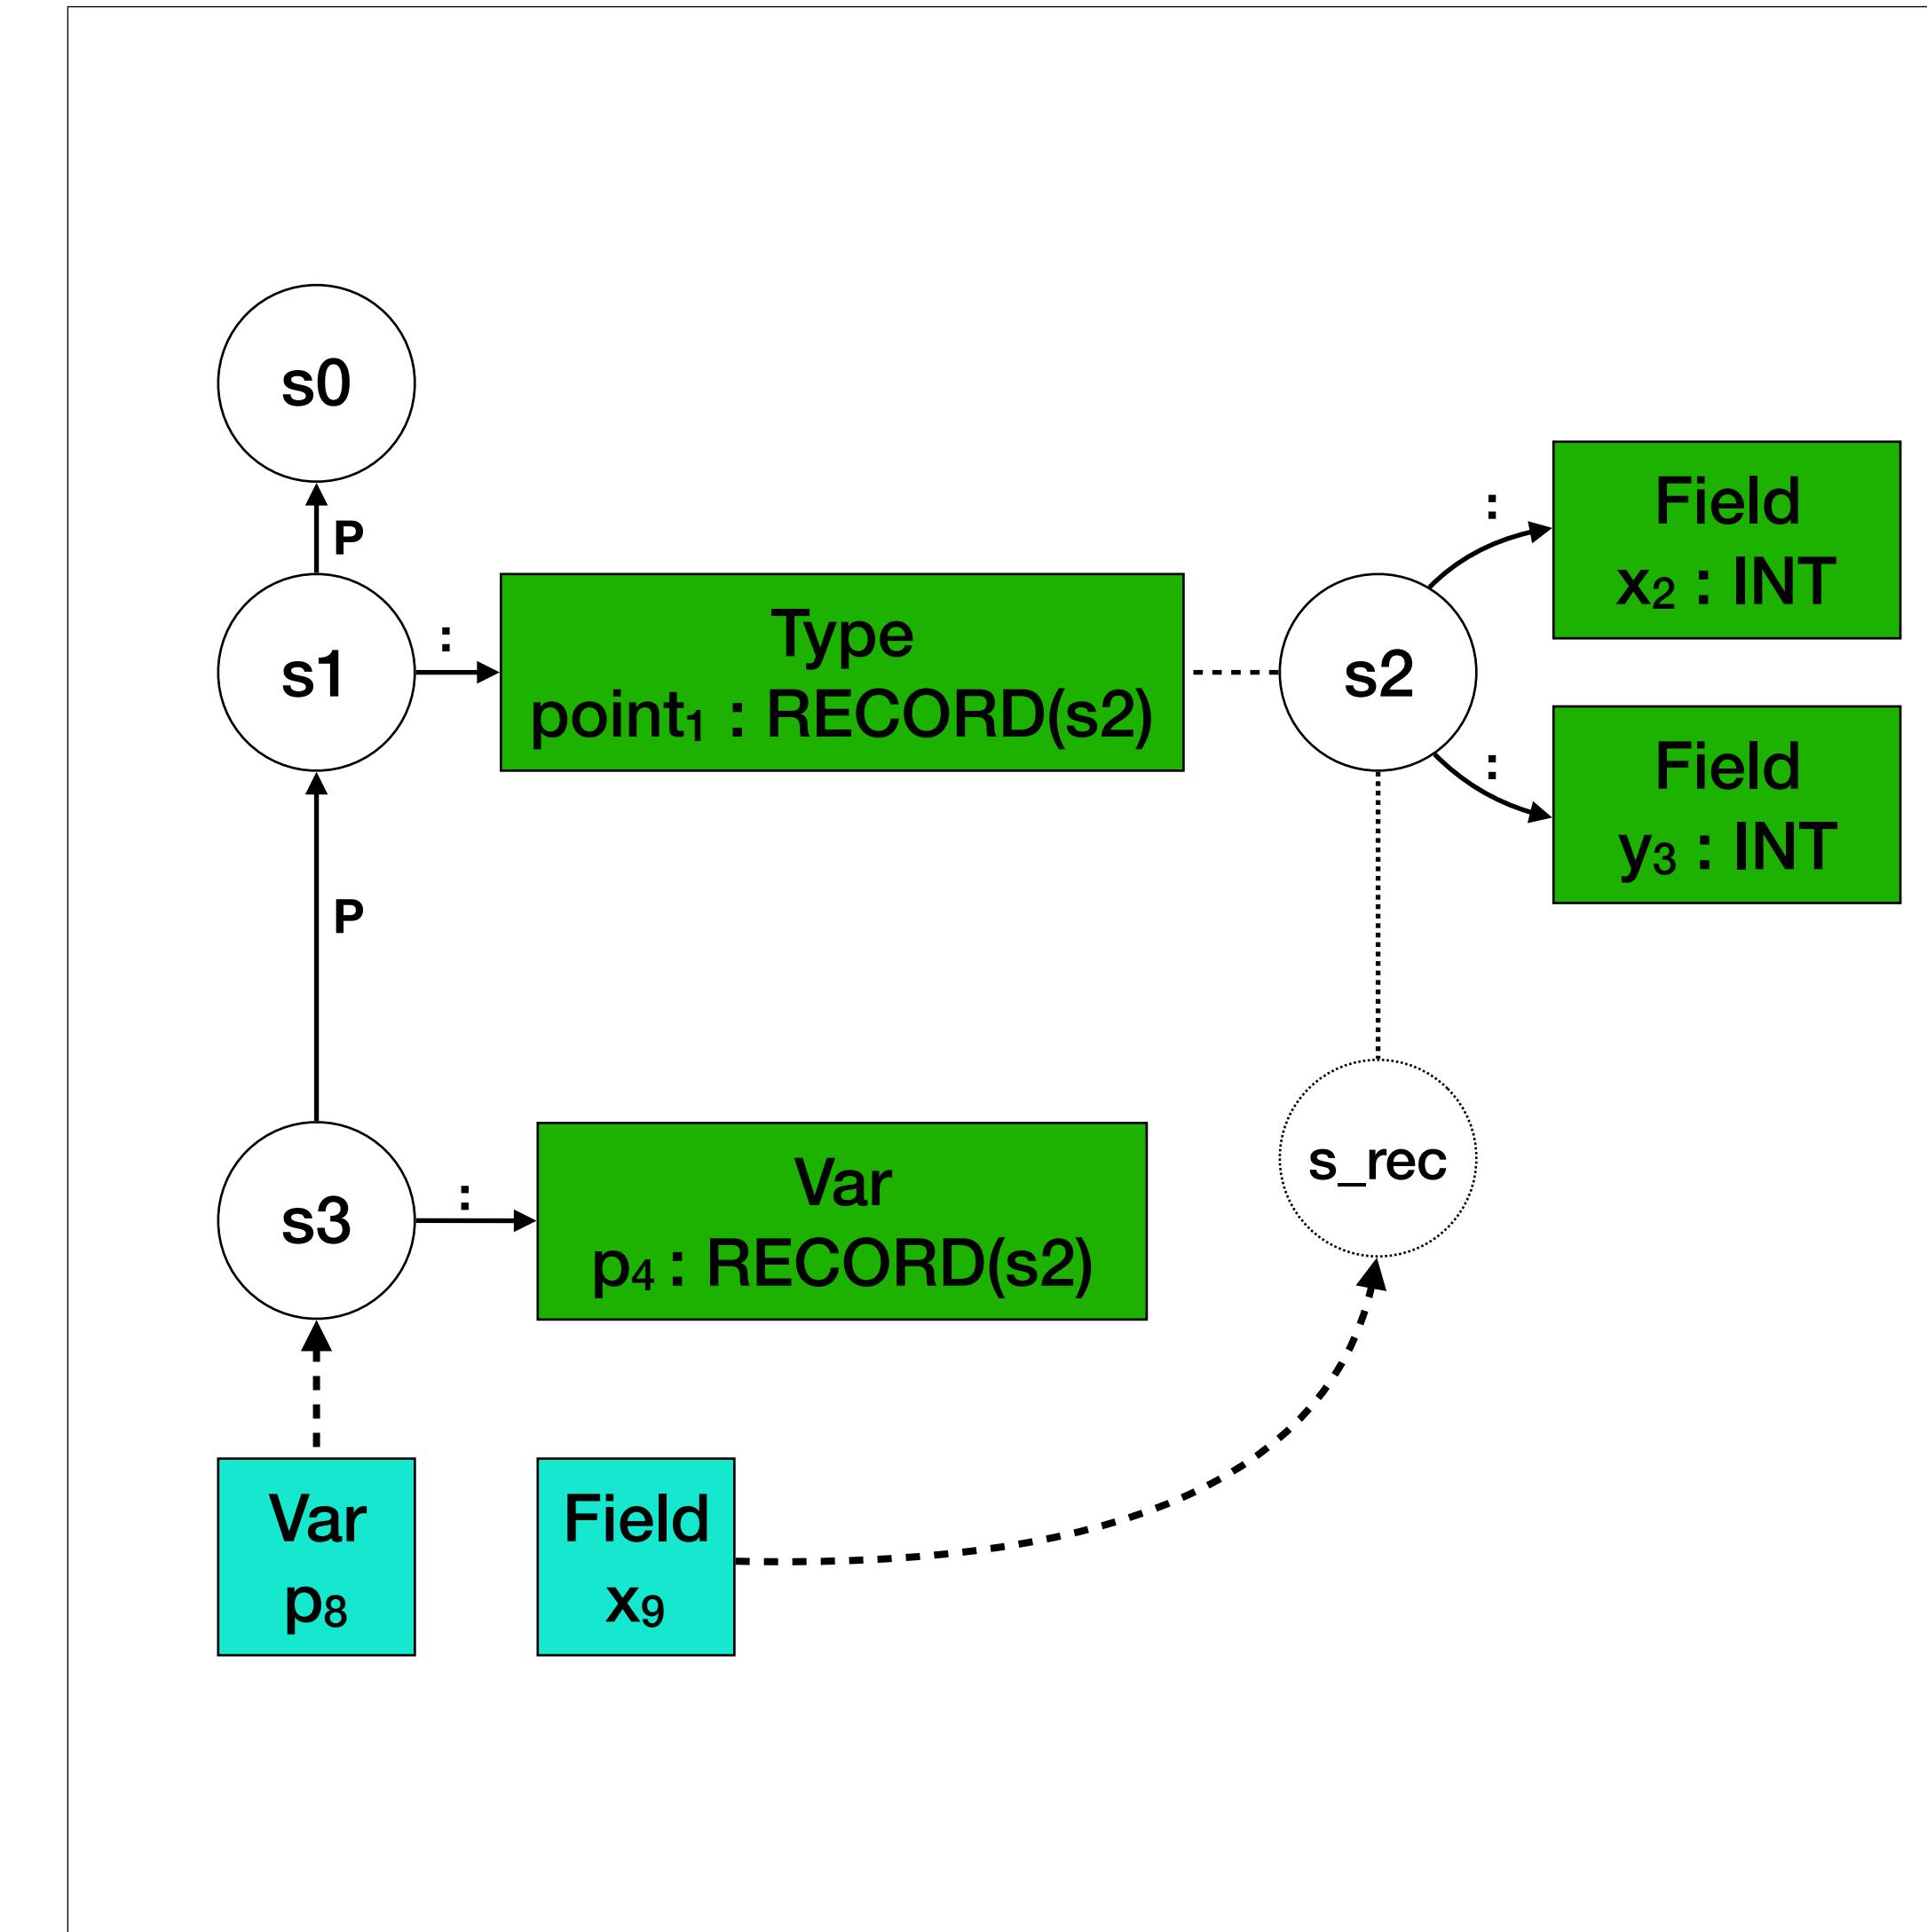

# Record Field Access

```

let
  type point1 = { x2 : int, y3 : int } s2
  var p4 := point5{ x6 = 4, y7 = 5 } s4
in
  p8.x9
end


```

s0  
s1  
s3

```

typeOfLVal(s, FieldVar(lval, x)) = T :- {s_rec}
typeOfLVal(s, lval) == RECORD(s_rec),
lookupField(s_rec, x) == T.

```

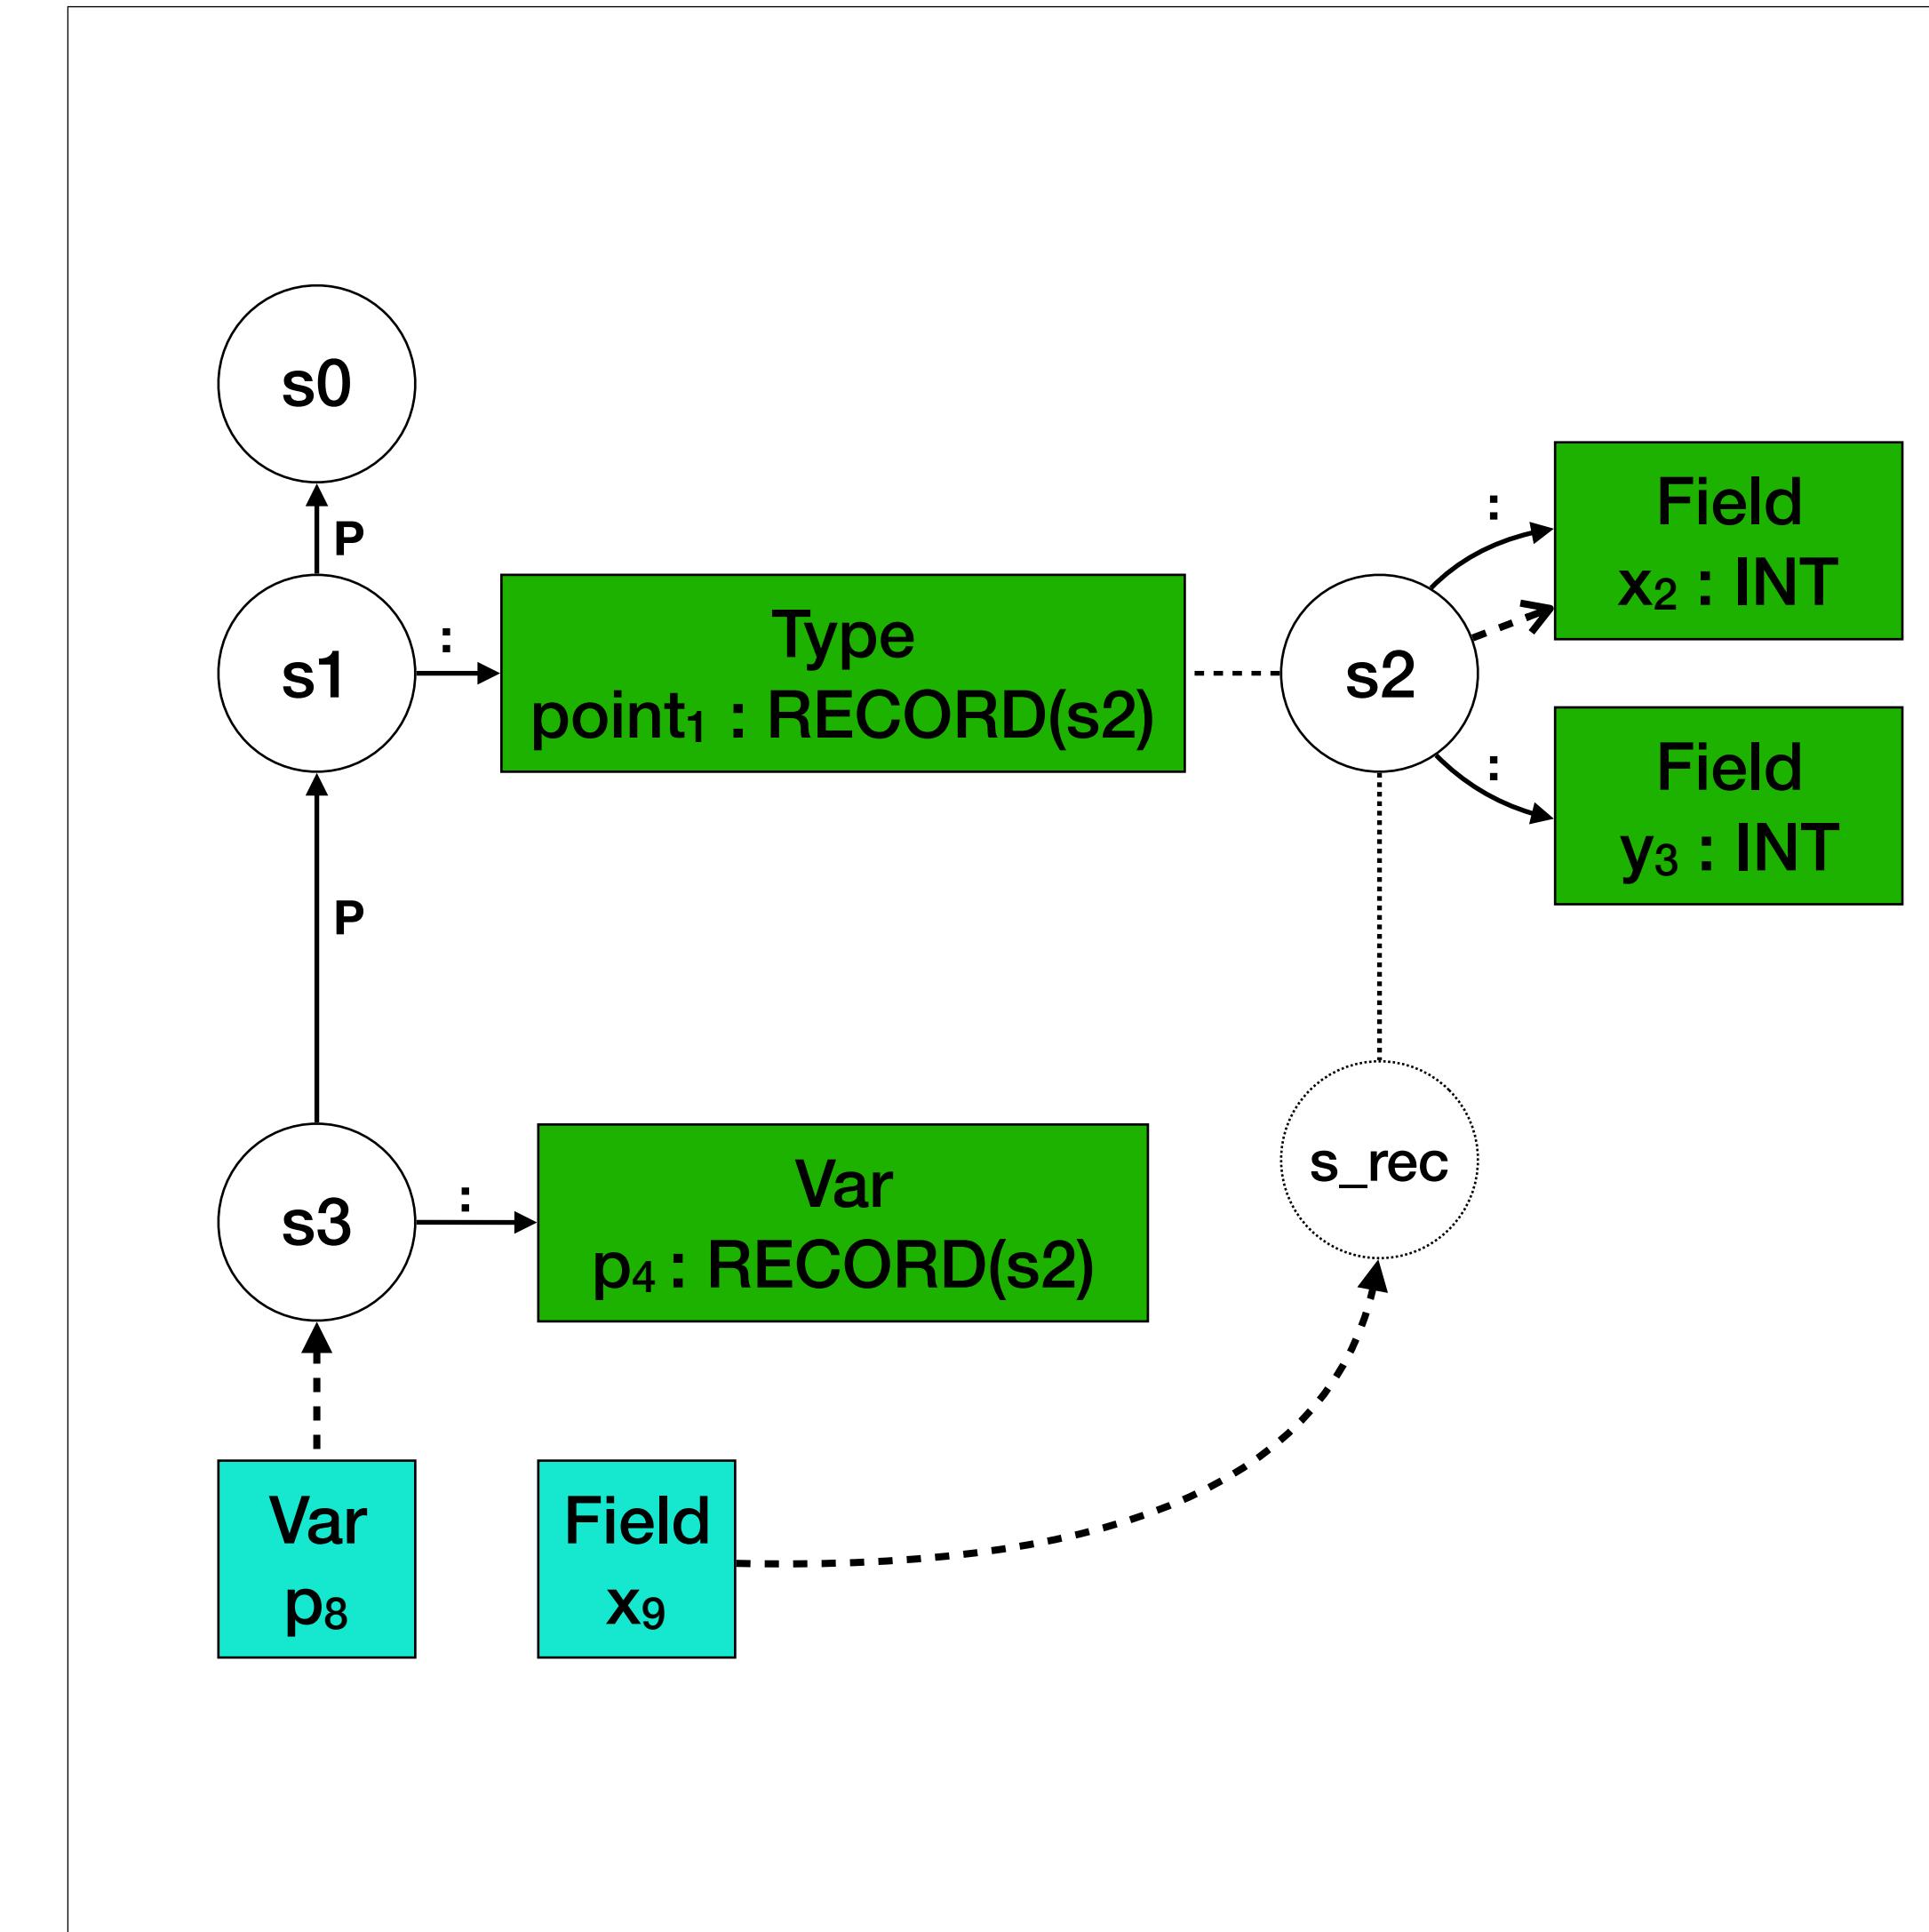

# Record Field Access


```

let
  type point1 = { x2 : int, y3 : int } s2
  var p4 := point5{ x6 = 4, y7 = 5 } s4 s1
in
  p8.x9
end

```

s<sub>0</sub>

typeOfLVal(s, FieldVar(lval, x)) = T :- {s\_rec}  
 typeOfLVal(s, lval) == RECORD(s\_rec),  
 lookupField(s\_rec, x) == T.

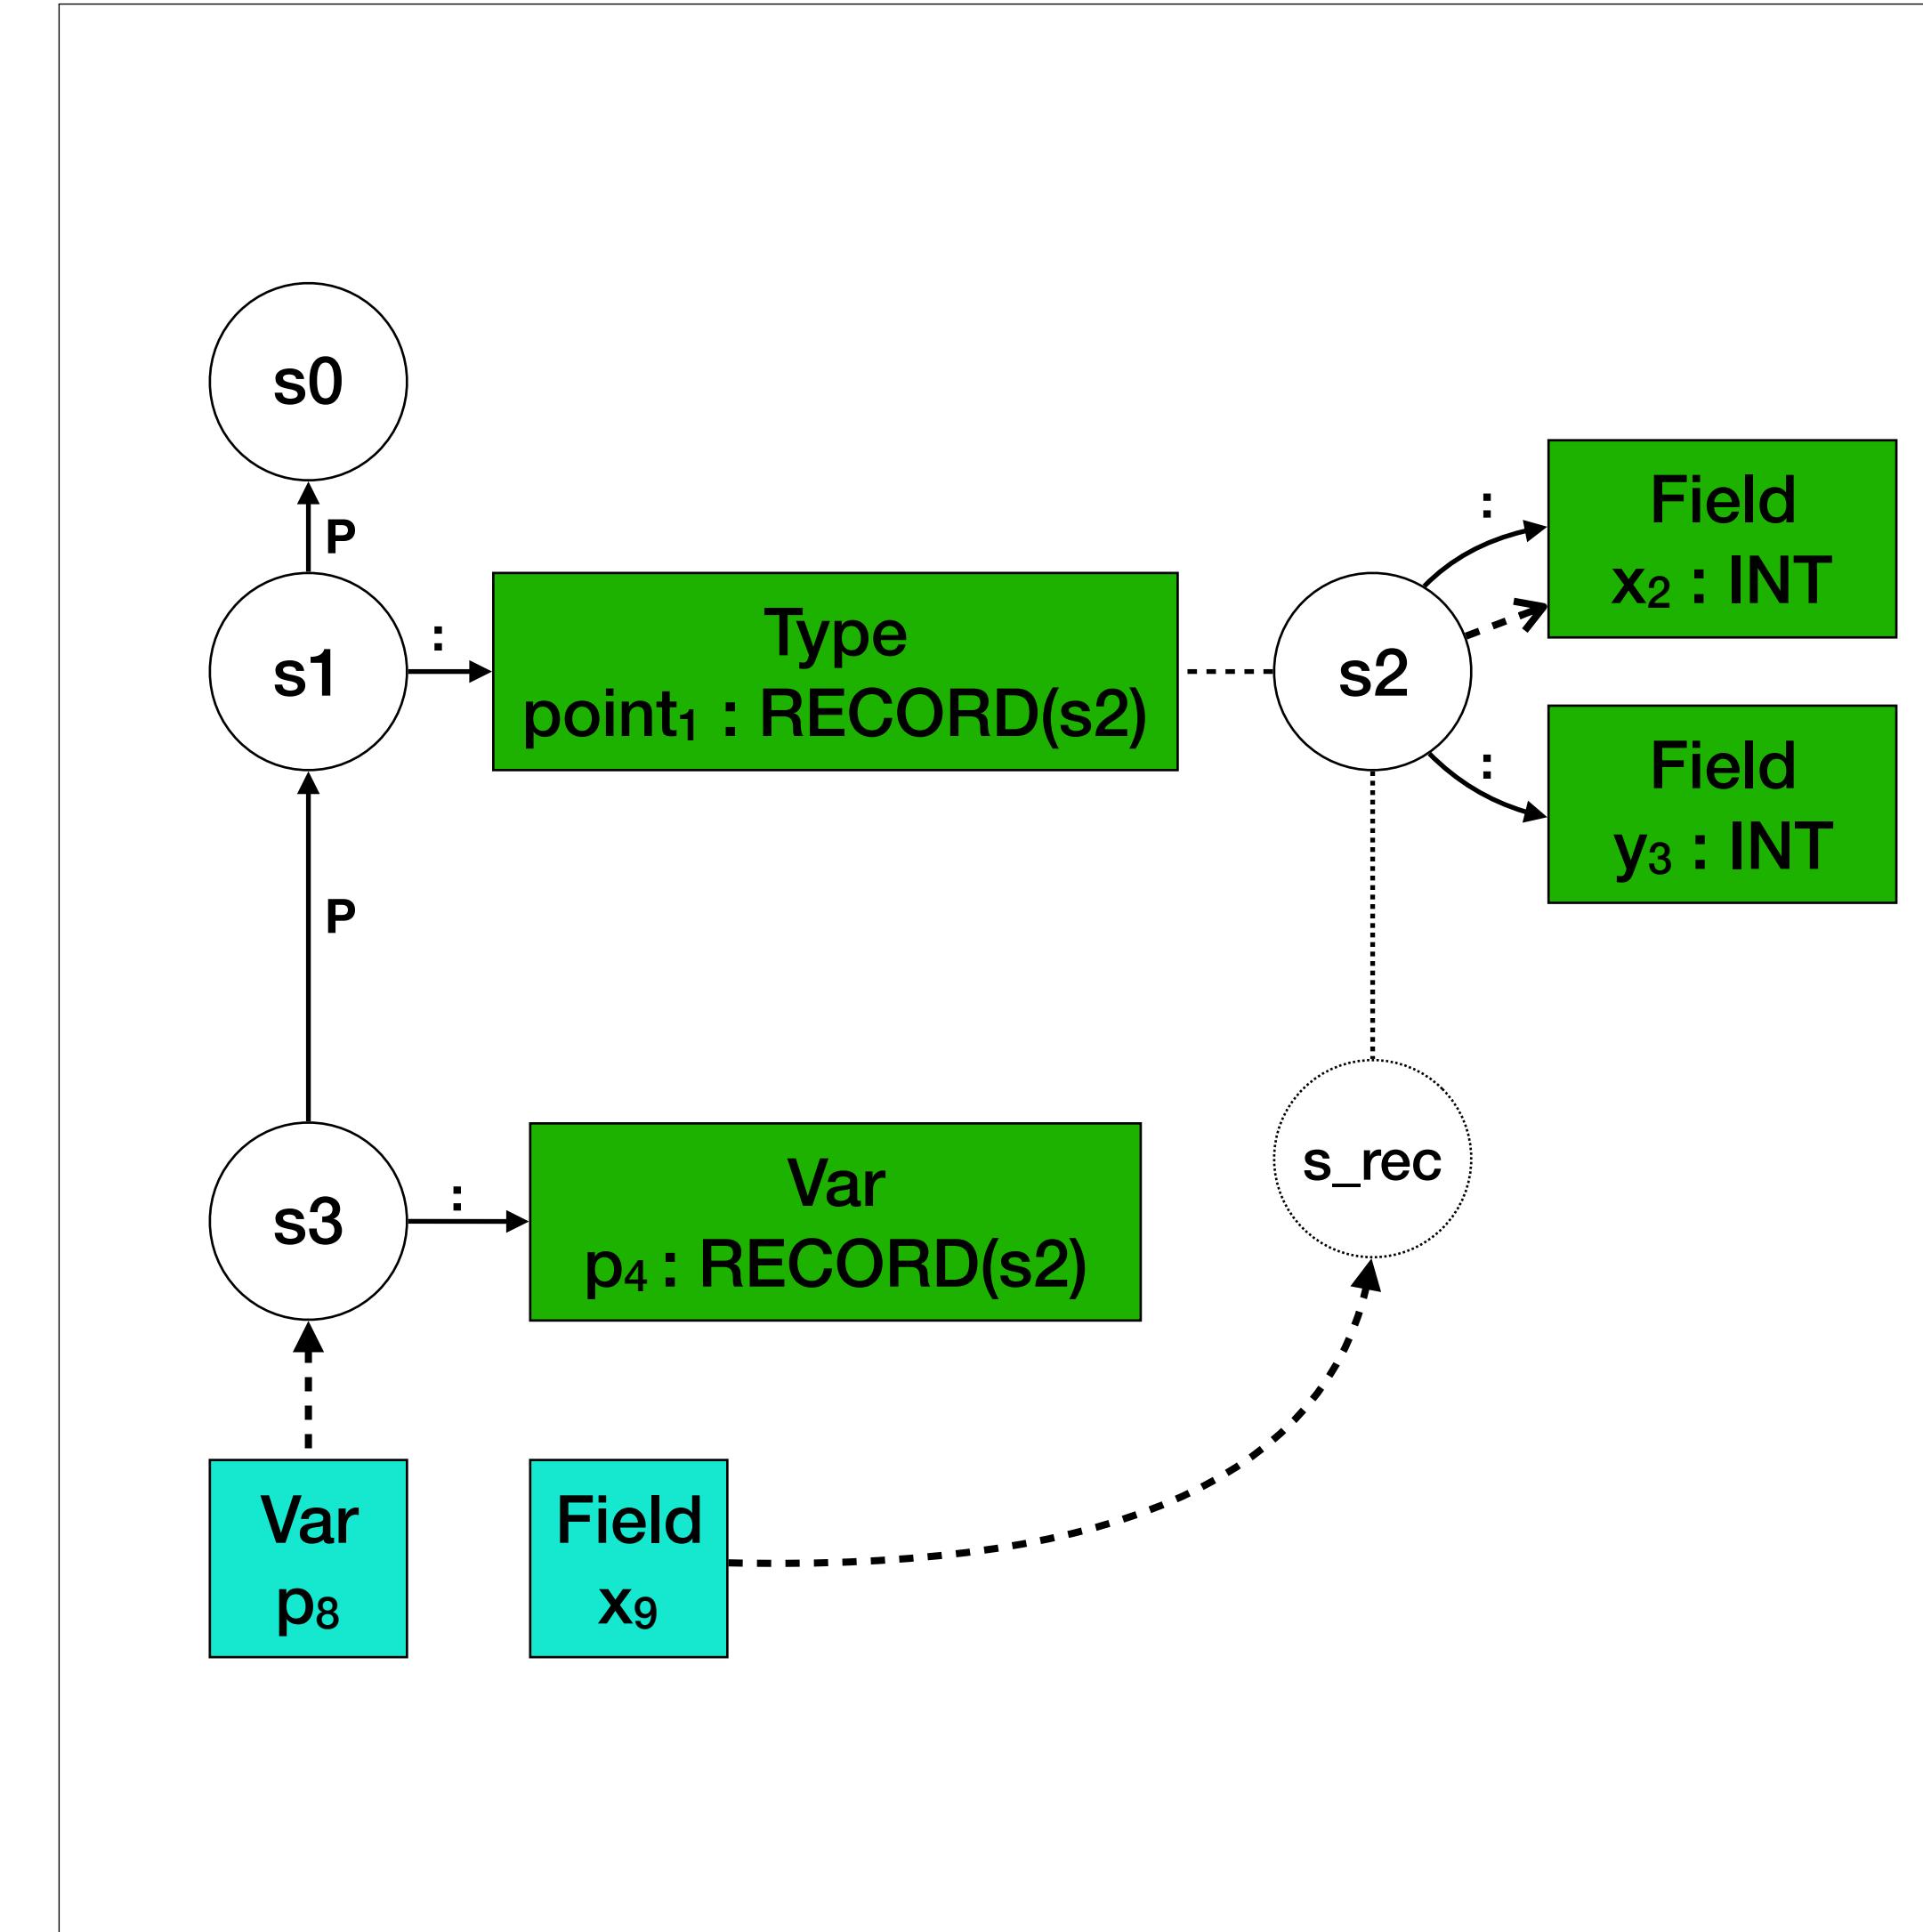

# Full Tiger Specification Online

<https://github.com/MetaBorgCube/metaborg-tiger>

<https://github.com/MetaBorgCube/metaborg-tiger/blob/master/org.metaborg.lang.tiger/trans/static-semantics/static-semantics.nabl2>

# Statix Overview

# Premises Seen So Far

```
true                                // always satisfied
false                               // never satisfied

t1 == t2                            // term equality
t1 != t2                            // term disequality

new s,
s -l-> s'                           // assert fresh scope
                                         // assert l-labeled edge between scopes

s -> Var{x}                         // assert declaration in scope s
s -> Var{x} with rel t              // assert declaration in s with
                                         // associated data t in relation r

Var{x} in s |-> [(_, Var{x'})]      // resolve reference in s
rel of Var{x} in s |-> [(_, (Var{x'}, t))] // resolve reference in s with
                                         // associated data t in relation r
```

# Scope Graph Queries

```
signature
  relations
    typeOfDecl : occurrence -> TYPE // :
  namespaces
    Var : string // Var{x}
  name-resolution
    labels P
    resolve Var filter P* min $ < P
```

```
Var{x} in s |-> [_, (Var{x'}, T)]
```

```
typeOfDecl of Var{x} in s |-> [_, (Var{x'}, T)]
```

# Scope Graph Queries

```
signature
relations
  typeOfDecl : occurrence -> TYPE // :
namespaces
  Var : string // Var{x}
name-resolution
  labels P
  resolve Var filter P* min $ < P
```

```
Var{x} in s |-> [(_, (Var{x'}, T))]
```

```
query decl
  filter P* and { Var{y} :- y == x }
  min $ < P and { _, _ :- true }
  in s |-> [(_, Var{x'})]
```

```
typeOfDecl of Var{x} in s |-> [(_, (Var{x'}, T))]
```

# Scope Graph Queries

```
signature
relations
  typeOfDecl : occurrence -> TYPE // :
namespaces
  Var : string // Var{x}
name-resolution
  labels P
  resolve Var filter P* min $ < P
```

```
Var{x} in s |-> [(_, (Var{x'}, T))]
```

```
query decl
  filter P* and { Var{y} :- y == x }
  min $ < P and { _, _ :- true }
  in s |-> [(_, Var{x'})]
```

```
typeOfDecl of Var{x} in s |-> [(_, (Var{x'}, T))]
```

```
query typeOfDecl
  filter P* and { (Var{y}, U) :- y == x }
  min $ < P and { _, _ :- true }
  in s |-> [(_, (Var{x'}, T))]
```

# Scope Graph Queries

```
signature
relations
  typeOfDecl : occurrence -> TYPE // :
namespaces
  Var : string // Var{x}
name-resolution
  labels P
  resolve Var filter P* min $ < P
```

Query Parameters:

```
Var{x} in s |-> [(_, (Var{x'}, T))]
```

```
query decl
  filter P* and { Var{y} :- y == x }
  min $ < P and { _, _ :- true }
  in s |-> [(_, Var{x'})]
```

```
typeOfDecl of Var{x} in s |-> [(_, (Var{x'}, T))]
```

```
query typeOfDecl
  filter P* and { (Var{y}, U) :- y == x }
  min $ < P and { _, _ :- true }
  in s |-> [(_, (Var{x'}, T))]
```

# Scope Graph Queries

```
signature
relations
  typeOfDecl : occurrence -> TYPE // :
namespaces
  Var : string // Var{x}
name-resolution
  labels P
  resolve Var filter P* min $ < P
```

Query Parameters:  
- Relation

```
Var{x} in s |-> [_, (Var{x'}, T)]
```

```
query decl
  filter P* and { Var{y} :- y == x }
  min $ < P and { _, _ :- true }
  in s |-> [_, Var{x'}]
```

```
typeOfDecl of Var{x} in s |-> [_, (Var{x'}, T)]
```

```
query typeOfDecl
  filter P* and { (Var{y}, U) :- y == x }
  min $ < P and { _, _ :- true }
  in s |-> [_, (Var{x'}, T)]
```

# Scope Graph Queries

```
signature
relations
  typeOfDecl : occurrence -> TYPE // :
namespaces
  Var : string // Var{x}
name-resolution
  labels P
  resolve Var filter P* min $ < P
```

## Query Parameters:

- Relation
- Scope

```
Var{x} in s |-> [_, (Var{x'}, T)]
```



```
query decl
  filter P* and { Var{y} :- y == x }
  min $ < P and { _, _ :- true }
  in [s] |-> [_, Var{x'}]
```

```
typeOfDecl of Var{x} in s |-> [_, (Var{x'}, T)]
```



```
query typeOfDecl
  filter P* and { (Var{y}, U) :- y == x }
  min $ < P and { _, _ :- true }
  in [s] |-> [_, (Var{x'}, T)]
```

# Scope Graph Queries

```
signature
relations
  typeOfDecl : occurrence -> TYPE // :
namespaces
  Var : string // Var{x}
name-resolution
  labels P
  resolve Var filter P* min $ < P
```

## Query Parameters:

- Relation
- Scope
- Path well-formedness

```
Var{x} in s |-> [_, (Var{x'}, T)]
```



```
query decl
  filter P* and { Var{y} :- y == x }
  min $ < P and { _, _ :- true }
  in s |-> [_, Var{x'}]
```

```
typeOfDecl of Var{x} in s |-> [_, (Var{x'}, T)]
```



```
query typeOfDecl
  filter P* and { (Var{y}, U) :- y == x }
  min $ < P and { _, _ :- true }
  in s |-> [_, (Var{x'}, T)]
```

# Scope Graph Queries

```
signature
relations
  typeOfDecl : occurrence -> TYPE // :
namespaces
  Var : string // Var{x}
name-resolution
  labels P
  resolve Var filter P* min $ < P
```

## Query Parameters:

- Relation
- Scope
- Path well-formedness
- Data matching

```
Var{x} in s |-> [_, (Var{x'}, T)]
```



```
query decl
  filter P* and { Var{y} :- y == x }
  min $ < P and { _, _ :- true }
  in s |-> [_, Var{x'}]
```

```
typeOfDecl of Var{x} in s |-> [_, (Var{x'}, T)]
```



```
query typeOfDecl
  filter P* and { (Var{y}, U) :- y == x }
  min $ < P and { _, _ :- true }
  in s |-> [_, (Var{x'}, T)]
```

# Scope Graph Queries

```
signature
relations
  typeOfDecl : occurrence -> TYPE // :
namespaces
  Var : string // Var{x}
name-resolution
  labels P
  resolve Var filter P* min $ < P
```

## Query Parameters:

- Relation
- Scope
- Path well-formedness
- Data matching
- Edge label order

```
Var{x} in s |-> [_, (Var{x'}, T)]
```



```
query decl
  filter P* and { Var{y} :- y == x }
  min $ < P and { _, _ :- true }
  in s |-> [_, Var{x'}]
```

```
typeOfDecl of Var{x} in s |-> [_, (Var{x'}, T)]
```



```
query typeOfDecl
  filter P* and { (Var{y}, U) :- y == x }
  min $ < P and { _, _ :- true }
  in s |-> [_, (Var{x'}, T)]
```

# Scope Graph Queries

```
signature
relations
  typeOfDecl : occurrence -> TYPE // :
namespaces
  Var : string // Var{x}
name-resolution
  labels P
  resolve Var filter P* min $ < P
```

## Query Parameters:

- Relation
- Scope
- Path well-formedness
- Data matching
- Edge label order
- Data shadowing

```
Var{x} in s |-> [_, (Var{x'}, T)]
```

```
query decl
  filter P* and { Var{y} :- y == x }
  min $ < P and { _, _ :- true }
  in s |-> [_, Var{x'}]
```

```
typeOfDecl of Var{x} in s |-> [_, (Var{x'}, T)]
```

```
query typeOfDecl
  filter P* and { (Var{y}, U) :- y == x }
  min $ < P and { _, _ :- true }
  in s |-> [_, (Var{x'}, T)]
```

# Scope Graph Queries

```
signature
relations
  typeOfDecl : occurrence -> TYPE // :
namespaces
  Var : string // Var{x}
name-resolution
  labels P
  resolve Var filter P* min $ < P
```

## Query Parameters:

- Relation
- Scope
- Path well-formedness
- Data matching
- Edge label order
- Data shadowing
- Result term (does not influence the query!)

```
Var{x} in s |-> [_, (Var{x'}, T)]
```



```
query decl
  filter P* and { Var{y} :- y == x }
  min $ < P and { _, _ :- true }
  in s |-> [_, Var{x'}]
```

```
typeOfDecl of Var{x} in s |-> [_, (Var{x'}, T)]
```



```
query typeOfDecl
  filter P* and { (Var{y}, U) :- y == x }
  min $ < P and { _, _ :- true }
  in s |-> [_, (Var{x'}, T)]
```

# Scope Graph Queries

```
signature
relations
  typeOfDecl : occurrence -> TYPE // :
namespaces
  Var : string // Var{x}
name-resolution
  labels P
  resolve Var filter P* min $ < P
```

## Query Parameters:

- Relation
- Scope
- Path well-formedness
- Data matching
- Edge label order
- Data shadowing
- Result term (does not influence the query!)

```
Var{x} in s |-> [_, (Var{x'}, T)]
```



```
query decl
  filter P* and { Var{y} :- y == x }
  min $ < P and { _, _ :- true }
  in s |-> [_, Var{x'}]
```


```
typeOfDecl of Var{x} in s |-> [_, (Var{x'}, T)]
```



```
query typeOfDecl
  filter P* and { (Var{y}, U) :- y == x }
  min $ < P and { _, _ :- true }
  in s |-> [_, (Var{x'}, T)]
```


# Scope Graph Queries

```
signature
  relations
    typeOfDecl : occurrence -> TYPE // :
  namespaces
    Var : string // Var{x}
  name-resolution
    labels P
    resolve Var filter P* min $ < P
```

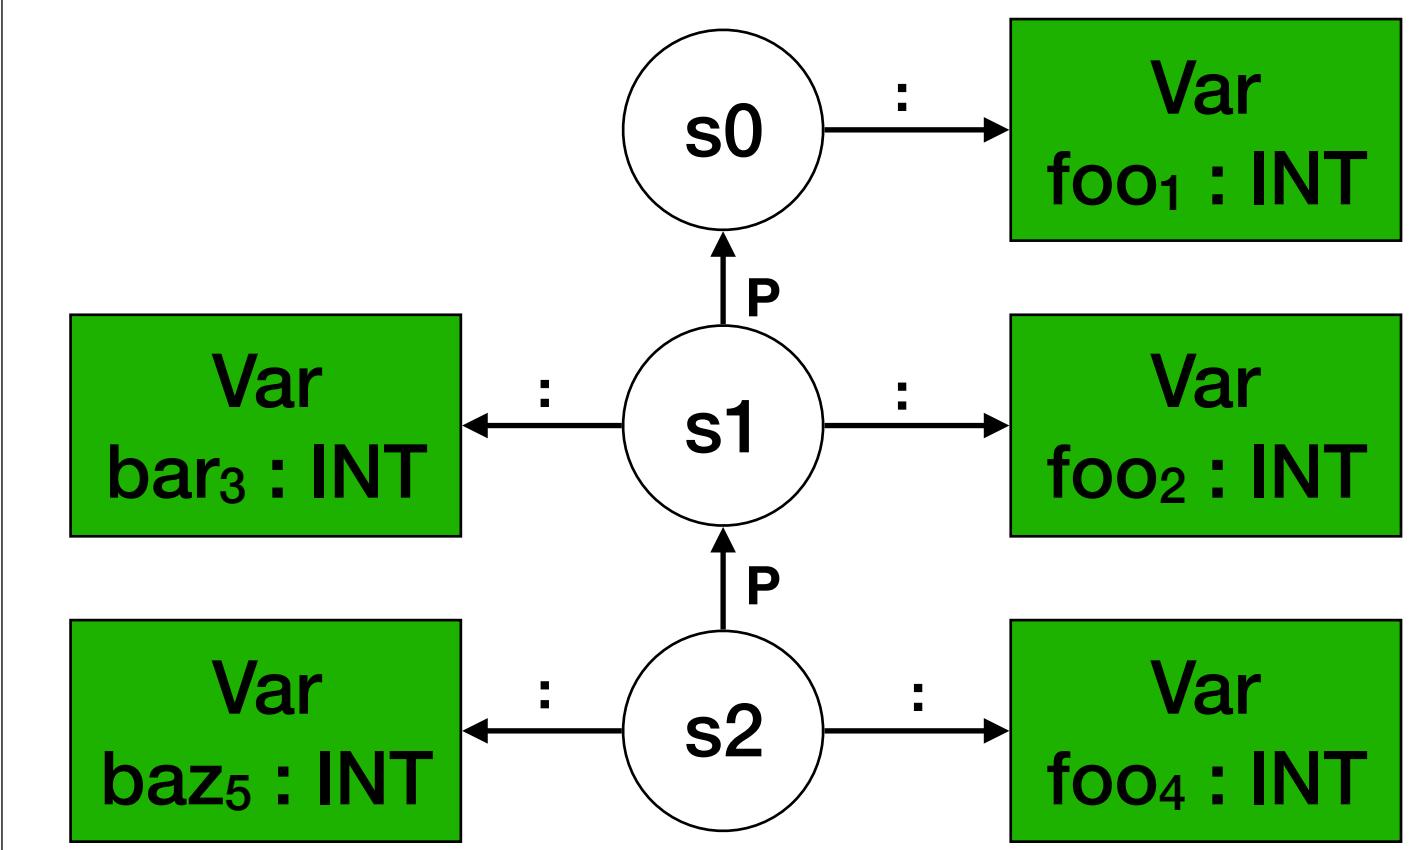

# Scope Graph Queries


```
signature
  relations
    typeOfDecl : occurrence -> TYPE // :
  namespaces
    Var : string // Var{x}
  name-resolution
    labels P
    resolve Var filter P* min $ < P
```

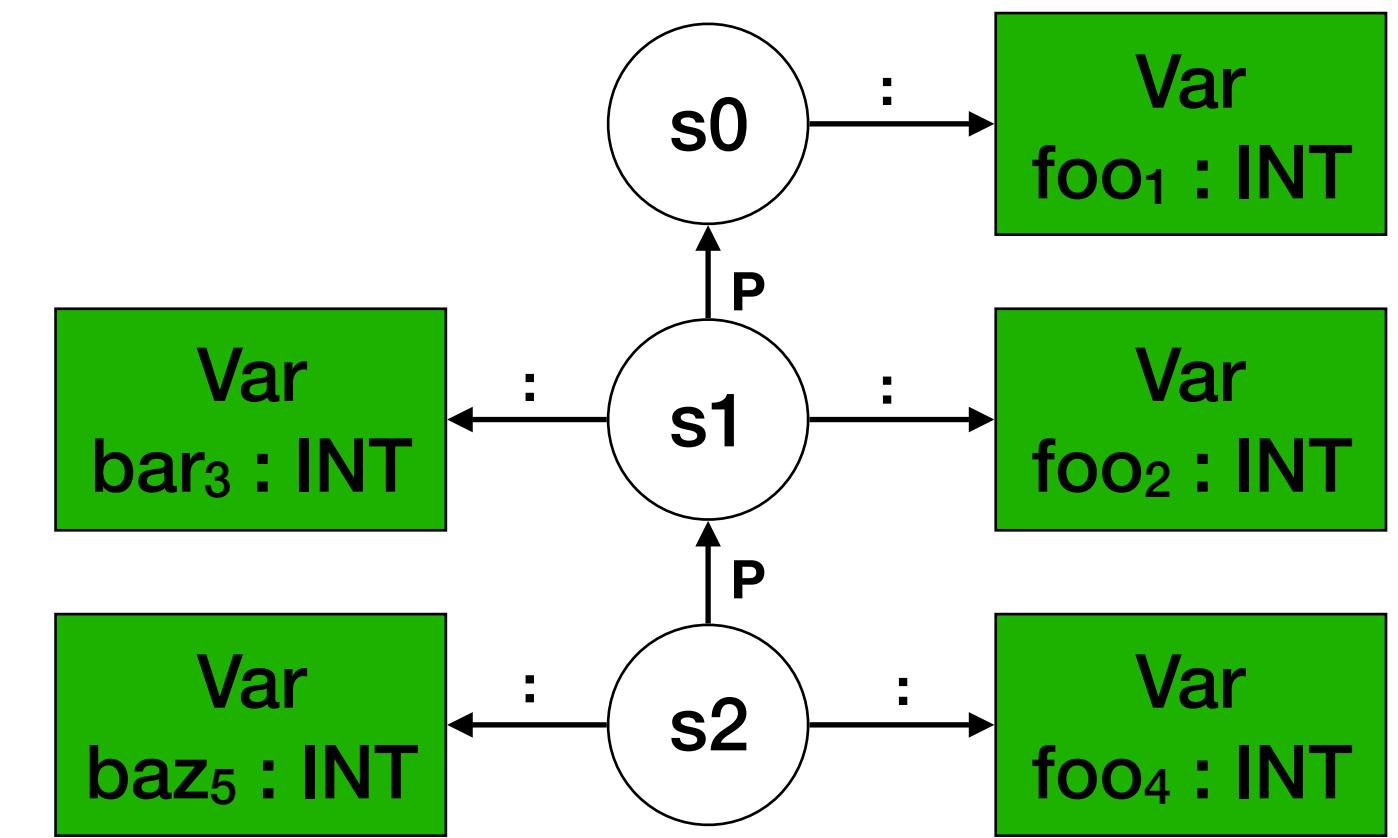

```
query typeOfDecl filter P* and { (Var{y}, U) :- y == "foo" } min $ < P and { _, _ :- true } in s2 |-> ps
```

# Scope Graph Queries

```
signature
  relations
    typeOfDecl : occurrence -> TYPE // :
  namespaces
    Var : string // Var{x}
  name-resolution
    labels P
    resolve Var filter P* min $ < P
```

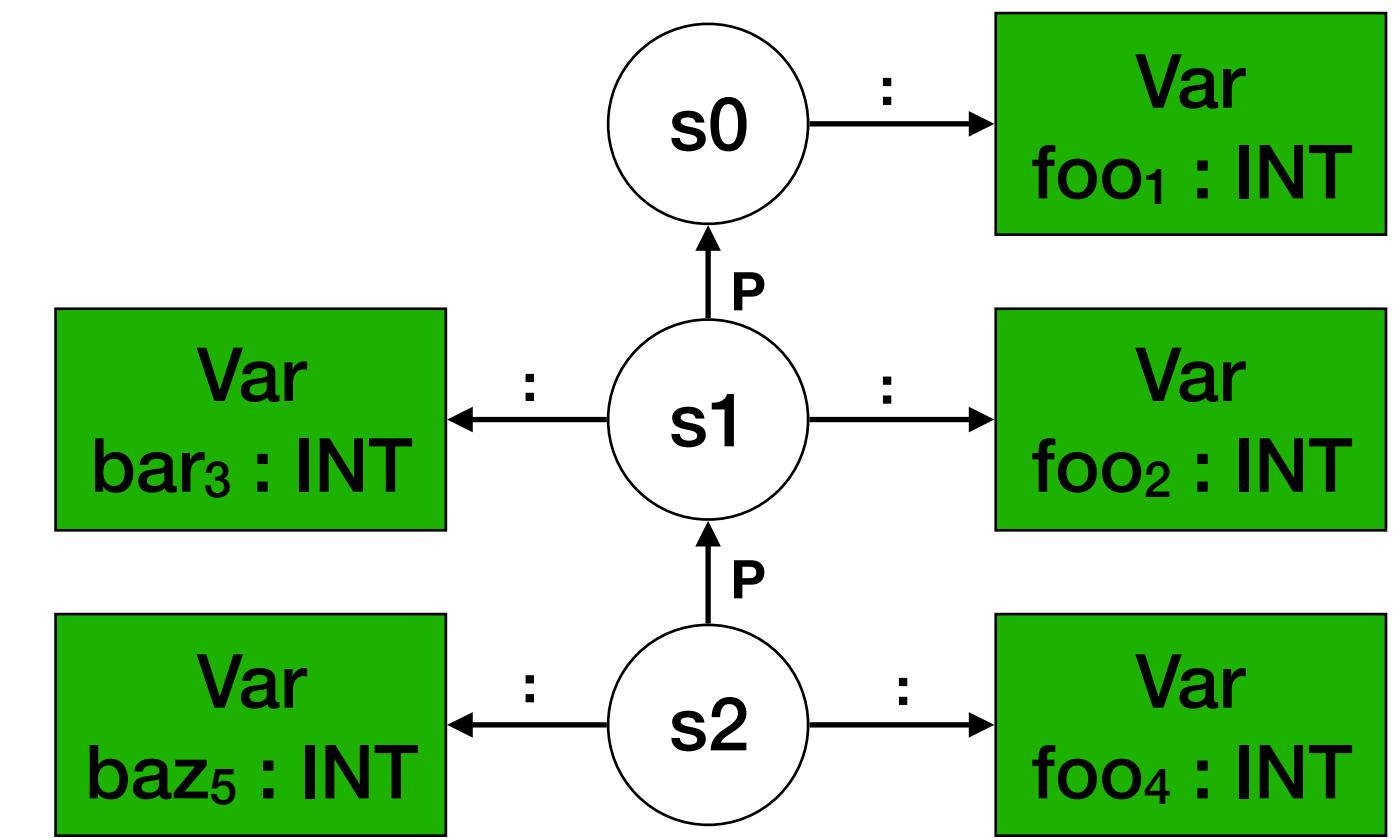


```
query typeOfDecl filter P* and { (Var{y}, U) :- y == "foo" } min $ < P and { _, _ :- true } in s2 l-> ps
```

```
query typeOfDecl filter P P* and { (Var{y}, U) :- y == "foo" } min $ < P and { _, _ :- true } in s2 l-> ps
```

# Scope Graph Queries

```
signature
  relations
    typeOfDecl : occurrence -> TYPE // :
  namespaces
    Var : string // Var{x}
  name-resolution
    labels P
    resolve Var filter P* min $ < P
```

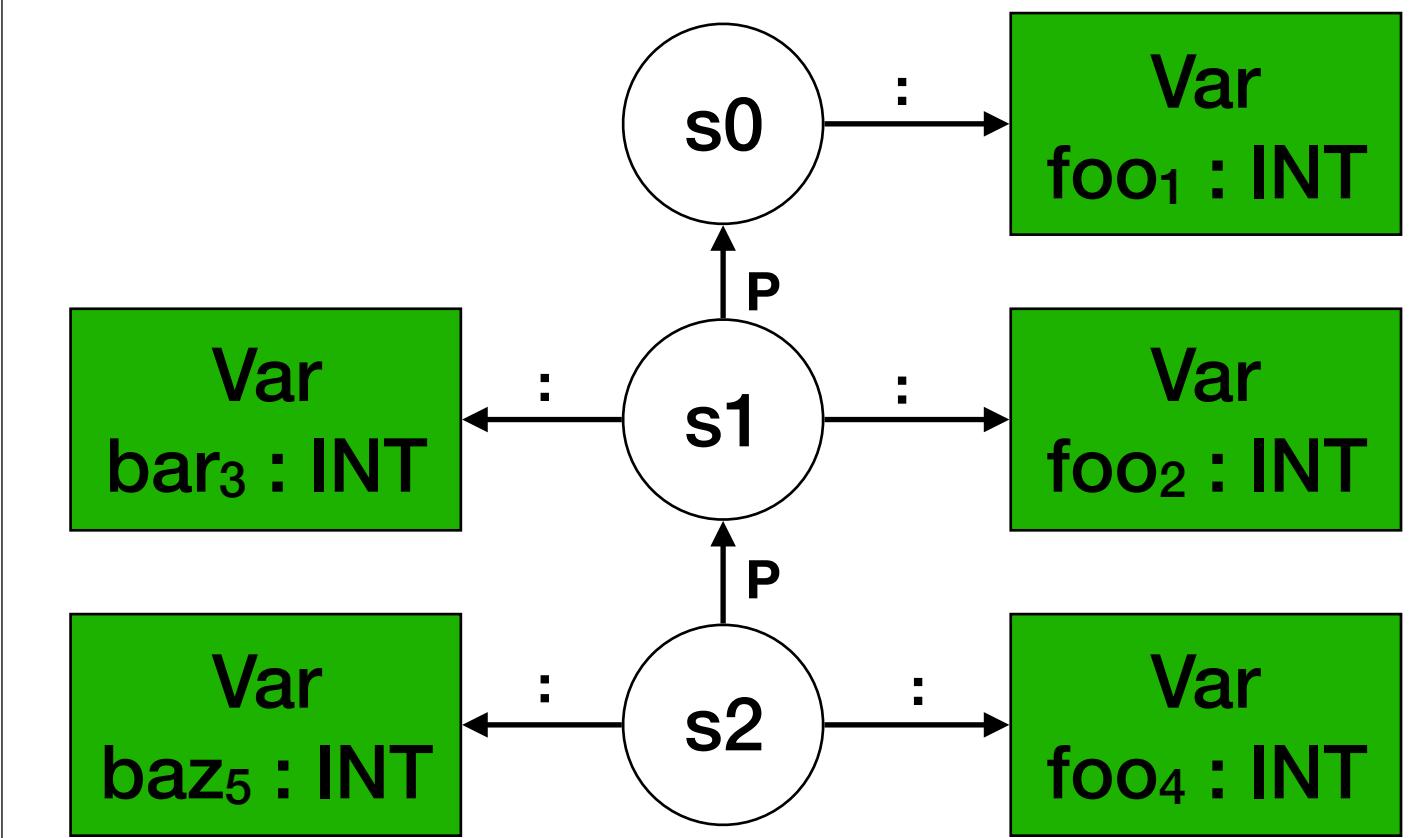


```
query typeOfDecl filter P* and { (Var{y}, U) :- y == "foo" } min $ < P and { _, _ :- true } in s2 |-> ps
```

```
query typeOfDecl filter P P* and { (Var{y}, U) :- y == "foo" } min $ < P and { _, _ :- true } in s2 |-> ps
```

```
query typeOfDecl filter P* and { (Var{y}, U) :- y == "foo" } min P < $ and { _, _ :- true } in s2 |-> ps
```

# Scope Graph Queries

```
signature
  relations
    typeOfDecl : occurrence -> TYPE // :
  namespaces
    Var : string // Var{x}
  name-resolution
    labels P
    resolve Var filter P* min $ < P
```

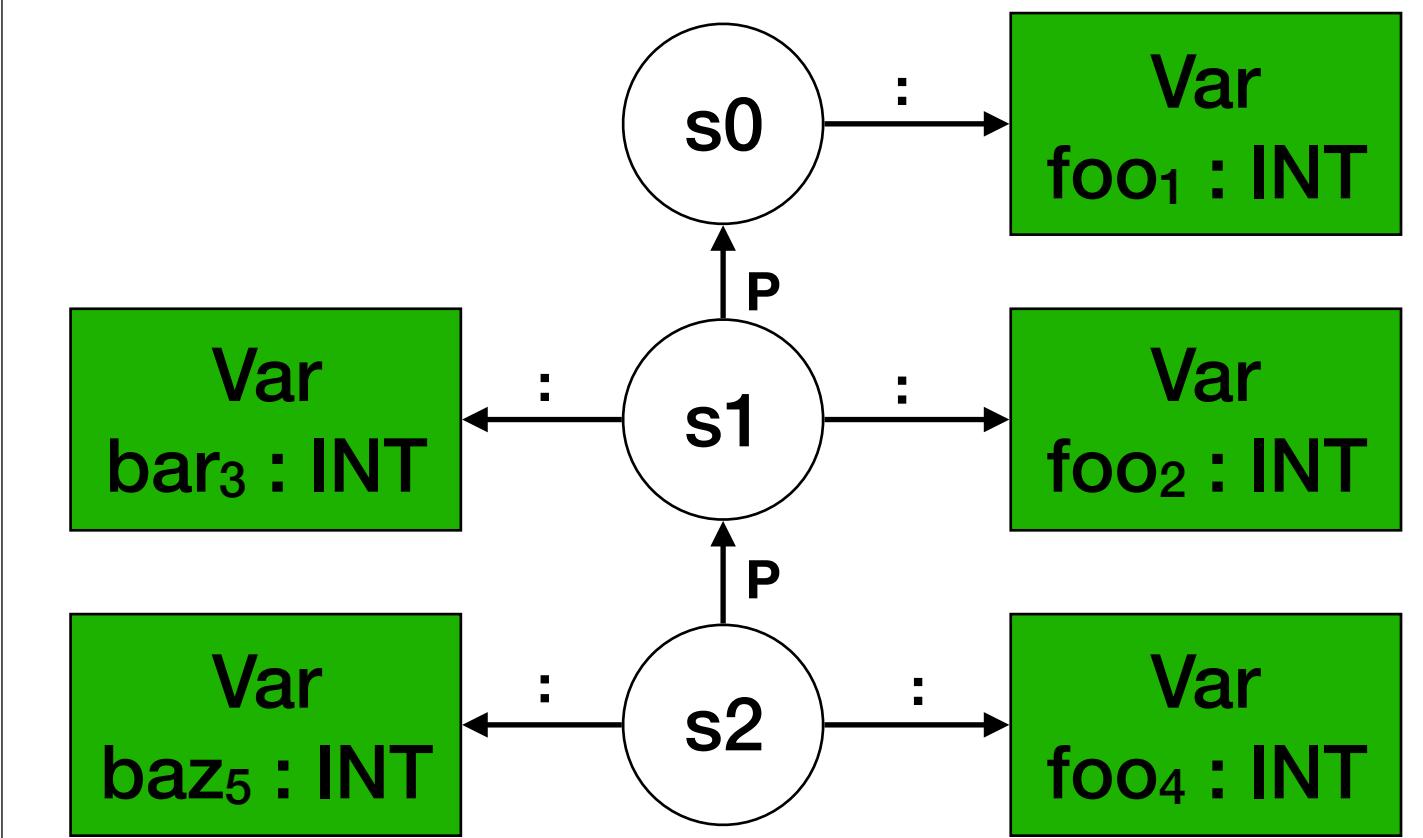

```
query typeOfDecl filter P* and { (Var{y}, U) :- y == "foo" } min $ < P and { _, _ :- true } in s2 |-> ps
```


```
query typeOfDecl filter P P* and { (Var{y}, U) :- y == "foo" } min $ < P and { _, _ :- true } in s2 |-> ps
```

```
query typeOfDecl filter P* and { (Var{y}, U) :- y == "foo" } min P < $ and { _, _ :- true } in s2 |-> ps
```

```
query typeOfDecl filter P* and { _ :- true } min $ < P and { Var{y}, Var{y} :- true } in s2 |-> ps
```

# Scope Graph Queries

```
signature
  relations
    typeOfDecl : occurrence -> TYPE // :
  namespaces
    Var : string // Var{x}
  name-resolution
    labels P
    resolve Var filter P* min $ < P
```

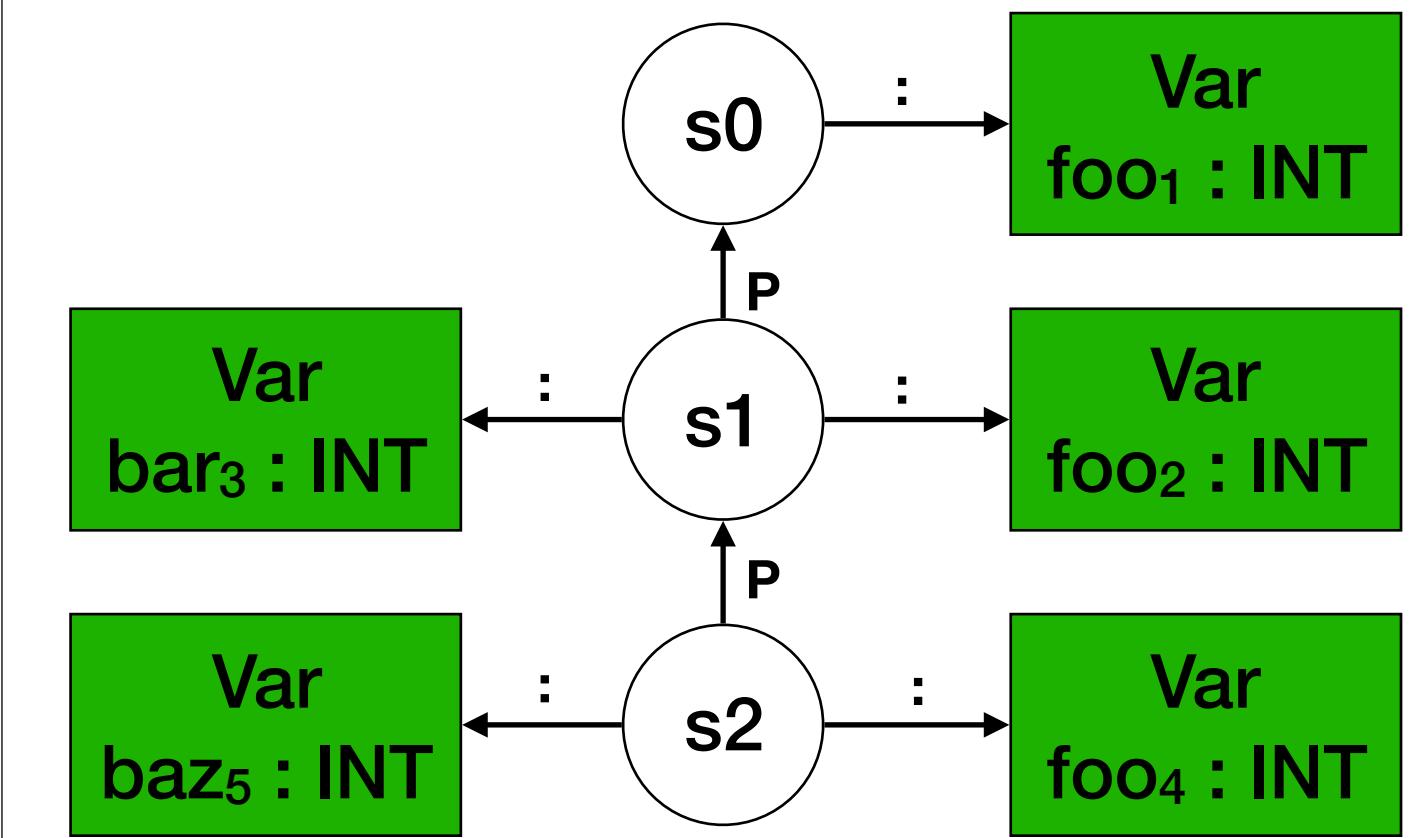

```
query typeOfDecl filter P* and { (Var{y}, U) :- y == "foo" } min $ < P and { _, _ :- true } in s2 |-> ps
```

```
query typeOfDecl filter P P* and { (Var{y}, U) :- y == "foo" } min $ < P and { _, _ :- true } in s2 |-> ps
```

```
query typeOfDecl filter P* and { (Var{y}, U) :- y == "foo" } min P < $ and { _, _ :- true } in s2 |-> ps
```

```
query typeOfDecl filter P* and { _ :- true } min $ < P and { Var{y}, Var{y} :- true } in s2 |-> ps
```

```
query typeOfDecl filter P* and { _ :- true } min $ < P and { _, _ :- false } in s2 |-> ps
```

# Conclusion

# Summary

## Typing and Name Binding Specifications

- Logical specification
- Separate and multiple interpretations

## Statix

- Meta-language for writing type specification
- Built-in support for scope graphs and resolution

## Tiger in Statix

- Several patterns for common language constructs

## Next Week

- Semantics of Statix
- Solver for Statix
- Unification

Except where otherwise noted, this work is licensed under

