

[Skip to Main Content](#)



Explore

• 4

- [thadiboyina v m kishore](#)

1. [Convolutional Neural Networks](#)
2. [Week 4](#)
3. Special Applications: Face Recognition & Neural Style Transfer

[Previous](#)[Next](#)

- **Face Recognition**
- **Neural Style Transfer**
- **Quiz**
 -

[Quiz: Special Applications: Face Recognition & Neural Style Transfer](#)

10 questions

- **Programming Assignments**
- **References & Acknowledgments**

QUIZ Quiz • 30 MIN 30 minutes

Special Applications: Face Recognition & Neural Style Transfer

Submit your assignment

DUE DATE Jun 14, 10:59 AM +04 Jun 14, 10:59 AM +04

ATTEMPTS 3 every 8 hours

[Resume](#)

[Receive grade](#)

TO PASS 80% or higher

Grade

Special Applications: Face Recognition & Neural Style Transfer

Graded Quiz • 30 min

Due Jun 14, 10:59 AM +04

Special Applications: Face Recognition & Neural Style Transfer

TOTAL POINTS 10

1.

Question 1

Face verification requires comparing a new picture against one person's face, whereas face recognition requires comparing a new picture against K person's faces.

1 point



True



False

2.

Question 2(Wrong)

Why do we learn a function $d(\text{img1}, \text{img2})$ for face verification? (Select all that apply.)

1 point



We need to solve a one-shot learning problem.



This allows us to learn to recognize a new person given just a single image of that person.



This allows us to learn to predict a person's identity using a softmax output unit, where the number of classes equals the number of persons in the database plus 1 (for the final "not in database" class).



Given how few images we have per person, we need to apply transfer learning.

3.

Question 3

In order to train the parameters of a face recognition system, it would be reasonable to use a training set comprising 100,000 pictures of 100,000 different persons.

1 point



True



False

4.

Question 4

Which of the following is a correct definition of the triplet loss? Consider that $\alpha > 0$. (We encourage you to figure out the answer from first principles, rather than just refer to the lecture.)

1 point



$$\max(\|f(A)-f(P)\|^2 - \|f(A)-f(N)\|^2 + \alpha, 0) \max(\|f(A)-f(P)\|_2 - \|f(A)-f(N)\|_2 + \alpha, 0)$$



$$\max(\|f(A)-f(N)\|^2 - \|f(A)-f(P)\|^2 + \alpha, 0) \max(\|f(A)-f(N)\|_2 - \|f(A)-f(P)\|_2 + \alpha, 0)$$



$$\max(\|f(A)-f(N)\|^2 - \|f(A)-f(P)\|^2 - \alpha, 0) \max(\|f(A)-f(N)\|_2 - \|f(A)-f(P)\|_2 - \alpha, 0)$$




$$\max(\|f(A)-f(P)\|^2 - \|f(A)-f(N)\|^2 - \alpha, 0) \max(\|f(A)-f(P)\|_2 - \|f(A)-f(N)\|_2 - \alpha, 0)$$

5.

Question 5(Wrong)

Consider the following Siamese network architecture:

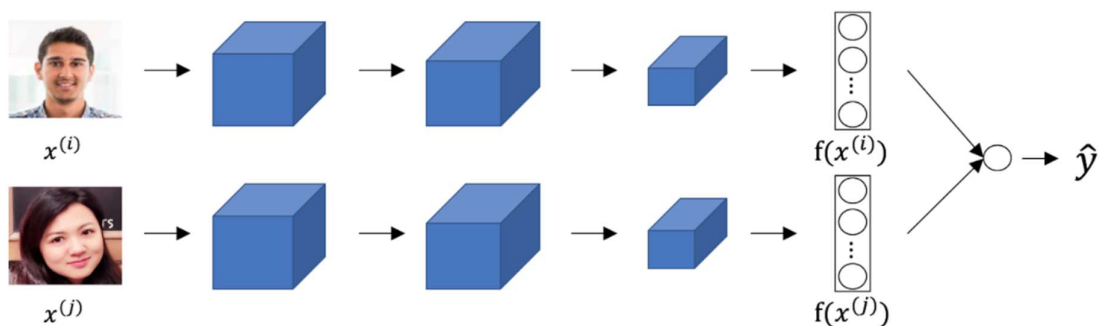

The upper and lower neural networks have different input images, but have exactly the same parameters.

1 point



True



False

6.

Question 6

You train a ConvNet on a dataset with 100 different classes. You wonder if you can find a hidden unit which responds strongly to pictures of cats. (I.e., a neuron so that, of all the input/training images that strongly activate that neuron, the majority are cat pictures.) You are more likely to find this unit in layer 4 of the network than in layer 1.

1 point



True



False

7.

Question 7

Neural style transfer is trained as a supervised learning task in which the goal is to input two images (x, x'), and train a network to output a new, synthesized image (y, y').

1 point



True



False

8.

Question 8

In the deeper layers of a ConvNet, each channel corresponds to a different feature detector. The style matrix $G^{[l]} G^{[l]}$ measures the degree to which the activations of different feature detectors in layer l vary (or correlate) together with each other.

1 point



False



True

9.

Question 9(Wrong Answer)

In neural style transfer, what is updated in each iteration of the optimization algorithm?

1 point



The pixel values of the generated image GG



The pixel values of the content image CC



The neural network parameters



The regularization parameters

10.

Question 10

You are working with 3D data. You are building a network layer whose input volume has size $32 \times 32 \times 32 \times 16$ (this volume has 16 channels), and applies convolutions with 32 filters of dimension $3 \times 3 \times 3$ (no padding, stride 1). What is the resulting output volume?

1 point



$30 \times 30 \times 30 \times 32$



$30 \times 30 \times 30 \times 16$



Undefined: This convolution step is impossible and cannot be performed because the dimensions specified don't match up.



I, **VENKAT MURALI KISHORE THADIBOYINA**, understand that submitting another's work as my own can result in zero credit for this assignment. Repeated violations of the Coursera Honor Code may result in removal from this course or deactivation of my Coursera account. Learn more about Coursera's Honor Code

SaveSubmit