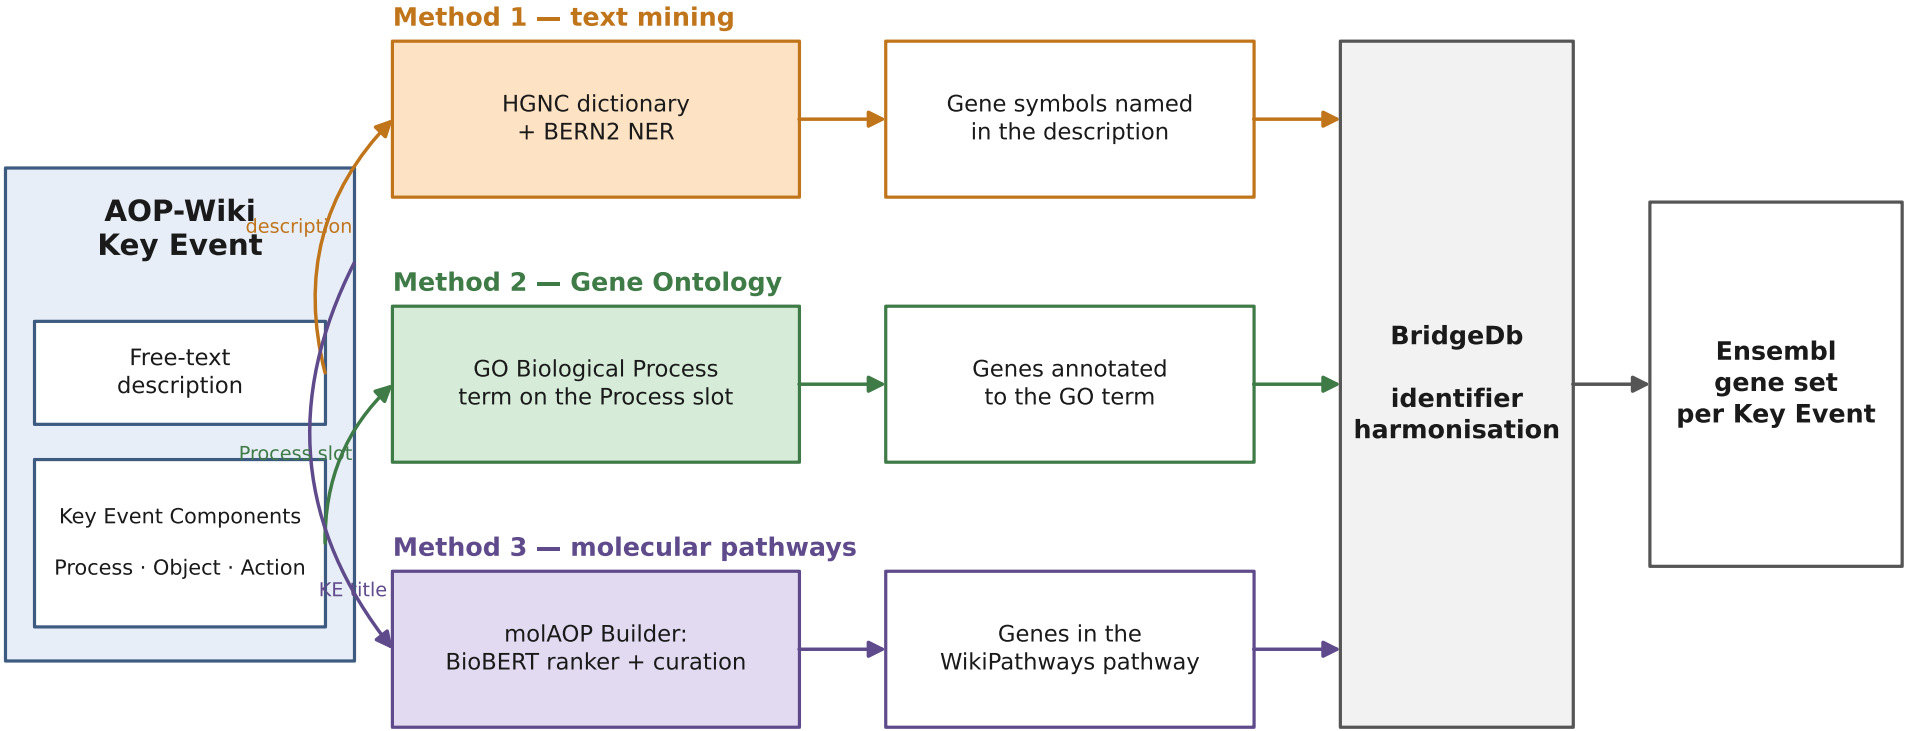

All three methods are run on the same four organ-specific AOP networks — brain, kidney, liver and lung — against the pinned AOP-Wiki RDF release, so any difference between them is a property of the method.