



## Browser - The TYPO3-Frontend Engine

Publish your data in list and single views! You don't need neither any own plugin nor any line PHP-Code. The Browser - the TYPO3-Frontend-Engine - provides an indexed browser (a-z), a record browser (page browser), a search form, filters, category menus and AJAX by default. Your data will be detected as objects, i.e. images will be wrapped automatically. SEO - Search Engine Optimization - is integrated.



Version: 3.7.0 - 2011-08-16

Extension Key: browser

Language: en

Keywords: forAdmins, forIntegrators, forDevelopers, forBeginners, forIntermediates, forAdvanced, browser, frontend-engine, frontend, engine, sql, relation building, seo, search engine optimization, index browser, a-z browser, alphabetical browser, alpha browser, page browser, sql browser, templating

Copyright 2008-2011, Dirk Wildt, Die Netzmacher, <<http://wildt.at.die-netzmacher.de>>

This document is published under the Open Content License  
available from <http://www.opencontent.org/opl.shtml>

The content of this document is related to TYPO3  
- a GNU/GPL CMS/Framework available from [www.typo3.org](http://www.typo3.org)



# Table of Contents

Browser - The TYPO3-Frontend Engine .....	1	What's new in Version 3.7? .....	48
Screenshots .....	4	Integration of jQuery UI (unofficial) .....	48
Key Image .....	4	Record Browser (single view) .....	48
Websites with the Browser .....	4	Replacement of empty markers is configurable .....	48
Backstage .....	5	What's new in Version 3.6? .....	49
Introduction .....	7	Additional parameters .....	49
What does it do? .....	7	Alternate Image .....	49
What do you need? .....	7	Area and interval: get parameters with date .....	49
Audience .....	7	Blank the manual sort field by TypoScript configuration .....	49
Obligatory Requirements .....	7	Category Menu .....	49
Non possible features .....	8	Configurable: Search respects Filters .....	50
Manual, Tutorials, Case Stories, Forum .....	9	Constant markers are COA able .....	50
Manual in PDF .....	9	Disable wrap in pi base class by the plugin .....	50
New Features and Bug Reports .....	9	Embedding jQuery code .....	50
Tutorials .....	9	Filters for areas .....	50
Case Stories .....	11	Filters for local table .....	50
Forum .....	11	Hide the update report for public visitors .....	51
Quick Installation .....	12	Hooks .....	51
Extension Manager .....	12	Images got full tt_content support .....	51
What do you need? .....	12	Name views in TypoScript .....	52
Add Page, Browser Plugin and Template .....	12	Ordering of children records .....	52
Configuring .....	13	Simulate a single record .....	52
Result in the Frontend .....	15	Sponsoring .....	52
Investigate the Browser Plugin/Flexform! .....	15	tx_browser_tca->static_country_zones .....	52
Browser Default Templates .....	15	UserFunc: numberFormat .....	53
Quick Start Tutorial .....	16	Wrap Images and Captions with the Image Number .....	53
The tt_news Sample .....	16	Road Map .....	54
Further Steps .....	17	Latest News on Forge .....	54
AJAX .....	17	Version 4.0: jQuery UI integration .....	54
Images .....	17	Version 4.3: Frontend Editing .....	54
Filtering .....	17	Functional Schematic .....	55
Labelling .....	17	Fast Way for Your Data to the TYPO3 Frontend .....	55
RSS/XML - RSS Feed .....	17	Smarty .....	56
SEO - Search Engine Optimisation .....	17	The Browser supersedes Smarty .....	56
Templating .....	17	The common Way - with Smarty .....	56
Check List .....	18	The better Way - with the Browser .....	56
DRS - Development Reporting System .....	19	Cost-Benefit Equation .....	57
Configuring devlog .....	19	Update .....	58
Options .....	19	From every version .....	58
Debugging SQL statements .....	20	From version < 3.5 .....	59
Debugging _LOCAL_LANG .....	21	From version < 3.0 .....	59
Reference .....	22	FAQ .....	62
General (global arrays) .....	22	Is there a Cache Management? .....	62
Local (every view) .....	23	May I use SimulateStaticDocuments and Real URL? .....	62
Advanced .....	29	May I share the Browser with TemplaVoila? .....	62
a-z_Browser .....	30	Web Accessibility Initiative (WAI) .....	62
autoconfig .....	31	Is it possible to search in fields, which aren't displayed? .....	62
AJAX .....	31	May I use the TYPO3 Indexed Search Machine? .....	62
Localization .....	32	Is the extension UTF-8 secure? .....	62
realUrl.linkToSingle .....	34	It seems that I have a problem with UTF-8 and Time Stamps ..	62
RSS/XML .....	34	It's possible, that devlog doesn't display all logs? .....	63
Templating .....	34	May I use the PHP Multi Byte Overload? .....	63
views.list .....	35	Credits .....	64
views.single .....	41	Sponsors .....	66
TT_CONTAINER .....	44	Thanks to ... ..	66
TTC_COA .....	45	Helpful suggestions .....	67
TTC_STDWRAP .....	45	Forum .....	67
_LOCAL_LANG .....	46	New Features and Bug Reports .....	67



To-Do List .....	68	About the Authors .....	70
Further Information .....	69	Change Log .....	71
About the plugin icon .....	69	Illustration Index .....	79
Other extensions published by Die Netzmacher .....	69		



# Screenshots

## Key Image

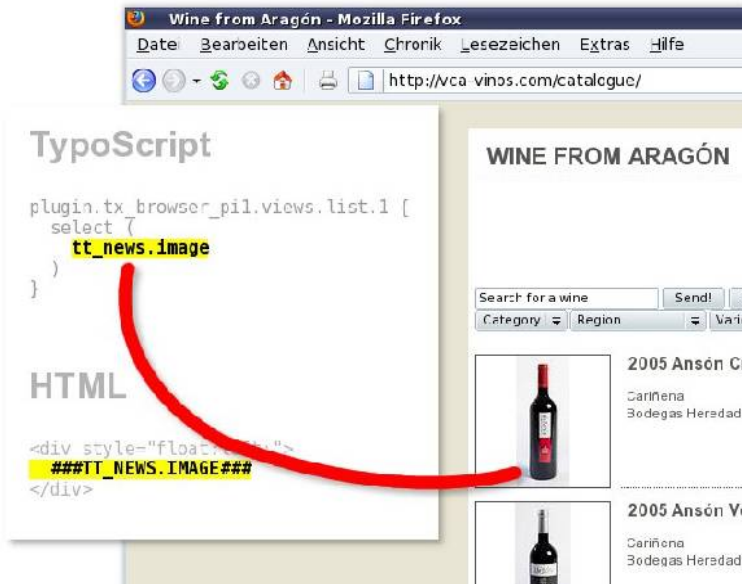


Illustration 1: Amazing - you need one line TypoScript to render an image

Revolution for TYPO3 developers - the Browser turns any field of the database into a TypoScript object. Extensions don't need any PHP code nor any own plugin. Developers can save up to 85 percent of their operating expense.

## Websites with the Browser

If you like to leave a reference, please send the developer an e-mail ([wildt.at.die-netzmacher.de](mailto:wildt.at.die-netzmacher.de))

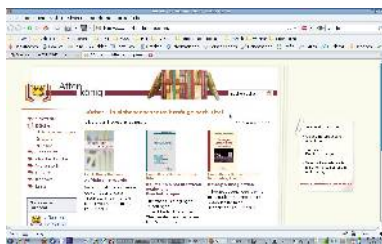


Illustration 2:  
<http://www.affenkoenig.de/>



Illustration 3:  
<http://www.florianleonhard.com>

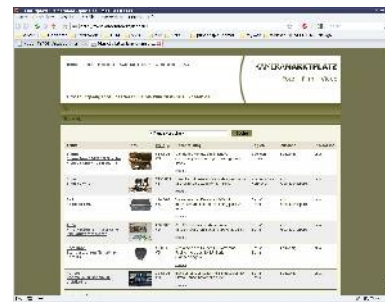


Illustration 4:  
<http://www.kameramarktplatz.de/>



Illustration 5:  
<http://www.pure-and-simple.ch/>



Illustration 6: <http://stadt.weimar.de>



Illustration 7:  
<http://veiligengezondwerken.nl/>



## Backstage

### Plugin/Flexform

You can configure some properties with the Browser plugin.

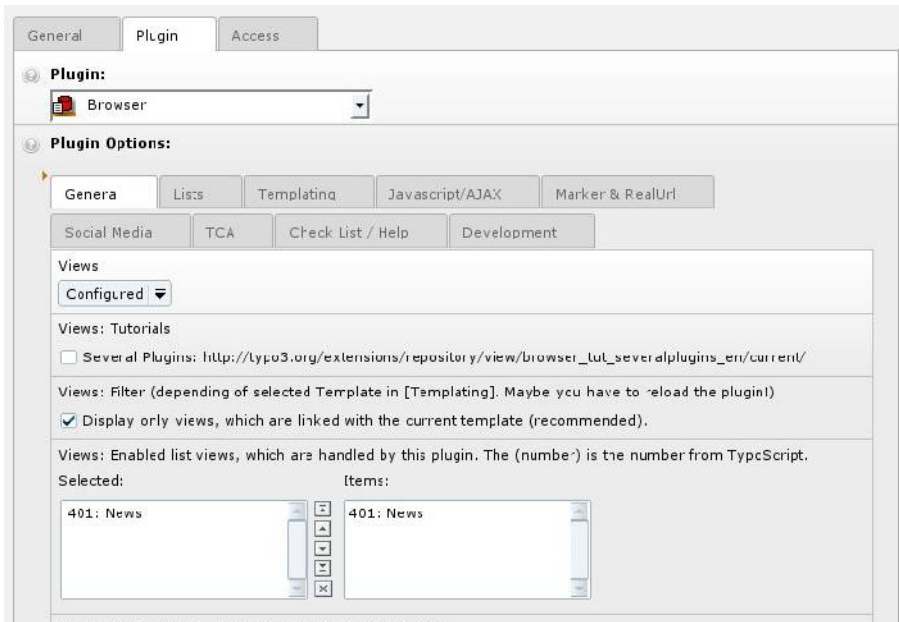


Illustration 8: Tab [General] – You will see prepared TypoScript and HTML templates of your extension and of third party extensions.

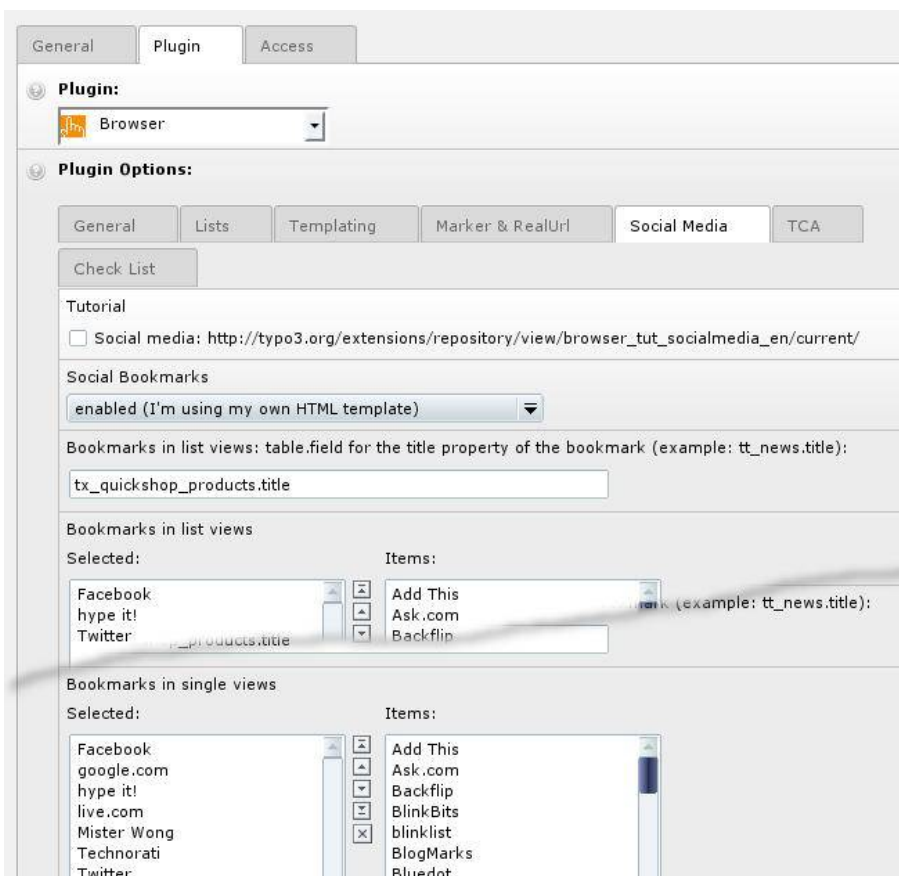


Illustration 9: Tab [Social Media]. Add links to social media with one mouse click.

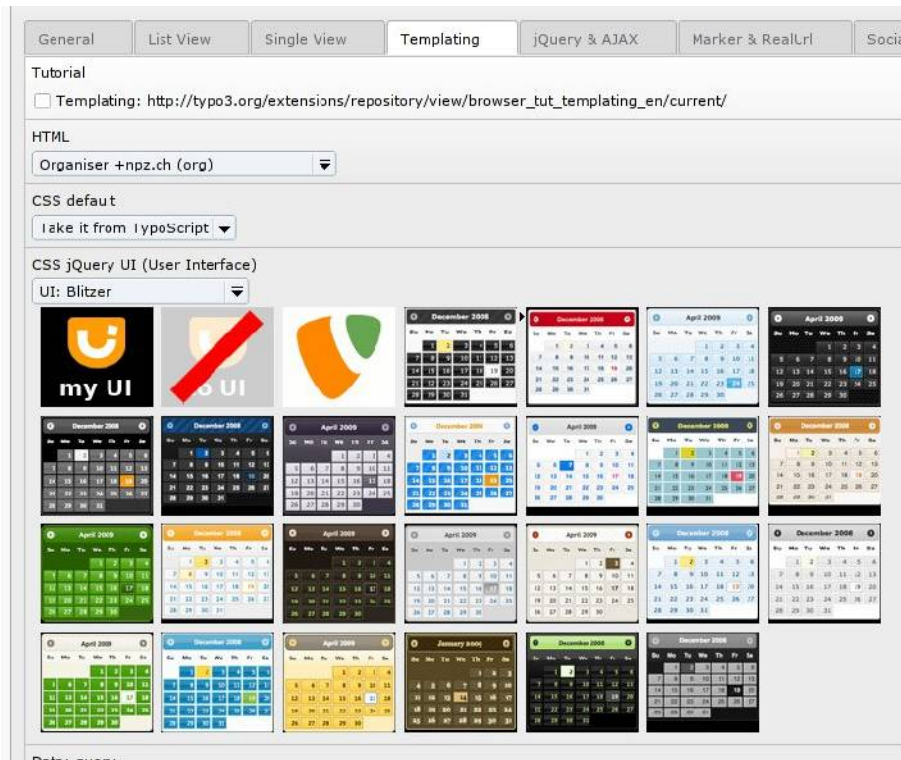


Illustration 10: Tab [Templating] with jQuery UI (User Interfaces). Select a theme with one mouse click (official in version 4.0)

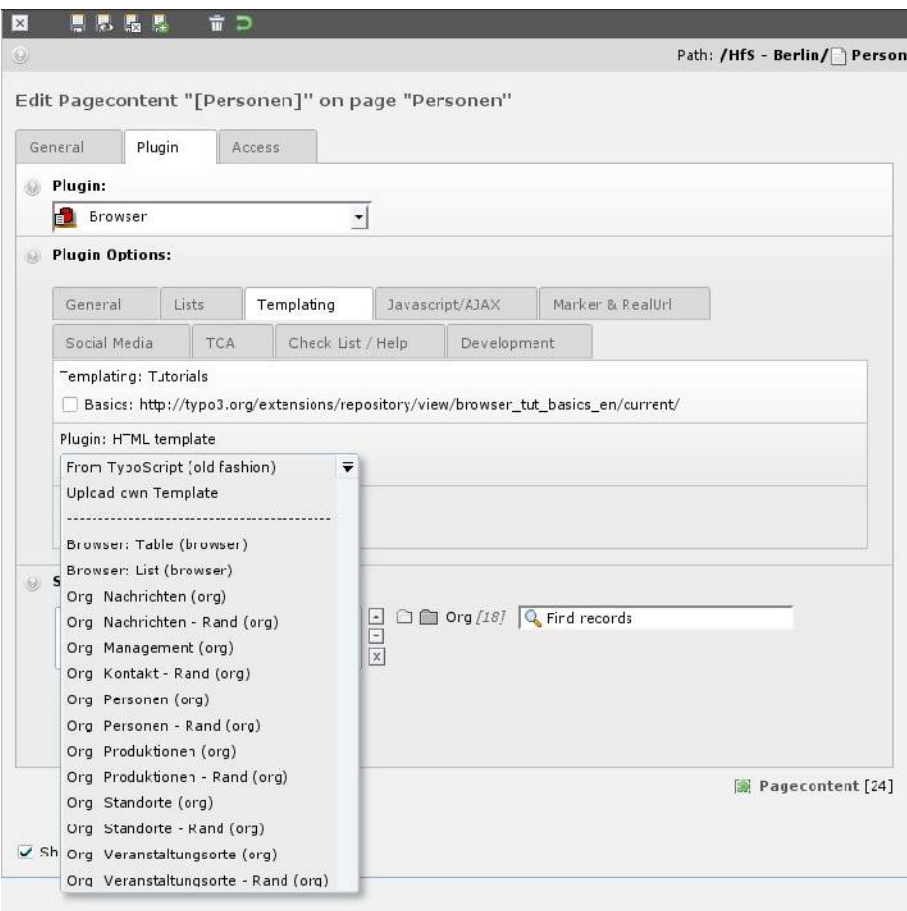


Illustration 11: Tab [Templating] – List of HTML templates after installing the extension Organiser (org)





# Introduction

Revolution for TYPO3 developers. The Browser - the TYPO3-Frontend-Engine - turns any field of the database into a TypoScript object. Extensions don't need any PHP code nor any own plugin any longer. Developers can save up to 85 percent of their operating expense.

## What does it do?

- The Browser enables TYPO3 integrators and TYPO3 developers to integrate individual databases into the TYPO3 frontend without any line PHP.
- With one line TypoScript you will get a result list with a search form, a page browser and an a-z-browser for your tt\_news records or for any other tables of any other extension. With one line TypoScript more you will get a single display of your record extended with a record browser.
- The Browser provides data in the frontend from any backend database.
- The extension simplifies the team play of HTML templates and TypoScript.  
Example with tt\_news: The typoscript code "select = tt\_news.title" and the HTML marker `###TT_NEWS.TITLE###` will display news titles in list and single views in the frontend.
- The Browser discovers relations between tables like tt\_news and tt\_news\_cat automatically. It displays data of related tables in list and single views. The extension builds the SQL relations automatically. If it fails, it is possible to configure the relations manually.
- The extension tries to detect the type of fields automatically. It renders images as images and handles documents as documents and displays it with the mime type icon.
- SEO, Search Engine Optimisation, is integrated.
- The Browser has its own search engine and it offers filters. You can filter for data areas like 2009 to 2011 or 10.000 EUR to 20.000 EUR
- The Browser has an AJAX module.
- The Browser simplifies the publishing of data in XML format like RSS feeds.
- The Browser is multiple plugin able: You can use the Browser plugins on a page unlimited.
- piVars are available in the TypoScript. For example: A user searches for 'browser'. The search word is stored in the piVar tx\_browser\_pi1[sword]. You can display the search word 'browser' in your template with the marker `###SWORD###` everywhere.
- All values from the TYPO3 array \$GLOBALS are available at runtime. \$GLOBALS contains hundred and thousands of values like session ids, the data of the client browser, the data of a current frontend user among others. The Browser enables to design your HTML depending of that values and properties at runtime.
- You can integrate any template and any view into the Browser plugin/flexform for a good usability.
- The Browser has the DRS - Development Reporting System. The DRS is supporting the management and configuration of TypoScript and if you like to develop the Browser, you will get support too.
- The Browser has a Plugin, which lists Tutorials in the frontend.
- The Browser supersedes the template engine Smarty.

## What do you need?

- A little experience in TypoScript.
- The extension devlog, if you want to use the logging (recommended).

## Audience

- TYPO3 integrators, who have less knowledge about TYPO3 and TypoScript and have little demands.
- TYPO3 developers and TYPO3 agencies, who have a lot of experience with TYPO3 and TypoScript and have high demands.

## Obligatory Requirements

- Database MySQL



## Non possible features

- The Browser doesn't support versioning.
- The Browser doesn't support different workspaces.
- The Browser hasn't any interface for frontend editing.





# Manual, Tutorials, Case Stories, Forum

## Manual in PDF

You find this manual as PDF file at

- doc/manual.pdf
- [http://typo3.org/extensions/repository/view/browser/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/browser/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)

## New Features and Bug Reports

You find scheduled new Features and Bug Reports on TYPO3 forge. See

- <http://forge.typo3.org/projects/show/extension-browser>

## Tutorials

There is one tutorial for a quick start in this manual below.

### Tutorial Basic - the Basics

But it is recommended to read the Tutorial Basic too, if you want to become familiar with the Browser.

- HTTP: [http://typo3.org/documentation/document-library/extension-manuals/browser\\_tut\\_basics\\_en/current/](http://typo3.org/documentation/document-library/extension-manuals/browser_tut_basics_en/current/)
- PDF: [http://typo3.org/extensions/repository/view/browser\\_tut\\_basics\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/browser_tut_basics_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)



Illustration 12: PDF-Manual

### Tutorial tt\_news - the Quick Start

This is the Quick Start tutorial with a tt\_news example (you can use any other extension and database).

- HTTP: [http://typo3.org/documentation/document-library/extension-manuals/browser\\_tut\\_tt\\_news\\_en/current/](http://typo3.org/documentation/document-library/extension-manuals/browser_tut_tt_news_en/current/)
- PDF: [http://typo3.org/extensions/repository/view/browser\\_tut\\_tt\\_news\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/browser_tut_tt_news_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)



Illustration 13: TYPO3 Forge

## Tutorials Overview

### Plugin "Browsers - Tutorial"

The Browser has the plugin "Browser - Manuals" since Version 3.2.

The plugin will display a list with

- manuals,
- tutorials and
- websites

for supporting the Browser in your frontend.

The Language is English or German. The language depends on the language of your frontend.

### typo3.org

The Browser has a couple of tutorials. You find links to other tutorials in the Tutorial Basics. I.e. there are tutorials for localization and the search. Here is a link to the tutorials overview. Visit

- <http://typo3.org/extensions/repository/>
- and look for "browser\_tut"


## Tutorials und Websites

### Browser Handbücher und Tutorials

- TYPO3 Handbuch**  
Das Browser-TYPO3-Handbuch: Installation, Schnellstart, TypoScript-Referenz-Tabellen
- Tutorial Grundlagen**  
Schritt-für-Schritt-Anleitung. Einführung in die Grundlagen. Überblick mit Verlinkung zu allen weiteren Tutorials.
- Tutorial Datenbank**  
Schritt-für-Schritt-Anleitung. Datenbank-Relationen und spezielle SQL-Funktionen für hierarchische Ordnungen und Synonyme.
- Tutorial Bilder**  
Schritt-für-Schritt-Anleitung. Bilder konfigurieren und Bildergalerien benutzen.
- Tutorial Bezeichnungen**  
Schritt-für-Schritt-Anleitung. Bezeichnungen konfigurieren und Bezeichnungsgalerien benutzen.

Illustration 14: The plugin in the frontend

- [http://typo3.org/extensions/repository/?tx\\_terfe\\_pi1\[view\]=search&no\\_cache=1&tx\\_terfe\\_pi1\[sword\]=browser\\_tut](http://typo3.org/extensions/repository/?tx_terfe_pi1[view]=search&no_cache=1&tx_terfe_pi1[sword]=browser_tut)





## Case Stories

### Fall Studie: gruene-autos.org

Own Database in three hours? The case study demonstrates the workflow. It is in German language only.

Eigene Datenbank in drei Stunden? Die Fall-Studie zeigt, wie es geht. Die Studie ist in Deutsch.

#### Online

- TYPO3-Extension Green Cars (case study is included): [http://typo3.org/extensions/repository/view/green\\_cars/current/](http://typo3.org/extensions/repository/view/green_cars/current/)
- Case Study only: [http://typo3.org/extensions/repository/view/green\\_cars/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Ffall\\_studie.pdf](http://typo3.org/extensions/repository/view/green_cars/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Ffall_studie.pdf)
- Result of the Study: <http://gruene-autos.org>

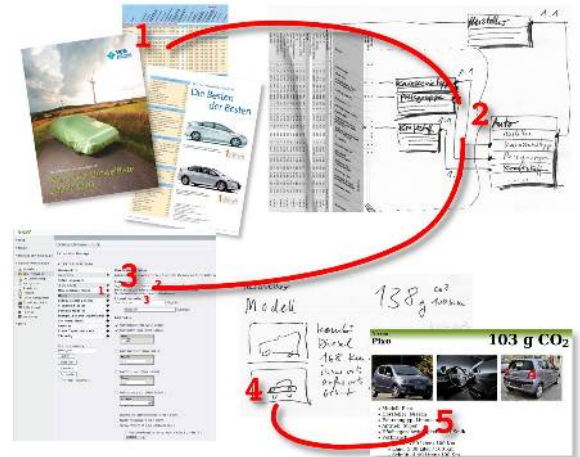


Illustration 16: Idea, database, kickstarter, Html and online

### Case Story: Quick Shop

Build your own web-shop with the Browser! Quick Shop - the fastest shop in the TYPO3 history - is based on the Browser. A tutorial does explain step by step how to build your own web shop.

You can install Quick Shop with one mouse click.

#### Online

- TYPO3-Extension Quick Shop (case study is included): [http://typo3.org/extensions/repository/view/quick\\_shop/current/](http://typo3.org/extensions/repository/view/quick_shop/current/)
- Case Study only: [http://typo3.org/extensions/repository/view/quick\\_shop/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Ftutorial.pdf&cHash=4908e4a38c](http://typo3.org/extensions/repository/view/quick_shop/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Ftutorial.pdf&cHash=4908e4a38c)
- Demo site: <http://quick-shop.typo3-browser-forum.de/>



Illustration 17: Fastest Shop in the history of TYPO3 - Quick Shop. Build your own web shop based on the Browser.

## Forum

The Browser has its own forum (leading language is German).

You are welcome to post any question, bug or snippet code at

- TYPO3-Frontend-Engine Browser: Forum <http://typo3-browser-forum.de/>



Illustration 18: The TYPO3-Frontend-Engine Browser Forum



# Quick Installation

## Extension Manager

Open the extension manager, download the extension Browser (extkey: browser) and install it.

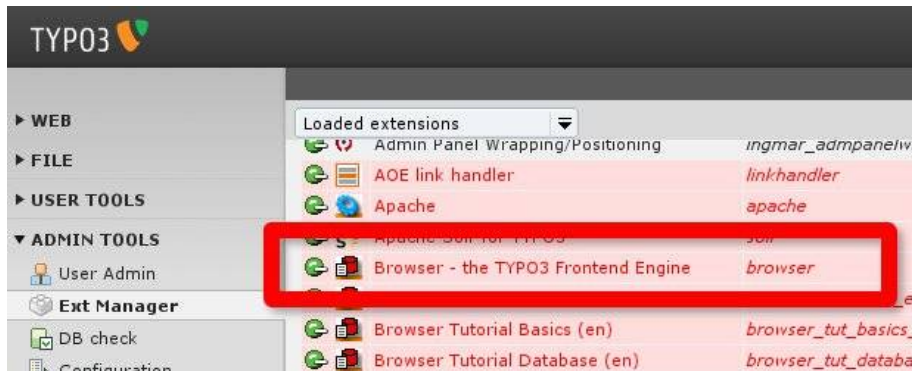


Illustration 19: Extension Manager

## What do you need?

This is a trial with tt\_news.

But you can take any other extension, which has own records like tt\_products, cal or your own extension.

You need:

- tt\_news installed
- some tt\_news records

## Add Page, Browser Plugin and Template



Illustration 20: The page TT-news with the Browser plugin and an extension template

1. Web > List
2. Add a page to your page tree.  
Call it "browser sample".
3. Add the Browser plugin to the page.  
Call it "[Browser Sample]".  
Set the header type to: [hidden].  
Configure the other properties later (see below).
4. Add an extension template to your page.  
Call it in the format "type\_name-of-your-page\_uid-of-yourTypoScript-template".  
Here: "+page\_browsersample\_1025"

## Configuring

### Template

Configure the extension template.

#### [General]

Paste into the field "setup" the code from below.

```
plugin.tx_browser_pi1 {
    views {
        list {
            1 {
                // [String] Name of the view. It will displayed in the plugin/flexform
                name = Browser Sample
                // [String] Select clause (don't confuse it with the SQL select)
                select (
                    tt_news.title,
                    tt_news.datetime,
                    tt_news.image,
                    tt_news.imagealttext,
                    tt_news.imagetitletext,
                    tt_news.image
                )
                // [String] Order By clause (don't confuse it with the SQL Order By)
                orderBy (
                    tt_news.datetime DESC, tt_news.title
                )
            }
        }
        single {
            1 {
                // [String] Select clause (don't confuse it with the SQL select)
                select (
                    tt_news.title,
                    tt_news_cat.title,
                    tt_news.short,
                    tt_news.datetime,
                    tt_news.bodytext,
                    tt_news.image,
                    tt_news.imagecaption,
                    tt_news.imagealttext,
                    tt_news.imagetitletext
                )
            }
        }
    }
}
```

The code should be self-explanatory.

#### [Includes]

Add in the tab [Includes] into the field "Include static (from extensions):" the template:

- Browser (browser)



## Browser Plugin / Flexform

### [Lists]

General Plugin Access

Plugin: Browser

Plugin Options:

General Lists 1

Title (substitutes ###TITLE###) 2

Browser Sample

Title Wrap (i.e. <h1>|</h1>)

Group Title Wrap (i.e. <h2>|</h2>)

Limit: records per page (from 1 to 1000)

20

Illustration 21: Browser plugin tab [Lists]

1. Browser plugin tab [Lists]
2. Field "title": "Browser Sample"

### [Templating]

General Plugin Access

Plugin: Browser

Plugin Options:

General Lists 3 Templating

Tutorial

☐ Templating: [http://typo3.org/extensions/repository/view/browser\\_tut\\_t](http://typo3.org/extensions/repository/view/browser_tut_t)

Plugin: HTML template

Browser: Table (browser) 4

Data: query

No query available

Startingpoint: 5

tt\_news

Illustration 22: Browser plugin tab [Templating]

3. Browser plugin tab [Templating]
4. Field "Plugin: HTML template: [Browser: Table (browser)]"
5. Startingpoint: Your folder with the tt\_news items





## Result in the Frontend

### Browser Sample



Illustration 23: List view

### Thüringen baut auf Job Market



Illustration 24: Single view

Be aware about the power of the Browser - the TYPO3-Frontend-Engine:

- You need only one line select for the output.
- The Browser formats datetime (it is a unix timestamp in the database) into a human readable format automatically.
- The Browser renders images automatically.
- The browser is building the relation from tt\_news to tt\_news\_cat automatically.

## Investigate the Browser Plugin/Flexform!

The Browser plugin/flexform has some possibilities for configuration of your views. Investigate it!

## Browser Default Templates

The example above is an example with a Browser default template.

This templates are wonderful, if you want output list and single views very quick. But they are inapplicable for building own designs.

An own design will be the next step probably. In this case read the next section "Quick Start Tutorial" below.





# Quick Start Tutorial

If you like another tutorial for beginners with more depth, please take a look into the tt\_news sample.

It is a sample with an individual design.

## The tt\_news Sample

The Browser Tutorial tt\_news presents a Quick Start. See

- HTML [http://typo3.org/documentation/document-library/extension-manuals/browser\\_tut\\_tt\\_news\\_en/current/](http://typo3.org/documentation/document-library/extension-manuals/browser_tut_tt_news_en/current/)
- PDF: [http://typo3.org/extensions/repository/view/browser\\_tut\\_tt\\_news\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/browser_tut_tt_news_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)



# Further Steps

## AJAX

Publish your data supported by AJAX!

- HTTP: [http://typo3.org/documentation/document-library/extension-manuals/browser\\_tut\\_ajax\\_en/current/](http://typo3.org/documentation/document-library/extension-manuals/browser_tut_ajax_en/current/)
- PDF: [http://typo3.org/extensions/repository/view/browser\\_tut\\_ajax\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/browser_tut_ajax_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)

## Images

Size images and use galleries:

- HTTP: [http://typo3.org/documentation/document-library/extension-manuals/browser\\_tut\\_images\\_en/current/](http://typo3.org/documentation/document-library/extension-manuals/browser_tut_images_en/current/)
- PDF: [http://typo3.org/extensions/repository/view/browser\\_tut\\_images\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/browser_tut_images_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)

## Filtering

Filter your data with dynamic filters:

- HTTP: [http://typo3.org/documentation/document-library/extension-manuals/browser\\_tut\\_search\\_en/current/](http://typo3.org/documentation/document-library/extension-manuals/browser_tut_search_en/current/)
- PDF: [http://typo3.org/extensions/repository/view/browser\\_tut\\_search\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/browser_tut_search_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)

## Labelling

Label your fields:

- HTTP: [http://typo3.org/documentation/document-library/extension-manuals/browser\\_tut\\_labeling\\_en/current/](http://typo3.org/documentation/document-library/extension-manuals/browser_tut_labeling_en/current/)
- PDF: [http://typo3.org/extensions/repository/view/browser\\_tut\\_labeling\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/browser_tut_labeling_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)

## RSS/XML - RSS Feed

Publish your data in any other formate like XML i.e: RSS feed:

- HTTP: [http://typo3.org/documentation/document-library/extension-manuals/browser\\_tut\\_rss\\_en/current/](http://typo3.org/documentation/document-library/extension-manuals/browser_tut_rss_en/current/)
- PDF: [http://typo3.org/extensions/repository/view/browser\\_tut\\_rss\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/browser_tut_rss_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)

## SEO - Search Engine Optimisation

Optimise your output for search engines:

- HTTP: [http://typo3.org/documentation/document-library/extension-manuals/browser\\_tut\\_basics\\_en/current/](http://typo3.org/documentation/document-library/extension-manuals/browser_tut_basics_en/current/)
- PDF: [http://typo3.org/extensions/repository/view/browser\\_tut\\_basics\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/browser_tut_basics_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)

## Templating

Build your own templates and integrate it into the Browser plugin/flexform:

- HTTP: [http://typo3.org/documentation/document-library/extension-manuals/browser\\_tut\\_templating\\_en/current/](http://typo3.org/documentation/document-library/extension-manuals/browser_tut_templating_en/current/)
- PDF: [http://typo3.org/extensions/repository/view/browser\\_tut\\_templating\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/browser_tut_templating_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)



# Check List

The Browser has a check list integrated in the plugin. The check list should help to avoid slips of the pen.

Every check point is explained here in case of lack of understanding.

Language of the check list - English or German - depends on the language in your TYPO3 backend.

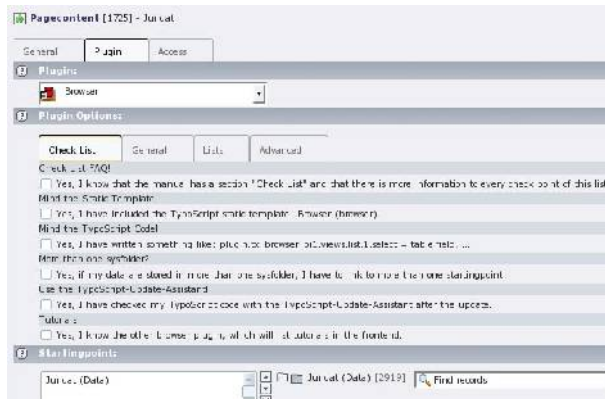


Illustration 25: Check List in English language

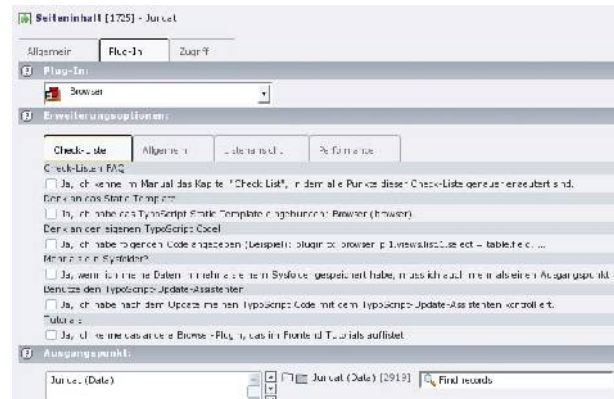


Illustration 26: Check List in German language

Title	Subject
Check Points are commented in the Manual	Yes, I know that the manual has a section "Check List" and that there is more information to every check point of this list. <b>No comment.</b>
Mind the Static Template!	Yes, I have included the TypoScript static template: Browser (browser). <b>Comment</b> Any output isn't possible without the Browser static template See section "Add Page, Browser Plugin and Template" on page 12
Mind the TypoScript Code!	Yes, I have written something like: plugin.tx_browser_pi1.views.list.1.select = table.field, ... <b>Comment</b> Any output isn't possible without own TypoScript code. See section "Error: Reference source not found" on page Error: Reference source not found
More than one sysfolder?	Yes, if my data are stored in more than one sysfolder, I have to link to more than one startingpoint <b>Comment</b> You can use tables with different pids - this is the case, if you are storing data in more than one sysfolder. Example: You have a sysfolder like [books] for your book data. You are using the fe_users table for the authors. You store the fe_users records in a sysfolder [authors]. Then you have to set the startingpoint to both: [books ] and [authors]. See section "Add Page, Browser Plugin and Template" on page 12
Use the TypoScript-Update-Assistant!	Yes, I have checked my TypoScript code with the TypoScript-Update-Assistant after the update. <b>Comment</b> Some times the developers have to clean up the TypoScript code - some property has to move to another place in the TypoScript or maybe it is replaced by a property in a plugin. The TypoScript Update Assistant investigate your TypoScript code and reports tasks, if you have to edit anything. See section "Update" on page 58
Tutorials	Yes, I know the other browser plugin, which will list tutorials in the frontend. <b>Comment</b> The Browser has a lot of tutorials with nearby 300 pages documentation. The plugin tutorial will display an overview in the frontend of your own website. See section ""Error: Reference source not found" on page Error: Reference source not found



# DRS - Development Reporting System

DRS means Development Reporting System. The DRS is supporting the management of TypoScript and if you like to develop the Browser, you will get support too.

You will get information about the work flow and the TypoScript configuration, if you choose one of the options of the DRS (see image below).

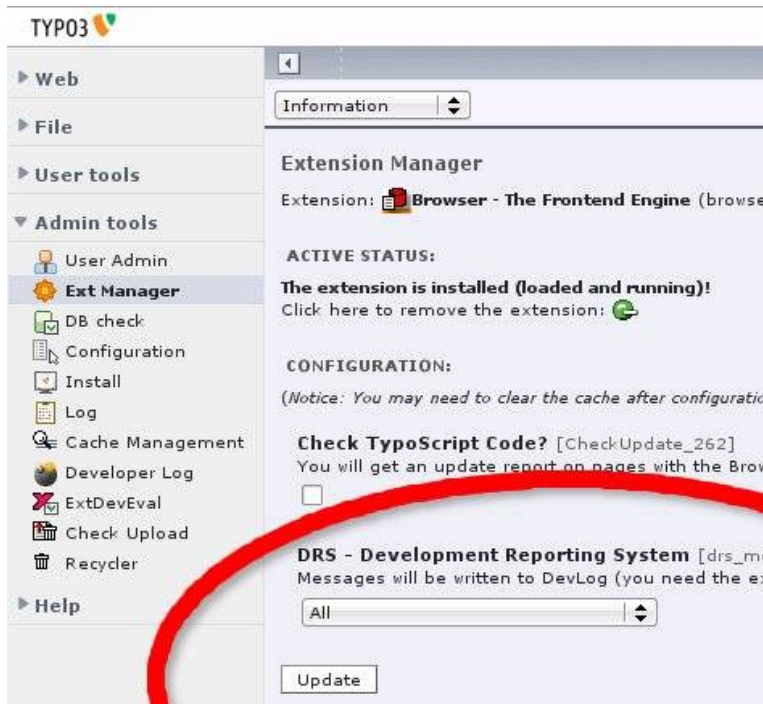


Illustration 27: DRS - Development Reporting System

## You need the extension devlog

Without the extension devlog you won't get any message in the backend.

## Configuring devlog

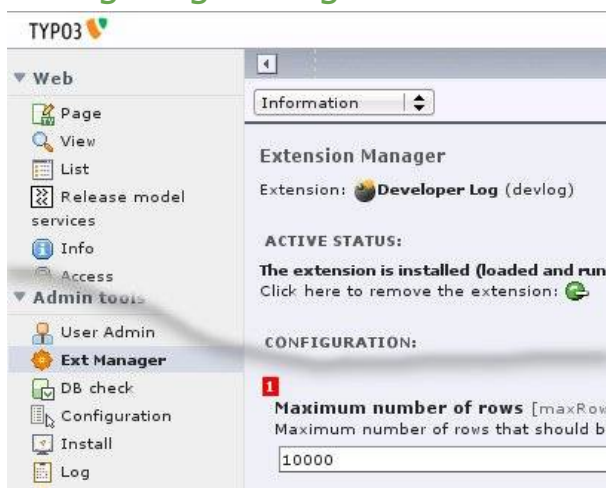


Illustration 28: Maximum number of rows in devlog

The default maximum number of rows is 1.000 in the devlog configuration.

If you want enjoy all devlog messages from the DRS, please set the maximum number of rows to 10.000.

## Options

- Don't log anything  
This should be the default.



- Auto Discover development  
Helpful for investigate TCA issues and the self-acting wrapping of fields.
- Filter and Category Menu
- Labeling Support  
Helpful for investigate Labeling issues (\_LOCAL\_LANG).
- Localization  
Helpful, if you are want to use localized tables and extensions.
- pageBrowser or A-Z-Browser  
Helpful for investigate record browser issues.
- Performance  
If you want to know, how many time the Browser needs ...
- Plugin  
Report about processing of the values you left in the plugin.
- Realurl  
Helpful for investigate your Real URL configuration.
- Search Engine Optimisation  
Helpful for investigate Search Engine Optimisation (SEO).
- SQL development  
Helpful for investigate SQL issues.
- Templating  
Logs in context of HTML template building
- Typoscript Update Checker
- All  
All includes Errors and Warnings and all DRS options. You will get a long list of logs, but this list will be the best, if you want to know all about the work flow of the Browser and your TypoScript configuration.

## Debugging SQL statements

Browser display every SQL statement. You can check, if Browser is building a query with the expected relations and according to TYPO3 frontend rights and things like hidden records.

If you have any problem, you can copy the SQL statement to PhpMyAdmin and you will get qualified error messages.

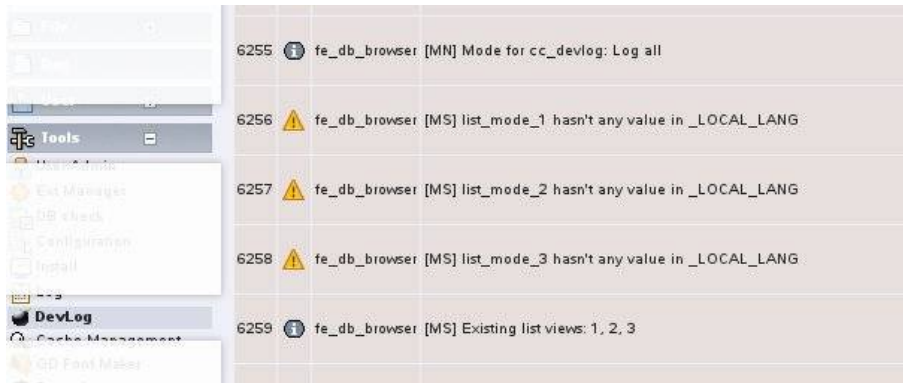


Illustration 29: SQL statements



## Debugging \_LOCAL\_LANG

You get a report for every mode select field (tab), every table summary, table caption and every table field, which hasn't any translation in \_LOCAL\_LANG.



6255	fe_db_browser	[MN] Mode for cc_devlog: Log all
6256	fe_db_browser	[MS] list_mode_1 hasn't any value in _LOCAL_LANG
6257	fe_db_browser	[MS] list_mode_2 hasn't any value in _LOCAL_LANG
6258	fe_db_browser	[MS] list_mode_3 hasn't any value in _LOCAL_LANG
6259	fe_db_browser	[MS] Existing list views: 1, 2, 3

Illustration 30: Logs for missing items in the \_LOCAL\_LANG array



# Reference

## General (global arrays)

Property:	Data type:	Description:	Default:
template	array -> Local	<p>Integration of your template in the Browser plugin/flexform</p> <p><b>Tutorial:</b>  <a href="http://typo3.org/documentation/document-library/extension-manuals/browser_tut_templating_en/current/">http://typo3.org/documentation/document-library/extension-manuals/browser_tut_templating_en/current/</a></p> <p><b>Example:</b></p> <pre> plugin.tx_browser_pil {     template {         extensions {             // BEGIN of your configuration             // [String/Array] extension key             org {                 // [String/Array] template name (inern)                 news {                     // [String] name for plugin/flexform                     name = Org: Nachrichten                     // [String] path to the template                     file = EXT:org/res/news/401/default.tmpl                     // [Integer/CSV] Comma seperated list of                     // the views id, which can process                     // the template                     csvViews = 401                 }             }             // END of your configuration         }     } } </pre>	
localTable	-> Local		
autoconfig	-> Local		
format	array	<p>Configuration for the PHP method strftime().</p> <ul style="list-style-type: none"> <li>strftime (format string): PHP format (see PHP Documentation "Date and Time Functions", method strftime())</li> <li>strftime.utf8_encode (boolean): If you have problems with multi byte chars like German Umlaute (Ä, Ö, Ü, ß), activate or deactivate this property</li> </ul> <p><b>Example:</b></p> <pre> plugin.tx_browser_pil {     format {         strftime = %a, %d.%b.%y         strftime {             utf8_encode = 1         }     } } </pre>	See the example
general_stdWrap	-> Local		
navigation.modeSelector	array	<p>Wrapping of the items in the tabs (mode selector) before wrapped with a link. Sometimes it is useful for the CSS.</p> <p><b>Example:</b></p> <pre> plugin.tx_browser_pil {     navigation.modeSelector.wrap = &lt;span&gt; &lt;/span&gt; } </pre>	empty
document_stdWrap	-> Local		
displaySingle	-> Local		





Property:	Data type:	Description:	Default:
displayList	-> Local		
upload	-> Local		
advanced	-> Local		
views	array	See the reference table "Views" below (page 23)	
andWhere	-> Local	See the property "n.andWhere" below (page 38)	
marker	-> Local		
_LOCAL_LANG	array	See the reference table "_LOCAL_LANG" below (page 43)	

## Local (every view)

Local is a special property in Browser:

- Every property is the default for all views.
- But you can copy the properties to every view.  
Thus it is possible to configure each view differently with a minimum off input

### Example

The case: you need for the list view 1 another template.

Line 2: You copy the property array template

Line 3: You change the value of the field you need.

The benefit is, that the changing has no effect to other views.

```
1.plugin.tx_browser_pi1.views.list.1 {
2.  template < plugin.tx_browser_pi1.template
3.  template.file = fileadmin/templates/my.tmpl
4.}
```

There is another example for the property displayList in the tutorial "Tutorial Basics".

Property:	Data type:	Description:	Default:
template	array	file: Path to the default HTML template.  <b>Tutorial:</b> See "Tutorial Basics"  <b>Example:</b> <pre>plugin.tx_browser_pi1.template {     file = EXT:browser/res/default.tmpl }</pre>	See the example
autoconfig	-> autoconfig		
localTable	string / array	file: Path to the default HTML template.  <b>Tutorial:</b> See "Tutorial Basics"  <b>Example:</b> <pre>plugin.tx_browser_pi1.template {     localTable = tt_news     localTable {         uid = uid         pid = pid     } }</pre>	



Property:	Data type:	Description:	Default:
upload	string	<p>Path to upload folder of your images or documents</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil {     upload = uploads/tx_ships }</pre>	empty
general_stdWrap	array	<p>Text will be wrapped as RTE-Text, but without any &lt;p&gt;-tags. If a field has the property handleAs = text, it won't be processed with general_stdWrap but with displayList.content_stdWrap or displaySingle.content_stdWrap. See the example in displaySingle.content_stdWrap.</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil {     general_stdWrap &lt; lib.parseFunc_RTE     general_stdWrap {         parseFunc {             nonTypoTagStdWrap {                 encapsLines {                     nonWrappedTag &gt;                 }             }         }     } }</pre>	See the example
document_stdWrap	array	<p>Wrapping of fields which should handled as documents.</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil {     document_stdWrap {         icon = 1         stdWrap {             noTrimWrap =              }     } }</pre>	See the example



Property:	Data type:	Description:	Default:
displaySingle	array	<p>Configuration of</p> <ul style="list-style-type: none"> <li>the display of markers in the frontend and</li> <li>images</li> <li>in a single view.</li> </ul> <p>It is nearby the displaySingle property in the extension tt_news. If you want to know more, please read the Reference in the tt_news manual. The SEO fields title, description and keywords have the stdWrap property.</p> <p><b>Tutorials:</b> Tutorial Basics Tutorial Images</p> <p><b>Example:</b></p> <pre> plugin.tx_browser_pil.displaySingle {     seo {         htmlHead {             title = 0             meta {                 description = 0                 keywords    = 0             }         }     }     display {         title      = 1         table {             summary = 1             caption = 1         }         backbutton = 1         searchform {             wrapSwordInResults = 1             wrapSwordInResults {                 0.wrap = &lt;span style="background:#fff7f"&gt;\  &lt;/span&gt;                 ...             }         }     }     templateMarker = ###TEMPLATE_SINGLE###     imageCount     = 4     imageWrapIfAny = \         &lt;div class="news-single-img"&gt;   &lt;/div&gt;     content_stdWrap {         parseFunc &lt; lib.parseFunc_RTE     }     caption_stdWrap {         wrap = \             &lt;p class="news-single-imgcaption"&gt;   &lt;/p&gt;         trim = 1     }     imageBoxWrap {         // [String] Wrap code for every \         image/imagecaption block         wrap = &lt;span class="single-imagebox \             single-imagebox-###IMAGE_COUNT###"&gt;   \             &lt;/span&gt;     } } </pre>	See the example



Property:	Data type:	Description:	Default:
		<pre> image {     // [String] path and file name of the     image, \         which should displayed, if a record hasn't     \         any image     file = EXT:browser/res/images/\         alternate_image_400x300.gif     file.maxW = 240     file.maxH = 180     wrap =     imageLinkWrap = 1     imageLinkWrap {         enable = 1         bodyTag = &lt;body bgColor="#ffffff"&gt;         wrap = &lt;a href="javascript:close();"&gt;       &lt;/a&gt;         width = 500m         height = 500         JSwindow = 1         JSwindow {             newWindow = 1             expand = 17,20         }     }     firstImageIsPreview = 0     forceFirstImageIsPreview = 0 } </pre>	



Property:	Data type:	Description:	Default:
displayList	array	<p>Configuration of</p> <ul style="list-style-type: none"> <li>the display of markers in the frontend and</li> <li>images</li> <li>in a list view.</li> </ul> <p>It is nearby the displayList property in the extension tt_news. If you want to know more, please read the Reference in the tt_news manual. The SEO fields title, description and keywords have the stdWrap property.</p> <p><b>References:</b> See n.displayList.display on page 41.</p> <p><b>Example:</b></p> <pre> plugin.tx_browser_pil.displayList {     singlePid =     seo {         htmlHead {             title = 0             meta {                 description = 0                 keywords    = 0             }         }     }     display {         searchform {             ...             wrapSwordInResults = 1             wrapSwordInResults {                 0.wrap = &lt;span style="background:#ffff7f"&gt;\  &lt;/span&gt;              ...         }     }     table {         summary    = 1         caption    = 1     }     jssAlert      = 1 } templateMarker = ###TEMPLATE_LIST### # Don't display caption in List view caption_stdWrap.if.directReturn = 0 imageCount = 1 imageWrapIfAny = imageBoxWrap {     // [String] Wrap code for every \     image/imagecaption block     wrap = &lt;span class="list-imagebox \ list-imagebox-###IMAGE_COUNT###"&gt;   \ &lt;/span&gt; } image {     // [String] path and file name of the image, \     which should displayed, if a record hasn't \     any image     file = EXT:browser/res/images/\     alternate image_400x300.gif     file.maxW      = 120     file.maxH      = 90     imageLinkWrap = 1     imageLinkWrap {         enable      = 1         bodyTag      = &lt;body bgColor="#ffffff"&gt;         wrap = &lt;a href="javascript:close();"&gt;   &lt;/a&gt;         width      = 500m         height     = 500         JSwindow   = 1         JSwindow {             newWindow = 1             expand    = 17,20         }     } } </pre>	<p>See the example</p> <p>singlePid: Default is the current page id</p>



Property:	Data type:	Description:	Default:
		<pre> master_templates {     selectbox = SELECTBOX     selectbox {         ... -&gt; See "Browser Tutorial Search"     } } </pre>	
displayList. selectBox_orderBy		<p>You will get a select box for ordering records in the list view, if you don't use the marker ###ITEM###.</p> <p><b>Tutorial:</b> Browser Tutorial Marker (en)</p> <p><b>Example:</b></p> <pre> plugin.tx_browser_pil.displayList {     selectBox_orderBy {         // [Boolean] 1: Display the select box for         // ordering (default), 0: don't display.         display = 1         templateMarker =         ###TEMPLATE_SELECTBOX_VALID###         selectbox = SELECTBOX         selectbox {             ...         }     } } </pre>	
andWhere	-> array	See the property "n.andWhere" below (page 38)	
advanced	-> array	See the section Advanced below	
views.list	-> <i>view.list</i>	See table "views.list" below on page 28.	
views.single	-> <i>view.single</i>	See table "views.single" below.	
_LOCAL_LANG	-> <i>_LOCALLANG</i>	See table "_LOCAL_LANG" below on page 43.	



## Advanced

You should configure the array advanced only, if you are familiar with the Browser.

Advanced is local available. TypeScript snippet:

```
1.plugin.tx_browser_pi1.views.single.1 {
2.  advanced < plugin.tx_browser_pi1.advanced
3.  advanced.sql.devider.childrenRecords >
4.}
```

Property:	Data type:	Description:	Default:
development	array	Please read the comment in the TypeScript code. And sorry, that there isn't any other documentation.	
performance	array	Please read the comment in the TypeScript code. And sorry, that there isn't any other documentation.	
recursionGuard	int	The Browser uses some methods recursive. The recursion guard prevents unlimited loops and take care about performance.  You can increase the value of the recursion guard.  <b>Example:</b> <pre>plugin.tx_browser_pi1.advanced {   recursionGuard = 10000 }</pre>	10000
localization	-> array	See the section Localization below.	
realUrl	-> array	See the section realUrl in the Reference below.	
security	array	Please read the comment in the TypeScript code. And sorry, that there isn't any other documentation.	
sql	array	Please read the comment in the TypeScript code. And sorry, that there isn't any other documentation.	
tca	array	Please read the comment in the TypeScript code. And sorry, that there isn't any other documentation.	





## a-z\_Browser

You can display your matched items with the A-Z-Browser like the examples below:

- Default

All | 0-9 | A | B | ... | XYZ | Others

- A small one

All | 0-9 | A-E | F-J | K-P | R-Z | Others

## Tutorial

See Tutorial Navigation:

- HTML: [http://typo3.org/extensions/repository/view/browser\\_tut\\_navigation\\_en/current/](http://typo3.org/extensions/repository/view/browser_tut_navigation_en/current/)
- PDF: [http://typo3.org/extensions/repository/view/browser\\_tut\\_navigation\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/browser_tut_navigation_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)

Property:	Data type:	Description:	Default:
navigation	array	<p>Array for configuring the</p> <ul style="list-style-type: none"> <li>• a-z-browser</li> <li>• modeSelector</li> <li>• page browser</li> <li>• record browser</li> </ul> <pre> plugin.tx_browser_pi1 {     navigation {         a-z_Browser {         }         modeSelector {         }         pageBrowser {         }         record_browser {         }     } } </pre>	See Tutorial Navigation



## autoconfig

### Tutorial

- HTTP: [http://typo3.org/documentation/document-library/extension-manuals/browser\\_tut\\_database\\_en/current/](http://typo3.org/documentation/document-library/extension-manuals/browser_tut_database_en/current/)
- PDF: [http://typo3.org/extensions/repository/view/\\_tut\\_database\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/_tut_database_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)

Property:	Data type:	Description:	Default:
relations	array	<p>Array with your list views.</p> <p><b>Tutorial:</b> Tutorial Databases</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pi1.autoconfig {     relations = 1     relations {         oneWayOnly = 1         simpleRelations = 0         simpleRelations {             selfReference = 0         }         mmRelations = 1         TCAconfig {             type = 1             type {                 csvValue = select             }         }         csvDontUseFields =         left_join = 1     } }</pre>	
autoDiscover	array	<p><b>Example:</b></p> <pre>plugin.tx_browser_pi1.autoconfig { }</pre>	See table Local

## AJAX

See Tutorial AJAX:

- HTTP: [http://typo3.org/documentation/document-library/extension-manuals/browser\\_ajax\\_en/current/](http://typo3.org/documentation/document-library/extension-manuals/browser_ajax_en/current/)
- PDF: [http://typo3.org/extensions/repository/view/browser\\_ajax\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/browser_ajax_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)



## Localization

`plugin.tx_browser_pi1.advanced.localization`

### Tutorial

- HTTP: [http://typo3.org/documentation/document-library/extension-manuals/browser\\_tut\\_localization\\_en/current/](http://typo3.org/documentation/document-library/extension-manuals/browser_tut_localization_en/current/)
- PDF: [http://typo3.org/extensions/repository/view/\\_tut\\_localization\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/_tut_localization_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)

### realURL

Property:	Data type:	Description:	Default:
realURL	array	<p>Array for configuring realURL in context with localization.</p> <p>defaultLanguageLink (boolean):</p> <ul style="list-style-type: none"> <li>• Default: 1</li> <li>• 0: Link to the single with the uids of the current records</li> <li>• 1: Link to the single with the uids of the default language records</li> </ul> <p><b>Background:</b>  The extension realurl is using the uid of the default language records usually.</p> <p>- Advantage</p> <ul style="list-style-type: none"> <li>• You can switch the languages in single mode.</li> </ul> <p>- Disadvantage</p> <ul style="list-style-type: none"> <li>• The realurl path is using the record segment in default language in every language</li> </ul> <p>You change this behavior:  The extension realurl is using than the uid of the current record.</p> <p>- Advantage</p> <ul style="list-style-type: none"> <li>• The realurl path is using the record segment in the current language.</li> </ul> <p>- Disadvantage</p> <ul style="list-style-type: none"> <li>• You can't switch the languages in single mode.</li> </ul> <p><b>Example:</b></p> <pre>plugin.tx_browser_pi1.advanced.localization {     realURL {         defaultLanguageLink = 1     } }</pre>	1



## TCA

Property:	Data type:	Description:	Default:
TCA	array	<p>Array for configuring TCA behavior in context with localization.</p> <p>TCA.field.appendix (string): Fields with this appendix will be used for translation. I.e. The overlay value from tt_news_cat.title_lang_ol will overwrite the value in tt_news_cat.title</p> <ul style="list-style-type: none"> <li>Default: lang_ol</li> </ul> <p>TCA.value.devider (string): Devider for seperating language entries like de:Aufmacher fr:Accroche or Aufmacher Accroche</p> <ul style="list-style-type: none"> <li>Default:  </li> </ul> <p>TCA.value.langPrefix (boolean):</p> <ul style="list-style-type: none"> <li>Default: 1</li> <li>1: lang_ol values have a lang_prefix like en:Lead Story  de:Aufmacher fr:Accroche</li> <li>0: lang_ol values are without lang_prefix like Lead Story  Aufmacher Accroche</li> </ul> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.advanced.localization {     TCA {         field {             appendix = _lang_ol         }         value {             devider =               langPrefix = 1         }     } }</pre>	<p>lang_ol</p> <p> </p> <p>1</p>



## realUrl.linkToSingle

`plugin.tx_browser_pi1.advanced.realUrl.linkToSingle`

### Tutorial

- HTTP: [http://typo3.org/documentation/document-library/extension-manuals/browser\\_tut\\_realurl\\_en/current/](http://typo3.org/documentation/document-library/extension-manuals/browser_tut_realurl_en/current/)
- PDF: [http://typo3.org/extensions/repository/view/\\_tut\\_realurl\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/_tut_realurl_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)

### realURL

Property:	Data type:	Description:	Default:
realURL	array	<p>Array for configuring realURL in context of SEO - Search Engine Optimisation.</p> <p>You can control links to a single view with the properties below. You can add your own piVars, if it would be necessary.</p> <p><b>Background:</b> It would be the best to have a link to a single view only with the page id and the id of the record. Than you will have a short URL and a unique URL. If you have some more parameters, they will enable to visit the same content with different URL. Search Engines don't like this, because it seems, that you provide double content.</p> <p><b>Tutorial:</b> Browser Tutorial RealURL (en), extkey: browser_tut_realurl_en</p> <p><b>Example:</b></p> <pre> plugin.tx_browser_pi1.advanced.realUrl {     linkToSingle     realURL {         dont_display_piVars = 1         dont_display_piVars {             azTab      = 1             mode       = 1             pointer    = 1             plugin     = 1             sort       = 1             sword      = 0         }     } } </pre>	

## RSS/XML

See Tutorial RSS/XML:

- HTTP: [http://typo3.org/documentation/document-library/extension-manuals/browser\\_rss\\_en/current/](http://typo3.org/documentation/document-library/extension-manuals/browser_rss_en/current/)
- PDF: [http://typo3.org/extensions/repository/view/browser\\_rss\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/browser_rss_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)

## Templating

See Tutorial Templating:

- HTTP: [http://typo3.org/documentation/document-library/extension-manuals/browser\\_templating\\_en/current/](http://typo3.org/documentation/document-library/extension-manuals/browser_templating_en/current/)
- PDF: [http://typo3.org/extensions/repository/view/browser\\_templating\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/browser_templating_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)



## views.list

Property:	Data type:	Description:	Default:
<i>n</i>	array	<p>Array with your list views.</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list {     1 {         ...     } }</pre>	
<i>n.name</i>	string	<p>Name of the list view. Name will be displayed in the plugin.</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list {     1 {         name = Organisier: Events     } }</pre>	
<i>n.template</i>	array	<p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list {     1 {         template &lt; plugin.tx_browser_pil.template         template {             ...         }     } }</pre>	See table Local
<i>n.relations.type</i>	array	<p>Array with your database relations. <i>type</i> is mm only until now.</p> <p><b>Commendation:</b> You can build the relation for all possibilities you need and copy it to every view (like the example above). Browser will use only the relations, it need for building the query of the view.</p> <p><b>Tutorial:</b> Tutorial Database</p> <p><b>Debugging:</b> See "Debugging SQL statements" on page 20.</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list {     1 {         relations.mm = ...         ...     }     2 &lt; .1 }</pre>	
<i>n.record</i>	array	<p>Array with</p> <ul style="list-style-type: none"> <li>the uid field name of the main record (the record with the id for the link to a single view)</li> <li>the pid field name of the main record.</li> </ul> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list {     1 {         record {             uid = tx_ships_main.uid             pid = tx_ships_main.pid         }     } }</pre>	



Property:	Data type:	Description:	Default:
n.select	string, stdWrap	<p>The query with the field names, which you want display in the frontend. You don't need the uid and the pid of the main record (see property record above). Browser builds SQL statements according to the limit by TYPO3 - i. e. fe-user-rights, hidden records.</p> <p><b>Tutorial:</b> See Tutorial Quick Start above Tutorial Basics</p> <p><b>Debugging:</b> See "Debugging SQL statements" on page 20.</p> <p><b>Example:</b></p> <pre> plugin.tx_browser_pil.views.list {     1 {         select = tt_news.title, tt_news_cat.title     } }  plugin.tx_browser_pil.views.list {     1 {         select = COA         select {             10 = TEXT             10 {                 value = tt_news.title                 lang {                     de = tt_news.title_de                 }                 wrap =  ,             }             20 = TEXT             20 {                 value = tt_news_cat.title                 lang {                     de = tt_news_cat.title_de                 }                 wrap =  ,             }         }     } } </pre>	
n.showUid	string	<p>You can set the name for the piVar[showUid]. It is helpfull, if you are use more than one plugin with different databases like 'tt_news' and 'fe_users' for example - and if your are using realUrl.</p> <p>In the case below the record id of the first list view will get the parameter tx_browser_pi1[showUid]=X - this is the default, now alias for the showUid isn't configured. The record id of the second list view will get the parameter tx_browser_pi1[feuserUid]=X</p> <p><b>Example:</b></p> <pre> plugin.tx_browser_pil.views.list {     1 {         ...     }     2 {         showUid = feusersUid     } } </pre>	





Property:	Data type:	Description:	Default:
<code>n.select.deal_as_table</code>	array	<p>If you are using the SQL manual mode with aliases, you have to help the Browser to allocate the proper table for operations. There is the array <code>deal_as_table</code> for this case.</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list {     1 {         select = or.uid AS `or.uid`, \               CONCAT(or.or_code, ' ', or.or_name)         \         AS `or.or_name`         select {             deal_as_table {                 0 {                     statement = CONCAT(or.or_code, ' ', \                                       or.or_name) AS `or.or_name`                     alias     = or.or_name                 }             }         }     } }</pre>	
<code>n.groupBy</code>	string, stdWrap	<p>If you like to display your data grouped, please use <code>groupBy</code>. The <code>groupBy</code> won't be a part of the SQL query but will be processed by PHP.</p> <p>Example for <code>stdWrap</code> see <code>n.select</code> above</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list {     1 {         groupBy = tt_news_cat.title     } }</pre> <p><b>This property is incomplete!</b> If you are using <code>groupBy</code> the A-Z-Browser and the page browser can't count the records proper.</p>	
<code>n.groupBy.dontConsolidate</code>	boolean	<p>If you are group data by a field of a foreign table and you are displaying more than one field from the foreign table, it is possible, that you won't get a proper result. Try <code>dontConsolidate</code> in this case.</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list {     1 {         groupBy {             dontConsolidate = 1         }     } }</pre>	0
<code>n.where</code>	string, stdWrap	<p>DANGEROUS! You can write your own where clause. Be aware in case of an own configuration, that you have to configure enable fields like hidden, deleted, starttime and endtime by yourself. Filter doesn't work in case of own where clause.</p> <p>Example for <code>stdWrap</code> see <code>n.select</code> above</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list {     1 {         where = tx_ships_special.uid = 35     } }</pre>	



Property:	Data type:	Description:	Default:
<i>n.andWhere</i>	string, stdWrap	<p>You can add any condition to the where clause. If you need a table field in your clause, you have to allocate the table name separated by commas to the value "tables". The allocated table names have to be a part of your defined relations. Example for stdWrap see <i>n.select</i> above</p> <p><b>Debugging:</b> See "Debugging SQL statements" on page 20.</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list {     1 {         andWhere = tx_ships_special.uid = 35     } }</pre>	
<i>n.orderBy</i>	string, stdWrap	<p>You can sort every view in your own way, if you need it. orderBy won't be a part of the SQL query but will be processed by PHP multisort since Browser 3.1.0 Example for stdWrap see <i>n.select</i> above</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list {     1 {         orderBy = tt_news.datetime desc, \                 tt_news_cat.title     } }</pre>	Values from the select property
<i>n.orderBy.foreignTable</i>	string	<p>You can order children records (foreign tables) by a SQL query. The code will be send as a real SQL query in contrast to the property orderBy above!</p> <p>Foreign table has to be the name of the foreign table like in the example below. It will be used for the table.field marker. In the example below the browser will handle the result of the sql query in this way:</p> <ul style="list-style-type: none"> <li>uid -&gt; tx_org_department.uid</li> <li>title -&gt; tx_org_department.title</li> </ul> <p>You will need the marker ###UID_LOCAL###. The marker will be replaced by the uid of the current local table.</p> <p><b>Browser Tutorial Database (en):</b> <a href="http://typo3.org/documentation/document-library/extension-manuals/browser_tut_search_en/current/">http://typo3.org/documentation/document-library/extension-manuals/browser_tut_search_en/current/</a></p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list {     1 {         orderBy {             tx_org_department ( SELECT tx_org_department.uid AS 'uid', tx_org_department.title AS 'title' FROM tx_org_department, tx_org_headquarters_mm_tx_org_department WHERE tx_org_headquarters_mm_tx_org_department.\ uid_local = ###UID_LOCAL### AND tx_org_headquarters_mm_tx_org_department.\ uid_foreign = tx_org_department.uid ORDER BY tx_org_headquarters_mm_tx_org_department.\ sorting )         }     } }</pre>	



Property:	Data type:	Description:	Default:
<code>n.random</code>	boolean	<p>Generate records by a random order.</p> <p><b>Be aware!</b></p> <ul style="list-style-type: none"> <li>random has priority: orderBy will be ignored!</li> <li>the Browser plugin doesn't have to be cached</li> </ul> <p><b>No cache</b> Please use the plugin "Browser (no cache)" The whole page will not be cached!</p> <p><b>Tutorial</b> Browser Tutorial Several Plugins (en) Section: No Cache <a href="http://typo3.org/extensions/repository/view/browser_tut_severalplugins_en/current/">http://typo3.org/extensions/repository/view/browser_tut_severalplugins_en/current/</a></p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list {     1 {         random = 1     } }</pre>	
<code>n.override</code>	array	<p>You can override the parts select, from, where, andWhere and orderBy of any SQL query. Every part is optional. The override option makes sense, if you aren't satisfied with the query statements processed by the browser. Every item has the stdWrap property. Example for stdWrap see <code>n.select</code> above. andWhere has only an effect, if you don't use where!</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list {     1.override {         select = tt_news.title AS         'tt_news.title', \             tt_news_cat.title AS \             'tt_news_cat.title'          from = ...         where = ...         andWhere = ...         orderBy = ...     } }</pre>	
<code>n.limit</code>	string	<p>Limit the result</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list {     1 {         limit = 0,3     } }</pre>	
<code>n.search</code>	string	<p>You can search in more fields than displayed.</p> <p><b>Tutorial</b> Tutorial Search</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list {     1 {         search = tt_news.title, tt_news.bodytext, \             tt_news.short, tt_news_cat.title     } }</pre>	Values from the select property



Property:	Data type:	Description:	Default:
<code>n.handleAs</code>	array	<p>You can handle fields in a special way.</p> <ul style="list-style-type: none"> <li>image will be wrapped as an image. You have to configure the property upload. See table "Local" property upload on page 24.</li> <li>imageCaption will be wrapped as the image caption.</li> <li>imageAltText will be wrapped as the image alt tag.</li> <li>imageTitleText will be wrapped as the image title tag.</li> <li>document will be wrapped as link to the document with a mime type icon.</li> </ul> <p><b>Tutorial:</b> Tutorial Database</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list {     1 {         handleAs {             image           = tx_ships_main.images             imageCaption    = tx_ships_main.caption             imageAltText    = tx_ships_main.caption             imageTitleText  = tx_ships_main.caption             document        = tx_ships_main.documents         }     } }</pre>	
<code>n.csvLinkToSingleView</code>	string	<p>By default every item in the list links to the single view. If you don't want that, use csvLinkToSingleView (comma separated values).</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list {     1 {         csvLinkToSingleView = tt_news.title     } }</pre>	
<code>n.document_stdWrap</code>	array	<p>Copy the default configuration from document_stdWrap and change it. Wrapping of documents. See property document_stdWrap in the table "Local" on page 24.</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list {     1 {         document_stdWrap &lt; \             plugin.tx_browser_pil.document_stdWrap         document_stdWrap.stdWrap {             noTrimWrap &gt;             wrap = &lt;br /&gt;         }     } }</pre>	See table Local
<code>n.displayList</code>	array	<p>Copy the default configuration from displayList and change it. Wrapping of images and configuration of displaying markers. See property displayList in the table "Local" on page 27.</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list {     1 {         displayList &lt; \             plugin.tx_browser_pil.displayList         displayList {             ...         }     } }</pre>	See table Local



Property:	Data type:	Description:	Default:
<i>n.displayList.display</i>	array	<p>If you don't want the item, set the value to 0.</p> <ul style="list-style-type: none"> <li>table.summary: use the &lt;table summary="..."&gt; property</li> <li>table.caption: use the &lt;table&gt;&lt;caption&gt;...&lt;/caption&gt; tag</li> <li>jssAlert: Link to a alert box, if the isn't any single view.</li> </ul> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list.1.displayList {     display {         table {             summary      = 1             caption      = 1         }         jssAlert        = 1     } }</pre>	Like the example
<i>n.table.field</i>	stdWrap	<p>Every table field has the stdWrap property.</p> <p><b>Tutorial:</b> Tutorial Basics</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list {     1 {         tt_news.title {             crop = 10   ...   1         }     } }</pre>	
<i>n.marker</i>	array, stdWrap	<p>Every view has the marker property.</p> <p><b>Tutorial:</b> Tutorial Basics</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list {     1 {         marker {             my_marker {                 value      = My Marker                 lang.de     = Mein Marker             }         }     } }</pre>	

## views.single

Property:	Data type:	Description:	Default:
<i>n</i>	array	See table views.list	
<i>n.template</i>	array	<p>See property template in the table "Local" on page 23.</p> <p><b>Tutorial:</b> Tutorial Basics</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.single {     1 {         template &lt; plugin.tx_browser_pil.template     } }</pre>	See table Local
<i>n.relations.type</i>	array	See table views.list	
<i>n.record</i>	array	See table views.list	
<i>n.select</i>	string	See table views.list	
<i>n.andWhere</i>	array	See table views.list	

Property:	Data type:	Description:	Default:
<i>n.orderBy</i>	string	<p>See table <code>views.list</code> amongst others</p> <p><code>orderBy</code> is different from the SQL <code>orderBy</code> statement. There are several causes. On important cause is, that you can't order records from the local table (main table) and foreign tables (children tables) within one SQL query.</p> <p>Since version 3.4.3 it is possible to order children records too. See the example below:</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list {     1 {         select = ...         orderBy (             tx_organiser_cal_mm_calentrance.sorting,             tx_organiser_calentrance.title         )     } }</pre> <p><b>Comment:</b></p> <p>There is this relation in the example above (you can't see it):  <code>tx_organiser_cal</code> -&gt; <code>tx_organiser_cal_mm_calentrance</code> \  -&gt; <code>tx_organiser_calentrance</code></p> <p>It is like:  event -&gt; mm table -&gt; entrance fees</p> <p>The <code>orderBy</code> clause from above will have the effect, that the titles of the entrance fees (values like: "students 10 EUR, adults 16 EUR, ...") will first ordered by the values of the field <code>sorting</code> in the mm table and second will be ordered by the title.</p> <p>The browser detects a context between mm tables and foreign tables! The <code>orderBy</code> clause from above will have any effect to all other children tables.</p>	Values from the select property
<i>n.orderBy.foreignTable</i>	string	<p>You can order children records (foreign tables) by a SQL query. The code will be send as a real SQL query in contrast to the property <code>orderBy</code> above!</p> <p>Please refere to <code>views.list</code> above</p>	
<i>n.search</i>	string	See table <code>views.list</code>	Values from the select property



Property:	Data type:	Description:	Default:
<i>n.handleAs</i>	array	<p>You can handle fields in a special way.</p> <ul style="list-style-type: none"> <li>• title headline in the single view</li> <li>• image will be wrapped as an image. You have to configure the property upload. See table "Local" property upload on page 24.</li> <li>• imageCaption will be wrapped as the image caption.</li> <li>• imageAltText will be wrapped as the image alt tag.</li> <li>• imageTitleText will be wrapped as the image title tag.</li> <li>• text will be wrapped as text in the single view in the template image-text.</li> <li>• document will be wrapped as link to the document with a mime type icon.</li> </ul> <p><b>Tutorial:</b> Tutorial Basics Tutorial Images</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.single {     1 {         handleAs {             title           = tx_ships_main.title             image           = tx_ships_main.images             imageCaption    = tx_ships_main.caption             imageAltText    = tx_ships_main.caption             imageTitleText  = tx_ships_main.caption             text            = tx_ships_main.history             document        = tx_ships_main.documents         }     } }</pre>	
<i>n.document_stdWrap</i>	array	See table views.list	See table Local
<i>n.displaySingle</i>	array	<p>Copy the default configuration from displaySingle and change it. Wrapping of images and configuration of displaying markers. See property displaySingle in the table "Local" on page 25.</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.single {     1 {         displaySingle &lt; \             plugin.tx_browser_pil.displaySingle         displaySingle {             ...         }     } }</pre>	See table Local
<i>n.table.field</i>	stdWrap	See table views.list	
<i>n.marker</i>	array, stdWrap	<p>Every view has the marker property.</p> <p><b>Tutorial:</b> See "Self-defined Markers".</p> <p><b>Example:</b></p> <pre>plugin.tx_browser_pil.views.list {     1 {         marker {             my_marker {                 value     = My Marker                 lang.de    = Mein Marker             }         }     } }</pre>	



## TT\_CONTAINER

The TT\_CONTAINER is deprecated! Use COA instead. See the Tutorial/Manual of Browser for BZD Staff Directory.

### Tutorial / Manual

- HTTP: [http://typo3.org/extensions/repository/view/browser\\_bzdstaffdirectory/current/](http://typo3.org/extensions/repository/view/browser_bzdstaffdirectory/current/)
- PDF: [http://typo3.org/extensions/repository/view/browser\\_bzdstaffdirectory/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/browser_bzdstaffdirectory/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)

TT\_CONTAINER is a short form for **TypoScript Template Container**.

Property:	Data type:	Description:	Default:
tableFieldUid	string	<p>Deprecated!</p> <p><b>Syntax:</b>  <i>table.field</i>: name of the table + dot + name of the field</p> <p><b>Tutorial:</b></p> <p><b>Debugging:</b></p> <p><b>Example:</b></p> <pre> plugin.tx_browser_pi1.views.single.1 {     ttContainer = TT_CONTAINER     ttContainer {         tableFieldUid = tx_civserv_form.uid         limit = -1         wrap (             &lt;h2&gt;Forms&lt;/h2&gt;             &lt;ul&gt; &lt;/ul&gt;         )         noRecord {             value (                 &lt;h2&gt;Forms&lt;/h2&gt;                 &lt;ul&gt;                     &lt;li&gt;                         There isn't any form.                     &lt;/li&gt;                 &lt;/ul&gt;             )         }         10 = TTC_STDWRAP         10 {             ...         }         20 = TTC_COA         20 {         }     } } </pre>	
limit	int		
noRecord	array ->stdWrap	... has the stdWrap property	
ttc_stdwrap	array ->TTC_STDWRAP		
ttc_coa	array ->TTC_COA		
tt_container	array ->TT_CONTAINER		





## TTC\_COA

The TTC\_COA is deprecated! Use COA instead. See the Tutorial/Manual of Browser for BZD Staff Directory.

Property:	Data type:	Description:	Default:
		<p>Deprecated!</p> <p><b>Example:</b></p> <pre> plugin.tx_browser_pil.views.single.1 {     ttContainer = TT_CONTAINER     ttContainer {         ...         20 = TTC_COA         20 {             }         }     } }                     </pre>	

## TTC\_STDWRAP

The TTC\_STDWRAP is deprecated! Use COA instead. See the Tutorial/Manual of Browser for BZD Staff Directory.

Property:	Data type:	Description:	Default:
		<p>Deprecated!</p> <p><b>Example:</b></p> <pre> plugin.tx_browser_pil.views.single.1 {     ttContainer = TT_CONTAINER     ttContainer {         ...         10 = TTC_STDWRAP         10 {             ...         }     } }                     </pre>	



## \_LOCAL\_LANG

With the `_LOCAL_LANG` array you can control the values of the tabs in the mode selector and the translation for the table fields.

### Tutorials

Label fields

- HTTP: [http://typo3.org/documentation/document-library/extension-manuals/browser\\_tut\\_labeling\\_en/current/](http://typo3.org/documentation/document-library/extension-manuals/browser_tut_labeling_en/current/)
- PDF: [http://typo3.org/extensions/repository/view/\\_tut\\_labeling\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/_tut_labeling_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)

Use localized tables and extensions:

- HTTP: [http://typo3.org/documentation/document-library/extension-manuals/browser\\_tut\\_localization\\_en/current/](http://typo3.org/documentation/document-library/extension-manuals/browser_tut_localization_en/current/)
- PDF: [http://typo3.org/extensions/repository/view/\\_tut\\_localization\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/_tut_localization_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)



Property:	Data type:	Description:	Default:
_LOCAL_LANG	array	<p>Array with the translations for the tabs in the mode selector, for SEO - Search Engine Optimisation, table summary and table caption and for the fields</p> <p>There are the following rules:</p> <ul style="list-style-type: none"> <li>• Tabs: <i>view_mode_n</i> view: list or single n: number of the view (1, 2, 3, ...)</li> <li>• Tables: Browser generates HTML tables, which are conform with the guidelines of the Web Accessibility Initiative (WAI). <i>view_mode_n_summary</i>: &lt;table summary="value"&gt; <i>view_mode_n_caption</i>: &lt;caption&gt;value&lt;/caption&gt;</li> <li>• Fields: <i>table_field</i> table: name of the table (i. e. tt_news) field: name of the field (i. e. title)</li> </ul> <p><b>Example:</b></p> <pre> plugin.tx_browser_pil {     _LOCAL_LANG {         default {             list_mode_1    = My tab in the view list 1             list_mode_2    = My tab in the view list 2             list_mode_1_titleTag = My HTML title tag 1             list_mode_2_titleTag = My HTML title tag 2             list_mode_1_keywords = keyword 1, ..., ....             list_mode_2_keywords = keyword 1, ..., ....             list_mode_1_summary = My table summary list 1            list_mode_2_summary = My table summary list 2            list_mode_1_caption = My table caption list 1            list_mode_2_caption = My table caption list 2              single_mode_1 = My tab in the view single 1             single_mode_2 = My tab in the view single 2             single_mode_1_titleTag =             ###TABLE.FIELD### ...             single_mode_2_titleTag =             ###TABLE.FIELD### ...             single_mode_1_keywords = ###TABLE.FIELD###, ..            single_mode_2_keywords = ###TABLE.FIELD###, ..            single_mode_1_summary = Summary single list 1            single_mode_2_summary = Summary single list 2            single_mode_1_caption = Caption single list 1            single_mode_2_caption = Caption single list 2              tt_news_title    = News Header             tt_news_cat_title = Category         }         de {             ...         }     } } </pre>	



## What's new in Version 3.7?

### Integration of jQuery UI (unofficial)

[3.7.0]

The completely UI (User Interface) is integrated from <http://jqueryui.com/themeroller/>. Now you can select a jQuery theme in the Browser flexform by one mouse click. There are 24 themes available. You can upload your own theme. See tab [Templating].

jQuery should be integrated completely in 4.0.0. All will be well documented than.

### Record Browser (single view)

[3.7.0]

Single view has an AJAX supported record browser. You can navigate to the first, the previous, the next and the last record.

- You need the Marker `###RECORD_BROWSER###` in your HTML template
- If you like AJAX you need a page object (the Browser provides a template, you will make the job with one line TypoScript) and an ID in your HTML template.

See Tutorial Navigation:

- HTML: [http://typo3.org/extensions/repository/view/browser\\_tut\\_navigation\\_en/current/](http://typo3.org/extensions/repository/view/browser_tut_navigation_en/current/)
- PDF: [http://typo3.org/extensions/repository/view/browser\\_tut\\_navigation\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/browser_tut_navigation_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)

### Replacement of empty markers is configurable

[3.7.0]

The Browser is cleaning up an HTML template before delivering. If there are markers left, which aren't rendered – something like `###MARKER###` – they will be removed.

This is best practise for an operating system, but not for a development system.

Now you can stop the replacement with a mouse click in the Browser flexform. Left markers won't be replaced. See tab [Development].

# What's new in Version 3.6?

## Additional parameters

[3.6.2]

The browser provides a TypoScript snippet for adding additional parameters. See tutorial navigation:

- HTTP: [http://typo3.org/documentation/document-library/extension-manuals/browser\\_tut\\_navigation\\_en/current/](http://typo3.org/documentation/document-library/extension-manuals/browser_tut_navigation_en/current/)
- PDF: [http://typo3.org/extensions/repository/view/browser\\_tut\\_navigation\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/browser_tut_navigation_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)

## Alternate Image

[3.6.0]

If you are using an HTML template with images and the current record hasn't any image, then the Browser will display an alternate image by default.

You can use your own image. And you can cut off the alternate image.

See

- Browser Tutorial Images  
Look for the section "Alternate Images"  
[http://typo3.org/extensions/repository/view/browser\\_tut\\_images\\_en/current/](http://typo3.org/extensions/repository/view/browser_tut_images_en/current/)

## Area and interval: get parameters with date

[3.6.4]

Links of this menu "Calendar | March | April" will be now:

- <http://hfs.die-netzmacher.de/kalender/month/201103/>
- <http://hfs.die-netzmacher.de/kalender/month/201104/>

See

- Browser Tutorial Images  
Look for the section "Alternate Images"  
[http://typo3.org/extensions/repository/view/browser\\_tut\\_search\\_en/current/](http://typo3.org/extensions/repository/view/browser_tut_search_en/current/)

## Blank the manual sort field by TypoScript configuration

[3.6.1]

You can disable the sort field by TypoScript now.

The new TypoScript property is

```
displayList.selectBox_orderBy.display = 1
```

The sort field has the corresponding HTML subpartmarker `###TEMPLATE_SELECTBOX_VALID###`

## Category Menu

[3.6.0]

You can filter your data by a category menu. The difference between a category menu and the available filters check box, radio buttons and select box is, that the first is a list of links and all others are a part of an HTML form.

You can use areas for a category menu in the same way like for filters.

Please refer to

- HTTP: [http://typo3.org/documentation/document-library/extension-manuals/browser\\_tut\\_search\\_en/current/](http://typo3.org/documentation/document-library/extension-manuals/browser_tut_search_en/current/)
- PDF: [http://typo3.org/extensions/repository/view/browser\\_tut\\_search\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/browser_tut_search_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)



## Configurable: Search respects Filters

[3.6.0]

It is configurable, if the search respect filters. It is possible to differentiate between every filter.

The new TypoScript property is

```
plugin.tx_browser_pi1.displayList.display.searchform.respect_filters
```

Please refer to

- HTTP: [http://typo3.org/documentation/document-library/extension-manuals/browser\\_tut\\_search\\_en/current/](http://typo3.org/documentation/document-library/extension-manuals/browser_tut_search_en/current/)
- PDF: [http://typo3.org/extensions/repository/view/browser\\_tut\\_search\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/browser_tut_search_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)

## Constant markers are COA able

[3.6.1]

You can use constant markers with content type TEXT or COA now.

See

- Browser Tutorial Markers (en)  
[http://typo3.org/extensions/repository/view/browser\\_tut\\_marker\\_en/current/](http://typo3.org/extensions/repository/view/browser_tut_marker_en/current/)

## Disable wrap in pi base class by the plugin

[3.6.2]

You can disable the default div-container for the browser plugin.

See the plugin. tab [Templating], field [wrap in base class].

You need it, if you like to publish your data as an CSV file for example.

## Embedding jQuery code

[3.6.5]

Embedding jquery and other javascript code is controlled by the flexform.

## Filters for areas

[3.6.0]

You can filter your data by areas. Example for areas are

- 2010 to 2012
- 10.000 EUR to 20.000 EUR

You can generate filter for periods relative like:

- all days of the current week
- -2 weeks from now to +2 weeks from now

Please refer to

- HTTP: [http://typo3.org/documentation/document-library/extension-manuals/browser\\_tut\\_search\\_en/current/](http://typo3.org/documentation/document-library/extension-manuals/browser_tut_search_en/current/)
- PDF: [http://typo3.org/extensions/repository/view/browser\\_tut\\_search\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/browser_tut_search_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)

## Filters for local table

[3.6.0]

You can filter data from the local table. Before version 3.6.0 it was possible to filter data of foreign tables only.



## Hide the update report for public visitors

[3.6.0]

If you like to check your configuration after an update, now any public visitor won't see any report. The update report - generated by the update wizard of the extension manager - is accessible with your current IP only.

## Hooks

[3.6.0 / 3.6.2]

There are four hooks. They enable you to manipulate the result of the Browser in your own extension.

See

- Browser Tutorial Hooks  
[http://typo3.org/extensions/repository/view/browser\\_tut\\_hooks\\_en/current/](http://typo3.org/extensions/repository/view/browser_tut_hooks_en/current/)

## Images got full tt\_content support

[3.6.1]

You can render every image supported by tt\_content.image.20.

These are some possible features:

- render images differently. Examples: first image is on top of page, all others are on the bottom. All images have 300 px width but the second has 440 px width.
- columns
- the browser 3.6.0 wrapped only one field as an image per row. Now it is unlimited.

You find a configuration example in

- Browser Tutorial Images (3.6.1)  
[http://typo3.org/extensions/repository/view/browser\\_tut\\_images\\_en/current/](http://typo3.org/extensions/repository/view/browser_tut_images_en/current/)



## Name views in TypeScript

[3.6.1]

You can name every view in your TypeScript. If you are using a couple of views, you will have a good overview on the views top level. See the illustration on the right hand.

The names will removed while runtime.

## Ordering of children records

[3.6.3]

You can order children records supported by a SQL query.

See in the reference views.list orderBy."foreignTable" and views.single orderBy."foreignTable".

Please refer to

- HTTP: [http://typo3.org/documentation/document-library/extension-manuals/browser\\_tut\\_database\\_en/current/](http://typo3.org/documentation/document-library/extension-manuals/browser_tut_database_en/current/)
- PDF:

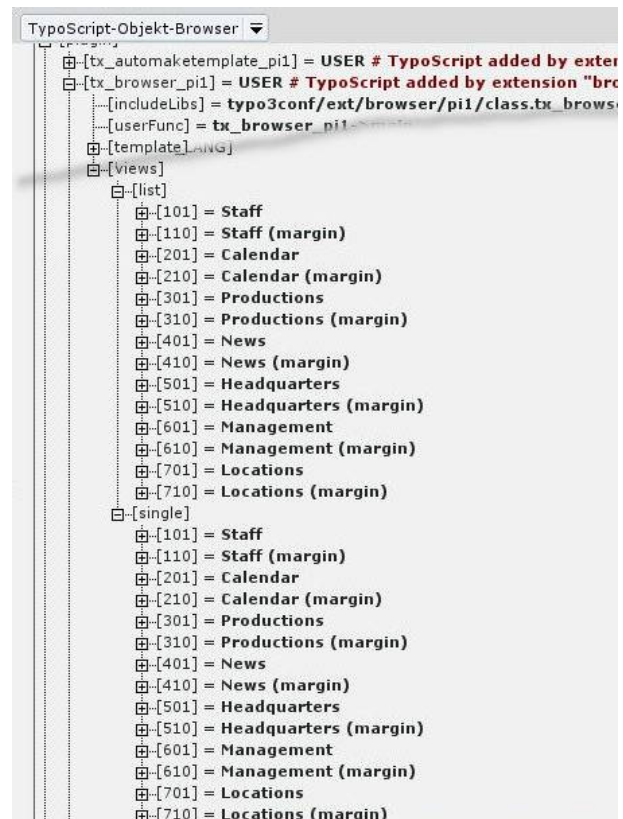


Illustration 31: Named views (ext: org)

[http://typo3.org/extensions/repository/view/browser\\_tut\\_database\\_en/current/info/?tx\\_terfe\\_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf](http://typo3.org/extensions/repository/view/browser_tut_database_en/current/info/?tx_terfe_pi1%5BdownloadFile%5D=doc%252Fmanual.pdf)

## Simulate a single record

[3.6.1]

You can simulate a single record with a browser plugin/flexform.

This feature enables you, to display any record everywhere on your page.

Examples are:

- You want to display a defined fe\_user
- You want to display a defined address

The tab [list view] of the plugin/flexform has the new property:

- [Display record with uid]

See

- Browser Tutorial Several Plugins  
[http://typo3.org/extensions/repository/view/browser\\_tut\\_severalplugins\\_en/current/](http://typo3.org/extensions/repository/view/browser_tut_severalplugins_en/current/)

## Sponsoring

You can sponsor the browser! See

- <http://typo3-browser.de/sponsoring/>

## tx\_browser\_tca->static\_country\_zones

[3.6.1]

Sometimes you have a database with address data. If you are select a country in a backend form, it would be wonderful, when the displaying of the states (German: Bundesländer, Swiss: Kanton) depends on it.

The Browser supports this dependency for the extension static\_info\_tables. See

- Browser Tutorial TCA



[http://typo3.org/extensions/repository/view/browser\\_tut\\_tca\\_en/current/](http://typo3.org/extensions/repository/view/browser_tut_tca_en/current/)

## UserFunc: numberFormat

[3.6.2]

You can format numbers by TypoScript. See the snippet below.

The function is the snippet is deprecated! The TypoScript of TYPO3 4.5 is extended with a stdWrap property for formatting number formats.

```
price = COA
price {
    wrap = |&nbsp;{$quick_shop.currencySymbol}
    10 = USER
    10.userFunc = tx_browser_typoscript->numberFormat
    10.userFunc {
        number = TEXT
        number {
            value = ###TX_QUICKSHOP_PRODUCTS.PRICE###
        }
        decimal = 2
        dec_point = {$quick_shop.dec_point}
        thousands_sep = {$quick_shop.thousands_sep}
    }
}
```

## Wrap Images and Captions with the Image Number

[3.6.0]

The TypoScript has the new property imageBoxWrap.

You can wrap images with their captions as a box. The marker ###IMAGE\_COUNT### will be replaced by the number of the current image. This enables you to design a CSS depending of the image number.

See imageBoxWrap in the Reference above.



# Road Map

## Latest News on Forge

You find the latest news on [forge.typo3.org](http://forge.typo3.org). See

- Browser Roadmap  
<http://forge.typo3.org/projects/extension-browser/roadmap>

## Version 4.0: jQuery UI integration

### Integration of jQuery UI

You will configure the CI of the Browser supported by the jQuery UI (User Interface). You can select a theme by a mouse click. You can upload individual themes.

4.0 is scheduled for autumn of 2011

## Version 4.3: Frontend Editing

### Frontend Editing

We want to provide the Browser with frontend editing as soon as possible.

Frontend editing will enable frontend users to edit any data like news or events.

We have a concept in the drawer. We are looking forward to some customers and sponsors.



# Functional Schematic

## Fast Way for Your Data to the TYPO3 Frontend

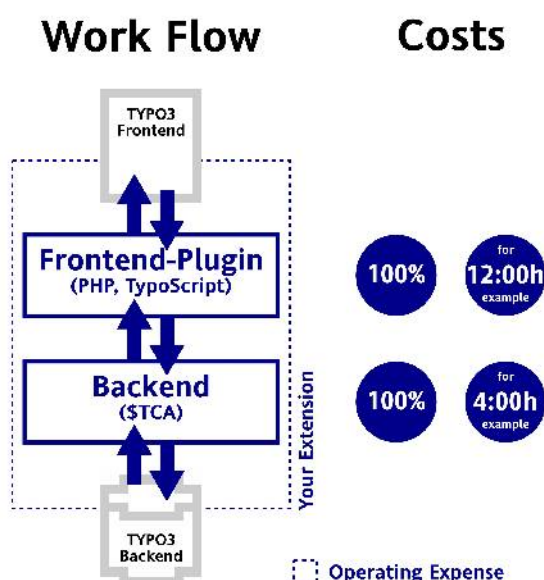


Illustration 32: Common way of TYPO3 extension development.

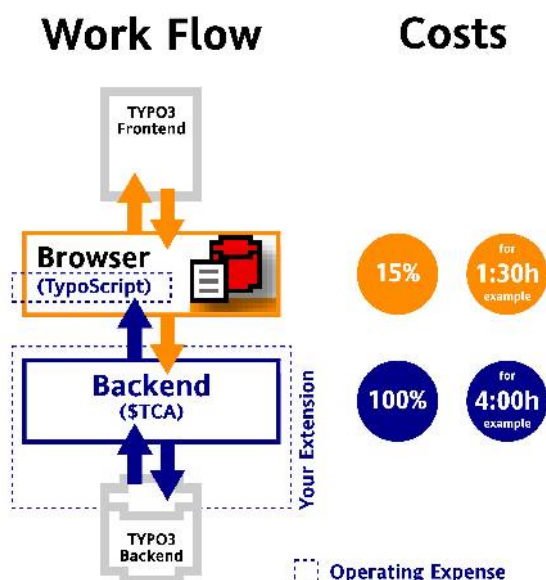


Illustration 33: TYPO3 extension development with the Browser.

The common way of TYPO3 extension development:

- You need a frontend plugin.
- You have to code PHP at least.

TYPO3 extension development with the Browser:

- You don't need any frontend plugin.
- You have to create a TypoScript template only.

## Save up to 85 Percent of Your Development Costs

Compare the costs in our example above for the development without and with the Browser.

We guess, that you can save 85 percent of the costs for the development of a frontend plugin, if you are using the Browser.

In our example you would need 16 hours for the development of your extension with a frontend plugin (4 hours for the backend plus 12 hours for the frontend). If you are using the Browser you would need 5:30 hours (4 hours for the backend plus 1:30 hours for the frontend). You would save 9:30 hours (nearly 60 percent) altogether.

The claim of the Browser is "The Frontend Engine".



# Smarty

## The Browser supersedes Smarty

The Browser is able to supersede the template engine Smarty. This means: You can use every third party extension, which depends on Smarty without Smarty!

An example for the superseding is the extension Browser for Civserv. The illustrations below are from the manual of Browser for Civserv.

## The common Way - with Smarty

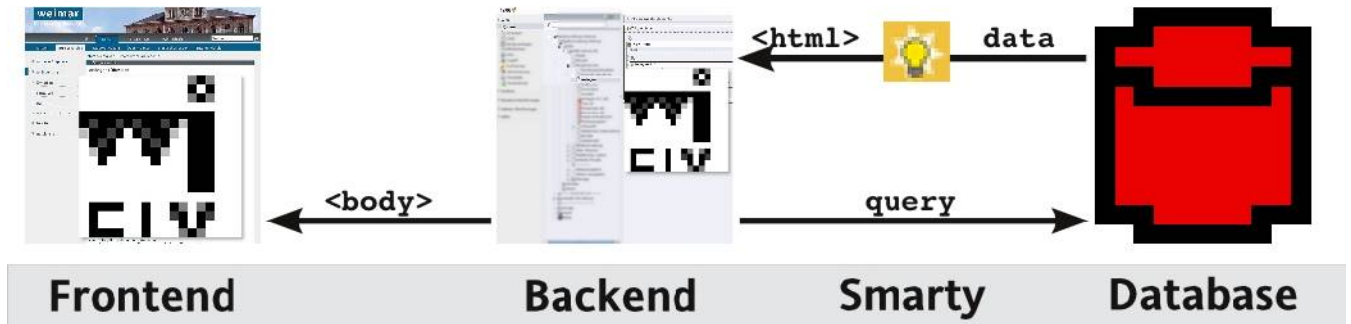


Illustration 34: Workflow with civserv and the template engine Smarty

If you are using civserv as an example for an extension with smarty in the common way, you will have the following work flow:

- The civserv plugin (the backend in the illustration above) sends a query to the database.
- The database sends the result to the template engine Smarty.
- Smarty sends a completely rendered HTML result back to the civserv plugin.
- The civserv plugin sends the HTML result as content to the HTML body.

The TYPO3 API (the backend in the illustration above) hasn't any chance to process data for Real URL or the HTML head. SEO - Search Engine Optimisation - and the TYPO3 cache management are impossible.

## The better Way - with the Browser

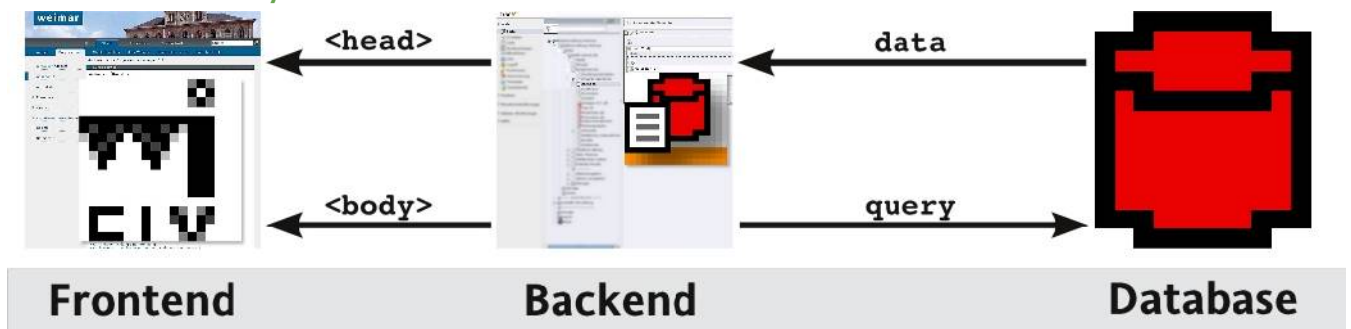


Illustration 35: Workflow with civserv and with the frontend engine Browser






You can use civserv with the frontend engine Browser:

- The Browser plugin sends a query to the database.
- The database sends the result back to the plugin.
- The Browser plugin process the data for Real URL, for the HTML head and the HTML body.



SEO - Search Engine Optimisation - and the TYPO3 cache management is available and you can use Real URL.

## Cost-Benefit Equation

### Example with civserv

Position	Civserv/Smarty	Civserv/Browser
Extensions	  civserv smarty	   civserv browser browser_civserv
Search Engine Optimisation	<b>no</b>	<b>yes</b>
Real URL	<b>no</b>	<b>yes</b>
TYPO3 Cache Management	<b>no</b>	<b>yes</b>

### Example with any other extension, which is using smarty

Position	Any/Smarty	Any/Browser
Extensions	 any extension smarty	 any extension browser browser TypoScript for any extension
Search Engine Optimisation	<b>no</b>	<b>yes</b>
Real URL	<b>no</b>	<b>yes</b>
TYPO3 Cache Management	<b>no</b>	<b>yes</b>



# Update

## From every version

### TypoScript Update Assistant

We implemented a TypoScript Update Assistant in Version 3.0:

- You get messages, if your TypoScript code isn't proper in context with updating.
- You get the messages in English or German.

This is your work flow:

1. Enable the TypoScript Update Assistant with the extension manager (see illustration below).
2. Delete the TYPO3 cache.
3. Load a page with a browser plugin in the frontend. You will get a report (see illustration below).
4. Please maintain your TypoScript code per displayed tickets.

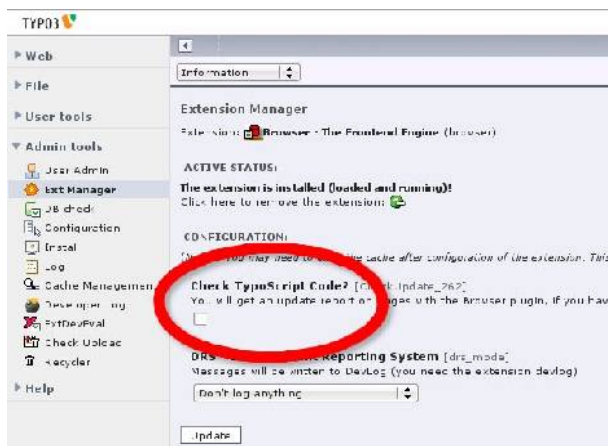


Illustration 36: Check TypoScript Code after Update?

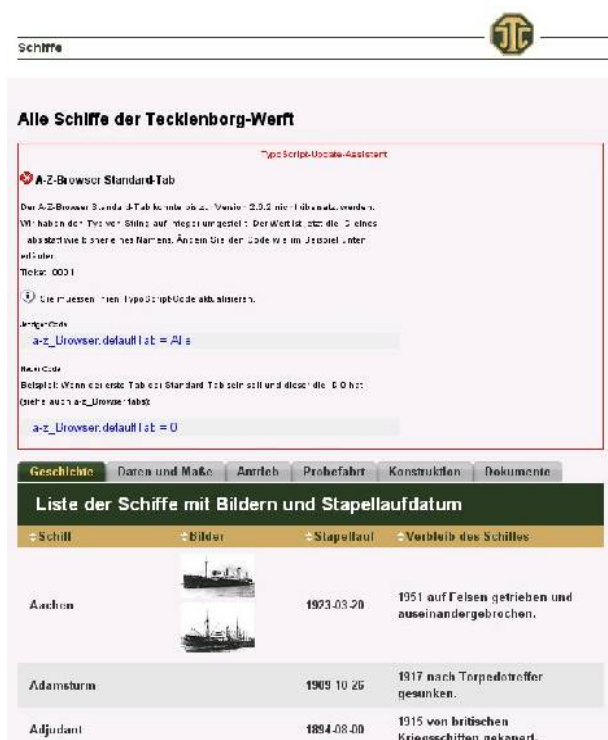


Illustration 37: Report in the Frontend.

## From version < 3.5

### Valid HTML Forms

**If you are using HTML templates, which are provided by the browser, you don't have to care about the lines below.**

**If you are using your own templates, please check, if you have to adapt some configurations.**

The selectbox for ordering records has now a valid HTML code.

Because of this there are several changes:

- res/default\_ul.tmpl got a new template with the marker `###TEMPLATE_SELECTBOX_VALID###`
- res/sample/tt\_news/default.tmpl got a new template with the marker `###TEMPLATE_SELECTBOX_VALID###`

If you are using an old template with the marker `###TEMPLATE_SELECTBOX###`, please add the code from a default template with the marker `###TEMPLATE_SELECTBOX_VALID###` to your template. The browser will take this code for your selectbox.

Some values in the TypoScript are changed. See

```
plugin.tx_browser_pi1 {
    displayList {
        selectBox_orderBy {
            ...
        }
    }
}
```

Search for comments "... upto 3.4.5"

### AJAX

Because of the new AJAX module is some code added to the HTML templates. If you want to use AJAX with your own "old" templates, please take a look in the tutorial AJAX:

- Browser Tutorial AJAX (en)  
[http://typo3.org/extensions/repository/view/browser\\_tut\\_ajax\\_en/current/](http://typo3.org/extensions/repository/view/browser_tut_ajax_en/current/)

### Default Templates

We kicked off the template `###TEMPLATE_SINGLE_IMGTXT###`

## From version < 3.0

### TypoScript Update Assistant

Use the TypoScript Update Assistant (see below).



## Save the Plugin

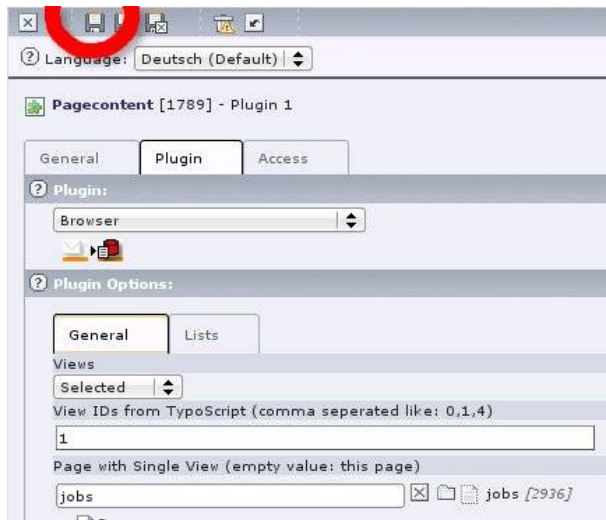


Illustration 38: Save the Plugin

Please save the plugin. The Browser will miss datas without saving. I.e.: The a-z-browser won't be displayed probably.

## Constants Editor

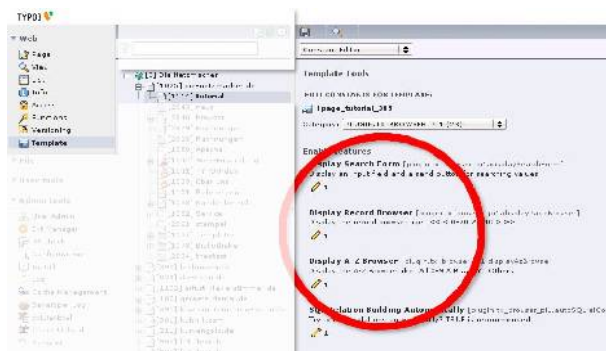


Illustration 39: Constants Editor

Some TypoScript properties are moving to the plugin. The constants editor lost:

- displaySearchForm
- displayPageBrowser
- displayAzBrowser
- autoSQLrelSimple
- autoSQLrelMM

## Backbutton

The backbutton has the stdWrap property from version 3.0.

The backbutton in a single view was a qualified URL back to the list view up to version < 3.0. Now it is a Javascript link: It is quicker and we don't have trouble with piVars like the sword, which will generates an unwanted URL with all sword values back to a list view.

```
plugin.tx_browser_pi1 {
    displaySingle {
        display {
            backbutton = 1
            backbutton {
                data = LLL:EXT:browser/pi1/locallang.xml:back
                wrap = <a href="javascript:history.back()">|</a>
            }
        }
    }
}
```

The locallang.xml value back become new values





- "Back to the list view" became "Back"
- "Zurueck zur Liste" became "Zurueck"

## Self-defined markers

We extended the browser with self-defined markers. If you don't want use the default configuration please

1. delete in the default template (file: static/setup.txt)
  1. the self-defined marker `###TITLE###`
  2. the reset button, if you don't want any reset button.
2. delete in the static template
  1. the whole marker array

```
plugin.tx_browser_pi1.marker >
```

2. or markers in particular.

```
plugin.tx_browser_pi1.marker.my_title >
plugin.tx_browser_pi1.marker.my_url >
plugin.tx_browser_pi1.marker.my_reset >
```

## Security

There is a new array `advanced.security`.

- A sword word need now three chars at least.
- The %-char gets an slash.

If you don't like this new behavior, please configure the `security.sword` array

```
plugin.tx_browser_pi1.advanced {
    security {
        sword {
            minLenWord = 3
            addSlashes {
                csvChars = %
            }
        }
    }
}
```



## FAQ

### Is there a Cache Management?

Yes, the Browser uses the TYPO3 cache management.

### May I use SimulateStaticDocuments and Real URL?

Yes, you may use SimulateStaticDocuments or Real URL.

There is a template example for Real URL for the file locallang.php. See the Tutorial Real URL.

### May I share the Browser with TemplaVoila?

Yes. The Browser is a frontend plugin. You can use it within TemplaVoila like any other frontend plugin.

### Web Accessibility Initiative (WAI)

Browser uses tables for the list views and the single views. The tables are according to the guidelines of the Web Accessibility Initiative (WAI). Tables have a summary and uses the tags caption, thead, th and tbody.

Example code:

```
...
<table summary="Liste von Nachrichten mit Überschriften und Kategorien">
  <caption>Überschriften und Kategorien</caption>
  <thead>
    <tr>
      <th class="cell-0">...</th>
      ...
    </tr>
  </thead>
  <tbody>
    <tr>
      <td class ...
```

### Is it possible to search in fields, which aren't displayed?

Yes, you can search in table fields, which aren't displayed in the frontend. Use the TS property "search". See the Tutorial Search.

### May I use the TYPO3 Indexed Search Machine?

Yes, please add the HTML search comments in the HTML template, if you want to use indexed search.

### Is the extension UTF-8 secure?

Yes, it should be.

### It seems that I have a problem with UTF-8 and Time Stamps

The Browser uses the PHP method strftime for format time stamps into a human readable format.

The Browser alter the result of the method from UTF-8 to ISO, if there are special signs like German Umlaute (Ä, Ö, Ü, ß) and if they are stored in UTF-8.

If you have any problem with the display of formatted time stamps and special signs, please deactivate the TypoScript property:

```
plugin.tx_browser_pi1 {
  format {
    strftime {
      utf8_encode = 0
    }
  }
}
```



## It's possible, that devlog doesn't display all logs?

Yes it is.

Devlog is processing 1.000 logs at most in the default configuration.

This protects the space of the SQL database.

If you want enjoy all logs of the Development Reporting System (DRS), please increase the value for maximum rows in the devlog extension (see "Configuring devlog" on page 19).

## May I use the PHP Multi Byte Overload?

Please, don't use it.

Background: The Browser use PHP string functions of course. Some aren't multi-byte secure like strlen() and some others are multi-byte-secure like mb\_strlen(). It's possible to overload the non secure string functions with the secure multi-byte functions. Please don't use this feature. You will get trouble in a multi byte environment:

- The A-Z-Browser won't be working proper.

The PHP property mbstring.func\_overload has to be 0 - this is the default in your php.ini.



# Credits



Illustration 40: Deutscher Journalisten-Verband  
<http://www.djv.de/>



Illustration 41: dorn & malag  
<http://www.dorn-malag.de/>



Illustration 42: netresearch  
<http://www.netresearch.de/>



Illustration 43: LEG Thüringen  
<http://www.leg-thueringen.de/>



Illustration 44: Pädagogische Hochschule  
 Zentralschweiz, <http://www.phz.ch/>



Illustration 45: Poseidon AG  
<http://www.poseidon-ag.eu/>



Illustration 46: Stadtverwaltung Weimar, City  
 Council of Weimar - <http://stadt.weimar.de/>



Illustration 47: Tritum Internetdienstleistungen  
<http://tritung.de>



Illustration 48: VCA - Vinos de Aragón  
<http://vca-vinos.com>



## Sponsors

Do you like to sponsor the Browser? Please visit:

- <http://typo3-browser.de/sponsoring/>

## Thanks to ...

... the following companies or private persons for sponsoring:



Illustration 49: Freemedia

<http://freemedia.ch/>

Freemedia sponsors just for fun.

Freemedia sponsors a part of the record browser



# Helpful suggestions

## Forum

If you have helpful suggestions, feel free to publish any question, bug or code snippet on

- <http://typo3-browser-forum.de/>

Posts are welcome in English and German.

## New Features and Bug Reports

You are welcome to post any question, bug or code snippet on TYPO3 forge.

Here you find feature announcements and bug reports.

See

- <http://forge.typo3.org/projects/show/extension-browser>

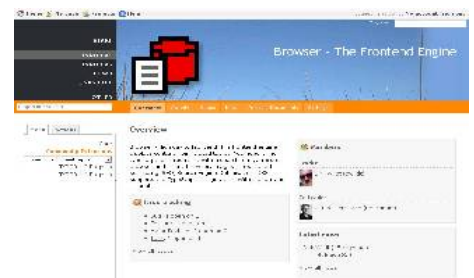


Illustration 50: TYPO3 Forge



## To-Do List

- Document autoconfig.
- If markers are used recursive, there won't have any colored sword in recursive content.
- If swords are appears in tags, they don't shouldn't wrapped.





# Further Information

## About the plugin icon














Illustration 51: The logo

The concept of the icon:

- The cylinder is the common symbol for a database.
- The sheet is a symbol for the frontend.
- The color of the stripe, orange, is the color of the corporate design of Die Netzmacher, the company which created the extension Browser.

## Other extensions published by Die Netzmacher

-  Green Cars (Grüne Autos) - Database optimized for ecological cars. It is a case study and demonstrates, how to get a complex database with the Browser in three hours only.  
[http://typo3.org/extensions/repository/view/green\\_cars/current/](http://typo3.org/extensions/repository/view/green_cars/current/)
-  Jobmarket is a catalogue with job offers. Views, the a-z-browser, the page-browser, the search, social bookmarks and a lot of other stuff can configured by the Browser plugin with the mouse. Job Market hasn't any PHP code, it should be easy to adapt it to your needs.  
[http://typo3.org/extensions/repository/view/job\\_market/current/](http://typo3.org/extensions/repository/view/job_market/current/)
-  Juridat - Database for Juridical Data. Juridat provides a juridical data base with backend functionality. Juridat is out of the box. It is a teamwork with the Browser.  
<http://typo3.org/extensions/repository/view/juridat/current/>
-  logical\_form: A frontend plugin for evaluating forms. I.e you can evaluate mail addresses.  
[http://typo3.org/extensions/repository/view/logical\\_form/current/](http://typo3.org/extensions/repository/view/logical_form/current/)
-  Majordomo: For subscribing to and unsubscribing from a majordomo mailing list.  
<http://typo3.org/extensions/repository/view/majordomo/current/>
-  Organiser provides a lot of features for handle news, events, staff, headquarters, locations, repertoire, workshops and a calendar. Sell your online tickets! Available from April of 2011  
<http://typo3-organiser.de/>
-  Quick Shop (extkey: quick\_shop): The fastest shop in the history of TYPO3. Install it with one mouse click only! Quick Shop is based on the Browser and powermail.  
[http://typo3.org/extensions/repository/view/quick\\_shop/current/](http://typo3.org/extensions/repository/view/quick_shop/current/)
-  seo\_dynamic\_tag: Search Engine Optimisation. You can generate values dynamically with this extension especially for the <title>-tag, for the <meta>-tag description and the <meta>-tag keywords.  
[http://typo3.org/extensions/repository/view/seo\\_dynamic\\_tag/current/](http://typo3.org/extensions/repository/view/seo_dynamic_tag/current/)
-  TSconfig Pages and Users by extManager (extkey: tsconf): Configure the the eight most commonly used TSconfig porperties with the mouse - like page tree uids, activated extended view, activated clipboard, ...  
<http://typo3.org/extensions/repository/view/tsconf/current/>
-  tt\_news select configuration (extkey: ttnews\_selectconf) enables to select tt\_news by any SQL clause. The extension adds an andWhere clause to the SQL query of the tt\_news plugin. I. e. it is possible to display tt\_news items in dependence on the ownership of a fe\_user.  
[http://typo3.org/extensions/repository/view/ttnews\\_selectconf/current/](http://typo3.org/extensions/repository/view/ttnews_selectconf/current/)
-  Wine Catalogue provides a data base for wine with regions, wineries, styles, variety and ageing among others. It is localized. English, German and Spanish ist of the box. Wine based on the extension Browser.  
<http://typo3.org/extensions/repository/view/wine/current/>



## About the Authors

### Dirk Wildt

Leader

Did the job of complete integration into the Browser.



Illustration 52: Dirk Wildt a little bit blurred

Dirk Wildt (\* 1963 Hamburg/Germany)

Founder of [Die Netzmacher](#) (Erfurt/Weimar)

Founder of [TYPO3 Usergroup Thuringia](#)

Member of [TYPO3 Usergroup Leipzig](#)

2003: Founding [think visually!](#) It is [Die Netzmacher](#) since 2009.

2000 - 2002: Financial Controller, G.E.B.B

1999 - 2000: Financial Controller, G|M|Z - Tagesspiegel-Gruppe

1997 - 1999: Spokesman, [Senatsverwaltung für Finanzen](#), Berlin

1989 - 1997: Editor and Financial Controller, [taz](#), [die tageszeitung](#)

1982 - 1989: Freelancing Press Photographer

### Ulfried Herrmann

Member



Illustration 53: Ulfried Herrmann

Ulfried Herrmann (\* 1981 Ilmenau/Germany)

Founder of [Die Netzmacher GbR](#) (Erfurt/Weimar)

Founder of [TYPO3 Usergroup Thuringia](#)

Member of [TYPO3 Usergroup Leipzig](#)

2009: Founding [Die Netzmacher GbR](#)

2001: Founding [yellow label](#)

### Frank Sander

Member

Did the job of the AJAX development and the basic integration into the Browser.



Illustration 54: Frank Sander

Frank Sander (\* 1972 Düsseldorf/Germany)

Co-Founder of [Wilder Jäger Mediengestaltung](#)

since 2001: [Wilder Jäger Mediengestaltung](#)

# Change Log

3.7.0

## New Features

- \* #27041: Record browser for the single view / Prev-next Switcher in the single view
  - \* single views got the marker `###RECORD_BROWSER###` in the HTML templates
  - \* Affected files:
    - \* res/default.tmpl
    - \* res/default\_ul.tmpl
    - \* res/sample/tt\_news/default.tmpl
  - \* Changes in TypoScript
    - \* a-z\_Browser moved to navigation.a-z\_Browser
    - \* modeSelector moved to navigation.modeSelector
    - \* pageBrowser moved to navigation.pageBrowser
    - \* plugin moved to flexform
- \* #28657: Development feature: Make empty markers replaceable

## Development

- \* #28562: Integration of the completely UI (User Interface) 1.8.14 from <http://jqueryui.com/themeroller/>  
This feature will be integrated completely and documented in 4.0.0!
  - \* Affected files:
    - \* res/default.tmpl
    - \* res/default\_ul.tmpl
    - \* res/sample/tt\_news/default.tmpl

## Update

- \* #00000 jQuery library 1.6 -> 1.6.2

## Miscellaneous

- \* #00000: PHP: substitute\_marker() is moved to substitute\_tablefield\_marker()

## Bugfixes

- \* #28878: Empty list at start: Form is empty for ever
- \* #28855: Broken RSS-Feed
- \* #28856: RSS template had a wrong marker (tt\_news sample)

3.6.5

## New Feature

- \* 13429: Embedding jquery and other javascript code is controlled by the flexform

## Bugfixing

- \* 00000: Hook row\_single\_consolidated didn't update the result proper  
effected file: class.tx\_browser\_pi1\_template.php

3.6.4

## New Feature

- 13920: Area and interval: get parameters with date

## Bugfixing

- 13930: Socialmedia: Alias for showuid isn't handled
- 00000: Calender: first row got wrong values while filtering

3.6.3

## New Feature

- 13803: Ordering children record

## Bugfix

- 13807: Single view: Childrens aren't divided proper

3.6.2

## New Features

- \* 13597: TypoScript snippet for additional parameters
- \* 13145: Number formats: userfunc
- \* 12813: Added hook rows\_filter\_options
- \* 12723: Added hooks BR\_TemplateElementsHook and BR\_TemplateElementsTransformedHook  
Thanks to Martin Bless
- \* 12367: Disable wrapInPiBase by TypoScript

## Bugfixes

- \* 13573: Localisation: proper handle of languageField and transOrigPointerField
- \* 13505: Empty AND in some localization context
- \* 13464: foreach( ... ) is moved to foreach((array) ... )
- \* 13008: Workflow divider will not be consolidated

## Maintenance

- \* 12310: Better error message for "Recursion Guard: Recursion is bigger than 0"
- \* 12813: Hook rows\_filter\_consolidated is moved to rows\_filter\_values
- \* 00000: Integration of Tutorial Development in the tutorial list (pi3). Revision 43139
- \* 00000: Integration of Tutorial TCA in the tutorial list (pi3). Revision 43139

## Consolidation



- \* 00000: substitute\_t3globals\_rekurs() was double: in marker and in zz  
substitute\_t3globals\_rekurs() is removed in marker
- \* 00000: get\_t3globals\_value() was double: in marker and in zz  
get\_t3globals\_value() is removed in marker
- \* 00000: session\_marker() was double: in marker and in zz  
session\_marker() is removed in zz
- \* 00000: substitute\_marker\_rekurs() was double: in marker and in zz  
substitute\_marker\_rekurs() is removed in zz

### 3.6.1 svn revision 43034

#### **New Features**

- 12756: Images got full tt\_content support
- 12707: Dynamic states/zones in the TCA backend
- 12528: Don't remove empty marker in TypoScript by default  
TypoScript is effected: new property:  
- advanced.downgrade.3\_6\_0.marker.in\_tposcript.remove\_emptyMarker = 0
- 12472: Constant markers should be COA able
- 12006: Simulate a single record with its uid in a list view plugin
- 12005: Blank the manual sort field by TypoScript configuration
- 11981: Name views in TypoScript
- 11603: Configuration to hide rows with empty values  
Thanks to Paedagogische Hochschule Zentralschweiz, <http://www.phz.ch/>, who has ordered this feature

#### **Bugfixes**

- 12471: general\_stdWrap isn't local
- 11973: DRS reported autoconfig.consolidation.sql.rows.unique is FALSE && true at the same time.  
Thanks to Christian Weiske / netresearch.de for bug report and code for fixing
- 11886: Search does not work with multiple plugins on the same page  
Thanks to Christian Weiske / netresearch.de for bug report and code for fixing
- 11870: orderBy ( SUBSTRING(field FROM 3)) does not work  
Thanks to Christian Weiske / netresearch.de for bug report and code for fixing
- 11844: Filter: local table without value in select box
- 11785: Hooks are moved on the top in pi1/class.tx\_browser\_pi1\_template.php

#### **Tasks**

- 11847: OrderBy box: proper selected
- 11846: Integrate hook tutorial

### 3.6.0 **New Features**

- 11785: Hooks
- 11650: Simple relations: Configurable foreign table field. Thanks to cweiske
- 11580: Configurable: Should the search respect filters?
- 11523: Hide the update report for public
- 11402: Filter for areas
- 11401: Filter for local table
- 11211: Wrap for image and image caption with the image number
- 11204: If a record hasn't any image, a alternate image will be displayed by default
- 8807: Category Menu

#### **Task**

- 10858: Conflict between page browser and views

#### **Bugfixes**

- 11579: Unproper sword test fails in case of \_GET
- 11430: bug in whereClause bugfix: " AND " gets unconditionally removed. Thanks to cweiske
- 11429: no enablecolumns (enablefields) leads to sql error. Thanks to cweiske
- 11418: Wrong error message: "You didn't have uploaded any template!" Thanks to cweiske
- 11407: Ordering filter items hasn't any effect
- 10762: ###CLASS### won't be replaced
- 00000: Only one filter was handled (Version 3.5.903)

### 3.5.0 **New Features**

- 10221: RSS-Feed
- 9659: AJAX support, plugin tab [AJAX]  
- default.tmpl, default\_ul.tmpl, sample\_ttnews.tmpl  
- reset button got the class reset  
- listarea is wrapped with <div class="listarea">...</div>
- 8335: Filter with multiple select
- 8337: Filter with checkbox and radio buttons
- 9408: Display the number of hits in the filter items

- 10171: Plugin tab [Search / Filter]
- 10172: Plugin tab [development]

**Improvements**

- 00000: Improved templating
- 00000: Manual completely revised
- 00000: New tutorials AJAX, RSS, tt\_news\_sample
- 00000: Some tutorials revised

**Maintenance**

- 00000: template ###TEMPLATE\_SINGLE\_IMGTXT### is removed

3.4.5 **New Features**

- 10116: Array Advanced is local too
- 10067: Wizard Icons

**Bugfixes**

- 10111: Human readable format changes sql query
- 10054: A-Z-Browser: Default Tab doesn't get selected property

3.4.4 **New Features**

- 9917: Selecting a random sample from a set of rows. Browser Plugin no cache.
- 9879: Enable local autoconfiguration array (for each plugin)
- 9838: Simplifying relation building. Enabling several relations to one foreign table.

**Bugfixes**

- 9872: multisort\_mm\_children fails in case of one children

**Maintenance**

- 9860: Consolidation Code

3.4.3 **New Features**

- 9727: Order children records in a single view by mm sorting
- 9697: Relation building: Extend it for MM\_opposite\_field

**Improvements**

- 0000: TCA default label detection is extended in TypoScript and Plugin
  - imagecaption, imageseo, documents
- 9695: Plugin [Templating] field [data query]: Empty value is missing

**Bugfixes**

- 9708: ereg\_replace PHP 5.3 instead of preg\_replace
- 9689: Plugin template isn't view secure
- 9596: Several Plugins +++ Social Bookmarks are missing

**Credits**

- 9708: to Thomas Rehloff for preg\_replace <> ereg\_replace (PHP 5.3)

3.4.2 **New Features**

- 9683: Selectable list views from TypoScript in the plugin
- 9599: Manual configuring of piVar showuid
- 9461: tt\_news-sample-template available by the plugin
- 9458: Destination pid for search form
- Browser got a favicon.ico. See /res/favicon.ico

**Suggestion**

- 9495: pagebrowser pointer in new search
- 9419: Upload Folder with auto slash
- 8434: Group list of values in single view

**Bugfixes**

- 9418: Wrong path to the upoad folder
- 9024: Fix was lost from 3.4.1 dev to 3.4.1 publish
- 8589: Fix was lost from 3.4.1 dev to 3.4.1 publish
- 8856: Fix was lost from 3.4.1 dev to 3.4.1 publish
- 8368: Fix was lost from 3.4.1 dev to 3.4.1 publish
- 8333: Fix was lost from 3.4.1 dev to 3.4.1 publish

**Credits**

- Thanks to Frank Sander for the code snippets: #8333, #8434, #9495, #9495

3.4.1 **New Feature**

- 9026: Editors are enabled to select layouts / TypoScript snippets by drop down menu
- 8856: First/Last/Odd/Even Classes for Items

**Bugfixes**

- 9025: Records won't be consolidated proper
- 9024: Filter and localization: default language only
- 8589: Javascript error message if no single view is configured needs to be encoded

- 8523: Localized children records won't be grouped
- 8368: Filters in URL to singleview -> overwriting tablefields
- 8333: special chars in A-Z Browser's item Pivar and class
- 0000: array\_keys(): The first argument should be an array in class.tx\_browser\_pi1\_zz.php line 1548

#### 3.4.0 **New Feature**

- Social Media: Support for publishing data with Social Bookmarks

##### **Bugfix**

- 8553: Filter doesn't look for pid list
- 8343: first tablerow contains ###CLASS##

#### 3.3.7 **New Features**

- groupBy: Field got the stdWrap property
- Query parts got the stdWrap property
- Override options for select, from, where, andWhere, orderBy and groupBy

#### 3.3.6 **Bugfix**

- wrapper.php: \$this->pObj->arr\_children\_to\_devide will handle as array only
- zz.php: \$this->pObj->arr\_children\_to\_devide will handle as array only

#### 3.3.5 **Improvements**

- Plugin: Tab [Advanced] moved to [Marker & RealUrl]
- The section RealUrl enables to configure, if parameters should be used in links to a single view or not.
- Plugin: Tab [Listview] enables to configure, if swords should be colored in single views
- TypoScript code is shrinking

#### 3.3.4 **New Feature**

- Multiple Plugins: Each plugin is enabled to handle the piVars from any other plugin.

##### **Bugfix**

- Multiple plugins displayed alls views in single mode
- Colored swords: Swords didn't get any color in a single view

#### 3.3.3 **New Features**

- Children got a TypoScript configuration child by child
- The new TypoScript property localTable.showUid4TableField enables a select query with the showuid for a foreign table

##### **Development**

- TypoScript property is removed: advanced.development.version.3\_1\_0.orderByPHP

#### 3.3.2 **Improvement**

- 7730: Search with manual wildcards is enabled

#### 3.3.1 **Bugfix**

- Invalid argument supplied for foreach() in class.tx\_browser\_pi1\_sql\_functions.php on line 2245

#### 3.3.0 **New Features**

- Data can display by groups in list views
- Plugin got the registers [Templating] and [TCA]

##### **Improvements**

- Ordering by php: database fields will be evaluated for an automatic setting of SORT\_STRING and SORT\_NUMERIC.
- The properties in the TCA will be evaluated and the field types in the database will be evaluated.
- Ordering by any sorting field is now possible.
- 7529: Items in select boxes of the filters became XHTML conform: htmlspecialchars is true by default
- TypoScript property: advanced.sql.devider.childrenRecords  
Devider between values of children records can be configured by TypoScript

##### **Bugfixes**

- 7582: Conflict between default tab of a-z-browser and empty list by start
- 7159: Filter: Select boxes got the same id
- 7264: Filter: SQL query had a wrong order of order and group
- 7526: Index browser: Tab [All] didn't keep piVars in mind
- 6776: timestamps weren't rendered as timestamps in some cases

#### 3.2.1 **New Features**

- Section Check List in the Manual

##### **Improvements**

- Check List is enhanced in the plugin

##### **Bugfix**

- 6468, #6518: desc becomes DESC in fieldnames



- 3.2.0 **New Subversion**
  - New Features
  - Plugin Browser-Tutorials
  - Plugins got the tab Check-List
  - Bugfix
  - 6468: Conflict between asc or desc and similar field names
- 3.1.6 **Improvement**
  - Search is extended with operators "and" and "not".**Bugfix**
  - 5273: The default A-Z-tab isn't displayed in URL now  
See Reference: plugin.tx\_browser\_pi1.a-z\_Browser.defaultTab.display\_in\_url
  - 5945, #6363: CSS/A-Z-Browser: All tabs were last tabs**Improvement**
  - displayList.display.searchform.resultPhrase.searchFor.and moved to displayList.display.searchform.and
  - a-z\_Browser.defaultTab.realURL moved to a-z\_Browser.defaultTab.display\_in\_url
- 3.1.5 **Update Manual**
  - Illustrations and link to the Case Study "Grüne Autos"**Bugfix**
  - 5922: PHP array error in context with missing filters**Improvement**
  - Marker ###minLenSword### moved to ###advanced.security.sword.minLenWord###
- 3.1.4 **Improvement**
  - Plugin got the limit field
  - Enabling the using of tables with translated fields in case of default language
  - EmptyPageAtStart: PageBrowser won't be displayed
  - ###SINGLEPID### is a system marker
  - pageBrowser.results\_at\_a\_time is replaced by the plugin
  - Foreign tables can get their own pidList: See foreignTables.your\_table.csvPidList
  - Plugin value titleWrap got priority over TypoScript value
  - RealURL, search and filter are maintained
- 3.1.3 **Update Manual**
  - Adding missing images and adding a key image
- 3.1.2 **New Features**
  - The design of individual designs is simplified: You can use every database marker in the HTML code of list and single views. See the new tutorial below.
  - Select box for ordering records
  - TYPO3 \$GLOBALS are accessible from TypoScript. Markers will be replaced with their values**New Tutorial**
  - Browser Tutorial Marker en: Design your own layout.**Improvement**
  - default.tmpl and default\_ul.tmpl are extended with the subpart ###TEMPLATE\_SELECTBOX###
  - Search: resultphrase is extended with the minLen hint**Bugfixing**
  - Some columns left empty in list views under certain conditions
- 3.0.5 **Improvement**
  - piVar azTab is removed, if there isn't used any a-z-browser**Bugfix**
  - Localization
  - Orthography and syntax mistakes with exclude and mergeIfNotBlank
  - Counting mismatch for plugins
  - Replace bug in case of localization but non localized foreign tables
- 3.0.4 **Development**
  - Filters got the override property for select, from and groupBy
- 3.0.3 **Development**
  - mtime() is used upto TYPO3 4.2, getDifferenceToStarttime() is used from TYPO3 4.3
  - Update PHP API data**Bugfix**
  - Adding \$GLOBALS['TSFE']->includeTCA()
- 3.0.2 **Maintenance**





- Browser suggests to install the Tutorial Browser and Development Log.

### 3.0.1 **Major Version Release**

#### **New Features**

- Multiple Plugins
  - Browser Plugins are unlimited on every page
- Localization
  - Browser can handle localized records
- Filter
  - You can add selectboxes to the search field
- Flexform
  - You can configure some properties with the Browser plugin and without TypoScript
- TypoScript Update Assistant
- Consolidation
  - Browser will display only one record in the result list even if there a more than one children record. Values of children records will become a CSV list.
- Single views display 1:n relations
- A-Z-Browser tabs got the stdWrap property
- Security
  - Enhanced security handling of piVars

### 2.6.9 **Development**

Results got the limit property

#### **Maintenance**

Browser for Virtual Civil Services got an own extension key.

### 2.6.8 **Status**

Changed from alpha to beta

#### **Development**

Simple relations become proper

Some Properties moved from TypoScript to the Plugin

### 2.6.6 **Maintenance**

Browser for BZD Staff Directory got an own extension key

### 2.6.4 **Maintenance**

Localization Development

TypoScript

- a-z\_Browser.defaultTab: Type is changed from string to integer.  
Value is now the key of the default tab and not the name.

### 2.5.9 **Maintenance**

devlog

### 2.5.5 **Maintenance**

We removed the TypoScript porperty (array): views.[list || single].X.override.

Clean up PHP code

### 2.3.8 **Maintenance**

Update manual and tutorial files

### 2.3.7 **Maintenance**

Simplification of real URL configuration

### 2.3.6 **Bugfixing**

In case of simulateStaticDocuments there was a URL rewriting with a double host

### 2.3.5 **Maintenance**

Extending the A-Z-Browser with the defaultTabWrap property

Extending SQL manual mode for single views

Integration of the function hierarchically order

#### **Documentation**

Extending the manual with an example for

- the synonym function
- switching the HTML default template

#### **Templating**

Extending the browser with a second template default\_ul.tmpl.

It wraps lists as unordered lists instead of tables.

#### **Bugfixing**





There wasn't any error message in case of a missing select property but an empty content  
###UID### and ###PID\_LIST### weren't replaced in andWhere clauses in SQL auto mode

#### 2.3.4 **Maintenance**

Update the manual

#### 2.3.3 **Maintenance**

Simplifying the SQL query in case there is a configured search but there isn't any sword

##### **Bugfixing**

There was a bug in case of using relation.mm and LEFT JOIN and more than two related tables.  
There was a bug with handleAs['document']

#### 2.3.1 **New Features**

Synonyms

Hierarchical order

#### 2.2.1 **New Feature**

SQL query definition with JOINS manually

#### 2.1.3 **Maintenance**

A-Z-Browser can process UTF-8 database and multi byte char set in PHP

#### 2.1.1 **New Features**

TT\_CONTAINER

- TypoScript Template Container (TTC). Templating with TypoScript only.

DRS - Development Reporting System

The SEO meta tags title, keywords and description got the TypoScript stdWrap property.

#### 2.0.1 **Major Version Release**

##### **New Features**

SQL override

- You can override the system generated SQL clauses

SELECT, FROM, WHERE and ORDER BY by TypoScript

Warning: Feature is removed with version 2.5.5

Hooks

- You can override any SQL query and result in third party extensions

##### **New Workflow**

SQL: Changing from FULL JOIN to LEFT JOIN.

##### **Maintenance**

HTML-Template: The A-Z-Browser got a <div>-Tag

#### 1.1.3 **Maintenance**

Code cleaning

#### 1.1.2 **Bugfixing**

There was a mistake while counting cells.

CSS classes weren't proper.

#### 1.1.1 **New Feature**

A-Z-Browser. Configurable by TypoScript

TypoScript example in res/a-z\_Browser.txt

##### **Manual**

Updated

##### **Bugfixing**

TCA internal\_type: There was a bug in case of relation and a missing internal\_type field in the TCA

#### 1.0.2 **Publishing**

Browser (extkey: browser)

##### **Improvement**

Error Messages

TCA config.type group

#### 1.0.1 **Major Version Release**

New Tools like SQL Autorelation Building and Field Autowrapping

Renaming

- Browser (extkey: browser)

- Former: Frontend Database Browser (extkey: fe\_db\_browser)

#### 0.1.3 **Bugfixing:** <a>-tag will be wrapped before stdWrap now

#### 0.1.2 **Bugfixing:** Failure in an MySQL-Statement



- 0.1.1     **Development:** Adding the TS property andWhere  
Maintenance: Adding a method index in class.tx\_fedbbrowser\_pi1.php  
Bugfixing: The HTML tag <tbody> was lost.
- 0.1.0     **Development**  
SEO: Search Engine Optimisation  
Real Url: Optimizing  
Adding ext\_php\_api.dat
- 0.0.7     **Optimizing**  
HTML classes, HTML template  
Sorry, the manual missed in 0.0.6
- 0.0.6     **Bugfixing**  
Images were not rendered in list view if there wasn't a single view.
- 0.0.4     **Publishing**  
Frontend Database Browser (extkey: fe\_db\_browser)
- 0.0.1     **Initial release**  
Frontend Database Browser (extkey: fe\_db\_browser)

# Illustration Index

Illustration 1: Amazing - you need one line TypoScript to render an image.....	4
Illustration 2: http://www.affenkoenig.de/.....	4
Illustration 3: http://www.florianleonhard.com.....	4
Illustration 4: http://www.kameramarktplatz.de/.....	4
Illustration 5: http://www.pure-and-simple.ch/.....	4
Illustration 6: http://stadt.weimar.de.....	4
Illustration 7: http://veiligengezondwerken.nl/.....	4
Illustration 8: Tab [General] – You will see prepared TypoScript and HTML templates of your extension and of third party extensions.....	5
Illustration 9: Tab [Social Media]. Add links to social media with one mouse click.....	5
Illustration 10: Tab [Templating] with jQuery UI (User Interfaces). Select a theme with one mouse click (official in version 4.0).....	6
Illustration 11: Tab [Templating] – List of HTML templates after installing the extension Organiser (org).....	6
Illustration 12: PDF-Manual.....	9
Illustration 13: TYPO3 Forge.....	9
Illustration 14: The plugin in the frontend.....	9
Illustration 15: Tutorials Overview on typo3.org.....	10
Illustration 16: Idea, database, kickstarter, Html and online.....	11
Illustration 17: Fastest Shop in the history of TYPO3 - Quick Shop. Build your own web shop based on the Browser.....	11
Illustration 18: The TYPO3-Frontend-Engine Browser Forum.....	11
Illustration 19: Extension Manager.....	12
Illustration 20: The page TT-news with the Browser plugin and an extension template.....	12
Illustration 21: Browser plugin tab [Lists].....	14
Illustration 22: Browser plugin tab [Templating].....	14
Illustration 23: List view.....	15
Illustration 24: Single view.....	15
Illustration 25: Check List in English language.....	18
Illustration 26: Check List in German language.....	18
Illustration 27: DRS - Development Reporting System.....	19
Illustration 28: Maximum number of rows in devlog.....	19
Illustration 29: SQL statements.....	20
Illustration 30: Logs for missing items in the _LOCAL_LANG array.....	21
Illustration 31: Named views (ext: org).....	52
Illustration 32: Common way of TYPO3 extension development.....	55
Illustration 33: TYPO3 extension development with the Browser.....	55
Illustration 34: Workflow with civserv and the template engine Smarty .....	56
Illustration 35: Workflow with civserv and with the frontend engine Browser.....	56
Illustration 36: Check TypoScript Code after Update?.....	58
Illustration 37: Report in the Frontend.....	58
Illustration 38: Save the Plugin.....	60
Illustration 39: Constants Editor.....	60
Illustration 40: Deutscher Journalisten-Verband http://www.djv.de/.....	64
Illustration 41: dorn & malag http://www.dorn-malag.de/.....	64
Illustration 42: netresearch http://www.netresearch.de/.....	64
Illustration 43: LEG Thüringen http://www.leg-thueringen.de/.....	64
Illustration 44: Pädagogische Hochschule Zentralschweiz, http://www.phz.ch/.....	64
Illustration 45: Poseidon AG http://www.poseidon-ag.eu/.....	64
Illustration 46: Stadtverwaltung Weimar, City Council of Weimar - http://stadt.weimar.de/.....	64



Illustration 47: Tritum Internetdienstleistungen <a href="http://tritum.de">http://tritum.de</a> .....	64
Illustration 48: VCA - Vinos de Aragón <a href="http://vca-vinos.com">http://vca-vinos.com</a> .....	65
Illustration 49: Freemedia <a href="http://freemedia.ch/">http://freemedia.ch/</a> .....	66
Illustration 50: TYPO3 Forge.....	67
Illustration 51: The logo.....	69
Illustration 52: Dirk Wildt a little bit blurred.....	70
Illustration 53: Ulfried Herrmann.....	70
Illustration 54: Frank Sander.....	70