


## Caddy – responsive Shopping Cart

Caddy is the TYPO3 responsive Shopping Cart. It is optimised for desktops, tablets and smartphones. Caddy is e-commerce for small budget and small-scale enterprises. You are welcome to install Caddy with one mouse-click – ready-to-use. Caddy is the shopping cart of the TYPO3 Quick Shop. You can use caddy for your own needs with your own database and without Quick Shop too.

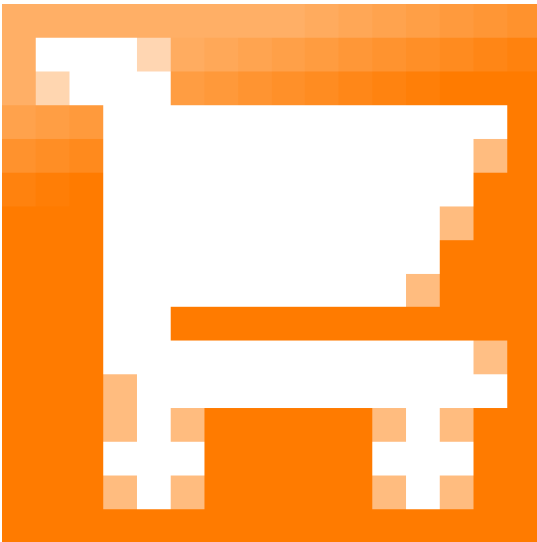

Version: 6.0.12, 2015-04-16

Extension Key: caddy

Language: en

Keywords: caddy, shopping, shop, cart, e-commerce, e-payment, responsive

Copyright 2013-2015, Dirk Wildt, Die Netzmacher, <<http://wildt.at.die-netzmacher.de>>

This document is published under the Open Content License available from <http://www.opencontent.org/opl.shtml>  
The content of this document is related to TYPO3 - a GNU/GPL CMS/Framework available from [www.typo3.org](http://www.typo3.org)

## Table of Contents

Caddy – responsive Shopping Cart .....	1	Individual sum-calculation (by_service_attribute_x_sum) .....	47
Screenshots .....	3	Individual max-calculation (by_service_attribute_x_max) .....	48
Frontend .....	3	Corporate Design .....	49
E-Mail .....	4	Colours .....	49
Backend .....	6	Icons .....	50
Installation .....	7	E-Mail .....	51
Introduction .....	8	HTML Template .....	51
What does Caddy do? .....	8	Attachments .....	52
What doesn't Caddy do? .....	9	Work-flow .....	57
What do you need? .....	9	Add, update and delete an item .....	57
Target Group .....	9	Calculating .....	57
Installation .....	10	Ordering .....	57
Quick Installation .....	10	Variants .....	59
One-Click-Installation (recommended) .....	10	TypoScript Snippet .....	59
Manually Installation (not documented) .....	12	Non possible features .....	63
Responsive Design .....	13	Archive audit proof .....	64
Screenshots .....	13	Database is read-only .....	64
Requirements .....	13	Disable audit proof .....	64
Setup .....	14	Reset numbers .....	65
E-Payment .....	16	Reference .....	66
Screenshots .....	16	Constant Editor .....	66
Requirements .....	17	Setup .....	66
Setup .....	17	Debugging .....	85
Debugging .....	18	DRS – Development Reporting System .....	85
PCI-DSS conform .....	18	Upgrades .....	88
Workflow .....	18	From Caddy 4.x to 6.x .....	88
Plugins .....	20	From Caddy 2.x/3.x to 4.x .....	88
Caddy .....	20	From Powermail 1.x to Powermail 2.x .....	88
Mini Caddy .....	22	From wt_cart 1.x to Caddy 2.x .....	88
Sum Gross .....	23	What's new? .....	89
Controlling Caddy .....	24	Version 6 .....	89
Overview .....	24	Version 4 .....	89
Plugin / Flexform .....	25	Packages for Sponsors .....	91
Static Templates .....	31	Fun – 50 EUR .....	91
Constant Editor .....	32	Logo – 150 EUR .....	91
Constant Editor .....	33	Patron – 500 EUR .....	91
MAIN .....	33	Credits .....	92
BANKACCOUNT .....	33	Made in Nature .....	92
DATABASE .....	34	wt_cart Developer Team .....	92
DEBUG .....	34	Known Bugs .....	93
E-PAYMENT .....	34	PDF Attachments without any address data .....	93
GETPOST .....	35	Required argument "mail" is not set .....	93
HTML .....	36	TCPDF-Error .....	93
Options .....	37	More Bugs .....	93
PAGES .....	38	Further Information .....	94
PDF .....	39	Forum .....	94
SYMBOLS AND SERVICE ATTRIBUTES .....	41	TYPO3 forge .....	94
TAX .....	41	History of Caddy .....	94
TEMPLATES .....	42	Caddy 2.x versus wt_cart 1.x .....	95
URL .....	42	Other extensions published by Die Netzmacher .....	96
Calculating .....	43	Change Log .....	97
Default code .....	43	Illustration Index .....	102
Based on price (by_price) .....	44	Alphabetical Index .....	103
Based on quantity (by_quantity) .....	45		
Based on each (each) .....	46		

# Screenshots

## Frontend

### Responsive

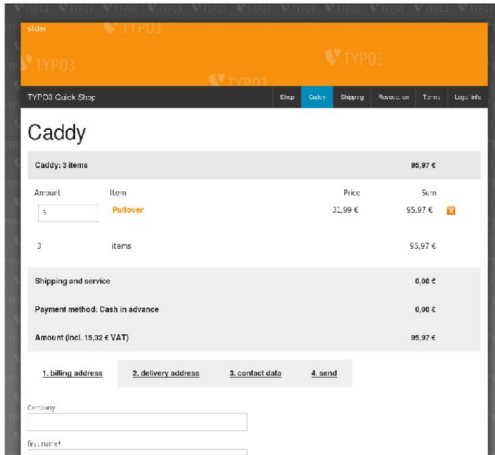


Illustration 4: Caddy on the desktop

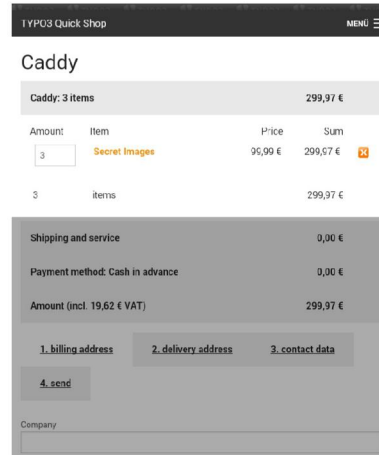


Illustration 5: Caddy with an opened accordion on the smartphone

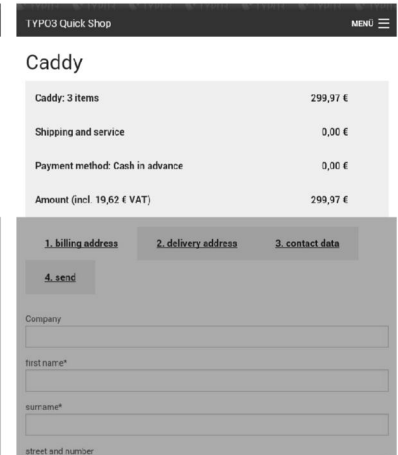


Illustration 6: Caddy with a closed accordion on the smartphone

Illustration 1: Caddy on a desktop and on a smartphone

Live

- <http://typo3-quick-shop.de/warenkorb/>

### E-Payment


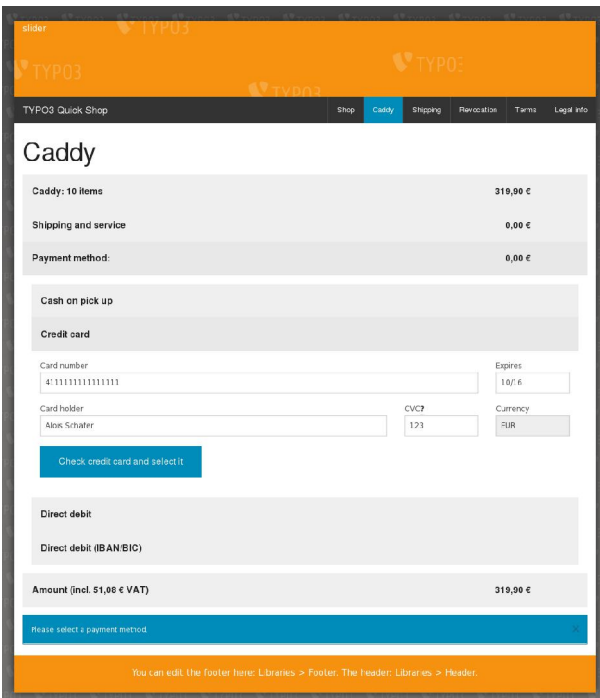


Illustration 2: Caddy with e-payment interface

You can enable an e-payment interface. See requirements and details at "E-Payment" on page 16 below.

# E-Mail

## Confirmation E-Mail

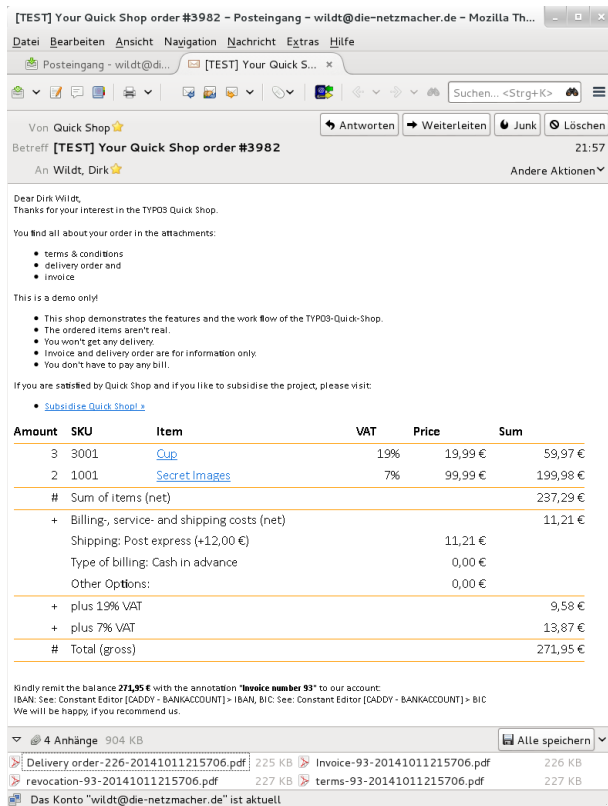

[TEST] Your Quick Shop order #3982 - Posteingang - wildt@die-netzmacher.de - Mozilla Th...

Datei Bearbeiten Ansicht Navigation Nachricht Extras Hilfe

Posteingang - wildt@di... [TEST] Your Quick S...

Von Quick Shop

Betreff: [TEST] Your Quick Shop order #3982

An Wildt, Dirk

21:57

Dear Dirk Wildt,  
Thanks for your interest in the TYPO3 Quick Shop.

You find all about your order in the attachments:

- terms & conditions
- delivery order and
- invoice

This is a demo only!

- This shop demonstrates the features and the work flow of the TYPO3-Quick-Shop.
- The ordered items aren't real.
- You won't get any delivery.
- Invoice and delivery order are for information only.
- You don't have to pay any bill.

If you are satisfied by Quick Shop and if you like to subsidise the project, please visit:

- [Subsidise Quick Shop!](#)

Amount	SKU	Item	VAT	Price	Sum
3	3001	<a href="#">Cup</a>	19%	19,99 €	59,97 €
2	1001	<a href="#">Secret Images</a>	7%	99,99 €	199,98 €
#	Sum of items (net)				237,29 €
+	Billing-, service- and shipping costs (net)				11,21 €
	Shipping: Post express (+12,00 €)				11,21 €
	Type of billing: Cash in advance				0,00 €
	Other Options:				0,00 €
+	plus 19% VAT				9,58 €
+	plus 7% VAT				13,87 €
#	Total (gross)				271,95 €

Kindly remit the balance **271,95 €** with the annotation **"Invoice number 93"** to our account:  
IBAN: See: Constant Editor [CADDY - BANKACCOUNT] > IBAN, BIC: See: Constant Editor [CADDY - BANKACCOUNT] > BIC  
We will be happy, if you recommend us.

4 Anhänge 904 KB

Alle speichern

Delivery order-226-20141011215706.pdf 225 KB

Invoice-93-20141011215706.pdf 226 KB

revocation-93-20141011215706.pdf 227 KB

terms-93-20141011215706.pdf 227 KB

Das Konto "wildt@die-netzmacher.de" ist aktuell

### Illustration 3: Confirmation e-mail

The confirmation e-mail contains:

1. a text
2. the caddy
3. attachments

All is configurable of course.

## Attachments



Illustration 4: The caddy e-mail attachments (here: Quick Shop)

Attachments by default are

- the invoice,
- the delivery order
- the power of revocation and
- the terms and conditions.

The corporate design of the attachments is configurable. See

- "Attachments" on page 52 below.


Customer and vendor can get different attachments. See

- "Plugin / Flexform > PDF" on page 29 below.

## Backend

### Plugin

Edit Page Content "Caddy" on page "Caddy"

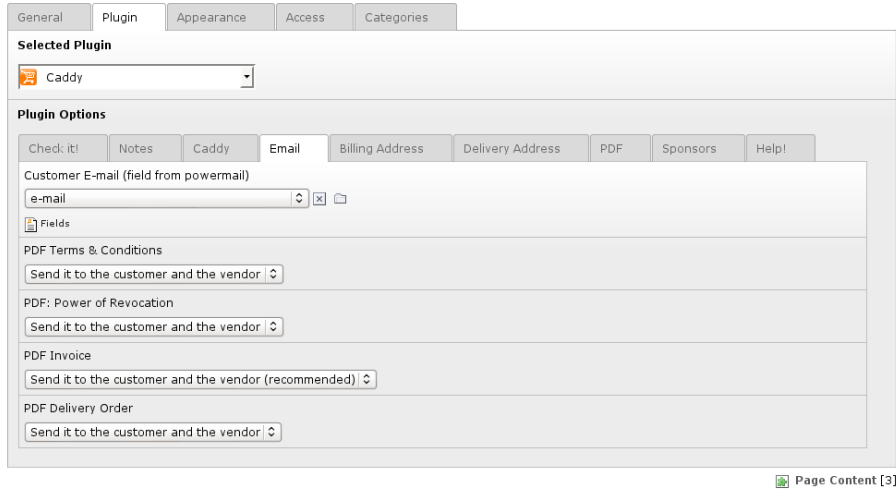

☒ Show secondary options (palettes)

Illustration 5: The caddy plugin.

Caddy has a powerful plugin.

The plugin contains 9 tabs.

The plugin evaluate the configuration of

- the caddy plugin,
- the caddy TypoScript and
- the powermail plugin.

If there is a configuration missing or it is improper, you will get a prompt within the first tab [Check it!]

See details at "Plugin / Flexform" on page 25 below.

## Order Records

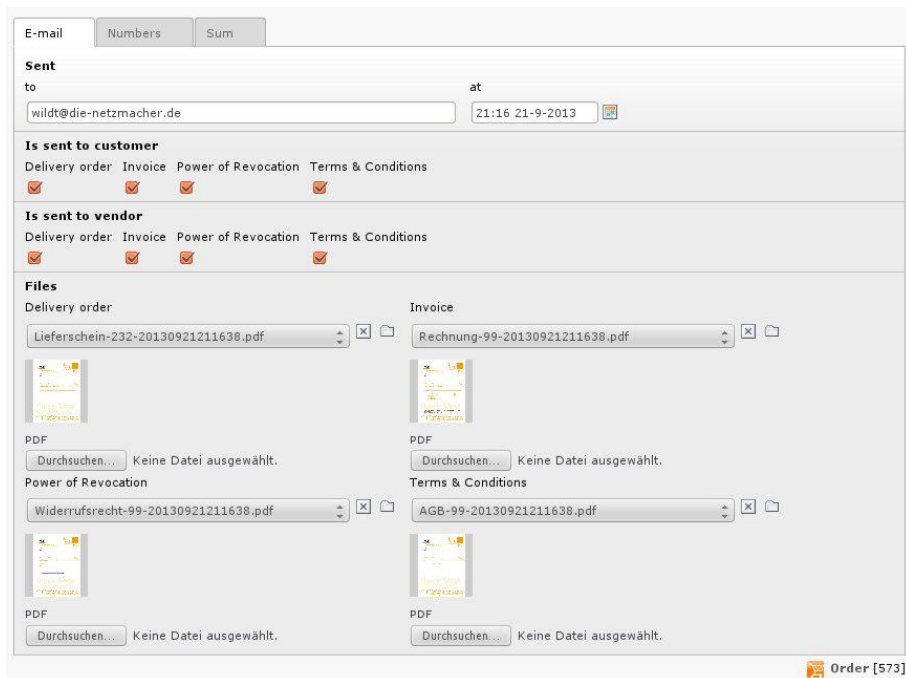


Illustration 6: A caddy order record

Caddy archives each order in a database audit proof.

An order record contains among others

- who got when the confirmation e-mail
- which attachments are sent
  - to the customer and
  - to the vendor
- the sent attachments.

## Installation

### Quick Shop Installation

#### Check extension dependencies

- ✓ autumskontemplate: "Template Analyzer" is loaded.
- ✓ base\_quickshop: "Quick Shop - Template" is loaded.
- ✓ browser: "browser - TYPO3 without PHP" is loaded.
- ✓ caddy: "Caddy - your shopping cart" is loaded.
- ✓ epa\_boastree: "Record tree for TCA" is loaded.
- ✓ powermail: "Powermail" is loaded.
- ✓ quick\_shop: "Quick Shop" is loaded.

#### Start the Installation

- Create a backend group
- Create a page tree
- Create the plugins browser, caddy and powermail
- Create page content
- Create TypoScript for the browser, caddy and powermail
- Create configuration records for powermail
- Create six example items
- Create product images
- Create page content
- Consolidating

Start the Installation

1

2

3

Illustration 7: The Quick Shop Installer enables you, to install Caddy ready-to-use (2+3) with one mouse click (1).

# Introduction

## What does Caddy do?

- Caddy is a shopping cart for TYPO3 extensions.
  - You can use Caddy for selling items, for reserving tickets or for ordering documents among others.
  - Caddy has features like
    - PDF attachments in the e-mail to the customer and the vendor like
      - delivery order, invoice, power of revocation and terms and conditions. See "Attachments" on page 52.
    - minimum and maximum limitations
      - for each item and for all items
    - delivery costs depending on
      - quantity, size, weight
    - variants (one dimension only)
    - a mini cart
  - Responsive
    - Caddy has both designs: the default and the responsive design. See "Responsive Design" on page 13 below.
  - E-payment
    - Caddy has both payment interfaces: the default- and the e-payment-interface. See "E-Payment" on page 16.
  - Caddy archives each order in a database audit proof.
  - Caddy is using powermail for
    - creating order forms and confirmation forms
    - sending e-mails to the customer and the vendor
  - Caddy evaluates the self-configuration and the needed Powermail properties.
  - You can configure the colours of Caddy and Powermail by a user interface.
    - Caddy has ready-to-use templates for the colours
      - blue, green, orange, red.
    - Caddy is delivered with a lot of icons.
  - You can test Caddy in your own TYPO3 instance with one mouse click!
    - The Organiser Installer installs a ready-to-use website with two caddies: one for reserving tickets, the other for ordering documents.
    - The Quick Shop Installer installs a ready-to-use online shop with TYPO3 sample items.
- See "One-Click-Installation (recommended)" on page 10 below.
- Caddy has a powerful debugging:
    - The DRS – the Development Reporting System – prompts the whole work flow to the backend.
    - Another modul prompts TypoScript properties to the frontend.



## What doesn't Caddy do?

Caddy doesn't support features like

- cross selling and
- vouchers

## What do you need?

- Powermail (version 1.x or 2.x<sup>1</sup>)
- t3\_tcpdf
- TYPO3 Foundation, if you like Caddy in responsive design
- Caddy is tested in TYPO3 versions 4.5, 4.6, 4.7, 6.1 and 6.2

## Target Group

- TYPO3 agencies
- TYPO3 integrators
- TYPO3 developers

---

<sup>1</sup> If you are using TYPO3 6.x, powermail version must be 2.x because 1.x version doesn't work with different languages with 6.1. Powermail 2.x seems to be compulsory if the site is not in English.

# Installation

## Quick Installation

- Install Caddy
- Add a page "Caddy" to your page tree:
  - Add a TypoScript extension template.
  - Add a Caddy plugin.
  - Add a Powermail plugin.
- Configure Caddy supported by the Constant Editor.
- Configure Powermail:
  - Add the needed fields.
  - Add the needed fieldsets.
  - Configure the plugin.
- Configure Caddy by the plugin.

## One-Click-Installation (recommended)

The one-click-installation is recommended<sup>1</sup>.

### Advantages

The advantages of the one-click-installations are:

- You will have a minimum of costs for the installation and the configuration:
 

You will need

  - the first time 30 minutes over all and
  - all next times 15 minutes over all.
- You will get a running sample with caddy and without
  - any unproper configuration and
  - any costs for debugging.
- A running sample is the best for understanding.
- You can test all features of caddy immediately. Play with Caddy!
- If something goes wrong and you can't cancel it, it doesn't matter.
  - Waste your installation.
  - Repeat the one-click-installation.

### Work flow for your own needs

- The one-click-installation offers three Caddy samples:
  - for ordering documents<sup>2</sup>
  - for reserving tickets<sup>3</sup>
  - for selling items<sup>4</sup>
- If no one of the three samples doesn't match your needs,
  - waste Caddy,
  - look for another TYPO3 extension, which could match your needs, or

<sup>1</sup> The one-click-installation is obligated only, because there isn't any manual for a manual installation.

<sup>2</sup> See "Organiser Installer" on page 11 below

<sup>3</sup> See "Organiser Installer" on page 11 below

<sup>4</sup> See "Quick Shop Installer" on page 11 below

- develop your own extension.
- If one of the three samples matches your needs,
  - you can move the page with the Caddy within the page tree to your preferred position, and
  - you have to adapt Caddy with the Constant Editor to your needs.

## Organiser Installer

The Organiser Installer installs a ready-to-use Organiser. The Organiser is TYPO3 for the lobby and for the organisers.

The Organiser supports the publishing of documents, events, headquarters, locations, news and staff.

The Organiser contains Caddy twice:

- for reserving tickets for events
- for ordering documents

See

- Organiser <http://typo3-organiser.de/en/>
- Organiser Installer<sup>1</sup> <http://typo3-organiser.de/en/one-click/>

## Quick Shop Installer

### Quick Shop Installation

#### Check extension dependencies

- ✓ automatemigrate: "Template Auto-perser" is loaded.
- ✓ base\_quickshop: "Quick Shop - Template" is loaded.
- ✓ browser: "browser" - TYPO3 without PHP is loaded.
- ✓ caddy: "Caddy" - your shopping cart is loaded.
- ✓ cps\_toastree: "Record tree for TCA" is loaded.
- ✓ powermail: "Powermail" is loaded.
- ✓ quick\_shop: "Quick Shop" is loaded.

#### Start the Installation

- 1 Create a backend group
- 2 Create a page tree
- 3 Create the plug-ins browser, caddy and powermail
- 4 Create page content
- 5 Create TypoScript for the browser, caddy and powermail
- 6 Create configuration records for powermail
- 7 Create six example items
- 8 Create product images
- 9 Create page content
- 10 Coreoidating

Start the Installation

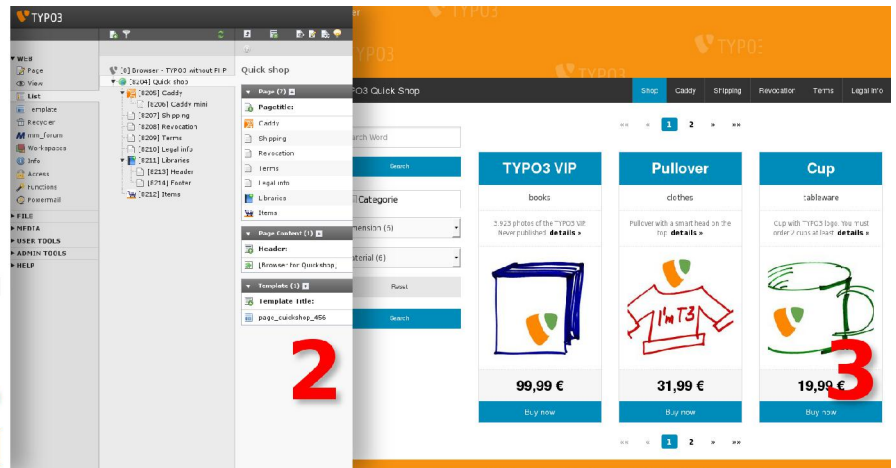


Illustration 8: Quick Shop Installer - Installation with one mouse click

The Quick Shop Installer (1) installs a ready-to-use Quick Shop (2, 3) with one mouse click.

The Quick Shop is a small online shop. It sells TYPO3 items by default like TYPO3 clothes, cups and books. You can use Quick Shop for your own items.

The Quick Shop contains Caddy once:

- for selling items.

See

- Quick Shop <http://typo3-quick-shop.de/en/>
- Quick Shop Installer<sup>2</sup> <http://typo3-quick-shop.de/en/one-click/>



<sup>1</sup> You need the Organiser Installer from version 3.3. I purpose to publish it in September of 2013.

<sup>2</sup> You need the Quick Shop Installer from version 3.3. I purpose to publish it in September of 2013.

## Manually Installation (not documented)

The manually installation of Caddy is complex and isn't recommended. The cause is:

- Caddy isn't a shop.
- Caddy is a shopping cart only.

Because Caddy is a shopping cart only, Caddy has interfaces for third party extensions for

- managing items (done by the Quick Shop, the Organiser or your extension),
- interactive actions with the customer (done by Powermail) and
- for the responsive design.

A manually installation has a lot of possibilities for an improper configuration.

And the manual for a manually installation has a lot of possibilities for improper or missing statements too.

I would be happy, if you are appreciative of a missing documentation for a manually installation.

# Responsive Design

## Screenshots

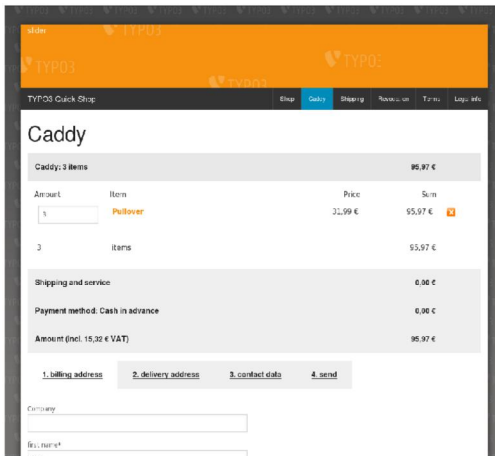


Illustration 4: Caddy on the desktop

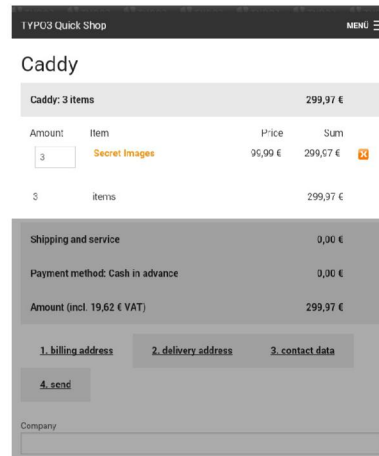


Illustration 5: Caddy with an opened accordion on the smartphone

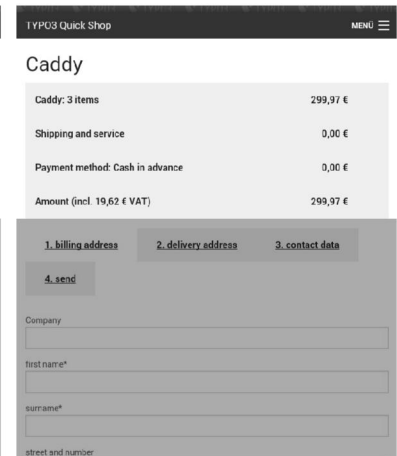


Illustration 6: Caddy with a closed accordion on the smartphone

Illustration 9: Caddy on a desktop and on a smartphone

## Contracted Features

The development of the responsive design was contracted for

- the responsive framework Foundation 4.x, 5.x and
- caddy with Powermail 2.x

Thus you can use caddy responsive ready-to-use with Foundation 4.x, 5.x and Powermail 2.x only.

## Requirements

### Powermail 2.x

Caddy is a team-play with Powermail 1.x or 2.x. If you like to use caddy responsive, you have to use Powermail 2.x.

### TYPO3 6.x

Caddy fits Powermail 2.x in the responsive design of Foundation. The modification isn't compatible with TYPO3 4.x. You need TYPO3 6.x.

## TYPO3 Foundation

If you don't know anything about Foundation or if you don't like to install and configure Foundation manually, you are welcome to use the extension TYPO3 Foundation (t3foundation). The extension has ready-to-use templates for TYPO3.

You don't need to know anything about this, if you want to use Foundation for Caddy only. But if you are interested in detailed information, please take a look here:

- PDF manual: <http://typo3-foundation.de/typo3conf/ext/t3foundation/doc/manual.pdf>
- typo3.org: <http://typo3.org/extensions/repository/view/t3foundation/>

## Setup

If you are using TYPO3 Quick Shop or TYPO3 Organiser, it is recommended to upgrade it to version 6.x. 4.x is running too, but you have to maintain your CSS for caddy.

## Caddy




Illustration 10: Flush System Cache

You have to include static templates (TypoScript).

**You must flush the system caches** before, else updated templates won't displayed in the backend.

If you don't have the menu item [Flush system caches] like in the illustration above, please install the extension TSconfig Pages and Users by extManager (extkey: tsconf) and save the default configuration in the extension manager. Reload your backend, your cache menu will contain the item [Flush system caches].

## Sample page tree

- **TYPO3**
  - Quick Shop [1] <- or your Shop
  - Caddy [2]

## Page with the Shop

This sample is based on Quick Shop.

If you are using your own Shop, take the include-static-templates of your own shop.

Include static (from extensions):

- CSS Styled Content (css\_styled\_content)
- Browser [0] + Foundation Framework (browser)
- Browser [1] Basis (browser)
- Browser [5] + Foundation Templates (browser)
- Caddy [1] Basis (caddy)
- Caddy [2] + CSS (blue) (caddy) only without Foundation<sup>1</sup>
- Caddy [2.1] + orange (caddy)
- Caddy [3] + Foundation 5.x (caddy) only with Foundation<sup>2</sup>
- Caddy [3.1] + Foundation 5.x CSS (caddy) only with Foundation<sup>3</sup>
- Caddy [7] + Language: German (caddy)
- Quick Shop [0] + Template (base\_quickshop)
- Quick Shop [1] Basis (quick\_shop)
- Quick Shop [2] + Caddy (quick\_shop)

You have to setup the table of your database . See Constant Editor [CADDY – DATABASE] > Table.

<sup>1</sup> Without "Browser [0] + Foundation Framework (browser)"

<sup>2</sup> With "Browser [0] + Foundation Framework (browser)" or with any other Foundation Framework

<sup>3</sup> dito

Please check the page ids. See Constant Editor [CADDY – PAGES]

#### Page with Caddy

Include static (from extensions):

- Main Template (powermail)
- Add Demo CSS (powermail)
- Caddy [5] Powermail 2.x (caddy)
- Caddy [5.1] + Powermail 2.x CSS fancy (caddy)

or if you have the responsive foundation framework installed:

- Main Template (powermail)
- Caddy [5] Powermail 2.x (caddy)
- Caddy [6] + Powermail 2.x Foundation 5.x (caddy)

# E-Payment

Caddy has an interface for e-payment. You need a contract with an e-payment provider of course.

Caddy is supporting the e-payment provider Paymill in the current version only.

The interface is responsive.

## Screenshots

### Paymill

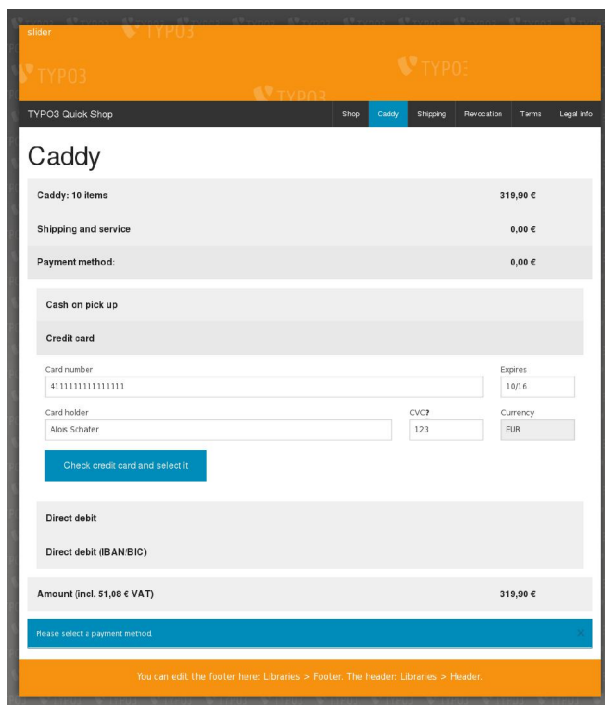


Illustration 11: Caddy e-payment (Paymill) in live mode


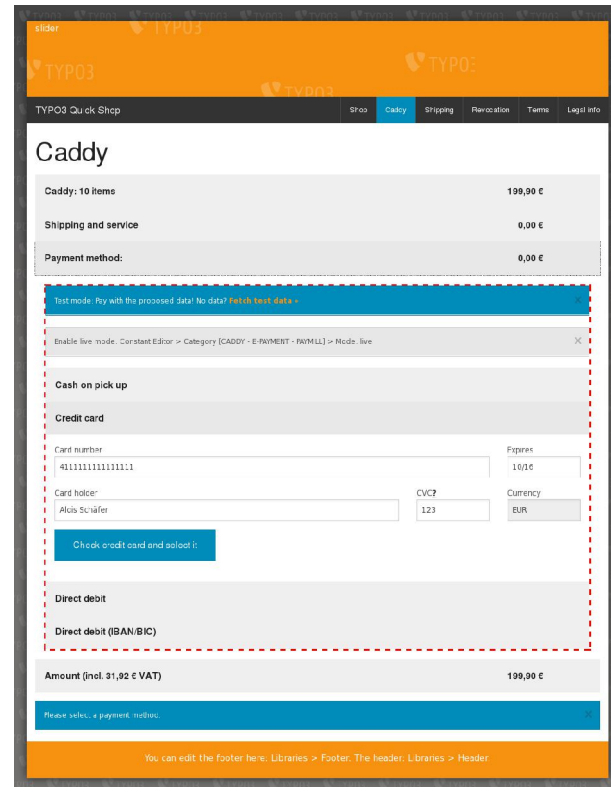


Illustration 12: Caddy e-payment (Paymill) in test mode



## Paymill Transaction

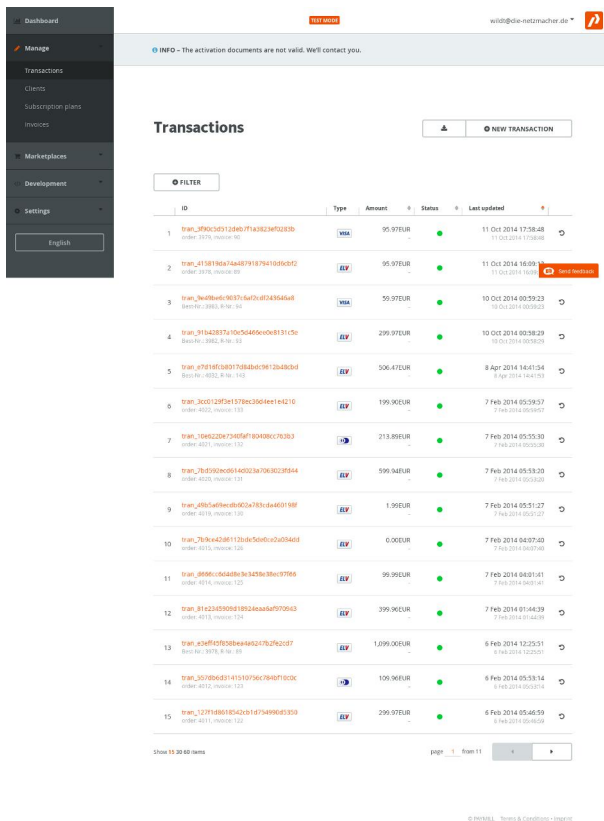

Dashboard TEST MODE wild@die-netzmaecher.de

Manage INFO - The activation documents are not valid. We'll contact you.

Transactions

Clients

Subscription plans

Invoices

Marketplaces

Development

Settings

English

### Transactions

NEW TRANSACTION


FILTER

ID	Type	Amount	Status	Last updated
tran_3f90c5d512deb7f1a3823ef0283b	VISA	95.97EUR	✓	11 Oct 2014 17:58:48
tran_4158186a744879187941080b02	ELV	95.97EUR	✓	11 Oct 2014 16:09:18
tran_3a6b8c46371da7c4f5494a4a8	VISA	56.97EUR	✓	10 Oct 2014 00:59:23
tran_311a2817a10c5646e0e08131c5c	ELV	299.97EUR	✓	10 Oct 2014 00:58:29
tran_4781616d017d8d4b4c9812b4b0d	ELV	206.47EUR	✓	8 Apr 2014 14:41:54
tran_3cc0128f5d1578ec306aee1e6216	ELV	199.90EUR	✓	7 Feb 2014 05:59:57
tran_104622d47349f9f804080c7c3b3	DEBIT	213.85EUR	✓	7 Feb 2014 05:55:30
tran_7d1900cd9140203a7063820844	ELV	596.94EUR	✓	7 Feb 2014 05:53:20
tran_4805a5f9e0d0c2a7803da40f188	ELV	1.90EUR	✓	7 Feb 2014 05:51:27
tran_718c4248112bdc5e0dc2d0546d3	ELV	0.00EUR	✓	7 Feb 2014 04:07:40
tran_4896c0c4d803e3a329a18ec37f66	ELV	95.95EUR	✓	7 Feb 2014 04:01:41
tran_31e23d3008189246aau5706a3	ELV	399.90EUR	✓	7 Feb 2014 01:44:39
tran_aceff0f08b6a4a2c7f62cc0f7	ELV	1,099.00EUR	✓	6 Feb 2014 12:25:51
tran_3d1806d31410794c7940f000c	DEBIT	106.90EUR	✓	6 Feb 2014 05:53:14
tran_1271886f8542b14754996d303d	ELV	399.97EUR	✓	6 Feb 2014 05:46:59

Show 11 of 40 items page 1 from 11

© 2014 Die Netzmaecher - Terms & Conditions - Impressum

Illustration 13: Transactions (Paymill test mode)

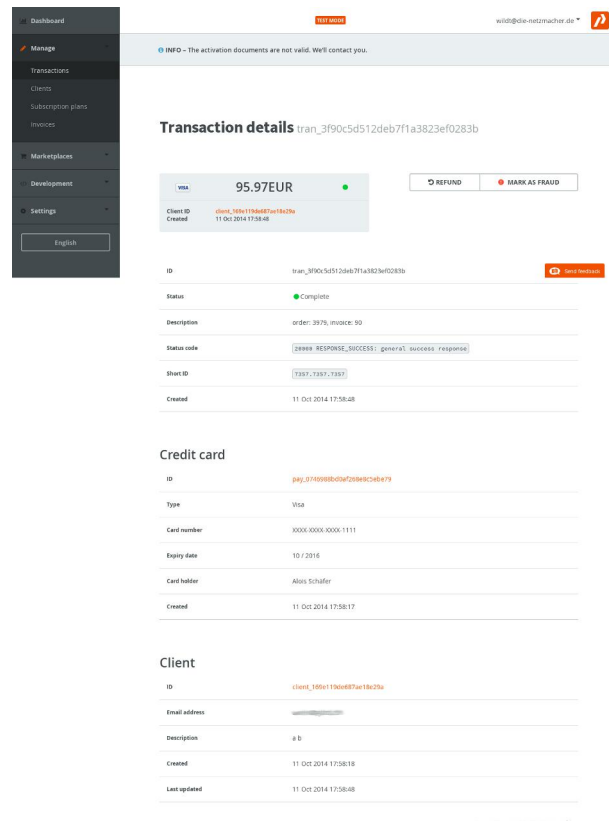

Dashboard TEST MODE wild@die-netzmaecher.de

Manage INFO - The activation documents are not valid. We'll contact you.

Transactions

Clients

Subscription plans

Invoices

Marketplaces

Development

Settings

English

### Transaction details tran\_3f90c5d512deb7f1a3823ef0283b

REFUND MARK AS FRAUD

**95.97EUR**

Client ID: client\_186a115a6d87e18a29a

Created: 11 Oct 2014 17:58:48

ID: tran\_3f90c5d512deb7f1a3823ef0283b Complete

Status: Complete

Description: order: 3976, invoice: 90

Status code: 20000 RESPONSE\_SUCCESS: general success response

Short ID: T887-T887-T887

Created: 11 Oct 2014 17:58:48

### Credit card

ID: pay\_3740908b02a7c0e8e3c8e479

Type: Visa

Card number: XXXX XXXX XXXX 1111

Expiry date: 10 / 2016

Card holder: Alois Schaffer

Created: 11 Oct 2014 17:58:17

### Client

ID: client\_186a115a6d87e18a29a

Email address: \*\*\*\*\*@\*\*\*\*\*.de

Description: # b

Created: 11 Oct 2014 17:58:16

Last updated: 11 Oct 2014 17:58:48

© 2014 Die Netzmaecher - Terms & Conditions - Impressum

Illustration 14: Transaction (Paymill test mode)

## Requirements

### Contract

A contract with an e-payment provider (here: Paymill – see below)

### PHP

The PHP class curl must be enabled.

### Responsive

The e-payment form is responsive. Sorry, but there isn't any other HTML template and any other TypoScript template prepared. Thus you have to

- include the static templates for the responsive design.

See "Responsive Design" on page 13 above.

## Setup

### Include the e-payment template

Please add the e-payment template to the TypoScript of your page

Include static (from extensions):

- Main Template (powermail)
- Caddy [5] Powermail 2.x (caddy)
- Caddy [6] + Powermail 2.x Foundation 5.x (caddy)
- Caddy [8] + E-Payment: Paymill Foundation 5.x (caddy)

## Configure Paymill

After including the e-payment template, you have a lot of new options for configuration. See

- TypoScript Constant Editor > Category: [CADDY – E-PAYMENT – PAYMILL\*]

Please add your private and public keys.

## Test- and Live-Mode

Paymill is running in test mode by default. You can test transactions without any real payment.

If you like to switch to the live mode, please configure

- TypoScript Constant Editor > Category: [CADDY – E-PAYMENT – PAYMILL\*] > Mode

See screenshots with test- and live-mode at "Screenshots" on page 16 above.

## Constant Editor

See "E-PAYMENT – PAYMILL" on page 34 below.

## Debugging

You should enable all debugging properties:

- Extension manager
- Plugin
- TypoScript

See "Debugging" on page 85 below.

## PCI-DSS conform

The e-payment interface is conform with Payment Card Industry Data Security Standard (PCI DSS). PCI DSS is in place to make the internet safer and more secure by ensuring that the sensitive data of your customers is handled in a recognised and secure manner.

PAYMILL supports merchants to be PCI DSS compliant. Your clients' sensitive data is sent directly to PAYMILL. The sensitive data never touches your servers and this drastically reduces the scope of your compliance requirements.

See details in the section Workflow below.

## Workflow

Any knowledge about the e-payment workflow is needed. But if you are interested, read the section below.

### Paymill

Caddy handles e-payment in the two steps:

- Evaluation
- Transaction

In detail:

1. data for e-payment are evaluated by JavaScript<sup>1</sup>
  1. data will send to Paymill
  2. if data are proper, Paymill sends back a token
  3. if data aren't proper, Paymill tries to send a qualified error prompt or Caddy tries to generate a qualified error prompt.
2. if data for e-payment are proper, the customer can send the order to your server
  1. the order doesn't contain any e-payment account data but the Paymill token<sup>2</sup>
  2. your server sends the token and some other data like the amount and the invoice number to the server of Paymill for transaction

<sup>1</sup> Caddy is using the PAYMILL Javascript Bridge. The clients' sensitive data is sent directly to PAYMILL and is never touches your servers.


<sup>2</sup> dito

3. if the transaction is successful, caddy
  1. sends the confirmation e-mail to the shop owner and a copy to the customer
  2. stores some order data in the database
4. if the transaction fails, caddy
  1. outputs a HTML error page with a qualified prompt
  2. the customer can go back to the order
3. if data for e-payment aren't proper, the customer can't send the order to your server

# Plugins

## Caddy

### Workflow

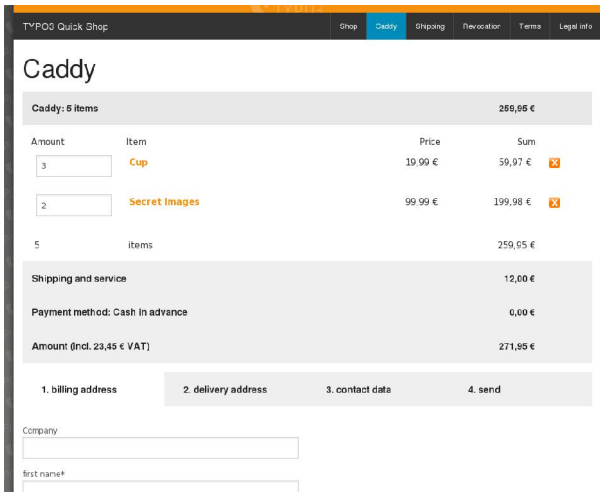

TYPO3 Quick Shop

Shop Caddy Shipping Revocation Terms Legal info

### Caddy


Amount	Item	Price	Sum
3	Cup	19,99 €	59,97 €
2	Secret Images	99,99 €	199,98 €
5	items		259,95 €
Shipping and service			12,00 €
Payment method: Cash in advance			0,00 €
Amount (incl. 23,45 € VAT)			271,95 €

1. billing address 2. delivery address 3. contact data 4. send

Company

first name\*

Illustration 15: Caddy with accordion items

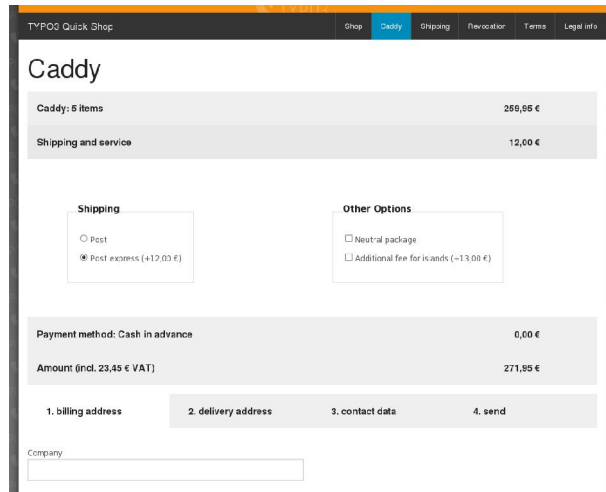

TYPO3 Quick Shop

Shop Caddy Shipping Revocation Terms Legal info


### Caddy

Amount	Item	Price	Sum
Caddy: 5 items			259,95 €
Shipping and service			12,00 €
Payment method: Cash in advance			0,00 €
Amount (incl. 23,45 € VAT)			271,95 €

1. billing address 2. delivery address 3. contact data 4. send

Company

Illustration 16: Caddy with accordion shipping and service

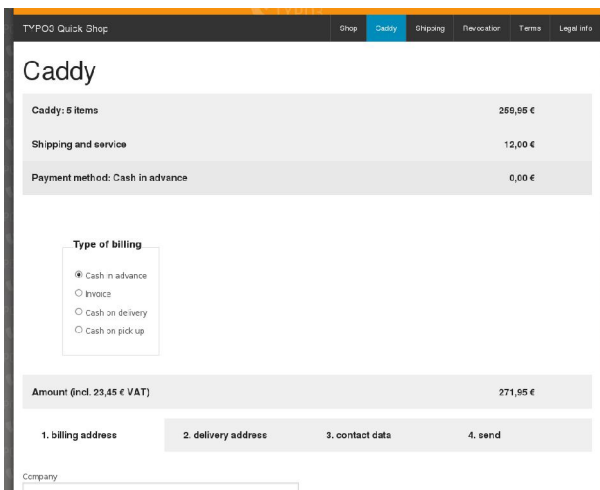

TYPO3 Quick Shop

Shop Caddy Shipping Revocation Terms Legal info


### Caddy

Amount	Item	Price	Sum
Caddy: 5 items			259,95 €
Shipping and service			12,00 €
Payment method: Cash in advance			0,00 €
Amount (incl. 23,45 € VAT)			271,95 €

1. billing address 2. delivery address 3. contact data 4. send

Company

Illustration 17: Caddy with accordion payment

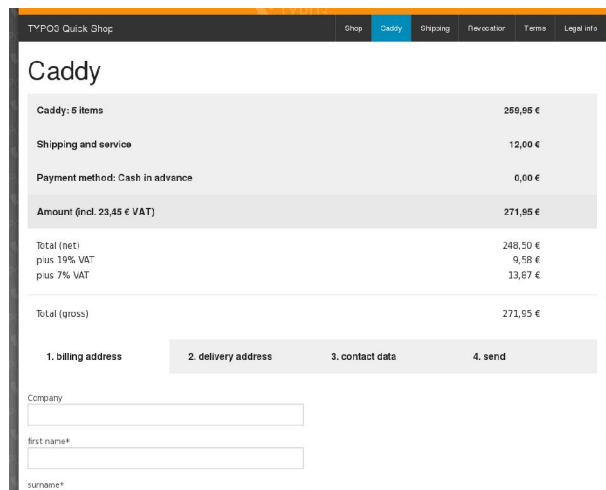

TYPO3 Quick Shop

Shop Caddy Shipping Revocation Terms Legal info

### Caddy

Amount	Item	Price	Sum
Caddy: 5 items			259,95 €
Shipping and service			12,00 €
Payment method: Cash in advance			0,00 €
Amount (incl. 23,45 € VAT)			271,95 €
Total (net)			248,50 €
plus 19% VAT			9,58 €
plus 7% VAT			13,87 €
Total (gross)			271,95 €


1. billing address 2. delivery address 3. contact data 4. send

Company

first name\*

surname\*

Illustration 18: Caddy with accordion amount

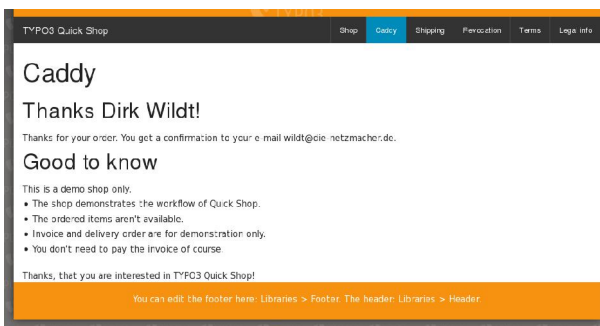

TYPO3 Quick Shop

Shop Caddy Shipping Revocation Terms Legal info

### Caddy

Thanks Dirk Wildt!

Thanks for your order. You get a confirmation to your e-mail wildt@cie-netzmacher.de.

### Good to know

This is a demo shop only.

- The shop demonstrates the workflow of Quick Shop.
- The ordered items aren't available.
- Invoice and delivery order are for demonstration only.
- You don't need to pay the invoice of course.


Thanks, that you are interested in TYPO3 Quick Shop!

You can edit the footer here: Libraries > Footer. The header: Libraries > Header

Illustration 19: Caddy thanks

## Backend

General
Plugin
Appearance
Access

**Selected Plugin**  
 Caddy

**Plugin Options**  
Check it!
Notes
Caddy
Email
Billing Address
Delivery Address
PDF
Sponsors
Help!

Enable the Check-it!-report  
☒

*Information* You have an internal annotation at the tab [Notes]. Please attend it!

*Warning* Please disable the check it!-report. It costs performance!

DRS: You will get a report in the Developer Log  
☐

Update Wizard: You will get a frontend report, if your IP match the list of allowed IP  
☐

*Information* Your current IP: 93.210.21.120

List of allowed IP. Please add your current IP, if you like to see a result in the frontend.  
127.0.0.1, 127.0.0.2

Illustration 20: Plugin Caddy (backend)

## Controlling

See details at

- "Controlling Caddy" on page 24 below.

## Mini Caddy

Documentation for Caddy 4.x – maybe proper for version 6.x

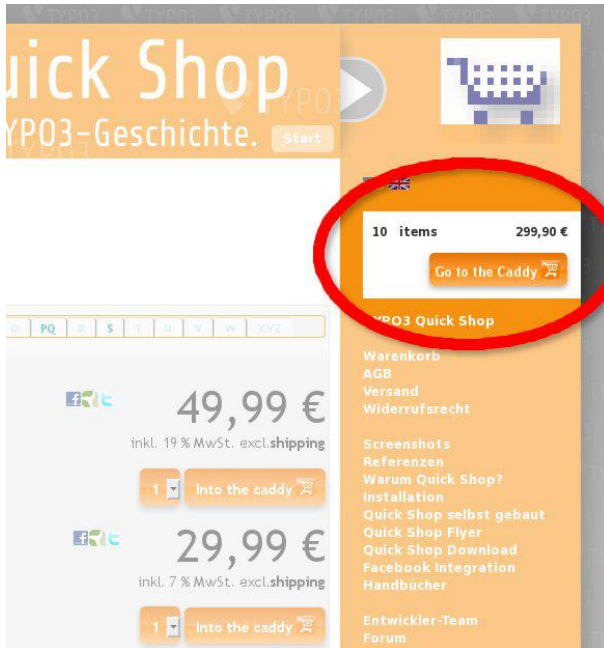


Illustration 21: Plugin Caddy Mini (frontend)

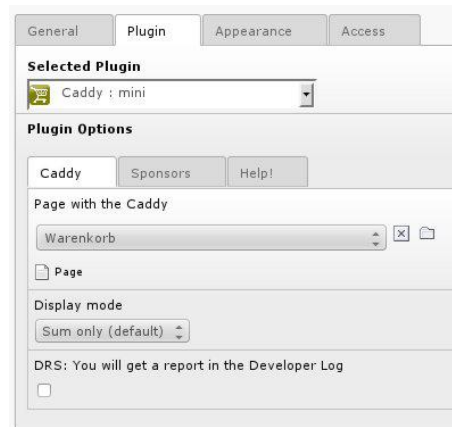


Illustration 22: Plugin Caddy Mini (backend)

## Controlling

- Add the Plugin "Caddy: Mini" to your page.
- Configure the Plugin:
  - Enter the page with the Caddy plugin.
  - Display mode:
    - Items and sum
    - Sum only (default)

## TypoScript

See "Setup > tx\_caddy\_pi2" on page 78 below.

## Sum Gross

Documentation for Caddy 4.x – maybe proper for version 6.x

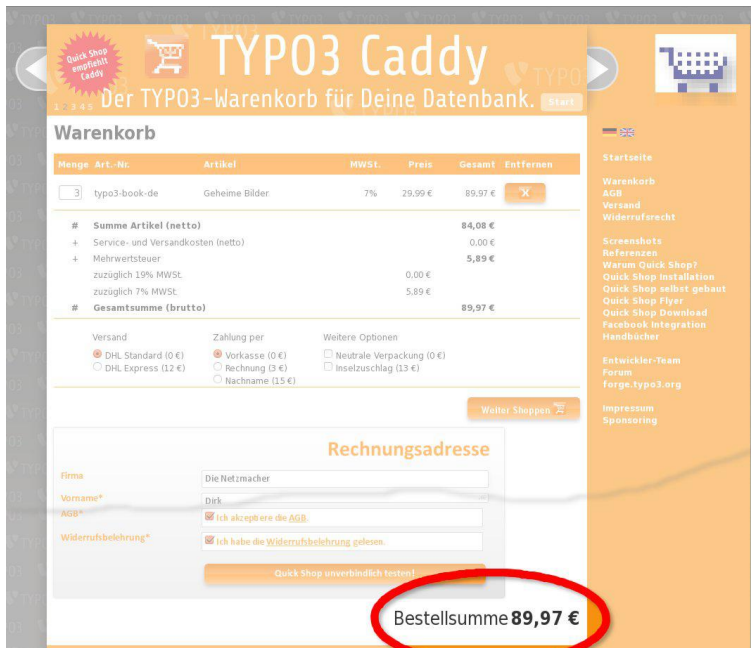


Illustration 23: Plugin Caddy Mini (frontend)

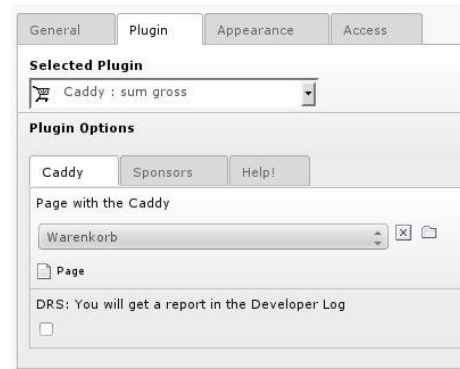


Illustration 24: Plugin Caddy Mini (backend)

## Controlling

- Add the Plugin "Caddy: sum gross" to your page.
- Configure the Plugin:
  - Enter the page with the Caddy plugin.

## TypoScript

See "Setup > tx\_caddy\_pi3 – Overview" on page 79 below.

# Controlling Caddy

You are controlling Caddy by both user interfaces:

- the Caddy plugin / flexform and
- the Constant Editor.

If you have high demands, you can configure Caddy by TypoScript directly.

## Overview

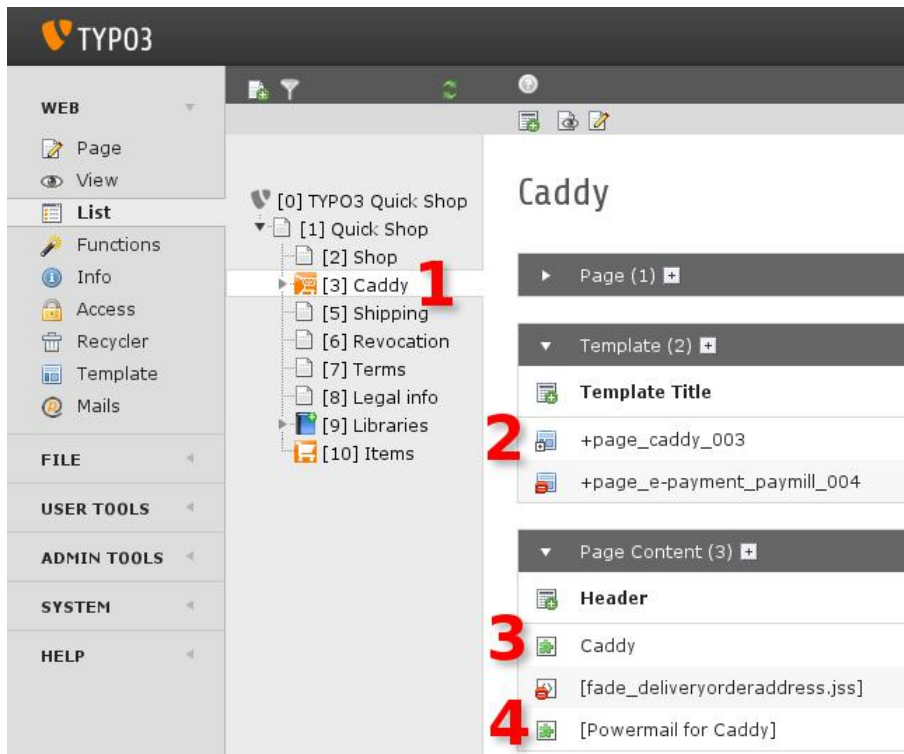


Illustration 25: Sample with Quick Shop

1. The page Caddy should contain:
2. a TypoScript extension template
3. the Caddy plugin
4. the Powermail plugin<sup>1</sup>
5. and Powermail items like<sup>2</sup>
  - forms,
  - pages and
  - fields


<sup>1</sup> Caddy supports both versions: Powermail 1.x and 2.x

<sup>2</sup> Depends on version 1.x and 2.x



## Plugin / Flexform

### Check it!

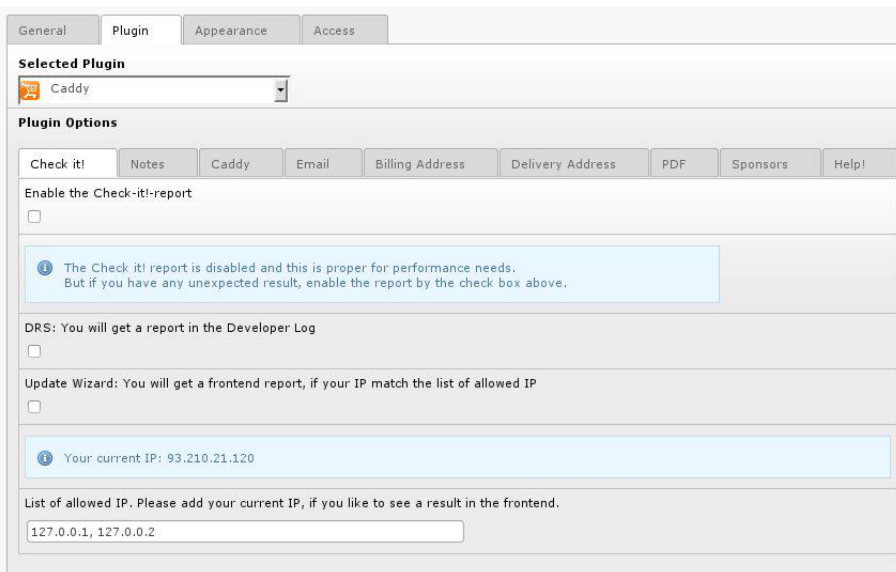

The screenshot shows the 'Check it!' tab of the Caddy plugin configuration. The 'Selected Plugin' is 'Caddy'. Under 'Plugin Options', there are several checkboxes: 'Check it!', 'Notes', 'Caddy', 'Email', 'Billing Address', 'Delivery Address', 'PDF', 'Sponsors', and 'Help!'. The 'Check it!' checkbox is unchecked. Below the checkboxes, there is a message box stating: 'The Check it! report is disabled and this is proper for performance needs. But if you have any unexpected result, enable the report by the check box above.' There are also sections for 'DRS: You will get a report in the Developer Log' and 'Update Wizard: You will get a frontend report, if your IP match the list of allowed IP', both with unchecked checkboxes. A message box shows the current IP: 'Your current IP: 93.210.21.120'. At the bottom, there is a text input field for 'List of allowed IP. Please add your current IP, if you like to see a result in the frontend.' with the value '127.0.0.1, 127.0.0.2'.

Illustration 26: Plugin [Check it!]

#### Enable the Check-it!-Report

- If the report is enabled, Caddy will check your Cady configuration and your Powermail configuration.
- If there is an unproper property, you will get a prompt probably with helpful information.


#### DRS: You will get a report in the Developer Log

- If the DRS is enabled, Caddy will prompt the work flow of the plugin to devlog.  
The DRS supports TYPO3 integrators for a proper configuration and for bugfixing.  
The DRS supports TYPO3 developers.
- You need the extension devlog, if you want to use this feature.

#### Update Wizard

- Without any effect in the current version.

### Notes

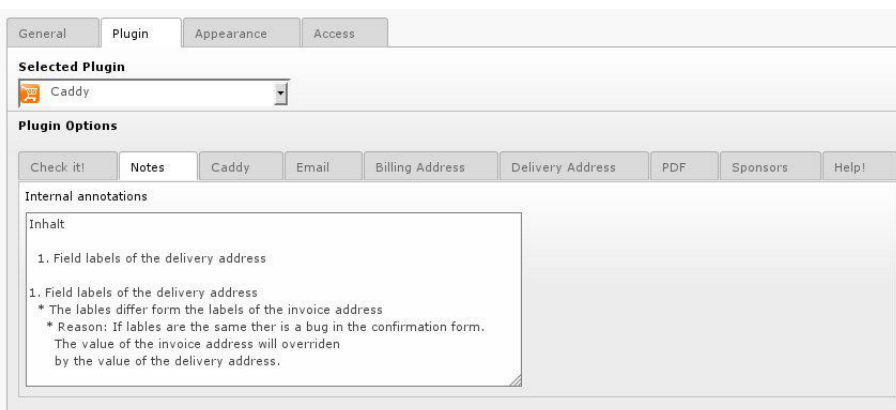

The screenshot shows the 'Notes' tab of the Caddy plugin configuration. The 'Selected Plugin' is 'Caddy'. Under 'Plugin Options', the 'Notes' checkbox is selected. Below the checkboxes, there is a section titled 'Internal annotations' with a text area containing the following text: 'Inhalt', '1. Field labels of the delivery address', '1. Field labels of the delivery address', '\* The labels differ form the labels of the invoice address', '\* Reason: If labes are the same ther is a bug in the confirmation form.', 'The value of the invoice address will overridden by the value of the delivery address.'

Illustration 27: Plugin [Notes]

#### Notes

- For your internal notes

## Caddy

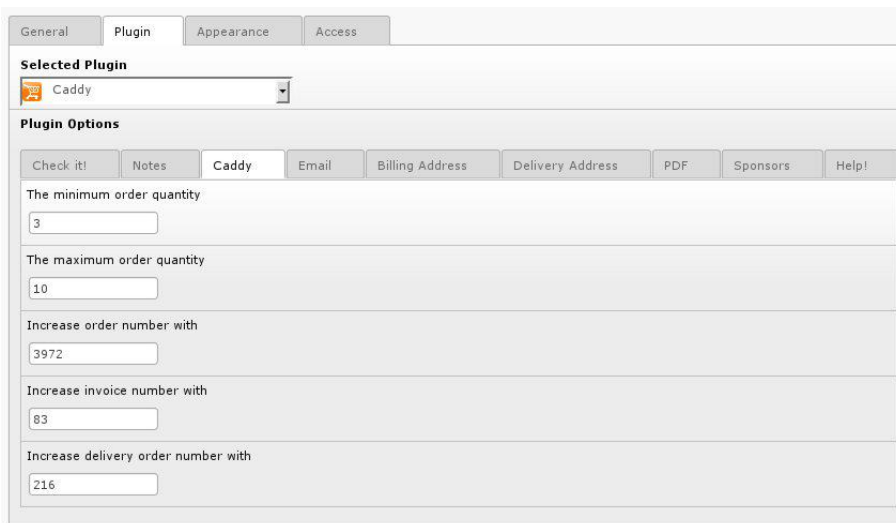


Illustration 28: Plugin [Caddy]

The minimum order quantity

- Minimum order quantity over all (for all items in the caddy)

The maximum order quantity

- Maximum order quantity over all (for all items in the caddy)

Increase order number with

- Caddy starts counting from 0. If you need a higher start number like 1.000, please adapt the starting number to your needs.

Increase invoice number with

- See above.

Increase delivery order number with

- See above.

### Reset numbers

If there is a need, to reset the counter of the numbers, please refer to

- "Reset numbers" on page 65 below.

## Email

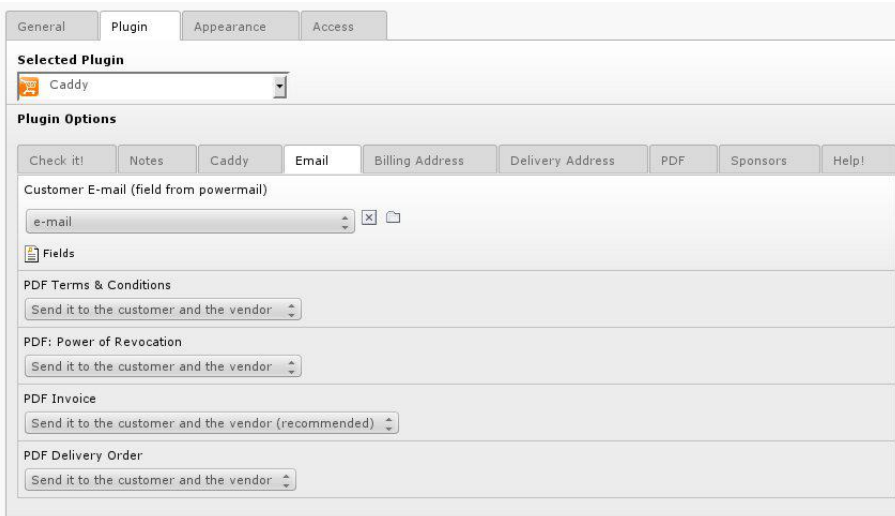


Illustration 29: Plugin [Email]

### Customer E-mail (field from powermail)

- Caddy must know the email from the customer.
- You have to link this field with the corresponding field of the powermail form.

### PDF Terms & Conditions

- Attach the PDF to
  - nobody,
  - the customer,
  - the vendor or
  - both

### PDF: Power of Revocation

- See above

### PDF Invoice

- See above

### PDF Delivery Order


- See above

## Design of the attachments

See

- "Plugin / Flexform > PDF" on page 29 below
- "Corporate Design > Attachments" on page 52 below

## Billing Address

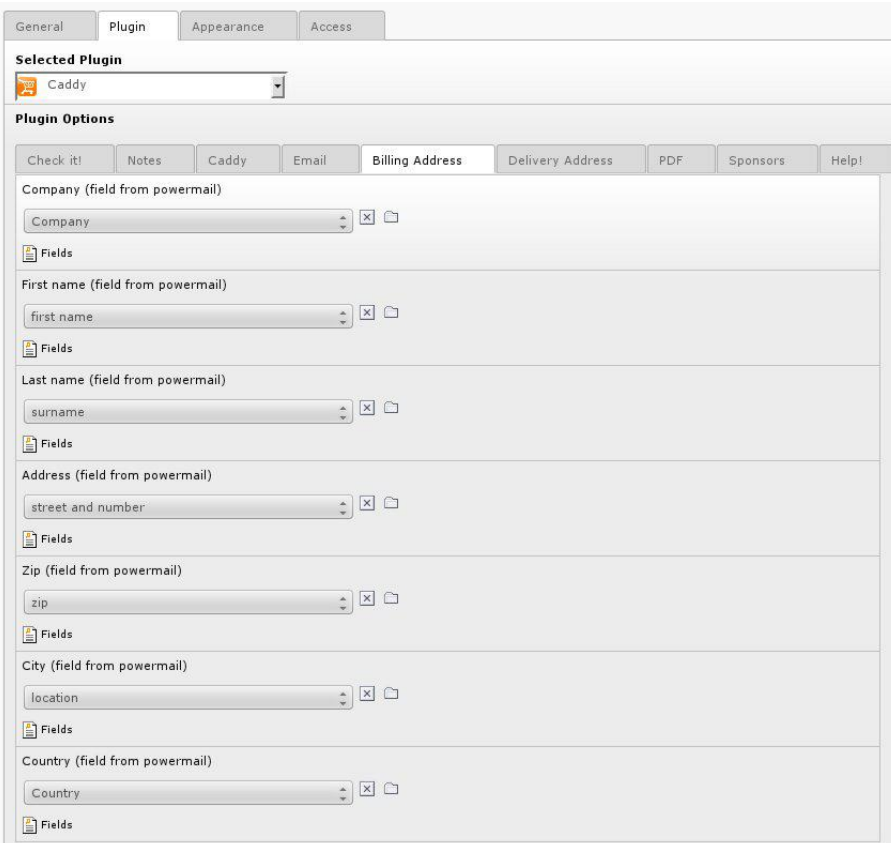

The screenshot shows the 'Billing Address' configuration window for the Caddy plugin. At the top, there are tabs for 'General', 'Plugin', 'Appearance', and 'Access'. The 'Plugin' tab is active, showing 'Selected Plugin' as 'Caddy'. Below this, the 'Plugin Options' section contains several sub-tabs: 'Check it!', 'Notes', 'Caddy', 'Email', 'Billing Address' (which is selected), 'Delivery Address', 'PDF', 'Sponsors', and 'Help!'. The 'Billing Address' sub-tab displays a list of fields from a Powermail form, each with a dropdown menu and a 'Fields' icon. The fields are: 'Company (field from powermail)' with value 'Company', 'First name (field from powermail)' with value 'first name', 'Last name (field from powermail)' with value 'surname', 'Address (field from powermail)' with value 'street and number', 'Zip (field from powermail)' with value 'zip', 'City (field from powermail)' with value 'location', and 'Country (field from powermail)' with value 'Country'.

Illustration 30: Plugin [Billing Address]

This is the Powermail connector.


Caddy needs these values for the billing address in PDF attachments.

Each field should be linked with the corresponding field of the powermail form.

It is recommended to have all Powermail fields configured. And to hide a field or fieldset, if you don't need the field or fieldset.

It isn't recommended to leave needed Powermail fields, because Caddy will prompt a warning in the Check-it!-Report.

## Delivery Address

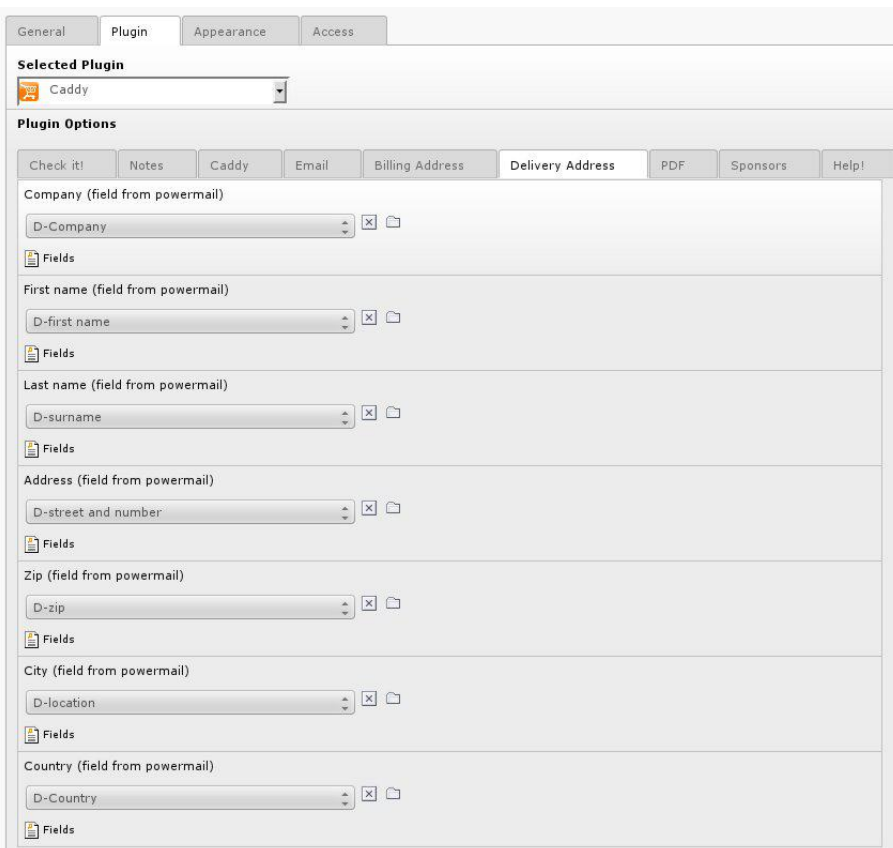


The screenshot shows the 'Delivery Address' configuration tab for the Caddy plugin. The 'Selected Plugin' is 'Caddy'. The 'Plugin Options' section includes tabs for 'Check it!', 'Notes', 'Caddy', 'Email', 'Billing Address', 'Delivery Address' (active), 'PDF', 'Sponsors', and 'Help!'. The configuration fields are as follows:

- Company (field from powermail):** A dropdown menu with 'D-Company' selected.
- Fields:** A small icon representing a folder.
- First name (field from powermail):** A dropdown menu with 'D-first name' selected.
- Fields:** A small icon representing a folder.
- Last name (field from powermail):** A dropdown menu with 'D-surname' selected.
- Fields:** A small icon representing a folder.
- Address (field from powermail):** A dropdown menu with 'D-street and number' selected.
- Fields:** A small icon representing a folder.
- Zip (field from powermail):** A dropdown menu with 'D-zip' selected.
- Fields:** A small icon representing a folder.
- City (field from powermail):** A dropdown menu with 'D-location' selected.
- Fields:** A small icon representing a folder.
- Country (field from powermail):** A dropdown menu with 'D-Country' selected.
- Fields:** A small icon representing a folder.

Illustration 31: Plugin [Delivery Address]

See "Billing Address" above.

## PDF

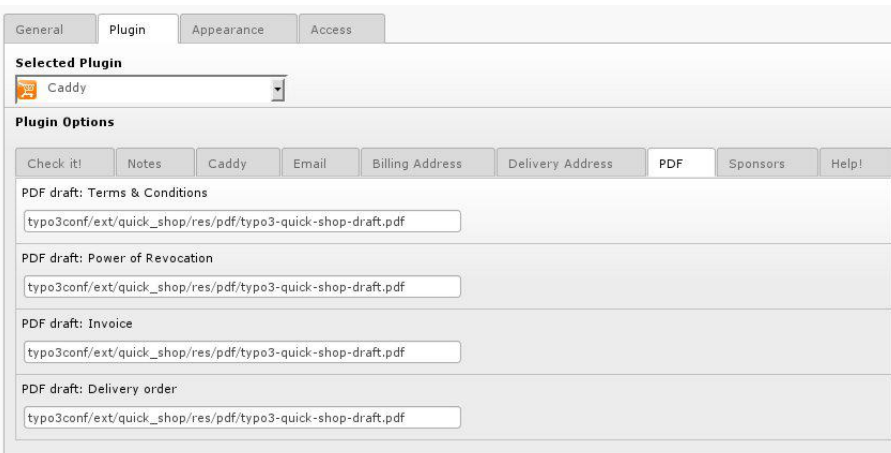

The screenshot shows the 'PDF' configuration tab for the Caddy plugin. The 'Selected Plugin' is 'Caddy'. The 'Plugin Options' section includes tabs for 'Check it!', 'Notes', 'Caddy', 'Email', 'Billing Address', 'Delivery Address', 'PDF' (active), 'Sponsors', and 'Help!'. The configuration fields are as follows:

- PDF draft: Terms & Conditions:** A text input field containing 'typo3conf/ext/quick\_shop/res/pdf/typo3-quick-shop-draft.pdf'.
- PDF draft: Power of Revocation:** A text input field containing 'typo3conf/ext/quick\_shop/res/pdf/typo3-quick-shop-draft.pdf'.
- PDF draft: Invoice:** A text input field containing 'typo3conf/ext/quick\_shop/res/pdf/typo3-quick-shop-draft.pdf'.
- PDF draft: Delivery order:** A text input field containing 'typo3conf/ext/quick\_shop/res/pdf/typo3-quick-shop-draft.pdf'.

Illustration 32: Plugin [Delivery Address]

Background PDF for your attachments.

Please upload a PDF with your corporate design to the fileadmin directory.

Update the values in the fields of this tab.

## Further informations about attachments

See

- "Plugin / Flexform > Email" on page 27 above
- "Corporate Design > Attachments" on page 52 below

## Sponsors

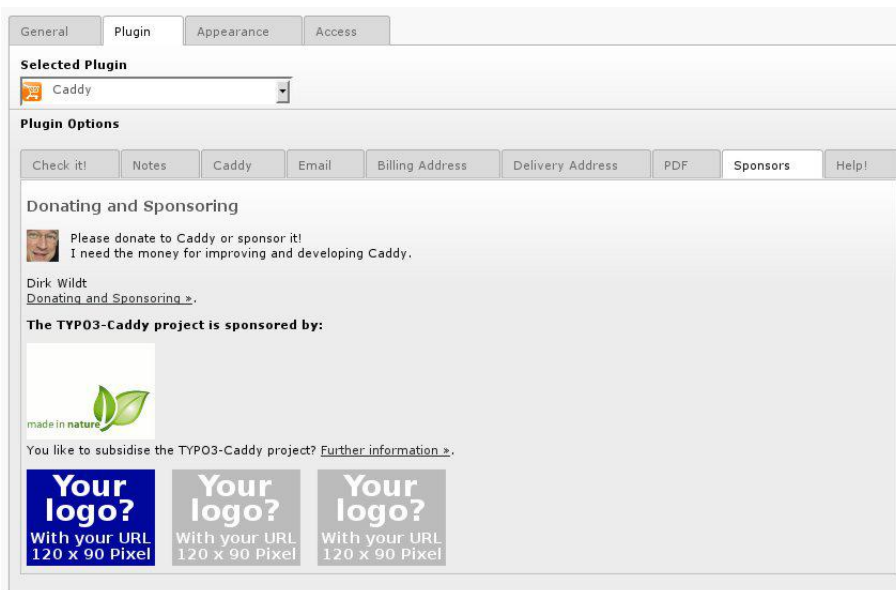


Illustration 33: Plugin [Sponsors]

List of sponsors.

Nothing to do but sponsoring. See

- "Packages for Sponsors" on page 91 below.

## Help!

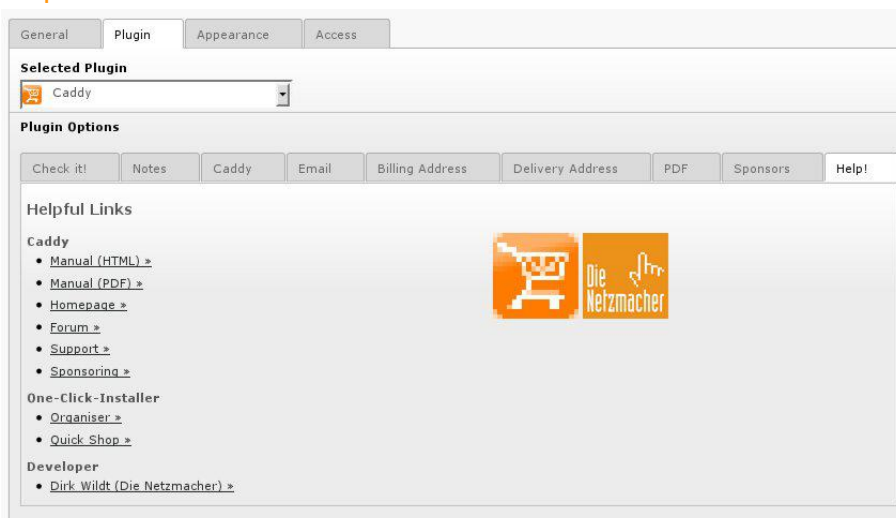


Illustration 34: Plugin [Help!]

Helpful links to

- the manual, the caddy forum and some other caddy websites,
- the one-click-installer and
- the developer.

Nothing to do.

## Static Templates

### Syntax – Order of the Templates

The labels of the static templates have order numbers.

For example: you should include Caddy [2+] before Caddy [4+].

### Main (obligated)

If you like to use Caddy, you have to include the main template. This is obligated!

- Caddy [1] <- obligated!
- Caddy [1] + Foundation 4.x <- in case of a responsive design

### TypoScript

- "Setup" from page 66 below.

### Localization

Some formats are localized like an amount.

- 1,234.56 is the default notation of an amount.

If you like a German format like 1.234,56, please include this static template:

- Caddy [2] + German

### CSS

Documentation for Caddy 4.x – maybe proper for version 6.x

CSS templates are needed, if you like to use the CSS of the Caddy extension.<sup>1</sup>

CSS in general (blue):

- Caddy [3] CSS (blue)<sup>2</sup>

Colours

- Caddy [3.1] + CSS orange
- Caddy [3.1] + CSS green
- Caddy [3.1] + CSS red

Foundation

- Caddy [4] CSS Foundation 4.x

CSS for Powermail 2.x<sup>3</sup>

- Caddy [5.1] + Powermail 2.x CSS fancy

### Example

- "Colours" on page 49 below.

### TypoScript

- "tx\_caddy\_pi1.CSS\_DEFAULT\_STYLE" on page 76 below.

### Powermail (obligated)

One of the both Powermail templates is obligated. The proper template depends on your Powermail version.

- Caddy [5] Powermail 1.x
- Caddy [5] Powermail 2.x Main

<sup>1</sup> You are controlling a lot of CSS properties by the Constant Editor.

<sup>2</sup> Colour is blue

<sup>3</sup> There isn't any CSS for Powermail 1.x

### TypoScript

- "tx\_caddy\_pi1.powermail-" on page 77 below.

### E-Payment

If you like to use the e-payment interface with the e-payment provider Paymill, please include this static template:

- Caddy [8] + E-Payment: Paymill

### Reset

If you like to reset all Caddy options, please include this static template at the top position:

- Caddy [99] Reset

### Constant Editor

All TypoScript properties are controlled by the Constant Editor. See "Constant Editor" on page 33 below.



## Constant Editor

All properties have the prefix plugin.caddy.

Example: main.pid is plugin.caddy.main.pid.

### MAIN

Property	Type	Description	Default
main.pid	text	Uid of storage folder: Uid of the folder with the caddy records. Leave it empty (recommended!), to store records at the same page like the caddy plugin.	
main.dueDate	options	Due date for payment.  Options <ul style="list-style-type: none"> <li>• now</li> <li>• +1day</li> <li>• +2 days</li> <li>• +3 days</li> <li>• +4 days</li> <li>• +5 days</li> <li>• +6 days</li> <li>• +1 week</li> <li>• +2 weeks</li> <li>• +3 weeks</li> <li>• +1 month</li> </ul>	+2 weeks
main.dueDateFormat	string	Format of the due date.  <b>Examples:</b> <ul style="list-style-type: none"> <li>• %Y-%m-%d</li> <li>• %d. %b. %Y</li> </ul>	%Y-%m-%d

### MAIN NUMBERFORMAT

For German rules there isn't any need to use the Constant Editor. See

- "Static Templates > Error: Reference source not found" on page Error: Reference source not found Error: Reference source not found.

Property	Type	Description	Default
main.decimal	text	Decimal. This setting will be used for formatting prices.	2
main.dec_point	text	Decimal symbol: Dot or comma. This setting will be used for formatting prices.	.
main.thousands_sep	text	Thousands separator. Dot or comma. This setting will be used for formatting prices.	,
main.currencySymbol	text	Currency symbol. Example: &euro;, \$	\$
main.currencySymbolBeforePrice	boolean	Show currency symbol before price.	true
main.percentSymbol	string	Percent symbol	%

### BANKACCOUNT

Property	Type	Description	Default
bankaccount.iban	text	IBAN: International Bank Account Number (IBAN). Is needed for the payment option cash in advance.	
bankaccount.bic	text	BIC: Bank identifier code (BIC). Is needed for the payment option cash in advance.	title

## DATABASE

Property	Type	Description	Default
db.table	text	Table*: *Obligate! Name of the table with the items (products). <b>Examples:</b> <ul style="list-style-type: none"> <li>tx_myextension_products</li> <li>tx_quickshop_products</li> <li>tx_cars_model</li> </ul>	
db.title	text	Title*: *Obligate! Field with the title of the item (product).	title
db.price	text	Price*: *Obligate! Field with the gross price of the item (product).	price
db.tax	text	Tax*: *Obligate! Field with the tax category of the item (product).	tax
db.sku	text	SKU: field with the sku (unique id) of the item (product).	
db.min	text	MIN: field with the minimum order quantity of the item (product).	
db.max	text	MAX: field with the minimum order quantity of the item (product).	
db.service_attribute_1	text	Service Attribute 1: the field with the service attribute 1 of the item (product).	
db.service_attribute_2	text	Service Attribute 2: the field with the service attribute 1 of the item (product).	
db.service_attribute_3	text	Service Attribute 3: the field with the service attribute 1 of the item (product).	

## DEBUG

Property	Type	Description	Default
debug.paramsAndTs	boolean	Debug params/typoscript (frontend): Get a report in the frontend with received GET-/POST-parameters and typoscript configuration	false
debug.userfunc	boolean	Debug user functions (backend): Enable the DRS for user functions	false
debug.dontReplaceEmptyMarker	boolean	Don't replace empty marker: Enable it, if empty HTML markers should not removed.	false

## E-PAYMENT

Property	Type	Description	Default
e-payment.provider	string	E-payment provider. Currently Paymill is possible only.	
e-payment.currency	string	I.e: EUR, USD. Currency has an effect for transactions! Currency have to accord with the currency of your Shop (see: CADDY - MAIN NUMBERFORMAT).	EUR

### E-PAYMENT – PAYMILL

You have to include the static template "**Caddy [6] + E-Payment Paymill (caddy)**"

Property	Type	Description	Default
e-payment.paymill.mode	string	live <ul style="list-style-type: none"> <li>Transaction are real transactions. Each transaction costs your money.</li> </ul> test <ul style="list-style-type: none"> <li>Transactions hasn't any effect, but Paymill will display each transaction on the dashboard. BE AWARE that customers can order items without a real payment!</li> </ul>	test
e-payment.paymill.key.live.private	string	Key (live) - private*:Your private key for the live mode.	
e-payment.paymill.key.live.public	string	Key (live) - public*:Your publickey for the live mode.	
e-payment.paymill.key.test.private	string	Key (live) - private*:Your private key for the test mode.	
e-payment.paymill.key.test.public	string	Key (live) - public*:Your publickey for the test mode.	

## E-PAYMENT – PAYMILL FILES

You have to include the static template "**Caddy [6] + E-Payment Paymill (caddy)**"

Property	Type	Description	Default
e-payment.paymill.files.*	string	Needed Paymill files	

## E-PAYMENT – PAYMILL PATHS

You have to include the static template "**Caddy [6] + E-Payment Paymill (caddy)**"

Property	Type	Description	Default
e-payment.paymill.paths.api	string	API:Path to the API Default: res/e-payment/paymill/api/php/	see description

## E-PAYMENT – POWERMAIL FILES

You have to include the static template "**Caddy [6] + E-Payment Paymill (caddy)**"

Property	Type	Description	Default
e-payment.powermail.files.html.error	string	Error template:Path to the html error template Default: EXT:caddy/res/e-payment/powermail/foundation/4x/html/error.html	see description

## E-PAYMENT – POWERMAIL PATHS

You have to include the static template "**Caddy [6] + E-Payment Paymill (caddy)**"

Property	Type	Description	Default
e-payment.powermail.paths.foundation	string	Path to foundation typo3conf/ext/t3foundation/res/foundation-4.3.2/	see description

## GETPOST

Property	Type	Description	Default
getpost.uid	text	Uid*: *Obligate! Parameter name for a unique id (integer) of your item. caddy uses this id for SQL requests. <b>It must correspond with [CADDY – URL]!</b>  <b>Example</b> • tx_browser_pi1 showUid	
getpost.quantity	text	Quantity*: *Obligate! Parameter name for the quantity/amount field of your order form (e.g. tx_trbooks_qty). The provided parameter must be equal to the name in your HTML template.	qty
getpost.title	text	Title: Parameter name for the title field in your order form.	
getpost.price	text	Parameter name for the gross price field in your order form.	
getpost.service_attribute_1	text	Service Attribute 1: Parameter name for the service attribute field 1 of your order form (e.g. weight).	
getpost.service_attribute_1	text	Service Attribute 2: Parameter name for the service attribute field 2 of your order form (e.g. volume).	
getpost.service_attribute_1	text	Service Attribute 3: Parameter name for the service attribute field 3 of your order form (e.g. length).	
getpost.sku	text	Parameter name for your SKU (stock keeping unit).	

## HTML

### HTML COLORS

There isn't any need to use the Constant Editor, if you like to use these colours:

- blue, green, orange, red

Please include the static template:

- +Caddy CSS +Colour (caddy)

where colour is one of the colours from above.

See

- "Static Templates > CSS" on page 31 above.
- "Colours" on page 49 below.

Property	Type	Description	Default
html.colour.border	colour	Border colour: border colour as CSS name or HTML notation like #FFF or #123456. It is used in the HTML table, which is placed in e-mails and pdf attachments.	#207CCA
html.colour.button.text	colour	Button text colour	#FFF
html.colour.button.gradient1	colour	Button gradient colour 1	#1E5799
html.colour.button.gradient2	colour	Button gradient colour 2	#2989D8
html.colour.button.gradient3	colour	Button gradient colour 3	#207CCA
html.colour.button.gradient4	colour	Button gradient colour 4	#7DB9E8
html.colour.icon.caddy	string	Icon caddy. <b>Default</b> <ul style="list-style-type: none"> <li>• EXT:caddy/files/img/caddy_080_08.png</li> </ul> <b>Example</b> <ul style="list-style-type: none"> <li>• "Corporate Design &gt; Icons" on page 50 below</li> </ul>	see description
html.colour.icon.delete	string	Icon delete. <b>Default</b> <ul style="list-style-type: none"> <li>• EXT:caddy/files/img/delete_080_08.png</li> </ul> <b>Example</b> <ul style="list-style-type: none"> <li>• "Corporate Design &gt; Icons" on page 50 below</li> </ul>	see description
html.colour.powermail.text	colour	Powermail text	#207CCA
html.colour.table.head.background	colour	Table header background	#207CCA
html.colour.table.head.text	colour	Table header text	#FFF

### HTML MARKER

Property	Type	Description	Default
html.marker.caddy	string	Subpart Marker: The subpart marker for the caddy in your Caddy HTML template. Usually ###CADDY###.	CADDY

## HTML WIDTH

Property	Type	Description	Default
html.width.table.td.qty	text	Width column Quantity: The width of the caddy column quantity in HTML tables for CSS. Units can be px, em or % among others.	10%
html.width.table.td.sku	text	Width column SKU: The width of the caddy column stock keep unit in HTML tables for CSS. Units can be px, em or % among others.	15%
html.width.table.td.item	text	Width column item: The width of the caddy column item in HTML tables for CSS. Units can be px, em or % among others.	35%
html.width.table.td.tax	text	Width column tax: The width of the caddy column tax in HTML tables for CSS. Units can be px, em or % among others.	10%
html.width.table.td.net	text	Width column net: The width of the caddy column net in HTML tables for CSS. Units can be px, em or % among others.	15%
html.width.table.td.sum	text	Width column sum: The width of the caddy column sum in HTML tables for CSS. Units can be px, em or % among others.	15%
html.width.table.td.skuitemtax	text	Width 3 columns: The total width of the caddy columns sku, item and tax in HTML tables for CSS. Units can be px, em or % among others.	60%
html.width.table.td.skuitemtaxnet	text	Width 4 columns: The total width of the caddy columns sku, item, tax and net in HTML tables for CSS. Units can be px, em or % among others.	75%

## Options

### OPTIONS PAYMENT

Property	Type	Description	Default
options.payment.default	integer	Default payment option:0: no preset. 1: 1st payment option. 2: 2nd payment option. 3rd payment option.	0
options.payment.1.lll	string	1. label:Label for 1st payment option. Example: cash in advance (German: Vorkasse) Default: EXT:caddy/pi1/locallang.xml:paymentoption_cashinadvance	see description
options.payment.1.enabled	boolean	1. enabled:Disable it, if you don't want to offer the 1st payment option.	1
options.payment.1.costs	double	1. costs:Extra costs for 1st payment option. Example: 9.99	0.00
options.payment.1.taxrate	string	1. tax rate:Tax rate for extra costs for 1st payment option. Values are: reduced, normal	normal
options.payment.[2-3]		Same options for options payment 2 to options.payment 3	

### OPTIONS SHIPPING

Property	Type	Description	Default
options.shipping.default	integer	Default shipping option:0: no preset. 1: mail. 2: mail express.	0
TODO options.shipping.1.lll	TODO string	TODO 1. label:Label for 1st shipping option. Example: cash in advance (German: Vorkasse) Default: EXT:caddy/pi1/locallang.xml:shippingoption_cashinadvance	see description
options.shipping.1.enabled	boolean	1. enabled:Disable it, if you don't want to offer the 1st shipping option.	1
options.shipping.1.costs	double	1. costs:Extra costs for 1st shipping option. Example: 9.99	0.00
options.shipping.1.taxrate	string	1. tax rate:Tax rate for extra costs for 1st shipping option. Values are: reduced, normal	normal
options.shipping.[2]		Same options for option shipping 2	

## OPTIONS SPECIALS

Property	Type	Description	Default
options.specials.default	integer	Default specials option:0: no preset. 1: neutral package. 2: fee for islands (German: Versandkosten Deutsche Inseln).	0
TODO options.specials.1.!!!	TODO string	TODO 1. label:Label for 1st specials option. Example: cash in advance (German: Vorkasse) Default: EXT:caddy/pi1/locallang.xml:specialsoption_cashinadvance	see description
options.specials.1.enabled	boolean	1. enabled:Disable it, if you don't want to offer the 1st specials option.	1
options.specials.1.costs	double	1. costs:Extra costs for 1st specials option. Example: 9.99	0.00
options.specials.1.taxrate	string	1. tax rate:Tax rate for extra costs for 1st specials option. Values are: reduced, normal	normal
options.specials.[2]		Same options for option specials 2	

## PAGES

Property	Type	Description	Default
pages.caddy	integer	Caddy*:Obligate! Uid of the page with the caddy - your shopping cart	
pages.caddymini	integer	Caddy mini:Uid of the page with the caddy mini - the cart for marginal column	
pages.shop	integer	Shop*:Obligate! Uid of the page which contains the items. Usually the root page.	
pages.revocation	integer	Power of Revocation:Uid of the page with the revocation info (German: Widerrufsbelehrung)	
pages.terms	integer	Terms & Conditions:Uid of the page with the terms & conditions (German: AGB)	

## PDF

Property	Type	Description	Default
pdfGeneral.fontfamily	options	Font family: The font family of your PDF attachments <b>Options</b> <ul style="list-style-type: none"> <li>Courier</li> <li>Helvetica</li> <li>Symbol</li> <li>Times</li> <li>ZapfDingbats</li> </ul>	Helvetica
pdfGeneral.fontStretching	integer	Font Stretching: In percent. 100: no effect. 90: smaller. 110: expanded	90

## PDF CADDY

Property	Type	Description	Default
pdf.caddy.x	int+	Caddy position left: Position of the caddy (items) from the left margin in millimeters	25
pdf.caddy.y	int+	Caddy position top: Position of the caddy (items) from the top margin in millimeters	130
pdf.caddy.width	int+	Caddy width: Width of the caddy (items) in millimeters	165
pdf.caddy.fontsize	int+	Caddy font-size: Font-size of the caddy (items) in points	10

## PDF DATE

Property	Type	Description	Default
pdf.date.align	options	Date alignment: L: left. C: center. R: right. empty: left for LTR or right for RTL <b>Options</b> <ul style="list-style-type: none"> <li>empty</li> <li>L</li> <li>C</li> <li>R</li> </ul>	L
pdf.date.x	int+	Date position left: Position of the date from the left margin in millimeters	175
pdf.date.y	int+	Date position top: Position of the date from the top margin in millimeters	104
pdf.date.width	int+	Date width: Width of the date in millimeters	25
pdf.date.fontsize	int+	Date font-size: Font-size of the date in points	10
pdf.date.strftime	string	Date format: Format of the date. Examples: %Y-m-%d, %d. %M %Y	%Y-%m-%d

## PDF DELIVERY ORDER

Property	Type	Description	Default
pdf.deliveryorder.address.x	int+	Address position left: Position of the delivery order address from the left margin in millimeters	25
pdf.deliveryorder.address.y	int+	Address position top: Position of the delivery order address from the top margin in millimeters	55
pdf.deliveryorder.address.fontsize	int+	Address font-size: Font-size of the delivery order address in points	10
pdf.deliveryorder.number.x	int+	Address position left: Position of the delivery number from the left margin in millimeters	25
pdf.deliveryorder.number.y	int+	Address position top: Position of the delivery number from the top margin in millimeters	110
pdf.deliveryorder.number.fontsize	int+	Address font-size: Font-size of the delivery number in points	24
pdf.deliveryorder.number.prefix	string	Number prefix: Prefix for the delivery number. Example : D-	
pdf.deliveryorder.termOfCredit.x	int+	Address position left: Position of the term of credit from the left margin in millimeters	25
pdf.deliveryorder.termOfCredit.y	int+	Address position top: Position of the term of credit from the top margin in millimeters	250
pdf.deliveryorder.termOfCredit.fontsize	int+	Address font-size: Font-size of the term of credit in points	10

## PDF INVOICE

Property	Type	Description	Default
pdf.invoice.address.x	int+	Address position left: Position of the invoice address from the left margin in millimeters	25
pdf.invoice.address.y	int+	Address position top: Position of the invoice address from the top margin in millimeters	55
pdf.invoice.address.fontsize	int+	Address font-size: Font-size of the invoice address in points	10
pdf.invoice.number.x	int+	Address position left: Position of the invoice number from the left margin in millimeters	25
pdf.invoice.number.y	int+	Address position top: Position of the invoice number from the top margin in millimeters	110
pdf.invoice.number.fontsize	int+	Address font-size: Font-size of the invoice number in points	24
pdf.invoice.number.prefix	string	Number prefix: Prefix for the invoice number. Example : D-	
pdf.invoice.termOfCredit.x	int+	Address position left: Position of the term of credit from the left margin in millimeters	25
pdf.invoice.termOfCredit.y	int+	Address position top: Position of the term of credit from the top margin in millimeters	250
pdf.invoice.termOfCredit.fontsize	int+	Address font-size: Font-size of the term of credit in points	10

## PDF ORDER

Property	Type	Description	Default
pdf.order.number.prefix	string	Number prefix: Prefix for the order number. Example : O-	

## PDF REVOCATION

Property	Type	Description	Default
pdf.revocation.align	options	Revocation alignment: L: left. C: center. R: right. empty: left for LTR or right for RTL <b>Options</b> <ul style="list-style-type: none"> <li>• <i>empty</i></li> <li>• L</li> <li>• C</li> <li>• R</li> </ul>	
pdf.revocation.x	int+	Revocation position left: Position of the date from the left margin in millimeters	25
pdf.revocation.y	int+	Revocation position top: Position of the date from the top margin in millimeters	100
pdf.revocation.width	int+	Revocation width: Width of the date in millimeters	165
pdf.revocation.fontsize	int+	Revocation font-size: Font-size of the date in points	10

## PDF TERMS

Property	Type	Description	Default
pdf.terms.align	options	Terms alignment: L: left. C: center. R: right. empty: left for LTR or right for RTL <b>Options</b> <ul style="list-style-type: none"> <li>• <i>empty</i></li> <li>• L</li> <li>• C</li> <li>• R</li> </ul>	
pdf.terms.x	int+	Terms position left: Position of the date from the left margin in millimeters	25
pdf.terms.y	int+	Terms position top: Position of the date from the top margin in millimeters	100
pdf.terms.width	int+	Terms width: Width of the date in millimeters	165
pdf.terms.fontsize	int+	Terms font-size: Font-size of the date in points	10



## PDF TEXTCOLOR

Property	Type	Description	Default
pdf.textColour.address	colour	Address: font colour as CSS name or HTML notation like #FFF or #123456	navy
pdf.textColour.caddy	colour	Caddy: font colour as CSS name or HTML notation like #FFF or #123456	navy
pdf.textColour.date	colour	Date: font colour as CSS name or HTML notation like #FFF or #123456	navy
pdf.textColour.numberDeliveryorder	colour	Number delivery order: font colour as CSS name or HTML notation like #FFF or #123456	navy
pdf.textColour.numberInvoice	colour	Number invoice: font colour as CSS name or HTML notation like #FFF or #123456	navy
pdf.textColour.numberLine	colour	Number line: font colour as CSS name or HTML notation like #FFF or #123456	navy
pdf.textColour.numberOrder	colour	Number order: font colour as CSS name or HTML notation like #FFF or #123456	navy
pdf.textColour.revocation	colour	Revocation: font colour as CSS name or HTML notation like #FFF or #123456	navy
pdf.textColour.termOfCredit	colour	Term of credit: font colour as CSS name or HTML notation like #FFF or #123456	navy
pdf.textColour.terms	colour	Terms: font colour as CSS name or HTML notation like #FFF or #123456	navy

## SYMBOLS AND SERVICE ATTRIBUTES

Property	Type	Description	Default
symbol.quantitySymbol	text	Quantity symbol: for example: pc. (English), St. (German)	pc.
symbol.service_attribute_1_symbol	text	Service Attribute 1 symbol: e.g. Weight: g, kg, lbs	
symbol.service_attribute_2_symbol	text	Service Attribute 2 symbol: e.g. Volume: l, gal	
symbol.service_attribute_3_symbol	text	Service Attribute 3 symbol: e.g. Length: m, cm, inch	

## TAX

Property	Type	Description	Default
tax.reduced	text	Tax rate for reduced items (e.g. 7). Value will be displayed.	7
tax.reducedCalc	text	Tax rate for reduced items (e.g. 0.07). Used for calculation.	0.07
tax.normal	text	Tax rate for normal items (e.g. 19). Value will be displayed.	19
tax.normalCalc	text	Tax rate for normal items (e.g. 0.19). Used for calculation.	0.19

## TEMPLATES

Property	Type	Description	Default
templates.e-mail	string	E-mails: Path to the HTML template file, which is used in e-mails. <b>Default</b> <ul style="list-style-type: none"><li>EXT:caddy/files/templates/caddy.html</li></ul>	see description
templates.html.caddy	string	HTML caddy: Path to the HTML template file, which is used in HTML pages for the caddy <b>Default</b> <ul style="list-style-type: none"><li>EXT:caddy/files/templates/caddy.html</li></ul>	see description
templates.html.caddymini	string	HTML caddy mini: Path to the HTML template file, which is used in HTML pages for the mini caddy <b>Default</b> <ul style="list-style-type: none"><li>EXT:caddy/files/templates/caddy.html</li></ul>	see description
templates.html.caddysum	string	HTML caddy sum: Path to the HTML template file, which is used in HTML pages for the caddy sum <b>Default</b> <ul style="list-style-type: none"><li>EXT:caddy/files/templates/caddy.html</li></ul>	see description
templates.pdf.deliveryorder	string	PDF delivery order: Path to the HTML template file, which is used in the delivery order - a PDF attachment <b>Default</b> <ul style="list-style-type: none"><li>EXT:caddy/files/templates/caddy.html</li></ul>	see description
templates.pdf.invoice	string	PDF invoice: Path to the HTML template file, which is used in the invoice - a PDF attachment <b>Default</b> <ul style="list-style-type: none"><li>EXT:caddy/files/templates/caddy.html</li></ul>	see description

## URL

Property	Type	Description	Default
url.showUid	string	showUid: Alias for the URL parameter showUid. <b>It must correspond with [CADDY - GETPOST: uid]</b> . I.e: calendarUid	itemUid
url.extension	String	Extension parameter: Parameter of your extension (sends the item uid). <b>It must correspond with [CADDY - GETPOST: uid]</b> . If you are using Browser - TYPO3 without PHP, it is tx_browser_pi1.	tx_browser_pi1

# Calculating

## Default code

Caddy is delivered with a default payment, shipping and specials configuration. See TypeScript Object Browser at

```
plugin.tx_caddy_pi1 {
  api {
    options {
      payment {
        ...
      }
      shipping {
        ...
      }
      specials {
        ...
      }
    }
  }
}
```

See detailed information at "tx\_caddy\_pi1.api.options.payment" on page 71 below.

## Non documented properties

Each shipping and payment method have four properties:

- available\_from
- available\_until
- free\_from
- free\_until

and a general setting for shipping and payment

- show\_all\_disabled

Sorry, these properties aren't documented in this manual. The code snippet below contains an example with "available\_until".

## Sample with a modified default code

```
plugin.tx_caddy_pi1 {
  api {
    options {
      ...
      shipping {
        options {
          1 {
            title {
              data >
              value = Shipping by GLS
              noTrimWrap >
            }
            extra = by_quantity
            extra {
              1 {
                value = 1
                extra = 5.00
              }
              2 {
                value = 6
                extra = 7.40
              }
            }
            // option is only available if gross price is less than 200.00
            available_until = 200.00
          }
          ...
        }
      }
    }
  }
}
```

## Based on price (by\_price)

With this rule you can calculate one of your service costs depending on the total gross price for all products.

### Setup

```
plugin.tx_caddy_pil {
    api {
        options {
            ...
            shipping {
                options {
                    1 {
                        title = Standard
                        extra = by_price
                        extra {
                            1 {
                                value = 0
                                extra = 10.00
                            }
                            2 {
                                value = 100
                                extra = 7.50
                            }
                            3 {
                                value = 200
                                extra = 5.00
                            }
                        }
                    }
                    tax = normal
                }
                ...
            }
        }
    }
}
```

In the example there is one shipping method called "Standard", the normal tax will be applied.

- If the total gross price of all products is lower than 100.00 the shipping costs will be 10.00.
- If the total gross price of all products is lower than 200.00 the shipping costs will be 7.50.
- If the total gross price of all products is equal to or higher than 200.00 the shipping costs will be 5.00.

## Based on quantity (by\_quantity)

With this rule you can calculate one of your service costs depending on the total quantity for products.

### Constants

```
plugin.caddy {
  symbol {
    // Constant Editor [CADDY - SYMBOLS AND SERVICE ATTRIBUTES] > Quantity symbol
    quantitySymbol = Pcs.
  }
}
```

With the setting above you can configure the symbol or abbreviation which is displayed as suffix of the quantity figure.

### Setup

```
plugin.tx_caddy_pil {
  options {
    shipping {
      options {
        1 {
          title {
            data >
            value = Shipping by GLS
            noTrimWrap >
          }
          extra = by_quantity
          extra {
            1 {
              value = 1
              extra = 5.00
            }
            2 {
              value = 6
              extra = 7.40
            }
          }
        }
        // method only available if gross price is less than 200.00
        available_until = 200.00
      }
    }
  }
}
```

In the example above we configure a special shipping rule based on the quantity. There is one shipping method called "Standard", the normal tax will be applied.

- If the total quantity of all products is lower than 4 the shipping costs will be 5.35.
- If the total quantity of all products is lower than 11 the shipping costs will be 7.10.
- If the total quantity of all products is lower than 21 the shipping costs will be 9.70.
- If the total quantity of all products is equal to or higher than 21 the shipping costs will be 11.60.

## Based on each (each)

With this rule you can calculate one of your service costs depending on the total quantity of all products. The quantity will be multiplied by the price you set for each product.

### Example setup

```
plugin.tx_caddy_pi1 {
    api {
        options {
            ...
            shipping {
                options {
                    1 {
                        title = Standard
                        extra = each
                        extra {
                            1 {
                                extra = 2.00
                            }
                        }
                    }
                    tax = normal
                }
                ...
            }
        }
    }
}
```

In the example above we configure a special shipping rule for each product. There is one shipping method called "Standard", the normal tax will be applied.

- The shipping costs will be 2.00 for each product in your cart.
- If you have got 10 products in your cart (total quantity) the shipping will be 20.00.

## Individual sum-calculation (by\_service\_attribute\_x\_sum)

With this rule you can calculate one of your service costs depending on the total of an individual attribute for all products. You have to set either the correct database field.

### Constants

```
plugin.caddy {
  db {
    // Constant Editor [CADDY - DATABASE] > Service Attribute 1
    service_attribute_1 = weight
  }
  symbol {
    // Constant Editor [CADDY - SYMBOLS AND SERVICE ATTRIBUTES] > Service Attribute 1 symbol
    service_attribute_1_symbol = lbs
  }
}
```

The constants set the database field and the abbreviation which is displayed as suffix of the quantity value.

### Setup

```
plugin.tx_caddy_pil {
  api {
    options {
      ...
      shipping {
        options {
          1 {
            title = Standard
            extra = by_service_attribute_1_sum
            extra {
              1 {
                value = 600
                extra = 4.00
              }
              2 {
                value = 800
                extra = 6.00
              }
              3 {
                value = 1000
                extra = 12.00
              }
            }
          }
          tax = normal
        }
      }
      ...
    }
  }
}
```

In the example above we configure a special shipping rule based on the total of an individual attribute "weight" in pounds (lbs). The attribute is stored in your database.

- If the total weight of all products is lower than 600 the shipping costs will be 0.00.
- If the total weight of all products is lower than 800 the shipping costs will be 4.00.
- If the total weight of all products is lower than 1.000 the shipping costs will be 6.00.
- If the total weight of all products is equal to or higher than 1.000 the shipping costs will be 12.00.

## Individual max-calculation (by\_service\_attribute\_x\_max)

With this rule you can calculate one of your service costs depending on the maximum value of an individual attribute. For example this rule could be used for sending posters. The longest poster determines the length of the packaging.

### Constants

```
plugin.caddy {
  db {
    // Constant Editor [CADDY - DATABASE] > Service Attribute 2
    service_attribute_2 = size
  }
  symbol {
    // Constant Editor [CADDY - SYMBOLS AND SERVICE ATTRIBUTES] > Service Attribute 2 symbol
    service_attribute_2_symbol = cm
  }
}
```

### Setup

```
plugin.tx_caddy_pil {
  api {
    options {
      ...
      shipping {
        options {
          1 {
            title = Standard
            extra = by_service_attribute_2_max
            extra {
              1 {
                value = 0
                extra = 4.00
              }
              2 {
                value = 80
                extra = 6.00
              }
              3 {
                value = 100
                extra = 8.00
              }
              4 {
                value = 200
                extra = 12.00
              }
            }
          }
          tax = normal
        }
      }
      ...
    }
  }
}
```

In the example above we configure a special shipping rule based on the maximum of an individual attribute "length" in centimeters (cm). The attribute is a POST parameter.

- If the maximum length is lower than 80 the shipping costs will be 4.00.
- If the maximum length is lower than 100 the shipping costs will be 6.00.
- If the maximum length is lower than 200 the shipping costs will be 8.00.
- If the maximum length is equal to or higher than 200 the shipping costs will be 12.00.

Please not that the quantity of a specific poster is not important. The same poster does not get longer if you buy 2 or 3 etc.



# Corporate Design

## Colours

Documentation for Caddy 4.x – maybe proper for version 6.x

Caddy is delivered with the four colour schemes:

- blue, green, orange, red.

This schemes has an effect on

- HTML content,
- E-mail and
- PDF attachments.

## Screenshots

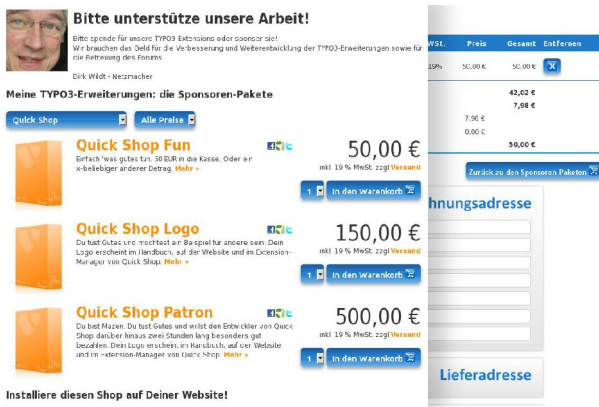


Illustration 35: Caddy blue

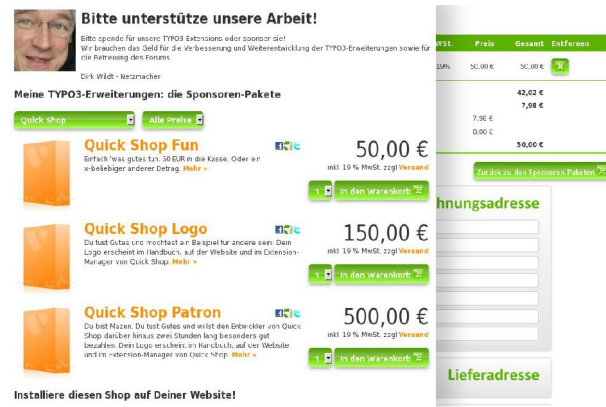


Illustration 36: Caddy green

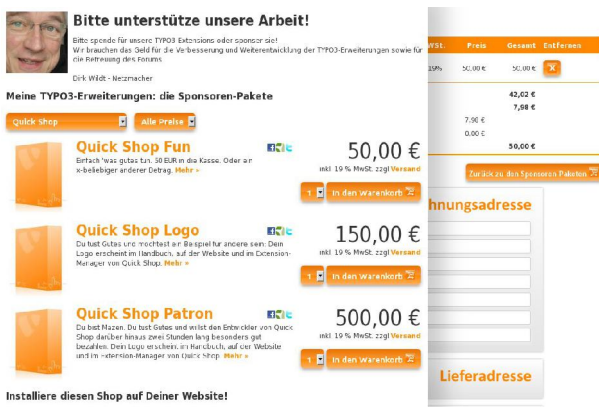


Illustration 37: Caddy orange

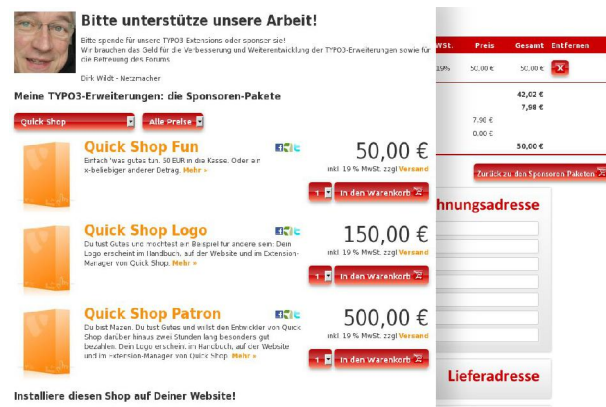


Illustration 38: Caddy red

## Select a colour scheme

You select a colour scheme by including a static template for this colour. See

- "Static Templates > CSS" on page 31 above.

The static template overwrites the colour properties in the Constant Editor. If you need another colour scheme, you have to configure the colours in the Constant Editor. See

- "Constant Editor > HTML" on page 36 above.

## Send your scheme to the developer!

If you are creating your own scheme, please send the values of the Constant Editor to the developer. I will include this scheme as a static template. My email: <http://wildt.at.die-netzmacher.de/>

## Icons

Documentation for Caddy 4.x – maybe proper for version 6.x

## Controlling




Illustration 39 shows a table with columns 'Preis', 'Gesamt', and 'Entfernen'. The 'Entfernen' column contains a blue button with a white 'X' icon. The table has a total of 50,00 €.

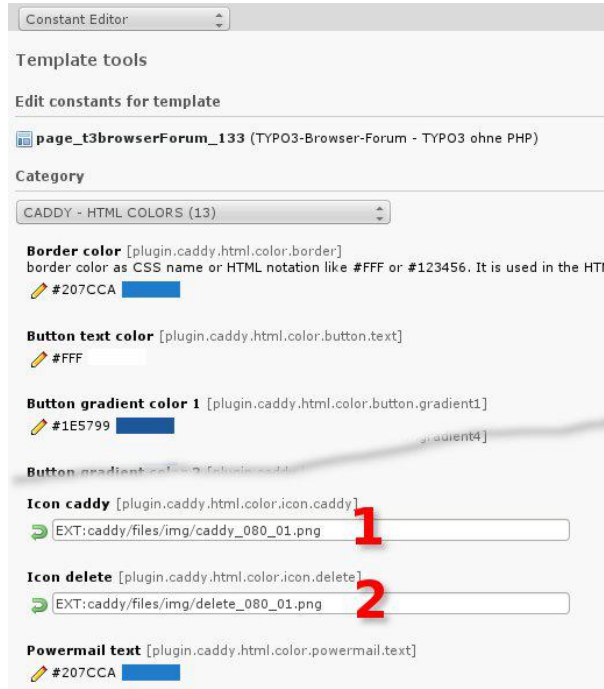


Illustration 40 shows the 'Constant Editor' interface. It displays the 'Icon caddy' property with a value of 'EXT:caddy/files/img/caddy\_080\_01.png' (marked with a red '1') and the 'Icon delete' property with a value of 'EXT:caddy/files/img/delete\_080\_01.png' (marked with a red '2').




Illustration 41 shows the same table as Illustration 39, but the 'Entfernen' column now contains a red button with a white 'X' icon. The total remains 50,00 €.

Illustration 39: Caddy blue

Illustration 40: Icon path in the Constant Editor

Illustration 41: caddy blue/red

If you like to change the icons, you have to configure two properties with the Constant Editor:

1. html.colour.icon.caddy
2. html.colour.icon.delete

See "Constant Editor > HTML" on page 36 above.

We replaced blue icons with red icons in the illustration above.

## Ready-to-use icons

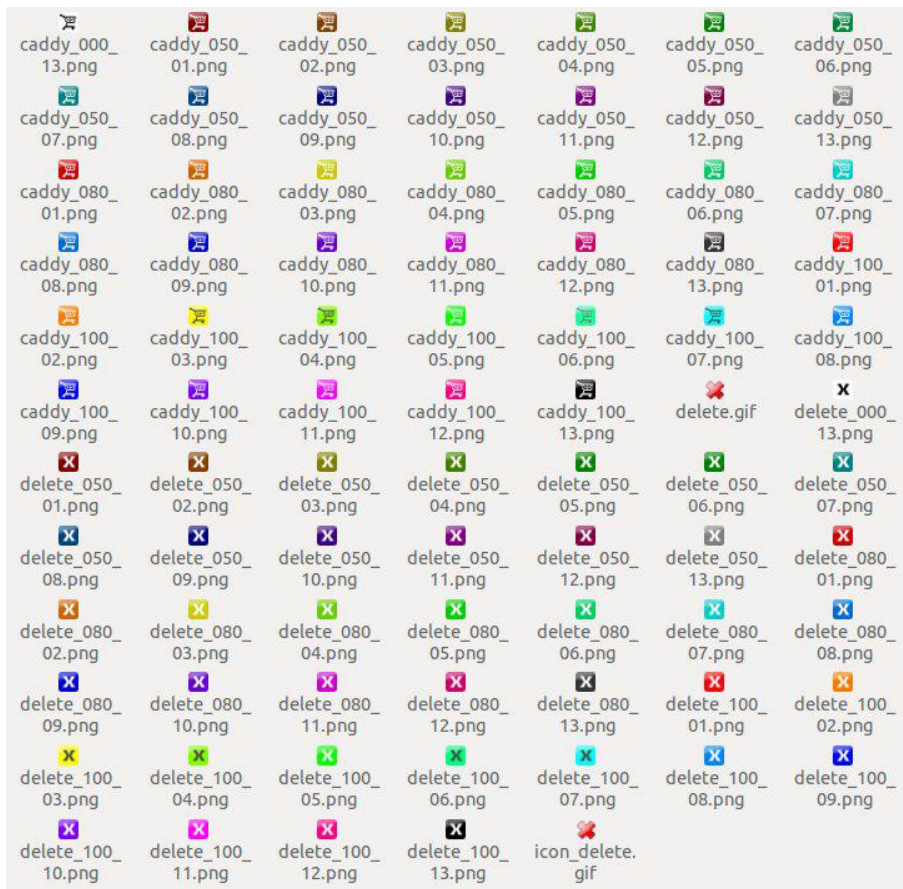


Illustration 42: Caddy icons

Caddy is delivered with two icons:

- the caddy icon
- the delete icon

Each icon is available in 13 colours.

Each colour is available in three intensities.

See the 82 icons in the illustration above.

The icons are stored at

- files/img and
- <http://forge.typo3.org/projects/extension-caddy/repository/show/trunk/files/img>

## E-Mail

Coloured lines are used in e-mails.

You configure the colour by the Constant Editor. See

- "Colours" on page 49 above.
- "Constant Editor > HTML" on page 36 above.

## HTML Template

- "Constant Editor > TEMPLATES" on page 42 above.
- "Setup > tx\_caddy\_pi1.templates" on page 75 below.

## Attachments

Caddy attaches PDF files to an e-mail.

This PDF attachments are applicable:

- invoice
- delivery order
- power of revocation
- terms and conditions

You can add more attachments unlimited.

## Corporate Design



Illustration 43: Your (1) draft will merged ... Illustration 44: ... with (2) Caddy content ... Illustration 45: ... to the (3) attachment.

You can use your own corporate design for each attachment:

1. Your draft (left hand) will merged with
2. the content generated by Caddy (middle) to
3. the attachment (right hand).

The illustration above displays an example for an invoice.

## Your own draft (PDF version upto 1.4)

Your draft must be a PDF file in **PDF version 1.4 or lower**. You will have best quality.

Caddy is using the German DIN A/4 paper size by default:

- width: 210 millimeter
- height: 297 millimeters

## Upload

Please upload your draft:

1. Modul File      Filelist
2. Page tree      Select a folder
3. Edit area      Upload your PDF file

In our example we uploaded my.pdf into the directory fileadmin/user\_upload/quick\_shop.

## Configuring Paths

Please configure the Caddy paths.

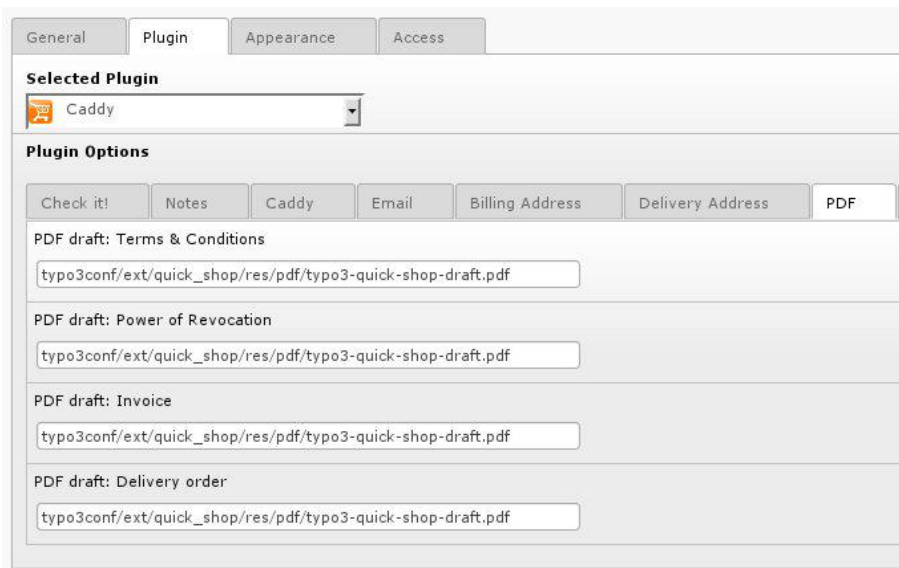


Illustration 46: [PDF] tab of the Caddy plugin

1. Modul Web List
2. Page tree The page with the caddy plugin
3. Edit area Select the caddy plugin
4. tab [Plugin] > tab [PDF]  
(see illustration above)
5. Enter the path of your PDF file  
(here: fileadmin/user\_upload/quick\_shop/my.pdf)

## Colours

You configure the colour ready-to-use by the include static templates and for individual needs by the Constant Editor. See

- "Colours" on page 49 above.
- "Constant Editor > HTML" on page 36 above.
- "Constant Editor > PDF TEXTCOLOR" on page 41 above

## Properties

You can control nearly everything within a PDF attachment:

- the invoice address (1)
- the delivery address (2)
- the date (3)
- the so called number line (4)
- the caddy (5), the power of revocation and the terms and conditions
- the term of credit (6)
- the background and
- the font.

You are controlling this properties overall:

- the date,
- the font family,
- the font stretching and
- the font colour.

You are controlling this properties per attachment<sup>1</sup>:

- invoice addresses and delivery address
- invoice number and delivery number
- terms of credit

## Background

You can use your own corporate design for the background in an attachment. See

- "Corporate Design" on page 52 above.

## Font Family and Font Stretching

You are controlling

- the font family and
- the font stretching

in general by the Constant editor. See

- "Constant Editor > PDF" on page 39 above,
- "Constant Editor > PDF" on page 39 above.

You are controlling it for each element by TypoScript. See

- "Setup > tx\_caddy\_pi1.pdf" on page 74 below.

## Font Colour

You are controlling the font colour in general by the Constant editor. See

- "Constant Editor > PDF TEXTCOLOR" on page 41 above.

You are controlling it for each element by TypoScript. See

- "Setup > tx\_caddy\_pi1.pdf" on page 74 below.



Illustration 47: Properties of a PDF attachment (here: invoice)

<sup>1</sup> Attachments are: invoice, delivery order, power of revocation and terms & conditions



### Invoice Address

The invoice address is used in the attachments:

- invoice
- delivery order, if there isn't any different address for the delivery
- power of revocation
- terms and condition

You are controlling the invoice address in general by the Constant editor. See

- "Constant Editor > PDF INVOICE" on page 40 above.

You are controlling it for each element by TypoScript. See

- "Setup > tx\_caddy\_pi1.pdf" on page 74 below.

### Delivery Address

If there are different addresses for the invoice and the delivery, the delivery address is used in the attachments:

- invoice
- delivery order

You are controlling the invoice address in general by the Constant editor. See

- "Constant Editor > PDF DELIVERY ORDER" on page 39 above.

You are controlling it for each element by TypoScript. See

- "Setup > tx\_caddy\_pi1.pdf" on page 74 below.

### Date

The date is used in the attachments:

- invoice
- delivery order
- power of revocation
- terms and condition

You are controlling the date in general by the Constant editor. See

- "Constant Editor > PDF DATE" on page 39 above.

You are controlling it for each element by TypoScript. See

- "Setup > tx\_caddy\_pi1.pdf" on page 74 below.

### Numbers

You are controlling the numbers in general by the Constant editor:

- invoice  
"Constant Editor > PDF INVOICE" on page 40 above.
- delivery order  
"Constant Editor > PDF DELIVERY ORDER" on page 39 above.
- power of revocation  
"Constant Editor > PDF REVOCATION" on page 40 above.
- terms and condition  
"Constant Editor > PDF TERMS" on page 40 above.

You are controlling it for each element by TypoScript. See

- "Setup > tx\_caddy\_pi1.pdf" on page 74 below.

### Caddy

The caddy is used in the attachments:

- invoice

- delivery order

The caddy format depends on the attachment.

- The caddy of an invoice displays items and calculation.
- The caddy of a delivery order displays items only.

You are controlling

- position, width and font size

in general by the Constant editor:

- "Constant Editor > PDF CADDY" on page 39 above.

### Term of Credit

The term of credit is used in the attachments:

- invoice
- delivery order

You are controlling it in general by the Constant editor:

- "Constant Editor > PDF INVOICE" on page 40 above.
- "Constant Editor > PDF DELIVERY ORDER" on page 39 above.

### Terms and Conditions

The terms and conditions are taken from the page Terms & Conditions. See

- "Constant Editor > PAGES" on page 38 above.

The terms and conditions are used in the attachment:

- terms and conditions

You are controlling

- position,
- width and
- font size

in general by the Constant editor:

- "Constant Editor > PDF TERMS" on page 40 above.

You can control it by TypoScript. See

- "Setup > tx\_caddy\_pi1.pdf" on page 74 below.

### Power of Revocation

The power of revocation is taken from the page Power of Revocation. See

- "Constant Editor > PAGES" on page 38 above.

The power of revocation are used in the attachment:

- power of revocation

You are controlling

- position,
- width and
- font size

in general by the Constant editor:

- "Constant Editor > PDF REVOCATION" on page 40 above.

You can control it by TypoScript. See

- "Setup > tx\_caddy\_pi1.pdf" on page 74 below.



## Work-flow

This section is for understanding only.

### Add, update and delete an item

#### Add an item

A customer can add an item into the caddy.

- You have to create the form – or the link – with the GET parameters or POST parameters needed by Caddy.
- Caddy needs the uid of the item and the quantity selected by the customer.
- Caddy checks the price and the tax of the item in the table of the item.
- You have to configure the table label and some field labels by the TypoScript Constant Editor.
- Caddy stores all needed values in a session.
- You can use this data everywhere at your website i.e. with the mini caddy plugin.
- The DRS – Development Reporting System – prompts the session data to devlog.

#### Update an item

The customer can update the quantity of an item.

- Caddy updates the session data.

#### Delete an item

The customer can delete an item from the caddy.

- Caddy updates the session data.

### Calculating

Caddy calculates the cost of the order.

Parts of this calculation are among others

- items x quantity x price gross
- delivery costs
- payment costs
- special costs
- sum net
- sum gross
- tax

Caddy stores all values in the session. You can use this data everywhere at your website i.e. with the mini caddy plugin.

The DRS – Development Reporting System – prompts the session data to devlog.

#### TypoScript

- "Setup > tx\_caddy\_pi1.api.marker.sum" on page 69 below.

### Ordering

The customer can order the items of course.

The confirmation e-mail – the e-mail to the customer – and the order e-mail – the e-mail to the vendor – is generated and sent by Powermail.

Caddy controls Powermail:

- If the caddy is empty, it hides the Powermail form by CSS.

Caddy is listening on powermail parameters:

- GET parameters and POST parameters
- Some other "internal" parameters like
  - the Powermail confirmation mode and
  - the Powermail version (1.x or 2.x)

Caddy is listening on the Powermail session.

Caddy can detect – depending on the parameters above –, if the Powermail form is sent.

If the Powermail form is sent:

- Caddy updates all needed session data
- Caddy serves some methods (user functions), which are called by Powermail like
  - controlling attachments for the e-mails to the customer and the sender
  - serving data like the whole caddy and the numbers for the delivery order, the invoice and the order itself.
- Caddy cleans up the own session.

#### TypoScript

- "Setup > tx\_caddy\_pi1.powermail" on page 77 below.

## Variants

Sorry, that variants isn't explained in detail. See below only a sample of the TYPO3 Organisier.

The TYPO3 Organisier is using the property variants for reserving tickets.

The sample is a variant of

- ticket and
- price

## TypoScript Snippet

Easy, unsecure and NOT RECOMMENDED

```
plugin.tx_caddy_pil {
    db {
        sql >
        sql = TEXT
        sql {
            value (
                SELECT
                    CAST('{GP:tx_org_cal|uid}' AS SIGNED) AS puid,
                    CONCAT('<strong>', tx_org_cal.title, '</strong><br />',
                        '###GP:TX_ORG_CAL.DATETIME###<br />',
                        'Karte ', tx_org_calentrance.title, ' ', tx_org_calentrance.value, ' &euro;')
                    tx_org_calentrance.value AS title,
                    tx_org_tax.value AS gross,
                    tx_org_tax.value AS tax,
                    CAST('{GP:tx_org_cal|uid}' AS SIGNED) AS sku
                FROM `tx_org_cal`
                LEFT JOIN tx_org_cal_mm_tx_org_calentrance
                ON (
                    tx_org_cal_mm_tx_org_calentrance.uid_local = tx_org_cal.uid)
                LEFT JOIN tx_org_calentrance
                ON (
                    tx_org_cal_mm_tx_org_calentrance.uid_foreign = tx_org_calentrance.uid
                    AND tx_org_calentrance.uid = '###GP:TX_ORG_CALENTRANCE.UID###'
                    ###ENABLE_FIELDS:TX_ORG_CALENTRANCE###)
                LEFT JOIN tx_org_tax
                ON (
                    tx_org_calentrance.tx_org_tax = tx_org_tax.uid
                    ###ENABLE_FIELDS:TX_ORG_TAX###)
                WHERE tx_org_cal.uid = '###GP:TX_ORG_CAL.UID###'
                    ###ENABLE_FIELDS:TX_ORG_CAL###
            )
            insertData = 1
        }
    }
    settings {
        variant {
            10 = tx_org_calentrance.uid
        }
    }
}
```

## Secure, not easy but RECOMMENDED

View:

[https://forge.typo3.org/projects/extension-org/repository/entry/trunk/Configuration/TypoScript/calendar/201/tx\\_caddy/single/setup.ts](https://forge.typo3.org/projects/extension-org/repository/entry/trunk/Configuration/TypoScript/calendar/201/tx_caddy/single/setup.ts)

Download:

[https://forge.typo3.org/projects/extension-org/repository/raw/trunk/Configuration/TypoScript/calendar/201/tx\\_caddy/single/setup.ts](https://forge.typo3.org/projects/extension-org/repository/raw/trunk/Configuration/TypoScript/calendar/201/tx_caddy/single/setup.ts)

```
plugin.tx_caddy_pil {
    db {
        sql >
        sql = COA
        sql {
            // SELECT
            10 = COA
            10 {
                wrap = SELECT |
                // puid: GP:tx_org_cal|uid
            10 = TEXT
            10 {
                stdWrap {
                    data = GP:tx_org_cal|uid
                    prioriCalc = intval
                }
                noTrimWrap = | '|' AS puid, |
            }
            // title: CONCAT ...
            20 = COA
            20 {
                wrap = CONCAT(|) AS title,
                // tx_org_cal.title
            10 = TEXT
            10 {
                value = tx_org_cal.title
                noTrimWrap = |'<strong>', |, '</strong><br />', |
            }
            // GP:tx_org_cal|datetime
            20 = TEXT
            20 {
                //value = Friday, 25. September " 2015, '01:38 Uhr
                stdWrap {
                    data = GP:tx_org_cal|datetime
                    split {
                        // ASCII 39: quote
                        token.char = 39
                        // ASCII 32: space
                        //token.char = 32
                        cObjNum = 1
                        1.current = 1
                        1.wrap = |
                    }
                    htmlSpecialChars = 1
                }
                noTrimWrap = |'|<br />', |
            }
            // Label for 'ticket'
            30 = TEXT
            30 {
                value = ticket
                lang {
                    de = Karte
                    en = ticket
                }
                noTrimWrap = |'| ', |
            }
            // ... as title
            40 = TEXT
            40 {
                value = tx_org_calentrance.title, ' ', tx_org_calentrance.value, ' &euro;'
            }
        }
    }
}
```

```

    // gross: tx_org_calentrance.value
30 = TEXT
30 {
    value = tx_org_calentrance.value
    noTrimWrap = | | AS gross, |
}
    // tax: tx_org_calentrance.value
40 = TEXT
40 {
    value = tx_org_tax.value
    noTrimWrap = | | AS tax, |
}
    // sku: GP:tx_org_cal|uid
50 = TEXT
50 {
    stdWrap {
        data = GP:tx_org_cal|uid
        htmlSpecialChars = 1
    }
    noTrimWrap = | | AS sku |
    prioriCalc = intval
}
}
// FROM tx_org_cal
20 = TEXT
20 {
    value = tx_org_cal
    noTrimWrap = | FROM | |
}
// JOIN
30 = COA
30 {
    // LEFT JOIN tx_org_mm_all
10 = TEXT
10 {
    value (
        LEFT JOIN tx_org_mm_all
        ON (
            tx_org_mm_all.uid_local      = tx_org_cal.uid
            AND tx_org_mm_all.table_local = 'tx_org_cal')
    )
    noTrimWrap = | | |
}
// LEFT JOIN tx_org_calentrance
20 = COA
20 {
    wrap = LEFT JOIN tx_org_calentrance ON (|)
    // constants
10 = TEXT
10 {
    value = tx_org_mm_all.uid_foreign = tx_org_calentrance.uid AND
tx_org_mm_all.table_foreign = 'tx_org_calentrance'
    noTrimWrap = | | |
}
    // GP:tx_org_calentrance|uid
20 = TEXT
20 {
    stdWrap {
        data = GP:tx_org_calentrance|uid
        htmlSpecialChars = 1
    }
    prioriCalc = intval
    noTrimWrap = | AND tx_org_calentrance.uid = | |
}
    // ###ENABLE_FIELDS:TX_ORG_CALENTRANCE###
30 = TEXT
30 {
    value = ###ENABLE_FIELDS:TX_ORG_CALENTRANCE###
    noTrimWrap = | | |
}
}

```

```

    // LEFT JOIN tx_org_tax
30 = TEXT
30 {
    value (
        LEFT JOIN tx_org_tax
        ON (
            tx_org_calentrance.tx_org_tax = tx_org_tax.uid
            ###ENABLE_FIELDS:TX_ORG_TAX###)
    )
    noTrimWrap = | | |
}
// WHERE
40 = TEXT
40 {
    stdWrap {
        data = GP:tx_org_cal|uid
    }
    prioriCalc = intval
    noTrimWrap = | WHERE tx_org_cal.uid = | ###ENABLE_FIELDS:TX_ORG_CAL### |
}
}
}
}
settings {
    variant {
        10 = tx_org_calentrance.uid
    }
}
}

```

## Non possible features

There isn't any limit for items, neither a minimum nor a maximum, in case of variants.

# Archive audit proof

Caddy archives each order in a database.

## Database is read-only

By default this database is read-only:

- You can't change any value in a record.
- You can't delete any record.

The database stores among others:

- All attachments, which are sent to
  - the customer
  - the vendor
- The e-mail address of the customer.

Both – read-only and the disabled delete property – is meant with audit proof<sup>1</sup>.

Be aware:

If you need the logged data for ever, you have to take care off a backup!

## Disable audit proof

You can disable the audit proof mode by the extension manager.

### Possible reasons

There are some needs for disabling the audit proof:

- You have tested Caddy and you want to delete the logged data.
- Your database is growing an growing and you want to delete records and files.

### Extension Manager

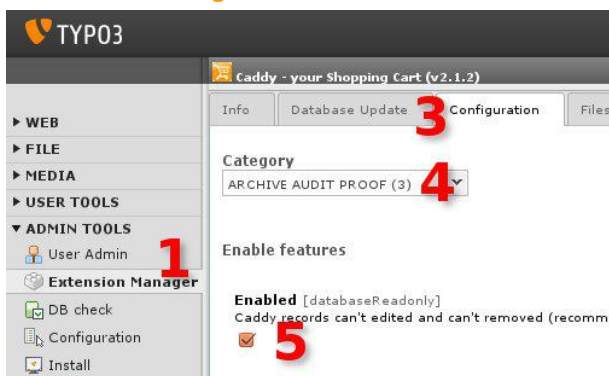


Illustration 48: Audit proof by the Extension Manager

- |                        |                                 |
|------------------------|---------------------------------|
| 1. Module: Admin Tools | Extension Manager               |
| 2. Edit Area           | Select the Caddy extension      |
| 3.                     | Tab [Configuration]             |
| 4.                     | Category: [ARCHIVE AUDIT PROOF] |
| 5.                     | Enabled: [ ]                    |
| 6.                     | [Update]                        |

<sup>1</sup> German: revisionssicher



## Reset numbers

Caddy is storing the numbers in the registry of TYPO3 – table sys\_registry.

If you like to reset the numbers, you need a SQL command like in the examples below.

### Get all keys

```
SELECT *
FROM sys_registry
WHERE entry_namespace = 'tx_caddy'
```

The result will look like this:

```
"uid","entry_namespace","entry_key","entry_value"
"561","tx_caddy","lastOrder_1279","i:1;"
"553","tx_caddy","lastOrder_15","i:4;"
"563","tx_caddy","lastOrder_7567","i:4;"
...
"626","tx_caddy","page_7843_deliveryorder","i:1;"
"627","tx_caddy","page_7843_invoice","i:1;"
"628","tx_caddy","page_7843_order","i:1;"
```

### Syntax of the entry\_key

The entry\_key has the format:

- pageUid\_KindOfNumber

where

- pageUid is
  - the uid of the page, which contains the Caddy plugin
  - format is: page\_uid
- KindOfNumber is
  - deliveryorder
  - invoice
  - order

## Reset (remove the keys)

### All keys

```
DELETE
FROM sys_registry
WHERE entry_namespace = 'tx_caddy'
```

### Keys of a single Caddy plugin

```
DELETE
FROM sys_registry
WHERE entry_namespace = 'tx_caddy'
AND entry_key LIKE 'page_7567_%'
```

where 7567 is the page uid of your Caddy plugin

# Reference

It is recommended to configure Caddy by the Constant Editor and not by the TypoScript Object Browser directly.

## Constant Editor

Please refer to the section "Controlling Caddy > Static Templates" on page 31 above.

## Setup

It is recommended to configure Caddy by the Constant Editor and not by the TypoScript Object Browser directly.

All properties have the prefix plugin.tx\_caddy\_pi1.

Example: db.table is plugin.tx\_caddy\_pi1.db.table

### tx\_caddy\_pi1 – Overview

Property:	Data type:	Description:
plugin.tx_caddy_pi1	array	<p>Configuration for the Caddy main plugin</p> <p><b>Code:</b></p> <pre>plugin.tx_caddy {   api                ...   db                 ...   debug              ...   pdf                ...   pid                ...   pluginCheck        ...   templates           ...   _HTMLMARKER        ...   _CSS_DEFAULT_STYLE ...   powermail           ... }</pre>

### tx\_caddy\_pi1.api

Property:	Data type:	Description:
api	array	<p>Configuration for the Caddy API</p> <p><b>Code:</b></p> <pre>plugin.tx_caddy {   api {     conditions        ...     e-payment         ...     getpost            ...     marker             ...     options            ...     symbols            ...     tax                ...   } }</pre>

### tx\_caddy\_pi1.api.conditions

Property:	Data type:	Description:
api.conditions	array	<p>Conditions for calculating. Array contains one condition only: the minimum limit for the gross sum over all items (without any other cost like for delivery or service)</p> <p><b>Code:</b></p> <pre>plugin.tx_caddy {   api {     conditions {       ... &lt;-please inspect it with the TypoScript Object Browser     }   } }</pre>

### tx\_caddy\_pi1.api.e-payment

Property:	Data type:	Description:
api.e-payment	array	<p>E-Payment Interface</p> <p><b>Code:</b></p> <pre> plugin.tx_caddy {     api {         e-payment {             ... &lt;-please inspect it with the TypoScript Object Browser         }     } } </pre>

### tx\_caddy\_pi1.api.getpost

Property:	Data type:	Description:
api.getpost	array	<p>Configuration for the Get-/Post-parameters, which are sent by GET or POST. Each item has the COA property.</p> <p>Please configure it with the Constant Editor. See</p> <ul style="list-style-type: none"> <li>"Constant Editor &gt; GETPOST" on page 35 above.</li> </ul> <p><b>Code:</b></p> <pre> plugin.tx_caddy {     api {         getpost {             gross    ...             min      ...             max      ...             qty      ...             sku      ...             tax      ...             title    ...             uid      ...             volume   ...             weight   ...         }     } } </pre>

## tx\_caddy\_pi1.api.marker.items

Property:	Data type:	Description:
api.marker.items	array	<p>Configuration of marker, which are used in HTML templates for an item.</p> <p>Example for an HTML marker:</p> <ul style="list-style-type: none"> <li>###SUMGROSS###</li> </ul> <p>Please inspect the items below with the TypoScript Object Browser.</p> <p><b>Code:</b></p> <pre> plugin.tx_caddy {   api {     marker {       items {         delete      = IMAGE      // delete icon         gross       = COA        // gross costs of the item         min         = TEXT       // minimum quantity for ordering         max         = TEXT       // maximum quantity for ordering         net         = COA        // net costs of the item         uid         = TEXT       // uid of the item         qty         = TEXT       // quantity of the item         service_attribute_1 = TEXT // service attribute 1         service_attribute_2 = TEXT // service attribute 2         service_attribute_3 = TEXT // service attribute 3         sku         = TEXT       // stock keeping unit         sumgross    = COA        // gross costs sum ( gross costs * qty )         sumnet      = COA        // net costs sum ( net costs * qty )         sumtax      = COA        // tax costs sum ( tax costs * qty )         tax         = TEXT       // tax value of the item (0 , 1, 2)         taxrate     = COA        // taxrate of the item         title       = TEXT       // label of the item       }     }   } } </pre>

## tx\_caddy\_pi1.api.marker.sum

Property:	Data type:	Description:
api.marker.sum	array	<p>Configuration of marker, which are used in HTML templates for a sum.</p> <p>Example for an HTML marker:</p> <ul style="list-style-type: none"> <li>###SUMSUMTAXNORMAL###</li> </ul> <p>Please inspect the items below with the TypoScript Object Browser.</p> <p><b>Code:</b></p> <pre> plugin.tx_caddy {   api {     marker {       sum {         labels {           optionspaymentlabel      = TEXT           optionsshippinglabel      = TEXT           optionsspecialslabels    = TEXT           taxrate_reduced_string    = COA           taxrate_normal_string    = COA         }         rates {           optionspaymentsumrate     = COA           optionsshippingsumrate    = COA           optionsspecialssumrate    = COA         }         values {           optionspaymentsumgross    = COA           optionspaymentsumnet      = COA           optionspaymentsumtaxnormal = COA           optionspaymentsumtaxreduced = COA           optionsshippingsumgross   = COA           optionsshippingsumnet     = COA           optionsshippingsumtaxnormal = COA           optionsshippingsumtaxreduced = COA           optionsspecialssumgross   = COA           optionsspecialssumnet     = COA           optionsspecialssumtaxnormal = COA           optionsspecialssumtaxreduced = COA           sumitemsgross             = COA           sumitemsnet               = COA           sumitemstaxnormal         = COA           sumitemstaxreduced        = COA           sumoptionsgross           = COA           sumoptionsnet             = COA           sumoptionstaxnormal       = COA           sumoptionstaxreduced      = COA           sumsumgross               = COA           sumsumnet                 = COA           sumsumtaxnormal           = COA           sumsumtaxreduced          = COA           sumsumtaxsum              = COA         }       }     }   } } </pre>

## tx\_caddy\_pi1.api.options

Property:	Data type:	Description:
api.options	array	<p>Configuration of the options</p> <ul style="list-style-type: none"> <li>• payment,</li> <li>• shipping,</li> <li>• specials</li> </ul> <p>You are controlling the calculating and the output in HTML, e-mail and PDF.</p> <p>Please inspect the items below with the TypoScript Object Browser.</p> <p><b>Constant Editor:</b> See "Options" on page 37 above.</p> <p><b>Details and Examples:</b> See</p> <ul style="list-style-type: none"> <li>• "Calculating" on page 43 above</li> <li>• "tx_caddy_pi1.api.options.payment" on page 71 below</li> </ul> <p><b>Code:</b></p> <pre> plugin.tx_caddy {     caddy {         options =          // payment, shipping, special         options {             payment =      // preset, options             payment {                 preset = 1  // default method                 options =   // cash in advance, invoice, cash on delivery                 options {                     ...                 }             }             shipping =     // preset, options             shipping {                 preset = 1  // default method                 options =   // maildefault, mailexpress                 options {                     ...                 }             }             specials =     // preset, options             specials {                 divider = TEXT // divider for list of options                            //   in e-mails und PDF attachments                 options =    // neutralpackage, addfeeeforislands                 options {                     ...                 }             }         }     } } </pre>

## tx\_caddy\_pi1.api.options.payment

Property:	Data type:	Description:
api.options.payment	array	<p><b>Constant Editor:</b> See "Options" on page 37 above.</p> <p><b>Example:</b></p> <pre> plugin.tx_caddy {     caddy {         options =          // payment, shipping, special         options {             payment =      // preset, options             payment {                 preset = 1  // default method                 options =   // cash in advance, invoice, cash on delivery                 options {                     1 = cash in advance (de: Vorkasse)                     1 {                         enabled = {\$plugin.caddy.options.payment.1.enabled}                         // label, gross, cash discount                         title = COA                         title {                             ... // label, gross                             10 = COA                             10 {                                 10 = TEXT                                 ...                             }                             // amount                             20 = COA                             20 {                                 ...                             }                         }                         // cash discount                         20 = COA                         20 {                             ...                         }                     }                 }                 // on, percent                 cash-discount =                 cash-discount {                     // items, payment, service, shipping                     on =                     on {                         // [Boolean] true: get discount on items                         items      = 1                         // [Boolean] true: get discount on payment                         payment    = 0                         // [Boolean] true: get discount on shipping                         shipping   = 0                         // [Boolean] true: get discount on specials                         specials   = 0                     }                     // [Double]                     percent =                         {\$plugin.caddy.options.payment.1.cashdiscount}                 }                 // extra cost (gross price) of payment method                 extra = {\$plugin.caddy.options.payment.1.costs}                 // tax rate which will be applied (reduced or normal)                 tax = {\$plugin.caddy.options.payment.1.taxrate}             }             2 ...         }     } } </pre>

## tx\_caddy\_pi1.api.options.shipping

See "tx\_caddy\_pi1.api.options.payment" on page 71 above.

### tx\_caddy\_pi1.api.options.specials

See "tx\_caddy\_pi1.api.options.payment" on page 71 above.

### tx\_caddy\_pi1.api.symbols

Property:	Data type:	Description:
api.symbols	array	<p>Configuration of symbols.</p> <p>Please configure it with the Constant Editor. See</p> <ul style="list-style-type: none"> <li>"Constant Editor &gt; SYMBOLS AND SERVICE ATTRIBUTES" on page 41 above.</li> </ul> <p><b>Example:</b></p> <pre> plugin.tx_caddy {   api {     symbols {       decimal                = 2       dec_point              = ,       thousands_sep          = .       currencySymbol         = &amp;euro;       currencySymbolBeforePrice = 0       quantitySymbol        = St.       service_attribute_1_symbol =       service_attribute_2_symbol =       service_attribute_3_symbol =     }   } } </pre>

### tx\_caddy\_pi1.api.tax

Property:	Data type:	Description:
api.tax	array	<p>Configuration for tax calculating.</p> <p>Please configure it with the Constant Editor. See</p> <ul style="list-style-type: none"> <li>"Constant Editor &gt; TAX" on page 41 above.</li> </ul> <p><b>Example:</b></p> <pre> plugin.tx_caddy {   api {     tax {       reduced      = 7       reducedCalc = 0.07       normal      = 19       normalCalc  = 0.19     }   } } </pre>



## tx\_caddy\_pi1.db

Property:	Data type:	Description:
db	array	<p>Interface for your database.</p> <p>Please configure it with the Constant Editor. See</p> <ul style="list-style-type: none"> <li>"Constant Editor &gt; DATABASE" on page 34 above.</li> </ul> <p><b>Example:</b></p> <pre> plugin.tx_caddy {     db {         table           = tx_quickshop_products         title            = title         gross            = price         tax              = tax         sku              = sku         min              = quantity_min         max              = quantity_max         service_attribute_1 =         service_attribute_2 =         service_attribute_3 =         sql {             ... -&gt; See tx_caddy_pi1.db.sql below         }     } } </pre>

## tx\_caddy\_pi1.db.sql

Property:	Data type:	Description:
db.sql	array	<p>Extend the database interface for special needs – usually variants.</p> <p><b>Example:</b></p> <pre> plugin.tx_caddy {     db {         sql {             ... -&gt; See Error: Reference source not found on page Error: Reference source not found Error: Reference source not found         }     }     settings {         ... -&gt; See Error: Reference source not found on page Error: Reference source not found Error: Reference source not found     } } </pre>

## tx\_caddy\_pi1.debug

Property:	Data type:	Description:
debug	boolean	<p>Prompts a debug report with informations about TypoScript to the frontend.</p> <p>Please configure it with the Constant Editor. See</p> <ul style="list-style-type: none"> <li>"Constant Editor &gt; DEBUG" on page 34 above.</li> </ul> <p><b>Example:</b></p> <pre> plugin.tx_caddy {     debug = 0 } </pre>

## tx\_caddy\_pi1.pdf

Property:	Data type:	Description:
pdf	array	<p>Configuration for the PDF attachments.</p> <p>Please configure it with the Constant Editor. See</p> <ul style="list-style-type: none"> <li>"Constant Editor &gt; PDF" on page 39 above.</li> </ul> <p>Please inspect the items below with the TypoScript Object Browser.</p> <p><b>Code:</b></p> <pre> plugin.tx_caddy {     pdf {         deliveryorder {             filename = COA           // label - delivery order number - date . pdf             content {                 address =           // deliveryorder, invoice                 caddy   =           // body                 date    =           // body                 numbers =           // deliveryorder, invoice and order             }         }         invoice {             filename = COA           // label - invoicenumber - date . pdf             content {                 address =           // deliveryorder, invoice                 caddy   =           // body                 date    =           // body                 numbers =           // deliveryorder, invoice and order                 termOfCredit =      // body             }         }         revocation {             filename = COA           // label - invoicenumber - date . pdf             content {                 address =           // invoice                 date    =           // body                 additionaltextblocks = // revocation             }         }         terms {             filename = COA           // label - invoicenumber - date . pdf             content {                 address =           // invoice                 date    =           // body                 additionaltextblocks = // terms             }         }     } } </pre>

## tx\_caddy\_pi1.pid

Property:	Data type:	Description:
pid	integer	<p>Id of the page with the CADDY plugin.</p> <p>Please configure it with the Constant Editor. See</p> <ul style="list-style-type: none"> <li>"Constant Editor &gt; PAGES" on page 38 above.</li> </ul> <p><b>Example:</b></p> <pre> plugin.tx_caddy {     pid = 8154 } </pre>

## tx\_caddy\_pi1.pluginCheck

Property:	Data type:	Description:
pluginCheck	string	<p>For self evaluation only. <b>Never touch it!</b></p> <p><b>Code:</b></p> <pre>plugin.tx_caddy {     pluginCheck = dummy }</pre>

## tx\_caddy\_pi1.templates

Property:	Data type:	Description:
templates	array	<p>Configuration of templating.</p> <p>Please configure it with the Constant Editor. See</p> <ul style="list-style-type: none"> <li>"Constant Editor &gt; TEMPLATES" on page 42 above.</li> </ul> <p><b>Code:</b></p> <pre>plugin.tx_caddy {     templates {         e-mail {             file = EXT:caddy/files/templates/caddy.html             marker {                 // all, item             }             table {                 // border, cellpadding, cellspacing             }         }         html {             caddy {                 // pi1: file, marker, table             }             caddymini {                 // pi3: file, marker             }             caddysum {                 // pi2: file, marker             }             form {                 order {                     foundation {                         5x {                             wiSelect = COA                             wiSelect {                                 ...                             }                             woSelect = COA                             woSelect {                                 ...                             }                         }                     }                 }             }         }         pdf {             deliveryorder {                 // file, marker, table             }             invoice {                 // file, marker, table             }             revocation {                 // file, marker, table             }             terms {                 // file, marker, table             }         }     } }</pre>

## tx\_caddy\_pi1.\_HTMLMARKER

Property:	Data type:	Description:
_HTMLMARKER	array	<p>Feel free to add any marker to the templates for HTML, the e-mail and the PDF attachments.</p> <p>The property from below will replace ###_HTMLMARKER_LINTOSHOP###.</p> <p>Please inspect the code from below with the TypoScript Object Browser.</p> <p><b>Example:</b></p> <pre> plugin.tx_caddy {     _HTMLMARKER {         _linktoshop = COA         linktoshop {             // Label             10 = TEXT             10 {                 ...             }             // Icon             20 = IMAGE             20 {                 ...             }         }         wrap = &lt;div class="linktoshop caddylinktoshop"&gt; &lt;/div&gt;     } } </pre>

## tx\_caddy\_pi1.\_CSS\_DEFAULT\_STYLE

Property:	Data type:	Description:
_CSS_DEFAULT_STYLE	string	<p>Inline CSS. An inline CSS can configured while runtime.</p> <p>This property is configured only, if a CSS static template is included. See</p> <ul style="list-style-type: none"> <li>"Static Templates &gt; CSS" on page 31 above.</li> </ul> <p>Please inspect the code from below with the TypoScript Object Browser.</p> <p><b>Code:</b></p> <pre> plugin.tx_caddy_pi1 {     _CSS_DEFAULT_STYLE (         form.caddy {             text-align: right;         }         form.caddy button.submit img {             position: relative;             top: .1em;         }         ...     ) } </pre>

## tx\_caddy\_pi1.powermail

Property:	Data type:	Description:
powermail	array	<p>Configuration for controlling powermail.</p> <p>This property is configured only, if a powermail static template is included. See</p> <ul style="list-style-type: none"> <li>"Static Templates &gt; Powermail (obligated)" on page 31 above.</li> </ul> <p>The configuration depends on the powermail version 1.x and 2.x</p> <p>The example below corresponds with the fluid marker in the powermail form.</p> <p><b>Code (powermail 2.x):</b></p> <pre> plugin.tx_caddy {     powermail {         caddy = USER         caddy {             // The caddy content         }         caddydeliveryordernumber = USER         caddydeliveryordernumber {             // Delivery order number         }         caddyinvoicenummer = USER         caddyinvoicenummer {             // Invoice number         }         caddyordernumber = USER         caddyordernumber {             // Order number         }         clearcaddyssession = USER         clearcaddyssession {             // Clear the caddy session         }     } } </pre>

## tx\_caddy\_pi2

### Frontend and Plugin

- See "Plugins > Sum Gross" on page 23 above.

### TypoScript

Property:	Data type:	Description:
plugin.tx_caddy_pi2	array	<p>Configuration for the Caddy Sum Gross plugin</p> <p><b>Code:</b></p> <pre> plugin.tx_caddy_pi2 {     // item, marker     content =     content {         // label, sumsumgross         sum = COA         sum {             // label             20 = TEXT             20 {                 data          = LLL:EXT:caddy/pi2/locallang.xml:phrasesum                 noTrimWrap    =  &lt;span class="label sumlabel"&gt; &lt;/span&gt;               }             // sumsumgross             30 = COA             30 {                 // value                 10 = USER                 10.userFunc = tx_caddy_userfunc-&gt;numberformat                 10.userFunc {                     number = TEXT                     number.field = sumsumgross                     decimal      = 2                     dec_point    = {\$plugin.caddy.main.dec_point}                     thousands_sep = {\$plugin.caddy.main.thousands_sep}                     drs = {\$plugin.caddy.debug.userfunc}                 }                 // currency                 20 = TEXT                 20 {                     value = {\$plugin.caddy.main.currencySymbol}                     noTrimWrap =                      }                 wrap = &lt;span class="gross sumgross"&gt; &lt;/span&gt;             }         }     }     // page id of the caddy     pid = {\$plugin.caddy.pages.caddy}     // e-mail, html, pdf     templates =     templates &lt; plugin.tx_caddy_pi1.templates } </pre>

## tx\_caddy\_pi3 – Overview

### Frontend and Plugin

- See "Plugins > Mini Caddy" on page 22 above.

### TypoScript

Property:	Data type:	Description:
plugin.tx_caddy_pi3	array	<p>Configuration for the Caddy Mini plugin</p> <p><b>Code:</b></p> <pre> plugin.tx_caddy_pi3 {     // item, marker     content =     content {         // quantity, label, gross         item = COA         item {             ...         }         // quantity, label, gross         sum = COA         sum {             ...         }     }     // page id of the caddy     pid = {\$plugin.caddy.pages.caddy}      // e-mail, html, pdf     templates =     templates &lt; plugin.tx_caddy_pi1.templates      // linktocaddy, linktoshop     _HTMLMARKER =     _HTMLMARKER {         ...     } } </pre>

## tx\_caddy\_pi3.content.item

Property:	Data type:	Description:
content.item	array	<p>Configuration for the items of the Caddy Mini plugin</p> <p><b>Code:</b></p> <pre> plugin.tx_caddy_pi3 {     // item, marker     content =     content {         // quantity, label, gross         item = COA         item {             // quantity             10 = TEXT             10 {                 field = quantity                 wrap = &lt;div class="quantity itemquantity"&gt; &lt;/div&gt;             }             // label             20 = TEXT             20 {                 field = label                 wrap = &lt;div class="label itemlabel"&gt; &lt;/div&gt;             }             // gross             30 = COA             30 {                 // value                 10 = USER                 10.userFunc = tx_caddy_userfunc-&gt;numberformat                 10.userFunc {                     number = TEXT                     number.field = gross                     decimal = 2                     dec_point = {\$plugin.caddy.main.dec_point}                     thousands_sep = {\$plugin.caddy.main.thousands_sep}                     drs = {\$plugin.caddy.debug.userfunc}                 }                 // currency                 20 = TEXT                 20 {                     value = {\$plugin.caddy.main.currencySymbol}                     noTrimWrap =                     }                 wrap = &lt;div class="gross itemgross"&gt; &lt;/div&gt;             }             wrap (                 &lt;div class="item minicaddyitem"&gt; &lt;/div&gt;                 &lt;div class="caddy_cleaner"&gt;&lt;/div&gt;             )         }     } } </pre>



## tx\_caddy\_pi3.content.sum

Property:	Data type:	Description:
content.sum	array	<p>Configuration for the Sum of the Caddy Mini plugin</p> <p><b>Code:</b></p> <pre> plugin.tx_caddy_pi3 {     // item, marker     content =     content {         // quantity, label, gross         sum = COA         sum {             // quantity             10 = TEXT             10 {                 field = quantity                 wrap = &lt;div class="quantity sumquantity"&gt; &lt;/div&gt;             }             // label             20 = COA             20 {                 // in case of one item                 10 = TEXT                 10 {                     if {                         value = 2                         isLessThan {                             field = quantity                         }                     }                     data = LLL:EXT:caddy/pi3/locallang.xml:item                 }                 // in case of more than one item                 20 = TEXT                 20 {                     if {                         value = 2                         isLessThan {                             field = quantity                         }                         negate = 1                     }                     data = LLL:EXT:caddy/pi3/locallang.xml:items                 }                 wrap = &lt;div class="label sumlabel"&gt; &lt;/div&gt;             }             // gross             30 = COA             30 {                 10 = USER                 10.userFunc = tx_caddy_userfunc-&gt;numberformat                 10.userFunc {                     number = TEXT                     number.field = gross                     decimal = 2                     dec_point = {\$plugin.caddy.main.dec_point}                     thousands_sep = {\$plugin.caddy.main.thousands_sep}                     drs = {\$plugin.caddy.debug.userfunc}                 }                 20 = TEXT                 20 {                     value = {\$plugin.caddy.main.currencySymbol}                     noTrimWrap =                     }                 wrap (                     &lt;div class="gross sumgross"&gt; &lt;/div&gt;                     &lt;div class="caddy_cleaner"&gt;&lt;/div&gt;                 )             }             wrap = &lt;div class="sum minicaddysum"&gt; &lt;/div&gt;         }     } } </pre>

### tx\_caddy\_pi3.pid

Property:	Data type:	Description:
pid	integer	<p>Id of the page with the Caddy plugin.</p> <p>Please configure it with the Constant Editor. See</p> <ul style="list-style-type: none"> <li>"Constant Editor &gt; PAGES" on page 38 above.</li> </ul> <p><b>Code:</b></p> <pre>plugin.tx_caddy_pi3 {     // page id of the caddy     pid = {\$plugin.caddy.pages.caddy} }</pre>

### tx\_caddy\_pi3.templates

Property:	Data type:	Description:
templates	array	<p>Configuration of the templates is taken from the Caddy plugin.</p> <p><b>Code:</b></p> <pre>plugin.tx_caddy_pi3 {     // e-mail, html, pdf     templates =     templates &lt; plugin.tx_caddy_pi1.templates }</pre>

## tx\_caddy\_pi3.\_HTMLMARKER.linktocaddy

Property:	Data type:	Description:
_HTMLMARKER. linktocaddy	array	<p>Link to the page with the Caddy plugin. Link contains an image – the Caddy icon.</p> <p><b>Code:</b></p> <pre> plugin.tx_caddy_pi3 {     // linktocaddy, linktoshop     _HTMLMARKER =     _HTMLMARKER {         // label, icon. Replaces _HTMLMARKER_LINTOCADDY         linktocaddy = COA         linktocaddy {             // Label             10 = TEXT             10 {                 data = LLL:EXT:caddy/pi3/locallang.xml:linktocaddy                 typolink {                     parameter = {\$plugin.caddy.pages.caddy}                     title {                         data = LLL:EXT:caddy/pi3/locallang.xml:linktocaddy                     }                 }                 noTrimWrap =                  }             // Icon             20 = IMAGE             20 {                 file = {\$plugin.caddy.html.color.icon.caddy}                 altText {                     data = LLL:EXT:caddy/pi3/locallang.xml:caddy                 }                 titleText {                     data = LLL:EXT:caddy/pi3/locallang.xml:caddy                 }                 params = class="linktocaddy"                 imageLinkWrap = 1                 imageLinkWrap {                     enable = 1                     typolink {                         parameter = {\$plugin.caddy.pages.caddy}                     }                 }             }         }         wrap = &lt;div class="linktocaddy minicaddylinktocaddy"&gt; &lt;/div&gt;     } } </pre>

## tx\_caddy\_pi3.\_HTMLMARKER.linktoshop

Property:	Data type:	Description:
_HTMLMARKER. linktoshop	array	<p>Link to the page with the Shop plugin. Link contains an image – the Caddy icon.</p> <p><b>Code:</b></p> <pre> plugin.tx_caddy_pi3 {     _HTMLMARKER {         // label, icon. Replaces _HTMLMARKER_LINTOSHOP         linktoshop = COA         linktoshop {             // Label             10 = TEXT             10 {                 data = LLL:EXT:caddy/pi3/locallang.xml:linktoshop                 typolink {                     parameter = {\$plugin.caddy.pages.shop}                     title {                         data = LLL:EXT:caddy/pi3/locallang.xml:linktoshop                     }                 }                 noTrimWrap =                  }             // Icon             20 = IMAGE             20 {                 file = {\$plugin.caddy.html.color.icon.caddy}                 altText {                     data = LLL:EXT:caddy/pi3/locallang.xml:shop                 }                 titleText {                     data = LLL:EXT:caddy/pi3/locallang.xml:shop                 }                 params = class="linktoshop"                 imageLinkWrap = 1                 imageLinkWrap {                     enable = 1                     typolink {                         parameter = {\$plugin.caddy.pages.shop}                     }                 }             }         }         wrap = &lt;div class="linktoshop minicaddylinktoshop"&gt; &lt;/div&gt;     } } </pre>

# Debugging

If you have any unexpected result, you can inspect Caddy in the TYPO3 backend with the DRS – the Development Reporting System – and in the TYPO3 frontend with Firebug.

## DRS – Development Reporting System

### Inspect work-flow, session data and errors

The DRS – Development Reporting System – enables you

- to follow the work-flow of Caddy,
- to inspect alternate configuration possibilities,
- to inspect session data and their corresponding cObject fields,
- to inspect improper configuration and last but not least
- the DRS prompts warnings and errors

### Enabling by the Extension Manager

Enable the DRS – Development Reporting System – for all caddy plugins by the Extension Manager. If you have more than one plugin on a page (like a caddy and a mini caddy), you will the report for each item. It is recommended to enable the DRS by the Plugin / Flexform (see below).

BE AWARE: This feature can't debug user functions. For a complete report, you have to enable this feature by the Constant Editor (see below).

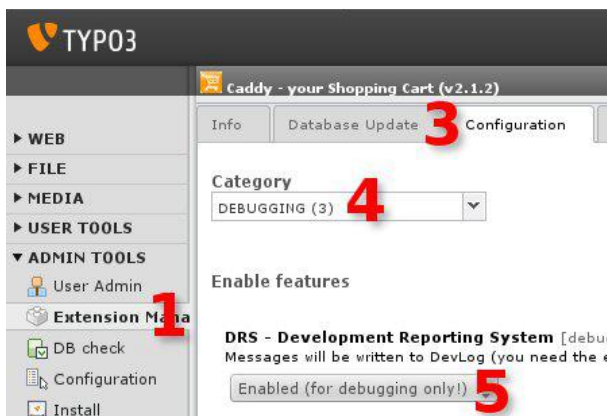


Illustration 49: Enable the DRS by the Extension Manager

1. Module: Admin Tools      Extension Manager
2. Edit Area      Select the Caddy extension
3.      Tab [Configuration]
4.      Category: [Debugging]
5.      DRS – Development Reporting System: [Enabled]
6.      [Update]

### Enabling by the Plugin / Flexform (recommended)

Enable the DRS – Development Reporting System – for the current plugin only by the plugin / flexform.

BE AWARE: This feature can't debug user functions. For a complete report, you have to enable this feature by the Constant Editor (see below).

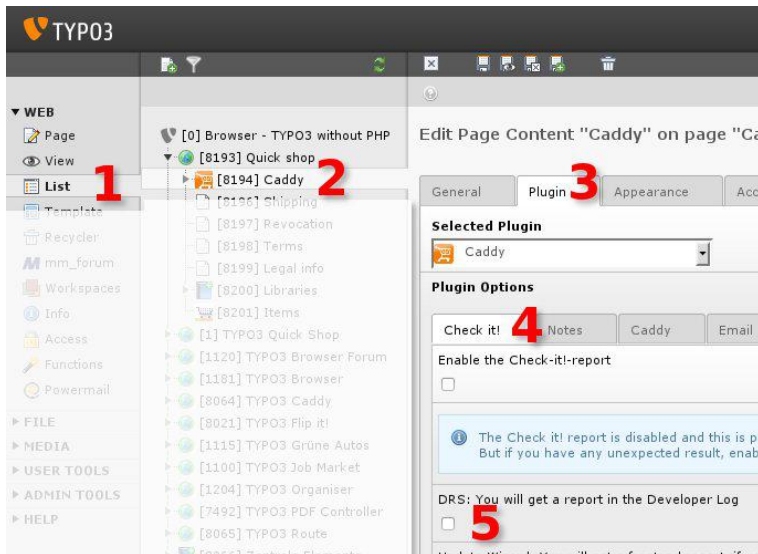


Illustration 50: Enable the DRS by the Plugin / Flexform

1. Module: Web      List
2. Page tree      Page with the Caddy plugin (here: [8194] Caddy)
3. Edit Area      Caddy plugin: tab [Plugin]
4.      Tab [Check it!]
5.      DRS: You will get a report ... [X]

### Enabling by the Constant Editor (recommended)

Enable the DRS – Development Reporting System – for user functions.

BE AWARE: This feature debugs user functions only. For a complete report, you have to enable the DRS by the plugin / flexform or the extension manager too.

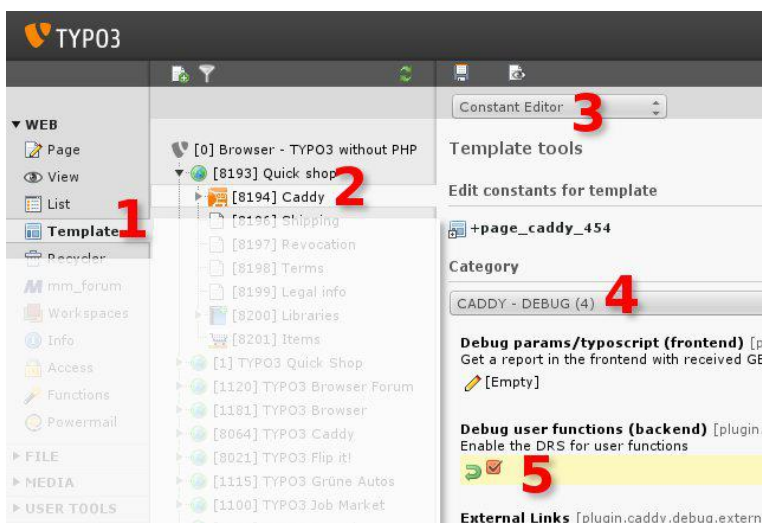


Illustration 51: Enable the DRS by the Plugin / Flexform

1. Module: Web      Template
2. Page tree      Page with the Caddy plugin (here: [8194] Caddy)
3. Edit Area      [Constant Editor]
4.      category [CADDY - DEBUG]
5.      Debug user functions (backend) [X]

## The DRS report

### Precondition

You need the extension

- Developer Log (devlog)

### Report

	Date	Severity	Extension	Message	Called from	Page	User	Extra
WEB	24-09-13 00:40:20	i	caddy	[INFO/DRS] The DRS - Development Reporting System is enabled by the flexform (frontend mode).	class.tx_caddy_drs.php, line 180			
FILE	24-09-13 00:40:20	i	caddy	[INFO/DRS] "Warenkorb" (pid: 8148, uid: 2505)	class.tx_caddy_drs.php, line 185			
MEDIA	24-09-13 00:40:20	i	caddy	[INFO/INIT] pid is taken from main.pid and is set to 8148	class.tx_caddy_pi1.php, line 797			
ADMIN TOOLS	24-09-13 00:40:20	w	caddy	[WARN/INIT] No access: current IP doesn't match the list of allowed IP. Result won't prompt to the frontend.	class.tx_caddy_pi1.php, line 473			
User Admin	24-09-13 00:40:20	i	caddy	[INFO/POWERMAIL] Powermail version is 2.0.9 (internal 2000009)	class.tx_caddy_powermail.php, line 828			
Extension Manager	24-09-13 00:40:20	i	caddy	[INFO/SQL] SELECT * FROM tt_content WHERE pid = 8148 AND hidden = 0 AND deleted = 0 AND list_type = 'powermail_pi1' ORDER BY sorting LIMIT 1	class.tx_caddy_powermail.php, line 943			
DB check	24-09-13 00:40:20	i	caddy	[INFO/POWERMAIL] powermail.uid: "2507"	class.tx_caddy_powermail.php, line 846			
Configuration	24-09-13 00:40:20	i	caddy	[INFO/POWERMAIL] powermail.title: "[Powermail für Quickshop]"	class.tx_caddy_powermail.php, line 848			
Install	24-09-13 00:40:20	i	caddy	[INFO/POWERMAIL] powermail.confirm: "6"	class.tx_caddy_powermail.php, line 850			
Log	24-09-13 00:40:20	i	caddy	[INFO/INIT] tx_quickshop_products is an element of the \$TCA.	class.tx_caddy_pi1.php, line 516			
Reports	24-09-13 00:40:20	i	caddy	[INFO/INIT] Delivery order number from registry: 19	class.tx_caddy_pi1.php, line 588			
ExtDevEval	24-09-13 00:40:20	i	caddy	[INFO/INIT] Order number from registry: 19	class.tx_caddy_pi1.php, line 590			
Developer Log	24-09-13 00:40:20	i	caddy	[INFO/INIT] Invoice number from registry: 19	class.tx_caddy_pi1.php, line 592			
Scheduler	24-09-13 00:40:20	i	caddy	[INFO/INIT] Current delivery order number: 236	class.tx_caddy_pi1.php, line 594			
T3 jQuery	24-09-13 00:40:20	i	caddy	[INFO/INIT] Current invoice number: 103	class.tx_caddy_pi1.php, line 596			
UTF8 convert	24-09-13 00:40:20	i	caddy	[INFO/INIT] Current order number: 3992	class.tx_caddy_pi1.php, line 598			
HELP	24-09-13 00:40:20	i	caddy	[INFO/INIT] Current numbers are stored in the session.	class.tx_caddy_pi1.php, line 632			
	24-09-13 00:40:20	i	caddy	[INFO/VARIANTS] settings.variant is empty: Variants aren't handled.	class.tx_caddy_session.php, line 2113			
	24-09-13 00:40:20	i	caddy	[INFO/CALC] Case: add an item	class.tx_caddy_session.php, line 1102			
	24-09-13 00:40:20	i	caddy	[INFO/CALC] Current item (Geheime Bilder: 4) hasn't any maximum limit. Maximum limit won't checked.	class.tx_caddy_session.php, line 1145			
	24-09-13 00:40:20	i	caddy	[INFO/CALC] Current item (Geheime Bilder: 4) hasn't any minimum limit. Minimum limit won't checked.	class.tx_caddy_session.php, line 1211			
	24-09-13 00:40:20	i	caddy	[INFO/CALC] Quantity of current product is:	class.tx_caddy_session.php, line 1499			
	24-09-13 00:40:20	i	caddy	[INFO/CALC] Quantity: all #0 + add #1 = sum #1	class.tx_caddy_session.php, line 1499			

Illustration 52: The DRS Report

Get the report:

- Module > Admin Tools: Development Log

# Upgrades

## From Caddy 4.x to 6.x

### Check Constants

There are new constants [CADDY – URL]. Please check, if your configuration is proper. See "URL" on page 42 above.

You have to update your static templates before. See next section.

### Include static templates again

Static templates are modular now. You have to include the static templates again.

See samples in the section "Caddy" on page 14 above

## From Caddy 2.x/3.x to 4.x

### HTML templates are moved from files/templates to files/templates/x.0.0

If you are using the CADDY templates "without options" or "without options and without fee", you have to update the path from

- files/templates

to

- files/templates/2.0.0 or
- files/templates/4.0.0<sup>1</sup> or

SEE TypoScript Constant Editor > CADDY - TEMPLATES

## From Powermail 1.x to Powermail 2.x

Caddy supports both versions: Powermail 1.x and Powermail 2.x.<sup>2</sup>

If you have made an update from 1.x to 2.x, please evaluate your Caddy configuration with the tab [Check it!]. See

- "Plugin / Flexform > Check it!" on page 25 above.
- "Plugin / Flexform > Billing Address" on page 28 above.
- "Plugin / Flexform > Delivery Address" on page 29 above.

## From wt\_cart 1.x to Caddy 2.x

- Please install Caddy with one of the both one-click-installer – Organiser or Quick Shop. See
  - "One-Click-Installation (recommended)" on page 10 above.
- Than move the caddy page to the page with the wt\_cart plugin.
- Adapt the Caddy configuration to your needs.
- Remove wt\_cart.

<sup>1</sup> Currently these templates are available in 2.0.0 only

<sup>2</sup> If you are using TYPO3 6.x, powermail version must be 2.x because 1.x version doesn't work with different languages with 6.1. Powermail 2.x seems to be compulsory if the site is not in English.



# What's new?

## Version 6

### Button template

[6.0.0]

The Caddy Button "Buy now" is now a template. Should simplify to integrate Caddy in the HTML code of any extension. See "tx\_caddy\_pi1.templates" on page 75 above.

### Foundation 5.x

[6.0.0]

Upgrade for Caddy, Paymill and Powermail. New static templates:

- Caddy [3] + Foundation 5.x
- Caddy [3.1] + Foundation 5.x CSS

### Paymill upgrade

[6.0.0]

- Upgrade for Foundation 5.x
- New test data since Aug. 2014

New static template:

- Caddy [8] + E-Payment: Paymill Foundation 5.x

### Powermail upgrade

[6.0.0]

Upgrade of templates and partials for Foundation 5.x. New static template:

- Caddy [6] + Powermail 2.x Foundation 5.x

### TYPO3 6.2

[6.0.0]

Upgrade to TYPO3 6.2.

### TypoScript file structure

[6.0.0]

TypoScript file is modular. New file structure should simplify maintenance.

## Version 4

### E-Payment

[4.0.5]

Interface for e-payment. See "E-Payment" on page 16 above.

### Options are configurable

[4.0.5]

If you like to change the default options for payment, shipping and specials, you don't need to configure TypoScript directly any longer.

See "Options" on page 37 above.

## Pid for Caddy

[4.0.3]

You can use the Caddy plugin on different pages with the same content. This is useful for development among others: You can use Caddy with different configurations on page A and page B. Both plugins must have the same page id at

```
plugin.caddy {
    pages.caddy =
}
```

See "PAGES" on page 38 above.

## Responsive

[4.0.5]

Caddy has a responsive design. See "Responsive Design" on page 13 above.

## Inventory Control

[4.0.7]

Caddy can control your inventory. If your items have the properties "quantity in stock" and "stock management".

If inventory control is enabled:

- Caddy will decrease the quantity of your item after an order.
- The quantity in stock is the maximum order quantity of an item.
- Items can't ordered, if they aren't in stock.

[CADDY – INVENTORY CONTROL]

See **XXX**

## TypoScript

[4.0.5]

###TABLE.FIELD### replaced by fields

All so called table.field-markers are removed from the static template. They are no longer needed.

Former TypoScript

```
my_table {
    my_field = TEXT
    my_field {
        value = ###MY_TABLE.MY_FIELD###
    }
}
```

Current TypoScript

```
my_table {
    my_field = TEXT
    my_field {
        field = my_table.my_field
    }
}
```

## Structure cleaned up

The TypoScript structure is cleaned up:

```
plugin.tx_caddy_pi1
    • conditions -> moved to: api.conditions
    • getpost    -> moved to: api.getpost
    • marker     -> moved to: api.marker
    • options    -> moved to: api.options
    • symbols    -> moved to: api.symbols
    • tax        -> moved to: api.tax
```

See "tx\_caddy\_pi1.api" on page 66 above.

# Packages for Sponsors

Your donation and sponsoring is welcome.

Please order a package for sponsors at

- English: <http://typo3-caddy.de/en/sponsoring/>
- German: <http://typo3-caddy.de/sponsoring/>



## Fun – 50 EUR



You like to treat the TYPO3 Caddy project.

You don't expect any equivalent. No logo. No service.

Throw 50 EUR or any other old sum into the cash box.

You will get a receive. You can set the amount off against tax liability.

## Logo – 150 EUR



You are treating the TYPO3 Caddy project and you like to be a guide for others.

Your logo will appear in the manual, at the website, in the plugin and in the extension manager of the Caddy.

The period of validity is limited to one year.

You will get a receive. You can set the amount off against tax liability.

You can pay more than 150 EUR.

## Patron – 500 EUR



You are the patron. You are treating TYPO3 Caddy project and you like to pay the developer more than best for two hours service.

Your logo will appear in the manual, at the website, in the plugin and in the extension manager of Caddy.

You can book the developer of Caddy for two hours.

The period of validity for both – the logo and the two hours – is limited to one year. If you don't use the two hours in this period, you will lost it.

You will get a receive. You can set the amount off against tax liability.

You can pay more than 500 EUR.

# Credits

## Made in Nature

The German TYPO3 agency Made in Nature has contracted

- a part of the upgrade to 6.0.0
- the E-Payment interface
- PDF attachments for the delivery order and the invoice<sup>1</sup>
- Responsive Design by the Foundation Framework
- a part of the fork.

Website

- <http://made-in-nature.de/>

## wt\_cart Developer Team

Thanks to the wt\_cart developer team for the great wt\_cart extension, which was the base for Caddy:

- extco.de UG, Daniel Lorenz (Leader) – [www.extco.de](http://www.extco.de)
- TRITUM GmbH, Björn Jacob (Co-Leader), Sebastian Wagner, Ralf Zimmermann – [www.tritum.de](http://www.tritum.de)
- in2code, Alexander Kellner – [www.in2code.de](http://www.in2code.de)

---

<sup>1</sup> It is realised with wt\_cart 1.4.x in 2011 but never published :(

# Known Bugs

## PDF Attachments without any address data

### Event

PDF Attachments are without any address data.

### Reason and Solution

Probably the powermail plugin was never saved. Please save it once. PDF attachments should contain address data from now.

If error occurs again, please investigate the DRS report. See

- DRS – Development Reporting System on page 85 above.

## Required argument "mail" is not set

### Prompt

TYPO3 system prompt:

Oops, an error occurred!

Required argument "mail" is not set.

More information regarding this error might be available online.

### Reason and solution

Caddy tried to send an e-mail without an e-mail-address or with an improper e-mail-address.

You can check this by investigate the latest saved caddy record: probably e-mail is missing in the form of the record.

Cause should be a mismatch in the configuration of the powermail plugin. Check it!

## TCPDF-Error

### Prompt

TCPDF ERROR: This document (fileadmin/files/my.pdf) probably uses a compression technique which is not supported by the free parser shipped with FPDF.

### Reason and Solution

Probably the version of your PDF file is the reason: Version must be lower than 1.5.

## More Bugs

Please refer to

- <http://forge.typo3.org/projects/extension-caddy/issues>

## Further Information

### Forum

Caddy has a website and a forum. Please visit:

- <http://typo3-caddy.de/en/>
- <http://forum.typo3-caddy.de/>

### TYPO3 forge

- <http://forge.typo3.org/projects/extension-caddy>

## History of Caddy

### Fork of wt\_cart

Caddy was a fork of wt\_cart version 1.4.6.

Copyright wt\_cart 1.4.6: 2010-2012, wt\_cart Development Team. See "wt\_cart Developer Team" on page 92 above.

### Why do I forked wt\_cart in 2013?

A generic shopping cart for TYPO3 is a good idea.

And an improved idea is

- to fix bugs speedy,
- to develop the cart permanently, and
- to let profit the TYPO3 community of contracted features.

Caddy is the attempt, to keep the promise from above.

## Caddy 2.x versus wt\_cart 1.x

Having regard to plugin 1

skill	caddy 2.x	wt_cart 1.4
<b>Features</b>		
Items from your database	yes	yes
Min/Max limit for each item	yes	yes
Min/Max limit for all items	yes	no
Delivery costs depending on <ul style="list-style-type: none"> <li>amount</li> <li>size</li> <li>weight</li> </ul>	yes yes yes	yes yes yes
PDF attachments <sup>1</sup>	yes	no
Order-/Invoice-numbers without gap	yes	no
Variants <sup>2</sup>	yes	buggy
Interface for online payment	no	no
<b>Configuration properties</b>		
Plugin / Flexform <sup>3</sup> , Constant Editor	153 properties	42 properties
<b>Database</b>		
Orders are stored in an own database	yes	no
Archive audit proof <sup>4</sup>	yes	no
<b>Debugging and Development</b>		
Developer versions	<a href="http://forge.typo3.org/.../caddy">http://forge.typo3.org/.../caddy</a>	<a href="https://github.com/extcode/wt_cart">https://github.com/extcode/wt_cart</a>
GET/POST parameter	yes	yes
TypoScript	yes	yes
User functions	yes	no
Work flow	nearby 300 prompts <sup>5</sup>	0 prompts
<b>Evaluation</b>		
by the Extension Manager	yes	no
by the plugin / flexform	yes	no
<b>Icons</b>		
Cart	1 icon / 40 colours	no icon
Delete	1 icon / 40 colours	1 icon / 1 colour
<b>Installation</b>		
Out of the box / one click installation	yes	stopped with Quick Shop installer 2.x
<b>Manual</b>		
Illustrations	42	8
Pages	77	30
<b>Powermail</b>		
Compatible with 1.x	yes	yes
Compatible with 2.x	yes	no
Independent on Powermail hooks	yes	no
<b>Support</b>		
Website	<a href="http://typo3-caddy.de/">http://typo3-caddy.de/</a>	<a href="http://wt-cart.com/">http://wt-cart.com/</a>
Forum / Support	<a href="http://forum.typo3-caddy.de/">http://forum.typo3-caddy.de/</a>	<a href="http://snippets.wt-cart.com/">http://snippets.wt-cart.com/</a>

<sup>1</sup> Delivery order, invoice, terms & conditions

<sup>2</sup> One dimension

<sup>3</sup> Plugin 1

<sup>4</sup> Audit proof in German: revisionssicher

<sup>5</sup> supported by the DRS – Development Reporting System

## Other extensions published by Die Netzmacher

-  +AOE Linkhandler Configurator: Configure the AOE linkhandler supported by userinterfaces. Out-of-the-box templates for cal, org, tt\_news and tt\_products. Don't edit page TSconfig any longer.  
<http://typo3.org/extensions/repository/view/linkhandlerconf/>
-  autositemap: A smart site-map optimised for the footer. It groups menus in columns. Great menus will get two columns. Configuration is based on TypoScript HMENU.  
<http://typo3.org/extensions/repository/view/autositemap/>
-  Browser – TYPO3 without PHP. Develop your TYPO3 extension 8 times faster! You need one line TypoScript for a result list with a search form, a record browser and an index browser. Images are wrapped self-acting. SEO, Search Engine Optimization, is integrated. <http://typo3.org/extensions/repository/view/browser/>
-  Caddy – the TYPO3 shopping cart. You can use it for your own needs. You need a database with products or any other items only. You can install Caddy out of the box with one mouse click – see Quick Shop below.  
<http://typo3.org/extensions/repository/view/caddy/>
-  Deal! – TYPO3 Quick Shop interface for the marketplace ebay. Manage all items with TYPO3 and publish it on ebay. Amazon is under construction.  
<http://typo3.org/extensions/repository/view/deal/>
-  Flip it! offers lovely and smooth page flip transitions. It enables you to run over pages in PDF documents like in a real magazine. It is based on flash. Flipt it! can convert PDF documents to swf files automatically.  
<http://typo3.org/extensions/repository/view/flipit/>
-  Green Cars (Grüne Autos) - Database optimized for ecological cars. It is a case study and demonstrates, how to get a complex database with the browser (see above) in three hours only.  
[http://typo3.org/extensions/repository/view/green\\_cars/](http://typo3.org/extensions/repository/view/green_cars/)
-  Jobmarket is a catalogue with job offers. Views, the a-z-browser, the page-browser, the search, social bookmarks and a lot of other stuff can configured by the Browser plugin with the mouse. Job Market hasn't any PHP code, it should be easy to adapt it to your needs.  
[http://typo3.org/extensions/repository/view/job\\_market/](http://typo3.org/extensions/repository/view/job_market/)
-  Majordomo: For subscribing to and unsubscribing from a majordomo mailing list.  
<http://typo3.org/extensions/repository/view/majordomo/>
-  Organiser – TYPO3 for the lobby and the organisers. Handle news, events, staff, headquarters, locations, workshops and a calendar with one extension. Sell online tickets! Install the Organiser with one mouse click!  
<http://typo3-organiser.de/>
-  Quick Shop – the fastest shop in the history of TYPO3. Install it with one mouse click! Quick Shop is based on the browser (see above) and powermail.  
<http://typo3-quick-shop.de/>
-  PDF Controller: Easy to install. Add to your HTML page the PDF-controller-button. Link from the button to the controller. Adjust the controller by mouseclicks. The PDF Controller supports CSS 3.  
<http://typo3-pdfcontroller.de/>
-  Radial Search (Umkreissuche) – Enable the browsing through your data by geo location. 'Your data must have a latitude and a longitude. Address data can geocoded automatically by the Browser - TYPO3 without PHP.  
<http://typo3.org/extensions/repository/view/radialsearch/>
-  Route – Publish your routes with GoogleMaps or OpenStreetMap. Routes have points of interest (POI). You can categorise and filter both: routes and POI. Address data can geocoded automatically.  
<http://typo3.org/extensions/repository/view/route/>
-  seo\_dynamic\_tag: Search Engine Optimization for the title tag, the canonical tag and the meta tags author, description and keywords. Configuration by a user interface.  
[http://typo3.org/extensions/repository/view/seo\\_dynamic\\_tag/](http://typo3.org/extensions/repository/view/seo_dynamic_tag/)
-  TSconfig Pages and Users by extManager (extkey: tsconf): Configure the the eight most commonly used TSconfig porperties with the mouse - like page tree uids, activated extended view, activated clipboard, ...  
<http://typo3.org/extensions/repository/view/tsconf/>



## Change Log

- 6.0.12 **Improvement**
  - \* #i0079: absolute path to the PDF document
- 6.0.11 **Improvement**
  - \* #i0078: PHP Warning: Invalid argument supplied for foreach() in lib/class.tx\_caddy\_dynamicmarkers.php
- 6.0.10 **Improvement**
  - \* #65458: Shipping Option Pick Up
- 6.0.9 **Manual**
  - \* #i0076: New section calculation
  - \* #i0075: Cash discount is documented
- 6.0.8 **New Feature**
  - \* #i0074: VAT Reg.No. (USt-IdNr.)**Improvement**
  - \* #i0073/#156: Accordion with caddy items must be open while the confirmation the order.  
It is a legal need in Germany.
  - \* #i0072/#156: Powermail confirmation form got a second button line at the top
  - \* #i0071/#161: Labelling: formButton is moved from "Buy now" to "Into the caddy"
- 6.0.7 **Feature**
  - \* #i0069: Different caddy icons are possible depending on an empty or full caddy
  - \* #i0068: Foundation classes for caddy mini
  - \* #i0067: Classes for powermail by TypoScript**Improvement**
  - \* #i0070: moved: files/img to Resources/Public/Images
- 6.0.4 **Bugfix**
  - \* #i0066: Missing argument 2 for tx\_caddy\_session::zz\_escapeStrForLike()  
called in lib/class.tx\_caddy\_session.php on line 2491 and others
- 6.0.3 **Improvement**
  - \* #i0065: sumsumgrossepayout: amount for e-payment
  - \* #i0064: Paymill response code 50000
  - \* #i0063: some foundation files are integrated
  - \* #i0061: DRS**Bugfix**
  - \* #i0062: Paymill transaction (conflict with #i0058)
- 6.0.2 **Improvement**
  - \* #i0060: Update manual: Template structure without Foundation
- 6.0.1 **Improvement**
  - \* #i0060: Update manual
- 6.0.0 **Major Feature**
  - \* #i0057: Paymill
    - \* Upgrade for Foundation 5.x
    - \* New test data since Aug. 2014
  - \* #62044: TypoScript file structure
  - \* #62043: Button template
    - \* New constant plugin.caddy.url.extension
    - \* Context with plugin.caddy.getpost.uid !
  - See:
    - \* plugin.tx\_caddy\_pi1.templates.html.form.order.foundation.5x
  - \* #61879: Foundation 5.x for Powermail 2.x
  - \* #61865: Foundation 5.x
  - \* #61624: Upgrade TYPO3 6.2
  - \* #61631: Replace the static method t3lib\_div::debug
  - \* #61632: Replace the call to mysql\_escape\_string
  - \* #61633: Remove constant path PATH\_t3lib
  - \* #61634: Remove require\_once (piBase, PATH\_t3lib)**Workflow**
  - \* #61877: Min and Max failed in case of variants
    - \* Not solved but workflow:

- \* Min and Max won't checked in case of variants.  
Cause is another param in the url.  
See more details at ChangeLog

#### Bugfix

- \* #i0059: A second item is added without any quantity
- \* #i0058: Paymill error in case of a non-e-payment method
- \* #i0056: Moved code in contest with #61892
- \* #61893: PDF attachments without any address data
- \* #61892: Database record without value for customer e-mail  
\* powermail 2.0 to 2.1 moved the POST params from ids to labels.
- \* #61889: Variants: Bug in the SQL query for powermail
- \* #61870: Delete an item fails in case of variants
- \* #58645: Empty powermail mapping causes fatal exception
- \* #47370: t3lib\_div::getIndpEnv( 'TYPO3\_DOCUMENT\_ROOT' )

#### 4.0.12 Bugfix

- \* #58646: Currency symbol in email is crippled

#### 4.0.11 Feature

- \* #i0055: Tax info in the simple caddy HTML

#### 4.0.10 Feature

- \* #i0054: Bank account in case of cash in advance for email and pdf
- Bugfix
- \* #i0053: Fatal error: Class 'Paymill\Request' not found in  
lib/e-payment/paymill/class.tx\_caddy\_paymill\_transaction.php on line 765
  - \* #i0052: Paymill exception while transaction: '50647.056' must contain only digits

#### 4.0.9 Bugfix

- \* #i0051: condition is placed outside the label
- \* #i0050: Non e-payment-methods are enable only, if an e-payment-method is enabled before.

#### 4.0.8 Feature

- \* #i0049: Tax is removed from HTML template
- \* #i0048: Billing-, service- and shipping costs are displayed only, if sum is greater than 0.00  
\* Rule is set for HTML template only  
\* The seller and the client need the information for shipping, payment and specials in the e-mail template in every case.  
\* new fields sumcashdiscountsumnet and sumcashdiscountsumgross among others
- \* #i0047: cash discount  
\* new fields: sumcashdiscountnet, sumcashdiscountgross
- \* #i0046: new payment option cash on pick up (german: Bar bei Abholung)
- \* #i0045: e-payment  
\* enhance payment options from 3 to 6

#### 4.0.7 Feature

- \* #55726: Stock management: decrease item quantity after ordering  
\* New db.fields: stockquantity and stockmanagement  
\* New api.getpost: stockquantity and stockmanagement  
\* New api.marker.item: stockquantity and stockmanagement

#### 4.0.6 Bugfix

- \* #i0044: Adding a product removes the session
- \* #i0043: e-payment  
\* payment id is removed after transaction  
\* payment options are missing in e-mail and pdf

#### 4.0.5 Major Feature

- \* #53678: e-payment step 2
- \* #53742: Fancybox is removed

#### Feature

- \* #55333: Configurable options
- \* #54999: Link to an item (to the single view)

#### Improvement

- \* #55322: Clean up TypoScript structure  
\* plugin.tx\_caddy\_pi1  
\* conditions -> moved to: api.conditions  
\* getpost -> moved to: api.getpost  
\* marker -> moved to: api.marker

- \* options -> moved to: api.options
- \* symbols -> moved to: api.symbols
- \* tax -> moved to: api.tax

#### Bugfixing

- \* #i0047: Unproper form in the extension manager (TYPO3 6.x)

4.0.4

#### Features

- \* #54968: Powermail improvement
- \* #54967: Responsive framework foundation
- \* #54858: Split the form in different parts
- \* #54832: Another label wrap for radiobuttons and checkboxes
- \* #i0047: Foundation
- \* #i0046: Validator

4.0.3

#### Features

- \* #i0042: ###UID\_POWERMAIL\_FORM###
- \* #i0040: jQuery for powermail
- \* #i0039: Sum for shipping and specials (without payment)
- \* #54628: Calculated Caddy available for dynamicMarkers
- \* #54634: Enable controlling of the caddy (pi1) by pid

#### Improvement

- \* #i0038: Caddy HTML

#### Bugfix

- \* #i0045: unproper replace of an empty pid in session -> getPid( )
- \* #i0044: Unsupported operand types in lib/caddy/class.tx\_caddy.php on line 898
- \* #i0043: getPaymentOptionLabelBySessionId seem's to be unproper
- \* #i0041: ###TARGET### wasn't handled

4.0.2

#### Major Feature

- \* #53678: e-payment step 1

#### Features

- \* #i0037: Replace marker by cObjData
- \* #i0036: Debugging: Don't replace empty marker

#### Improvement

- \* #i0034: Disable jquery.caddy-3.0.0 / fancybox
- \* #i0033: Move version from 4.0.1 to 3.0.1

#### Bugfix

- \* #i0039: Caddy included TypoScript template for Caddy 4.x. Proper is template for Caddy 2.x

4.0.1

#### Major Feature

- \* #53742: Fancybox

#### Improvement

- \* #i0032: plugin.tx\_powermail.settings.misc.showOnlyFilledValues = true

4.0.0

#### Major Feature

- \* #53679: Workflow in AJAX

3.0.0

#### Major Feature

- \* #53360: Fit it into TYPO3 6.x

2.1.5

#### Improvement

- \* #i0032: Searchfields tca.php
- \* #i0031: Update the manual. Here: wt\_cart

2.1.4

#### Improvement

- \* #52313: Try to externalise tcpdf

2.1.3

#### Manual

2.1.2

#### Improvement

- \* #i0029: Setup: minimum groos sum for items
- \* #i0028: CSS
- \* #i0027: pdf filename %H%M -> %H%M%S
- \* #52165: Update tcpdf: 5.9.149 -> 6.0.031

2.1.1

#### Improvement

- \* #i0026: additional template caddy\_wo\_options.html
- \* #i0025: DRS

2.1.0

#### Features

- \* #51916: Plugin for amount only

- 2.0.11 **Improvement**
  - \* #i0024: db.sql**Bugfixing**
  - \* #i0023: \$this->extKey -> \$\_EXTKEY
- 2.0.10 **Bugfixing**
  - \* #50045: rounding error
- 2.0.9 **Bugfixing**
  - \* #i0019: UTF8-Bug in Powermail 2
- 2.0.8 **Features**
  - \* #i0022: Unique file names
  - \* #i0021: Term of Credit**Improvement**
  - \* #i0020: Constant Editor Labelling**Bugfixing**
  - \* #49431: misspelling nachnahme
  - \* #49427: misspelling constants
  - \* #49428: Localisation dependency (isn't tested in not localised context)
  - \* #49430: Check TypoScript Case
- 2.0.7 **Features**
  - \* #i0018: \* New user functions
    - \* calcDueDate
    - \* calcMultiply
  - \* #i0016: \* Improved caddy table structur**Improvement**
  - \* #i0017: \* Shipping tax
    - \* Moved from normal to reduced
- 2.0.6 **Improvement**
  - \* #i0015: \* Overwrite existing files!
- 2.0.5 **Bugfix**
  - \* #i0014: \* Unproper TypoScript path to HTML table properties for PDF files
  - \* #i0013: \* If customer doesn't get any invoice and any deliveryorder, HTML template for caddy isn't loaded.  
This causes a bug, while sending the confirmation e-mail.  
Workflow:
    - \* Respect HTML template in case of all PDF files.
- 2.0.4 **Bugfix**
  - \* #i0012: \* foreach( ) : Invalid argument in line 607
  - \* foreach( ) : Invalid argument in line 171
- 2.0.3 **Improvements**
  - \* #i0006: HTML mini caddy
  - \* #i0005: TypoScript is cleaned up
- 2.0.2 **Improvement**
  - \* #i0004: Rendering of option lists
  - \* #i0003: Calculation of options costs
- 2.0.1 **Feature**
  - \* #i0002: Power of Revocation**Bugfix**
  - \* #i0001: unproper locallang.xml value in userfunc
- 2.0.0 **Features**
  - \* #45954: Database
  - \* #45915: Powermail Controller
  - \* #45863: Icons
  - \* #45808: PDF attachments: Bill and Shipping
  - \* #45967: Attachment Invoice
  - \* #45968: Attachment Delivery Order
  - \* #45969: Attachment Terms & Conditions**FORK**
  - \* #45792: DRS - Development Reporting System
  - \* #45775: Fork from wt\_cart 1.4.6
  - \* #45797: Consolidating code

- \* #45783: Proper Flexforms
- \* #45781: Proper extension manager
- \* #45776: Move all labels from wt\_cart to caddy

# Illustration Index

Illustration 1: Caddy on a desktop and on a smartphone .....	3	Illustration 26: Plugin [Check it!] .....	25
Illustration 2: Caddy with e-payment interface .....	3	Illustration 27: Plugin [Notes] .....	25
Illustration 3: Confirmation e-mail .....	4	Illustration 28: Plugin [Caddy] .....	26
Illustration 4: The caddy e-mail attachments (here: Quick Shop) ..	5	Illustration 29: Plugin [Email] .....	27
Illustration 5: The caddy plugin. ....	6	Illustration 30: Plugin [Billing Address] .....	28
Illustration 6: A caddy order record .....	7	Illustration 31: Plugin [Delivery Address] .....	29
Illustration 7: The Quick Shop Installer enables you, to install Caddy ready-to-use (2+3) with one mouse click (1). ....	7	Illustration 32: Plugin [Delivery Address] .....	29
Illustration 8: Quick Shop Installer - Installation with one mouse click .....	11	Illustration 33: Plugin [Sponsors] .....	30
Illustration 9: Caddy on a desktop and on a smartphone .....	13	Illustration 34: Plugin [Help!] .....	30
Illustration 10: Flush System Cache .....	14	Illustration 35: Caddy blue .....	49
Illustration 11: Caddy e-payment (Paymill) in live mode .....	16	Illustration 36: Caddy green .....	49
Illustration 12: Caddy e-payment (Paymill) in test mode .....	16	Illustration 37: Caddy orange .....	49
Illustration 13: Transactions (Paymill test mode) .....	17	Illustration 38: Caddy red .....	49
Illustration 14: Transaction (Paymill test mode) .....	17	Illustration 39: Caddy blue .....	50
Illustration 15: Caddy with accordion items .....	20	Illustration 40: Icon path in the Constant Editor .....	50
Illustration 16: Caddy with accordion shipping and service .....	20	Illustration 41: caddy blue/red .....	50
Illustration 17: Caddy with accordion payment .....	20	Illustration 42: Caddy icons .....	51
Illustration 18: Caddy with accordion amount .....	20	Illustration 43: Your (1) draft will merged ... ..	52
Illustration 19: Caddy thanks .....	20	Illustration 44: ... with (2) Caddy content ... ..	52
Illustration 20: Plugin Caddy (backend) .....	21	Illustration 45: ... to the (3) attachment. ....	52
Illustration 21: Plugin Caddy Mini (frontend) .....	22	Illustration 46: [PDF] tab of the Caddy plugin .....	53
Illustration 22: Plugin Caddy Mini (backend) .....	22	Illustration 47: Properties of a PDF attachment (here: invoice) ...	54
Illustration 23: Plugin Caddy Mini (frontend) .....	23	Illustration 48: Audit proof by the Extension Manager .....	64
Illustration 24: Plugin Caddy Mini (backend) .....	23	Illustration 49: Enable the DRS by the Extension Manager .....	85
Illustration 25: Sample with Quick Shop .....	24	Illustration 50: Enable the DRS by the Plugin / Flexform .....	86
		Illustration 51: Enable the DRS by the Plugin / Flexform .....	86
		Illustration 52: The DRS Report .....	87

# Alphabetical Index

Attachments .....	Colour Schemes .....	PCI-DSS .....	Font colour .....
Corporate design .....	Attachments .....	Powermail .....	Font family .....
Audit Proof .....	E-mail .....	Provider .....	Font stretching .....
Database .....	HTML .....	Responsive .....	Invoice .....
Disabling .....	Icons .....	Test mode .....	Address .....
Bank account .....	PDF .....	TypoScript .....	Numbers .....
BIC .....	Constant Editor .....	Error .....	Order number .....
Constant Editor .....	Bank account .....	E-mail .....	Paths .....
IBAN .....	Button .....	PDF without address .....	Power of revocation .....
Billing .....	Colours .....	TCPDF .....	Power of Revocation .....
Address .....	Currency symbol .....	Evaluation .....	Term of credit .....
Caddy .....	Database .....	Extension Manager .....	Terms & Conditions .....
Invoice address .....	Debugging .....	Debugging .....	TypoScript .....
Powermail .....	Decimal .....	Form .....	Plugin .....
Button .....	Due date .....	Button .....	Address .....
Templates .....	E-PAYMENT .....	With select box .....	Delivery .....
Caddy .....	GET-/POST-Parameter .....	Without select box .....	Invoice .....
Address .....	Icons .....	Templates .....	Caddy .....
Delivery .....	Service attribute .....	Foundation .....	Caddy: Mini .....
Invoice .....	ShowUid .....	CSS .....	Caddy: sum gross .....
Audit Proof .....	Storage folder .....	Powermail .....	Debugging .....
Calculating .....	Table width .....	Get-/Post-parameter .....	E-mail .....
Check-it! .....	Tax .....	Installation .....	PDF .....
Condition .....	Templates .....	Manual .....	Powermail .....
Database .....	Thousands separator .....	One-Click .....	Address .....
Debug .....	User functions .....	Organiser Installer1 .....	Billing .....
Delivery .....	Corporate Design .....	Quick Shop Installer2 .....	Delivery .....
Address .....	Button .....	Invoice .....	Invoice .....
Order number .....	Colour schemes .....	Address .....	E-Payment .....
Discount .....	Colours .....	Attachments .....	Evaluation .....
Evaluation .....	Icons .....	Billing address .....	Foundation .....
Invoice .....	Ready-to-use .....	Caddy .....	Static Templates .....
Billing address .....	Upload .....	Plugin .....	TypoScript .....
Invoice number .....	CSS .....	Powermail .....	Update .....
Maximum order quantity .....	Foundation .....	Templates .....	Work-flow .....
Minimum order quantity .....	Powermail .....	Localization .....	Responsive Design .....
Numbers .....	Static Templates .....	Amount .....	Foundation .....
Reset .....	Database .....	Template .....	Screenshots .....
Order number .....	Debugging .....	Marker .....	TYPO3 Foundation .....
Pid .....	DRS .....	Item .....	TypoScript .....
Plugin .....	E-Payment .....	Sum .....	Session data .....
Sql .....	Extension Manager .....	Numbers .....	Debugging .....
Static Templates .....	GET-/POST-Parameter .....	Reset .....	ShowUid .....
Sys_registry .....	Paymill .....	Sys_registry .....	Sponsoring .....
Templates .....	Plugin .....	Pages .....	Package .....
Variants .....	Report .....	Caddy .....	Static Templates .....
Work-Flow .....	Session data .....	Caddymini .....	Caddy .....
Caddy Mini .....	User functions .....	Revocation .....	CSS .....
Content .....	Delivery .....	Shop .....	Ordering .....
Item .....	Address .....	Terms .....	Powermail .....
Plugin .....	Caddy .....	Paymill .....	Symbols .....
Sum .....	Plugin .....	Configuration .....	Quantity .....
Templates .....	Powermail .....	Constant Editor .....	Service Attribute .....
_HTMLMARKER .....	Templates .....	Debugging .....	TCPDF .....
Caddy Sum Gross .....	Discount .....	Javascript Bridge .....	Error .....
Content .....	TypoScript .....	Keys .....	Templates .....
Plugin .....	DRS .....	Live-mode .....	Button .....
Sum .....	Debugging .....	PCI-DSS .....	With select field .....
Templates .....	E-mail .....	Transaction .....	Without select field .....
Calculating .....	Delivery Order .....	TypoScript .....	Caddy .....
Available from .....	Error .....	PDF .....	Caddymini .....
Available until .....	Invoice .....	Address .....	Caddysum .....
Based on each .....	Plugin .....	Delivery .....	Delivery order .....
Based on price .....	Power of Revocation .....	Invoice .....	E-mail .....
Based on quantity .....	Templates .....	Missing .....	Form .....
Default code .....	Terms & Conditions .....	Attachments .....	Invoice .....
Discount .....	E-Payment .....	Background .....	Paths .....
Free from .....	Constant Editor .....	Caddy .....	TypoScript .....
Free until .....	Currency .....	Colour .....	Decimal .....
Individual max .....	Debugging .....	Date .....	Deliveryorder .....
Individual sum .....	Live mode .....	Delivery .....	E-Payment .....
Show all disabled .....	Paymill .....	Address .....	Euro .....

Invoice .....	74	Symbols .....	72	Terms .....	74	Work-flow .....	
Labels .....	69	Tax .....	72	Values .....	69	Caddy .....	57
Options .....	70p.	Templates .....		Variants .....	73	Powermail .....	57
Payment .....	70p.	Caddy .....	75	_CSS_DEFAULT_STYLE .....	76	Wt_cart .....	
Paymill .....	32	Caddymini .....	75	_HTMLMARKER .....	76	Update .....	88
Powermail .....	77	Caddysum .....	75	Update .....	88	Versus Caddy .....	95
Rates .....	69	Deliveryorder .....	75	Powermail .....	88	_CSS_DEFAULT_STYLE .....	76
Reset .....	32	E-mail .....	75	Wt_cart .....	88	_HTMLMARKER .....	76
Revocation .....	74	Html .....	75	User functions .....		Caddy Mini .....	83
Shipping .....	70	Invoice .....	75	Debugging .....	86		
Specials .....	70	Revocation .....	75	Variants .....			
Sql .....	73	Terms .....	75	Sql .....	73		