

EXT: heads list

Extension Key: dg_headslist

Language: en

Keywords: heads list, tooltip

Copyright 2000-2008, DennisGrote, <d.grote@dd-medien.de>

This document is published under the Open Content License
available from <http://www.opencontent.org/opl.shtml>

The content of this document is related to TYPO3
- a GNU/GPL CMS/Framework available from www.typo3.org

Table of Contents

EXT: heads list.....	1	Configure the options.....	5
Introduction.....	3	FAQ.....	6
What does it do?.....	3	Configuration.....	7
Screenshots.....	3	Reference.....	7
Users manual.....	4	Template Marker.....	7
Install the extension.....	4	Known problems.....	8
Create the data folder.....	4	To-Do list.....	9
Add groups and data records in the data folder.....	4	ChangeLog.....	10
Add the extension to a page.....	5		



Introduction

What does it do?

This extension shows a list of pictures (in this case portraits) depending on the selected group with the standard or an alternative image and a link.

Screenshots

Below are an example of the Frontend view.

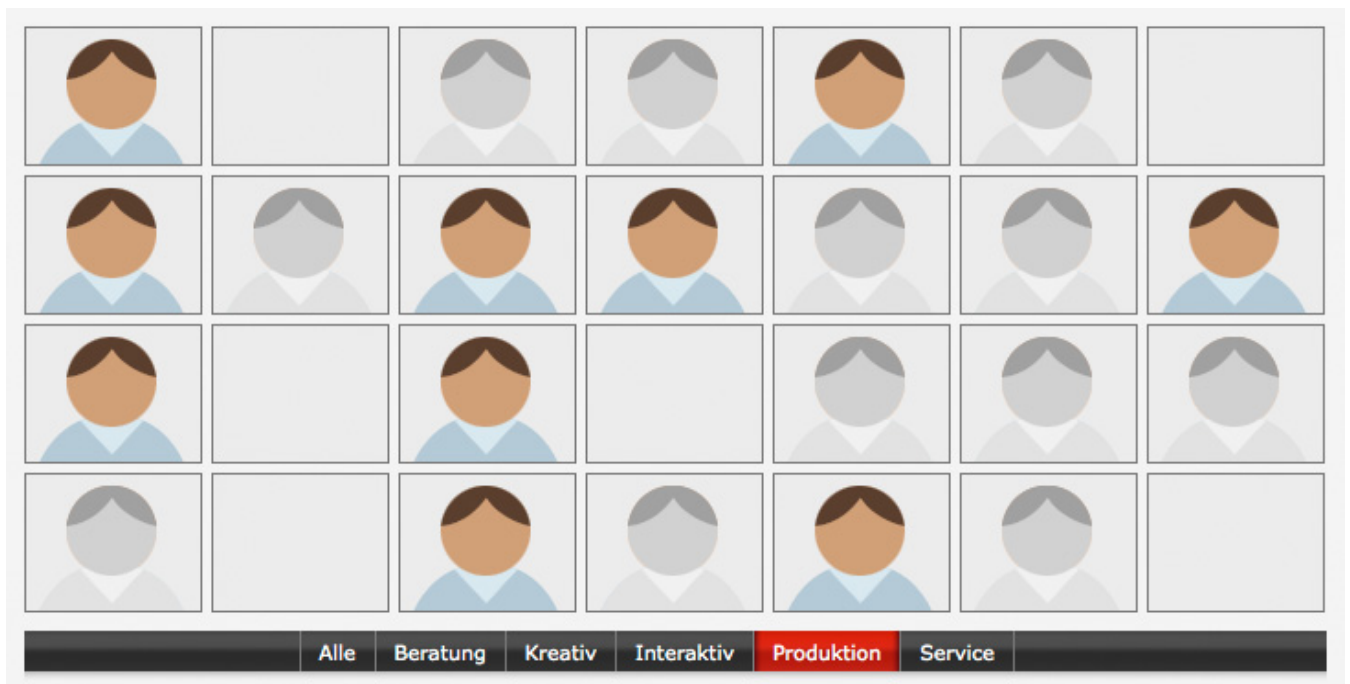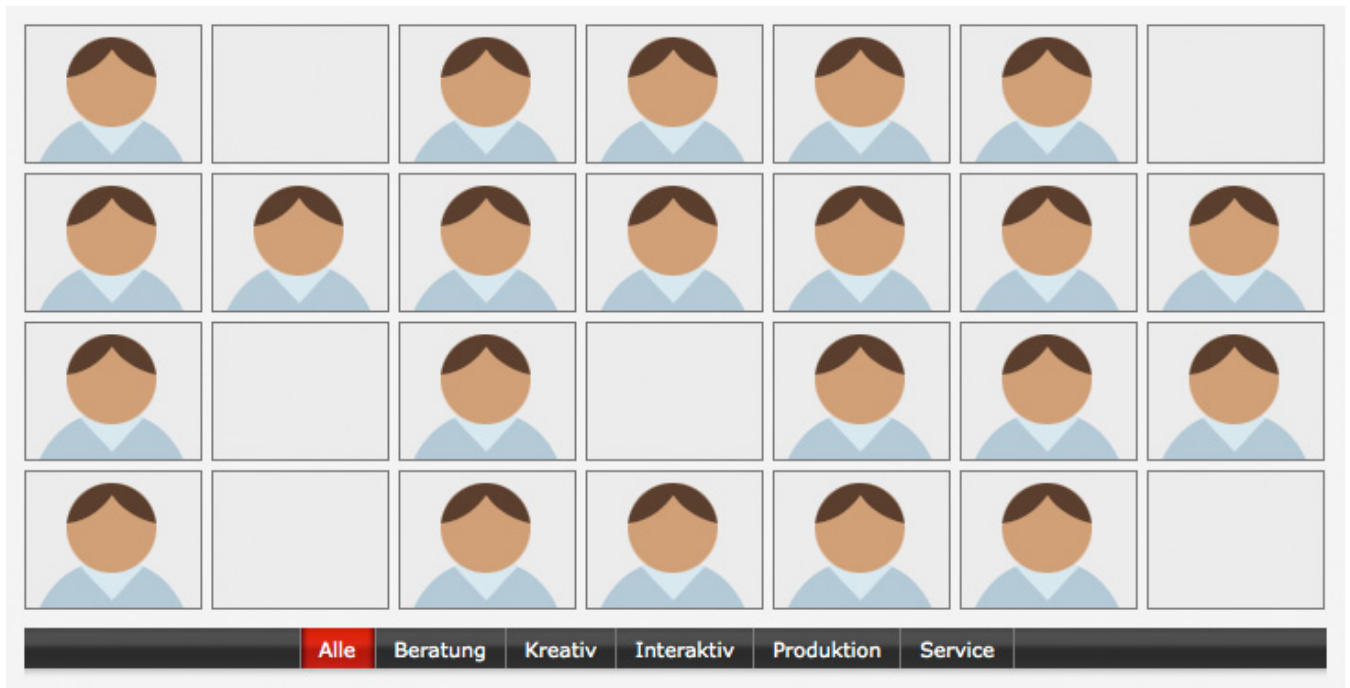

Users manual

Install the extension

The first step you need to do is to install the extension with the extension manager. You can get it by going to Tools section and choosing "Ext Manager" on the main action menu . Then select "Import extensions" in the dropdown Menu at top. Type "**dg_headslst**" in the search field and click on the "Look up" button. You should find the heads list extension. If you have never installed this, then you will see a red arrow to the left of the extension and you can click on that to install. If it has been installed, you can click on the green arrow to load the newest version if one exists.

Create the data folder

You can now create a new SysFolder. It's possible to create the extension records in normal pages but we recommend to use a new SysFolder because there can be many records and you can keep everything in one place. To create a new SysFolder add a new page to the page tree and change the type to Sysfolder.

Add groups and data records in the data folder

Groups and data records are only visible in the list view, so switch to the List view please. Click on "Create new record" and choose one of the following:



You have to add your groups first, because you need the groups to add them to a new data record. The form fields are self-explanatory. At the bottom you see the fields for the data record, groups only contain a name field.

A screenshot of a web form titled "heads list data record [32] - dummy". The form has several sections: "Language:" with a dropdown set to "Default"; "Hide:" with an unchecked checkbox; "Name:" with a text field containing "Peter Mustermann"; "Active Images:" with a text field containing "dummy_02.jpg", a file icon, a person icon, a "dummy_02.jpg" image, and a "Durchsuchen..." button; "Inactive Images:" with a text field containing "dummy_03.jpg", a file icon, a person icon, a "dummy_03.jpg" image, and a "Durchsuchen..." button; "Groups:" with a list box containing "Alle" and "Produktion", a "heads list groups" icon, and a "heads list groups" label; "Link to detail page:" with a checked checkbox and a text field containing "216"; and "No tooltip for this record:" with an unchecked checkbox.

Add the extension to a page

Select a page from the page tree in that you want to use the extension. Click on "create new content element" and then at the bottom in the plugins section on "heads list". When you are done with this, you have to configure the options.

Configure the options

After you add the extension to a page, you have to edit the flexform options. We have two tabs, General adjustments and ToolTip.

General adjustments

Plugin Options:

General adjustments | ToolTip

What to display:
NORMAL

Startingpoint:
Headslist [391]

max. Image width:
☒ 95

max. Image height:
☐

Default group:
Alle

Show grouplist:
☒

Show inactive images:
☒

Links only on active images:
☐

Use language overlay also for data records:
☐

PageID to NORMAL: (for GROUPMENU)


Put link parameter on data record links:
☒

Template:

Property:	Description:
What to display:	Select what to display. NORMAL (default): Displays the images with the groupmenu. GROUPMENU: Displays only the groupmenu.
Startingpoint:	Select the Sysfolder with the data records, if you leave it blank the startingpoint will be the current page.
max. Image width:	If you leave it blank the image will be shown in original width.
max. Image height:	If you leave it blank the image will be shown in original height.
Default group:	Select the group which will be displayed when you enter the page, if you leave it blank all data records will be displayed with the active image.
Show grouplist:	This is selected by default, when you deselect it the grouplist will not be shown under the images.
Show inactive images:	This is selected by default, when you deselect it the inactive images will not be shown.
Links only on active images:	Just like it sounds.

Property:	Description:
Use language overlay also for data records:	Just like it sounds.
PageID to NORMAL: (for GROUPMENU)	The ID of a page were you use the NORMAL view, only used for the GROUPMENU view.
Put link parameter on data record links:	If you use this, you can mark the actual group on the data record detail page if there is a groupmenu on it.
Template:	You can add your own template, if you leave it blank the default template will be used. (EXT:dg-headslst/res/headslst_templ.html)

ToolTips

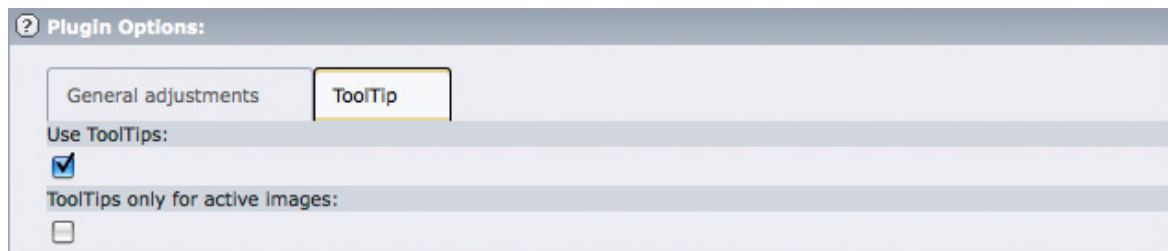

Property:	Description:
Use ToolTips:	This is selected by default, when you deselect it the tooltips are disabled.
ToolTips only for active images:	Just like it sounds.

FAQ

- no user FAQ so far

Configuration

Reference

plugin.tx_dgheadslst properties: TS configuration

Property:	Data type:	Description:	Default:
templateFile	resource	The HTML-template.	EXT:dg_headslst/res/headslst_tem pl.html
code	string	Code to define, what the script does. (possible strings: NORMAL, GROUPMENU)	
pidList	string	The page ID (pid) where your records are stored in (also known as "Startingpoint"). If this value is not set, and the "Startingpoint" field in the plugin content-element is also empty, the current page is used.	
normalPid	string	The page ID (pid) where you use the "NORMAL" view. To point the group menu on detail pages to the "NORMAL" view page.	
imageWrap	string	Wrap for every images.	
linkWrap	string	Wrap for a link in the group menu.	
currentWrap	string	Wrap for a current link in the group menu.	
activeWrap	string	Wrap for a active link in the group menu.	

[tsref: plugin.tx_dgheadslst_pi1]

Example

Insert a group menu in a marker, so that it is visible on all detail pages:

```
lib.headsmenu < plugin.tx_dgheadslst_pi1
lib.headsmenu
    code = GROUPMENU
    pidList = 10
    normalPid = 123
}

page.10.marks.HEADSMENU < lib.headsmenu
```

Template Marker

The template can be found at: EXT:dg_headslst/res/headslst_templ.html

Data records

Property:	Description:
###IMAGES###	The images
###GROUPITEM###	Groupmenu item Will only be shown if a group exist and the option „Show grouplist“ is selected.

Wraps

Property:	Description:
###HEADSLIST###	Wrap for all data records
###RECORD###	This wrap contains the marker for each data record
###HEADSLISTGROUP###	Wrap for all groups
###GROUP###	This wrap contains the marker for each group

Known problems

- there are no known problems

To-Do list

-

ChangeLog

1.0.5

- * added "What to display" to chose NORMAL or GROUPMENU.
- * added "PageID to NORMAL"
- * added "Put link parameter on data record links"
- * remove "Own css"
- * remove "Own ToolTips css"
- * added TS configuration
- * added static TS
- * move default css to static TS
- * php code completely rewritten
- * renamed many FlexForm options

1.0.2

- * added multilanguage support

1.0.1

- * added manual
- * added default category
- * added "Show categorylist" check box
- * added "Links only on active images" check box
- * added "ToolTips only on active images" check box

1.0.0

- * First public release