

# Flip it!

Flip it! enables you to run over pages in PDF documents like in a real magazine. Flip it! offers lovely and smooth page flip transitions. The visitor of your website does not need any PDF plugin but a Flash plugin. Flip it! can convert PDF documents to SWF files automatically.



Version: 1.0.4, 2013-02-05

Extension Key: flipit Language: en

Keywords: forDevelopers, forIntegrators, pdf, flip, pageflip, bookflip, flippingbook, pdf2flash, pdf2swf

Copyright 2012-2013, Dirk Wildt, Die Netzmacher, <a href="http://wildt.at.die-netzmacher.de">http://wildt.at.die-netzmacher.de</a>

This document is published under the Open Content License available from http://www.opencontent.org/opl.shtml

The content of this document is related to TYPO3

- a GNU/GPL CMS/Framework available from www.typo3.org



# **Table of Contents**

Flip it!	1
Screenshots	3
Introduction	5
What does Flip it! do?	5
What do you need?	
TYPO3 4.5, 4.6 and 4.7	
Forum	
Quick Installation	6
Installation	7
Install SWFTOOLS (optional)	7
Install this extension.	7
Add a page, TypoScript template and a content element	
By the way: Page tree ids and icons	11
Tutorial	12
Upload a PDF file	12
Enable Flip it!	12
With download link	
Without fancybox	15
Workflow	16
With SWFTOOLS	16
Without SWFTOOLS	16
Controlling	17
Placement of Static Templates	17
Plugin versus Constant Editor	
XML Configuration File	
Fancybox	19
Cash	20
Workflow	20
Updating	20
Protecting	
Cleaning up	20
iOuery	21

Library and rancybox by default	21
Possible conflict	21
Solve conflict	21
t3jquery	21
Debugging	22
DRS - Development Reporting System	22
Firebug	24
Reference	25
Constant Editor	25
Setup	29
SWFTOOLS	31
Installation supported by the TYPO3 repository	31
Use Flip it! without the SWFTOOLS	
Development	34
Integrate Flip it! in your extension!	34
The Flash source code	34
Credits	35
State Development Corporation of Thuringia	
Janis Skarnelis	
Rainer Böhme, De Clarke, Matthias Kramm	
Macc at IpariGrafika and Steve Palmer	
codebox – webcoders in a box	
FAQ	36
Is all open source?	
Why fancybox and not fancyBox 2?	36
Further Information	37
Other extensions published by Die Netzmacher	37
Known Bugs	38
Delayed pages	
Illustration Index	
Change Log	



# **Screenshots**

VTYP03



Illustration 1: Thumbnail



Illustration 2: Run over pages like in a real magazine. Flip it! application in the fancybox.



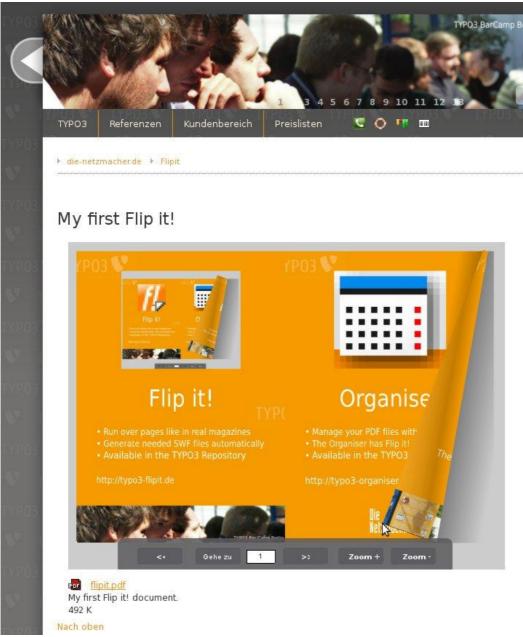


Illustration 3: Run over pages like in a real magazine. Flip it! application without a fancybox.





# Introduction

# What does Flip it! do?

- Flip it! enables you to run over pages in PDF documents like in a real magazine.
- Flip it! offers lovely and smooth page flip transitions.
- The visitor of your website does not need any PDF plugin but a Flash plugin.
- Flip it! can convert PDF documents to SWF files automatically.
- Flip it! is configurable by both user interfaces: by the plugin/flexform and by the TypoScript Constant Editor.
- You have round about sixty properties of configuration.
- The fancybox (lightbox) is integrated.
- Flip it! extends the TYPO3 content element "File Links" and doesn't have any own plugin.
- Flip it! evaluates requirements and your configuration.
- Flip it! is supported by the DRS the Development Reporting System. It prompts the workflow while runtime.

# What do you need?

- If you like an auto-converting of PDF documents to SWF files, you need the SWFTOOLS (see page 31). Note: Flip it! runs without SWFTOOLS too.
- Visitors of your website need a Flash plugin.

## TYPO3 4.5, 4.6 and 4.7

- Flip it is tested in TYPO3 version 4.5, 4.6 and 4.7.
- If you are using TYPO3 below 4.7 you have to include an additionally TypoScript template.

### **Forum**

Flip it! will get a website and a forum. Please visit:

- http://typo3-flipit.de/
- http://forum.typo3-flipit.de/



# **Quick Installation**

- Install SWFTOOLS, if Flip it! should generate SWF files automatically (this is recommended). See "SWFTOOLS" on page 31 below. Note: Flip it! runs without SWFTOOLS too.
- · Install this extension.
- Enable it.
- Check requirements with the [EVALUATOR] within the extension manager.
- Add a page "flipit" to your page tree.
  - Add a TypoScript template.
    - Include static (from extensions): [Flip it!: Base (obligate!)]
    - If TYPO3 below 4.7 is running, add the static template for TYPO3 < 4.7</li>
  - Add the content element [File Links]
    - Check requirements. See tab [Flip it!] area "Check Plugin".
    - Upload a PDF file.
    - If Flip it! runs without SWFTOOLS, upload the SWF files and the XML file by your own.
       See "Use Flip it! without the SWFTOOLS" on page 32 below.
       Or test it with the "Sample data" on page 12 below.
    - Select the tab [Flip it!]
    - Enable Flip it! by selecting a layout from [layout\_01] to [layout\_03]
- · Run the frontend
  - · Click on the Flip it! thumbnail.
- If you get an unexpected result, please refer to the section "Debugging" on page 22 below.





# **Installation**

# **Install SWFTOOLS (optional)**

If Flip it! should generate SWF files automatically (this is recommended), please install the SWFTOOLS.

See "SWFTOOLS" on page 31 below.

Note: This in an option. Flip it! runs without SWFTOOLS too.

### Install this extension.

- · Install this extension.
- Enable it.

### Update the database

Update the database and create the update folder "uploads/tx\_flipit"

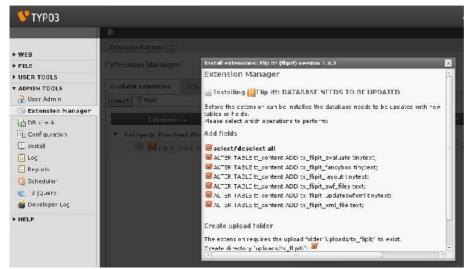


Illustration 4: Flip it! extends the tt\_content table with some fields



### Check requirements

Check requirements with the [EVALUATOR] within the extension manager.

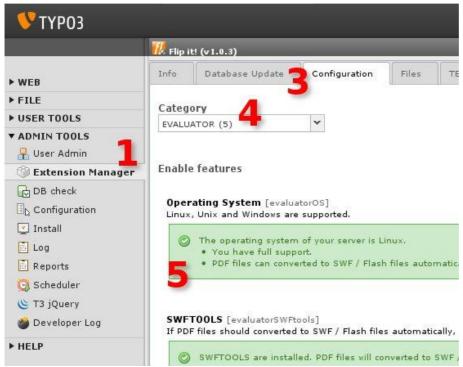


Illustration 5: Flip it! evaluates needed and optional requirements

1.	Modul	Admin Tools > Extension Manager
2.	Edit area	Select Flip it! (not illustrated above)
3.		Select the tab [Configuration]
4.		Select Category [EVALUATOR]
5.		The report.

### The report

The evaluator checks

- the operating system
- the SWFTOOLS
- and the TYPO3 version

### Note for a Windows server and SWFTOOLS

If you have SWFTOOLS installed on a Windows server, you have to maintain the path to the SWFTOOLS.

#### See

1.	Modul	Admin Tools > Extension Manager
2.	Edit area	Select Flip it!
3.		Select the tab [Configuration]
4.		Select Category [WINDOWS]
5.		Field Windows

The path is by default: C:\Program Files (x86)\SWFTools





# Add a page, TypoScript template and a content element

Add a page "Flipit" to your page tree.

### TypoScript Template

Add to your page "Flipit" a TypoScript template.

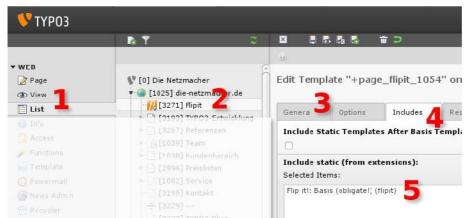


Illustration 6: Page Flip it! with the TypoScript template

Configure the template like in the illustration above.

1.	Modul	Web > List

2. Page tree Select the page Flipit

3. Edit area Tab [General]

Call your template +page\_flipit\_id, where the id is the id of the TypoScript<sup>1</sup>

4. Tab [Includes]

5. Field "Include static (from extension)": [Flip it!: Basis (obligate!) (flipit)]

6. If TYPO3 below 4.7 is running, include [+Flip it!: Basis for TYPO3 < 4.7 (obligate!) (flipit)]

<sup>1</sup> This syntax isn't obligate, but it simplifies the maintaining of TypoScript in the TypoScript Object Browser in principle.





### Content element

Add a content element [File Links]

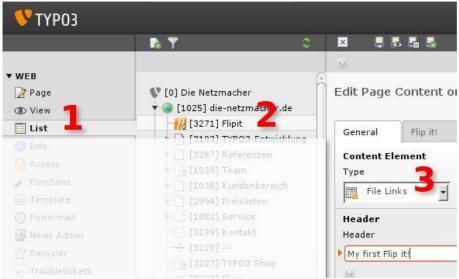


Illustration 7: Page Flip it! with a content element [File Links]

And configure it like in the illustration above.

1. Modul Web > List

2. Page tree Select the page Flipit

3. Edit area Content Element > Type: [File Links]

Header > Header: "My first Flip it!"

### Plugin check

Please check the plugin.

1. Edit area Tab [Flip it!]

2. Area / field: Plugin Check

You will get a report like in the illustration on the right hand. If something isn't proper, follow the given instructions.

The plugin checks,

if the TypoScript template is included

if TypoScript is proper

· if SWFTOOLS are installed

which TYPO3 version is running

if the DRS<sup>1</sup> is enabled

The plugin check offers direct links to:

- the extension manager
- the TypoScript Constant Editor
- · the online manual
- the Flip it! forum

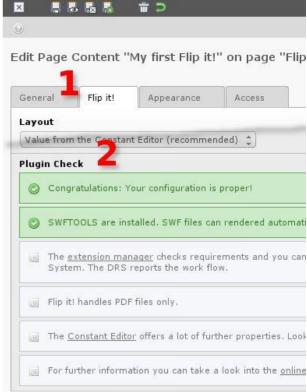


Illustration 8: The tab [Flip it!] checks the requirements

<sup>1</sup> DRS – Development Reporting System (see page 22)





# By the way: Page tree ids and icons

### Flip it! icon

If you like the Flip it! icon in the page tree, please configure your page Flip it!

1. Modul Web > List

Page tree Select the page Flipit
 Edit area Edit the page properties

4. tab [Appearance]

5. area "Use as Container", field "Contains Plugin": [Flip it!]

### Ids and other icons

If you like the page ids within the page tree and some other individual icons, please refer to

 TSconfig Pages and Users by extManager (tsconf) http://typo3.org/extension-manuals/tsconf/current/





# **Tutorial**

# Upload a PDF file

Upload a PDF file into your content element [File Links].

If you need a sample file, please take

- http://forge.typo3.org/projects/extension-flipit/repository/changes/trunk/res/sampledata/sample\_flipit.pdf Upload a PDF file (DIN A/4 portrait is recommended).
  - · Upload a PDF file.
  - Select the tab [Flip it!]
  - Enable Flip it! by selecting a layout from [layout\_01] to [layout\_03]

### Sample data

If Flip it! runs without SWFTOOLS, the configuration file and the SWF files must uploaded manually.

How to get the SWF files and the XML file, is explained in "Use Flip it! without the SWFTOOLS" on page 32 below. Flip it! offers sample data. Please upload this files:

#### PDF

Tab [General] >Files > Select Files

• http://forge.typo3.org/projects/extension-flipit/repository/changes/trunk/res/sampledata/sample\_flipit.pdf

#### **XML**

Tab [Flip it!] > Files > XML-configuration-file:

http://forge.typo3.org/projects/extension-flipit/repository/changes/trunk/res/sampledata/sample\_flipit.xml

#### SWF

Tab [Flip it!] > Files > Converted SWF files

- http://forge.typo3.org/projects/extension-flipit/repository/changes/trunk/res/sampledata/sample\_flipit\_1.swf
- http://forge.typo3.org/projects/extension-flipit/repository/changes/trunk/res/sampledata/sample\_flipit\_2.swf
- http://forge.typo3.org/projects/extension-flipit/repository/changes/trunk/res/sampledata/sample\_flipit\_3.swf
- http://forge.typo3.org/projects/extension-flipit/repository/changes/trunk/res/sampledata/sample\_flipit\_4.swf

# Enable Flip it!

Enable Flip it! within your content element [File Links].

Tab [Flip it!] > Layout: from [1: ...] to [3: ...]



### Result in the frontend

The result in the frontend should look like in the illustration above:



Illustration 9: Thumbnail

Please click on the thumbnail or the link beside the icon. A fancybox will open and will display the PDF file for flipping.



Illustration 10: Flip it! within the fancybox



## With download link

You can add a download link like in the illustration below.



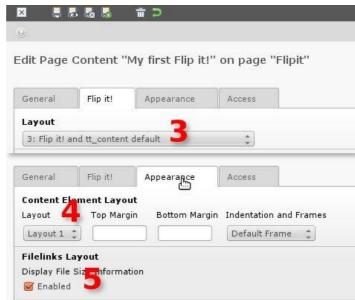


Illustration 11: Download link

Illustration 12: Layout 3

1.	Edit area	tab [General] > File Description: My first Flip it! application
2.		tab [General] > Titles: Download My first Flip it!
3.		tab [Flip it!] > Layout: [3: Flip it! and tt_content default]
4.		tab [Appearance] > Layout: [Layout 1] <sup>1</sup>
5.		tab [Appearance] > Display File Size Information: [X]

<sup>1</sup> Layout 1: with an mime-type icon. Layout 2: with a thumbnail.





## Without fancybox

If you don't want a fancybox, please add the TypoScript template [+Flip it!: Fancybox disbaled (flipit)] to your TypoScript like in the illustration below.

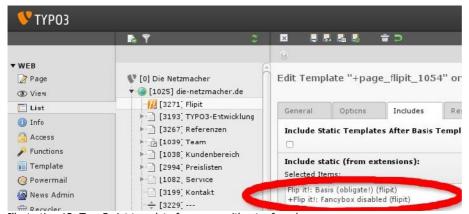


Illustration 13: TypoScript template for a case without a fancybox

### Result in the frontend

The result in the frontend should look like in the illustration below.



Illustration 14: Flip it! without the fancybox

### Width and height

You can control the values for width and height in the Constant Editor. See Category [Flip it! - HTML] Width and Height.





# Workflow

## With SWFTOOLS

Flip it! does three jobs:

- It extends the content element with severals fields for controlling Flip it! and linking to the configuration file (XML) and the Flash files (SWF).
- It renders the XML file and the SWF files while the content element is called in the frontend and stores the rendered files in the directory uploads/tx\_flipit.
- It takes care about the needed JavaScript code in the frontend.

### Your job is

- enabling Flip it!
- · controlling Flip it!

## Without SWFTOOLS

If SWFTOOLS aren't installed

• Flip it can't render the XML file and the SWF files.

Than your job is additionally

• to upload the XML file and the SWF files by your own. See "Use Flip it! without the SWFTOOLS" on page 32 below.







# Controlling

You can control Flip it!

- by the user interface within the plugin (flexform)
- · by the user interface of the TypoScript Constant Editor
- by TypoScript directly

## **Placement of Static Templates**

Flip it! change some properties in the TypoScript of tt\_content.uploads.20. tt\_content.uploads.20 controls the content element [File Links].

### Root page

If you place the static templates of Flip it! within the TypoScript template of your root page, the properties of tt\_content.uploads.20 are changed website wide.

#### Advantage

You can control Flip it! (and the content element [File Links]) centrally respectively website wide.

#### Disadvantage

If the changing of a property of the content element [File Links] causes a problem, you have this problem website wide.

### Single page (recommended)

If you place the static templates of Flip it! within the TypoScript template of a single page, the properties of tt content.uploads.20 is changed for this page and all subpages.

#### Advantage

If the changing of a property of the content element [File Links] causes a problem, you haven't this problem website wide.

### Disadvantage

If you are using Flip it! on another single page too, you have to include the static template twice and you have to configure Flip it! twice.

# Plugin versus Constant Editor

It is recommended to control Flip it! by the Constant Editor. Because this controls all plugins of the current page and all subpages,

- · you will have the minimum costs
- you will have the maximum transparency

#### Restrictions

The Constant Editor offers round about sixty properties. The plugin offers five properties.

### This effects:

- · A property in the Constant Editor controls all plugins of the current page and the subpages.
- · You can control a minimum of properties by the plugin directly.

This causes configuration restrictions.

### For example:

- The first PDF document should get a fancybox.
- The second PDF document should run as Flip it! application directly.

Probably you have to configure the HTML width and height for each content element in a different way. But you can't! You can solve this problem in this way:

• Place each PDF document on a different page.





# XML Configuration File

### **Code Snippet**

```
1. <content
                       = '1184'
2.
     width
                       = '842'
3.
     height
    height = '842'
buttoncolor = '5D5D61'
panelcolor = '5D5D61'
5.
                       = 'FFFFFF'
     textcolor
6.
   backgroundcolor = 'CCCCCC'
hcover = 'false'
7.
                  = 'false'
= 'Goto'>
     gotolabel
     <page src='uploads/tx_flipit/tx_org_downloads_34_doc_1_part_1.swf'/>
10.
     <page src='uploads/tx_flipit/tx_org_downloads_34_doc_1_part_2.swf'/>
11.
12.
      <page src='uploads/tx_flipit/tx_org_downloads_34_doc_1_part_19.swf'/>
13.
14. </content>
```

### **Content Parameters**

You are controlling the content parameters (in the snippet above from line 2 to 9) by the Constant Editor (see page 28 below) or if it is needed by TypoScript.

See the array

plugin.tx\_flipit.constant\_editor.xml

But be aware that you have to configure probably:

tt content.uploads.20.itemRendering.layout XX.userFunc.constant editor.xml

where XX is from 01 to 03.

```
plugin.tx_flipit {
   constant_editor {
     xml {
         // Please inspect it with the TypoScript Object Browser
     }
   }
}
```

You can add new parameters to this array.

Example

```
plugin.tx_flipit {
  constant_editor {
    xml {
      myParam1 = Hallo World
      myParam2 = TEXT
      myParam2 {
      value = This is Englisch
      lang {
         de = Das ist Deutsch
      }
    }
  }
}
```

The XML output will be (if the frontend is in German language)

```
<content
...
myParam1 = 'Hallo World'
myParam2 = 'Das ist Deutsch'
<page src='uploads/tx_flipit/tx_org_downloads_34_doc_1_part_1.swf'/>
<page src='uploads/tx_flipit/tx_org_downloads_34_doc_1_part_2.swf'/>
...
<page src='uploads/tx_flipit/tx_org_downloads_34_doc_1_part_19.swf'/>
</content>
```





## **Fancybox**

### Code Snippet

```
<script type="text/javascript">
  $(document).ready(function() {
    $("#c33_flipit_link").fancybox({
        'width' : '100%',
        'height' : '100%',
        'autoDimensions' : false,
        'overlayOpacity' : 0.2,
        'title' : '03 Stark am Markt Branchen-Booklet',
        'transitionIn' : 'elastic',
        'transitionOut' : 'elastic',
        'speedIn' : 1500,
        'showNavArrows' : false
    });
};
</script>
```

### **Parameters**

You are controlling the content parameters (in the snippet above from line 2 to 9) by the Constant Editor (see page 26 below) or if it is needed by TypoScript.

See the array

plugin.tx\_flipit.constant\_editor.fancybox

But be aware that you have to configure probably:

tt\_content.uploads.20.itemRendering.layout\_XX.userFunc.constant\_editor.fancybox

where XX is from 01 to 03.

```
plugin.tx_flipit {
  constant_editor {
    fancybox {
        // Please inspect it with the TypoScript Object Browser
     }
}
```

You can add new parameters to this array.

Example

```
plugin.tx_flipit {
  constant_editor {
    xml {
      myParam1 = Hallo World
      myParam2 = TEXT
      myParam2 {
      value = This is Englisch
      lang {
         de = Das ist Deutsch
      }
    }
  }
}
```

The JavaScript output will be (if the frontend is in German language)

```
<script type="text/javascript">
  $(document).ready(function() {
    $("#c33_flipit_link").fancybox({
          'myParam1' = 'Hallo World'
          'myParam2' = 'Das ist Deutsch'
          ...
    });
};
</script>
```



## Cash

Flip it! is running with a file cash only.

The cash is the content of the directory uploads/tx flipit: the generated or uploaded XML files and SWF files.

### Workflow

Flip it! generates or update all needed files while the content element [File Link] is called in the frontend.

A new XML file and new SWF files are generated or removed and updated,

- if there isn't any XML file or any SWF file or
- if the time stamp of the content element [File link] is newer than the oldest XML file or SWF file

### **Updating**

### Of one content element only

If you want to update the Flip it! cash of one content element only, please save this element once.

### Off all content elements

See "Cleaning up" below.

## **Protecting**

### Of one content element only

You can protect the cash of each content element.

Please configure within the flexform of the content element:

• Edit area tab [Flip it!] > Update SWF files and XML file automatically: [no (...)]

Be aware:

This isn't any protection, if you remove all files in the cash directory uploads/tx\_flipit.

# Cleaning up

If you like to clean up the whole cash, please empty (not remove!) the directory uploads/tx\_flipit.

#### Be aware:

• Any link in the content element to the XML files and the SWF files isn't removed.

But it doesn't matter in principle.

If a content element is called in the frontend, Flip it! realise, that there isn't any XML file and any SWF file and will render new files.

It does matter, if the cash of individually content elements are protected: The XML file and the SWF files are lost, but because of cash protection Flip it! won't render neither a new XML file nor new SWF files.

### Possible cause for removing the whole cash

A possible cause for removing the whole cash can be a changing in the corporate design of the website.

- The colours of the Flip it! background and navigation bar should changed website wide
- The size of the HTML area should changed website wide.





# **jQuery**

You can control the Flip it! jQuery here:

• Constant Editor > Category [FLIP IT! - JQUERY]

# Library and fancybox by default

Flip it! is including the jQuery library and the fancybox library by default.

### Possible conflict

If another jQuery library or another fancybox library is loaded, it can causes conflicts.

### Solve conflict

### 1. Disable Flip it! libraries

Disable the Flip it! jQuery library and the Flip it! fancybox.

#### **Constant Editor**

Constant Editor > Category [FLIP IT! - JQUERY]

Fancybox: [disabled]jQuery: [disabled]

### 2. Disable the other libraries

If the 1st option doesn't help, please

- · disable the foreign jQuery library and the foreign fancybox library and
- enable the Flip it! libraries.

# t3jquery

If you are using t3jquery, please compile the jQuery library based on the used JavaScript files of Flip it! This are the steps:

1. Modul: Admin Tools > T3 jQuery

2. Edit area: [Process & Analyze t3jquery.txt in extensions]

[Select all]
 [Check]
 [Merge & Use]

6. [Create jQuery Library]





# Debugging

If you have any unexpected result, you can inspect Flip it! in the TYPO3 backend with the DRS – the Development Reporting System – and in the TYPO3 frontend with Firebug.

# DRS - Development Reporting System

### Inspect work-flow and errors

The DRS - Development Reporting System - enables you

- to follow the work-flow of Flip it!,
- · to inspect alternate configuration possibilities,
- to inspect unproper configuration and
- it prompts warnings and errors

### **Enabling the DRS**



Illustration 15: Enabling the Development Reporting System

1. Module: Admin Tools > Extension Manager

2. Edit Area: Select the Flip it! extension

3. Tab [Configuration]

4. Category: [Debugging]

5. DRS – Development Reporting System: [Enabled]

6. [Update]





### The DRS report

### Precondition

You need the extension

Extension Development Evaluator (extdeveval)

### Report

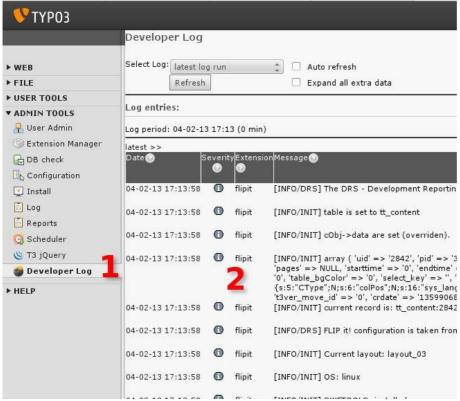


Illustration 16: The DRS report enables you to follow the work-flow of Flip it!

1. Module: Admin Tools > Development Log

2. Edit Area: the report







## Firebug

VTYP03

Firebug is a very helpful tool, if you want to inspect JavaScript (jQuery) errors.

### You need

- the Firefox browser
- the plugin Firebug

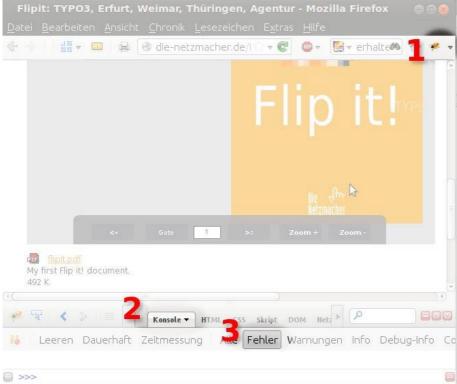


Illustration 17: In case of JavaScript errors, Firebug will prompt it

- 1. Enable Firebug
- 2. tab [Console]
- 3. tab [Errors]
- Reload the page





# Reference

It is recommended to configure Flip it! by the Constant Editor and not by the TypoScript Object Browser directly.

## **Constant Editor**

All properties have the prefix plugin.tx\_flipit.

Example: configuration.layout is plugin.tx\_flipit.configuration.layout.

### **CONFIGURATION**

Property:	Data type:	Description:
configuration.layout	string	<ul> <li>layout_00: tt_content default (without Flip it!)</li> <li>layout_01: Flip it! only</li> <li>layout_02: Flip it! and tt_content default but download link</li> <li>layout_03: Flip it! and tt_content default.</li> </ul>
configuration.enableFancybox	string	<ul> <li>disabled</li> <li>enabled</li> <li>Disable it, if you don't want to use Flip it! in a fancybox by default.</li> </ul>
configuration.updateswfxml	string	<ul> <li>disabled</li> <li>enabled</li> <li>Update SWF files and XML file autmatically. If enabled and if SWFTOOLS are installed, Flip it! will render SWF files and XML file automatically. This is recommended.</li> </ul>
configuration.filetypes	string	<ul> <li>jpg</li> <li>pdf</li> <li>png</li> </ul> Comma separated list of file types for SWF conversion. Without any effect in the current version.

### **DATABASE**

If Flip it! is integrated in another extension, you have to map some fields.

If you are interested in how to integrate Flip it!, please refer to "Integrate Flip it! in your extension!" on page 34 below.

Property:	Data type:	Description:
database.field.title	string	Label of the field, which contains the title. Examples: header, tx_org_downloads.title
database.field.media	string	Label of the field, which contains the files for converting to SWF / Flash.  Examples: media, tx_org_downloads.documents
database.field.layout		Label of the field, which contains the number of the selected layout.  Examples: layout, tx_org_downloads.documentslayout
database.field.filelink_size		Label of the field, which enables the displaying of the file size.  Examples: filelink_size, tx_org_downloads.documentssize





## **FANCYBOX**

You can extend the fancybox properties by TypoScript. See 'Fancybox' on page 19 above.

Property:	Data type:	Description:
fancybox.padding	integer	Space between FancyBox wrapper and content
fancybox.margin	integer	Space between viewport and FancyBox wrapper
fancybox.opacity	string	true     false
		When true, transparency of content is changed for elastic transitions
fancybox.modal	string	true     false  When true, 'overlayShow' is set to 'true' and 'hideOnOverlayClick', 'hideOnContentClick', 'land Farana Butten', 'land the Content Click', 'land the Content
fancybox.cyclic	string	'enableEscapeButton', 'showCloseButton' are set to 'false'  • true  • false
		When true, galleries will be cyclic, allowing you to keep pressing next/back.
fancybox.scrolling	string	<ul><li>auto</li><li>yes</li><li>no</li></ul>
		Set the overflow CSS property to create or hide scrollbars.
fancybox.width	string	Width for content types 'iframe' and 'swf'. Also set for inline content if 'autoDimensions' is set to 'false'
fancybox.height	string	Height for content types 'iframe' and 'swf'. Also set for inline content if 'autoDimensions' is set to 'false'
fancybox.autoScale	string	<ul><li>true</li><li>false</li></ul>
		If true, FancyBox is scaled to fit in viewport
fancybox.autoDimensions	string	<ul><li>true</li><li>false</li></ul>
		For inline and ajax views, resizes the view to the element recieves. Make sure it has dimensions otherwise this will give unexpected results
fancybox.centerOnScroll	string	<ul><li>true</li><li>false</li></ul>
		When true, FancyBox is centered while scrolling page
fancybox.hideOnOverlayClick	string	true false
		Toggle if clicking the overlay should close FancyBox
fancybox.hideOnContentClick	string	true     false
		Toggle if clicking the content should close FancyBox
fancybox.overlayShow	string	true     false
		Toggle overlay
fancybox.overlayOpacity	double	Opacity of the overlay (from 0 to 1. default: 0.3)
fancybox.overlayColor	string	Color of the overlay. Example: #666
fancybox.title	string	Forces title. Take a field of the current record.
fancybox.titleShow	string	true     false
		Toggle title





Property:	Data type:	Description:
fancybox.titlePosition	string	<ul> <li>outside</li> <li>inside</li> <li>over</li> </ul> The position of title
fancybox.transitionIn	string	<ul> <li>elastic</li> <li>fade</li> <li>none</li> </ul> The transition type
fancybox.transitionOut	string	<ul> <li>elastic</li> <li>fade</li> <li>none</li> </ul> The transition type
fancybox.speedIn	integer	Speed of the fade and elastic transitions, in milliseconds
fancybox.speedOut	integer	Speed of the fade and elastic transitions, in milliseconds
fancybox.showCloseButton	string	<ul><li>true</li><li>false</li><li>Toggle close button</li></ul>
fancybox.showNavArrows	string	<ul><li>true</li><li>false</li><li>Toggle navigation arrows</li></ul>
fancybox.enableEscapeButton	string	<ul> <li>true</li> <li>false</li> <li>Toggle if pressing Esc button closes FancyBox</li> </ul>
fancybox.type	string	<ul> <li>image</li> <li>ajax</li> <li>iframe</li> <li>swf</li> <li>inline</li> </ul> Forces content type

### HTML

Property:	Data type:	Description:
html.height	string	Height with em, per cent or pixel
html.width	string	Width with em, per cent or pixel
html.color.background	string	Background colour

# **JQUERY**

Property:	Data type:	Description:
jquery.fancybox	string	<ul> <li>enabled</li> <li>disabled</li> </ul> Include the jQuery fancybox library (1.3.4) and CSS provided by Flip it! If you are using
		another fancybox library and CSS, please set this option to "disabled"
jquery.fancyboxPosition	string	• top • bottom
		Place the jQuery fancybox library at the top of the page (HTML head) or at the bottom
jquery.fancyboxLibrary	string	Path to the fancybox library
jquery.fancyboxCSS	string	Path to the fancybox CSS





Property:	Data type:	Description:				
jquery.source	string	<ul> <li>enabled</li> <li>disabled</li> <li>Use the jQuery library (1.4.3) provided by Flip it! If you are using another jQuery library, please set this option to "disabled"</li> </ul>				
jquery.sourcePosition	string	top     bottom  Place the jQuery library at the top of the page (HTML head) or at the bottom				
jquery.sourceLibrary	string	Path to the jQuery library				

## **THUMBNAILS**

Property:	Data type:	Description:			
thumbnails.download.height	integer	height of the thumbnail, which is linked with the file for download			
thumbnails.download.width	integer	width of the thumbnail, which is linked with the file for download			
thumbnails.fancybox.height	integer	height of the thumbnail, which is linked with the fancybox			
thumbnails.fancybox.width	integer	height of the thumbnail, which is linked with the fancybox			
thumbnails.flipit.height	integer	height of the icon at the right bottom corner of the Flip it! thumbnail			
thumbnails.flipit.width	integer	width of the icon at the right bottom corner of the Flip it! thumbnail			
thumbnails.flipit.icon	icon string The path to the Flip it! icon. The Flip it! icon is placed at the right bottom corner of thumbnail.				

## XML

You can extend the XML properties by TypoScript. See 'XML Configuration File' on page 18 above.

Property:	Data type:	Description:			
xml.width	integer	Width in points (if autodetection failes)			
xml.height	integer	Height in points (if autodetection failes)			
xml.buttoncolor	string	Colour of buttons			
xml.panelcolor	string	Colour of the panel			
xml.textcolor	string	Colour of the font			
xml.backgroundcolor	string	Colour of the background			
xml.hcover	string	Hardcover: If set to true, fist and last page are hard covered.			
xml.gotolabel.default	string	Goto label: default language (English)			
xml.gotolabel.de	string	Goto label: German language			





## Setup

It is recommended to configure Flip it! by the Constant Editor and not by the TypoScript Object Browser directly.

All properties have the prefix plugin.tx\_flipit.

Example: constant\_editor.configuration is plugin.tx\_flipit.constant\_editor.configuration

### tx\_flipit

Be aware: Changes in the configuration array of plugin.tx\_flipit may have not any effect, if configuration was copied before to tt\_content.uploads.20.itemRendering. It is recommended to configure tt\_content.uploads.20.itemRendering directly.

Property:	Data type:	Description:
constant_editor	array	Configuration taken from the constant editor.  Example:  plugin.tx_flipit {     // Configuration by the Constant Editor (extended)
		<pre>constant_editor {     // Category configuration     configuration {         // Please inspect it with the TypoScript Object Browser     }         // Category database     database {         // Please inspect it with the TypoScript Object Browser     } }</pre>
		<pre>// Category fancybox fancybox {     // Please inspect it with the TypoScript Object Browser }     // Category html html {</pre>
		<pre>// Please inspect it with the TypoScript Object Browser }   // Category jquery jquery {   // Please inspect it with the TypoScript Object Browser }</pre>
		<pre>// Category xml xml {     // See 'XML Configuration File' on page 18 above     } }</pre>
master_templates	array	Sorry, no comment.
		<pre>plugin.tx_flipit {     // For tt_content.uploads     master_templates {         // Javascript, A tag and DIV "display:none" for the fancybox.         fancybox {             // Please inspect it with the TypoScript Object Browser         }             // The swf code of Flip it!         flipitSwf {             // Please inspect it with the TypoScript Object Browser         }         // Please copy to tt_content.uploads.20.itemRendering         layout {             // Please inspect it with the TypoScript Object Browser         }     } }</pre>





## tt\_content.uploads.20.itemRendering

If you like to change TypoScript properties, please inspect tt\_content.uploads.20.itemRendering by the TypoScript Object Browser directly.

Property:	Data type:	Description:					
itemRendering	array	Global and local					
		Example:					
		<pre>tt_content.uploads {    20 {      itemRendering &lt; plugin.tx_flipit.master_templates.layout    } }</pre>					





# **SWFTOOLS**

SWFTOOLS itself aren't a TYPO3 extension. It is a software package depending on the operating system of your server.

It is easy to install the SWFTOOLS, but you need root access on your server.

Supported operating systems are Linux and Windows.

## Installation supported by the TYPO3 repository

To avoid that you must browse the internet for the software package, we offers the software within two TYPO3 extensions.

### Linux

If you have a Linux server, please refer to the installation manual at

http://typo3.org/extension-manuals/swftools4linux/current/

If you want download the extension, please use your extension manager or visit

• http://typo3.org/extensions/repository/view/swftools4linux/

### Windows

If you have a Linux server, please refer to the installation manual at

http://typo3.org/extension-manuals/swftools4windows/current/

If you want download the extension, please use your extension manager or visit

http://typo3.org/extensions/repository/view/swftools4windows/





# Use Flip it! without the SWFTOOLS

If you like to convert a PDF document to SWF files manually, you are welcome to use this free servive:

• http://www.codebox.es/pdf-to-flash-page-flip

### Converting from PDF to SWF / Flash files

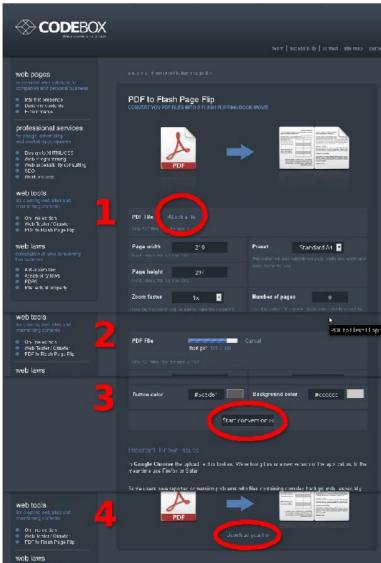


Illustration 18: Converting PDF to XML and SWF

#### Please visit

- http://www.codebox.es/pdf-to-flash-page-flip
- 1. Upload your PDF file. Double click on "Attach a file". Below you can configure some properties.
- 2. Wait a little bit.
- 3. Click [Start coversion>>]
- 4. Click [Download your file]





### Extract the downloaded file




Illustration 19: Tree view

#### Flip it! is interested on

- pageFlip > data > pages.xml
- pageFlip > data > pages > \*.swf

### Adapt the XML file

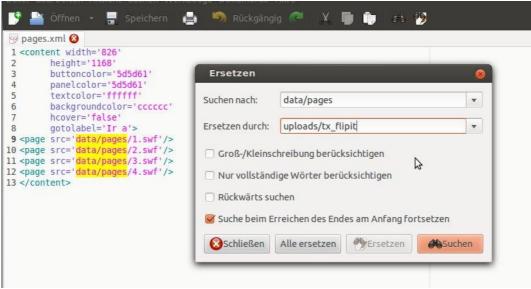


Illustration 20: Converting PDF to XML and SWF

Adapt the XML file to your needs.

Please replace all

data/pages with uploads/tx\_flipit

### Upload the XML file and the SWF files

### XML

Tab [Flip it!] > Files > XML-configuration-file:

### SWF

Tab [Flip it!] > Files > Converted SWF files





# Development

# Integrate Flip it! in your extension!

Sorry, this isn't documented yet.

### The Flash source code

If you like to develop Flash, you will receive the editable Flash code of the page flipping engine here:

http://typo3.org/extensions/repository/view/flipitres/

The extension contains the page flip version 2.1.3.

Sorry, that this code isn't the code of the used book.swf file. We tried to get the book.fla file, but without any success.

book.swf is based on the page flip code. The difference seems to be, that the page flip code doesn't contain a navigation bar.





# **Credits**

# State Development Corporation of Thuringia

Thanks to the German State Development Corporation of Thuringia (Landesentwicklungsgesellschaft Thüringen).

It has contracted the initial release and the most features of Flip it!

http://www.leg-thueringen.de/

### Janis Skarnelis

Thanks Janis Skarnelis who has built the fancybox. See http://fancybox.net/

# Rainer Böhme, De Clarke, Matthias Kramm

Thanks to Rainer Böhme, De Clarke and Matthias Kramm (Maintainer) for developing and maintaining the SWFTOOLS.

See http://www.swftools.org/

## Macc at IpariGrafika and Steve Palmer

Thanks to Macc at IpariGrafika and Steve Palmer for developing the page flipping engine.

See

- http://www.iparigrafika.hu/pageflip
- steve@76design.com

### codebox – webcoders in a box

Thanks to the Spanish agency "codebox – webcoders in a box" http://www.codebox.es

- They offers the service for converting PDF files to XML and SWF.
- They offer the book.swf file with a naivigation bar.





# FAQ

# Is all open source?

Nearby.

### book.swf isn't open source

Nearby means: Flip it! is based on Flash. Flip it! is using book.swf. book.swf enables all catalogue features.

book.swf is delivered by codebox<sup>1</sup>. codebox delivers book.swf only, so Flip it! doesn't contain the editable book.fla.

It isn't possible to edit book.swf and it isn't possible to develop the used catalogue software. But it is possible to develop the used page flipping engine. See "The Flash source code" on page 34 above.

## Why fancybox and not fancyBox 2?

### fancybox

The fancybox is licensed under both MIT and GPL licenses. You may use it without any restriction nearby.

### fancyBox 2

The fancybox 2 is licensed under the Creative Commons Attribution-NonCommercial 3.0 license. You are free to use the fancyBox 2 for

- your personal or
- · non-profit website projects.

For a commercial use you have to pay a fee. See http://sites.fastspring.com/fancyapps/product/store

If you like, you can use Flip it! with the fancyBox 2 too. But it would be your job, to include the library.





# **Further Information**

# Other extensions published by Die Netzmacher

- autositemap: A smart site-map optimised for the footer. It groups menus in columns. Great menus will get two columns. Configuration is based on TypoScript HMENU. http://typo3.org/extensions/repository/view/autositemap/
- Browser TYPO3 without PHP. Develop your TYPO3 extension 8 times faster! You need 1 line TypoScript for a result list with a search form, a record browser and an index browser. Images are wrapped self-acting. SEO, Search Engine Optimization, is integrated. http://typo3.org/extensions/repository/view/browser/
- If Ip it! offers lovely and smooth page flip transitions. It enables you to run over pages in PDF documents like in a real magazine. It is based on flash. Flipt it! can convert PDF documents to swf files automatically. http://typo3.org/extensions/repository/view/flipit/
- Green Cars (Grüne Autos) Database optimized for ecological cars. It is a case study and demonstrates, how to get a complex database with the browser (see above) in three hours only. http://typo3.org/extensions/repository/view/green\_cars/
- Jobmarket is a catalogue with job offers. Views, the a-z-browser, the page-browser, the search, social bookmarks and a lot of other stuff can configured by the Browser plugin with the mouse. Job Market hasn't any PHP code, it should be easy to adapt it to your needs. http://typo3.org/extensions/repository/view/job\_market/
- Majordomo: For subcribing to and unsubscribing from a majordomo mailing list. http://typo3.org/extensions/repository/view/majordomo/
- Organiser provides a lot of features for handle news, events, staff, headquarters, locations, repertoire, workshops and a calendar. Sell your online tickets! Available from April of 2011 http://typo3-organiser.de/
- Quick Shop (extkey: quick\_shop): The fastest shop in the history of TYPO3. Install it with one mouse click only! Quick Shop is based on the browser (see above) and powermail. http://typo3-quick-shop.de/
- PDF Controller: Easy to install. Add to your HTML page the PDF-controller-button. Link from the button to the controller. Adjust the controller by mouseclicks. The PDF Controller supports CSS 3. http://typo3-pdfcontroller.de/
- seo\_dynamic\_tag: Search Engine Optimisation. You can generate values dynamically with this extension especially for the <title>-tag, for the <meta>-tag description and the <meta>-tag keywords. http://typo3.org/extensions/repository/view/seo\_dynamic\_tag/
- TSconfig Pages and Users by extManager (extkey: tsconf): Configure the the eight most commonly used TSconfig porperties with the mouse like page tree uids, activated extended view, activated clipboard, ... http://typo3.org/extensions/repository/view/tsconf/
- tt\_news select configuration (extkey: ttnews\_selectconf) enables to select tt\_news by any SQL clause. The
  extension adds an andWhere clause to the SQL query of the tt\_news plugin.
  http://typo3.org/extensions/repository/view/ttnews\_selectconf/
- Wine Catalogue provides a data base for wine with regions, wineries, styles, variety and ageing among others. It is localized. English, German and Spanish ist of the box. Wine based on the extension browser (see above). http://typo3.org/extensions/repository/view/wine/





# **Known Bugs**

# Delayed pages

Sometimes pages will displayed delayed. If you are waiting from one to three seconds, the pages will displayed and everything is proper.

It seems, that the delaying effect is caused by the computer of the visitor and has nothing with the performance of the server.







# **Illustration Index**

VTYP03

Illustration 1: Thumbnail	
Illustration 2: Run over pages like in a real magazine. Flip it! application in the fancybox	3
Illustration 3: Run over pages like in a real magazine. Flip it! application without a fancybox	4
Illustration 4: Flip it! extends the tt_content table with some fields	
Illustration 5: Flip it! evaluates needed and optional requirements	8
Illustration 6: Page Flip it! with the TypoScript template	9
Illustration 7: Page Flip it! with a content element [File Links]	
Illustration 8: The tab [Flip it!] checks the requirements	10
Illustration 9: Thumbnail	13
Illustration 10: Flip it! within the fancybox	13
Illustration 11: Download link	14
Illustration 12: Layout 3	14
Illustration 13: TypoScript template for a case without a fancybox	15
Illustration 14: Flip it! without the fancybox	15
Illustration 15: Enabling the Development Reporting System	22
Illustration 16: The DRS report enables you to follow the work-flow of Flip it!	23
Illustration 17: In case of JavaScript errors, Firebug will prompt it	
Illustration 18: Converting PDF to XML and SWF	32
Illustration 19: Tree view	33
Illustration 20: Converting PDF to XML and SWE	33



# **Change Log**

						_
1	$\sim$	.3		4-		ual
		- ۲		из	101	ıızı

\* #i0003: Initial release of the manual

#### 1.0.2 Feature

\* #i0002: Include static template for "without fancybox"

### **Improvements**

\* #i0001: Don't offer an include static template for TYPO3 < 4.7

#### 1.0.1 **Improvement**

\* #i0005: Porperty enabled is removed

#### **Features**

\* #i0004: Flexform got property "Plugin check"

\* #i0003: Palettes for the flexform

### 1.0.0 Feature

\* #44896: Interface for third party extensions

### **Improvement**

\* #44395: AJAX page object for fancybox is removed

### 0.0.5 **Bugfix**

\* #i0002: includeLibs.tx\_browser\_cssstyledcontent -> includeLibs.tx\_flipit\_cssstyledcontent

### 0.0.4 **Improvement**

\* #i0001: Windows-Server

### 0.0.3 **Development**

\* #44395: AJAX page object for fancybox

### 0.0.1: Initial release