

EXT: GH Random Content

Extension Key: gh_randomcontent

Language: en

Keywords: forEditors, forAdmins

Copyright 2008-2010, Gregor Hermens, <gregor.hermens@a-mazing.de>

This document is published under the Open Content License available from http://www.opencontent.org/opl.shtml

The content of this document is related to TYPO3

- a GNU/GPL CMS/Framework available from www.typo3.org



Table of Contents

| XT: GH Random Content | 1 |
|--|----|
| Introduction | |
| What does it do? | .3 |
| Screenshots | .3 |
| Users manual | 4 |
| Setting up a random content element and its content repository | |

| Administration | 5 |
|----------------|---|
| Configuration | 6 |
| Reference | 6 |
| Examples | 6 |
| Known problems | 7 |
| To-Do list | 8 |
| Changel og | Q |




Introduction

What does it do?

One or more content elements are choosen by random from one or more selected pages. This can be helpful for applications like random quotes, fortune cookies, ...

Screenshots

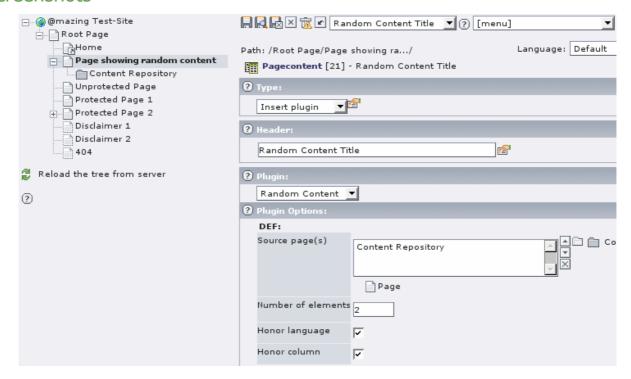



Users manual

Setting up a random content element and its content repository

- 1. Insert a content element of type "General Plugin" into your page.
- 2. Choose "Random Content" as plugin type.
- 3. Choose one or more pages as a source for the random content elements.
- 4. Enter the number of content elements to be shown.
- 5. Check the "Honor language" box to only use content elements of the current FE language.
- 6. Check the "Honor Column" box to only use content elements of the same content column as the plugin itself.



Administration

- Install gh_randomcontent via the extension manager.
- Include the extensions static template into your TS template.



Configuration

Reference

| Property: | Data type: | Description: | Default: |
|---------------|----------------|---|---|
| pages | int+ / list | IDs of the pages, where the content is stored. | 0 |
| count | int+ | Number of content elements to show. | 1 |
| honorLanguage | boolean | If set, only content elements with the actual sys_language_uid are considered. | 0 |
| honorColPos | boolean | If set, only content elements with the same column setting like the plugin itself are considered. | 0 |
| defaultColPos | int+ | Default column if plugin is included in the TypoScript setup. | 0 |
| elementWrap | wrap / stdWrap | Wraps each single content element. | 1 |
| allWrap | wrap / stdWrap | Wraps the whole output of the plugin. | <div class="tx- ghrandomcontent -pi1"> </div> |

[tsref:plugin.tx_ghrandomcontent_pi1]

You can use the Constant Editor to change these settings.

Examples

You can include the plugin directly in your TS setup:

```
plugin.tx_ghrandomcontent_pi1 {
    pages = 12,15
    count = 1
    honorLanguage = 1
    honorColPos = 1
    defaultColPos = 0
}
...
page.10 < plugin.tx_ghrandomcontent_pi1</pre>
```

Change the output using stdWrap properties

```
plugin.tx_ghrandomcontent_pi1 {
  elementWrap = |
  elementWrap {
    stripHtml = 1
    crop = 100|...|1
  }
  allWrap = |
}
```



Known problems

– None

Please report bugs and feature requests on forge: http://forge.typo3.org/projects/extension-gh_randomcontent/issues



To-Do list

Please report bugs and feature requests on forge: http://forge.typo3.org/projects/extension-gh_randomcontent/issues



ChangeLog

See EXT:gh_randomContent/changeLog for details.