

EXT: Hype Error

Extension Key: hype_error

Language: en

Version: 1.0.0

Keywords: error, 404, http header, page not found

Copyright 2012, Thomas "Thasmo" Deinhamer, <thasmo@gmail.com>

This document is published under the Open Content License
available from <http://www.opencontent.org/opl.shtml>

The content of this document is related to TYPO3
- a GNU/GPL CMS/Framework available from www.typo3.org

Table of Contents


| | |
|------------------------------|----------|
| EXT: Hype Error..... | 1 |
| Introduction..... | 3 |
| What does it do?..... | 3 |
| Screenshots..... | 3 |
| Users manual..... | 4 |
| Administration..... | 5 |
| Installation..... | 5 |
| Configuration..... | 6 |
| Extension configuration..... | 6 |
| Known problems..... | 7 |

Introduction

What does it do?

Hype Error extends the domain record to define an error page for 404 errors. The page will be shown if a non-existing page is called. Additionally notifications can be configured to be sent, if the 404 error page is called. There's also a simple frontend plugin which can be inserted in the 404 error page to display an appropriate message to the user.

Screenshots

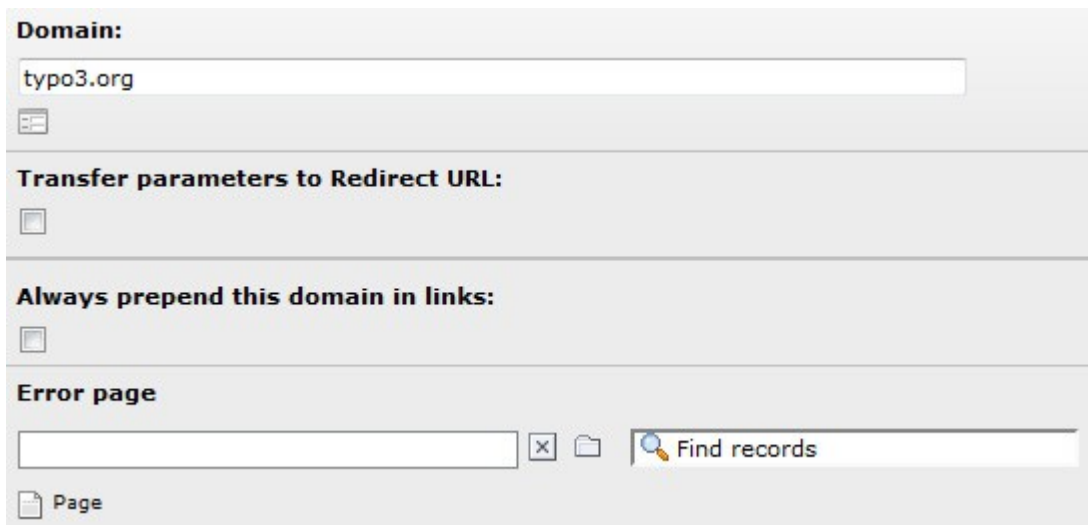

The screenshot shows the configuration interface for the Hype Error extension in TYPO3. It consists of several sections:

- Domain:** A text input field containing "typo3.org" and a small icon to its left.
- Transfer parameters to Redirect URL:** A checkbox that is currently unchecked.
- Always prepend this domain in links:** A checkbox that is currently unchecked.
- Error page:** A section containing a text input field, a close button (X), a folder icon, and a search button labeled "Find records" with a magnifying glass icon.
- At the bottom left, there is a document icon and the label "Page".

Users manual

Open a domain record, define an error page and save it. On the error page you can define custom content and/or add the frontend plugin which shows a simple error message to the user.

Administration

Installation

1. Import and install the extension.
2. Adapt the configuration to your needs.

Configuration

Configuration is done completely via the extension manager. TypoScript configuration is not yet available. All settings apply to all domains of the TYPO3 instance.

Extension configuration

| Property: | Data type: | Description: | Default: |
|--------------------------|------------|--|----------|
| logErrors | boolean | Enable logging of 404 errors. | 1 |
| logWithReferrerOnly | boolean | Only log 404 errors for requests containing a referrer. | 1 |
| groupByPathOnly | boolean | Group errors only by their path, skip query string. | 1 |
| useDomainPid | boolean | Use the domain page to store 404 errors, if available. | 1 |
| overrideHeader | boolean | Override 50x system errors with a 404 status response header. | 0 |
| sendNotification | boolean | Send e-mail notifications on 404 errors. | 0 |
| notificationThreshold | integer | After this amount of 404 errors on the same URL, notifications will be sent. | 25 |
| notificationInterval | integer | Interval after a new notification for 404 errors on the same URL will be sent. | 100 |
| notificationEmailAddress | string | Recipient of notification emails for 404 errors. | |
| ignoredResources | string | CSV list of resources not triggering notifications. | |

Known problems

Please report any problems on the [forge](#).