

## EXT: UniversalFormhandler

Extension Key: mailformplusplus

Language: en

Copyright 2008, Dev-Team Typoheads, <dev@typoheads.at>

This document is published under the Open Content License  
available from <http://www.opencontent.org/opl.shtml>

The content of this document is related to TYPO3  
- a GNU/GPL CMS/Framework available from [www.typo3.org](http://www.typo3.org)

# Table of Contents

|                                                              |           |  |  |
|--------------------------------------------------------------|-----------|--|--|
| <b>EXT: UniversalFormhandler.....</b>                        | <b>1</b>  |  |  |
| <b>Introduction.....</b>                                     | <b>3</b>  |  |  |
| What does it do?.....                                        | 3         |  |  |
| Features.....                                                | 3         |  |  |
| Goals.....                                                   | 3         |  |  |
| Comparison to th_mailformplus.....                           | 4         |  |  |
| Screenshots.....                                             | 5         |  |  |
| <b>Users manual.....</b>                                     | <b>7</b>  |  |  |
| Create template.....                                         | 7         |  |  |
| Create translation file.....                                 | 7         |  |  |
| Create a Plugin Record.....                                  | 7         |  |  |
| Create a TypoScript setup.....                               | 7         |  |  |
| Include static.....                                          | 7         |  |  |
| FAQ.....                                                     | 7         |  |  |
| <b>Administration.....</b>                                   | <b>8</b>  |  |  |
| How does this extension work?.....                           | 8         |  |  |
| <b>Configuration.....</b>                                    | <b>9</b>  |  |  |
| Reference.....                                               | 9         |  |  |
| General Options.....                                         | 9         |  |  |
| Loggers.....                                                 | 11        |  |  |
| PreProcessors.....                                           | 12        |  |  |
| PreProcessor_LoadDefaultValues.....                          | 12        |  |  |
| Interceptors.....                                            | 13        |  |  |
| Interceptor_RemoveXSS.....                                   | 13        |  |  |
| Interceptor_Filtreatment.....                                | 13        |  |  |
| Interceptor_IPBlocking.....                                  | 13        |  |  |
| Interceptor_ParseValues.....                                 | 14        |  |  |
| Validators.....                                              | 14        |  |  |
| Finishers.....                                               | 15        |  |  |
| Finisher_ClearCache.....                                     | 16        |  |  |
| Finisher_Redirect.....                                       | 16        |  |  |
| Finisher_StoreUploadedFiles.....                             | 16        |  |  |
| Finisher_Confirmation.....                                   | 17        |  |  |
| Finisher_DB.....                                             | 18        |  |  |
| Finisher_DifferentDB.....                                    | 19        |  |  |
| Finisher_Mail.....                                           | 20        |  |  |
| Frontend Listing.....                                        | 21        |  |  |
| Available error checks.....                                  | 21        |  |  |
| Example.....                                                 | 23        |  |  |
| Available subparts to use in the template.....               | 23        |  |  |
| Available markers to use in subparts.....                    | 24        |  |  |
| <b>Tutorial.....</b>                                         | <b>26</b> |  |  |
| How to set up a simple form.....                             | 26        |  |  |
| How to set up an advanced form.....                          | 26        |  |  |
| How to use predefined forms.....                             | 26        |  |  |
| How to set up a multistep form.....                          | 26        |  |  |
| How to set up a multistep form with conditions.....          | 27        |  |  |
| How to set up spam protection.....                           | 27        |  |  |
| Enable captcha for your form.....                            | 27        |  |  |
| Enable sr_freecap for your form.....                         | 27        |  |  |
| Enable jm_recaptcha for your form.....                       | 28        |  |  |
| Enable mathGuard for your form.....                          | 28        |  |  |
| How to set up error checks.....                              | 29        |  |  |
| Use ###is_error### markers.....                              | 29        |  |  |
| How to fill your own markers via TypoScript.....             | 29        |  |  |
| How to hide unfilled form field values in templates.....     | 30        |  |  |
| How to set up multi language forms.....                      | 31        |  |  |
| How to load data from DB to use in Finisher_DB.....          | 31        |  |  |
| How to use HTML as PDF template.....                         | 32        |  |  |
| How to upgrade from th_mailformplus to Mailformplus MVC..... | 32        |  |  |
| <b>Known problems.....</b>                                   | <b>34</b> |  |  |
| <b>To-Do list.....</b>                                       | <b>35</b> |  |  |
| <b>ChangeLog.....</b>                                        | <b>36</b> |  |  |

# Introduction

This extension was initially developed by Reinhard Führicht for Typoheads ([www.typoheads.at](http://www.typoheads.at)). After the initial upload to Forge, the development team got enriched by Fabien Udriot and Johannes Feustel. If you want to participate, report bugs or demand additional features please use the possibilities of Forge ([forge.typo3.org](http://forge.typo3.org)).

If you like this extension and want to encourage development of new features, feel free to write an email to [office\(at\)typoheads.at](mailto:office(at)typoheads.at) to receive details about donation process.

## What does it do?

When you reach the limits of the standard mailform functionality of TYPO3 (especially when you want the form to look special) you can use this extension to use your conventional HTML-forms (as HTML-snippets) with full mailform functionality.

This extension is considered as the follow-up to th\_mailformplus, including nearly all the features of th\_mailformplus and many more new features having a completely new architecture and code. The result is a very flexible approach to form handling.

The new architecture and TypoScript configuration makes it possible to easily control the processing of the form by adding an infinite number of validators and interceptors to filter form input. After successful form submission you can add special interceptors to sanitize input values for final processing in the so called “finishers”. Finishers are used to save data into DB, send emails, redirect to another page, etc. Have a look at the available classes described in this manual. If you miss a feature, you can easily write your own class and plug it into MailformPlus MVC processing. After having read the manual and looked into the code documentation, you will see how your own classes can be integrated into MailformPlus MVC.

Please visit the extension's section on forge to post feature requests or report bugs.

<http://forge.typo3.org/projects/show/extension-mailformplusplus>

**Note** This extension requires PHP 5.2 or higher and the extension “gimmefive” from Jochen Rau.

## Features

- HTML-Template based
- Server side error checks
- Send submitted values as e-mail
- Redirect to a page after successful submission
- Store submitted data in DB
- Captcha support (captcha, sr\_freecap, jm\_recaptcha, mathguard, wt\_calculating\_captcha)
- Multipage forms
- HTML mails, plain text mails, multipart mails (HTML+plain)
- File upload handling
- Multipage forms with conditions (branches)
- Frontend listing of submitted data
- Frontend multilanguage support
- Backend module to manage and export submitted data (PDF,CSV)
- ...

## Goals

This extension's architecture is designed to be as modular as possible making it easy to perform changes and add new features. As every form needs different configuration than another form, there are many different “blocks” which can be stuck together fulfilling almost all needs.

## Comparison to th\_mailformplus


Mailformplus MVC is considered a follow-up to th\_mailformplus. th\_mailformplus has started with a very basic feature set and has grown to a huge extension over the years. The code got kind of unmaintainable and it was time to change the architecture to be quicker spotting and fixing bugs and to offer a whole new experience of flexibility. For a guide on how to upgrade TypoScript configuration from th\_mailformplus to Mailformplus MVC have a look at the section “How to upgrade from th\_mailformplus to Mailformplus MVC”.

First of all Mailformplus MVC has a more up-to-date architecture, which allows a more modular approach having different classes for different tasks. Another advantage of this architecture is a smaller code base making updates and adding of additional features much less time consuming.


Compared to th\_mailformplus Mailformplus MVC offers much more flexibility. The modular approach allows the user to add an infinite number of either predefined or self written classes to processing (PreProcessors, Interceptors, Validators, Finishers). When you are not satisfied with the features Mailformplus MVC has to offer, you can easily write your own class and add it to the rendering process without changing a single line in the PHP code of Mailformplus MVC.

Have a look at the section “How does this extension work?” and the TypoScript configuration options. For a more practical way of explanation, have a look at the “How to ...” sections at the end of the manual or the folder “Examples” in the extension directory.

## Screenshots

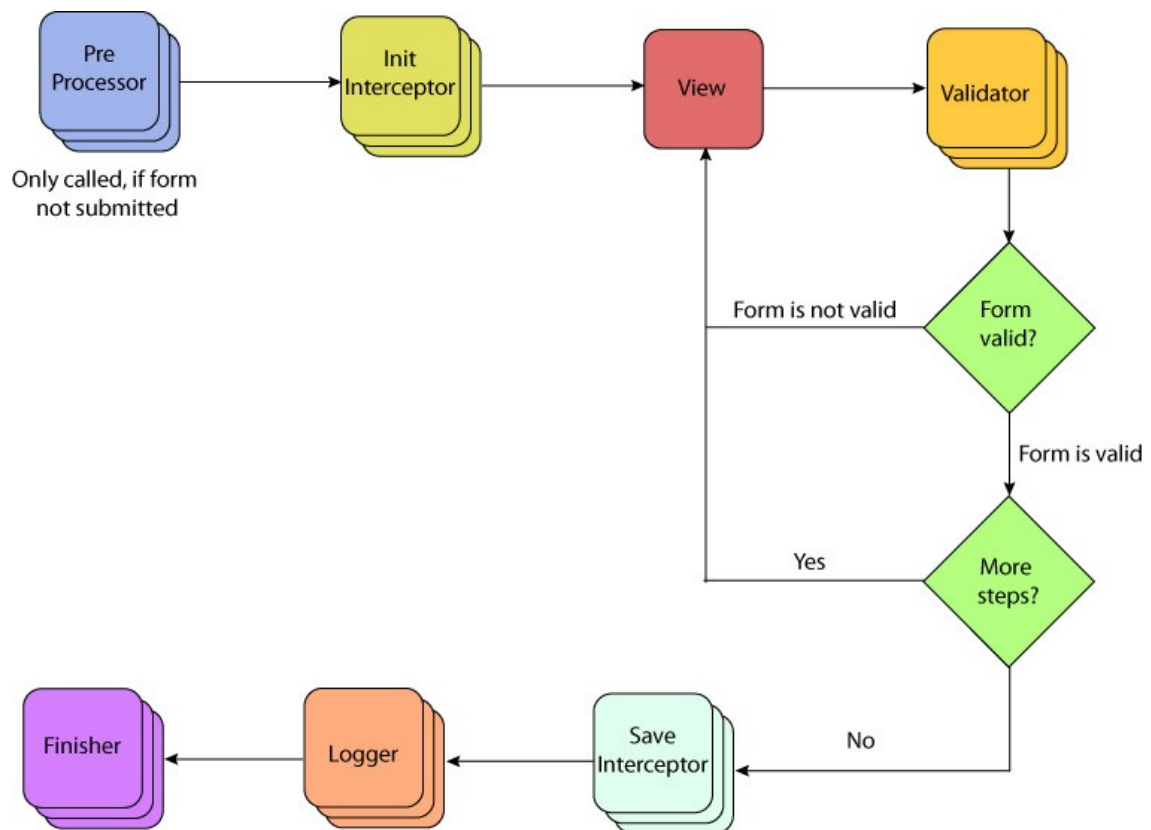

This is how MailformPlusPlus works. Quite simple, isn't it? For more information about the rendering process have a look at the section "How does this extension work?".

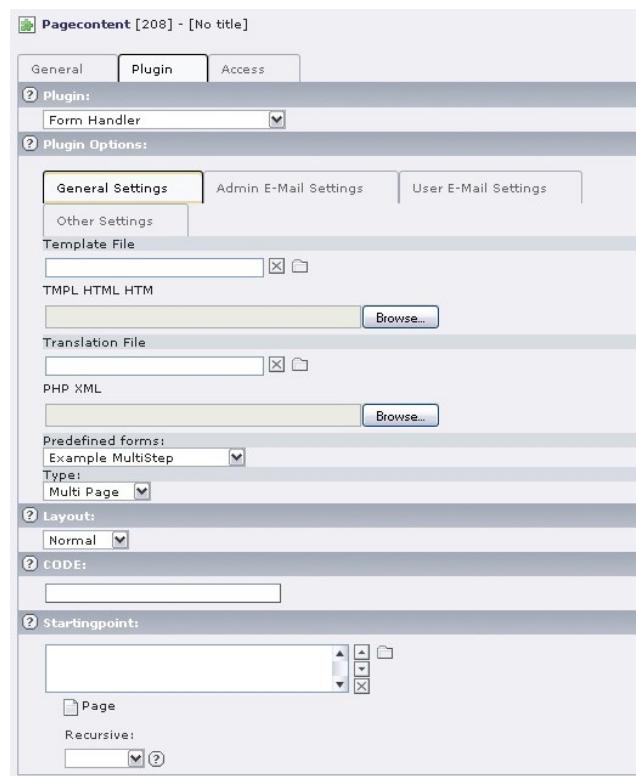

The Plugin view of MailformPlusPlus. The user can choose a template file and a translation file. Furthermore the user can enter settings for E-mail submission and redirection.

Personal Information

Firstname \*

Lastname \*

E-Mail \*

Browse...

Upload file now

Minimum size: 20000  
Maximum size: 100000  
Allowed types: jpg,gif  
0/2  
2 files left to upload

Files:

Interests \*

Sports

Music

Science

Cars

☐

☐

☐

☐

Contact via \*

E-mail

Phone

☐

☐

Fields marked with \* are required!

Send

A form generated with MailformPlusPlus having file uploads handling and error checks.

# Users manual

## Create template

To create a form using MailformPlusPlus you will first have to write a HTML template file containing the code of your form. You will have to follow certain rules, so that MailformPlusPlus will be able to detect the suitable subparts for each situation. For an overview of how to create a form template have a look at the sections "How to create a form template" and "Available markers" or check the demo templates located at EXT:mailformplusplus/Examples/

## Create translation file

In order to use error messages for your fields and to be able to use multilanguage labels, you have to write a translation file. We decided to make translation files kind of obligatory because it's just nicer. So if you want your form to be fully functional, we recommend to use a translation file. A little tutorial on how to use those translations is in section "How to set up multilanguage forms".

## Create a Plugin Record

Create a new page and create a content element. Choose type "General plugin". In the section "Plugin" now choose "MailFormPlusPlus" as plugin type. Now you are able to select your template file and translation file as well as setting options for e-mail sending, basic "required" error checks and a redirect page after successful submission of the form. When creating a new record, the default predefined form is selected. To add your own predefined form, you should add a new TypoScript template.



Enter your options and save.

## Create a TypoScript setup

If you want to use the whole power of MailformPlusPlus you should use TypoScript to configure your form. Many different examples are available at EXT:mailformplusplus/Examples/

Tips and tricks: It is sometimes more convenient to edit the TypoScript in an external file. This is particularly true for big typoscript chunk. To do this, insert in a suitable typoscript template (can be the root or a local TS template):

```
<INCLUDE_TYPOSCRIPT: source="FILE:fileadmin/templates/mailform/setup.ts">
```

Then, you could add this line to your user profile / group to avoid clearing the cache all the time.

```
admPanel.override.tsdebug.forceTemplateParsing = 1
```

## Include static

Don't forget to include the MailformPlusPlus static setup in your root template!

## FAQ

- Feel free to contribute on <http://forge.typo3.org/projects/extension-mailformplusplus/issues>

# Administration

Not much to say here. Have a look at the sections “Available subparts to use”, “Available markers to use”, the TypoScript reference and the available error checks and you will be fine.

For better understanding the rendering process of this extension will be explained in more detail.

## How does this extension work?

The process of rendering a form got simplified to the following simple tasks:

- Preprocessing:  
Do some work before the form is shown, when the page is loaded for the first time (no submission took place). This can be used to load default values for fields or other tasks.
- Intercepting:  
Before the form is shown, there may be a need to intercept and do something with the previously entered data. Mailformplus MVC uses this for doing XSS checks. Mailformplus MVC knows two types of interceptors, InitInterceptors and SaveInterceptors. InitInterceptors are called everytime before the form is shown, SaveInterceptors are called when the form got submitted successfully right before the Finishers are called.
- Validating:  
After form submission there has to be a possibility to validate the input.
- Finishing  
After successful form submission there may be several tasks to perform, such as saving the input data to database or sending emails.

Any of these mentioned tasks can take more than one class that are called seperately.

A little example:

```
finishers {
  1 {
    class = Finisher_DB
    config {
      ...
    }
  }
  2 {
    class = Finisher_Mail
    config {
      ...
    }
  }
  3 {
    class = Finisher_Redirect
    config {
      ...
    }
  }
}
```

As you see, there are several Finishers defined, which perform different tasks. It is kind of a Finisher chain, so that any number of tasks can be performed. The first Finisher will store the submitted data into a defined database table, the second will send emails to users or administrators, the third will redirect to another page. The idea of creating chains of classes is also possible for PreProcessors, Interceptors and Validators.



# Configuration

## Reference

Important Note:

MailformPlusPlus requires to enter class names of components to perform different tasks.

Example:

```
finishers.1.class = F3_MailformPlusPlus_Finisher_Mail
```

To make the usage easier, it is not needed to prefix the classes with F3\_MailformPlusPlus\_ in TypoScript:

```
finishers.1.class = Finisher_Mail
```

## General Options

| Property:                             | Datatype:         | Description:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Default:                               |
|---------------------------------------|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| templateFile                          | String/ TS object | Path to templatefile or templatecode                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                        |
| languageFile                          | String/ TS object | Path to languagefile or languagecode                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                        |
| stylesheetFile                        | String            | Path to stylesheetfile                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                        |
| formValuesPrefix                      | String            | Enter a prefix of the form values. MailformPlusPlus will then only process fields named like prefix[fieldname] in the HTML template, but lets you enter the fieldnames in config without the prefix. Avoid disturbances with other extensions by prefixing your form fields.                                                                                                                                                                                                                  |                                        |
| view                                  | String            | Classname of the view to be used                                                                                                                                                                                                                                                                                                                                                                                                                                                              | F3_MailformPlusPlus_View_Default       |
| controller                            | String            | Classname of the controller to be used                                                                                                                                                                                                                                                                                                                                                                                                                                                        | F3_MailformPlusPlus_Controller_Default |
| formValuesPrefix                      | String            | Prefix of form fields. Use this if you use a prefix for your forms to avoid conflicts with other plugins. Settings this option you will be able to use only the fieldname in all markers and do not need to add prefix.<br><br>NOTE: It is highly recommended to use this setting!<br><br>Example:<br><br><input type="text" name="mailformplusplus[email]" value="###value_email###" /><br><br>If you do not set formValuesPrefix, you will not be able to use the marker ###value_email###. |                                        |
| debug                                 | Boolean (0,1)     | Toggle debug mode, which will print debug messages to screen                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0                                      |
| storeGP                               | Boolean (0,1)     | If set, stores the GET / POST variables in the session. May be useful for using those values on another page. Automatically runs Finisher_StoreGP.                                                                                                                                                                                                                                                                                                                                            | 0                                      |
| requiredSign                          | String            | Enter some text which will be used to substitute markers like ###required_[fieldname]###.                                                                                                                                                                                                                                                                                                                                                                                                     | *                                      |
| singleErrorTemplate.totalWrap         | wrap              | Enter something to be wrapped around the error messages of a single form field.                                                                                                                                                                                                                                                                                                                                                                                                               |                                        |
| singleErrorTemplate.singleWrap        | wrap              | Enter something to be wrapped around each error message of a single form field.                                                                                                                                                                                                                                                                                                                                                                                                               |                                        |
| singleErrorTemplate.addDefaultMessage | Boolean           | Adds the error message found in 'error_[fieldname]' in the languagefile at any time.                                                                                                                                                                                                                                                                                                                                                                                                          |                                        |
| errorListTemplate.totalWrap           | wrap              | Enter something to be wrapped around the error message list of all form fields.                                                                                                                                                                                                                                                                                                                                                                                                               |                                        |
| errorListTemplate.singleWrap          | wrap              | Enter something to be wrapped around the error messages of a single form field in the list of all form fields.                                                                                                                                                                                                                                                                                                                                                                                |                                        |

| Property:                           | Datatype:     | Description:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Default:                     |
|-------------------------------------|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|
| singleFileMarkerTemplate.totalWrap  | wrap          | Enter something to be wrapped around the full list of filenames in a file marker for a single form field.                                                                                                                                                                                                                                                                                                                                                                                                                        |                              |
| singleFileMarkerTemplate.singleWrap | wrap          | Enter something to be wrapped around each filename in a file marker for a single form field.                                                                                                                                                                                                                                                                                                                                                                                                                                     |                              |
| totalFilesMarkerTemplate.totalWrap  | wrap          | Enter something to be wrapped around the full list of filenames in a file marker for all form fields.                                                                                                                                                                                                                                                                                                                                                                                                                            |                              |
| totalFilesMarkerTemplate.singleWrap | wrap          | Enter something to be wrapped around each filename in a file marker for all form fields.                                                                                                                                                                                                                                                                                                                                                                                                                                         |                              |
| files.clearTempFilesOlderThanHours  | int           | Everytime the form gets displayed, MailformPlusPlus will look for files older than given time in this setting in the upload folder and delete them.                                                                                                                                                                                                                                                                                                                                                                              |                              |
| files.uploadFolder                  | String        | Path to a custom upload folder                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | uploads/mailformplusplus/tmp |
| files.enableAjaxFileRemoval         | Boolean (0/1) | Adds a remove link to every filename in <code>###[fieldname]_uploadedFiles###</code> and <code>###total_uploadedFiles###</code> . Unfortunately other markers like <code>###[fieldname]_fileCount###</code> will not be updated at the moment.                                                                                                                                                                                                                                                                                   |                              |
| markers.[markername]                | mixed         | Define your own custom markers and fill them using TypoScript.                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                              |
| fancyForm                           |               | <p>Experimental:</p> <p>This setting replaces all checkboxes and radiobuttons with graphics to make them look cooler.</p> <p>Enter the ID of the enclosing form element or any other element to make the changes only affect this form.</p> <p>Usage:</p> <pre>fancyForm = 1 fancyForm.parentId = contact_form</pre>                                                                                                                                                                                                             |                              |
| autoComplete                        |               | <p>Experimental:</p> <p>This setting shows a dropdown list with suggestion words when the user types. Enter a list of fields to add a suggestion box. For each field enter the ID of the field and a list of words. This list can also be a TypoScript object.</p> <p>Usage:</p> <pre>autoComplete {     1 {         fieldId = firstname         values = USER         values.userFunc = user_myClass-&gt;user_getSuggestionWords     }     2 {         fieldId = lastname         values = typo, typoheads, typo3     } }</pre> |                              |
| checkBoxFields                      | String        | <p>Comma separated list of field names which contain checkbox values. This is needed for multipage forms in order to ensure correct submission of these values from step to step. Please enter all checkbox field names in here. Set this option per step.</p> <p>Example:</p> <pre>plugin.F3_MailformPlusPlus.settings {     # Checkbox fields in step 1     1.checkBoxFields = interests, hobbies      # Checkbox fields in step 2     2.checkBoxFields = work_experience, accounts }</pre>                                    |                              |

| Property:         | Datatype:        | Description:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Default: |
|-------------------|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| radioButtonFields | String           | <p>Comma separated list of field names which contain radio button values. This is needed for multipage forms in order to ensure correct submission of these values from step to step. Please enter all radio button field names in here. Set this option per step.</p> <p>Example:</p> <pre>plugin.F3_MailformPlusPlus.settings {     # Radiobutton fields in step 1     1.radioButtonFields = contact_via      # Radiobutton fields in step 2     2.radioButtonFields = receive_gift }</pre>                                                        |          |
| helpTexts         |                  | <p>Experimental:</p> <p>This setting lets help messages appear when the according form field gets the focus. The messages fade out on blur.</p> <p>Usage:</p> <pre>helpTexts {     /*      * css class of the help messages boxes      */     className = contexthelp      /*      * parent id of the form elements      */     parentId = mailformplusplus_contact_form      /*      * how many times to add parent() call for      traversing in DOM tree to get      * to a level to access the help message.      */     parentTimes = 2 }</pre> |          |
| addErrorAnchors   | Boolean<br>(0/1) | If you use <code>###error###</code> and error markers for each field, you can enable this settings to add anchor links to each message in <code>###error###</code> . The anchors will point to the messages in <code>###error_[fieldname]###</code> .                                                                                                                                                                                                                                                                                                |          |
| predef            | Array            | Predefine form settings and make them selectable in plugin record. Have a look at the section "How to use predefined forms"                                                                                                                                                                                                                                                                                                                                                                                                                          |          |
| isErrorMarker     | array            | <p>Configure replacements for <code>###is_error_[fieldname]###</code> markers.</p> <p>Example</p> <pre>plugin.F3_MailformPlusPlus.settings {     isErrorMarker {         global = Global message if an error occurred         (filled into ###is_error###)         field1 = TEXT         field1.value = Some message (filled into         ###is_error_field1###)     } }</pre>                                                                                                                                                                       |          |

[plugin.F3\_MailformPlusPlus.settings]

## Loggers

| Property: | Datatype: | Description:                                                               | Default: |
|-----------|-----------|----------------------------------------------------------------------------|----------|
| x.class   | String    | Enter as many loggers as you like. Each entry requires a class name of the |          |

| Property: | Datatype: | Description:                                                                                                                                                                                                                                                                                   | Default: |
|-----------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| x.config  | Array     | <p>logger. Optional you can enter specific configuration for the logger in the config section.</p> <p>Example:</p> <pre> loggers.1 {     class = F3_MailformPlusPlus_Logger_Default } loggers.2 {     class = F3_MyPackage_Logger     config {         table = tx_mypackage_log     } } </pre> |          |

[plugin.F3\_MailformPlusPlus.settings.loggers]

## PreProcessors

| Property: | Datatype: | Description:                                                                                                                                                                                                                                                     | Default: |
|-----------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| x.class   | String    | Enter as many pre processors as you like. Each entry requires a class name of the pre processor. Optional you can enter specific configuration for the pre processor in the config section. The pre processors are called only the first time the form is shown. |          |
| x.config  | Array     | <p>Example:</p> <pre> preProcessors.1 {     class = F3_MailformPlusPlus_PreProcessor_Default } preProcessors.2 {     class = F3_MyPackage_PreProcessor     config {         param = value     } } </pre>                                                         |          |

[plugin.F3\_MailformPlusPlus.settings.preProcessors]

## PreProcessor\_LoadDefaultValues

Prefills form fields with configured values.

Config is done for each step and for each form field.

Example:

```

preProcessors {
    1.class = F3_MailformPlusPlus_PreProcessor_LoadDefaultValues
    1.config {
        1 {
            title.defaultValue = {$local.mailform.title}
            lastname.defaultValue = Firstname in here
            firstname.defaultValue = TEXT
            firstname.defaultValue.value = Lastname in here
        }
        2 {
            creditcard.defaultValue = Enter your credit card number here
        }
    }
}

```

```

[
    plugin.F3_MailformPlusPlus.settings.preProcessors.x.class = F3_MailformPlusPlus_PreProcessor_LoadDefaultValues
    plugin.F3_MailformPlusPlus.settings.preProcessors.x.config.[x].[fieldname].
]

```

| Property:    | Datatype:                 | Description:                                 | Default: |
|--------------|---------------------------|----------------------------------------------|----------|
| defaultValue | String   TypoScriptObject | Field will be filled with this default value | -        |

## Interceptors

| Property: | Datatype: | Description:                                                                                                                                                                                                                                               | Default: |
|-----------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| x.class   | String    | Enter as many interceptors as you like. Each entry requires a class name of the interceptor. Optional you can enter specific configuration for the interceptor in the config section. The init interceptors are called everytime before the form is shown. |          |
| x.config  | Array     | <p>Example:</p> <pre> initInterceptors.1 {     class = F3_MailformPlusPlus_Interceptor_RemoveXSS } initInterceptors.2 {     class = F3_MyPackage_Interceptor     config {         param = value     } } </pre>                                             |          |

[plugin.F3\_MailformPlusPlus.settings.initInterceptors]

| Property: | Datatype: | Description:                                                                                                                                                                                                                                              | Default: |
|-----------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| x.class   | String    | Enter as many interceptors as you like. Each entry requires a class name of the interceptor. Optional you can enter specific configuration for the interceptor in the config section. The save interceptors are called before the finishers are executed. |          |
| x.config  | Array     | <p>Example:</p> <pre> saveInterceptors.1 {     class = F3_MailformPlusPlus_Interceptor_Default } saveInterceptors.2 {     class = F3_MyPackage_Interceptor     config {         param = value     } } </pre>                                              |          |

[plugin.F3\_MailformPlusPlus.settings.saveInterceptors]

### Interceptor\_RemoveXSS

Removes malicious code from submitted values to prevent XSS. No further configuration required!

This class experiences some problems with special characters such as German Umlauts.

Example:

```
plugin.F3_MailformPlusPlus.settings.initInterceptors.1.class = F3_MailformPlusPlus_Interceptor_RemoveXSS
```

### Interceptor\_Filtreatment

Removes malicious code from submitted values to prevent XSS. No further configuration required!

In the opinion of the author, this class does a better job than Interceptor\_RemoveXSS.

Example:

```
plugin.F3_MailformPlusPlus.settings.initInterceptors.1.class =
F3_MailformPlusPlus_Interceptor_Filtreatment
```

### Interceptor\_IPBlocking

If you do not want to use Captcha for your form, you can control how often the form is allowed to be submitted by a single IP address or in total with this class.

[

```
plugin.F3_MailformPlusPlus.settings.initInterceptors.x.class =F3_MailformPlusPlus_Interceptor_IPBlocking
plugin.F3_MailformPlusPlus.settings.initInterceptors.x.config.
]
```

| Property:             | Data type: | Description:                                                                                                                                                                                | Default: |
|-----------------------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| redirectPage          | int/string | Page ID or URL to redirect to. If a user is blocked from submitting the form, he gets redirected to this page.                                                                              | -        |
| report                | array      | If a user gets blocked from submitting the form, a report email is sent to the configured recipient.                                                                                        | -        |
| report.email          | string     | Comma separated list of recipients.                                                                                                                                                         |          |
| report.subject        | string     | Subject of the report mail                                                                                                                                                                  |          |
| report.sender         | string     | Email address to be set as sender of the report mail.                                                                                                                                       |          |
| report.interval       | array      | To prevent the recipient of the report mails to get spammed with report mails, you can configure the interval. A report mail will be sent only once during the interval for a single alert. |          |
| report.interval.value | int        | Value                                                                                                                                                                                       |          |
| report.interval.unit  | string     | And unit for the interval. Unit can be seconds, minutes, hours and days                                                                                                                     |          |
| ip                    | array      | Settings for limiting submission for an IP address                                                                                                                                          |          |
| ip.threshold          | int        | The amount of submissions for an IP address in the given period of time                                                                                                                     |          |
| ip.timebase.value     | int        | Value                                                                                                                                                                                       |          |
| ip.timebase.unit      | string     | And unit for the mentioned period of time<br>Unit can be seconds, minutes, hours and days                                                                                                   |          |
| global                | array      | Settings for limiting submissions for a form.<br><br>SAME SETTINGS AS FOR IP.                                                                                                               |          |

### Interceptor\_ParseValues

Parse formatted values. Currently only floats such as "1.022.000,76 EUR". See unittest file for detailed examples. Attention: x.xxx.xxx gets parsed to xxxxxxx but xx.xx to xx.xx.

```
[
plugin.F3_MailformPlusPlus.settings.saveInterceptors.x.class =F3_MailformPlusPlus_Interceptor_ParseValues
plugin.F3_MailformPlusPlus.settings.saveInterceptors.x.config.
]
```

| Property:        | Data type: | Description:                             | Default: |
|------------------|------------|------------------------------------------|----------|
| parseFloatFields | string     | Comma separated list of fields to parse. | -        |

### Validators

| Property: | Data type: | Description:                                                                  | Default: |
|-----------|------------|-------------------------------------------------------------------------------|----------|
| x.class   | String     | Enter as many validators as you like. Each entry requires a class name of the |          |

| Property: | Datatype: | Description:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Default: |
|-----------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| x.config  | Array     | <p>validator. Optional you can enter specific configuration for the validator in the config section. For detailed information about the default validator settings have a look at the section "Available error checks".</p> <p>Example:</p> <pre> validators.1 {     class = F3_MailformPlusPlus_Validator_Default      /*      * Some times you maybe want to disable error checks      if the user      * filled out a specific fields or else.      * Temporary disable error checking for the entered      fields by setting      * this option.      */     disableErrorCheckFields = firstname,lastname     config {         fieldConf {             firstname.errorCheck {                 1 = required                 2 = maxLength                 2.value = 20             }             email.errorCheck {                 1 = required                 2 = email             }         }     } } validators.2 {     class = F3_MyPackage_Validator     config {         param = value     } } </pre> |          |

[plugin.F3\_MailformPlusPlus.settings.validators]

Have a look at the section "Available error checks"

## Finishers

| Property: | Datatype: | Description:                                                                 | Default: |
|-----------|-----------|------------------------------------------------------------------------------|----------|
| x.class   | String    | Enter as many finishers as you like. Each entry requires a class name of the |          |

| Property: | Datatype: | Description:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Default: |
|-----------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| x.config  | Array     | <p>finisher. Optional you can enter specific configuration for the finisher in the config section. For more information about available finishers and their settings have a look at the section "Available finishers".</p> <p>Example:</p> <pre> finishers.1 {   class = F3_MailformPlusPlus_Finisher_Mail   config {     admin {       to_email = rf@typoheads.at       to_name = Reinhard Führicht       subject = Request       sender_email = contactform@mysite.com       replyto_email = email       replyto_name = name     }     user {       to_email = email       to_name = name       subject = ###LLL:user_subject###       sender_email = contactform@mysite.com       sender_name = My Site       replyto_email = contactform@mysite.com     }   } } finishers.2 {   class = F3_MailformPlusPlus_Finisher_Default   config {   } } </pre> |          |

[plugin.F3\_MailformPlusPlus.settings.finishers]

### Finisher\_ClearCache

Clear the cache of the current page. It needs no further configuration.

### Finisher\_Redirect

Redirects to specified page after successful form submission.

```

[
  plugin.F3_MailformPlusPlus.settings.finishers.x.class = F3_MailformPlusPlus_Finisher_Redirect
  plugin.F3_MailformPlusPlus.settings.finishers.x.config
]

```

| Property:          | Datatype:  | Description:                  | Default: |
|--------------------|------------|-------------------------------|----------|
| redirectPage       | int/string | Page ID or URL to redirect to | -        |
| correctRedirectUrl | Int (1/0)  | Replaces '&' with '&' in URL  | 0        |

### Finisher\_StoreUploadedFiles

Moves uploaded files from temporary folder to a new one and renames them if set.

```

[
  plugin.F3_MailformPlusPlus.settings.finishers.x.class = F3_MailformPlusPlus_Finisher_StoreUploadedFiles
  plugin.F3_MailformPlusPlus.settings.finishers.x.config
]

```

| Property:            | Datatype: | Description:                  | Default: |
|----------------------|-----------|-------------------------------|----------|
| finishedUploadFolder | string    | Path where to store the files | -        |



|               |        |                                                                                                                                                                                                                                                                                                                                    |   |
|---------------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| renameScheme  | string | <p>Specify how the files should be renamed.</p> <p>Example:</p> <pre>renameScheme=[pid]_[filename]</pre> <p>Possible options:</p> <p>[pid]=The current page id<br/> [md5]=md5 hash over filename<br/> [time]=The submission time stamp<br/> [filename]=Original Filename<br/> [xxx]=Your own marker defined in "schemeMarkers"</p> | - |
| schemeMarkers | array  | <p>Define your own markers to be used in renamescheme.</p> <p>Example:</p> <pre>renameScheme = [mymarker]_[marker2]_[filename] schemeMarkers {   mymarker=TEXT   mymarker.value=asdf   marker2=fieldValue   marker2.field=field1 }</pre>                                                                                           | - |

### Finisher Confirmation

Shows an overview of submitted data and links to save the data as PDF or CSV. Also shows a print link.

To configure how the output looks like you have to add a special subpart to your HTML template.

Example:

```
<!-- ###TEMPLATE_CONFIRMATION### begin -->
<table>
  <tr>
    <td>###LLL:firstname###</td>
    <td>###value_firstname###</td>
  </tr>
</table>
<div>
  ###PRINT_LINK### / ###PDF_LINK### / ###CSV_LINK###
</div>
<!-- ###TEMPLATE_CONFIRMATION### end -->
```

```
[
plugin.F3_MailformPlusPlus.settings.finishers.x.class = F3_MailformPlusPlus_Finisher_Confirmation
plugin.F3_MailformPlusPlus.settings.finishers.x.config.
]
```

| Property:        | Data type: | Description:                                                                                                                                            | Default:                          |
|------------------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| returns          | Int (1/0)  | MUST be set. Tells the controller that after this finisher, no other finishers can be called!                                                           | -                                 |
| pdf              | array      | Settings for the PDF generation                                                                                                                         | -                                 |
| pdf.class        | string     | The class to handle PDF generation. Except you write your own class, use:<br>F3_MailformPlusPlus_Generator_PDF or<br>F3_MailformPlusPlus_Generator_TCDF | F3_MailformPlusPlus_Generator_PDF |
| pdf.exportFields | string     | Comma separated list of fields to export to PDF.<br><br>Example:<br>firstname,lastname,email                                                            | All submitted fields              |

|                  |           |                                                                                                                |                                   |
|------------------|-----------|----------------------------------------------------------------------------------------------------------------|-----------------------------------|
| pdf.export2file  | Int (1/0) | Saves PDF into a temporary file and redirects to it. If not set, the PDF is kept in memory.                    | 0                                 |
| csv              | array     | Settings for the CSV generation                                                                                |                                   |
| csv.class        | string    | The class to handle CSV generation. Except you write your own class, use:<br>F3_MailformPlusPlus_Generator_CSV | F3_MailformPlusPlus_Generator_CSV |
| csv.exportFields | string    | Comma separated list of fields to export to CSV.<br><br>Example:<br><br>firstname,lastname,email               |                                   |

## Finisher\_DB

Saves submitted values into specified DB table.

```
[
plugin.F3_MailformPlusPlus.settings.finishers.x.class = F3_MailformPlusPlus_Finisher_DB
plugin.F3_MailformPlusPlus.settings.finishers.x.config.
]
```

| Property:                     | Data type: | Description:                                                                                                                                                                                                                                         | Default: |
|-------------------------------|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| table                         | string     | The table name to store the data into                                                                                                                                                                                                                | -        |
| key                           | string     | The field with primary key<br><br>Example:<br>key = uid                                                                                                                                                                                              | uid      |
| updateInsteadOfInsert         | int(1/0)   | Does not store the values as a new row in the table, but tries to update an existing record. Needs a uid set in GET/POST parameters. Add a hidden field named like the value entered in "key" to your form. Don't forget to add the formValuePrefix! | 0        |
| fields                        | array      | Mapping of table fields to submitted values.<br><br>Usage:<br><br>fields {<br>[db_field].mapping = [form_field]<br>}<br><br>Example:<br><br>fields {<br>header.mapping = name<br>}                                                                   |          |
| fields.[db_field].if_is_empty | string     | Define a default value if the user did not enter something in the form field                                                                                                                                                                         |          |
| fields.[db_field].separator   | string     | If the field value is an array (e.g. Checkboxes) you can enter a separator to save the value imploded into DB.                                                                                                                                       | ,        |

|                           |        |                                                                                                                              |  |
|---------------------------|--------|------------------------------------------------------------------------------------------------------------------------------|--|
| fields.[db_field].special | string | There are some special values available:<br><br>sub_datetime<br>sub_tstamp<br>ip<br><br>Should not need further explanation. |  |
|---------------------------|--------|------------------------------------------------------------------------------------------------------------------------------|--|

### Finisher\_DifferentDB

Saves submitted values into specified DB table using a database other than the TYPO3 database.

```
[
plugin.F3_MailformPlusPlus.settings.finishers.x.class = F3_MailformPlusPlus_Finisher_DifferentDB
plugin.F3_MailformPlusPlus.settings.finishers.x.config.
]
```

| Property:                     | Data type: | Description:                                                                                                                                                                                                                                         | Default: |
|-------------------------------|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| host                          | string     | Host of the database                                                                                                                                                                                                                                 |          |
| port                          | string     | Port to use                                                                                                                                                                                                                                          |          |
| db                            | string     | Name of the database                                                                                                                                                                                                                                 |          |
| driver                        | string     | Driver to use<br><br>Example:<br>driver=oci8                                                                                                                                                                                                         |          |
| username                      | string     | Username for DB                                                                                                                                                                                                                                      |          |
| password                      | string     | Password for DB user                                                                                                                                                                                                                                 |          |
| table                         | string     | The table name to store the data into                                                                                                                                                                                                                | -        |
| key                           | string     | The field with primary key<br><br>Example:<br>key=uid                                                                                                                                                                                                | uid      |
| updateInsteadOfInsert         | int(1/0)   | Does not store the values as a new row in the table, but tries to update an existing record. Needs a uid set in GET/POST parameters. Add a hidden field named like the value entered in "key" to your form. Don't forget to add the formValuePrefix! | 0        |
| fields                        | array      | Mapping of table fields to submitted values.<br><br>Usage:<br><br>fields {<br>[db_field].mapping=[form_field]<br>}<br><br>Example:<br><br>fields {<br>header.mapping=name<br>}                                                                       |          |
| fields.[db_field].if_is_empty | string     | Define a default value if the user did not enter something in the form field                                                                                                                                                                         |          |
| fields.[db_field].separator   | string     | If the field value is an array (e.g. Checkboxes) you can enter a separator to save the value imploded into DB.                                                                                                                                       | ,        |

|                           |        |                                                                                                                                       |  |
|---------------------------|--------|---------------------------------------------------------------------------------------------------------------------------------------|--|
| fields.[db_field].special | string | <p>There are some special values available:</p> <p>sub_datetime<br/>sub_tstamp<br/>ip</p> <p>Should not need further explanation.</p> |  |
|---------------------------|--------|---------------------------------------------------------------------------------------------------------------------------------------|--|

### Finisher\_Mail

Sends emails to specified addresses using following subparts in the HTML template:

- TEMPLATE\_EMAIL\_USER\_PLAIN
- TEMPLATE\_EMAIL\_USER\_HTML
- TEMPLATE\_EMAIL\_ADMIN\_PLAIN
- TEMPLATE\_EMAIL\_ADMIN\_HTML

```
[
plugin.F3_MailformPlusPlus.settings.finishers.x.class = F3_MailformPlusPlus_Finisher_Mail
plugin.F3_MailformPlusPlus.settings.finishers.x.config.
]
```

| Property:           | Data type: | Description:                                                                                                                              | Default:  |
|---------------------|------------|-------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| limitMailstoUser    | int        | Limit the amount of mails sent to users. If more addresses are specified than this value, emails are sent only to the first x recipients. | unlimited |
| checkBinaryCrLf     | string     | Comma separated list of fields. Converts chr(13) line breaks to <br/>                                                                     | uid       |
| admin               | array      | Settings for the mail sent to site admin                                                                                                  | -         |
| admin.header        | string     | Manually set the email header. All options can be strings, TypoScript objects or names of form fields.                                    | -         |
| admin.to_email      | string     | Comma separated list of email addresses. Can be addresses or form fields.                                                                 | -         |
| admin.to_name       | string     | Comma separated list of names to the according addresses in to_email. Can be name or form fields.                                         | -         |
| admin.replyto_email | string     | Reply to email address                                                                                                                    | -         |
| admin.replyto_name  | string     | Name of the according replyto_email                                                                                                       | -         |
| admin.sender_email  | string     | Email address to be set as sender of the email. Can be addresses or form fields.                                                          | -         |
| admin.sender_name   | string     | Name of the email sender. Can be name or form fields.                                                                                     | -         |
| admin.subject       | string     | Subject of the email                                                                                                                      |           |
| admin.attachment    | string     | Comma separated list of form fields or file names to be attached to the email.                                                            | -         |
| admin.attachPDF     | array      | Attach the submitted values as PDF                                                                                                        | -         |

|                              |              |                                                                                                                                                                                                                                                                                                           |                                   |
|------------------------------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| admin.attachPDF.class        | string       | Class to handle the PDF generation. Normally this will be F3_MailformPlusPlus_Generator_PDF or F3_MailformPlusPlus_Generator_TCDF                                                                                                                                                                         | F3_MailformPlusPlus_Generator_PDF |
| admin.attachPDF.exportFields | string       | Comma separated list of form fields to export to PDF.                                                                                                                                                                                                                                                     | All submitted fields              |
| admin.htmlEmailAsAttachment  | int(1/0)     | Attach the generated HTML email to the outgoing email                                                                                                                                                                                                                                                     | 0                                 |
| admin.filePrefix             | string array | Set the prefix of the generated PDF and HTML files attached to email. Use this setting as an array to set different prefixes for the two files.<br><br>Example:<br><br>admin.filePrefix = myForm<br><br>or for different prefixes:<br><br>admin.filePrefix {<br>html = myFormHTML<br>pdf = myFormPDF<br>} | mailformplusplus_                 |
| user                         | array        | Settings for the email sent to the user.<br><br>SAME SETTINGS AS FOR ADMIN                                                                                                                                                                                                                                |                                   |

## Frontend Listing

| Property:    | Data type:    | Description:                                                                                                                                                                                                                                                                                                 | Default:                         |
|--------------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| view         | String        | Class name of the view to be used                                                                                                                                                                                                                                                                            | F3_MailformPlusPlus_View_Listing |
| templateFile | String        | Template file to be used                                                                                                                                                                                                                                                                                     |                                  |
| pid          | Integer       | The page ID to select the logged records from.                                                                                                                                                                                                                                                               |                                  |
| table        | String        | The table the logged records are stored in                                                                                                                                                                                                                                                                   |                                  |
| orderby      | String        | Enter an ORDERBY statement<br><br>Example:<br><br>orderby = subheaderDESC                                                                                                                                                                                                                                    |                                  |
| enableDelete | Boolean (0/1) | Enable the deletion of records in Frontend Listing. If set, the marker ###DELETE### will get replaced with a delete link.                                                                                                                                                                                    | 0                                |
| mapping      | Array         | Map db fields to field names to use in markers.<br><br>Example:<br><br>mapping.header = name<br><br>Markers in Template:<br><br>###value_name###<br><br>mapping {<br>header = name<br>bodytext = subject<br>subheader = sub_datetime<br>crdate = sub_tstamp<br>tstamp = sub_tstamp<br>imagecaption = ip<br>} |                                  |

[plugin.F3\_MailformPlusPlus.settings.fe\_listing]

## Available error checks

The default validator offers a variety of predefined error checks for the most common tasks. Here is a list of the checks and how to configure them:

| Check:          | Description:                                                                                | Parameters:           | Datatype:                  |
|-----------------|---------------------------------------------------------------------------------------------|-----------------------|----------------------------|
| required        | Checks if a field is filled out                                                             | none                  | -                          |
| email           | Checks if a field contains a valid email                                                    | none                  | -                          |
| integer         | Checks if a field contains a valid integer value                                            | none                  | -                          |
| float           | Checks if a field contains a valid float value                                              | none                  | -                          |
| containsNone    | Checks if a field contains none of the configured values                                    | words                 | comma<br>seperated         |
| containsOne     | Checks if a field contains at least one of the configured values                            | words                 | comma<br>seperated         |
| containsAll     | Checks if a field contains all of the configured values                                     | words                 | comma<br>seperated         |
| equals          | Checks if a field equals the configured value                                               | word                  | string                     |
| equalsField     | Checks if a field value equals another field value                                          | field                 | string                     |
| notEqualsField  | Checks if a field value does not equal another field value                                  | field                 | string                     |
| notDefaultValue | Checks if a field equals a default value set by a pre processor                             | defaultValue          | string/TS object           |
| minValue        | Checks if the value of a field is at least the configured value                             | value                 | numeric                    |
| maxValue        | Checks if the value of a field is less than the configured value                            | value                 | numeric                    |
| minLength       | Checks if the value of a field has at least the configured length                           | value                 | integer                    |
| maxLength       | Checks if the value of a field has less than the configured length                          | value                 | integer                    |
| betweenValue    | Checks if the value of a field is between the configured values                             | minValue<br>maxValue  | numeric<br>numeric         |
| betweenLength   | Checks if the length of the value of a field is between the configured values               | minValue<br>maxValue  | integer<br>integer         |
| minItems        | Checks if a field contains at least the configured amount of items (e.g. checkboxes)        | value                 | integer                    |
| maxItems        | Checks if a field contains less than the configured amount of items (e.g. checkboxes)       | value                 | integer                    |
| betweenItems    | Checks if a field contains values between the configured amount of items (e.g. checkboxes)  | minValue<br>maxValue  | integer<br>integer         |
| isInDBTable     | Checks if the value of a field is in a configured field in a configured table               | table<br>field        | string<br>string           |
| isNotInDBTable  | Checks if the value of a field is not in a configured field in a configured table           | table<br>field        | string<br>string           |
| ereg            | Checks a field value using the configured regular expression                                | value                 | regexp                     |
| eregi           | Checks a field value using the configured regular expression, but being case insensitive    | value                 | regexp                     |
| pregMatch       | Checks a field value using the configured perl regular expression                           | value                 | regExp                     |
| captcha         | Checks if a field value equals the generated captcha string of the extension "captcha"      | none                  | -                          |
| srFreecap       | Checks if a field value equals the generated captcha string of the extension "sr_freecap"   | none                  | -                          |
| jmRecaptcha     | Checks if a field value equals the generated captcha string of the extension "jm_recaptcha" |                       |                            |
| mathGuard       | Checks if a field value equals the result of the generated question of MathGuard            |                       |                            |
| dateRange       | Checks if a field value is between a configured date range                                  | pattern<br>min<br>max | string<br>string<br>string |

| Check:           | Description:                                                                          | Parameters:  | Datatype:       |
|------------------|---------------------------------------------------------------------------------------|--------------|-----------------|
| date             | Checks if a field value is a valid date                                               | pattern      | string          |
| time             | Checks if a field value is a valid time                                               | pattern      | string          |
| fileAllowedTypes | Checks if the filetype of an uploaded file is allowed                                 | allowedTypes | comma seperated |
| fileMaxCount     | Checks if the files uploaded from a field are less than the configured value          | maxCount     | integer         |
| fileMinCount     | Checks if the files uploaded from a field are more than or equal the configured value | minCount     | integer         |
| fileMinSize      | Checks if the size of an uploaded file is at least the configured value (in Byte)     | minSize      | integer         |
| fileMaxSize      | Checks if the size of an uploaded file is at less than the configured value (in Byte) | maxSize      | integer         |
| fileRequired     | Checks if a file has been uploaded from this field                                    | none         | -               |

### Example

```

plugin.F3_MailformPlusPlus.settings.validators.1 {
    class = F3_MailformPlusPlus_Validator_Default
    config {
        fieldConf {
            firstname.errorCheck.1 = required
            firstname.errorCheck.2 = minLength
            firstname.errorCheck.2.value = 4
            firstname.errorCheck.3 = notDefaultValue
            firstname.errorCheck.3.defaultValue = Enter firstname here
            picture.errorCheck.1 = fileRequired
            picture.errorCheck.2 = fileAllowedTypes
            picture.errorCheck.2.allowedTypes = jpg,png,gif,tiff
        }
    }
}

```

## Available subparts to use in the template

|                                    |                                                                                                                                                                                                                                                   |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ###TEMPLATE_FORM###                | Subpart for form template of a single step form                                                                                                                                                                                                   |
| ###TEMPLATE_FORM[1...x]###         | Subpart for form template of a multistep form. The number specifies the step.<br><br>Example:<br>###TEMPLATE_FORM1### for first step                                                                                                              |
| ###TEMPLATE_FORM[1...x][SUFFIX]### | Subpart for form template of a multistep form with conditions. The number specifies the step and the suffix specifies the current route.<br><br>Example:<br>###TEMPLATE_FORM2_routea###<br>###TEMPLATE_FORM2_routeb###                            |
| ###FORM_STARTBLOCK###              | Use this in multistep forms and put code being the same in all steps into this subpart. You can use the marker ###FORM_STARTBLOCK### in the following steps and it gets replaced with the content of the subpart ###FORM_STARTBLOCK### in step 1. |
| ###FORM_ENDBLOCK###                | Use this in multistep forms and put code being the same in all steps into this subpart. You can use the marker ###FORM_ENDBLOCK### in the following steps and it gets replaced with the content of the subpart ###FORM_ENDBLOCK### in step 1.     |
| ###TEMPLATE_EMAIL_ADMIN_PLAIN###   | This subpart contains the template for the plain text E-mail sent to the admin if configured.                                                                                                                                                     |
| ###TEMPLATE_EMAIL_ADMIN_HTML###    | This subpart contains the template for the HTML E-mail sent to the admin if configured.                                                                                                                                                           |
| ###TEMPLATE_EMAIL_USER_PLAIN###    | This subpart contains the template for the plain text E-mail sent to the user if configured.                                                                                                                                                      |

|                                |                                                                                                                                                               |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ###TEMPLATE_EMAIL_USER_HTML### | This subpart contains the template for the HTML E-mail sent to the user if configured.                                                                        |
| ###TEMPLATE_CONFIRMATION###    | If you use the confirmation view after successful form submission you can enter your template in this subpart.                                                |
| ###TEMPLATE_PDF###             | Customize the look of generated frontend PDF files. Have a look at the section "How to use HTML as PDF template"                                              |
| ###ISSET_[FIELDNAME]###        | Use this subpart in your E-mail and confirmation templates to not show fields that were not filled out in the form. There is a how to section in this manual. |

## Available markers to use in subparts

|                            |                                                                                                                                                                                                                                       |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ###value_[fieldname]###    | GET/POST value of the given input field.<br><br>Example:<br><br><input type="text" name="email" value="###value_email###"/>                                                                                                           |
| ###LLL:[langkey]###        | Marker for translated texts. [langkey] is a key in your translation file.                                                                                                                                                             |
| ###error_[fieldname]###    | This marker gets replaced with the error messages for the field                                                                                                                                                                       |
| ###is_error_[fieldname]### | Only gets replaced when an error occurred in this field. Can be filled with translated content or TypoScript objects. Have a look at the tutorial section for more information.                                                       |
| ###is_error###             | Only gets replaced when an error occurred in the form. Can be filled with translated content or TypoScript objects. Have a look at the tutorial section for more information.                                                         |
| ###REL_URL###              | Relative URL to current page                                                                                                                                                                                                          |
| ###ABS_URL###              | Absolute URL to current page                                                                                                                                                                                                          |
| ###submit_nextStep###      | Use this in multi step forms to add a submit button pointing to the next step.<br><br>Example:<br><br><input type="submit" ###submit_nextStep### value="###LLL:next###"/>                                                             |
| ###submit_prevStep###      | Use this in multi step forms to add a submit button pointing to the previous step.<br><br>Example:<br><br><input type="submit" ###submit_prevStep### value="###LLL:prev###"/>                                                         |
| ###submit_reload###        | Use this for upload fields in your form. By clicking the button, the user can upload a file directly.<br><br>Example:<br><br><input type="submit" ###submit_reload### value="Upload file now"/>                                       |
| ###FEUSER_[property]###    | You can access name, email, ... fields from the logged in user (frontend-user) and fill out the name or email address automatically. Attention: the fieldname has to be written in CAPITAL letters.                                   |
| ###[fieldname]###          | GET/POST value of the given input field.                                                                                                                                                                                              |
| ###required_[fieldname]### | Adds required sign, if this field is marked as required in error checks.                                                                                                                                                              |
| ###CAPTCHA###              | Only works if you have the "captcha" extension installed. This marker will be replaced with a picture showing some only human readable text. The user has to type the text shown on the picture into a input field in your form.      |
| ###RECAPTCHA###            | Only works if you have the "jm_recaptcha" extension installed. This marker will be replaced with a picture showing some only human readable text. The user has to type the text shown on the picture into a input field in your form. |
| ###MATHGUARD###            | This marker gets replaced with a MathGuard security question. The user has to solve the question and enter the result in a form field.                                                                                                |
| ###ERROR###                | Cumulated error messages.                                                                                                                                                                                                             |
| ###[fieldname]_minSize###  | Minimum file size for uploaded files in this field. The minimum size is defined in the error check.                                                                                                                                   |



|                                         |                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ###[fieldname]_maxSize###               | Maximum file size for uploaded files in this field. The maximum size is defined in the error check.                                                                                                                                                                                                                                                                                                    |
| ###[fieldname]_allowedTypes###          | Allowed file types for uploaded files in this field. The types are defined in error check.                                                                                                                                                                                                                                                                                                             |
| ###[fieldname]_maxCount###              | Maximum count of files uploaded in this field. The amount is defined in error check.                                                                                                                                                                                                                                                                                                                   |
| ###[fieldname]_fileCount###             | Amount of currently uploaded files via this field.                                                                                                                                                                                                                                                                                                                                                     |
| ###[fieldname]_remainingCount###        | Remaining amount of uploads via this field.                                                                                                                                                                                                                                                                                                                                                            |
| ###[fieldname]_uploadedFiles###         | Names of files uploaded via this field. Use this in combination with the wrap settings for file markers in TypoScript.                                                                                                                                                                                                                                                                                 |
| ###total_uploadedFiles###               | Names of files uploaded in this form. Use this in combination with the wrap settings for file markers in TypoScript.                                                                                                                                                                                                                                                                                   |
| ###selected_[fieldname]_[fieldvalue]### | <p>Only for use with <b>dropdowns</b></p> <p>Example:</p> <p><b>dropdown:</b></p> <pre>&lt;option value="webdesign"&gt;Webdesign&lt;/option&gt; ###selected_topic_webdesign###&gt;Webdesign&lt;/option&gt;</pre>                                                                                                                                                                                       |
| ###checked_[fieldname]_[fieldvalue]###  | <p>Only for use with <b>checkboxes</b> and <b>radiobuttons</b></p> <p>Example:</p> <p><b>checkbox</b></p> <pre>&lt;input type="checkbox" name="topic" value="webdesign"&gt;Webdesign ###checked_topic_webdesign###&gt;Webdesign</pre> <p><b>radiobutton</b></p> <pre>&lt;input type="radio" name="contact_via" value="email" style="border-style:none;" ###checked_contact_via_email###&gt;email</pre> |
| ###curStep###                           | The current step in a multi step form.                                                                                                                                                                                                                                                                                                                                                                 |
| ###maxStep###                           | The last step of a multi step form.                                                                                                                                                                                                                                                                                                                                                                    |
| ###lastStep###                          | The last step the user was in a multi step form.                                                                                                                                                                                                                                                                                                                                                       |
| ###step_bar###                          | A sample step bar showing the amount of steps and the current step highlighted.                                                                                                                                                                                                                                                                                                                        |
| ###ADDITIONAL_MUTLSTEP###               | Adds the submitted values from other steps as hidden fields to preserve the GET/POST values in order not to lose information of current route in conditional multi step form.                                                                                                                                                                                                                          |
| ###PRINT_LINK###                        | Only usable in ###TEMPLATE_CONFIRMATION### Shows a link to print view.                                                                                                                                                                                                                                                                                                                                 |
| ###CSV_LINK###                          | Only usable in ###TEMPLATE_CONFIRMATION### Shows a link to export the submitted values as CSV.                                                                                                                                                                                                                                                                                                         |
| ###PDF_LINK###                          | Only usable in ###TEMPLATE_CONFIRMATION### Shows a link to export the submitted values as PDF.                                                                                                                                                                                                                                                                                                         |
| ###LINK2SHOW###                         | Only usable in Frontend Listing. Shows a link to detail view.                                                                                                                                                                                                                                                                                                                                          |
| ###DELETE###                            | Only usable in Frontend Listing. Shows a link to delete a record.                                                                                                                                                                                                                                                                                                                                      |
| ###BACK_LINK###                         | Only usable in Frontend Listing. Shows a link back to list view.                                                                                                                                                                                                                                                                                                                                       |

# Tutorial

## How to set up a simple form

1. Create a HTML template file containing your form. Examples can be found in EXT:mailformplusplus/Examples
2. Create a new page
3. Create a content element with type "General Plugin"
4. Choose "MailformPlusPlus" in Dropdown "Plugin"
5. Check that predefined form "Default" is selected.
6. Optional: Choose a translation file containing error messages and translations filled into markers ###LLL:[key]###
7. Optional: Enter settings for E-Mail, required fields or a page to redirect to
8. Save and view the page

## How to set up an advanced form

1. Create a HTML template file containing your form. Examples can be found in EXT:mailformplusplus/Examples
2. Create a new page
3. Create an extension template and enter a TypoScript setup entering template file, lang file and other settings.
4. Create a content element with type "General Plugin"
5. Choose "MailformPlusPlus" in Dropdown "Plugin"
6. Save and view the page

NOTE: Configuring your form using TypoScript gives you much more possibilities.

## How to use predefined forms

1. Create a TypoScript setup using the predef setting

Example:

```
plugin.F3_MailformPlusPlus.settings.predef.contactform {
    # This name appears in the dropdown selector in plugin record
    name = Contact form
    ...
    ...
}
```

2. Create a content element with type "General Plugin"
3. Choose "MailformPlusPlus" in Dropdown "Plugin"
4. Now you can choose the entered predefined form from the "Predefined forms" dropdown.
5. Save and view the page.

HINT: they are many examples available at EXT:mailformplusplus/Examples

## How to set up a multistep form

1. Create a HTML template file containing your form. Examples can be found in EXT:mailformplusplus/Examples/MultiStep
2. Create a new page

3. Create an extension template and enter a TypoScript setup entering template file, lang file and other settings.
4. Create a content element with type "General Plugin"
5. Choose "MailformPlusPlus" in Dropdown "Plugin"
6. Choose "Multi step" from Dropdown "Type"
7. Save and view the page

NOTE: You can overwrite settings made in `plugin.F3_MailformPlusPlus.settings` for each step using `plugin.F3_MailformPlusPlus.settings.[stepnumber]`

## How to set up a multistep form with conditions

1. Create a HTML template file containing your form. Examples can be found in `EXT:mailformplusplus/Examples/MultiStepConditions`
2. Create a new page
3. Create an extension template and enter a TypoScript setup entering template file, lang file and other settings.
4. Create a content element with type "General Plugin"
5. Choose "MailformPlusPlus" in Dropdown "Plugin"
6. Choose "Multi step" from Dropdown "Type"
7. Add TypoScript conditions and change the settings `plugin.F3_MailformPlusPlus.settings.[stepnumber].templateSuffix`
8. Save and view the page

## How to set up spam protection

### Enable captcha for your form

1. Make sure that the extension "captcha" is installed
2. Put the input field and the required marker into your template:
 

```
###error_captchafield###
###CAPTCHA###


```
3. Enter error check for this field in TypoScript
 

```
plugin.F3_MailformPlusPlus.settings.validators.1 {
    class = F3_MailformPlusPlus_Validator_Default
    config {
        fieldConf {
            captchafield.errorCheck.1 = captcha
        }
    }
}
```

### Enable sr\_freecap for your form

1. Make sure that the extension "sr\_freecap" is installed
2. Put the required subpart into your template. You can change the name of the input field and the HTML code

```
<!--###CAPTCHA_INSERT### this subpart is removed if CAPTCHA is not enabled! -->


<label for="freecapfield">###SR_FREECAP_NOTICE###</label>
    <div class="clear"></div>
    ###SR_FREECAP_CANT_READ###
    <div class="clear"></div>
    <input type="text" size="15" id="freecapfield" name="mailformplusplus[freecapfield]"


```

```
title="###SR_FREECAP_NOTICE###" value="">
    ###SR_FREECAP_IMAGE###
</div>
<!--###CAPTCHA_INSERT###-->
```

### 3. Enter error check for this field in TypoScript

```
plugin.F3_MailformPlusPlus.settings.validators.1 {
    class = F3_MailformPlusPlus_Validator_Default
    config {
        fieldConf {
            freecapfield.errorCheck.1 = srFreecap
        }
    }
}
```

## Enablejm\_recaptchafor your form

1. Make sure that the extension "jm\_recaptcha" is installed
2. Register an account at <http://recaptcha.net/> to get a public and a private key for your domain.
3. Enter the keys received from <http://recaptcha.net/> in TypoScript:

```
plugin.tx_jmrecaptcha {
    public_key = xxx
    private_key = xxx
}
```

### 4. Add marker to template:

```
###error_recaptcha_response_field###
###RECAPTCHA###
```

### 5. Enter error check for this field in TypoScript

```
plugin.F3_MailformPlusPlus.settings.validators.1 {
    class = F3_MailformPlusPlus_Validator_Default
    config {
        fieldConf {
            recaptcha_response_field.errorCheck.1 = jmRecaptcha
        }
    }
}
```

## EnablemathGuardfor your form

### 1. Add marker to template

```
###error_mathguard_answer###
###MATHGUARD###
```

### 2. Enter error check for this field in TypoScript

```
plugin.F3_MailformPlusPlus.settings.validators.1 {
    class = F3_MailformPlusPlus_Validator_Default
    config {
        fieldConf {
            mathguard_answer.errorCheck.1 = mathGuard
        }
    }
}
```

## How to set up error checks

1. Add markers like `###error_[fieldname]###` to your template
2. Set up a validator in TypoScript

```
plugin.F3_MailformPlusPlus.settings.validators.1 {
    class = F3_MailformPlusPlus_Validator_Default
    config {
        fieldConf {
            field1 {
                errorCheck.1 = required
                errorCheck.2 = maxLength
                errorCheck.2.value = 50
            }
            field2 {
                errorCheck.1 = required
                errorCheck.2 = email
            }
        }
    }
}
```

3. Add entries for error messages to your translation file

```
<label index="error_field1_required">Field1 is required!</label>
<label index="error_field1_maxLength">Field1 has to be shorter than ###value### characters!</label>
<label index="error_field2_required">Field2 is required!</label>
<label index="error_field2_email">Field2 is no valid e-mail!</label>
```

NOTE: The marker `###value###` in the error message is filled with the value of the parameter “value” for error check “maxLength”. If an error check requires parameters, you can use markers like `###[parametername]###` in the translatable message.

### Use `###is_error###` markers

These markers allow you to display additional content if an error occurred for each form field or globally.

In your HTML template you can add these markers:

```
###is_error###
###is_error_[fieldname]###
```

MailformPlusPlus will search for content to replace these markers in the translation file and in the TypoScript setup.

In the translation file enter the values like:

```
<label index="is_error_field1">Error occurred in field1!</label>
```

A possible TypoScript configuration looks like this:

```
plugin.F3_MailformPlusPlus.settings {
    isErrorMarker {
        global = Global message if an error occurred (filled into ###is_error###)
        field1 = TEXT
        field1.value = Some message (filled into ###is_error_field1###)
    }
}
```

## How to fill your own markers via TypoScript

1. Add the marker into your template

```
###myMarker###
```

## 2. Register the marker in TypeScript. (3 examples available)

```
plugin.F3_MailformPlusPlus.settings.predef.myForm.markers.myMarker_1 = TEXT
plugin.F3_MailformPlusPlus.settings.predef.myForm.markers.myMarker_1.value = My marker content

# getText function
plugin.F3_MailformPlusPlus.settings.predef.myForm.markers.myMarker_2 = TEXT
plugin.F3_MailformPlusPlus.settings.predef.myForm.markers.myMarker_2.data = getIndpEnv:HTTP_HOST

# Constant insertion
plugin.F3_MailformPlusPlus.settings.predef.myForm.markers.myMarker_3 = TEXT
plugin.F3_MailformPlusPlus.settings.predef.myForm.markers.myMarker_3.value = {$local.myConstant}
```

## 3. The marker will be filled with "My marker content"

NOTE: You can fill your own markers using any TypeScript object like USER or COA. Just try it out.

## How to hide unfilled form field values in templates

In your HTML-Template you are able to wrap the field output in e-mails and subpart **###TEMPLATE\_CONFIRMATION###** with a subpart:

```
<!-- ###ISSET_fax### -->
###value_fax###<br/>
<!-- ###ISSET_fax### -->
```

If the user filled out the field "fax" in the form, the text will get shown in the e-mails, otherwise it will not be added.

You have the possibility to add some conditions:

```
<!-- ###ISSET_fax&&phone### -->
###value_fax###<br/>
<!-- ###ISSET_fax&&phone### -->
<!-- ###ISSET_fax&&!phone### -->
###fax###<br/>
<!-- ###ISSET_fax&&!phone### -->
<!-- ###ISSET_fax|phone### -->
###fax###<br/>
<!-- ###ISSET_fax|phone### -->
```

As you see, you can use the operators (&&,|,!) to do some simple checks.

NOTE: The case of the fieldname in ISSET subpart and marker MUST match.

### good:

```
<!-- ###ISSET_EMAIL### -->
###value_EMAIL###
<!-- ###ISSET_EMAIL### -->
<!-- ###ISSET_email### -->
###value_email###
<!-- ###ISSET_email### -->
```

### bad:

```
<!-- ###ISSET_EMAIL### -->
###value_email###
<!-- ###ISSET_EMAIL### -->
<!-- ###ISSET_email### -->
###value_EMAIL###
<!-- ###ISSET_email### -->
```

## How to set up multi language forms

### In the templatefile:

Specify markers for the multi language texts.

example:

```
<!-- ###TEMPLATE_FORM### begin -->
<form name="form" method="post" action="###REL_URL###">
<input type="hidden" name="submitted" value="1">

<table>
<tr>
<td>###LLL:username###</td>
<td><input type="text" name="username" value="###value_username###"></td>
</tr>
<tr>
<td>###LLL:password###</td>
<td><input type="password" name="password" value="###value_password###"></td>
</tr>
<tr>
<td colspan="2"><input type="submit" name="submit" value="###LLL:submit###"></td>
</tr>
</table>
</form>
<!-- ###TEMPLATE_FORM### end -->
```

### Your custom languagefile:

```
<?xml version="1.0" encoding="utf-8" standalone="yes" ?>
<T3locallang>
  <meta type="array">
    <description>Language labels for my form</description>
  </meta>
  <data type="array">
    <languageKey index="default" type="array">
      <label index="username">Username:</label>
      <label index="password">Password:</label>
      <label index="submit">Login</label>
    </languageKey>
    <languageKey index="de" type="array">
      <label index="username">Benutzername:</label>
      <label index="password">Passwort:</label>
      <label index="submit">Anmelden</label>
    </languageKey>
  </data>
</T3locallang>
```

### TypoScript:

You can specify the path to your translation file in any setting "langFile" associated with "mailformplusplus".

Example:

```
plugin.F3_MailformPlusPlus.settings.langFile = fileadmin/lang/myLangFile.xml
```

## How to load data from DB to use in Finisher\_DB

It may be useful to extend the set of data submitted in the form before inserting them in the database. You may want to fetch additional data from the database, the session, the GET / POST parameters or from something else. This can be done quite easily since the key "mapping" can understand TypoScript.

Let's have a look at the following lines. They are 4 examples, `field_demo_1`, `field_demo_2`, `field_demo_3`, `field_demo_4`.

```
2.class = F3_MailformPlusPlus_Finisher_DB
2.config {
  table = tt_content
  key = uid
  fields {

    # Retrieves data from the GET / POST parameters
    field_demo_1 {
      mapping = TEXT
      mapping.data = GPvar:mailformplusplus|firstname
    }
  }
}
```

```
# Retrieves data from the database
field_demo_2 {
    mapping = TEXT
    mapping {
        dataWrap = DB:tx_cuso_courses:{GPvar:mailformplusplus|course_uid}:title
        insertData = 1
        wrap3 = {}
    }
}

# Retrieves data from the session
field_demo_3 {
    mapping = TEXT
    mapping.data = TSFE:fe_user|user|last_name
}

# Some more cool stuff
field_demo_4 {
    mapping = COA
    mapping {
        10 = TEXT
        10 {
            data = GPvar:mailformplusplus|firstname
        }
        20 = TEXT
        20 {
            data = GPvar:mailformplusplus|lastname
            noTrimWrap = | |: |
        }
        30 = TEXT
        30 {
            dataWrap = DB:tx_cuso_courses:{GPvar:mailformplusplus|course_uid}:title
            insertData = 1
            wrap3 = {}
        }
    }
}
}
```

## How to use HTML as PDF template

This only works if Generator\_TCPDF is used.

```
<!-- ###TEMPLATE_PDF### -->
<table>
<!-- ###pid###, ###submission_date### and ###ip### are predefined markers to use in this subpart
-->
    <tr>
        <td>###LLL:pid###</td>
        <td>###pid###</td>
    </tr>
    <tr>
        <td>###LLL:ip###</td>
        <td>###ip###</td>
    </tr>
    <tr>
        <td>###LLL:submission_date###</td>
        <td>###submission_date###</td>
    </tr>
    <tr>
        <td>###LLL:[fieldname]###</td>
        <td>###value_[fieldname]###</td>
    </tr>
</table>
<!-- ###TEMPLATE_PDF### -->
```

## How to upgrade from th\_mailformplus to Mailformplus MVC



There are many forms out there which use th\_mailformplus. If you ask yourself, what would happen if you did an update to Mailformplus MVC, here is a short explanation on how to change the TypoScript of th\_mailformplus to work with MailformplusMVC. This is not a complete tutorial, it only shows the basic differences. Many of the TypoScript settings are named equally, but some also have changed, were removed or didn't exist in th\_mailformplus.

A TypoScript setup for th\_mailformplus may look like this:

```
plugin.tx_thmailformplus_pil {
    langFile = typo3conf/ext/th_mailformplus/example_form/singlepage_forms/improved_demo_lang.php

    default {
        email_to = admin@host.com
        email_sendtouser = email
        email_subject_user = Your contact request
        email_sender = noreply@host.com
    }

    fieldConf {
        name {
            errorCheck = required
        }
        email {
            errorCheck = required,email
        }
        text {
            errorCheck = required
        }
    }
}
```

In this configuration a translation file is included, error checks are defined and settings for email sending to an admin and the user are made.

The same configuration with Mailformplus MVC will look this way:

```
plugin.F3_MailformPlusPlus.settings {
    langFile = typo3conf/ext/th_mailformplus/example_form/singlepage_forms/improved_demo_lang.php

    validators.1.class = Validator_Default
    validators.1.config {
        name {
            errorCheck.1 = required
        }
        email {
            errorCheck.1 = required
            errorCheck.2 = email
        }
        text {
            errorCheck = required
        }
    }

    finishers.1.class = FinisherMail
    finishers.1.config {
        admin {
            to_email = admin@host.com
            sender_email = noreply@host.com
        }
        user {
            to_email = email
            sender_email = noreply@host.com
            subject = Your contact request
        }
    }
}
```

As you see, the configuration looks similar, but Mailformplus MVC uses blocks like “validators” or “finishers” to make it possible to group any number of classes. So that it is possible to let “finishers.1” be a class to send emails and “finishers.2” be a class to store data into database.

When you compare the TypoScript options of th\_mailformplus with Mailformplus MVC you will find out that they are quite similar and you should have no problems with writing configuration for Mailformplus MVC if you knew th\_mailformplus before.

## Known problems

- When using AJAX remove links for uploaded files the file markers such as `###[fieldname]_fileCount###` do not get updated because the request only refreshes the content of the marker `###[fieldname]_uploadedFiles###`. A possible solution would be to reload the whole form using the AJAX request.
- Some problems may occur in multistep handling, when using the `submit_reload` feature. We are aware of this problem and will solve it in the future.

## To-Do list

- Add a 1-2-3 wizard to generate form templates, translation files and TypeScript setup code.
- Think about integration of “extBase” architecture and usage of Fluid.

## ChangeLog

- 1.0.0: beta release.