

Google plus

Extension Key: mn_google_plus

Language: en

Keywords: Google plus

Copyright 2000-2012, Mattias Nilsson, <tollepjaer@gmail.com>

This document is published under the Open Content License
available from <http://www.opencontent.org/opl.shtml>

The content of this document is related to TYPO3
- a GNU/GPL CMS/Framework available from www.typo3.org

Table of Contents

Google plus.....	1	FAQ.....	5
Introduction.....	3	Configuration.....	6
What does it do?.....	3	Reference.....	6
Users manual.....	4	To-Do list.....	7

Introduction

What does it do?

- A extension for presentation of a frontend user's Google plus information and activities plus a public profile search.
- A backend module for getting a visual representation of a users latest updates in an organizational chart.


Users manual

– First of all an API for Google plus is required and this is acquired on Google API:s found here:

<https://code.google.com/apis/> chose to activate Google+ API. After that you will get an "API key" for using in TYP03.

API Access	AdSense Management API	OFF	Courtesy limit: 10,000 queries/day
Reports	Analytics API	OFF	Courtesy limit: 50,000 queries/day
Quotas	Audit API	OFF	Courtesy limit: 10,000 queries/day
	Blogger API	Request access...	Courtesy limit: 1,000 queries/day
	Books API	OFF	Courtesy limit: 1,000 queries/day
	Calendar API	OFF	Courtesy limit: 10,000 queries/day
	Custom Search API	OFF	Courtesy limit: 100 queries/day • Pricing
	Freebase API	OFF	Courtesy limit: 100,000 queries/day
	Google Affiliate Network API	OFF	Courtesy limit: 1,000 queries/day
	Google Cloud SQL	Request access...	
	Google Cloud Storage	OFF	Pricing
	Google Maps API v2	OFF	Courtesy limit: 25,000 queries/day • Pricing
	Google Maps API v3	OFF	Courtesy limit: 25,000 queries/day • Pricing
	Google+ API	ON	Courtesy limit: 1,000 queries/day
	Google+ Hangouts API	OFF	
	Groups API	Request access...	Courtesy limit: 100,000 queries/day
	Identity Toolkit API	OFF	Courtesy limit: 1,000,000 queries/day
	Latitude API	OFF	Courtesy limit: 1,000,000 queries/day
	Moderator API	OFF	Courtesy limit: 1,000,000 queries/day
	Orkut REST API	OFF	Courtesy limit: 1,000 queries/day
	Page Speed Online API	OFF	Courtesy limit: 250 queries/day
	Page Speed Service	Request access...	
	Places API	OFF	Courtesy limit: 1,000 queries/day • Pricing

- The next step is to create a "Google Plus" record in TYPO3 backend. Just paste the the apikey into the field "Google plus API key".

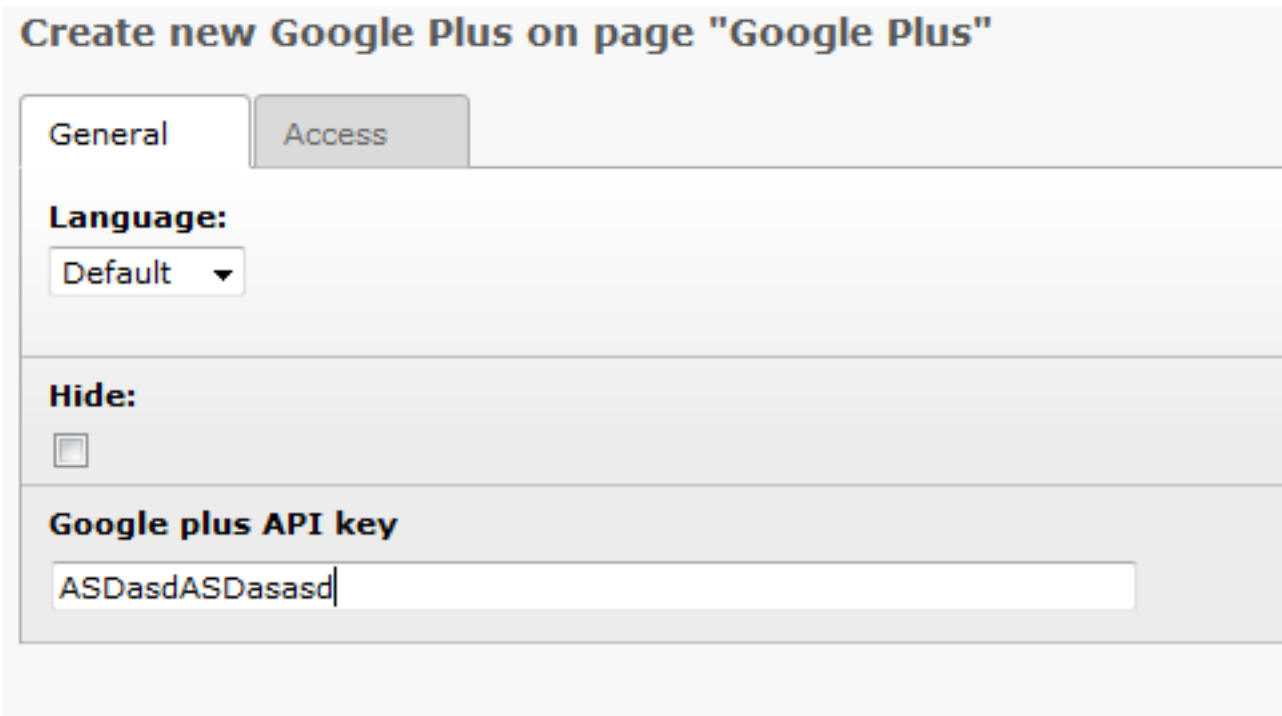

The screenshot shows a web form titled "Create new Google Plus on page 'Google Plus'". It has two tabs: "General" (selected) and "Access". Under the "General" tab, there are three sections: 1. "Language:" with a dropdown menu showing "Default". 2. "Hide:" with an unchecked checkbox. 3. "Google plus API key" with a text input field containing the text "ASDasdASDasasd".

- Then install extension on the desired page and include folders or pages containing the api record and frontend users on "Record Storage Page".
- And last but not least dont forget to include TS config for extension "Google Plus".
- Note that a frontend user also requires a Google plus id to work. A scheduler for collecting this user ids is under development.

FAQ

- For a user to valid as a Google user the "Record Type" must be set to "Tx_Extbase_Domain_Model_FrontendUser".
- The backend module is found under "Web" section.

Configuration

– Target group: Developers

Reference

– Reference (TypoScript)

Property:	Data type:	Description:	Default:
googlePlusApiUrl	string	Sets the url to the Google plus API	https://www.googleapis.com/plus/v1/

Default settings

```

plugin.tx_mngoogleplus {
    settings {
        googlePlusApiUrl = https://www.googleapis.com/plus/v1/
    }
    view {
        templateRootPath = {$plugin.tx_mngoogleplus.view.templateRootPath}
        partialRootPath = {$plugin.tx_mngoogleplus.view.partialRootPath}
        layoutRootPath = {$plugin.tx_mngoogleplus.view.layoutRootPath}
        defaultPid = auto
    }
    persistence {
        storagePid = {$plugin.tx_mngoogleplus.persistence.storagePid}
        classes {
            Tx_Extbase_Domain_Model_FrontendUser {
                subclasses {
                    Tx_MnGooglePlus_Domain_Model_GoogleUser =
Tx_MnGooglePlus_Domain_Model_GoogleUser
                }
            }
            Tx_MnGooglePlus_Domain_Model_GoogleUser {
                mapping {
                    tableName = fe_users
                    #recordType = Tx_MnGooglePlus_Domain_Model_GoogleUser
                    recordType = Tx_Extbase_Domain_Model_FrontendUser
                    columns {
                        googlePlusId.mapOnProperty = google_plus_id
                    }
                }
            }
        }
    }
}

# Module configuration
module.tx_mngoogleplus {
    settings < plugin.tx_mngoogleplus.settings
    persistence < plugin.tx_mngoogleplus.persistence
    view < plugin.tx_mngoogleplus.view
    view {
        templateRootPath = {$module.tx_mngoogleplus.view.templateRootPath}
        partialRootPath = {$module.tx_mngoogleplus.view.partialRootPath}
        layoutRootPath = {$module.tx_mngoogleplus.view.layoutRootPath}
    }
}

```

To-Do list

- Scheduler for collecting users id's from Google+.
- TYP03 Forge