

# PDF Controller

## HTML to Postscript for TYPO3

Offer your HTML page for PDF download. Control the conversion with the integrated user interface.



Version: 2.0.0 - 2014-10-16

Extension Key: pdfcontroller

Language: en

Keywords: PDF, html2ps, postscript

Copyright 2011-2014, Dirk Wildt - Die Netzmacher, <<http://wildt.at.die-netzmacher.de>>

This document is published under the Open Content License available from <http://www.opencontent.org/opl.shtml>

The content of this document is related to TYPO3 a GNU/GPL CMS/Framework available from [www.typo3.org](http://www.typo3.org)

## Table of Contents

PDF Controller .....	1	Backend Tool .....	25
Screen Shots .....	3	Reference .....	27
Frontend .....	3	html2ps .....	27
Backend .....	4	tx_pdfcontroller_pi2 .....	28
Introduction .....	6	Security .....	30
What does it do? .....	6	In principle .....	30
Restriction .....	6	html2ps .....	30
Manual as PDF file .....	6	Warnings .....	31
Website .....	6	#1: piVars aren't set .....	31
Forum .....	6	#2: piVars[URL] isn't set .....	31
Flyer .....	6	#3: piVars[URL] is empty .....	31
Installation .....	7	Known Bugs .....	32
Tutorial I .....	8	I got the PDF image icon and not a PDF file .....	32
Installation .....	8	Images are missing .....	32
Check Requirements .....	8	Page Not Found: &cHash empty .....	32
Add Pages and Plugins .....	8	The PDF Controller doesn't work .....	32
Configure the Plugin Button .....	10	... undefined method FPDF::GetFontAscender() .....	32
Adapt the TypoScript to your needs .....	10	Unknow error? .....	32
TypoScript Snippet .....	11	"Unsupported ..." .....	33
Tutorial II .....	12	Upgrade from TYPO3 4.5 .....	34
Based on Tutorial I .....	12	FAQ .....	35
Page Object .....	12	Are frontend user sessions possible? .....	35
CSS .....	14	CSS compatibility list .....	35
Button for PDF download and for Printing .....	15	How do I add an image header to the PDF? .....	35
Completely TypoScript .....	17	How do I check matched requirements? .....	35
Optimisation .....	18	How do I disable the Google Chrome PDF Viewer? .....	35
Result .....	18	HTML5 – How to configure TYPO3 .....	35
System Requirements .....	19	Further Information .....	36
Check it by the Plugin! .....	19	Other extensions published by Die Netzmacher .....	36
Required .....	19	Helpful suggestions .....	38
Recommended .....	19	Forum .....	38
SEO - Search Engine Optimisation .....	20	Credits .....	39
rel="nofollow" .....	20	typo3-lisardo.de .....	39
Cache .....	21	web-arts.ch .....	39
Remove the Cache manually .....	21	TYPO3 Security Team .....	39
Development .....	22	Darren Gates and Konstantin Bournayev .....	39
Requirements .....	22	Change log .....	40
Plugin .....	22	Illustration Index .....	41
Frontend Tools .....	23	Alphabetical Index .....	42

# Screen Shots

## Frontend

### Case I – without configuring any line TypoScript



Illustration 1: Download dialog after the mouse click on the PDF button

You have to add a page with the plugin PDF Controller User Interface and the PDF Controller Button to a page only.

### Case II – Website wide PDF downloads and optimized printing

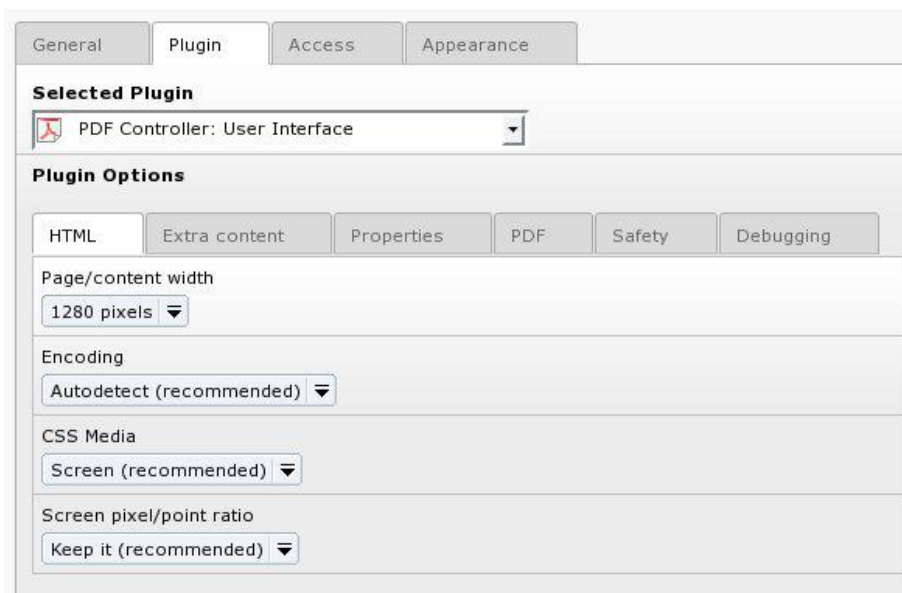


Illustration 2: 1: PDF button and print button generated by the PDF Controller. 2: PDF file in a PDF viewer.

Tutorial II on page 12 below demonstrates, how to integrate the PDF button and the print button (1) website wide. You can configure the conversion, your PDF file (2) can defer to the HTML page (for optimized printing i.e.).

## Backend


### PDF Controller User Interface



The screenshot shows the 'Plugin' tab of the PDF Controller User Interface. The 'Selected Plugin' is 'PDF Controller: User Interface'. Under 'Plugin Options', the 'HTML' tab is active. The settings are as follows:

- Page/content width: 1280 pixels
- Encoding: Autodetect (recommended)
- CSS Media: Screen (recommended)
- Screen pixel/point ratio: Keep it (recommended)

Illustration 3: PDF Controller User Interface: Properties of the HTML page

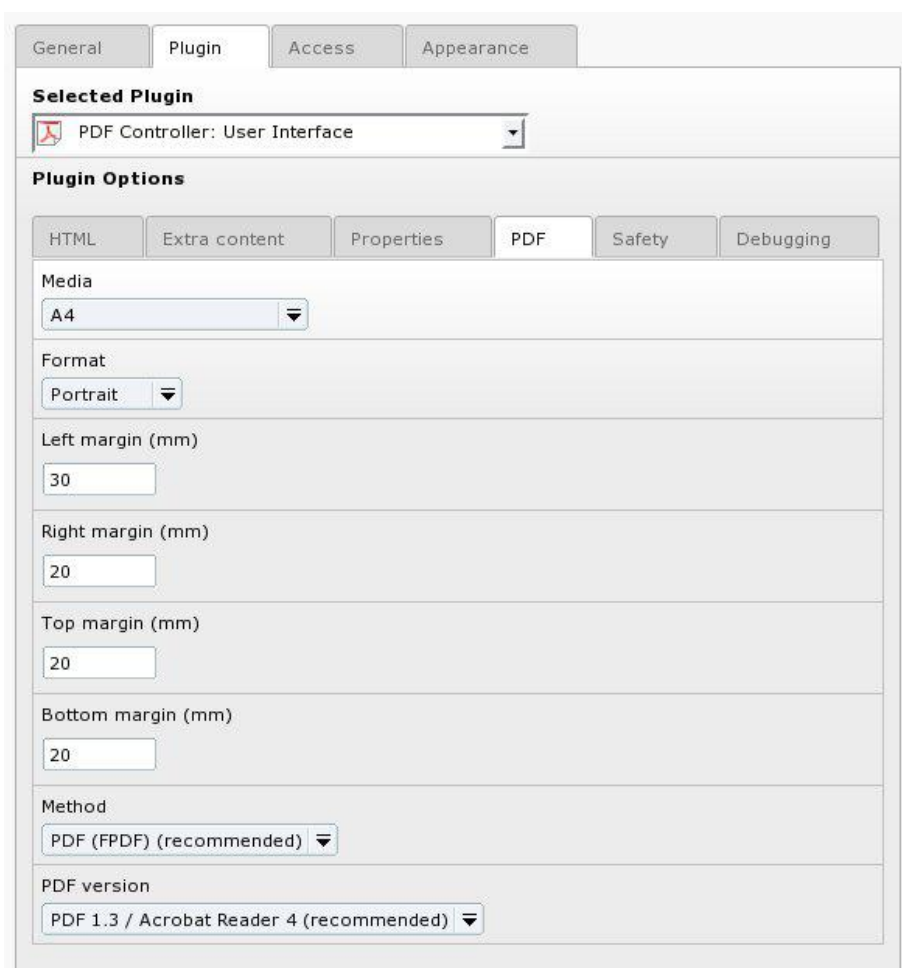


The screenshot shows the 'Plugin' tab of the PDF Controller User Interface. The 'Selected Plugin' is 'PDF Controller: User Interface'. Under 'Plugin Options', the 'PDF' tab is active. The settings are as follows:

- Media: A4
- Format: Portrait
- Left margin (mm): 30
- Right margin (mm): 20
- Top margin (mm): 20
- Bottom margin (mm): 20
- Method: PDF (FPDF) (recommended)
- PDF version: PDF 1.3 / Acrobat Reader 4 (recommended)

Illustration 4: PDF Controller User Interface: Properties of the PDF document

## PDF Controller Button

General
Plugin
Access
Appearance

**Selected Plugin**  
 PDF Controller: Button

**Plugin Options**  

PDF Converter

Page with the PDF Controller User Interface  

PDF Controller

PDF Controller [3149]

Page  
piBase wrap <div class="tx-pdfcontroller-pi2">|</div>  

Don't use it (recommended)

Button  

PDF icon (default)

Illustration 5: PDF Controller Button

# Introduction

## What does it do?

- The PDF Controller converts your whole HTML page or parts of your HTML page to a PDF document.
- The CSS compatibility is high level (see more information in section "No. The PDF controller can't manage frontend user sessions." on page 35 below).
- The PDF Controller has an user interface for controlling the PDF process. The user interface is in English or German depending on the language of the backend user.
- The PDF Controller has a second plugin: The PDF Controller Button.
- The PDF Controller has six tools for development (five frontend tools, one backend tool)
- The PDF Controller generates unique file names.
- The PDF Controller doesn't need an extra page object.
- The PDF Controller is secure: You can use it for PDF converting for the current website only by default.

## Restriction

- The PDF-Controller can't manage frontend user sessions.

## Manual as PDF file

You find this manual as PDF file at

- [doc/manual.pdf](#)
- <http://typo3-pdfcontroller.de/typo3conf/ext/pdfcontroller/doc/manual.pdf>

## Website

The PDF Controller has a website. Please visit

- English  
<http://typo3-pdfcontroller.de/en/>
- German  
<http://typo3-pdfcontroller.de/>

## Forum

The PDF Controller has a forum (see Forum on page 38 below).

## Flyer

The PDF Controller has a flyer (in German language only).

- <http://typo3-pdfcontroller.de/flyer/>

## Installation

- Install the extensions
  - PDF Controller (pdfcontroller) and
  - PDF Controller Fonts (pdfcontroller\_fonts).
- Create in your library folder (or anywhere) the page (not a folder!):
  - PDF Controller
- Add to the page PDF Controller the plugin PDF Controller User Interface
- Add the plugin PDF Controller Button to the page, which should be downloadable as a PDF document.
- Configure the plugin PDF Controller Button: Link to the PDF Controller User Interface.
- Include the static TypeScript template "PDF Controller Button" into the page with the button.

That's all.

# Tutorial I

If you like to offer every page for the PDF download, you don't need to add the PDF Controller Button to every page. You define a central PDF Controller Button and integrate it once by TypoScript to every page.

## Installation

The installation is the same like in the section Installation on page 7 above. But you don't need to add the PDF Controller Button to a special page.

## Check Requirements

Please check your system requirements. See "Check system requirements" on page 23 below.

Please set `[FE][pageNotFoundOnCHashError] = 0`. See details at "Page Not Found: &CHash empty" on page 32 below.

## Add Pages and Plugins

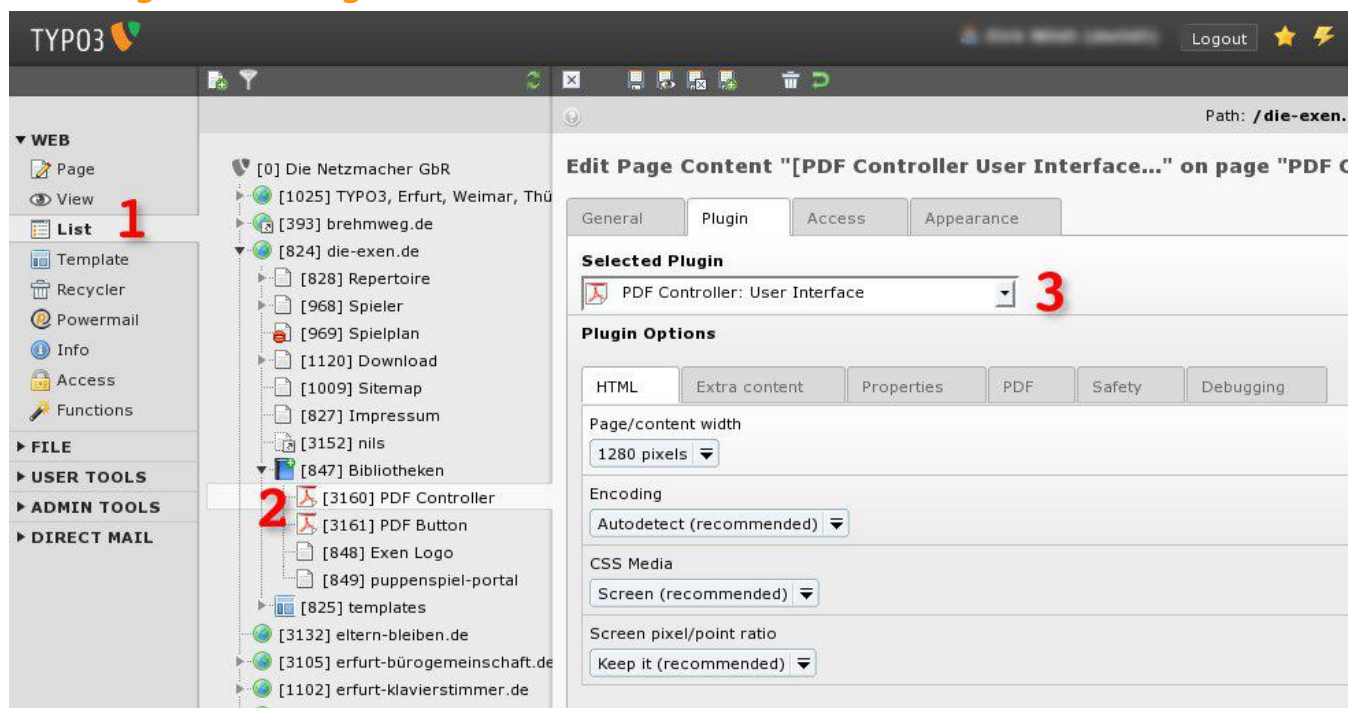


Illustration 6: Pages and plugin

1. Module      Web > List
2. Page tree    Add to your folder libraries (or another sysfolder) the pages (and not folders!):
  - PDF Controller
  - PDF Button
3. Edit area    Add to your pages the correspondingly plugins.
  - page PDF Controller: the plugin PDF Controller User Interface
  - page PDF Button: the plugin PDF Controller Button



## Add the page tree icon

If you like the PDF icon for your pages in the page tree like in the illustration below, please configure the page properties of the pages PDF Controller and PDF Button.

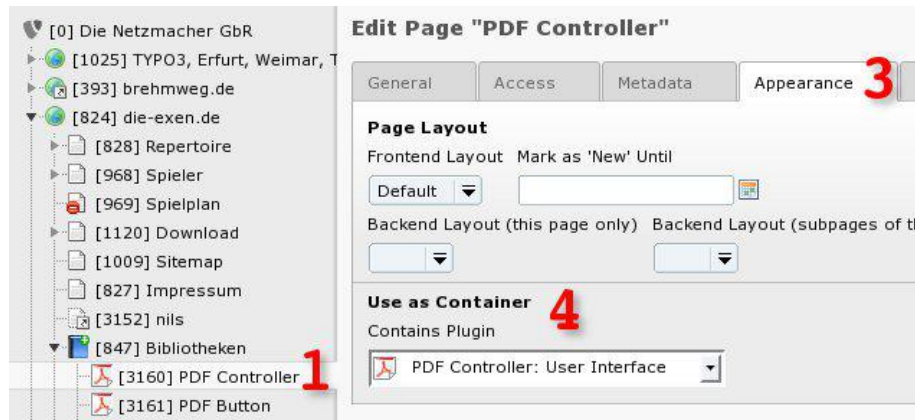


Illustration 7: Page contains the plugin ...

1. Page tree      PDF Controller
2. Edit area      Edit page properties
3.                  Tab [Appearance]
4.                  Field [Contains Plugin]: PDF Controller: User Interface

Repeat the steps for the page PDF Button.

## Add more page tree icons?

Do you like the library icon in the illustration above? It's available after installing the extension "TSconfig Pages and Users by extManager" (extkey: tsconf).

## Configure the Plugin Button

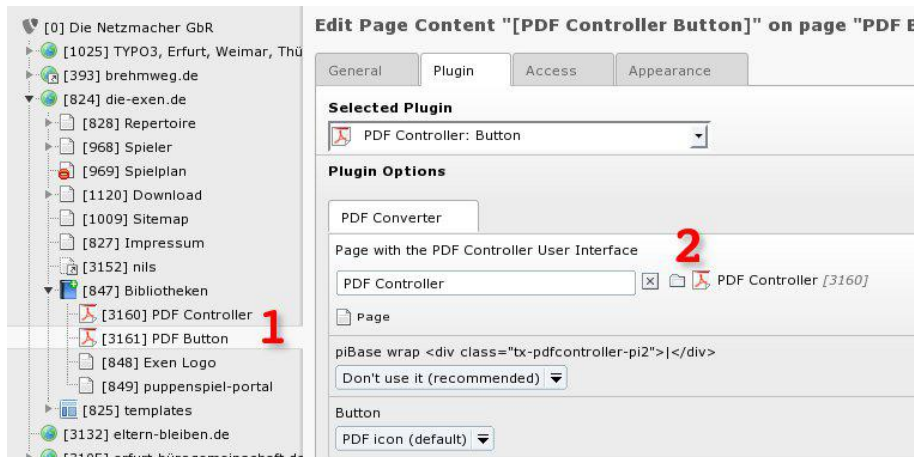


Illustration 8: Pages and plugin

1. Page tree      PDF Button
2. Edit area      Edit the plugin PDF Controller Button:  
Connect the button with the page PDF Controller<sup>1</sup>.

## Adapt the TypoScript to your needs

This is an example for a TypoScript without TemplaVoilà. If you are using TemplaVoilà, the workflow will be different.

Please inspect your TypoScript code. Please find the TypoScript array, where you want to place the button like in the example below.

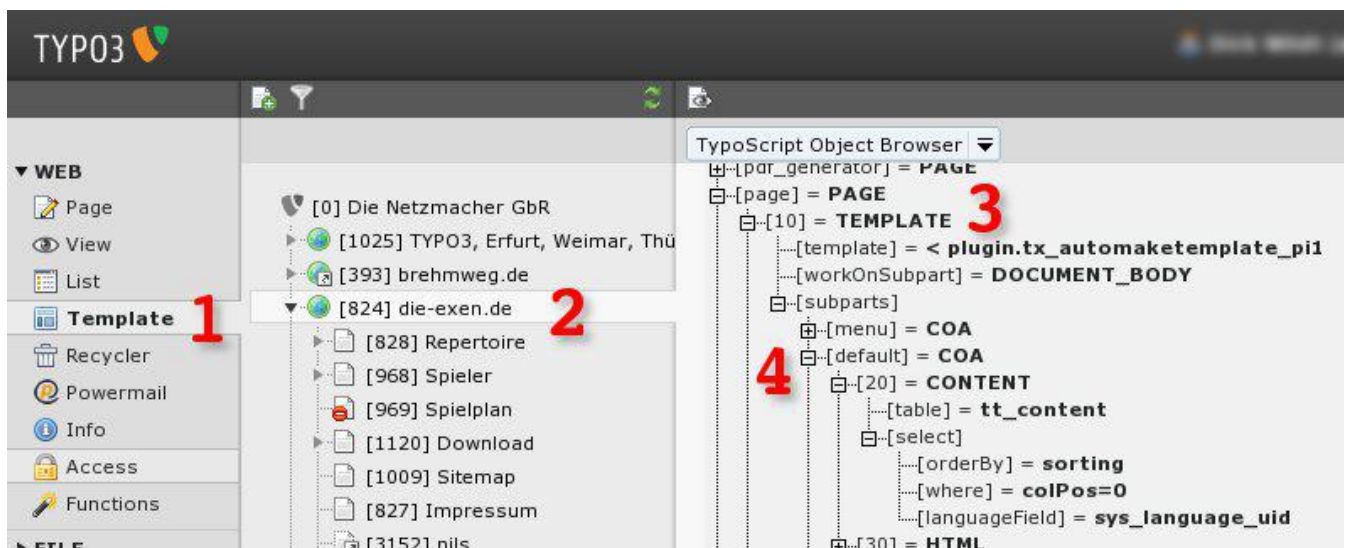


Illustration 9: TypoScript Object Browser

1. Module      Web > Template
2. Page tree      Root page (in the illustration above: die-exen.de)
3. Edit area      TypoScript Object Browser  
Look for the content area in your TypoScript page object.  
In the illustration above: page.10.template.subparts.default

<sup>1</sup> Controller MUST contained by a page not a folder!

## TypoScript Snippet

The content area is in our example above:

```
page.10.template.subparts.default.20
```

If we want the PDF button on the top of the content area, we have to add something like this:

```
page.10.template.subparts.default.10
```

If we want the PDF button on the bottom of the content area, we have to add something like this:

```
page.10.template.subparts.default.30
```

The whole snippet for our example:

```
page {
  10 {
    subparts {
      default {
        10 = COA
        10 {
          wrap = <div style="padding-top:1em;text-align:right;"> | </div>
          10 < styles.content.get
          10 {
            select {
              // Id of the page PDF Button
              pidInList = 3161
            }
          }
        }
        40 = COA
        40 {
          wrap = <div style="text-align:right;"> | </div>
          10 < styles.content.get
          10 {
            select {
              // Id of the page PDF Button
              pidInList = 3161
            }
          }
        }
      }
    }
  }
}
```

### Add Snippet and the Include Static Template

1. Please add the snippet to the TypoScript template at the bottom of the field setup of your root page. This is the quick way. The better way is, to create an extension template with the TypoScript snippet and include the extension template into the TypoScript template of the root page.
2. Please include the static Template "PDF Controller: button (pdfcontroller)" into the TypoScript template of your root-page.

## Tutorial II

Usually it is a need, to take another HTML template and another CSS for your PDF document.

Reasons are often:

- You don't need navigation tools like a menu in your PDF document.
- You don't need a header image.
- You like a logo at the top and a footer at the bottom.
- The background color of your HTML page is black (bad for printers).

If you need another HTML template or another CSS or an extended CSS, you have to configure another TYPO3 page object.

Result of Tutorial II is a page object, an optimized HTML page for printing and an optimized PDF document.

## Based on Tutorial I

This tutorial is based on

- tutorial I and
- the real example <http://die-exen.de/>

If you didn't follow tutorial I, please do it now.

Your needs will defer from <http://die-exen.de/>. Please adapt the TypoScript snippets below to your needs.

## Page Object

### Copy the current Page Object

```

////////////////////////////////////////
//
// Page optimized for printing (typeNum 98)

print < page
print {
    typeNum = 98
    config >
    config {
        admPanel          = 0
        xhtml_cleaning    = 0
        language          = de
        locale_all        = de_DE
        metaCharset       = UTF-8
        doctype           = xhtml_strict
        htmlTag_langKey   = de
        no_cache          = 1
    }
}
// Page optimized for printing (typeNum 98)

```

- Line 5: Copy your current page object to the new object print. If your current page object isn't called page, please adapt this line to your needs.
- Line 7: typeNum of the print object is 98. 98 is used in context of printing usually. But feel free to take another typeNum.
- Line 8: Remove the config of the page object.
- Line 9-18: Define a new config array adapted to your needs. In the example above the language of the website is German. If it isn't in your case, please adapt localisation properties to your needs.
- Line 17: If you are using tt\_content only for delivering content, you may cache the print object. Set no\_cache to 0. But if you are using records like tt\_news or another database, it is recommended not to cache the output.

## Remove not needed Properties

Now you have to inspect your print object. It is recommended to inspect the TypoScript with the TypoScript Object Browser.

You have to remove not needed properties. This depends on the configuration of your page object.

In our example – it is based on the real website <http://die-exen.de/> - we have to remove the properties below.

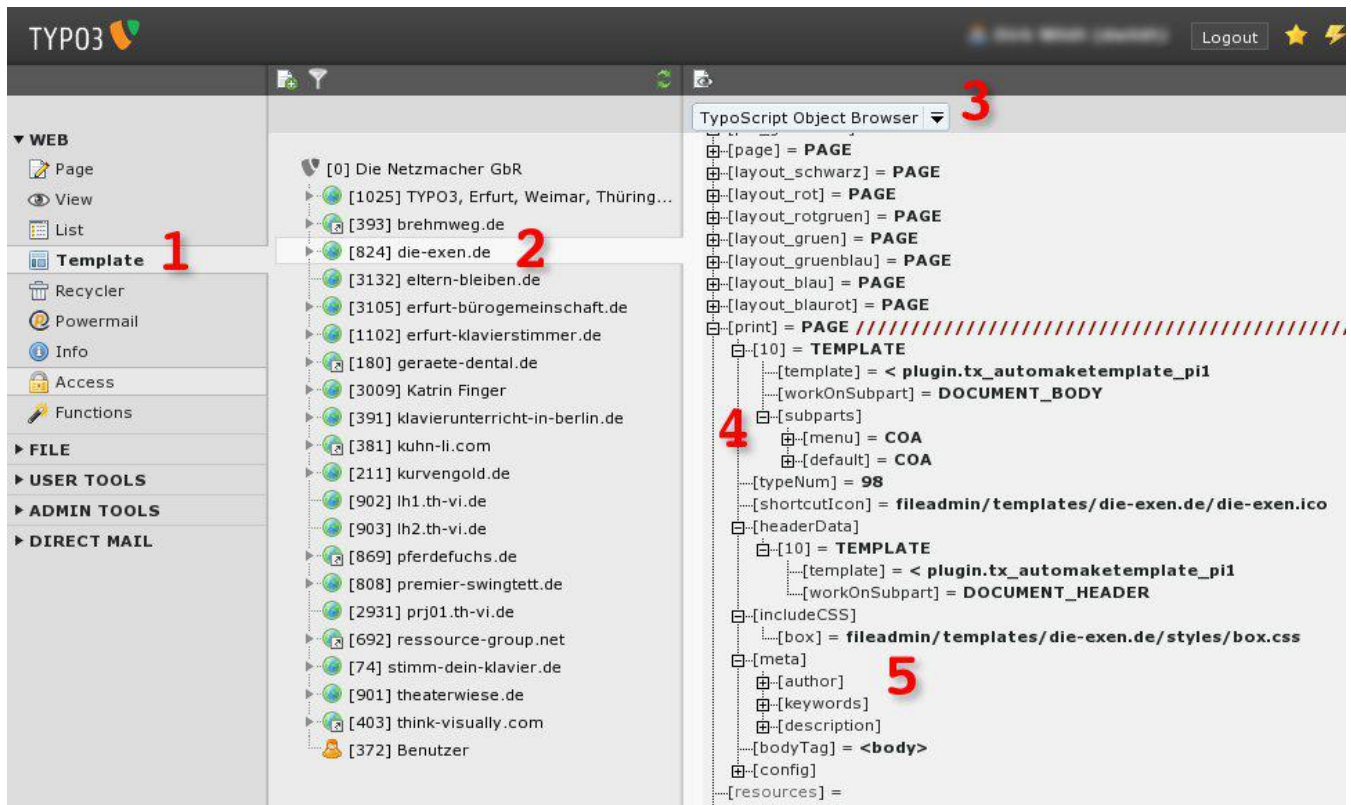


Illustration 10: Inspect your TypoScript

1. Module      Web > Template
2. Page tree    Root page (in the illustration above: die-exen.de)
3. Edit area    TypoScript Object Browser
4.                The menu should removed. It is part of the array subparts.
5.                Some meta properties should removed.  
This is for search engines only to avoid double content.

```
// Remove some meta tags
print.meta.keywords >
print.meta.description >
// Replace subpart menu with a space char
print.10.subparts.menu >
print.10.subparts.menu = &nbsp;
// Remove pdf controller button at top and bottom
print.10.subparts.default.10 >
print.10.subparts.default.40 >
```

## Add a footer

We need a footer in our example. We add this TypoScript snippet:

```
// Footer
print {
  10 {
    subparts {
      default {
        40 = COA
        40 {
          wrap = <div id="footer_type98">|</div>
          10 = TEXT
          10 {
            wrap = http://die-exen.de|<br />
            typolink {
              parameter                = {page:uid},0
              parameter.insertData     = 1
              returnLast                = url
            }
          }
          21 = TEXT
          21.value = &#169; die-exen.de, c/o puppenspiel-portal.eu, Borntalweg 4, 99092
Erfurt&nbsp;|&nbsp;
          22 = TEXT
          22.data = date:U
          22.strftime = Gedruckt am %d.%m.%y um %T Uhr
        }
      }
    }
  }
}
```

## CSS

We have to overwrite some CSS properties. This is the CSS file:

```
body {
  background-image:url(images/hintergrund_14.gif);
  background-color:white;
  color:black;
}
a,
a:link,
a:visited {
  color: #546600;
}
a:active, a:hover {
  color: #D0FF00;
}
#menu {
  display:none;
}
#footer_type98 {
  font-weight:normal;
  font-size:.6em;
  padding-top:1em;
  text-align:center;
}
```

The TypoScript in prose:

- We need another background colour and background image.
- We need another colour for links
- Don't display the menu
- Some pothter roperties for our footer

## Upload the CSS file

We upload the file to the path:

```
fileadmin/templates/die-exen.de/styles/pdf_controller.css
```

## Include the CSS file

```
print {
    includeCSS {
        pdf_controller = fileadmin/templates/die-exen.de/styles/pdf_controller.css
    }
}
```

## Result

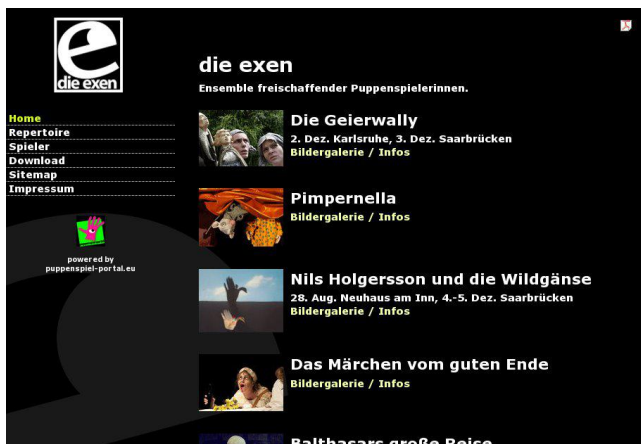


Illustration 11: die-exen.de HTML page



Illustration 12: die-exen.de optimized for printing

The HTML page optimized for printing is a very good base for the PDF conversion.

Next step is, to extend the PDF Controller button with a button for printing.

## Button for PDF download and for Printing

The PDF Controller has a master\_template for this job.

You have to do this:

- Allocate the master\_template to the current button property
- Set the ID of the page PDF Controller in the TYPO3 Constant Editor

## Allocate one of the master\_templates

You aren't using realUrl

You have an URL like `http://my-domain.com/index.php?id=123`

```
1. plugin.tx_pdfcontroller_pi2 {
2.     button >
3.     button < plugin.tx_pdfcontroller_pi2.master_templates.pdf_and_print_button_rawUrlEncode
4.     button {
5.         wrap = <div id="menuIcons"><ul> | </ul></div>
6.         10 {
7.             imageLinkWrap {
8.                 typolink {
9.                     additionalParams := appendString(%26tx_pdfcontroller_pi1[pixels]=700)
10.                }
11.            }
12.        }
13.    }
14. }
```

Line 5 + 6: We allocates the master\_template "pdf\_and\_print\_button\_rawUrlEncode" to the current button



configuration.

You are using `realUrl`

You have an URL like `http://my-domain.com/typo3-support/`

```

1. plugin.tx_pdfcontroller_pi2 {
2.     button >
3.     button < plugin.tx_pdfcontroller_pi2.master_templates.pdf_and_print_button_realUrl
4.     button {
5.         wrap = <div id="menuIcons"><ul> | </ul></div>
6.         10 {
7.             imageLinkWrap {
8.                 typolink {
9.                     additionalParams := appendString(&tx_pdfcontroller_pil[pixels]=700)
10.                }
11.            }
12.        }
13.    }
14. }
```

Line 5 + 6: We allocates the master\_template "pdf\_and\_print\_button\_realUrl" to the current button configuration.

Set the ID of the page PDF Controller in the TYPO3 Constant Editor

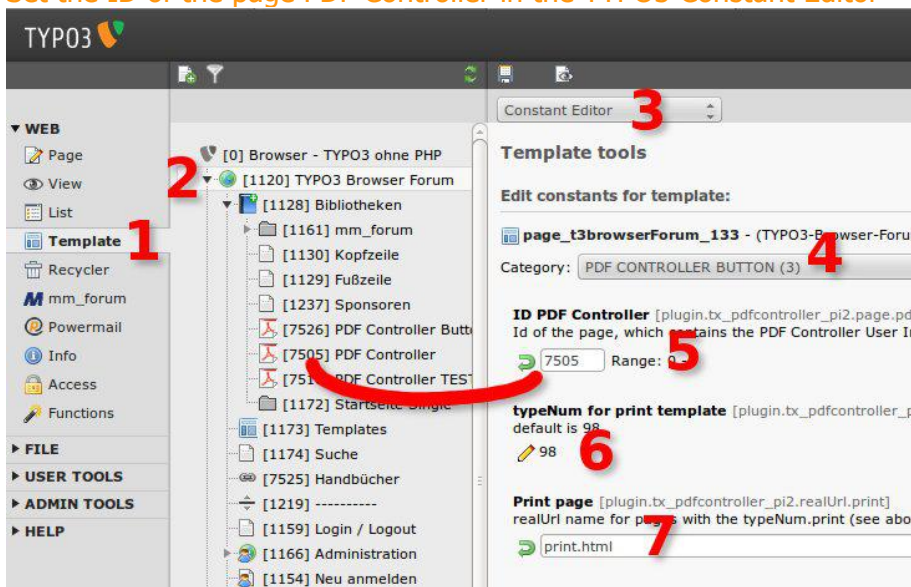


Illustration 13: TypoScript Constant Editor

You are welcome to edit three TypoScript constants:

1. Web > Template
2. Page tree: root page
3. Edit area: Choose [Constant Editor]
4. Choose [PDF Controller Button]
5. Fill in the id of the page with your PDF Controller plugin
6. The typeNum of your print page, if ypu have one
7. The URL name of your print page, if you have one and if your are using `realUrl`



## Completely TypoScript

This is the completely TypoScript code of Tutorial II (consolidated):

```

page {
    10 {
        subparts {
            default {
                10 < plugin.tx_pdfcontroller_pi2.master_templates.pdf_and_print_button
                40 < plugin.tx_pdfcontroller_pi2.master_templates.pdf_and_print_button
            }
        }
    }
}

print < page
print {
    typeNum = 98
    config >
    config {
        admPanel          = 0
        xhtml_cleaning    = 0
        language          = de
        locale_all        = de_DE
        metaCharset       = UTF-8
        doctype            = xhtml_strict
        htmlTag_langKey   = de
        no_cache          = 1
    }
    meta {
        keywords >
        description >
    }
    includeCSS {
        pdf_controller = fileadmin/templates/die-exen.de/styles/pdf_controller.css
    }
    10 {
        subparts {
            menu >
            menu = &nbsp;
            default {
                10 >
                30 >
                40 >
                40 = COA
                40 {
                    wrap = <div id="footer_type98">|</div>
                    10 = TEXT
                    10 {
                        wrap = http://die-exen.de/|<br />
                        typolink {
                            parameter          = {page:uid},0
                            parameter.insertData = 1
                            returnLast        = url
                        }
                    }
                    21 = TEXT
                    21.value = &#169; die-exen.de, c/o puppenspiel-portal.eu, Borntalweg 4, 99092
                    Erfurt&nbsp;|&nbsp;
                    22 = TEXT
                    22.data = date:U
                    22.strftime = Gedruckt am %d.%m.%y um %T Uhr
                }
            }
        }
    }
}

```

## Optimisation

We optimize the PDF file.

Edit the plugin/flexform PDF Controller User Interface on the page PDF Controller:

- Tab [HTML] field [Page/content width]: 640 pixels
- Tab [PDF] fields margins: We reduce the margin

If you need another value than the offered values of the flexform, you can configure it by TypoScript. See a snippet at "html2ps - Example" on page 27 below.

## Result



Illustration 14: Result of the tutorial II

1. <http://die-exen.de> with PDF button and print button
2. The generated PDF file in a PDF viewer

## System Requirements

PDF Controller is using the PHP project html2ps (see Credits on page 39 below).

### Check it by the Plugin!

You can check your system supported by the plugin PDF Controller User Interface. See "Check system requirements" on page 23 below.

### Required

- PHP 4.1.0 or newer (PHP 5 supported too)
- native or Active-Link DOM XML extension installed

### Recommended

- 'gzlib' PHP extension
- 'iconv' PHP extension

# SEO - Search Engine Optimisation

You are optimising your website for search engines in principle, that your content will be found and indexed in a meaningful context.

But if you are offering an HTML page for PDF download and for optimised printing, you don't like the a twice or triple indexing - because of performance.

## rel="nofollow"

Links to the pdf controller shouldn't indexed by default.

The <a> tag has the property rel="nofollow"

This effects that search engines doesn't follow the link - they don't download your PDF document. They don't index it.

That's what you want.

If you have a need to index PDF documents by search engines, please remove the TypoScript ATagParams. See the snippet below.

## TypoScript snippet

```
plugin.tx_pdfcontroller_pi2 {
    button = IMAGE
    button {
        ...
        imageLinkWrap {
            enable = 1
            typolink {
                ...
                ATagParams = rel="nofollow"
            }
        }
    }
}
```

# Cache

## Remove the Cache manually

html2ps caches the rendered PDF documents.

It is recommended to clean up the cache from time to time.

Cached files are stored in:

- `ext/pdfcontroller/res/html2ps_v2043/public_html/cache/`

# Development


## Requirements

You have to be a TYPO3 administrator for using the developer tools.

## Plugin

You have some options in the tab [Debugging], if you like to develop the PDF Controller or if you want to get some informations only.

The first select box is powerful: You can select one of four frontend tools. See Frontend Tools on page 23 below.

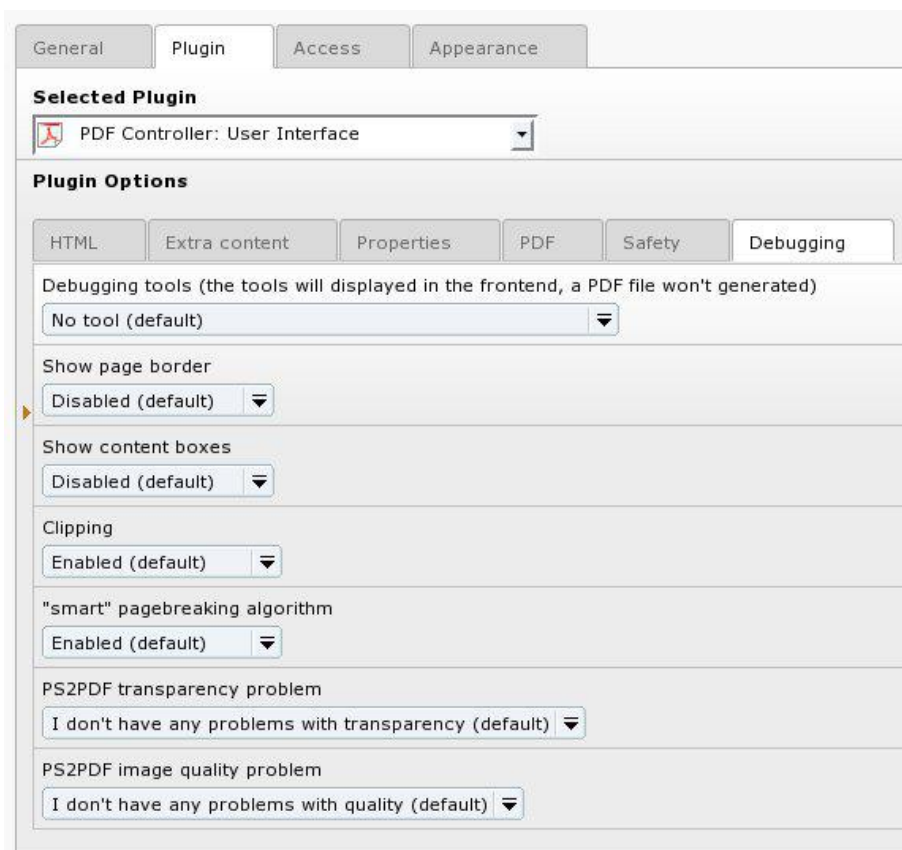

The screenshot shows the 'PDF Controller: User Interface' configuration page. The 'Plugin' tab is selected, and the 'Debugging' sub-tab is active. The 'Selected Plugin' dropdown is set to 'PDF Controller: User Interface'. Under 'Plugin Options', the 'Debugging' sub-tab is selected. The 'Debugging tools' dropdown is set to 'No tool (default)'. Other options include 'Show page border' (Disabled), 'Show content boxes' (Disabled), 'Clipping' (Enabled), '"smart" pagebreaking algorithm' (Enabled), 'PS2PDF transparency problem' (I don't have any problems with transparency), and 'PS2PDF image quality problem' (I don't have any problems with quality).

Illustration 15: PDF Controller with the tab [Debugging]

## Frontend Tools

### Check system requirements

You will get a report with checked system requirements in the frontend.

#### Checking your system configuration

This script will attempt to check your system settings and detect most obvious problems which could prevent you from using html2ps: missing PHP extensions, invalid permissions on files used by the script, missing font files and so on. Please note that if list may be incomplete, please visit [html2ps support forum](#) in case you've encountered an unknown issue.

```

XML DOM extension
Native XML DOM extension found

Curl PHP Extension
Found Curl extension version 7.
allow_url_fopen ini setting
allow_url_fopen is enabled

pcrc.backtrack_limit ini setting
pcrc.backtrack_limit is set to 100000 (less than 1,000,000). You could experience issues converting large pages.

GD PHP Extension
Found GD version 2.0.34.

GD JPEG Support
JPEG support enabled

GD GIF Support
GIF support enabled

GD PNG Support
PNG support enabled

Permissions on 'temp' subdirectory
'temp' subdirectory is fully accessible to the script

Permissions on 'fonts' subdirectory
'fonts' subdirectory is readable and executable by the script

Permissions on Type1 fonts directory
Type1 fonts directory (c:\Program Files\gs\fonts) is missing. You will not be able to generate postscript files.

Presence of registered TTF files
Font /home/www/html2ps/typo3typo3conf/ext/pdfcontroller/res/html2ps_v2043/public_html/fonts/arialuni.ttf is missing. You will not be able to generate PDF files with this font.
Font /home/www/html2ps/typo3typo3conf/ext/pdfcontroller/res/html2ps_v2043/public_html/fonts/times.ttf is present and readable.
Font /home/www/html2ps/typo3typo3conf/ext/pdfcontroller/res/html2ps_v2043/public_html/fonts/timesbi.ttf is present and readable.
Font /home/www/html2ps/typo3typo3conf/ext/pdfcontroller/res/html2ps_v2043/public_html/fonts/timesbi.ttf is present and readable.
Font /home/www/html2ps/typo3typo3conf/ext/pdfcontroller/res/html2ps_v2043/public_html/fonts/arial.ttf is present and readable.
Font /home/www/html2ps/typo3typo3conf/ext/pdfcontroller/res/html2ps_v2043/public_html/fonts/arialbi.ttf is present and readable.
Font /home/www/html2ps/typo3typo3conf/ext/pdfcontroller/res/html2ps_v2043/public_html/fonts/arialbd.ttf is present and readable.
Font /home/www/html2ps/typo3typo3conf/ext/pdfcontroller/res/html2ps_v2043/public_html/fonts/arialbi.ttf is present and readable.
Font /home/www/html2ps/typo3typo3conf/ext/pdfcontroller/res/html2ps_v2043/public_html/fonts/cour.ttf is present and readable.
Font /home/www/html2ps/typo3typo3conf/ext/pdfcontroller/res/html2ps_v2043/public_html/fonts/courbd.ttf is present and readable.
Font /home/www/html2ps/typo3typo3conf/ext/pdfcontroller/res/html2ps_v2043/public_html/fonts/courbi.ttf is present and readable.
Font /home/www/html2ps/typo3typo3conf/ext/pdfcontroller/res/html2ps_v2043/public_html/fonts/symbol.ttf is present and readable.
    
```

Illustration 16: Report with checked system requirements

### Test form for your URL and your parameters

Send an URL manually to html2ps. Only an URL containing your host is accepted.

#### html2ps/pdf demo (v 2.0.43)

[GhostView](#) can be used to read PostScript files, and [Adobe Acrobat Reader](#) can be used to read PDF files.

See also:

- [html2ps/pdf documentation](#)
- [System requirements checking script](#)

Source

Single URL ☒ :

Batch mode ☐ :

Use proxy:

Format Requirements

Page width [pixels]

Keep screen pixel/point ratio ☒

Render images ☒

Render hyperlinks ☒

Interactive forms ☐ FPDF/PDFLIB 1.6 output only!

Substitute special fields ☒

Media

CSS Media

Left margin [mm]

Right margin [mm]

Top margin [mm]

Bottom margin [mm]

Auto-size vertical margins ☐

Landscape ☐

Encoding

Content generation

Header

Illustration 17: Form for sending an URL manually

## html2ps documentation

Very helpful documentation, if you want to configure the conversion from HTML to PDF.

## html2ps/pdf documentation

1. [FAQ](#)
2. [Requirements and recommendations](#)
3. [Installation notes](#)
4. [Configuring html2ps/pdf](#)
5. [Calling html2ps/pdf](#)
6. [html2ps/pdf HTML directives](#)
7. [Interactive forms](#)
8. Generated content
  - a. [Table of Contents](#)
9. Internals
  - a. [Page breaking algorithm](#)
  - b. [Reserved names](#)
10. API
  - a. [API description](#)
  - b. [How do "fetchers" work?](#)
  - c. [Minimal code samples](#)
  - d. [API events](#)
  - e. [DOM compatibility](#)
11. [HOWTO: Use custom fonts](#)
12. [CSS 2.1 compatibility list](#)
13. [CSS 3 compatibility list](#)

html2ps/pdf (c) [TUFaT.com](#)

Illustration 18: html2ps documentation

## List with parameters, which will send to html2ps

Get a list with the parameters, which will send to html2ps.

### List of parameters for html2ps

```
array (
  'smartpagebreak' => true,
  'pixels' => '1280',
  'cssmedia' => 'Screen',
  'scalepoints' => true,
  'renderimages' => '1',
  'renderfields' => '1',
  'renderlinks' => '1',
  'bottommargin' => '20',
  'leftmargin' => '30',
  'media' => 'A4',
  'method' => 'fpdf',
  'pdfversion' => '1.3',
  'rightmargin' => '20',
  'topmargin' => '20',
  'URL' => 'http://die-exen.de/spieler/kathrin-bluechert/',
  'convert' => 'Convert File',
  'process_mode' => 'single',
  'encoding' => '',
  'headerhtml' => '',
  'footerhtml' => '',
  'toc-location' => 'before',
  'pslevel' => '3',
  'output' => '0',
)
```

### Full qualified URL

Copy and paste to your browser.

**http://die-exen.de/typo3conf/ext/pdfcontroller/res/html2ps\_v2043/public\_html/demo/html2ps.php?&smartpagebreak=1&pixels=1280&cssmedia=Screen&scalepoints=1&renderimages=1&renderfields=1&renderlinks=1&bottommargin=20&leftmargin=30&media=A4&method=fpdf&pdfversion=1.3&rightmargin=20&topmargin=20&URL=http://die-exen.de/spieler/kathrin-bluechert/&convert=Convert File&process\_mode=single&encoding=&headerhtml=&footerhtml=&toc-location=before&pslevel=3&output=0**

Illustration 19: Report with parameters, which will send to html2ps

## Don't suppress PHP error messages

Mostly relevant to developers: What would happen if an error message appears?  
 ([SYS][displayErrors] has to be set to 1 or 2 in Install Tool.)



## Backend Tool

### Enable DRS – the Development Reporting System

The PDF Controller is supported by the DRS - the Development Reporting System. You enable the DRS with the extension manager of the PDF Controller.

You can follow the complete work flow of the plugin PDF Controller.

If DRS is enabled, you will receive a report in the backend. It is supporting you in case of errors or if you like to develop the PDF Controller.

You need the extension devlog.

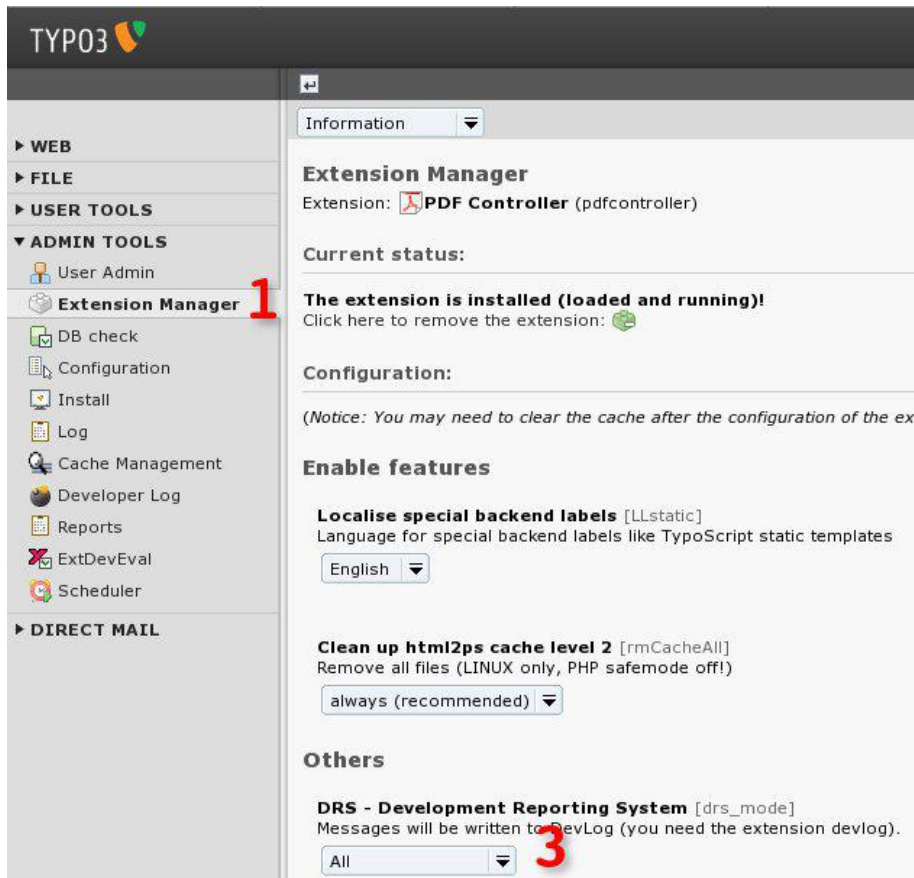


Illustration 20: PDF Controller in the extension manager

1. Module      Admin Tools > Extension Manager
2. Edit area    Select PDF Controller (pdfcontroller)
3.                Enable the DRS

### DRS options

- Don't log anything
- Errors and Warnings
- Flexform
- Marker
- Performance
- Security
- TypoLink
- All

## Get the Report

The screenshot shows the TYPO3 Developer Log interface. On the left is a sidebar with navigation links: WEB, FILE, USER TOOLS, ADMIN TOOLS (User Admin, Extension Manager, DB check, Configuration, Install, Log, Cache Management), Developer Log (Reports, ExtDevEval, Scheduler), and DIRECT MAIL. The main area is titled 'Developer Log' and contains a 'Select Log' dropdown set to 'latest log run', with 'Auto refresh' and 'Expand all extra data' checkboxes. Below this is a 'Log entries' section with a 'Log period' of '18-09-11 23:44 (10 min)'. A table displays log entries with columns: Date, Severity, Extension, Message, Called from, and Page. The entries show various log messages from the PDF Controller, including DRS - Development Reporting System, performance start, and various debugging messages related to flexform processing.

Date	Severity	Extension	Message	Called from	Page
18-09-11 23:44:25	INFO	pdfcontroller[INFO/DRS]	DRS - Development Reporting System:  Flexform	class.tx_pdfcontroller_pi1.php, line 649	PDF Controller
18-09-11 23:44:25	INFO	pdfcontroller[INFO/PERFORMANCE]	START 0 ms	class.tx_pdfcontroller_pi1.php, line 196	PDF Controller
18-09-11 23:44:25	INFO	pdfcontroller[INFO/FLEXFORM]	'PDF Controller' (pid: 3149, uid: 2469)	class.tx_pdfcontroller_pi1_flexform.php, line 329	PDF Controller
18-09-11 23:44:25	INFO	pdfcontroller[INFO/FLEXFORM+JSS]	addcontent.headerhtml: "	class.tx_pdfcontroller_pi1_flexform.php, line 1033	PDF Controller
18-09-11 23:44:25	INFO	pdfcontroller[INFO/FLEXFORM+JSS]	addcontent.footerhtml: "	class.tx_pdfcontroller_pi1_flexform.php, line 1033	PDF Controller
18-09-11 23:44:25	INFO	pdfcontroller[INFO/FLEXFORM+JSS]	addcontent.toc: "	class.tx_pdfcontroller_pi1_flexform.php, line 1033	PDF Controller
18-09-11 23:44:25	INFO	pdfcontroller[INFO/FLEXFORM+JSS]	addcontent.toc-location: "	class.tx_pdfcontroller_pi1_flexform.php, line 1033	PDF Controller
18-09-11 23:44:25	INFO	pdfcontroller[INFO/FLEXFORM+JSS]	addcontent.watermarkhtml: "	class.tx_pdfcontroller_pi1_flexform.php, line 1033	PDF Controller
18-09-11 23:44:25	INFO	pdfcontroller[INFO/FLEXFORM+JSS]	debugging.debugbox: "	class.tx_pdfcontroller_pi1_flexform.php, line 1033	PDF Controller
18-09-11 23:44:25	INFO	pdfcontroller[INFO/FLEXFORM+JSS]	debugging.debugnoclip: "	class.tx_pdfcontroller_pi1_flexform.php, line 1033	PDF Controller
18-09-11 23:44:25	INFO	pdfcontroller[INFO/FLEXFORM+JSS]	debugging.imagequality_workaround: "	class.tx_pdfcontroller_pi1_flexform.php, line 1033	PDF Controller
18-09-11 23:44:25	INFO	pdfcontroller[INFO/FLEXFORM+JSS]	debugging.pageborder: "	class.tx_pdfcontroller_pi1_flexform.php, line 1033	PDF Controller
18-09-11 23:44:25	INFO	pdfcontroller[INFO/FLEXFORM+JSS]	debugging.smartpagebreak: '1'	class.tx_pdfcontroller_pi1_flexform.php, line 1033	PDF Controller
18-09-11 23:44:25	INFO	pdfcontroller[INFO/FLEXFORM+JSS]	\$REQUEST[smartpagebreak] is set to: '1'	class.tx_pdfcontroller_pi1_flexform.php, line 1005	PDF Controller
18-09-11 23:44:25	INFO	pdfcontroller[INFO/FLEXFORM+JSS]	debugging.transparency_workaround: "	class.tx_pdfcontroller_pi1_flexform.php, line 1033	PDF Controller
18-09-11 23:44:25	INFO	pdfcontroller[INFO/FLEXFORM+JSS]	input.pixels: '3'	class.tx_pdfcontroller_pi1_flexform.php, line	PDF Controller

Illustration 21: DRS report

- Module Admin Tools > Developer Log

# Reference

## html2ps

html2ps isn't controlled by TypoScript properties. You control html2ps with URL parameters.

You configure the parameters in the plugin/flexform PDF Controller User Interface.

But you can configure missing parameters and – if you need another value than in the flexform/plugin – all parameters of the flexform/plugin by sending this parameter in the URL.

### html2ps/pdf script parameters

The html2ps/pdf script parameters are well documented by html2ps.

Please call the html2ps/pdf documentation (see section html2ps documentation on page 24 above). Click the link:

- [Calling html2ps/pdf](#)

### Example

You have set the HTML page width to 640 pixels in the flexform/plugin. But there is one page with a different layout. You need 900 pixels width.

- The html2ps parameter is "pixels"
- The parameter for the URL is than tx\_pdfcontroller\_pi1[pixels]

Workflow:

- Inspect your TypoScript with the TypoScript Object Browser on the page, where you needed 900 pixels.
- Look for the array, which is configuring your PDF button.
- Add to the value of the additional parameters your parameter: &tx\_pdfcontroller\_pi1[pixels]=900

```
plugin.tx_pdfcontroller_pi2 {
    button >
    button < plugin.tx_pdfcontroller_pi2.master_templates.pdf_and_print_button_realUrl
    button {
        10 {
            imageLinkWrap {
                typolink {
                    additionalParams := appendString(&tx_pdfcontroller_pi1[pixels]=580)
                }
            }
        }
    }
}
```

## tx\_pdfcontroller\_pi2

Property:	Data type:	Description:
button	TCO	<p>TypoScript for rendering the PDF download button. The used markers are replaced only in this TypoScript. If you are change the TypoScript you have to replace the markers manually.</p> <p><b>Example:</b> If you like to use both – a pdf button and a print button – you can replace the TypoScript like in the example "Allocate one of the master_templates" on page 15 above.</p> <p><b>Default code:</b></p> <pre> plugin.tx_pdfcontroller_pi2 {     button = IMAGE     button {         wrap =  &amp;nbsp;         file = ###IMAGEFILE###         altText = TEXT         altText {             value = Download content as PDF file             lang {                 de = Inhalt als PDF-Datei herunterladen             }         }         titleText &lt; .altText         imageLinkWrap = 1         imageLinkWrap {             enable = 1             typolink {                 parameter          = ###PARAMETER###                 additionalParams    = ###ADDITIONALPARAMS###                 ATagParams          = rel="nofollow"             }         }     } } </pre>
master_templates	array	<p>If you like to use both – a pdf button and a print button – you can allocate a master template.</p> <p><b>Example:</b> See "Allocate one of the master_templates" on page 15 above.</p> <p><b>Default code:</b></p> <pre> plugin.tx_pdfcontroller_pi2 {     master_templates {         // Example until TYPO3 4.5         pdf_and_print_button = COA         pdf_and_print_button {             // Please inspect the code with             // the TypoScript Object Browser         }         // Example with rawurlencode.         pdf_and_print_button_rawurlencode = COA         pdf_and_print_button_rawurlencode {             ...         }         // Example with a realUrl configuration         pdf_and_print_button_realurl = COA         pdf_and_print_button_realurl {             ...         }     } } </pre>

Property:	Data type:	Description:
_CSS_DEFAULT_STYLE	array	<p>Inline CSS. It will included while runtime.</p> <p><b>Default code:</b></p> <pre> plugin.tx_pdfcontroller_pi2 {     _CSS_DEFAULT_STYLE (         .tx-pdfcontroller-pi2 {             text-align: right;         }         .tx-pdfcontroller-pi2 ul {             font-weight: bold;             list-style-type: none;             margin: 0;             padding: 0;         }         .tx-pdfcontroller-pi2 ul li {             display:inline;             margin: 0;             padding-left:.6em;         }     ) }</pre>

# Security

## In principle

The external php code of html2ps can be used only within TYPO3. If there is an external call – a call from another website – code won't be executed. The result will be an error message.

## html2ps

The html2ps module has a security restriction in particular:

- You can use it for a conversion to PDF for URL of the current website only.

If you have the need to use the core for conversion to PDF of an external URL, please contact the developers. See "Forum" on page 38 below.

## Warnings

### #1: piVars aren't set

The page with the plugin PDF Controller is called without any parameter.

### #2: piVars[URL] isn't set

The page with the plugin PDF Controller is called without the parameter &tx\_pdfcontroller\_pi1[URL].

### #3: piVars[URL] is empty

The page with the plugin PDF Controller is called with the parameter &tx\_pdfcontroller\_pi1[URL] but the parameter is empty.

## Known Bugs

### I got the PDF image icon and not a PDF file

The PDF controller is contained by a folder. But it must be a page.

### Images are missing

Probably this is a issue of HTML5. Please refer to "HTML5 – How to configure TYPO3" on page 35 below.

### Page Not Found: &cHash empty

Error prompt:

Page Not Found  
Reason: Request parameters could not be validated (&cHash empty)

Please configure:

- Modul > SYSTEM > Install > All configuration
- [FE][pageNotFoundOnCHashError] = 0

### The PDF Controller doesn't work

Sometimes you get the start page as an HTML, but not the selected page as a PDF file.

The cause is very often a broken URL.

We know this problems especially:

- If you are using an extension and the extension delivers a parameter array like the MM forum (example: tx\_mmforum\_pi1[action]=...&tx\_forum[list]=...), the PDF Controller doesn't work proper.
- If you are using returnUrl mixed with parameters like .../my-site/?&type=98 the question mark is missing

You can investigate problems like above: copy the URL of the PDF icon into the address field of your browser.

Play with it: replace & by %26 or add a missing ?

Maybe you can solve your problems. Please refer to "Allocate one of the master\_templates" on page 15 above.

### ... undefined method FPDF::GetFontAscender()

I get in some TYPO3 installations the error prompt "... undefined method FPDF::GetFontAscender()".

I get the bug with PDF Controller version 1.4.1 and 2.0.0 (both are using html2ps 2.0.43) in some installations and I don't get in some others. The installation seems to have the same environment:

- same server
- same PHP version
- same TYPO3 version
- same localconf.php

I don't have any idea. If you have an idea, please send me a message. See <http://wildt.at.die-netzmacher.de>

### Unknow error?

Please check your system requirements. See "Check system requirements" on page 23 above.



## "Unsupported ..."

### Error

Error prompt like: Unsupported "display" value: table

### Reason

This is an error prompted by html2ps. This prompt from above means:

You have used the CSS property:

`display: table;`

But this CSS property isn't supported by html2ps.

### Solution

Please use an html template, which is optimised for printing and which doesn't need any non supported CSS property.

## Upgrade from TYPO3 4.5

It seems that the TYPO3 API from version 4.6 handle additionalParams in another way than version before 4.6.

If you update your TYPO3 to version 4.6 or higher and if you are using the pdf\_and\_print\_button master template, please replace it with the master template pdf\_and\_print\_button\_rawurlencode or pdf\_and\_print\_button\_realurl. See "Allocate one of the master\_templates" on page 15 above.

## FAQ

### Are frontend user sessions possible?

No. The PDF controller can't manage frontend user sessions.

### CSS compatibility list

#### CSS 2.1

Please call the html2ps/pdf documentation (see section html2ps documentation on page 24 above). Click the link:

- [CSS 2.1 compatibility list](#)

#### CSS 3

Please call the html2ps/pdf documentation (see section html2ps documentation on page 24 above). Click the link:

- [CSS 3 compatibility list](#)

### How do I add an image header to the PDF?

Please add to the flexform [Add content] to the field "header" an HTML img-tag, which is conform with XHTML. Conform means: the tag must be closed. Your URL have to be absolute and not relative.

This is a proper example:

```

```

### How do I check matched requirements?

Please refer to "Check system requirements" on page 23 above.

### How do I disable the Google Chrome PDF Viewer?

If you have trouble with the Google Chrome Browser, please disable it:

1. URL: chrome://plugins
2. Disable the "Chrome PDF Viewer"

### HTML5 – How to configure TYPO3

The PDF Controller or, to be precise, html2ps doesn't supports HTML5.

If you are provide a HTML5 website, please configure the page object of the PDF Controller like HTML4.

This is a proper example:

```
print < page
print {
  typeNum = 98
  config {
    doctype = xhtml_strict
    ...
  }
  ...
}
```

Be aware that the figure tag isn't compatible with HTML4.

## Further Information

### Other extensions published by Die Netzmacher

-  +AOE Linkhandler Configurator: Configure the AOE linkhandler supported by userinterfaces. Out-of-the-box templates for cal, org, tt\_news and tt\_products. Don't edit page TSconfig any longer.  
<http://typo3.org/extensions/repository/view/linkhandlerconf/>
-  autositemap: A smart site-map optimised for the footer. It groups menus in columns. Great menus will get two columns. Configuration is based on TypoScript HMENU.  
<http://typo3.org/extensions/repository/view/autositemap/>
-  Browser – TYPO3 without PHP. Develop your TYPO3 extension 8 times faster! You need one line TypoScript for a result list with a search form, a record browser and an index browser. Images are wrapped self-acting. SEO, Search Engine Optimization, is integrated. <http://typo3.org/extensions/repository/view/browser/>
-  Caddy – the TYPO3 shopping cart. You can use it for your own needs. You need a database with products or any other items only. You can install Caddy out of the box with one mouse click – see Quick Shop below.  
<http://typo3.org/extensions/repository/view/caddy/>
-  Deal! – TYPO3 Quick Shop interface for the marketplace ebay. Manage all items with TYPO3 and publish it on ebay. Amazon is under construction.  
<http://typo3.org/extensions/repository/view/deal/>
-  Flip it! offers lovely and smooth page flip transitions. It enables you to run over pages in PDF documents like in a real magazine. It is based on flash. Flipt it! can convert PDF documents to swf files automatically.  
<http://typo3.org/extensions/repository/view/flipit/>
-  Green Cars (Grüne Autos) - Database optimized for ecological cars. It is a case study and demonstrates, how to get a complex database with the browser (see above) in three hours only.  
[http://typo3.org/extensions/repository/view/green\\_cars/](http://typo3.org/extensions/repository/view/green_cars/)
-  Jobmarket is a catalogue with job offers. Views, the a-z-browser, the page-browser, the search, social bookmarks and a lot of other stuff can configured by the Browser plugin with the mouse. Job Market hasn't any PHP code, it should be easy to adapt it to your needs.  
[http://typo3.org/extensions/repository/view/job\\_market/](http://typo3.org/extensions/repository/view/job_market/)
-  Majordomo: For subscribing to and unsubscribing from a majordomo mailing list.  
<http://typo3.org/extensions/repository/view/majordomo/>
-  Organiser – TYPO3 for the lobby and the organisers. Handle news, events, staff, headquarters, locations, workshops and a calendar with one extension. Sell online tickets! Install the Organiser with one mouse click!  
<http://typo3-organiser.de/>
-  Quick Shop – the fastest shop in the history of TYPO3. Install it with one mouse click! Quick Shop is based on the browser (see above) and powermail.  
<http://typo3-quick-shop.de/>
-  PDF Controller: Easy to install. Add to your HTML page the PDF-controller-button. Link from the button to the controller. Adjust the controller by mouseclicks. The PDF Controller supports CSS 3.  
<http://typo3-pdfcontroller.de/>
-  Radial Search (Umkreissuche) – Enable the browsing through your data by geo location. 'Your data must have a latitude and a longitude. Address data can geocoded automatically by the Browser - TYPO3 without PHP.  
<http://typo3.org/extensions/repository/view/radialsearch/>
-  Route – Publish your routes with GoogleMaps or OpenStreetMap. Routes have points of interest (POI). You can categorise and filter both: routes and POI. Address data can geocoded automatically.  
<http://typo3.org/extensions/repository/view/route/>
-  seo\_dynamic\_tag: Search Engine Optimization for the title tag, the canonical tag and the meta tags author, description and keywords. Configuration by a user interface.  
[http://typo3.org/extensions/repository/view/seo\\_dynamic\\_tag/](http://typo3.org/extensions/repository/view/seo_dynamic_tag/)
-  TSconfig Pages and Users by extManager (extkey: tsconf): Configure the the eight most commonly used TSconfig porperties with the mouse - like page tree uids, activated extended view, activated clipboard, ...

<http://typo3.org/extensions/repository/view/tsconf/>

# Helpful suggestions

## Forum

If you have helpful suggestions, feel free to publish any question, bug or code snippet on

- <http://typo3-pdfcontroller.de/>

Look for the forum TYPO3 PDF Controller.

Posts are welcome in English and German.

## Credits

### typo3-lisardo.de

[2.0.0]

Peter Linzenkirchner contracted a part of the 2.0 upgrade:

- <http://www.typo3-lisardo.de/>

### web-arts.ch

[2.0.0]

Angelo Previtali contracted a part of the 2.0 upgrade:

- <http://www.web-arts.ch/>

### TYPO3 Security Team

[1.1.1]

Thanks to the TYPO3 Security Team for a commendable support - especially to Franz G. Jahn.

### Darren Gates and Konstantin Bournayev

[Release]

To Darren Gates and Konstantin Bournayev, who developed html2ps. If you like to donate to the html2ps project, visit this URL

- [http://www.tufat.com/s\\_html2ps\\_html2pdf.htm](http://www.tufat.com/s_html2ps_html2pdf.htm)

You will find a link for donation on the top of the page.

# Change log

- 1.4.3 **Manual**
  - \* #00000: Note frontend user sessions
- 1.4.1 **Bugfix**
  - \* #00000: Wrong TypoScript snippet is now proper at  
"Button for PDF download and for Printing" on page 15 above.
- 1.3.0 **Bugfix**
  - \* #36862: Additional Parameter has to encoded since TYPO 4.6  
Marker ###ADDITIONALPARAMS### is handled by rawurlencode( )  
Effected file:  
\* pi2/class.tx\_pdfcontroller\_pi2.php

**Improvement**

  - \* #00000: Two master template are added. One for a rawurlencode case, one for a realUrl case.
  - \* #00000: DRS got prompts for marker and typolink
  - \* #00000: Manual is updated
- 1.2.1 **Bugfix**
  - \* #36857: Missing index in systemcheck.php: JPG Support  
Effected file:  
\* res/html2ps\_v2043/public\_html/demo/systemcheck.php
- 1.2.0 **New Features**
  - \* #36513: Enable Batch Processing  
Coded by Jonas Goetze <http://forge.typo3.org/users/4345>
  - \* #36228: Display PHP error messages – configurable by the plugin / flexform  
Coded by Ulfried Herrmann <http://herrmann.at.die-netzmacher.de>
- 1.1.4 **Bugfix**
  - \* #34939: Get rid of PHP notice logs  
Thanks to Alexander Krimm for the bug report
- 1.1.3 **Improvement**
  - \* #34858: Usage of \$ICON\_TYPES is deprecated since 4.4.  
Thanks to Rene Staecker <http://forge.typo3.org/users/1993>
- 1.1.2 **Bugfix**
  - \* #00000: SQL error in the query in context with development tools  
Thanks to Borries Jensen, who send the Bugfix.
  - \* #00000: After clearing the dirs cache, out and temp each folder get a file index.html
- 1.1.1 **New Feature**
  - \* #33851: SEO rel="nofollow"

**Improvements**

  - \* #00000: pi1/flexform\_locallang.xml
- 1.1.0 **Security fix**
- 1.0.1 **Improvements**
  - \* #32516: Systemcheck should check fonts in directory of pdfcontroller\_fonts
  - \* #32513: typeNum print template is configurable by the TypoScript constant editor
  - \* #32482: PDF Controller suggests to install Fonts

**Bugfixes**

  - \* #32518: Wrong field name for proxy in the flexform. Thanks to Borries Jensen
  - \* #31191: Missing folders temp and out. Thanks to Borries Jensen
  - \* #31190: Parameter are missing - without RealURL only. Thanks to Borries Jensen
- 1.0.0 **Initial release**



# Illustration Index

Illustration 1: Download dialog after the mouse click on the PDF button .....	3
Illustration 2: 1: PDF button and print button generated by the PDF Controller. 2: PDF file in a PDF viewer. ....	3
Illustration 3: PDF Controller User Interface: Properties of the HTML page .....	4
Illustration 4: PDF Controller User Interface: Properties of the PDF document .....	4
Illustration 5: PDF Controller Button .....	5
Illustration 6: Pages and plugin .....	8
Illustration 7: Page contains the plugin ... ..	9
Illustration 8: Pages and plugin .....	10
Illustration 9: TypoScript Object Browser .....	10
Illustration 10: Inspect your TypoScript .....	13
Illustration 11: die-exen.de HTML page .....	15
Illustration 12: die-exen.de optimized for printing .....	15
Illustration 13: TypoScript Constant Editor .....	16
Illustration 14: Result of the tutorial II .....	18
Illustration 15: PDF Controller with the tab [Debugging] .....	22
Illustration 16: Report with checked system requirements .....	23
Illustration 17: Form for sending an URL manually .....	23
Illustration 18: html2ps documentation .....	24
Illustration 19: Report with parameters, which will send to html2ps .....	24
Illustration 20: PDF Controller in the extension manager .....	25
Illustration 21: DRS report .....	26

# Alphabetical Index

|

|