

Project 3: Facial Expression Predictive Modeling

Jingbin Cao, Chuanchuan Liu, Dennis Shpits, Yingyao Wu, Zikun Zhuang

```
## Warning: package 'R.matlab' was built under R version 4.0.4

## Warning: package 'gbm' was built under R version 4.0.4

## Warning: package 'DMwR' was built under R version 4.0.4

## Warning: package 'OpenImageR' was built under R version 4.0.4

## Warning: package 'randomForest' was built under R version 4.0.4

## Warning: package 'xgboost' was built under R version 4.0.4

## Warning: package 'ROSE' was built under R version 4.0.4

## Warning: package 'caTools' was built under R version 4.0.4

## Warning: package 'prediction' was built under R version 4.0.4

## Warning: package 'MASS' was built under R version 4.0.4
```

Step 0 set work directories

```
set.seed(2020)
```

Provide directories for training images. Training images and Training fiducial points will be in different subfolders.

```
train_dir <- "../data/train_set/" # This will be modified for different data sets.
train_image_dir <- paste(train_dir, "images/", sep="")
train_pt_dir <- paste(train_dir, "points/", sep="")
train_label_path <- paste(train_dir, "label.csv", sep="")
```

Step 1: set up controls for evaluation experiments.

In this chunk, we have a set of controls for the evaluation experiments.

- (T/F) cross-validation on the training set
- (T/F) reweighting the samples for training set

- (number) K, the number of CV folds
- (T/F) process features for training set
- (T/F) run evaluation on an independent test set
- (T/F) process features for test set
- (T/F) run improved gbm model
- (number) gbm.numtrees, the number of trees to use in GBM baseline
- (T/F) return polynomial features matrix only
- (T/F) add polynomial features to starter code features matrix
- (T/F) run svm model
- (T/F) perform model selection over a list of svm models
- (T/F) run evaluation on the test set
- (T/F) run random forest model
- (T/F) rebalance training set
- (T/F) train random forest model
- (T/F) run evaluation on the test set
- (T/F) tune hyperparameters for random forest model
- (T/F) run ridge model
- (0/1) alpha, alpha=0 for ridge regression, alpha=1 for lasso regression
- (T/F) train ridge model
- (T/F) run PCA+LDA model
- (T/F) run different principal components
- (T/F) run LDA on training set
- (T/F) run evaluation on the test set

```
run.presentation.day <- TRUE #presentation day flag. No training. Generate a csv file
run.cv <- TRUE # run cross-validation on the training set
sample.reweight <- TRUE # run sample reweighting in model training
K <- 5 # number of CV folds
run.feature.train <- TRUE # process features for training set
run.test <- TRUE # run evaluation on an independent test set
run.feature.test <- TRUE # process features for test set

# gbm
run.gbm.train <- TRUE # gbm(improved) is the chosen advanced model
run.gbm.test <- TRUE # gbm(improved) is the chosen advanced model
gbm.numtrees <- 1000 #number of trees to use in gbm

#features options
run.poly.feature <- TRUE # process poly features
```

```

run.add.poly.feature <- TRUE # and poly features to features matrix

# svm
run.svm <- FALSE # svm is the chosen advanced model
model.selection <- FALSE # perform model selection on svm models
run.svm.test <- TRUE # evaluate performance on the test set

# Random Forest Model with new feature
run.rf <- TRUE
train.rf <- TRUE # Train Random Forest Model
test.rf <- TRUE # Test Random Forest Model

# Random Forest Model with old feature
run.rf.old.feature <- FALSE
train.rf.old.feature <- FALSE
test.rf.old.feature <- TRUE

# ridge
run.ridge <- FALSE # ridge is the chosen advanced model
alpha <- 0 # ridge regression
train.ridge <- TRUE # train ridge model

# PCA + LDA
run.pca_lda <- FALSE # PCA + LDA is the chosen advanced model
run.select_PC <- TRUE #run different PCs
run.lda <- TRUE # run lda on the training set
run.pca_lad.test <- TRUE # evaluate performance on the test set

```

Using cross-validation or independent test set evaluation, we compare the performance of models with different specifications.

Step 2: import data and train-test split

```

#train-test split
info <- read.csv(train_label_path)
n <- nrow(info) #get number of rows from csv
n_train <- round(n*(4/5), 0) #use 4/5 amount of data for training
train_idx <- sample(info$Index, n_train, replace = F) #grab indexes used for training
test_idx <- setdiff(info$Index, train_idx) # get indexes not used for training

```

Fiducial points are stored in matlab format. In this step, we read them and store them in a list.

```

#function to read fiducial points
#input: index
#output: matrix of fiducial points corresponding to the index
n_files <- length(list.files(train_image_dir, '*jpg'))
readMat.matrix <- function(index){
  return(round(readMat(paste0(train_pt_dir, sprintf("%04d", index), ".mat"))[[1]],0))
}

if (run.presentation.day){

```

```

test_idx <- c(1:n_files) #sample(n_files, n_files, replace = F)
run.gbm.train <- FALSE
run.feature.train <- FALSE
run.gbm.test <- TRUE

run.rf <- TRUE
train.rf <- FALSE
test.rf <- TRUE
}

#load fiducial points
fiducial_pt_list <- lapply(1:n_files, readMat.matrix)
save(fiducial_pt_list, file="../output/fiducial_pt_list.RData")

```

Step 3: construct features and responses

- The follow plots show how pairwise distance between fiducial points can work as feature for facial emotion recognition.
 - In the first column, 78 fiducials points of each emotion are marked in order.
 - In the second column distributions of vertical distance between right pupil(1) and right brow peak(21) are shown in histograms. For example, the distance of an angry face tends to be shorter than that of a surprised face.
 - The third column is the distributions of vertical distances between right mouth corner(50) and the midpoint of the upper lip(52). For example, the distance of an happy face tends to be shorter than that of a sad face.

`feature.R` is the wrapper for all feature engineering functions and options. The function `feature()` have options that correspond to different scenarios for the project and produces an R object that contains features and responses that are required by all the models that are going to be evaluated later.

- `feature.R`
- Input: list of images or fiducial point
- Output: an RData file that contains extracted features and corresponding responses

```

source("../lib/feature.R")
tm_feature_train <- NA
gbm_tm_feature_train <- NA
if(run.feature.train){
  tm_feature_train <- system.time(dat_train<-feature(fiducial_pt_list,train_idx, run.poly.feature, run.
  gbm_tm_feature_train <- system.time(gbm_dat_train<-feature(fiducial_pt_list,train_idx, FALSE, FALSE))
  save(gbm_dat_train, file="../output/gbm_feature_train.RData")
  save(dat_train, file="../output/feature_train.RData")
}else{
  #load(file="../output/feature_train.RData")
  #load(file="../output/gbm_feature_train.RData")
}

```

NULL

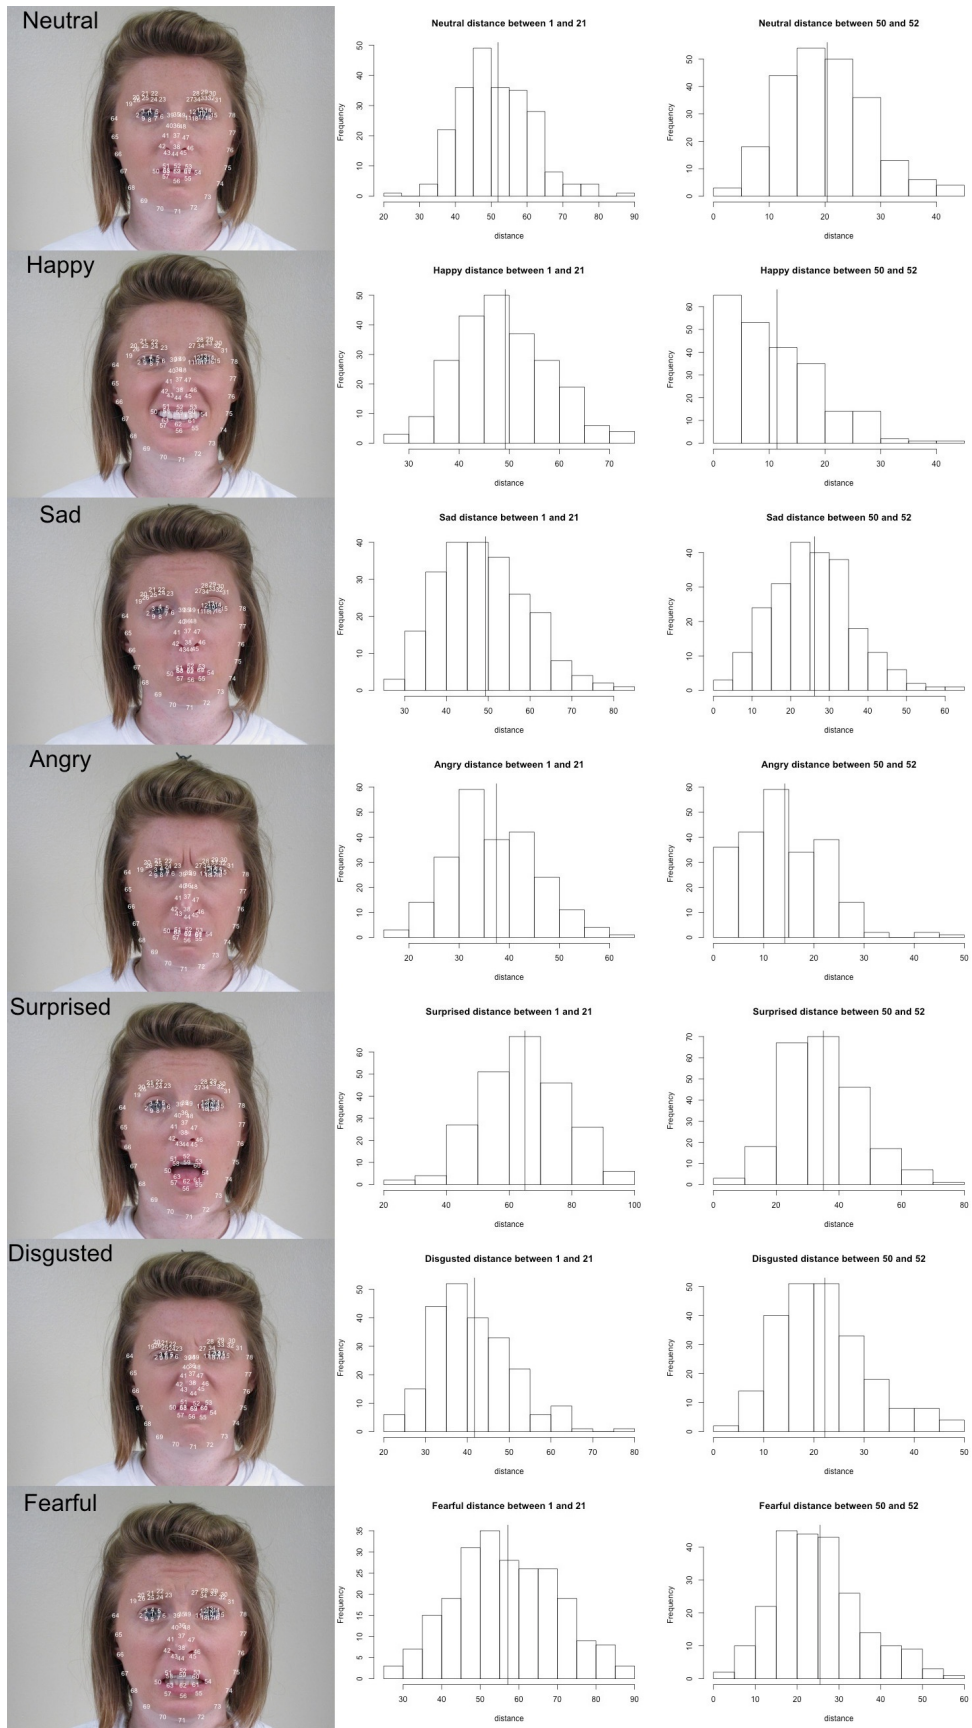


Figure 1: Figure1

```

tm_feature_test <- NA
gbm_tm_feature_test <- NA
if(run.feature.test){
  tm_feature_test <- system.time(dat_test <- feature(fiducial_pt_list, test_idx, run.poly.feature, run.
  gbm_tm_feature_test <- system.time(gbm_dat_test <- feature(fiducial_pt_list, test_idx, FALSE, FALSE))
  save(gbm_dat_test, file="../output/gbm_feature_test.RData")
  save(dat_test, file="../output/feature_test.RData")
}else{
  load(file="../output/feature_test.RData")
  load(file="../output/gbm_feature_test.RData")
}

```

Step 4: train classification models with training features and responses; run test on test images

Call the train model and test model from library.

train.R and test.R are wrappers for all model training steps and classification/prediction steps.

- train.R
 - Input: a data frame containing features and labels and a parameter list.
 - Output: a trained model
- test.R
 - Input: the fitted classification model using training data and processed features from testing images
 - Input: an R object that contains a trained classifier.
 - Output: training model specification
- In this Starter Code, we use logistic regression with LASSO penalty to do classification.

```

source("../lib/train.R")
source("../lib/test.R")

```

Baseline Model

——THIS IS TO SEPARATE EACH MODEL. THIS IS TO SEPARATE EACH MODEL. THIS IS TO SEPARATE EACH MODEL.——

Advanced Model 1: Improved GBM Model

- Model Training

```

if (run.gbm.train){
  if (sample.reweight){

    gbm_dat_train$label <- as.factor(gbm_dat_train$label)
    dat_train_balanced_gbm <- SMOTE(label ~ ., gbm_dat_train, perc.over = 100, perc.under=200)
    #save(dat_train_balanced_rose, file="../output/balanced_data.RData")
    table(dat_train_balanced_gbm$label)
  }
}

```

```

    gbm_tm_train <- system.time(gbm_train <- train_gbm(dat_train_balanced_gbm, s=0.1, K=K, n=gbm.numtrees)
  } else {
    gbm_tm_train <- system.time(gbm_train <- train_gbm(gbm_dat_train, s=0.1, K=K, n=gbm.numtrees, w = NU
  }

  # plot the performance
  best.iter.oob <- gbm.perf(gbm_train, method="OOB") # returns out-of-bag estimated best number of trees
  print(best.iter.oob)
  best.iter.cv <- gbm.perf(gbm_train, method="cv") # returns K-fold cv estimate of best number of trees
  print(best.iter.cv)

  saveRDS(gbm_train, "../output/gbm_model.rds")
  save(gbm_tm_train, best.iter.cv, file="../output/gbm_outputs.RData")
}

```

- Evaluation on Test Set

```

if(run.gbm.test){
  load(file="../output/gbm_outputs.RData")
  gbm_tm_test = NA
  feature_test <- as.matrix(gbm_dat_test[, 1:ncol(gbm_dat_test)-1])

  gbm_train <- readRDS("../output/gbm_model.rds")
  gbm_tm_test <- system.time(prob_pred_baseline<-test_gbm(gbm_train, as.data.frame(feature_test), n=best.

  label_pred_baseline <- colnames(prob_pred_baseline)[apply(prob_pred_baseline, 1, which.max)]
}

```

show gbm accuracy and AUC

```

if (run.gbm.test){
  load(file="../output/gbm_outputs.RData")
  gbm_accu <- mean(gbm_dat_test$label == label_pred_baseline)
  gbm_auc <- WeightedROC(as.numeric(label_pred_baseline), gbm_dat_test$label)
  gbm_auc = WeightedAUC(gbm_auc)
  cat("Time for constructing gbm training features=", gbm_tm_feature_train[1], "s \n")
  cat("Time for constructing gbm testing features=", gbm_tm_feature_test[1], "s \n")
  cat("The AUC of gbm model is", gbm_auc, ".\n")
  cat("The accuracy of GBM baseline model is", gbm_accu*100, "%.\n")
  cat("Time for training gbm model=", gbm_tm_train[1], "s \n")
  cat("Time for testing model=", gbm_tm_test[1], "s \n")
}

```

```

## Time for constructing gbm training features= NA s
## Time for constructing gbm testing features= 3.99 s
## The AUC of gbm model is 0.8848834 .
## The accuracy of GBM baseline model is 87.7 %.
## Time for training gbm model= 451.15 s
## Time for testing model= 60.72 s

```

——THIS IS TO SEPARATE EACH MODEL. THIS IS TO SEPARATE EACH MODEL. THIS IS TO SEPARATE EACH MODEL.——

Advanced Model 2: Random Forest

The second advanced model is random forest. Here we use the datasets that are extracted by new feature functions. We used two models trained by both imbalanced and balanced dataset. We used SMOTE function to balance both training and testing data. For tuning the model, we set mtry = 308, tree number = 500, and node size = 10 for the RF model using balanced data, and we set mtry = 308, tree number = 1500, and node size = 30 for the RF model using imbalanced data. The evaluation of the model is shown at the end of this section.

The tuning part is in a separate file named “appendix_tune_rf.rmd” in doc folder. Please feel free to check that to see the tuning process.

We also trained random forest model with the datasets that are extracted by old feature functions. That is in part 6. Thank you for reading!

```
if(run.rf){  
  #balanced data  
  # dat_train_balanced_rose<-ROSE(label~., dat_train,seed=2020)$data (ROSE balancing method is suck in the  
  # dat_test_balanced_rose <- ROSE(label~., dat_test, seed=2020)$data  
  
  ## Training RF  
  source("../lib/random_forest.R")  
  if(train.rf){  
    rf_dat_train <- dat_train  
    rf_dat_train$label <- as.factor(rf_dat_train$label)  
    dat_train_balanced_SMOTE <- SMOTE(label ~ ., rf_dat_train, perc.over = 100, perc.under=200)  
    # Train RF by balanced data  
    time.rf.train.final.balanced <- system.time(random_forest_fit_final_balanced <- random_forest_train(d  
    save(random_forest_fit_final_balanced, file = "../output/rf_train_final_balanced.RData")  
    save(time.rf.train.final.balanced, file = "../output/rf_train_final_time_balanced.RData")  
    # Train RF by imbalanced data  
    time.rf.train.final.imbalanced <- system.time(random_forest_fit_final_imbalanced <- random_forest_tra  
    save(time.rf.train.final.imbalanced, file = "../output/rf_train_final_time_imbalanced.RData")  
    save(random_forest_fit_final_imbalanced, file = "../output/rf_train_final_imbalanced.RData")  
  }else{  
    load("../output/rf_train_final_balanced.RData")  
    load("../output/rf_train_final_time_balanced.RData")  
    load("../output/rf_train_final_time_imbalanced.RData")  
    load("../output/rf_train_final_imbalanced.RData")  
  }  
  
  # Evaluation:  
  # Balanced:  
  if(test.rf){  
    rf_dat_test <- dat_test  
    rf_dat_test$label <- as.numeric(rf_dat_test$label)  
  
    time.rf.test.final.balanced <- system.time(rf_predicted_balanced <- as.numeric(as.vector(random_forest_  
    rf_accuracy_balanced <- mean(round(rf_predicted_balanced == rf_dat_test$label))  
    tpr.fpr.balanced <- WeightedROC(as.numeric(rf_predicted_balanced),rf_dat_test$label)  
    rf_AUC_balanced <- WeightedAUC(tpr.fpr.balanced)  
  
    cat("AUC for tuned Random Forest(balanced): ", rf_AUC_balanced,".\n")  
    cat("Accuracy for tuned Random Forest(balanced)", rf_accuracy_balanced*100,"%.\n")  
    cat("Training time for tuned Random Forest: ", time.rf.train.final.balanced[1], "s.\n")  
  }  
}
```



```

cat("Testing time for tuned Random Forest: ", time.rf.test.final.balanced[1], "s.\n")
cat("    ", "\n")

# Imbalanced:
time.rf.test.final.imbalanced <- system.time(rf_predicted_imbalanced <- as.numeric(as.vector(random_forest
rf_accuracy_imbalanced <- mean(round(rf_predicted_imbalanced == rf_dat_test$label))
tpr.fpr.imbalanced <- WeightedROC(as.numeric(rf_predicted_imbalanced), rf_dat_test$label)
rf_AUC_imbalanced <- WeightedAUC(tpr.fpr.imbalanced)

cat("AUC for tuned Random Forest(imbalanced): ", rf_AUC_imbalanced, ".\n")
cat("Accuracy for tuned Random Forest(imbalanced)", rf_accuracy_imbalanced*100, "%.\n")
cat("Training time for tuned Random Forest: ", time.rf.train.final.imbalanced[1], "s.\n")
cat("Testing time for tuned Random Forest: ", time.rf.test.final.imbalanced[1], "s.\n")
}
}

```

```

## AUC for tuned Random Forest(balanced):  0.9096997 .
## Accuracy for tuned Random Forest(balanced) 90.36667 %.
## Training time for tuned Random Forest:  585.59 s.
## Testing time for tuned Random Forest:  2.5 s.
##
## AUC for tuned Random Forest(imbalanced):  0.8373763 .
## Accuracy for tuned Random Forest(imbalanced) 93.46667 %.
## Training time for tuned Random Forest:  3183.64 s.
## Testing time for tuned Random Forest:  6.17 s.

```

We think RF model do not need Cross-Validation. Here is a snippet from Breiman's official documentation: In random forests, there is no need for cross-validation or a separate test set to get an unbiased estimate of the test set error. It is estimated internally, during the run, as follows: Each tree is constructed using a different bootstrap sample from the original data. About one-third of the cases are left out of the bootstrap sample and not used in the construction of the k th tree. Put each case left out in the construction of the k th tree down the k th tree to get a classification. In this way, a test set classification is obtained for each case in about one-third of the trees. At the end of the run, take j to be the class that got most of the votes every time case n was oob. The proportion of times that j is not equal to the true class of n averaged over all cases is the oob error estimate. This has proven to be unbiased in many tests.

——THIS IS TO SEPARATE EACH MODEL. THIS IS TO SEPARATE EACH MODEL. THIS IS TO SEPARATE EACH MODEL.——

Advanced Model 3: SVM Model

- Balance the Training Set

If the given data set is imbalanced, we apply SMOTE to rebalance the data and use it to train our svm models.

```

if(run.svm){
  tm_svm_rebalanced_train <- NA
  if(sample.reweight){
    dat_train$label = as.factor(dat_train$label)
    tm_svm_rebalanced_train <- system.time(svm_training_data <- SMOTE(label ~ ., data = dat_train))
  }
}

```

```

    save(tm_svm_rebalanced_train, file="../output/tm_svm_rebalanced_train.RData")
  } else {
    svm_training_data <- dat_train
    tm_svm_rebalanced_train <- tm_feature_train
  }
}

```

- Model Selection

Tuning hyperparameters for both linear and radial basis kernel and select the kernel method that produces the highest AUC and accuracy among the two methods.

```

if(run.svm){
  set.seed(2020)
  tm_svm_linear_mod <- NA
  tm_svm_radial_mod <- NA
  if(model.selection){
    svm_model_auc <- rep(NA, 2)
    svm_model_accu <- rep(NA, 2)
    ##### linear kernel
    if(run.cv){
      best.linear.cost <- svm_linear_cost_tune(svm_training_data)
      cat("The best cost for svm model with linear kernel is: ", best.linear.cost$best.parameters$cost)
      svm.linear.train.start = proc.time()
      tm_svm_linear_mod <- system.time(svm_linear_mod <- svm_linear_train(svm_training_data, 0.01, K))
      svm.linear.train.end = proc.time()
      svm.linear.tm = svm.linear.train.end - svm.linear.train.start
      save(svm_linear_mod, file="../output/svm_linear_mod.RData")
      save(svm.linear.tm[[3]], file="../output/tm_svm_linear_mod.RData")
    }
    svm_linear_pred <- svm_test(svm_linear_mod, svm_training_data, FALSE)
    # evaluate performance on linear kernel
    svm_model_accu[1] <- mean(round(svm_linear_pred == svm_training_data$label))
    tpr.fpr_linear <- WeightedROC(as.numeric(svm_linear_pred), svm_training_data$label)
    svm_model_auc[1] <- WeightedAUC(tpr.fpr_linear)

    ##### radial basis kernel
    if(run.cv){
      #best.radial.cost <- svm_radial_cost_tune(svm_training_data)
      svm.rbf.train.start = proc.time()
      tm_svm_radial_mod <- system.time(svm_radial_mod <- svm_radial_train(svm_training_data, 1, K))
      svm.rbf.train.end = proc.time()
      svm.rbf.tm = svm.rbf.train.end - svm.rbf.train.start
      save(svm_radial_mod, file="../output/svm_radial_mod.RData")
      save(svm.rbf.tm[[3]], file="../output/tm_svm_radial_mod.RData")
    }
    svm_radial_pred <- svm_test(svm_radial_mod, svm_training_data, FALSE)
    # evaluate performance on rbf kernel
    svm_model_accu[2] <- mean(round(svm_radial_pred == svm_training_data$label))
    tpr.fpr_default <- WeightedROC(as.numeric(svm_radial_pred), svm_training_data$label)
    svm_model_auc[2] <- WeightedAUC(tpr.fpr_default)

    # table to display results for the two kernel methods

```

```

svm_res = matrix(rep(NA,6),ncol=3)
svm_res[,1] = svm_model_accu
svm_res[,2] = svm_model_auc
svm_res[,3] = c(svm.linear.tm[3], svm.rbf.tm[3])
colnames(svm_res) = c("Accuracy", "AUC", "Running Time")
rownames(svm_res) = c("linear", "radial basis")
save(svm_res, file="../output/svm_model_selection.RData")
} else {
  if(!run.presentation.day){
    tm_svm_radial_mod <- system.time(svm_radial_mod <- svm_radial_train(svm_training_data, 1, K))
  } else {
    load(file="../output/svm_radial_mod.RData")
    load(file="../output/svm_model_selection.RData")
    svm_res
  }
}
}

```

Since radial basis kernel has higher accuracy and AUC than linear kernel, we will choose radial basis as our kernel method for training the svm model.

- Evaluation on Testing Data

```

if(run.svm){
  svm_testing_data <- dat_test
  if(run.svm.test){
    ## rbf
    tm_svm_rbf_test <- system.time(svm_rbf_pred <- svm_test(svm_radial_mod, svm_testing_data, FALSE))
    svm_test_accu = mean(round(svm_rbf_pred == svm_testing_data$label))
    tpr.fpr.rbf <- WeightedROC(as.numeric(svm_rbf_pred), svm_testing_data$label)
    svm_test_auc = WeightedAUC(tpr.fpr.rbf)
    save(tm_svm_rbf_test, file="../output/tm_svm_rbf_test.RData")

    cat("The accuracy of svm model is", svm_test_accu*100, "%.\n")
    cat("The AUC of svm model is", svm_test_auc, ".\n")
  }
}

```

- Summarize Running Time

```

if(run.svm){
  cat("Time for training svm model =", svm.rbf.tm[[3]], "s \n")
  cat("Time for testing svm model =", tm_svm_rbf_test[1], "s \n")
}

```

——THIS IS TO SEPARATE EACH MODEL. THIS IS TO SEPARATE EACH MODEL. THIS IS TO SEPARATE EACH MODEL.——

Advanced Model 4: Ridge Model

- Apply Constructed Ridge Model to the Training Set

```

if(run.ridge){
  tm_ridge_train <- NA
  if (train.ridge){
    dat_train_rebalanced <- ROSE(label ~ ., data = dat_train, seed=2020)$data
    tm_ridge_train <- system.time(ridge_cv_model<-ridge_train(train_data=dat_train_rebalanced, alpha=alpha))
    save(ridge_cv_model, file="../output/ridge_cv_model.RData")
    save(tm_ridge_train, file="../output/ridge_train_time.RData")
  } else {
    load(file="../output/ridge_cv_model.RData")
    load(file="../output/ridge_train_time.RData")
  }
}

```

- Use Cross-Validation to Choose the Optimal Lambda with Smallest MSE

```

if(run.ridge){
  if (run.cv){
    set.seed(2020)
    dat_train_rebalanced <- ROSE(label ~ ., data = dat_train, seed=2020)$data
    feature_train = as.matrix(dat_train_rebalanced[, -dim(dat_train_rebalanced)[2]])
    label_train = as.integer(dat_train_rebalanced$label)
    ridge_model = cv.glmnet(x=feature_train, y=label_train, alpha=alpha, nfolds=K, lambda=lambda)
    opt_lambda = ridge_model$lambda.min
    save(opt_lambda, file="../output/ridge_optimal_lambda.RData")
  } else {
    load(file="../output/ridge_optimal_lambda.RData")
  }
}

```

- Predict on Testing Set with the Optimal Lambda

```

if(run.ridge){
  tm_ridge_test = NA
  if(run.test){
    load("../output/ridge_cv_model.RData")
    dat_test_rebalanced <- ROSE(label ~ ., data = dat_test, seed=2020)$data
    feature_test <- as.matrix(dat_test_rebalanced[, -dim(dat_test_rebalanced)[2]])
    tm_ridge_test <- system.time(label_pred<-as.integer(ridge_test(model=ridge_cv_model, features=feature_test)))
    save(tm_ridge_test, file="../output/ridge_test_time.RData")
  } else{
    load(file="../output/ridge_test_time.RData")
  }
}

```

- Summarize Running Time

```

if(run.ridge){
  cat("Time for constructing training features=", tm_feature_train[1], "s \n")
  cat("Time for constructing testing features=", tm_feature_test[1], "s \n")
  cat("Time for training ridge model=", tm_ridge_train[1], "s \n")
  cat("Time for testing ridge model=", tm_ridge_test[1], "s \n")
}

```

- Evaluation on Independent Testing Data

```
if(run.ridge){
  load("../output/ridge_cv_model.RData")
  dat_test_rebalanced <- ROSE(label ~ ., data = dat_test, seed=2020)$data
  feature_test <- as.matrix(dat_test_rebalanced[, -dim(dat_test_rebalanced)[2]])
  label_pred = as.integer(predict(ridge_cv_model, s=opt_lambda, newx=feature_test, type='class'))
  label_test = as.integer(dat_test_rebalanced$label)
  ridge_accuracy = mean(round(label_test== label_pred))
  cat("The accuracy of the ridge model is", ridge_accuracy*100, "%.\n")
  ridge_AUC = auc(roc(label_pred,label_test))
  cat("The AUC of the ridge model is", ridge_AUC, ".\n")
}
```

——THIS IS TO SEPARATE EACH MODEL. THIS IS TO SEPARATE EACH MODEL. THIS IS TO SEPARATE EACH MODEL.——

Advanced Model 5: PCA + LDA

- Rebalance Training Set

```
if(run.pca_lda){
  if(sample.reweight){
    dat_train$label <- as.factor(dat_train$label)
    balanced_train_data <- SMOTE(label~.,data = dat_train)
    save(balanced_train_data, file="../output/feature_balanced_train.RData")
  } else {
    load(balanced_train_data, file="../output/feature_train.RData")
  }
}
```

- Perform PCA for Dimension Reduction

Since there are over 6000 features, we implement the PCA method to reduce dimension according to the covariance matrix. We only retain PCs with large variance.

```
if(run.pca_lda){
  balanced_test_data <- dat_test
  if(run.select_PC){
    #separate the features from label
    dat_train_new <- balanced_train_data[, -dim(balanced_train_data)[2]]
    dat_test_new <- balanced_test_data[, -dim(balanced_test_data)[2]]
    #create a vector contain target number of PCs
    num.pca <- c(10,50,500,1000)
    train_pca <- function(num.pca){
      for(i in 1:length(num.pca)){
        #start time for training the model
        train.model.start = proc.time()
        #run PCA
        pca <- prcomp(dat_train_new)
        #store for each potential PC

```

```

train_pca <- data.frame(pca$x[,1:num.pca[i]], label = balanced_train_data[dim(balanced_train_data, 2) == i])
pred_pca <- predict(pca, dat_test_new)
test_pca <- data.frame(pred_pca[,1:num.pca[i]], label = balanced_test_data[dim(balanced_test_data, 2) == i])
#fitting the lda model
lda_pca <- lda(label ~ ., data = train_pca)
#stop time for training the model
train.model.end = proc.time()
#start time for testing the model
test.model.start = proc.time()
#predict lda model
lda_pred_pca = predict(lda_pca, test_pca[-dim(test_pca)[2]])
#end time for testing the model
test.model.end = proc.time()
#test accuracy
test_accuracy=confusionMatrix(lda_pred_pca$class, test_pca$label)$overall[1]
print(list(l1=train.model.end - train.model.start,
           l2=test.model.end - test.model.start,
           l3=test_accuracy))
}
}
train_pca(num.pca)
}
}

```

By comparing the training time, test time and accuracy, we use model with 500 PCs.

- Model Training

```

if(run.pca_lda){
  train.model.start = proc.time()
  if(run.lda.train){
    pca_500 <- prcomp(balanced_train_data[, -dim(balanced_train_data)[2]])
    train_pca_500 <- data.frame(pca_500$x[,1:500], label = balanced_train_data[dim(balanced_train_data, 2) == 1])
    pred_pca_500 <- predict(pca_500, balanced_test_data[, -dim(balanced_test_data)[2]])
    test_pca_500 <- data.frame(pred_pca_500[,1:500], label = balanced_test_data[dim(balanced_test_data, 2) == 1])
    save(train_pca_500, file="../output/feature_pca_train.RData")
    save(test_pca_500, file="../output/feature_pca_test.RData")
  } else {
    load(train_pca_50, file="../output/feature_pca_train.RData")
    load(test_pca_50, file="../output/feature_pca_test.RData")
  }
  #calculate the training time
  lda_pca_50 <- lda(label ~ ., data = train_pca_50, cv = TRUE)
  train.model.end = proc.time()
}

```

- Calculate the Training and Testing Accuracy of LDA Model

```

if(run.pca_lda){
  test.model.start = proc.time()
  pred_train_lda <- predict(lda_pca_500, train_pca_500[-dim(train_pca_500)[2]])
  accu_train_lda <- mean(pred_train_lda$class == train_pca_500$label)
}

```

```

cat("The training accuracy of model: LDA", "is", accu_train_lda*100, "%.\n")
#calculating the test time
if(run.test){
  pred_test_lda <- predict(lda_pca_500, test_pca_500)
}
test.model.end = proc.time()
save(pred_test_lda, file="../output/fit_train.RData")
accu_test_lda <- mean(pred_test_lda$class == test_pca_500$label)
cat("The accuracy of model: LDA", "is", accu_test_lda*100, "%.\n")
tpr.fpr <- WeightedROC(as.numeric(pred_test_lda$class), test_pca_500$label)
lda_auc = WeightedAUC(tpr.fpr)
cat("The AUC of model: LDA is", lda_auc, ".\n")
}

```

- Summarize Running Time

Prediction performance matters, so does the running times for constructing features and for training the model, especially when the computation resource is limited.

```

if(run.pca_lda){
  tm_train <- train.model.end - train.model.start
  tm_test <- test.model.end - test.model.start
  cat("Time for constructing training features=", tm_feature_train[1], "s \n")
  cat("Time for constructing testing features=", tm_feature_test[1], "s \n")
  cat("Time for training model=", tm_train[1], "s \n")
  cat("Time for testing model=", tm_test[1], "s \n")
}

```

——THIS IS TO SEPARATE EACH MODEL. THIS IS TO SEPARATE EACH MODEL. THIS IS TO SEPARATE EACH MODEL.——

Advanced Model 6: Random Forest (RF) Model with old feature:

The sixth advanced model is random forest. Here we use the datasets that are extracted by old feature functions. We used two models trained by both imbalanced and balanced dataset. We used ROSE function to balance both training and testing data. For tuning the model, we set mtry = 308, tree number = 500, and node size = 10 for the RF model using balanced data, and we set mtry = 308, tree number = 1500, and node size = 30 for the RF model using imbalanced data. The evaluation of the model is shown at the end of this section, and we will compare this model with the RF model trained by new features.

```

if(run.rf.old.feature){
  source("../lib/random_forest_old_feature.R")
  old_feature <- function(input_list = fiducial_pt_list, index){
    old_pairwise_dist <- function(vec){
      return(as.vector(dist(vec)))
    }
    old_pairwise_dist_result <-function(mat){
      return(as.vector(apply(mat, 2, old_pairwise_dist)))
    }
    old_pairwise_dist_feature <- t(sapply(input_list[index], old_pairwise_dist_result))
    dim(old_pairwise_dist_feature)
  }
}

```

```

old_pairwise_data <- cbind(old_pairwise_dist_feature, info$label[index])
colnames(old_pairwise_data) <- c(paste("feature", 1:(ncol(old_pairwise_data)-1), sep = ""), "label")
old_pairwise_data <- as.data.frame(old_pairwise_data)
old_pairwise_data$label <- as.factor(old_pairwise_data$label)
return(feature_df = old_pairwise_data)
}

old_tm_feature_train <- NA
if(run.feature.train){
  old_tm_feature_train <- system.time(old_dat_train <- old_feature(fiducial_pt_list, train_idx))
  save(old_dat_train, file = "../output/feature_train_old.RData")
}else{
  load(file = "../output/feature_train_old.RData")
}
old_tm_feature_test <- NA
if(run.feature.test){
  old_tm_feature_test <- system.time(old_dat_test <- old_feature(fiducial_pt_list, test_idx))
  save(old_dat_test, file = "../output/feature_test_old.RData")
}else{
  load(file = "../output/feature_test_old.RData")
}
# transfer label column from factor to numeric

old_dat_train$label <- as.numeric(old_dat_train$label)
old_dat_test$label <- as.numeric(old_dat_test$label)

# Balance data
# dat_train_balanced_rose<-ROSE(label~., dat_train,seed=2020)$data (ROSE balancing method is suck in the
# dat_test_balanced_rose <- ROSE(label~., dat_test, seed=2020)$data
# old_rf_dat_train <- old_dat_train
# old_rf_dat_test <- old_dat_test
# old_rf_dat_train$label <- as.factor(old_rf_dat_train$label)
# old_rf_dat_test$label <- as.numeric(old_rf_dat_test$label)
gbm_dat_train$label <- as.factor(gbm_dat_train$label)
dat_train_balanced_gbm <- SMOTE(label ~ ., gbm_dat_train, perc.over = 100, perc.under=200)
old_dat_train_balanced_SMOTE <- dat_train_balanced_gbm

# Train Model
if(train.rf.old.feature){
  # Balanced
  old_time.rf.train.final.balanced <- system.time(old_random_forest_fit_final_balanced <- old_random_forest_fit_final_balanced)
  save(old_random_forest_fit_final_balanced, file = "../output/rf_train_final_balanced_old_feature.RData")
  save(old_time.rf.train.final.balanced, file = "../output/rf_train_final_time_balanced_old_feature.RData")
  # Imbalanced
  old_time.rf.train.final.imbalanced <- system.time(old_random_forest_fit_final_imbalanced <- old_random_forest_fit_final_imbalanced)
  save(old_time.rf.train.final.imbalanced, file = "../output/rf_train_final_time_imbalanced_old_feature.RData")
  save(old_random_forest_fit_final_imbalanced, file = "../output/rf_train_final_imbalanced_old_feature.RData")
}else{
  load("../output/rf_train_final_balanced_old_feature.RData")
  load("../output/rf_train_final_time_balanced_old_feature.RData")
  load("../output/rf_train_final_time_imbalanced_old_feature.RData")
  load("../output/rf_train_final_imbalanced_old_feature.RData")
}

```



```

# Evaluate Model
# Balanced:
if(test.rf.old.feature){
old_time.rf.test.final.balanced <- system.time(rf_predicted_balanced <- as.numeric(as.vector(old_random
old_rf_accuracy_balanced <- mean(round(rf_predicted_balanced == old_rf_dat_test$label))
old_tpr.fpr.balanced <- WeightedROC(as.numeric(rf_predicted_balanced),old_rf_dat_test$label)
old_rf_AUC_balanced <- WeightedAUC(old_tpr.fpr.balanced)

cat("AUC(balanced) for Random Forest with old feature: ", old_rf_AUC_balanced, ".\n")
cat("Accuracy(balanced) for Random Forest with old feature", old_rf_accuracy_balanced*100, "%.\n")
cat("Training time (balanced) for Random Forest with old feature: ", old_time.rf.train.final.balanced[1], "\n")
cat("Testing time (balanced) for Random Forest with old feature: ", old_time.rf.test.final.balanced[1], "\n")
cat(" ", "\n")

# Imbalanced:
old_time.rf.test.final.imbalanced <- system.time(rf_predicted_imbalanced <- as.numeric(as.vector(old_random
old_rf_accuracy_imbalanced <- mean(round(rf_predicted_imbalanced == old_rf_dat_test$label))
old_tpr.fpr.imbalanced <- WeightedROC(as.numeric(rf_predicted_imbalanced),old_rf_dat_test$label)
old_rf_AUC_imbalanced <- WeightedAUC(old_tpr.fpr.imbalanced)

cat("AUC(imbalanced) for Random Forest with old feature: ", old_rf_AUC_imbalanced, ".\n")
cat("Accuracy(imbalanced) for Random Forest with old feature", old_rf_accuracy_imbalanced*100, "%.\n")
cat("Training time (imbalanced) for Random Forest with old feature: ", old_time.rf.train.final.imbalanced[1], "\n")
cat("Testing time (imbalanced) for Random Forest with old feature: ", old_time.rf.test.final.imbalanced[1], "\n")
}
}

```

- Generate a csv on presentation day

```

if (run.presentation.day){
csvfileoutput<-"../output/label_prediction.csv"
Advanced<-rf_predicted_balanced
Baseline<-label_pred_baseline
Index<-test_idx
csvdata <- data.frame(Index, Baseline, Advanced)

write.csv(csvdata,csvfileoutput, row.names=FALSE,quote = FALSE)

# presentation_day_gbm_accu <- mean(info$label == label_pred_baseline)
# cat("The accuracy of GBM baseline model is", presentation_day_gbm_accu*100, "%.\n")
#
# presentation_day_advanced_accu <- mean(info$label == rf_predicted_balanced)
# cat("The accuracy of Advanced model is", presentation_day_advanced_accu*100, "%.\n")
}

```

Reference

- Du, S., Tao, Y., & Martinez, A. M. (2014). Compound facial expressions of emotion. Proceedings of the National Academy of Sciences, 111(15), E1454-E1462.