


E:/Dropbox/BI\_FIT\_CVUT  
/2. semestr/PA2/GameBook  
/StreamDecoder.h

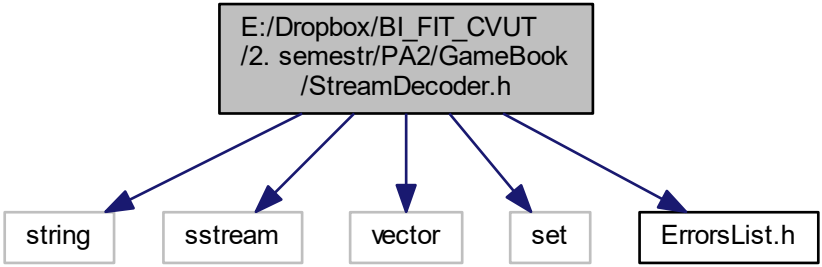

```
graph TD; A["E:/Dropbox/BI_FIT_CVUT<br>/2. semestr/PA2/GameBook<br>/StreamDecoder.h"] --> B[string]; A --> C[sstream]; A --> D[vector]; A --> E[set]; A --> F[ErrorsList.h];
```

The diagram illustrates the dependencies of the file `StreamDecoder.h`. A central gray box at the top contains the file's path. Five blue arrows point from this box to five separate white boxes below, each representing a dependency: `string`, `sstream`, `vector`, `set`, and `ErrorsList.h`. The boxes for `string`, `sstream`, `vector`, and `set` have thin gray borders, while the box for `ErrorsList.h` has a thicker black border.

string

sstream

vector

set

ErrorsList.h