



OAuth for LinkedIn

[linkedin_oauth_documentation.md](#)




<https://learn.microsoft.com/en-us/linkedin/consumer/integrations/self-serve/share-on-linkedin>

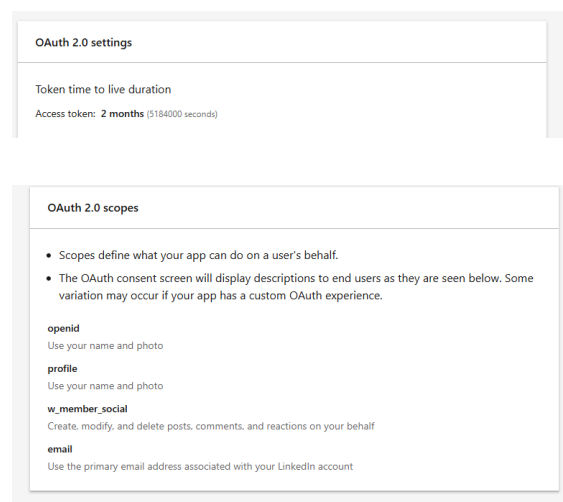

- Note your `client_id` and `client_secret`

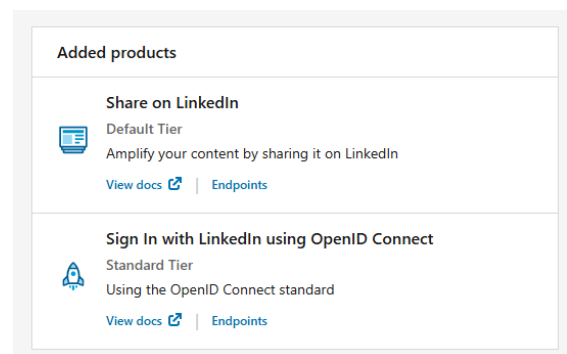

1.

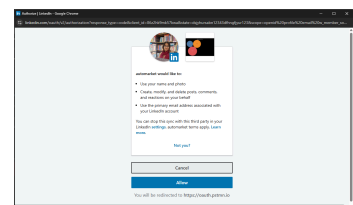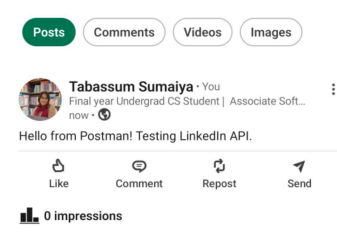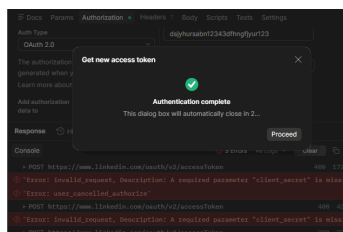

LinkedIn OAuth

Prerequisites

- LinkedIn Developer Account
- App created on [LinkedIn Developer Portal](https://developer.linkedin.com)

Step 1: App Setup on LinkedIn Developer Portal

1. **Create an app** at <https://developer.linkedin.com>
2. **Add Products:**
 - "Sign In with LinkedIn using OpenID Connect"
 - "Share on LinkedIn"
3. **Set Redirect URI:**

text

```
https://yourdomain.com/social/linkedin/callback
```

For Postman testing:

text

```
https://oauth.pstmn.io/v1/browser-callback
```

4. **Note your credentials:**

- `client_id`
- `client_secret`

Required Scopes

text

```
openid profile email w_member_social
```

Step 2: Postman OAuth Configuration

1. Open Postman → create a **New Request**
2. Go to **Authorization** tab
3. Set **Auth Type** → `OAuth 2.0`
4. Click "**Configure New Token**"

Field	Value
Grant Type	Authorization Code
Callback URL	<code>https://oauth.pstmn.io/v1/callback</code>
Auth URL	<code>https://www.linkedin.com/oauth/v2/authorization</code>
Access Token URL	<code>https://www.linkedin.com/oauth/v2/accessToken</code>
Client ID	<code>your_client_id</code>
Client Secret	<code>your_client_secret</code>
Scope	<code>openid profile email w_member_social</code>
Client Authentication	Send client credentials in body

⚠ Critical: Use "Send client credentials in body" NOT "Basic Auth header"

1. Click "**Get New Access Token**"
2. A LinkedIn login popup appears → **log in and authorize**
3. Postman auto-captures the token → click "**Use Token**"

Step 3: Get User Profile

Request:

- Method: `GET`
- URL: `https://api.linkedin.com/v2/userinfo`
- Auth tab → select your token (already set)
- Hit **Send**

http

```
GET https://api.linkedin.com/v2/userinfo
Authorization: Bearer {access_token}
```

Response:

json

```
{
  "sub": "abc123xyz",          // LinkedIn user ID
  "name": "John Doe",
  "email": "john@example.com"
}
```

📌 **Copy the `sub` value** — you'll need it for posting.

Step 4: Publish a Post

Request:

- Method: `POST`
- URL: `https://api.linkedin.com/v2/ugcPosts`
- **Headers tab:**

Key	Value
<code>Content-Type</code>	<code>application/json</code>
<code>X-Restli-Protocol-Version</code>	<code>2.0.0</code>

http

```
POST https://api.linkedin.com/v2/ugcPosts
Content-Type: application/json
Authorization: Bearer {access_token}
X-Restli-Protocol-Version: 2.0.0
```

Body:

raw → json

```
{
  "author": "urn:li:person:{linkedin_user_id}",
  "lifecycleState": "PUBLISHED",
  "specificContent": {
    "com.linkedin.ugc.ShareContent": {
      "shareCommentary": {
        "text": "Your post content here"
      },
      "shareMediaCategory": "NONE"
    }
  }
}
```

```
}
},
"visibility": {
  "com.linkedin.ugc.MemberNetworkVisibility": "PUBLIC"
}
}
```

Step 5: Token Refresh

Request:

http

```
POST https://www.linkedin.com/oauth/v2/accessToken
Content-Type: application/x-www-form-urlencoded
```

Body:

text

```
grant_type=refresh_token
&refresh_token={your_refresh_token}
&client_id={your_client_id}
&client_secret={your_client_secret}
```

Getting a Refresh Token

Add `offline_access` to your scope:

text

```
openid profile email w_member_social offline_access
```

LinkedIn Errors & Solutions

Error	Cause	Solution
<code>client_secret is missing</code>	Credentials sent as Basic Auth header	Change to "Send client credentials in body"
<code>403 Forbidden</code>	<code>w_member_social</code> not added as product	Add "Share on LinkedIn" product in Developer Portal

Error	Cause	Solution
No refresh token returned	Missing <code>offline_access</code> scope	Add <code>offline_access</code> to scope list
<code>invalid_redirect_uri</code>	Redirect URI mismatch	Ensure exact match including https://