

Twitter Penetration Test Report

BI-EHA Semestral work

Jan Koníř, Tadeáš Kouba

FIT CTU, 2023

Table of Contents

- Table of Contents
- Introduction
 - Team Info
 - Project Overview
 - Scope Description
 - Pentesting Methodology
 - Scoring System
- Executive Summary
- List of Findings
- Pre-engagement
 - Threat Model
 - Intelligence-gathering Outcomes
- Testing process
 - 4.1 Information Gathering
 - 4.1.1 Conduct Search Engine Discovery Reconnaissance for Information Leakage
 - 4.1.2 Fingerprint Web Server
 - 4.1.3 Review Webserver Metafiles for Information Leakage
 - 4.1.4 Enumerate Applications on Webserver
 - 4.1.5 Review Webpage Content for Information Leakage
 - 4.1.6 Identify Application Entry Points
 - 4.1.7 Map Execution Paths Through Application
 - 4.1.8 Fingerprint Web Application Framework
 - 4.1.9 Fingerprint Web Application
 - 4.1.10 Map Application Architecture
 - 4.2 Configuration and Deployment Management Testing
 - 4.2.1 Test Network Infrastructure Configuration
 - 4.2.2 Test Application Platform Configuration
 - 4.2.3 Test File Extensions Handling for Sensitive Information
 - 4.2.4 Review Old Backup and Unreferenced Files for Sensitive Information
 - 4.2.5 Enumerate Infrastructure and Application Admin Interfaces
 - 4.2.6 Test HTTP Methods
 - 4.2.7 Test HTTP Strict Transport Security
 - 4.2.8 Test RIA Cross Domain Policy
 - 4.2.9 Test File Permission
 - 4.2.10 Test for Subdomain Takeover
 - 4.2.11 Test Cloud Storage
 - 4.3 Identity Management Testing
 - 4.3.1 Test Role Definitions
 - 4.3.2 Test User Registration Process
 - 4.3.4 Testing for Account Enumeration and Guessable User Account
 - 4.3.5 Testing for Weak or Unenforced Username Policy
 - 4.4 Authentication Testing
 - 4.4.1 Testing for Credentials Transported over an Encrypted Channel

- 4.4.2 Testing for Default Credentials
- 4.4.3 Testing for Weak Lock Out Mechanism
- 4.4.4 Testing for Bypassing Authentication Schema
- 4.4.5 Testing for Vulnerable Remember Password
- 4.4.6 Testing for Browser Cache Weaknesses
- 4.4.7 Testing for Weak Password Policy
- 4.4.8 Testing for Weak Security Question Answer
- 4.4.9 Testing for Weak Password Change or Reset Functionalities
- 4.4.10 Testing for Weaker Authentication in Alternative Channel
- 4.5 Authorization Testing
 - 4.5.1 Testing Directory Traversal File Include
 - 4.5.2 Testing for Bypassing Authorization Schema
 - 4.5.3 Testing for Privilege Escalation
 - 4.5.4 Testing for Insecure Direct Object References
- 4.6 Session Management Testing
 - 4.6.1 Testing for Session Management Schema
 - 4.6.2 Testing for Cookies Attributes
 - 4.6.3 Testing for Session Fixation
 - 4.6.4 Testing for Exposed Session Variables
 - 4.6.5 Testing for Cross Site Request Forgery
 - 4.6.6 Testing for Logout Functionality
 - 4.6.7 Testing Session Timeout
 - 4.6.8 Testing for Session Puzzling
 - 4.6.9 Testing for Session Hijacking
- 4.7 Input Validation Testing
 - 4.7.1 Testing for Reflected Cross Site Scripting
 - 4.7.2 Testing for Stored Cross Site Scripting
 - 4.7.3 Testing for HTTP Verb Tampering
 - 4.7.4 Testing for HTTP Parametr Pollution
 - 4.7.5 Testing for SQL Injection
 - 4.7.6 Testing for LDAP Injection
 - 4.7.7 Testing for XML Injection
 - 4.7.8 Testing for SSI Injection
 - 4.7.9 Testing for XPath Injection
 - 4.7.10 Testing for IMAP SMTP Injection
 - 4.7.11 Testing for Code Injection
 - 4.7.11.1 Testing for Local File Inclusion
 - 4.7.11.2 Testing for Remote File Inclusion
 - 4.7.12 Testing for Command Injection
 - 4.7.13 Testing for Format String Injection
 - 4.7.14 Testing for Incubated Vulnerability
 - 4.7.15 Testing for HTTP Splitting Smuggling
 - 4.7.16 Testing for HTTP Incoming Requests
 - 4.7.17 Testing for Host Header Injection
 - 4.7.18 Testing for Server-side Template Injection
 - 4.7.19 Testing for Server-side Request Forgery

- 4.8 Testing for Error Handling
 - 4.8.1 Testing for Improper Error Handling
- 4.9 Testing for Weak Cryptography
 - 4.9.1 Testing for Weak Transport Layer Security
 - 4.9.2 Testing for Padding Oracle
 - 4.9.3 Testing for Sensitive Information Sent via Unencrypted Channels
 - 4.9.4 Testing for Weak Encryption
- 4.10 Business Logic Testing
 - 4.10.1 Test Business Logic Data Validation
 - 4.10.2 Test Ability to Forge Requests
 - 4.10.3 Test Integrity Checks
 - 4.10.4 Test for Process Timing
 - 4.10.5 Test Number of Times a Function Can Be Used Limits
 - 4.10.6 Testing for the Circumvention of Work Flows
 - 4.10.7 Test Defenses Against Application Misuse
 - 4.10.8 Test Upload of Unexpected File Types
 - 4.10.9 Test Upload of Malicious Files
- 4.11 Client-side Testing
 - 4.11.1 Testing for DOM-Based Cross Site Scripting
 - 4.11.2 Testing for JavaScript Execution
 - 4.11.3 Testing for HTML Injection
 - 4.11.4 Testing for Client-side URL Redirect
 - 4.11.5 Testing for CSS Injection
 - 4.11.6 Testing for Client-side Resource Manipulation
 - 4.11.7 Testing Cross Origin Resource Sharing
 - 4.11.8 Testing for Cross Site Flashing
 - 4.11.9 Testing for Clickjacking
 - 4.11.10 Testing WebSockets
 - 4.11.11 Testing Web Messaging
 - 4.11.12 Testing Browser Storage
 - 4.11.13 Testing for Cross Site Script Inclusion
- Sources

Introduction

Team Info

- Jan Koníř
 - konirjan@fit.cvut.cz
 - Student of CTU, Faculty of Information Technology
 - Responsible for
 - 4.2 Configuration and Deployment Management Testing
 - 4.6 Session Management Testing
 - 4.7 Input Validation Testing
 - 4.7.10 Testing for IMAP SMTP Injection
 - 4.7.11 Testing for Code Injection
 - 4.7.11.1 Testing for Local File Inclusion
 - 4.7.11.2 Testing for Remote File Inclusion
 - 4.7.12 Testing for Command Injection
 - 4.7.13 Testing for Format String Injection
 - 4.7.14 Testing for Incubated Vulnerability
 - 4.7.15 Testing for HTTP Splitting Smuggling
 - 4.7.16 Testing for HTTP Incoming Requests
 - 4.7.17 Testing for Host Header Injection
 - 4.7.18 Testing for Server-side Template Injection
 - 4.7.19 Testing for Server-side Request Forgery
 - 4.9 Testing for Weak Cryptography
 - 4.10 Business Logic Testing
- Tadeáš Kouba
 - koubatad@fit.cvut.cz
 - Student of CTU, Faculty of Information Technology
 - Responsible for
 - 4.3 Identity Management Testing
 - 4.4 Authentication Testing
 - 4.5 Authorization Testing
 - 4.7 Input Validation Testing
 - 4.7.1 Testing for Reflected Cross Site Scripting
 - 4.7.2 Testing for Stored Cross Site Scripting
 - 4.7.3 Testing for HTTP Verb Tampering
 - 4.7.4 Testing for HTTP Parametr Pollution
 - 4.7.5 Testing for SQL Injection
 - 4.7.6 Testing for LDAP Injection
 - 4.7.7 Testing for XML Injection
 - 4.7.8 Testing for SSI Injection
 - 4.7.9 Testing for XPath Injection
 - 4.8 Testing for Error Handling

■ 4.11 Client-side Testing

Project Overview

This report is part of semestral work for subject Ethical hacking of the Information Security program on FIT, CTU.

The focus is to assert skills gained during the semester as well as use them in real-world scenario. The website twitter.com has been chosen for this purpose as it offers a [bug bounty](#) and is therefore eligible for ethical hackers to try and hack.

Scope Description

We will be focusing on the web application on domain twitter.com.

While the bug bounty posted by twitter puts some vulnerabilities out of scope for financial reward, we will still be trying to perform these attacks as to deepen our ethical hacking skills.

Pentesting Methodology

As a pentesting methodology we have chosen the [OWASP Web Application Security Testing guide - version 4.2](#), which is the latest stable version. To be more precise, we will be covering following topics:

- Configuration and Deployment Management Testing
- Identity Management Testing
- Authentication Testing
- Authorization Testing
- Session Management Testing
- Input Validation Testing
- Testing for Error Handling
- Testing for Weak Cryptography
- Business Logic Testing
- Client-side Testing

Scoring System

We will be using the widely used [Common Vulnerability Scoring System \(CVSS\)](#) standard for evaluating the threat levels of vulnerabilities found in this report. In particular we will use the CVSS 3.1 version. The standard defines multiple metrics (base, temporal, environmental), however we will use only the base metric since we are performing a one-time pentesting as external entity so the temporal and environmental metrics are not that important and available to us.

We will be scoring each vulnerability on several factors such as access complexity, confidentiality impact, integrity impact and others, to calculate the final score. This will determine the final rating of that vulnerability as seen in the following table.

Rating	CVSS Score
Low	0.1 - 3.9
Medium	4.0 - 6.9
High	7.0 - 8.9
Critical	9.0 - 10.0

Executive Summary

TBD

List of Findings

TBD

Pre-engagement

Threat Model

Twitter does not openly disclose how its backend communication works.

Since twitter is a web application it is obviously exposed to the internet which naturally puts it in proximity of multitude of threats. On top of that it is definitely an attractive target for hackers, since it stores personal information of about 350 million people.

Some vulnerable points might be the client-server-database communication for authentication or tweets being stored in database and showing to completely random users' feeds.

Intelligence-gathering Outcomes

Firstly we ran port scan with **nmap**. We used the following command to find the open ports and possibly the version of service running on them:

```
nmap -sV twitter.com
nmap -sV twitter.com
Starting Nmap 7.93 ( https://nmap.org ) at 2023-04-27 15:04 EDT
Nmap scan report for twitter.com (104.244.42.65)
Host is up (0.034s latency).
Other addresses for twitter.com (not scanned): 104.244.42.193
Not shown: 998 filtered tcp ports (no-response)
PORT      STATE SERVICE      VERSION
80/tcp    open  tcpwrapped
443/tcp   open  ssl/https  tsa_o

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 32.38 seconds|
```

Full output can be seen in *outputs/nmap_version.txt*.

We can see that there are two open tcp ports (80, 443).

We then ran **nmap** with intention to determine the OS running, version and traceroute with:

```
nmap -A twitter.com
```

```
PORT STATE SERVICE VERSION
80/tcp open http tsa_o
|_http-title: Did not follow redirect to https://twitter.com/
| fingerprint-strings:
| DNSVersionBindReqTCP:
|   HTTP/1.1 400 Bad Request
|   content-length: 11
|   content-type: text/plain
|   x-connection-hash: e41ea0468e7b5be750935d042454e8711e3b3961c1737992a4cc017f6081eee2
|   date: Thu, 27 Apr 2023 19:07:40 GMT
|   server: tsa_o
|   connection: close
| Request
| FourOhFourRequest:
|   HTTP/1.0 400 Bad Request
|   x-connection-hash: 02d1cd22645d11f2bf49cdace64f2604c7e3a924a2cf0bc51ef47d0e2cb5f6b
|   date: Thu, 27 Apr 2023 19:07:33 GMT
|   server: tsa_o
|   connection: close
|   content-length: 0
| GetRequest:
|   HTTP/1.0 400 Bad Request
|   x-connection-hash: f18259468620a4e8ad658e4dc615da660dc1215ad1a001d84c1e96c4e3d25137
|   date: Thu, 27 Apr 2023 19:07:29 GMT
|   server: tsa_o
|   connection: close
|   content-length: 0
| HTTPOptions:
|   HTTP/1.0 400 Bad Request
|   x-connection-hash: 53ab8f7fb60e3463465249882514a86891e613e9036689229e062378af384b46
|   date: Thu, 27 Apr 2023 19:07:30 GMT
|   server: tsa_o
|   connection: close
|   content-length: 0
```

```
443/tcp open ssl/https tsa_o
| ssl-cert: Subject: commonName=twitter.com/organizationName=Twitter, Inc./stateOrProvinceName=
| Subject Alternative Name: DNS:twitter.com, DNS:www.twitter.com
| Not valid before: 2023-02-05T00:00:00
| Not valid after: 2024-02-05T23:59:59
|_http-server-header: tsa_o
|_ssl-date: TLS randomness does not represent time
| http-robots.txt: 13 disallowed entries
| /search/realtime /search/users /search/*grid /*?■
| /*/followers /*/following /account/deactivated
|/_settings/deactivated /oauth /1/oauth /istreams /i/hello /i/u
|_http-title: Site doesn't have a title (text/html; charset=utf-8).
| fingerprint-strings:
| DNSVersionBindReqTCP:
|   HTTP/1.1 400 Bad Request
|   content-length: 11
|   content-type: text/plain
|   x-connection-hash: 4a220339f0d48a93266c291c45e2d2945f95f6e4c4d9e0be7a4b8c0e7af86e2a
|   date: Thu, 27 Apr 2023 19:07:47 GMT
|   server: tsa_o
|   connection: close
|   Request
| FourOhFourRequest:
|   HTTP/1.0 400 Bad Request
|   x-connection-hash: 562463708a4194b26a6cd538525aeb5c4ed5db1011d43b9d221accfdab4b191d
|   date: Thu, 27 Apr 2023 19:07:37 GMT
|   server: tsa_o
|   connection: close
|   content-length: 0
| GetRequest:
|   HTTP/1.0 400 Bad Request
|   x-connection-hash: 8627003e329bef15b9d472e46b19be7b09d9ed3834bdd984dde2be922899bd26
|   date: Thu, 27 Apr 2023 19:07:35 GMT
|   server: tsa_o
|   connection: close
|   content-length: 0
```

Full output can be seen in *outputs/nmap_A.txt*.

Here it is specified that on port 80 there is http running. Also all requests sent are returned with HTTP 400 so service as well as OS could not be recognized.

Then we ran **dnsenum** to try and gather some information about the domain:

```
dnsenum --enum twitter.com
```

Host's addresses:

twitter.com.	1007	IN	A	104.244.42.193
--------------	------	----	---	----------------

Name Servers:

a.u06.twtrdns.net.	91	IN	A	204.74.66.101
b.r06.twtrdns.net.	97	IN	A	205.251.196.198
b.u06.twtrdns.net.	10	IN	A	204.74.67.101
c.r06.twtrdns.net.	103	IN	A	205.251.194.151
c.u06.twtrdns.net.	55	IN	A	204.74.110.101
a.r06.twtrdns.net.	91	IN	A	205.251.192.179
b.r06.twtrdns.net.	97	IN	A	205.251.196.198
b.u06.twtrdns.net.	10	IN	A	204.74.67.101
c.r06.twtrdns.net.	103	IN	A	205.251.194.151
c.u06.twtrdns.net.	55	IN	A	204.74.110.101
a.r06.twtrdns.net.	91	IN	A	205.251.192.179
a.u06.twtrdns.net.	91	IN	A	204.74.66.101
d.r06.twtrdns.net.	11	IN	A	205.251.199.195
d.u06.twtrdns.net.	12	IN	A	204.74.111.101

Mail (MX) Servers:

aspmx3.googlemail.com.	224	IN	A	142.250.150.26
aspmx2.googlemail.com.	221	IN	A	142.251.9.26
aspmx.l.google.com.	71	IN	A	173.194.76.27
alt2.aspmx.l.google.com.	193	IN	A	142.251.9.26
alt1.aspmx.l.google.com.	194	IN	A	142.250.153.27

Full output can be seen in *outputs/dnsenum.txt*.

Which listed us a lot of subdomains and IP addresses of twitter.

As stated before the twitter developers don't share much information about twitter. However through developer [blog](#) they sometimes discuss what actually happens on twitter's backend. Through that we were able to find out that twitter used to run on MySQL database, but has switched to distributed database NoSQL system called Manhattan, that is custom developed for twitter. Manhattan itself utilizes multiple open-source technologies like Apache Cassandra or Hadoop. This information might prove useful for performing some SQL Injection attacks.

As for the front-end part of Twitter it mostly consists of HTML, CSS and Javascript, particularly React.js. Of those, React.js is obviously the one to be concentrated on when pentesting. Some of its most common vulnerabilities are Cross-site scripting, SQL injection, Cross-site request forgery, Vulnerability in packages and dependencies, Broken authentication, Zip slip or XML external entities.

Last but not least we tried so called Google Hacking/Dorking but it didn't disclose any important information.

Testing process

4.1 Information Gathering

4.1.1 Conduct Search Engine Discovery Reconnaissance for Information Leakage

This section is covered in [Pre-engagement](#).

4.1.2 Fingerprint Web Server

This section is covered in [Pre-engagement](#).

4.1.3 Review Webserver Metafiles for Information Leakage

Robots.txt exists on the page. After reviewing disallowed paths, it doesn't seem to be considered as a mechanism to enforce restrictions.

```
# Google Search Engine Robot
# =====
User-agent: Googlebot
Allow: /?_escaped_fragment_

Allow: /*?lang=
Allow: /hashtag/*?src=
Allow: /search?q=%23
Allow: /i/api/
Disallow: /search/realtime
Disallow: /search/users
Disallow: /search/*/grid

Allow: /*?ref_src=
Allow: /*?src=
Disallow: /*?
Disallow: /*/followers
Disallow: /*/following

Disallow: /account/deactivated
Disallow: /settings/deactivated

# Yahoo! Search Engine Robot
# =====
User-Agent: Slurp
Allow: /?_escaped_fragment_

Allow: /*?lang=
Allow: /hashtag/*?src=
Allow: /search?q=%23
Allow: /i/api/
Disallow: /search/realtime
Disallow: /search/users
Disallow: /search/*/grid

Disallow: /*?
Disallow: /*/followers
Disallow: /*/following

Disallow: /account/deactivated
Disallow: /settings/deactivated

# Yandex Search Engine Robot
# =====
User-agent: Yandex
Allow: /?_escaped_fragment_

Allow: /*?lang=
Allow: /hashtag/*?src=
Allow: /search?q=%23
Allow: /i/api/
Disallow: /search/realtime
Disallow: /search/users
Disallow: /search/*/grid

Disallow: /*?
Disallow: /*/followers
Disallow: /*/following

Disallow: /account/deactivated
Disallow: /settings/deactivated
```

Sitemaps weren't found.

Security.txt

```
-----BEGIN PGP SIGNED MESSAGE-----
Hash: SHA512

Contact: https://hackerone.com/twitter

# Our OpenPGP key
Encryption: https://twitter.com/security/pgp-key.txt

# Canonical URI
Canonical: https://twitter.com/.well-known/security.txt

Expires: 2024-01-01T06:00:00.000Z

Hiring: https://careers.twitter.com
-----BEGIN PGP SIGNATURE-----

iHUEARYKAB0WIQTR1lpEM7BdJg41CZF6RLZ91cnFDQUCY9144wAKCRB6RLZ91cnF
Dbh8AQCmIB0lLpVrEQHGn5SX3+sd9bUin57Na5XNBVuLsf73AD/bJetgIJrkID0
evU8eQ0tFQO2/iNvhjvY9nt4nhNRxA0=
=suIL
-----END PGP SIGNATURE-----
```

Humans.txt wasn't found.

4.1.4 Enumerate Applications on Webserver

This section is covered in [Pre-engagement](#).


4.1.5 Review Webpage Content for Information Leakage

When reviewing the client side source code, no useful comments, metadata or other useful information were found.

4.1.6 Identify Application Entry Points

Despite reviewing many different requests and responses during the testing process, we simply didn't have the manpower to execute full review of all methods and parameters as there are hundreds or possibly thousands of them.

4.1.7 Map Execution Paths Through Application

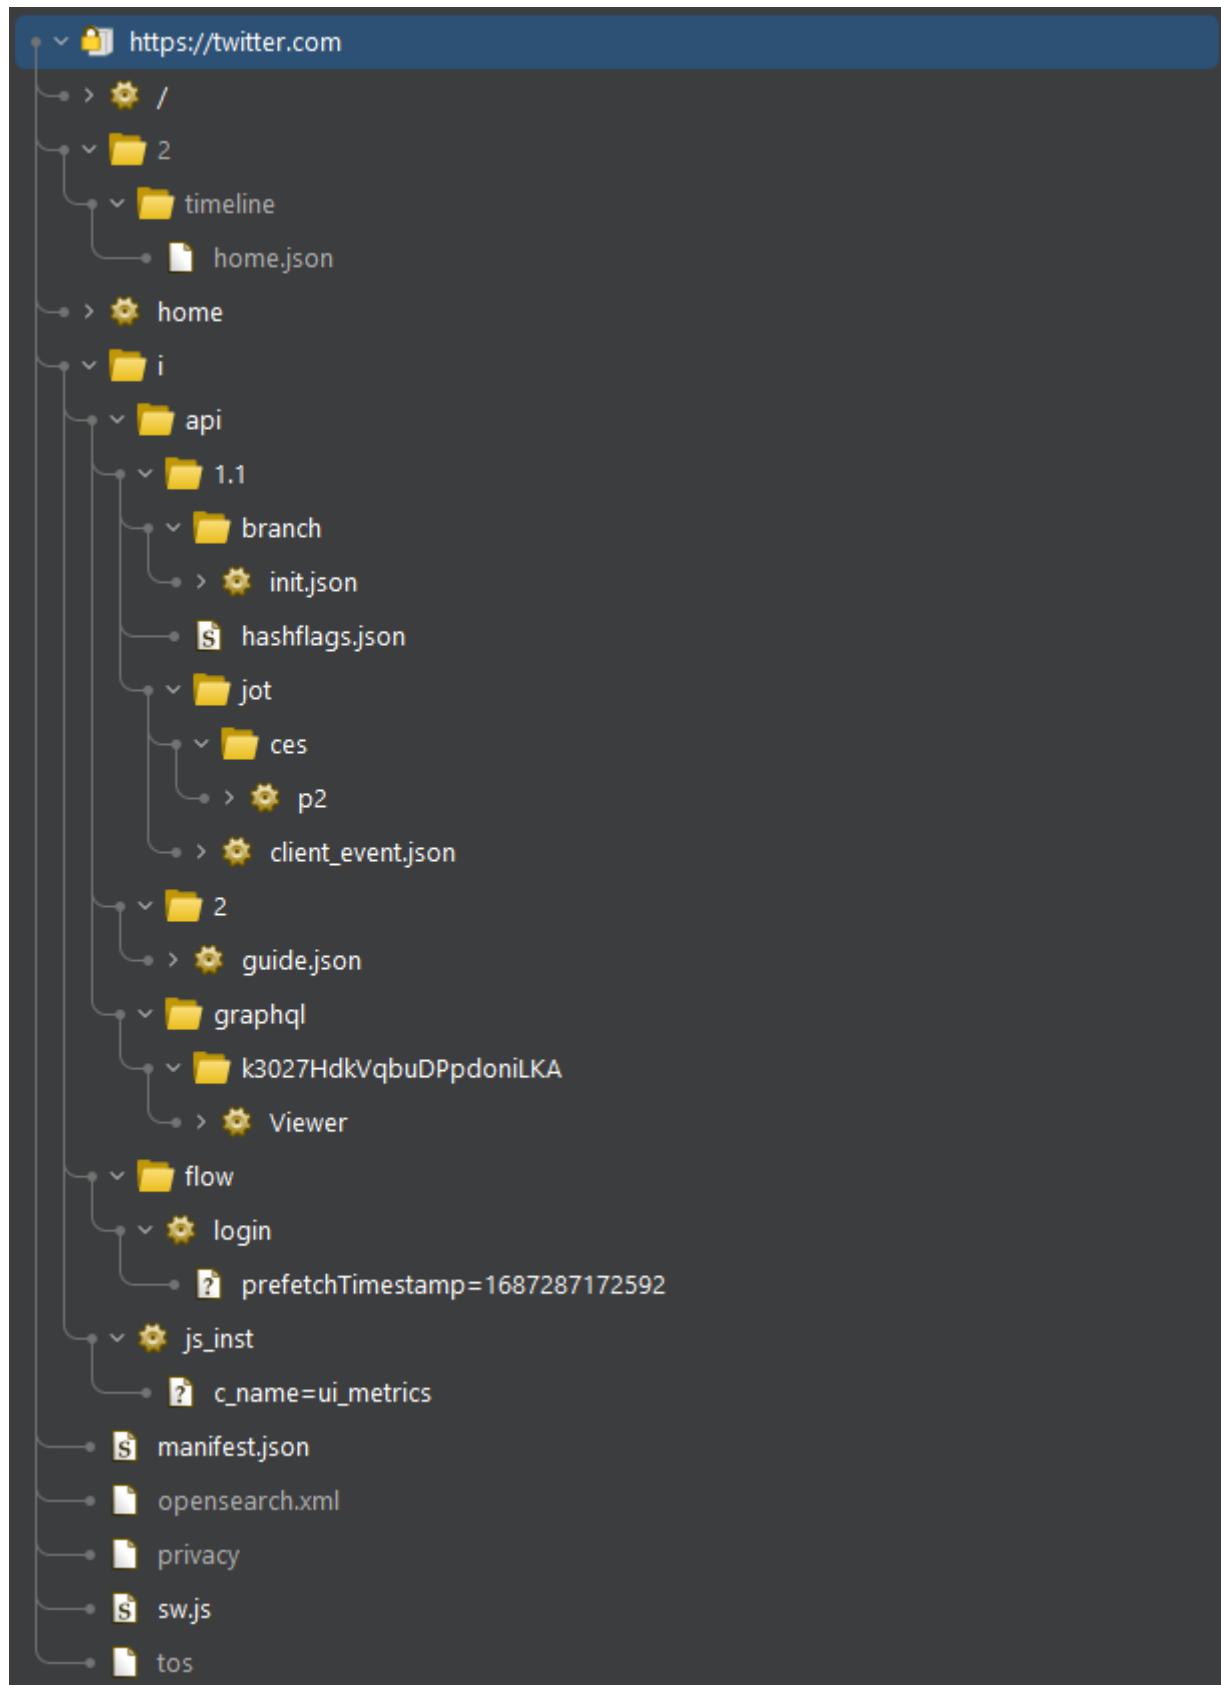

4.1.8 Fingerprint Web Application Framework

This section is covered in [Pre-engagement](#).

4.1.9 Fingerprint Web Application

This section has been merged into [4.1.8 Fingerprint Web Application Framework](#)

4.1.10 Map Application Architecture

This section is covered in [Pre-engagement](#).


4.2 Configuration and Deployment Management Testing

4.2.1 Test Network Infrastructure Configuration

As we don't have access to neither used systems nor any configuration files, this test cannot be performed.

4.2.2 Test Application Platform Configuration

We ran `dirb` to scan for sample and known files and directories.

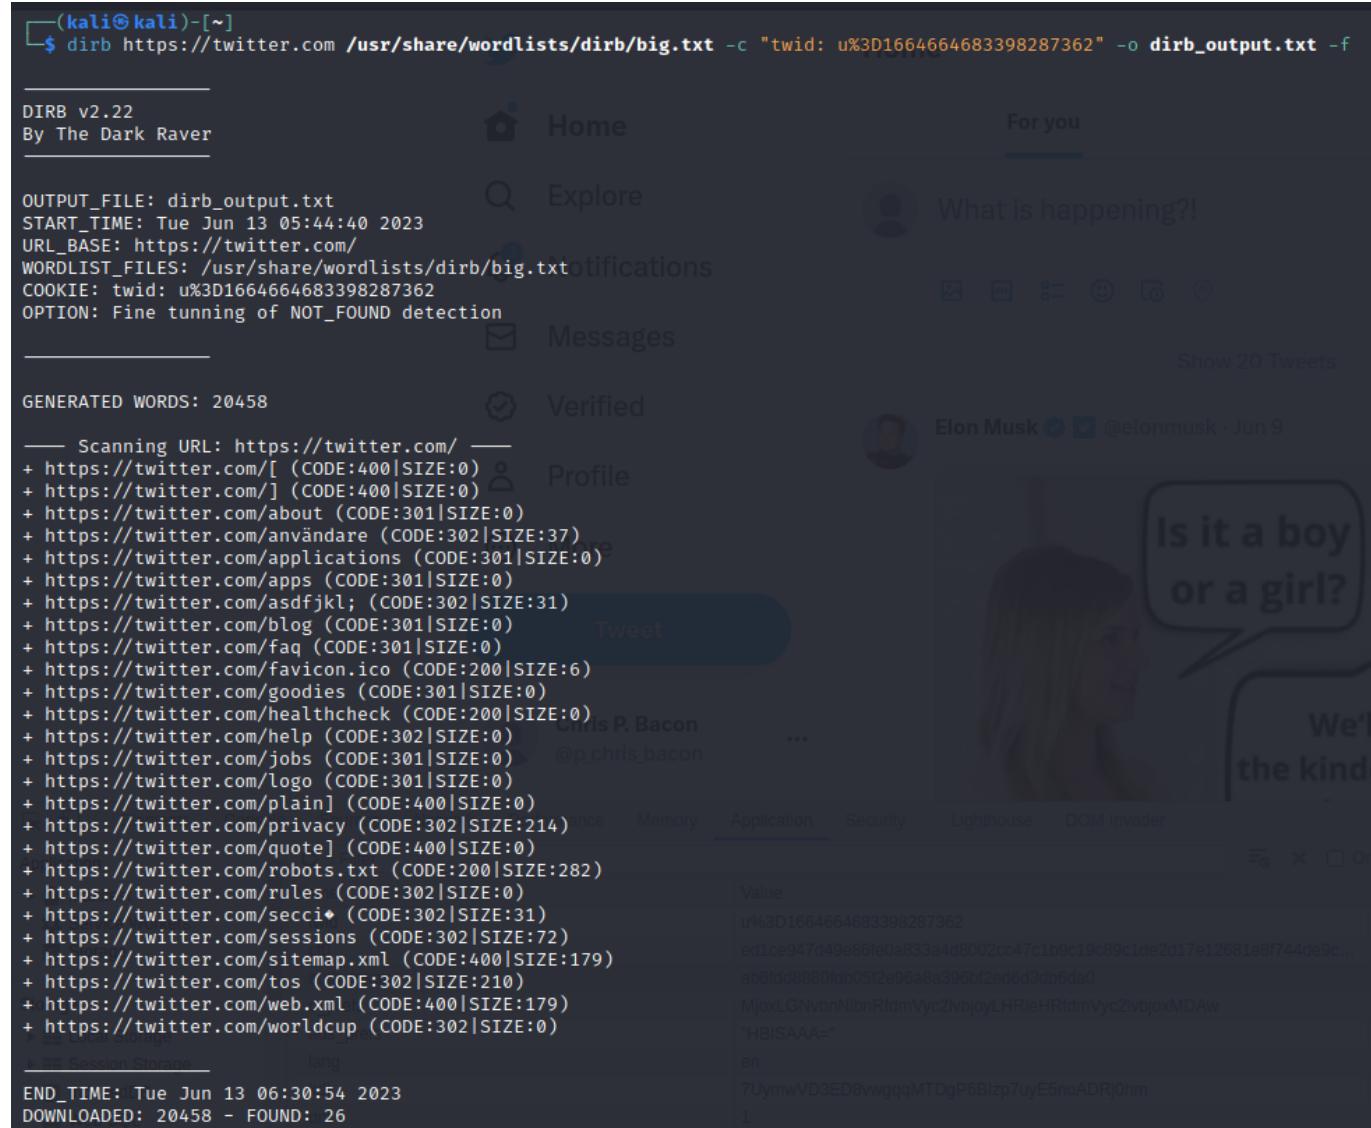

```
(kali㉿kali)-[~]
$ dirb https://twitter.com /usr/share/wordlists/dirb/big.txt -c "twid: u%3D1664664683398287362" -o dirb_output.txt -f

DIRB v2.22
By The Dark Raver

OUTPUT_FILE: dirb_output.txt
START_TIME: Tue Jun 13 05:44:40 2023
URL_BASE: https://twitter.com/
WORDLIST_FILES: /usr/share/wordlists/dirb/big.txt
COOKIE: twid: u%3D1664664683398287362
OPTION: Fine tuning of NOT_FOUND detection

GENERATED WORDS: 20458
____ Scanning URL: https://twitter.com/ ____
+ https://twitter.com/ [ (CODE:400|SIZE:0)
+ https://twitter.com/ ] (CODE:400|SIZE:0)
+ https://twitter.com/about (CODE:301|SIZE:0)
+ https://twitter.com/användare (CODE:302|SIZE:37)
+ https://twitter.com/applications (CODE:301|SIZE:0)
+ https://twitter.com/apps (CODE:301|SIZE:0)
+ https://twitter.com/asdfjkl; (CODE:302|SIZE:31)
+ https://twitter.com/blog (CODE:301|SIZE:0)
+ https://twitter.com/faq (CODE:301|SIZE:0)
+ https://twitter.com/favicon.ico (CODE:200|SIZE:6)
+ https://twitter.com/goodies (CODE:301|SIZE:0)
+ https://twitter.com/healthcheck (CODE:200|SIZE:0)
+ https://twitter.com/help (CODE:302|SIZE:0)
+ https://twitter.com/jobs (CODE:301|SIZE:0) @p_chris_bacon ...
+ https://twitter.com/logo (CODE:301|SIZE:0)
+ https://twitter.com/plain] (CODE:400|SIZE:0)
+ https://twitter.com/privacy (CODE:302|SIZE:214)
+ https://twitter.com/quote] (CODE:400|SIZE:0)
+ https://twitter.com/robots.txt (CODE:200|SIZE:282)
+ https://twitter.com/rules (CODE:302|SIZE:0)
+ https://twitter.com/secci♦ (CODE:302|SIZE:31)
+ https://twitter.com/sessions (CODE:302|SIZE:72)
+ https://twitter.com/sitemap.xml (CODE:400|SIZE:179)
+ https://twitter.com/tos (CODE:302|SIZE:210)
+ https://twitter.com/web.xml (CODE:400|SIZE:179)
+ https://twitter.com/worldcup (CODE:302|SIZE:0)

END_TIME: Tue Jun 13 06:30:54 2023
DOWNLOADED: 20458 - FOUND: 26
```

Parameter	Value
twid	u%3D1664664683398287362
ed1ce947d49e86fe0a833a4d8002cc047c1b9c19c89c1de2d17e12681e8f744de9c...	
ab6fd8880fdb05f2e96a8a396bf2ed6d3db6da0	
MjoxLGNvbnNlbnRfdmVyc2lvbjoxMDAw	
"HBISAAA"	
en	
7UymwVD3ED8vwgqqMTDgP6Blzp7uyE5noADRJ0hm	
1	

All of the requests were valid endpoints, redirections, account names or the Twitter's custom "Page was not found" page.

4.2.3 Test File Extensions Handling for Sensitive Information

For this test we ran `dirb` again, but this time with file extensions wordlist. It didn't disclose any new files or pages.

The terminal window at the top shows a command to search for 'dirb' on Twitter using the wordlist 'dirb/small.txt'. The browser window below displays the search results, which include a list of URLs found by the search, such as various Twitter application pages like /about/, /applications/, and /rules/. The search interface includes sections for Notifications, Messages, Lists, Bookmarks, and Profile.

DIRB v2.22
By The Dark Raver

Explore

Notifications

Messages

Lists

Bookmarks

Profile

OUTPUT_FILE: dirb_extensions_output.txt

START_TIME: Tue Jun 13 11:58:36 2023

USER_AGENT: https://twitter.com

WORDLIST: /usr/share/wordlists/dirb/small.txt

COOKIE: twid: u%3D01664664683398287362

OPTION: Fine tuning of NOT_FOUND detection

EXTENSIONS_FILE: /usr/share/wordlists/dirb/extensions_common.txt | ()(.asp)(.aspx)(.bat)(.c)(.cfm)(.cgi)(.com)(.dll)(.exe)(.htm)(.html)(.inc)(.jhtml)(.jsa)(.log)(.mdb)(.nsf)(.php)(.pthml)(.pl)(.reg)(.sh)(.shtml)(.sql)(.txt)(.xml)(.)

/) [NUM = 29]

GENERATED WORDS: 959

Scanning URL: https://twitter.com/

- https://twitter.com/about/ (CODE:301|SIZE:0)
=> DIRECTORY: https://twitter.com/about/
- https://twitter.com/applications/ (CODE:301|SIZE:0)
=> DIRECTORY: https://twitter.com/apps/
- https://twitter.com/help/ (CODE:301|SIZE:0)
=> DIRECTORY: https://twitter.com/help/
- https://twitter.com/logo/ (CODE:301|SIZE:0)
=> DIRECTORY: https://twitter.com/logo/
- https://twitter.com/rules/ (CODE:301|SIZE:0)
=> DIRECTORY: https://twitter.com/rules/
- https://twitter.com/sessions (CODE:302|SIZE:72) [found]
=> https://twitter.com/sessions/ (CODE:302|SIZE:72)

This account doesn't exist

Try searching for another...

Trending in Czechia

LGBTQ

10K Tweets

Trending in Czechia

#Web3

2.4M Tweets

Entertainment Trending

Peter

202K Tweets

Trending in Czechia

Japan

397K Tweets

Trending in Czechia

Czech

1.6K Tweets

Trending in Czechia

Bakhmut

10.6K Tweets

Trending in Czechia

Europe

4.2.4 Review Old Backup and Unreferenced Files for Sensitive Information

We haven't found neither endpoints nor functions suitable for inference from the naming scheme.

When reviewing the front-end source code, no useful comments were found.

Blind guessing was performed in the previous sections with no success.

4.2.5 Enumerate Infrastructure and Application Admin Interfaces

We weren't able to reveal any admin interface.

4.2.6 Test HTTP Methods

Running `nmap` with `http-methods` script disclosed that only reasonable HTTP methods are allowed.

```
(kali㉿kali)-[~] $ nmap -p 80,443 --script http-methods twitter.com
Starting Nmap 7.93 ( https://nmap.org ) at 2023-06-14 15:26 EDT
Nmap scan report for twitter.com (104.244.42.129)
Host is up (0.022s latency).

PORT      STATE SERVICE
80/tcp    open  http
| http-methods:
|_ Supported Methods: GET HEAD POST OPTIONS
443/tcp   open  https
| http-methods:
|_ Supported Methods: GET HEAD POST OPTIONS

Nmap done: 1 IP address (1 host up) scanned in 3.22 seconds
```

4.2.7 Test HTTP Strict Transport Security

HTTP Strict Transport Security header is included in the response. However it lacks the includeSubDomains directive and since there are public subdomains such as blog.twitter.com or about.twitter.com and none of them probably require usage of unsecured http, the includeSubDomains directive should be included as well.

```
(kali㉿kali)-[~]  WebSockets history | ⚙ Proxy settings
└─$ curl -D- -s https://twitter.com | grep -i strict
strict-transport-security: max-age=631138519
```

4.2.8 Test RIA Cross Domain Policy

Neither crossdomain.xml nor clientaccesspolicy.xml are accessible.

4.2.9 Test File Permission

We don't have access to any web server, so we cannot inspect the local file permissions. No online directories were found.

4.2.10 Test for Subdomain Takeover

`dnsrecon` found no records and therefore no records suitable for takeover.

```
(kali㉿kali)-[~]
└─$ dnsrecon -d twitter.com
[*] std: Performing General Enumeration against: twitter.com ...
[-] DNSSEC is not configured for twitter.com
[*] SOA a.u06.twtrdns.net 204.74.66.101
[*] NS c.u06.twtrdns.net 204.74.110.101
[*] Bind Version for 204.74.110.101 Nameserver"
[*] NS b.u06.twtrdns.net 204.74.67.101
[*] Bind Version for 204.74.67.101 Nameserver"
[*] NS d.r06.twtrdns.net 205.251.199.195
[*] NS a.u06.twtrdns.net 204.74.66.101
[*] Bind Version for 204.74.66.101 Nameserver"
[*] NS a.r06.twtrdns.net 205.251.192.179
[*] NS c.r06.twtrdns.net 205.251.194.151
[*] NS d.u06.twtrdns.net 204.74.111.101
[*] Bind Version for 204.74.111.101 Nameserver"
[*] NS b.r06.twtrdns.net 205.251.196.198
[*] MX alt1.aspmx.l.google.com 142.250.150.27
[*] MX alt2.aspmx.l.google.com 74.125.200.27
[*] MX aspmx2.goolgemail.com 142.250.150.26
[*] MX aspmx3.goolgemail.com 74.125.200.26
[*] MX aspmx.l.google.com 108.177.127.27
[*] MX alt1.aspmx.l.google.com 2a00:1450:4010:c1c::1a
[*] MX alt2.aspmx.l.google.com 2404:6800:4003:c00::1b
[*] MX aspmx2.goolgemail.com 2a00:1450:4010:c1c::1a
[*] MX aspmx3.goolgemail.com 2404:6800:4003:c00::1a
[*] MX aspmx.l.google.com 2a00:1450:4013:c01::1b
[*] A twitter.com 104.244.42.193
[*] TXT twitter.com 0a8c0fc6-bfa5-4ea7-b09b-87f2989022d6
[*] TXT twitter.com MS=BEE202D20C326867290BDEFA2DDDF4594B5D6860
[*] TXT twitter.com adobe-idp-site-verification=a2ff8fc40c434d1d6f02f68b0b1a683e400572ab8c1f2c180c71c3d985b9270
[*] a
[*] SLN
[*] TXT twitter.com apple-domain-verification=zd1iHoE09LILEQIq
[*] TXT twitter.com atlassian-domain-verification=j6u0o1PTkobCXC84uEF/sWpIPtaZURBVYqKzmTvT8wugLcHT1vvrrzzA63iP1q
[*] SLN
[*] TXT twitter.com bj6sbt5xqs9hw9jrfvz7hplrg0l680sb
[*] TXT twitter.com canva-site-verification=lMnZ3wMh7c1uqZqa-cxZTg
[*] TXT twitter.com google-site-verification=TNhAkfLUeIbzzSgPNxS5aEkKMf3aUcpPmCK1_kmIvU
[*] TXT twitter.com google-site-verification=h6dJIV0HXjLOkGAotLAWEZvoi9SxqP4vjpx98vrCvVQ
[*] TXT twitter.com loom-site-verification=638c6bc173b9458997f64d305bf42499
[*] TXT twitter.com miro-verification=6e1ca9ad6d0c2cd2e4186141265f23ed618cfe37
[*] TXT twitter.com mixpanel-domain-verify=164dda91-31f4-41e8-a816-0f59b38fea30
[*] TXT twitter.com traction-guest=6882b04e-4188-4ff9-8bb4-bff5a3d358e6
[*] TXT twitter.com traction-guest=a4d0248d-fe01-4222-8fcc-33f68323e667
[*] TXT twitter.com v=spf1 ip4:199.16.156.0/22 ip4:199.59.148.0/22 ip4:8.25.194.0/23 ip4:8.25.196.0/23 ip4:204.92.114.203 ip4:204.92.114.204/31 include:_spf.google.com include:_thirdparty.twitter.com include:_oerp.twitter.com include:spf.smtp2go.com -all
[*] TXT twitter.com wrike-verification=Mju4MTA5MjoyN2UzNDc1MjU3MDZizTY4NjBiNzliNDQ2OTUwNWY3NmM5NDgyMTBlYzFkNTcwYTE2YWNmZDdkNTY2ZmE4Yzlh
[*] _dmarc.twitter.com v=DMARC1; p=reject; rua=mailto:d3omt-8484@rua.dmarc.emailanalyst.com; ruf=mailto:d3o
mt-8484@ruf.dmarc.emailanalyst.com; fo=1
[*] Enumerating SRV Records
[+] 0 Records Found
```

4.2.11 Test Cloud Storage

abs.twimg.com seems to be a cloud service but it only provides public content such as tweets, additional javascript code, emoji and CSS for the client web application so the authorization for reading is not required.

Updating the file was not successful.

```
(kali㉿kali)-[~]  WebSockets history  ⚡ Proxy settings
└─$ curl -i -X PUT -d 'test' -- https://abs.twimg.com/responsive-web/client-web/i18n/emoji-en.49b0285a.js
HTTP/2 403 <img alt="Image and general binary content" data-bbox="75 95 335 105"/>
cache-control: no-cache
date: Wed, 14 Jun 2023 22:27:42 UTC
perf: 7626143928
server: tsa_b
strict-transport-security: max-age=631138519
timing-allow-origin: https://twitter.com, https://mobile.twitter.com
x-connection-hash: d1331c2c2bc0a6356110541af75912fdf2173dbd8ab20743f544be6e2cead638
x-content-type-options: nosniff
x-response-time: 5
x-transaction-id: 9c81577d1425f0ce
content-length: 0
Referer: https://twitter.com
User-Agent: curl/7.64.1
```

	URL	Params	Edited	Status	Length	MIME
cache-control: no-cache	/api/1.1/dm/inbox_initial_state.json?nsrw_rerouting_ena...	✓		200	1129	JSON
date: Wed, 14 Jun 2023 22:27:42 UTC	/api/1.1/jot/ces/p2	✓		200	770	JSON
perf: 7626143928	/api/graphol/PFxTk8owMoZgIMccP0r4g/getAltTextProm...	✓		200	843	JSON
server: tsa_b	/api/graphol?include_profile_interstitial_type=1&in...	✓		200	22188	JSON
strict-transport-security: max-age=631138519				200	858	XML
timing-allow-origin: https://twitter.com, https://mobile.twitter.com				200	827	JSON
x-connection-hash: d1331c2c2bc0a6356110541af75912fdf2173dbd8ab20743f544be6e2cead638				200	637	script
x-content-type-options: nosniff	/api/1.1/jot/client_event.json?keepalive=false	✓		200	11191	JSON
x-response-time: 5	/api/1.1/users/recommendations.json?include_profile_in...	✓		200	637	script
x-transaction-id: 9c81577d1425f0ce	/api/1.1/jot/client_event.json?keepalive=false	✓		200	2569	JSON
content-length: 0	/1.1/account/settings.json?include_mention_filter=true&i...	✓		200	854	JSON
Referer: https://twitter.com	/api/graphol/Fhd55uRVI2Vn0nRaF71zQI/listPins?variabl...	✓		200	854	JSON


4.3 Identity Management Testing

4.3.1 Test Role Definitions

Since the application is being tested as a black-box from a normal user standpoint we don't have information about available roles. Even after looking through HTTP communication any specific roles could not be identified. Therefore we are not able to test roles layout or permissions.

4.3.2 Test User Registration Process


User can register using several different options (with Google/Apple account or native) we will test native registration process as the other two are using different applications and are out of scope.

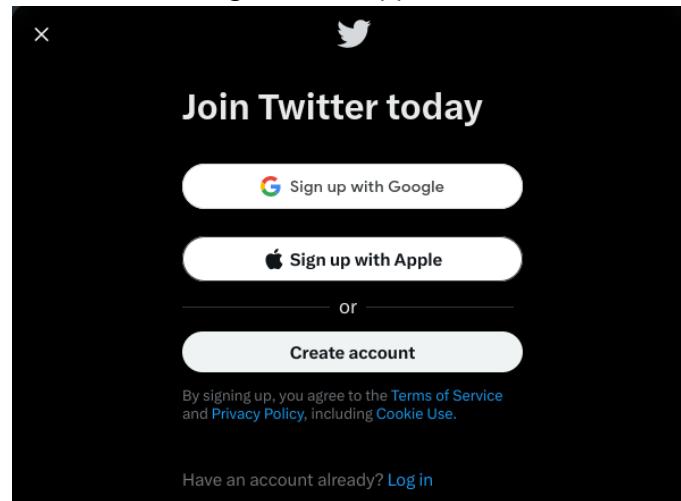


The requirements for registration are name, email and date of birth of user. Out of these options only email can be verified. Name can be anything and does not need to be unique, date of birth can be set to anything as it is not verified either.

A screenshot of the first step of a five-step account creation process. The title "Step 1 of 5" is at the top left, followed by "Create your account". There are two input fields: "Name" and "Email". Below them is a section titled "Date of birth" with the sub-instruction "This will not be shown publicly. Confirm your own age, even if this account is for a business, a pet, or something else." Three dropdown menus for "Month", "Day", and "Year" are shown. At the bottom is a large grey "Next" button.

In next step user is asked for different permissions which may be granted but are not required.

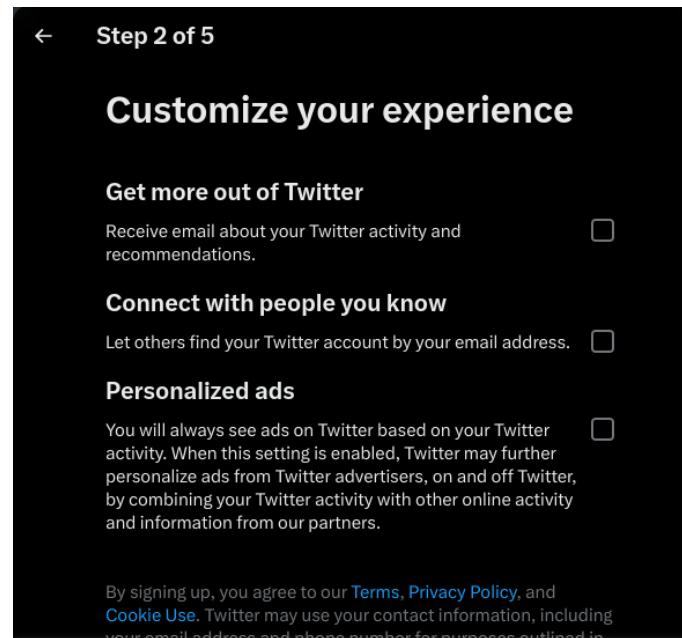

In next step user information is confirmed (Notice that date of birth really does not matter as in the example the user's age is 5 years and email is checked in prior stages).

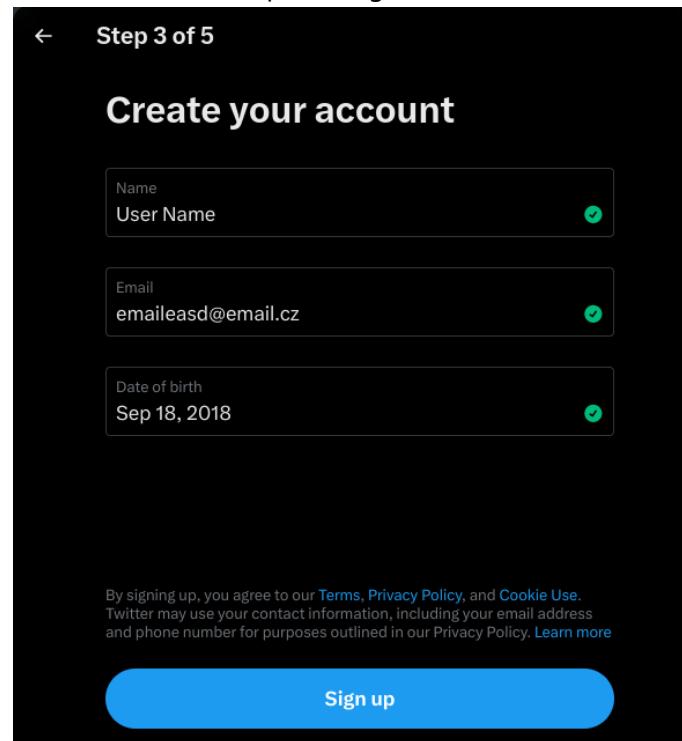


Next user is prompted to input the code sent to him via email (6 digits). Last step is the creation of password which is described in detail in [authentication testing](#)

In summary anyone with access to an email can create twitter account. Registrations are granted automatically after confirming email validity. As long as one has access to a valid email he can register as many times as he can (for purposes of testing we created 5+ accounts with throwaway emails). Users can only register with basic user permissions and the only proof of identity is email verification.

4.3.4 Testing for Account Enumeration and Guessable User Account

It is quite easy to enumerate emails of accounts either when registering (already used emails inform the user that email is used) or when trying to log in - when using valid email user is redirected to input his password and when invalid email (not used in registration of any account yet) the following message is shown: *Sorry, we could not find your account.* also a HTTP response **400 Bad Request** is sent. When we have a valid email we are either redirected and can enter password or if suspicious activity is detected (Login from different location/multiple bad password/username guesses) we are redirected to input our username. This makes it more difficult to enumerate and brute force users since we need to know username+email to even be able to try passwords. However we still get 5-15 chances before lock-out to try usernames which can be bruteforced with a bit of educated guess like using name from email or that name + some numbers etc. When wrong username is input page shows message *Incorrect, please try again.* and **400 Bad Request** is sent, user is then redirected to the same page to try again on a correct username guess we are redirected to input password with **200 OK** response. Note that usernames can be seen by any logged in users - every twitter user has his username on his profile and under every tweet as `@<username>` - and everyone can become user and therefore see usernames. So we can actually get all information needed to try to bruteforce passwords if we are able to connect an account to its email. For example I used this method to get back access to a testing account I created and forgot the username of, because twitter appended some random numbers to it (as shown below). Another example is if we got the email used for registration of say Elon Musk (username `@elonmusk`) we could use this information to effectively lock him out of his twitter account or try to bruteforce his password. It is possible to enumerate user emails and potentially their usernames.

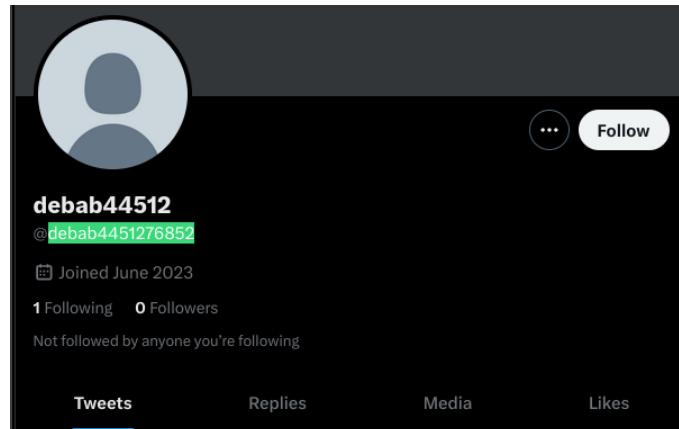

4.3.5 Testing for Weak or Unenforced Username Policy

When prompted to set username, twitter by default fills the username field with first part of mail and if ambiguous appends some numbers. User can change his username to anything he pleases as long as it is unique across the application. So the usernames are implicitly structured but in reality can not be guessed with certainty as users can change them.

4.4 Authentication Testing

4.4.1 Testing for Credentials Transported over an Encrypted Channel

Twitter uses TLSv1.2 for data transfer encryption and HTTPS for all communication including login, user creation and password change, it can not be forced to use unsecure HTTP.

tcp.port == 443 && ip.dst == 104.244.42.130						
No.	Time	Source	Destination	Protocol	Length	Info
88	5.400148045	10.0.2.15	104.244.42.130	TLSv1.2	206	Application Data
91	5.426801434	10.0.2.15	104.244.42.130	TCP	54	35558 → 443 [ACK] Seq=153 Ack=65 Win=63360 Len=0
92	5.427547926	10.0.2.15	104.244.42.130	TLSv1.2	261	Application Data
93	5.427579300	10.0.2.15	104.244.42.130	TLSv1.2	582	Application Data
97	5.562282422	10.0.2.15	104.244.42.130	TCP	54	35556 → 443 [ACK] Seq=736 Ack=270 Win=63360 Len=0
143	23.373504936	10.0.2.15	104.244.42.130	TLSv1.2	253	Application Data
144	23.373529254	10.0.2.15	104.244.42.130	TLSv1.2	562	Application Data
172	23.527780948	10.0.2.15	104.244.42.130	TCP	54	35556 → 443 [ACK] Seq=1443 Ack=403 Win=63360 Len=0
182	24.069939533	10.0.2.15	104.244.42.130	TLSv1.2	253	Application Data
183	24.070079215	10.0.2.15	104.244.42.130	TLSv1.2	231	Application Data
189	24.217180777	10.0.2.15	104.244.42.130	TCP	54	35556 → 443 [ACK] Seq=1819 Ack=536 Win=63360 Len=0
324	26.357784370	10.0.2.15	104.244.42.130	TLSv1.2	253	Application Data
325	26.357823423	10.0.2.15	104.244.42.130	TLSv1.2	1244	Application Data
326	26.357883746	10.0.2.15	104.244.42.130	TLSv1.2	4086	Application Data
333	26.532384005	10.0.2.15	104.244.42.130	TCP	54	35556 → 443 [ACK] Seq=7240 Ack=665 Win=63360 Len=0
345	27.573375301	10.0.2.15	104.244.42.130	TLSv1.2	141	Application Data
348	27.599338671	10.0.2.15	104.244.42.130	TCP	54	35558 → 443 [ACK] Seq=240 Ack=129 Win=63360 Len=0

Communication capture of login via Wireshark.

4.4.2 Testing for Default Credentials

While testing different credentials in the register page I found out there are users with admin@twitter.com and guest@twitter.com registered.

Email
admin@twitter.com

Email has already been taken.

Email
guest@twitter.com

Email has already been taken.


Twitter indeed uses @twitter.com address (for example registering verification mail is sent from verification@email.com) and they state it as official way of communication,

Twitter will only send you emails from @twitter.com or @e.twitter.com. However, some people may receive fake or suspicious emails that look like they were sent by Twitter. These emails might include malicious attachments or links to spam or phishing websites. Please know that Twitter will never send emails with attachments or request your Twitter password by email.

however there is no way of knowing if they are actual twitter.com default/admin credentials, they can however be used to lock out these accounts as described below.

4.4.3 Testing for Weak Lock Out Mechanism

Twitter's lock out mechanism activates after 5-15 (scales with repeating tries) unsuccessful entries of password/username. Any following tries result in the following message.

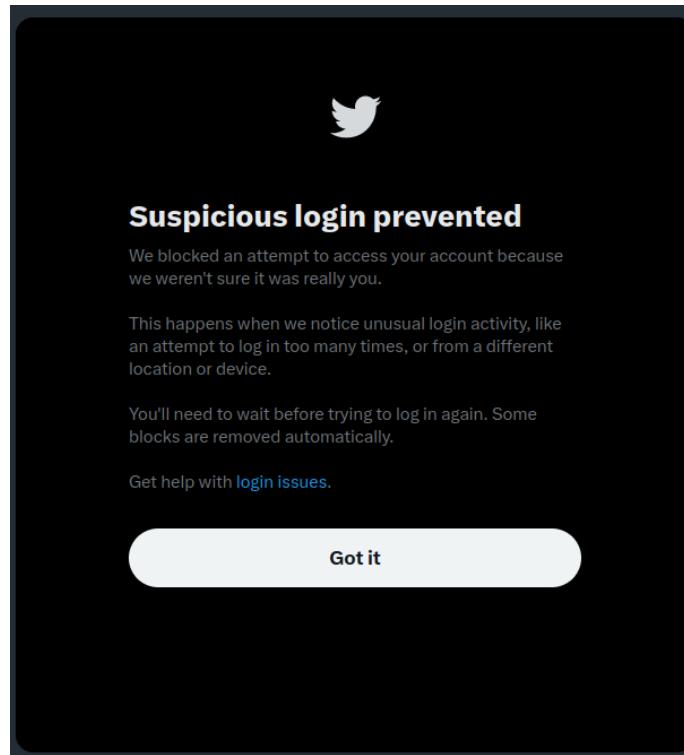

Unlock mechanism is time-based with time-out of 30+ minutes (Twitter [officially states](#) it is an hour lock-out, my first lock-out was shorter though).

What does it mean to be locked out?

- After a limited number of failed attempts to sign in to Twitter, you will be temporarily locked out from trying to sign in. When your account is locked, you will not be able to sign in — even with the correct password.
- **This lock lasts about an hour and will then clear on its own.**


It also provides possibility to send a form with login issue, but none of the possibilities fit nor help with the lock out issue.

I need to regain access to my Twitter account

I need to regain access to my Twitter account
I'm trying to reactivate my account
I'd like to deactivate or close my account
Appeal a locked or suspended account

If twitter suspects an unusual login activity (lot of bad tries/new location) it prompts the user to input their

username or phone, this can also be used to lock-out an account, as it uses same policy as password lock-out mechanism.

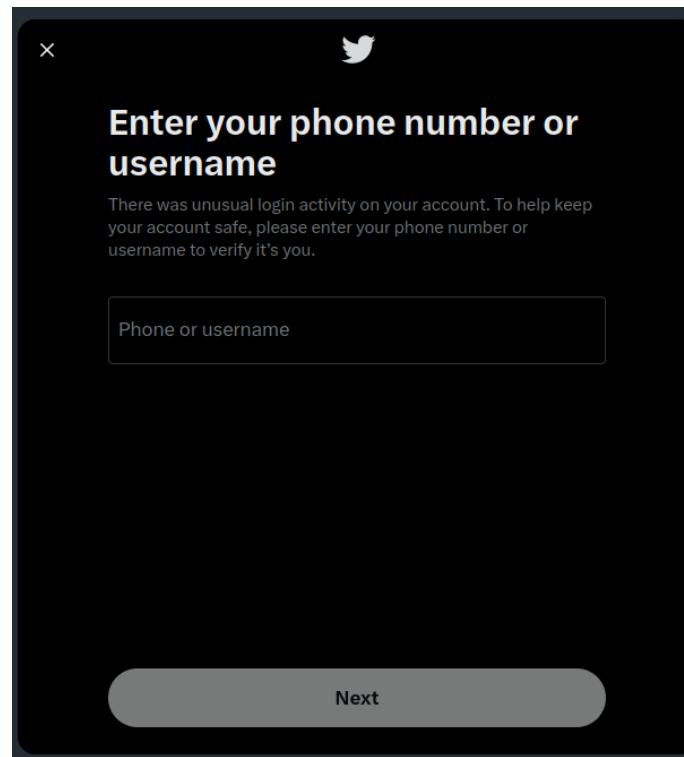


4.4.4 Testing for Bypassing Authentication Schema

It is not possible to bypass authentication through direct page request. It is possible to visit someone's profile with twitter.com/<username>, however this does not disclose any personal/secret information as it shows someone's profile (what it shows depends on individual's account security settings).

Session IDs look random, they have some similar parts but their value changes unpredictably each login even in concurrent sessions.

4.4.5 Testing for Vulnerable Remember Password

The login page does not offer 'remember password' functionality and it does not store user's credentials instead replacing them with secure tokens like sessionID.

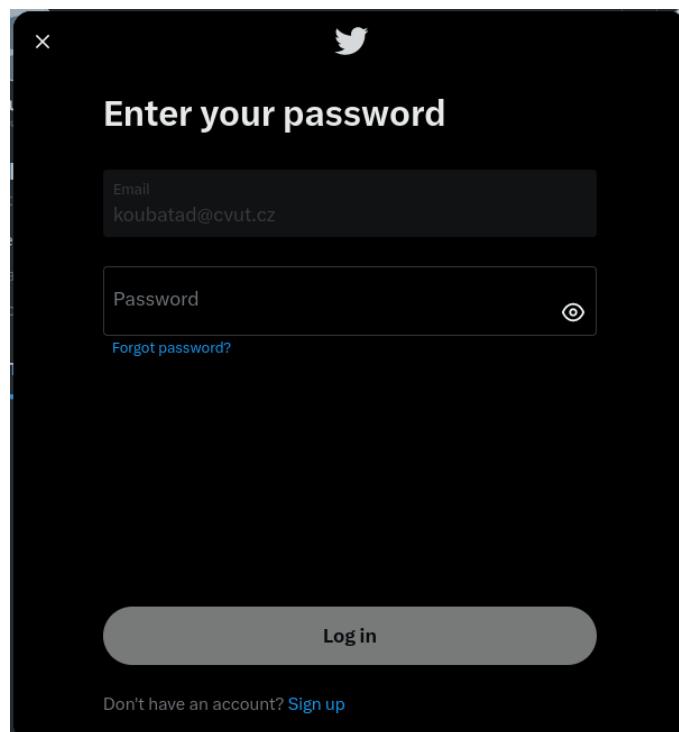

4.4.6 Testing for Browser Cache Weaknesses

Attacker can not access private information with the 'History' function and 'Back' button, he gets redirected to secure version of that page where he acts as a guest account or to login page to get authorized.

The website uses HTTP directives to secure cache correctly with the following settings (copied from response headers).

```
cache-control: no-cache, no-store, must-revalidate, pre-check=0, post-check=0  
expires: Tue, 31 Mar 1981 05:00:00 GMT  
pragma: no-cache
```

Twitter stores a lot of information in cache, it does so securely and no information can be gathered from the cache. The cache can be viewed by using URL [about:cache](#) on Firefox.

4.4.7 Testing for Weak Password Policy

Password policy allows any type of character found on standard keyboard. It requires at least 8 characters and accepts 128 most. It does not force numbers or special characters but a short password without those will be marked as weak and not accepted. The passwords are checked against common passwords so passwords like **princess** or **password** or **iloveyou** will not be allowed, however adding a number to them will 'fix' this so passwords like **princess1** or **password1234** work. General password entropy is not calculated as passwords like **aaaaaaaaab** are also accepted. During registration user can choose password same as his chosen name but

if he tries to change a password to his username later via the 'Change your password' function as logged user password with his username will be rejected (part of it with numbers is okay though). Username is not rejected during registration before user picks his username after creating password. At least for consistency stake it would be best to choose username and then password so it can be checked like in change password functionality. It is not required to confirm password which made me accidentally enter and submit password I was not yet intending to use and therefore did not know it when trying to log in again forcing me to reset password.

User is not forced to change his password after any period of time and he can change his password whenever he pleases with different methods. Change password function requires previous password knowledge. The changed passwords can be very similar to previous, it is not allowed to change to same password though. Also the warning messages are different from those seen during registration, if we use common password (princess/password) we are presented with *That password is too easy to guess. Please choose a stronger password.* while in registration the message was just *Please enter a stronger password.* Registration phase allows *show password* function while *change password* function does not.

The image consists of four vertically stacked screenshots of a password entry interface, each with a black background and white text. Each screenshot features a large bold title "You'll need a password" at the top, followed by a smaller instruction "Make sure it's 8 characters or more." Below this is a password input field with a red border. To the right of the input field is a small circular icon with a red slash. The screenshots show different error messages:

- Screenshot 1:** The input field contains "12345678". Below the input field, the error message "Please enter a stronger password." is displayed in red.
- Screenshot 2:** The input field contains a long, complex password: "3Dm5[<>+5FFpDq;!zzZ/R4d)X*9]E-Thl[q5M<f\$;KnT". Below the input field, the error message "Your password needs to be less than 128 characters. Please enter a shorter one." is displayed in red.
- Screenshot 3:** The input field contains "princess". Below the input field, the error message "Please enter a stronger password." is displayed in red.
- Screenshot 4:** The input field contains "princess1". Below the input field, the error message "Please enter a stronger password." is displayed in red.

The screenshot shows a password change form with the following fields:

- Password:** aaaaaaaaaab (The 'a' is underlined in red.)
- Current password:** (Redacted)
- New password:** (Redacted)
- Confirm password:** (Redacted)

A red error message at the bottom of the new password field states: "That password is too easy to guess. Please choose a stronger password."

As mentioned before twitter does not force pretty much any requirements for the password although they provide tips for password strength in their [Help center](#)

Password strength

Create a strong and unique password for your Twitter account. You should also create an equally strong and unique password for the email address associated with your Twitter account.

Do's:

- **Do** create a password at least 10 characters long. Longer is better.
- **Do** use a mix of uppercase, lowercase, numbers, and symbols.
- **Do** use a different password for each website you visit.
- **Do** keep your password in a safe place. Consider using password management software to store all of your login information securely.

Don'ts:

- **Do not** use personal information in your password such as phone numbers, birthdays, etc.
- **Do not** use common dictionary words such as "password", "iloveyou", etc.
- **Do not** use sequences such as "abcd1234", or keyboard sequences like "qwerty."
- **Do not** reuse passwords across websites. Your Twitter account password should be unique to Twitter.

4.4.8 Testing for Weak Security Question Answer


Twitter does not use security question functionality.

4.4.9 Testing for Weak Password Change or Reset Functionalities

Logged in users can change their passwords with method described under [Testing for Weak Password Policy](#) using their current password.

If user is not logged in he can reset his password via the [Forgot password?](#) functionality. If unusual activity is detected user is prompted to input their username (As described in above subsections), meaning password of disclosed users (for example previously found admin@twitter.com) cannot be reset. Otherwise user is asked to select email to send verification code to (the code seems to be 8 length randomly generated digit-letter

sequence). After inputting the correct code user can change his password. The password policy to new password as well as warning messages are the same as when registering with new password, this time however it is required to repeat the password. When the password is reset user is prompted to enter reason for changing password and is logged out of all active Twitter sessions, as stated in Twitter's [Help Center](#).

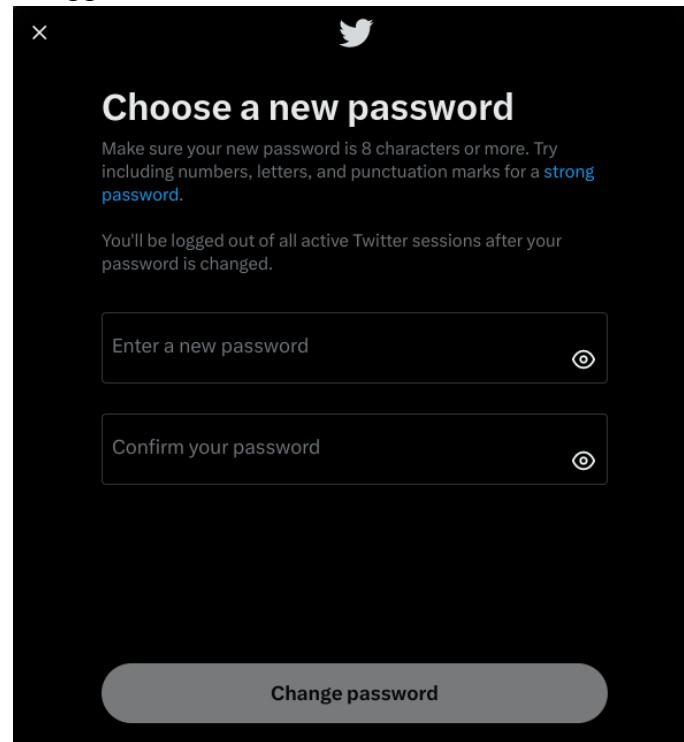

4.4.10 Testing for Weaker Authentication in Alternative Channel

No alternative channels are in our scope (mobile/desktop app).

4.5 Authorization Testing

4.5.1 Testing Directory Traversal File Include

Twitter does not use GET arguments to load files, arguments are rather used to specify settings. Values in cookies are encoded and most likely are not used for dynamic page generation. Attack is therefore not possible.

```
GET /i/api/graphql/eB2SB0qYfesXNLf9joi-_w/HomeTimeline?variables=
%7B%22count%22%3A40%2C%22cursor%22%3A%22DABcGABFypR19DAJxEKAAIXKkvobtfAAAgAAwAAAAAAA%22%2C%
22includePromotedContent%22%3Atrue%2C%22latestControlAvailable%22%3Atrue%2C%22withCommunity%2
%3Atrue%2D&features=%
%7B%22web_lists_timeline_redesign_enabled%22%3Atrue%2C%22responsive_web_graphql_exclude_dire
ctive_enabled%22%3Atrue%2C%22verified_phone_label_enabled%22%3Afalse%2C%22creator_subscription
ns_tweet_preview_api_enabled%22%3Atrue%2C%22responsive_web_graphql_timeline_navigation_enable
d%22%3Atrue%2C%22responsive_web_graphql_skip_user_profile_image_extensions_enabled%22%3Afalse
%2C%22tweetype_umention_optimization_enabled%22%3Atrue%2C%22responsive_web_edit_tweet_api_e
nabled%22%3Atrue%2C%22graphql_is_translatable_rweb_tweet_is_translatable_enabled%22%3Atrue%2C
%22view_counts_everywhere_api_enabled%22%3Atrue%2C%22longform_notetweets_consumption_enabled%2
%3Atrue%2C%22tweet_awards_web_tipping_enabled%22%3Afalse%2C%22freedom_of_speech_not_reach_f
etch_enabled%22%3Atrue%2C%22standardized_nudges_misinfo%22%3Atrue%2C%22longform_notetweets_rich_te
xt_read_enabled%22%3Atrue%2C%22longform_notetweets_inline_media_enabled%22%3Afalse%2C%22respo
nsive_web_enhance_cards_enabled%22%3Afalse%7D HTTP/2
Host: twitter.com
Cookie: guest_id=v1%3A168675853719215783; __twitter_sess=
BAh7CSIKZmhxc2hJQzonQWNoaWqu29udHvbGxlcj06Rmxh2g0kZsYXN0%250ASGFzaHsAbjoQHVzZWR7ADoPY3J1
YXR1ZF9nGwvCLgVpbqIAToMY3NyZlpw%250AZC1I0DRK0DzNNTjh0JmYz42DyW0WzJmzQ0NDE3MTQ5OGY6B2lKIiU0
0Wm3%250ANDkyYmfjNzdmZT3NDJmYTQyZycyNDkYZ2M4N%253D%253D-078e2d234a4f3f000ddb03c62f1b74db04
0a7afdf; kdt=ykkQnd8awignI4FcE55RKRDKGtRQNjH4rwNbZX4J2; auth_token=
4d382f398ce21664398797e5aaeb05d88a610e7; ct=
350abbcc32a6506baac88efb25db53ca3259f201e2ds85f23624c054e109358204c2e40cff0c0e7a5910573384fd2b
1dc6057d23fc82c622f21fa56fe4baadb4586cf48e283de8bab428e88ac3b07ef; att=
1-siqRqIRfyJ79k8v3HAjLNPbwD3MKauRwPS8GwX; lang=en; twid=u3D1666898792648515584; d_prefs=
MjoxLGnvbnN1bnRFdmVyc21vbjoyLHR1eHRfdmVyc21vbjoxMDAw
```

4.5.2 Testing for Bypassing Authorization Schema

As we are again testing in black-box setting, we can only test with user privileges/role. For the same reason we can only test for horizontal bypassing.

Twitter does not identify users by parameter but rather with combination of the right cookie + csrf token and header. So by changing the cookie of one users request with cookie from others gets the response 403 Forbidden and error message with code 353: *This request requires a matching csrf cookie and header.*

By changing both csrf token and cookie we can get the response of other user but by that we authorized ourselves as that user so that is correct behaviour (getting this information would require to catch communication and decode cookie and csrf token). Horizontal bypassing is not possible.

4.5.3 Testing for Privilege Escalation

Privileges on twitter website are most likely stored in the *auth_token* part of cookie as a hash. No other variables store or allow manipulation in HTTP communication.

No file with missing or bad authorization checking were found by URL traversal.

4.5.4 Testing for Insecure Direct Object References

Again twitter loads page contents via POST/GET graphQL requests (*POST /i/api/graphql/eB2SB0qYfesXNLf9joi-_w/HomeTimeline*) to api that return the needed content so there is no possible input for object/content manipulation.

4.6 Session Management Testing

4.6.1 Testing for Session Management Schema

Name	Domain	Expires in	HttpOnly	Secure	SameSite	Note
_gid	.twitter.com	28 hours	No	No		Google Analytics
IDE	.doubleclick.net	1 year	Yes	Yes	None	DoubleClick integration and/or analytics
ga	.twitter.com	1 year	No	No		Google Analytics
att	.twitter.com	1 day	Yes	Yes	None	Authentication and password reset
guest_id	.twitter.com	1 year	No	Yes	None	Advertising when logged out
twid	.twitter.com	1 year	No	Yes	None	Authentication
auth_token	.twitter.com	1 year	Yes	Yes	None	Account login and authentication
ct0	.twitter.com	1 year	No	Yes	Lax	Authentication
lang	twitter.com	Session	No	No		Language functionality
kdt	.twitter.com	1 year	Yes	Yes		Authentication of a known device
d_prefs	.twitter.com	6 months	No	Yes		Cookie preferences
_twitter_sess_	.twitter.com	Session	Yes	Yes		User session
guest_id_marketing	.twitter.com	1 year	No	Yes	None	Advertising when logged out
guest_id_ads	.twitter.com	1 year	No	Yes	None	Advertising when logged out

personalization_id	.twitter.com	1 year	No	Yes	None	Tracking activities on and off Twitter for personalization
--------------------	--------------	--------	----	-----	------	--

4.6.2 Testing for Cookies Attributes

Attribute secure is used for all authentication related cookies. However few authentication cookies have the attribute SameSite set to None which may lead to cookie hijacking in case of CSRF/XSS vulnerability.

4.6.3 Testing for Session Fixation

The cookie _twitter_sess is set before the authentication and it remains the same after successful authentication. When that _twitter_sess value is set to another user it doesn't make them authenticated as the original one, probably because there are many cookies used in combination for the authentication.

4.6.4 Testing for Exposed Session Variables

Session cookie has its own different value for every session. Protection from eavesdropping is ensured by HTTPS protocol.

When the _twitter_sess cookie is set, it comes with cache-control directives (apart from others) **no-cache** and **no-store** which prevent it from being cached.

```

1 HTTP/2 200 OK
2 Date: Sat, 17 Jun 2023 21:30:04 GMT
3 Perf: 7626143928
4 Pragma: no-cache
5 Server: tsa_o
6 Status: 200 OK
7 Expires: Tue, 31 Mar 1981 05:00:00 GMT
8 Set-Cookie: fm=0; Max-Age=0; Expires=Sat, 17 Jun 2023 21:30:04 GMT; Path=/; Domain=.twitter.com; Secure;
HTTPOnly
9 Set-Cookie: _twitter_sess=
BAh7CSIKZmxhc2hJQzonQWN0aw9uQ29udHJvbGxlcjo6Rmxhc2g60kZsYXNo%250ASGFzaHsABjoKQHVzzWR7ADoPY3J1YXR1ZF9hdGwiCG7m
Q8uIAToMY3NyZ19p%250AZC11ZmE0MmIyYTc4ZTd1NjJiNjc5M2UxNTEyYTQwOGFmNzk6B21kTiUyOD1i%250AODA1Y2M5Y2EwZDRiMWE5MjU
4MTc3MWZiYzE4Ng%253D%253D--129fc5e110bbe1139ccfc8e38c20b86031af5857; Path=/; Domain=.twitter.com; Secure;
HTTPOnly
10 Content-Type: text/javascript; charset=utf-8
11 Cache-Control: no-cache, no-store, must-revalidate, pre-check=0, post-check=0

```

After reviewing the client-server communication the session cookie seems to be contained only in POST requests.

4.6.5 Testing for Cross Site Request Forgery

CSRF Token is included in the _twitter_sess cookie and also as a HTTP header X-Csrf-Token in requests, which prevents the application from being vulnerable to Cross Site Request Forgery.

4.6.6 Testing for Logout Functionality

The logout button is placed in an area of the page that is fixed in the view port of the browser and isn't affected by scrolling of the content. However the logout button cannot be seen directly as user first has to click on the three dots next to his account name and then choose the logout button from the menu that pops out.

The screenshot shows a mobile application interface. On the left is a sidebar with navigation links: Home, Explore, Notifications, Messages, Lists, Bookmarks, Verified, Profile, and More. Below these is a blue 'Tweet' button. A red box highlights a user profile card for 'Chris P. Bacon' (@p_chris_bacon). The main content area is titled 'Home' and shows a 'For you' feed. One tweet from Elon Musk (@elonmusk) dated June 15 is visible, stating: 'This conspiracy theory that birds are actually government spy drones is ... totally false'. To the right of the feed is a sidebar titled 'pq talks' listing various trending topics like Norway, Ukrainian, USSR, WWII, #CanYaman, Queen, and INTERIOR PORN. At the bottom is a 'Who to follow' section with profiles for Fabrizio Romano, INTERIOR PORN, and Joe Rogan.

Add an existing account

[Log out @p_chris_bacon](#)



Note that user cannot log out within the user interface before they answer the cookie related dialog.

This screenshot is identical to the one above but includes a prominent black cookie consent dialog at the bottom. The dialog contains the text: 'Did someone say ... cookies? Twitter and its partners use cookies to provide you with a better, safer and faster service and to support our business. Some cookies are necessary to use our services, improve our services, and make sure they work properly. Show more about your choices.' It features two buttons: 'Accept all cookies' and 'Refuse non-essential cookies'.

If one is logged out and tries to load a page that is only available to authenticated users with their old session cookies, the application sends a response that something went wrong.

```

Request
Pretty Raw Hex
1 GET /flow/login
2 Host: twitter.com
3 Cookie: lang=en; d_prefs=MjoxLGNvbN1bnRfdmVyc2lvbjoyLHR1eHfdmVyc2lvbjoxMDAw; guest_id=v1%3A168707946111835899; _twitter_sess=BAh7CSIKZmhch2hJ0zon0Wn0aM9u029u0dHJvBxlcjo6Rmxhc2g60kZsYXNo%250ASGFzaHsABjoKOHvz2Wb7AdoPy3J1YXR1f9hdGwrcEyU7c21AToMYzNy19pk25AZC11M2zYy2W02m0k1YmNv128hyjAwNTM1Tg20Dg5MmYzNjM6B2lkIi1uWzTY1%250AZjVhYwU5ZGY3mIxMGExYzVkmTU3YTczMTQ1MA%253D%253D-74881c523cd695e9636af832e18ce0954f687db; kdt=PjYsYp1VmC1gwUL6uRj2Faksg98bh0qTU19rY9; auth_token=10aab78354c6be3092061083579386363a9a76f; ct0=0899cb0dc0c1c161e034183567b3f161c4e9ad43dfe57eaed14b59d6ef6953fb72d67b06cc5c71e23fe3c7b84fb53a3bd6e029f6a636210f29859ef7994992c52be27912219e3fe3b3d32e665; twid=u%3D1664664683398287362
4 Sec-Ch-Ua: "Not A Brand";v="24", "Chromium";v="110"
5 Sec-Ch-Ua-Mobile: ?0
6 Sec-Ch-Ua-Platform: "Linux"
7 Upgrade-Insecure-Requests: 1
8 User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/110.0.5481.78 Safari/537.36
9 Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/avif,image/webp,image/apng,*/*;q=0.8,application/signed-exchange;v=b3;q=0.7
10 Sec-Fetch-Site: same-origin
11 Sec-Fetch-Mode: navigate
12 Sec-Fetch-User: ?
13 Sec-Fetch-Dest: document
14 Referer: https://twitter.com/i/flow/login
15 Accept-Encoding: gzip, deflate
16 Accept-Language: en-US,en;q=0.9
17
18

Response
Pretty Raw Hex Render
Something went wrong. Try reloading.

```

4.6.7 Testing Session Timeout

During the testing process I haven't experienced a single timeout, therefore the only time limit appears to be the expiry date of cookies.

4.6.8 Testing for Session Puzzling

All session variables seem to be correctly regenerated for every session and no session puzzling was detected.

4.6.9 Testing for Session Hijacking

The application runs on HTTPS, uses HSTS and all cookies related to session or authentication are marked as secure.

4.7 Input Validation Testing

4.7.1 Testing for Reflected Cross Site Scripting

None of the input vectors (POST/GET parameters) are reflected in response or generate an output that would suggest XSS vulnerability.

4.7.2 Testing for Stored Cross Site Scripting

Here the input vector is obviously the "tweet" mechanism, where user can input anything and it is stored in the backend and can be displayed by any user. Another possible vector is comments below "tweets".

After testing these vectors backend seems to validate and sanitize input very well and no issue was encountered on Twitter's part. Another problem is once again Twitter's obfuscation of its functionality.

4.7.3 Testing for HTTP Verb Tampering

Discussed in [4.2.6 Test HTTP Methods](#).

4.7.4 Testing for HTTP Parametr Pollution

Search function uses GET parameters. Using multiple same name parameters returns results for only the first one.

Request			Response		
Pretty	Raw	Hex	Pretty	Raw	Hex
<pre>1 GET /i/api/1.1/search/typeahead.json? include_ext_is_blue_verified=1&include_ext_verified_type=1& include_ext_profile_image_shape=1&q=AHOJ&q=OBED&src= search_box&result_type=events%2Cusers%2Ctopics</pre> <p>HTTP/2</p> <p>Host: twitter.com</p> <p>Cookie: d_prefs=MjoxLGNbNlbnRfdmVyc2lvbjoyLHRleHRfdmVyc2lvbjoxMDAw; guest_id=v1%3A168632124879960996; kdt=KFBj45SzLQwEcatt16Q3tFMvmxzLU6t1ZGwCIp; auth_token=bfe122a7bc87e40f694cab0c88f69d18665841ec; ct0=93c81cc62d1279ab26d4a701199fef3f33f64a4e4212059e3c8b0b018bf84d40dc29a2d6485d72e080c9b85c5f0259c8af08c26ad32bd281ee8cda5b29320c406a601814e042ee1abe6cb873aeee84068; twid=u%3D1666483717898919948; dnt=1; lang=en</p> <p>Sec-Ch-Ua: "Chromium";v="107", "Not=A?Brand";v="24"</p> <p>X-Twitter-Client-Language: en</p> <p>X-Csrf-Token: 93c81cc62d1279ab26d4a701199fef3f33f64a4e4212059e3c8b0b018bf84d40dc29a2d6485d72e080c9b85c5f0259c8af08c26ad32bd281ee8cda5b29320c406a601814e042ee1abe6cb873aeee84068</p> <p>Sec-Ch-UA-Mobile: ?0</p> <p>Authorization: Bearer AAAAAAAAAAAAAAAANRILgAAAAAAAnNwIzUejRC0uH5E6I8xnZz4puTs%3D1z7ttfk8LF81IUql6CjhjLTVju4F43AGWMjCpTnA</p> <p>User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/107.0.5304.107 Safari/537.36</p> <p>X-Twitter-Auth-Type: OAuth2Session</p> <p>X-Client-Uuid: ed501ee1-13d0-430c-a4a6-e8ad7c019476</p> <p>X-Twitter-Active-User: yes</p> <p>Sec-Ch-UA-Platform: "Linux"</p> <p>Accept: */*</p> <p>Sec-Fetch-Site: same-origin</p> <p>Sec-Fetch-Mode: cors</p> <p>Sec-Fetch-Dest: empty</p> <p>Referer: https://twitter.com/explore</p> <p>Accept-Encoding: gzip, deflate</p> <p>Accept-Language: en-US,en;q=0.9</p>	<pre>1 HTTP/2 200 OK 2 Date: Tue, 20 Jun 2023 13:56:07 GMT 3 Perft: 7626143928 4 Pragma: no-cache 5 Server: tsa_o 6 Status: 200 OK 7 Expires: Tue, 31 Mar 1981 05:00:00 GMT 8 Content-Type: application/json; charset=utf-8 9 Cache-Control: no-cache, no-store, must-revalidate, pre-check=0, post-check=0 10 Last-Modified: Tue, 20 Jun 2023 13:56:07 GMT 11 X-Transaction: 52d23bd3c5dallfd 12 Content-Length: 7150 13 X-Access-Level: read-write-directmessages 14 X-Frame-Options: SAMEORIGIN 15 X-Transaction-Id: 52d23bd3c5dallfd 16 X-Xss-Protection: 0 17 Content-Disposition: attachment; filename=json.json 18 X-Client-Event-Enabled: true 19 X-Content-Type-Options: nosniff 20 X-Twitter-Response-Tags: BouncerCompliant 21 Strict-Transport-Security: max-age=631138519 22 X-Response-Time: 279 23 X-Connection-Hash: b169dacfa7183014899570ee4a0c60a79cc10d7658aefd7alc5873672cc3 79d4 24 25 { "num_results": 10, "users": [{ "id": 2794664691, "id_str": "2794664691", "verified": false, "ext_is_blue_verified": false, "badges": [], "is_dm_able": false, "is_secret_dm_able": false, "is_blocked": false, "can_media_tag": false, "name": "Ana Hojbot\u0103", "screen_name": "Ahojbot\u0103", "profile_image_url": "http://pbs.twimg.com/profile_images/1636099888659</pre>				

No vulnerability found.

4.7.5 Testing for SQL Injection

Input vector for SQL injection could again be the search function, that might communicate with database through API. Trying some classic SQL malicious code like different types of comments (since we don't know what database twitter is running on) did not yield any suspicious result. In fact testing right in the browser shows that any special symbol `@#$%^-'";:` on its own returns "Something went wrong".

The following screenshot shows that the function sanitizes the input correctly and no unintended behaviour was found.

Once again testing in black-box setting with little to none information about how the back-end, front-end and API communication is realised and what exactly each layer does proves to be the biggest obstacle in finding possible vulnerabilities.

4.7.6 Testing for LDAP Injection

Twitter probably does not use LDAP, if so, it does so correctly. When applying search filters the request looks like this:

4.7.7 Testing for XML Injection

Twitter does not use XML style communication.

4.7.8 Testing for SSI Injection

We could not determine if SSI is enabled since we don't have access to web server and no `.shtml` pages were found.

4.7.9 Testing for XPath Injection

Since Twitter does not use XML documents XPath injection is not possible as well.

4.7.10 Testing for IMAP SMTP Injection

Twitter does not provide any public mail service.

When creating a user account, we received an email with verification code from verify@twitter.com. In that email's headers was stated that it was received from spring-chicken-cb.twitter.com [199.16.156.136], but running `nmap` on it didn't reveal any open ports.

Message headers

X

```
Return-Path: <b0524ed6edeehapentesttwitter=proton.me@bounce.twitter.com>
X-Original-To: ehapentesttwitter@proton.me
Delivered-To: ehapentesttwitter@proton.me
Authentication-Results: mailin037.protonmail.ch; dkim=fail (Bad 0 bit
    rsa-sha256 signature.) header.d=twitter.com header.a=rsa-sha256
Authentication-Results: mailin037.protonmail.ch; dmarc=pass (p=reject dis=none)
    header.from=twitter.com
Authentication-Results: mailin037.protonmail.ch; spf=pass
    smtp.mailfrom=bounce.twitter.com
Authentication-Results: mailin037.protonmail.ch; arc=none smtp.remote-
    ip=199.16.156.136
Authentication-Results: mailin037.protonmail.ch; dkim=temperror (0-bit key)
    header.d=twitter.com header.i=@twitter.com header.b="atUxKfP"
Received: from spring-chicken-cb.twitter.com (spring-chicken-cb.twitter.com
    [199.16.156.136]) (using TLSv1.2 with cipher ECDHE-RSA-AES256-GCM-SHA384 (256/256
    bits))
    (No client certificate requested) by mailin037.protonmail.ch (Postfix) with ESMTPS id
    4QjN906Pr1z9vNhF for <ehapentesttwitter@proton.me>; Fri, 16 Jun 2023 15:18:44 +0000
    (UTC)
Dkim-Signature: v=1; a=rsa-sha256; c=relaxed/relaxed; d=twitter.com; s=dkim-201406;
    t=1686928722; bh=gt7o/cLd2hKEV6sFKc/l2kF6jrlk0+2MEHYUJtb0YQ0=;
    h=Date:From:To:Subject:MIME-Version:Content-Type:Message-ID;
    b=atUxKfPIEEsNPTOhBcwVgU4W03IowWuba7l1qfxBUjrJeYHL1mrL+mUQFcssTVL91
```

```
(kali㉿kali)-[~]
└─$ nmap -sV -Pn --top-ports 1000 199.16.156.136
Starting Nmap 7.93 ( https://nmap.org ) at 2023-06-20 05:25 EDT
Nmap scan report for spring-chicken-cb.twitter.com (199.16.156.136)
Host is up.
All 1000 scanned ports on spring-chicken-cb.twitter.com (199.16.156.136) are in ignored states.
Not shown: 1000 filtered tcp ports (no-response)

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 202.40 seconds
```

4.7.11 Testing for Code Injection

Command parameters were injected into various URLs, but none of them worked.

Request	Response
<pre>Pretty Raw Hex 1 POST /api/1.1/post/client_event.json?keepalive=false&cmd=sleep%2010 HTTP/2 2 Host: twitter.com 3 Cookie: guest_id=v1_131168725507413494289; _twitter_sess= 4 Cookies: CK=IK2MxhcBhJQOzonWQaWuQ9uZ9udHJvbKlcj06RmhCgE0KzrYHn0250ASGFzaHsAbjoKQHVz2WR7AdoY3J1YXR1Zf9PhMwvA1L00ZC110GUi1Y3NjY1Sp1250A2E4NjU4Z18D0E81k1MnfTQw1250AODC22WV4ZGmMvYjSycZDpVYJ2TMndBhMa253d1253d-ecb595c19893b03eef2edcd4d75d4ddcd6733848; kdt=+CtC-WURXSYBzPaHNT1K0N0; token=j180el1z79ad71c8c2aae5a5d78eae07c7dca77; csrf_token=bb44a4ale76d925ad4893d3d158cbfffa81c0e88314935eb72767bcef1292e8a29386595152db062a393b41; dehcf0fd17d13c05ad44a5c7e392a371c140d52770c35c3d007d4t; att=1-x3qGypocou1lTs0Ddd72uSaK97L7TElfq015ix22; lang=en; twid=v131d16642e4683392b7342; d_prefs=MToxLGNvnbNlNEyj1ne4f79XK0p2AaHT1K0N0; guest_id=ads=v1_131168725507413494289; guest_id_marketing=v1_131168725507413494289; personalization_id="v1_BHfffhgOFKnIPs95hRvEbjg=""_g=GAI.2.90180617687255106; gclid=GAI.2.1319352204.1687255106 4 Content-Length: 431 5 Content-Type: application/x-www-form-urlencoded 6 X-Client-User-Agent-Language: en 7 X-Carf-Token: 8 Sec-Ch-Ua-Mobile: ?0 9 Authorization: Bearer 9AAAAAAAABBBBBBBBAAANFILgAAAAAAnhW1zvE=RCOuHS6EISxnZz4puTs43D1Zv7ttfKBLF81tUqlscjhjLTVu4FA33AGW 9WCPtNa 10 User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/112.0.5615.80 Safari/537.36 11 Content-Type: application/x-www-form-urlencoded 12 Accept: /* 13 X-Twitter-Auth-Type: OAuth2Session 14 X-Client-Uuid: 05B3964a-40c8-4026-bba5-9d8fe781020f 15 X-Twitter-Active-User: yes 16 Sec-Ch-Ua-Platform: "Windows" 17 Origin: https://twitter.com 18 Sec-Fetch-Site: same-origin 19 Sec-Fetch-Mode: cors 20 Sec-Fetch-Dest: empty 21 Referer: https://twitter.com/home 22 Accept-Encoding: gzip, deflate 23 Accept-Language: cs-CZ,cs;q=0.9 24 25 category=perfmon&log= 95B7B12ddescription%23At2webt3Aurkt3Anotifications%3Afetch_Top%3Asuccess%23C%22product%22%3A%21%23webt3Aurkdescription_ms%23A%2322%7D%2C%7BV%22description%23A%2321%23webt3aurkt3Anotifications%3Afetch_Top%3Aform%3At3success%23t3C%23product%23t3A%23webt3%23duration_ms%23A%2322%7D%2C%7B%23description%23A%23webt3Allfcycle%3Atweet%3Amount%32%23product%23t3At%23webt3%22%23duration_ms%23A%2320%7D%23</pre>	<pre>Pretty Raw Hex Render 1 HTTP/2 200 OK 2 Date: Tue, 20 Jun 2023 10:06:56 GMT 3 Perf: 7626.143928 4 Pragma: no-cache 5 Server: tsa_o 6 Expires: Tue, 31 Mar 1981 05:00:00 GMT 7 Cache-Control: no-cache, no-store, must-revalidate, pre-check=0, post-check=0 8 Last-Modified: Tue, 20 Jun 2023 10:06:56 GMT 9 X-Transaction: a15a171d4a43344f 10 Content-Length: 0 11 X-Frame-Options: SAMEORIGIN 12 X-Transaction-Id: a15a171d4a33d44f 13 X-Xss-Protection: 0 14 X-Content-Type-Options: nosniff 15 X-Twitter-Response-Tags: BouncerCompliant 16 Strict-Transport-Security: max-age=631138519 17 X-Response-Time: 113 18 X-Connection-Hash: e45c827349a2ce1910d8de1648c14d564561f61b3fc3cc2bd97ebdeb4fa419 19 20</pre>

The screenshot shows a NetworkMiner capture of a Twitter API request and response. The request (Line 1) is a GET to /api/2/guide.json with various parameters like include_profile_interstitial_type, include_blocking, include_blocked_by, include_followed_by, include_want_retweets, include_mute_edge, include_can_dm, include_can_media_tag, include_ext_avatar, include_ext_is_blue_verified, include_ext_verified_type, include_ext_profile_image_shape, include_status, include_cards, include_ext_text_color, include_ext_limited_actions_results, include_quote_count, include_reply_count, include_ext_text_color, include_ext_is_quote_status, include_ext_is_extended_tweet, include_ext_is_quote_tweet, include_ext_is_retweet, include_ext_is_media_availability, include_ext_sensitive_media_warning, include_ext_trusted_friends_metadata, and include_ext_is_implied_quoted_tweet. The response (Line 19) includes X-Rate-Limit-Remaining, X-Twitter-Response-Tags, Strict-Transport-Security, X-Response-Time, X-Connection-Hash, and a large JSON object under "globalObjects" containing "tweets", "users", "moments", "cards", "places", "media", "broadcasts", "topics", and "lists".

```

Request
Pretty Raw Hex Render
1 GET /api/2/guide.json?include_profile_interstitial_type=1&include_blocking=1&include_blocked_by=1&include_followed_by=1&include_want_retweets=1&include_mute_edge=1&include_can_dm=1&include_can_media_tag=1&include_ext_avatar=1&include_ext_is_blue_verified=1&include_ext_verified_type=1&include_ext_profile_image_shape=1&include_status=1&cards_platform=Web-1.0&include_cards=1&include_ext_text_color=true&include_ext_limited_actions_results=false&include_quote_count=true&include_reply_count=1&include_ext_text_color=extended&include_ext_is_quote_status=true&include_ext_is_extended_tweet=true&include_ext_is_retweet=true&include_ext_is_media_availability=true&include_ext_sensitive_media_warning=true&include_ext_trusted_friends_metadata=true&send_error_codes=true&is_implied_quoted_tweet=true&count=20&requestContext=launch&display_location=web_sidebar#focal_tweet_id=16701883835490477056&include_page_configuration=false&entity_tokens=false&text=+&mediaStats=2&highlightedLabel=2&hasNftAvatar=2&voiceInfo=2&birdwatchPivot=2&superFollowMetadata=2&CumulativeInfo=2&editControlCmd=sleep@1010 HTTP/2
2 Host: twitter.com
3 Date: Mon, 19 Jun 2023 14:46:45 GMT
4 Content-Type: application/json; charset=utf-8
5 Content-Length: 1000
6 Connection: close
7 Sec-WebSocket-Key: 0nRJLgAAAAAnNvIzUejRC0uHSE618xn2z4puTs13D12v7tcfk0LF81lUq16cHjhLTvJu4Fa33AGW
8 Sec-WebSocket-Version: 13
9 Sec-Cipher-Suite: TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256
10 Sec-Protocol: http2
11 Sec-WebSocket-Ping: 1
12 Sec-WebSocket-Pong: 1
13 Sec-WebSocket-Extensions: permessage-deflate
14 Sec-WebSocket-Protocol: >
15 Sec-WebSocket-Location: https://twitter.com
16 Sec-Fetch-Site: same-origin
17 Sec-Fetch-Mode: cors
18 Sec-Fetch-Dest: empty
19 Referer: https://twitter.com/elonmusk/status/1670186385490477056
20 Accept-Encoding: gzip, deflate
21 Accept-Language: cs-CZ,cs;q=0.9
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
509
510
511
512
513
514
515
516
517
518
519
519
520
521
522
523
524
525
526
527
528
529
529
530
531
532
533
534
535
536
537
538
539
539
540
541
542
543
544
545
546
547
548
549
549
550
551
552
553
554
555
556
557
558
559
559
560
561
562
563
564
565
566
567
568
569
569
570
571
572
573
574
575
576
577
578
579
579
580
581
582
583
584
585
586
587
587
588
589
589
590
591
592
593
594
595
596
597
597
598
599
599
600
601
602
603
604
605
606
607
608
609
609
610
611
612
613
614
615
616
617
618
619
619
620
621
622
623
624
625
626
627
628
629
629
630
631
632
633
634
635
636
637
638
639
639
640
641
642
643
644
645
646
647
648
649
649
650
651
652
653
654
655
656
657
658
659
659
660
661
662
663
664
665
666
667
668
669
669
670
671
672
673
674
675
676
677
678
679
679
680
681
682
683
684
685
686
687
687
688
689
689
690
691
692
693
694
695
696
697
697
698
699
699
700
701
702
703
704
705
706
707
708
709
709
710
711
712
713
714
715
716
717
718
719
719
720
721
722
723
724
725
726
727
728
729
729
730
731
732
733
734
735
736
737
738
739
739
740
741
742
743
744
745
746
747
748
749
749
750
751
752
753
754
755
756
757
758
759
759
760
761
762
763
764
765
766
767
768
769
769
770
771
772
773
774
775
776
777
778
779
779
780
781
782
783
784
785
786
787
787
788
789
789
790
791
792
793
794
795
796
797
797
798
799
799
800
801
802
803
804
805
806
807
808
809
809
810
811
812
813
814
815
816
817
817
818
819
819
820
821
822
823
824
825
826
827
828
829
829
830
831
832
833
834
835
836
837
838
839
839
840
841
842
843
844
845
846
847
848
849
849
850
851
852
853
854
855
856
857
858
859
859
860
861
862
863
864
865
866
867
868
869
869
870
871
872
873
874
875
876
877
878
879
879
880
881
882
883
884
885
886
887
887
888
889
889
890
891
892
893
894
895
896
897
897
898
899
899
900
901
902
903
904
905
906
907
908
909
909
910
911
912
913
914
915
916
917
917
918
919
919
920
921
922
923
924
925
926
927
928
929
929
930
931
932
933
934
935
936
937
938
939
939
940
941
942
943
944
945
946
947
948
949
949
950
951
952
953
954
955
956
957
958
959
959
960
961
962
963
964
965
966
967
968
969
969
970
971
972
973
974
975
976
977
978
979
979
980
981
982
983
984
985
986
987
987
988
989
989
990
991
992
993
994
995
996
997
997
998
999
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1079
1080
1081
1082
1083
1084
1085
1086
1087
1087
1088
1089
1089
1090
1091
1092
1093
1094
1095
1095
1096
1097
1098
1098
1099
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1179
1180
1181
1182
1183
1184
1185
1186
1187
1187
1188
1189
1189
1190
1191
1192
1193
1194
1195
1195
1196
1197
1198
1198
1199
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1279
1280
1281
1282
1283
1284
1285
1286
1287
1287
1288
1289
1289
1290
1291
1292
1293
1294
1295
1295
1296
1297
1298
1298
1299
1299
1300
1301
1302
1303
1304
1305
1305
1306
1307
1308
1309
1309
1310
1311
1312
1313
1314
1315
1315
1316
1317
1318
1318
1319
1319
1320
1321
1322
1323
1324
1325
1325
1326
1327
1328
1328
1329
1329
1330
1331
1332
1333
1334
1335
1335
1336
1337
1338
1338
1339
1339
1340
1341
1342
1343
1344
1345
1345
1346
1347
1348
1348
1349
1349
1350
1351
1352
1353
1354
1355
1355
1356
1357
1358
1358
1359
1359
1360
1361
1362
1363
1364
1365
1365
1366
1367
1368
1368
1369
1369
1370
1371
1372
1373
1374
1375
1375
1376
1377
1378
1378
1379
1379
1380
1381
1382
1383
1384
1385
1385
1386
1387
1388
1388
1389
1389
1390
1391
1392
1393
1394
1394
1395
1396
1397
1397
1398
1398
1399
1399
1400
1401
1402
1403
1404
1404
1405
1406
1407
1407
1408
1409
1409
1410
1410
1411
1412
1412
1413
1413
1414
1414
1415
1415
1416
1416
1417
1417
1418
1418
1419
1419
1420
1421
1421
1422
1422
1423
1423
1424
1424
1425
1425
1426
1426
1427
1427
1428
1428
1429
1429
1430
1431
1431
1432
1432
1433
1433
1434
1434
1435
1435
1436
1436
1437
1437
1438
1438
1439
1439
1440
1441
1441
1442
1442
1443
1443
1444
1444
1445
1445
1446
1446
1447
1447
1448
1448
1449
1449
1450
1451
1451
1452
1452
1453
1453
1454
1454
1455
1455
1456
1456
1457
1457
1458
1458
1459
1459
1460
1461
1461
1462
1462
1463
1463
1464
1464
1465
1465
1466
1466
1467
1467
1468
1468
1469
1469
1470
1471
1471
1472
1472
1473
1473
1474
1474
1475
1475
1476
1476
1477
1477
1478
1478
1479
1479
1480
1481
1481
1482
1482
1483
1483
1484
1484
1485
1485
1486
1486
1487
1487
1488
1488
1489
1489
1490
1491
1491
1492
1492
1493
1493
1494
1494
1495
1495
1496
1496
1497
1497
1498
1498
1499
1499
1500
1501
1501
1502
1502
1503
1503
1504
1504
1505
1505
1506
1506
1507
1507
1508
1508
1509
1509
1510
1510
1511
1511
1512
1512
1513
1513
1514
1514
1515
1515
1516
1516
1517
1517
1518
1518
1519
1519
1520
1520
1521
1521
1522
1522
1523
1523
1524
1524
1525
1525
1526
1526
1527
1527
1528
1528
1529
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1698
1699
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1789
1790
1791
1792
1793
1794
1795
1796
1797
1797
1798
1799
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1898
1899
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1969
1970
1971
1972
1973
1974
1975
1976
197
```

4.7.17 Testing for Host Header Injection

When supplied another domain into the Host header field, the server responds with 404 Not Found.

Request	Response
<pre>1 GET /i/api/files/v1/avatar_content?user_ids=44196397&only_spaces=true HTTP/2 2 Host: example.org 3 Cookie: guest_id=v131a1e0725507413494289; kdt=CubFWUKgYB1jNEYjn6h4E7weXXWENZpaAnYK1ONO; auth_token=31840e1275ad48c2ae5da576eae07c7dc47; ct0= bb444a1e76d925ad486823ed33b5f5e6ce1158cbffab41c068f314935eb7267bcef1292e8a2930659515db062a393b4 1debcfffd317144bd90d44a527392d9a371c44e67ba04d52770c935c3d087dd; att= 1-23@40ppoo01ITs00dYzusafqL7TEf90151x22; twid=ut3D16f46646833982073c; d_prefs= MTxOLGvbnNlbNfdmVyc1vbjoyLR1eRtRdmVyc1vbjoxMDav; guest_id_ads=v131a1e0725507413494289; guest_id_marketing=v131a1e0725507413494289; personalization_id="v1_BHffhg8FkN1P9s5rRv+BDg="; guest_id_ga=GAI.2.901938001.1687255106; _gid=GAI.2.1319352204.1687255106; lang=en 5 Sec-Ch-Ua: "Not set" 6 X-Twitter-Client-Language: en 7 X-Csrf-Token: bb444a1e76d925ad486823ed33b5f5e6ce1158cbffab41c068f314935eb7267bcef1292e8a2930659515db062a393b4 1debcfffd317144bd90d44a527392d9a371c44e67ba04d52770c935c3d087dd 7 Sec-Ch-Ua-Mobile: ?0 8 Authorization: Bearer AAAAAAAAAAAAAAAANR!LgAAAAAAAnWizUejRCOuH5E6IBxnz24puTs4D1zV7ttfkBLF81IUql6chjhLTvJu4FA33AG WWCpTnA 9 User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/114.0.5735.134 Safari/537.36 10 X-Twitter-Auth-Type: OAuth2Session 11 X-Client-Uuid: 0683964a-40c8-4826-b0a5-9dbfe781020f 12 X-Twitter-Active-User: no 13 Sec-Ch-Ua-Platform: "" 14 Accept: */ 15 Sec-Fetch-Site: same-origin 16 Sec-Fetch-Mode: cors 17 Sec-Fetch-Dest: empty 18 Referer: https://twitter.com/elonmusk 19 Accept-Encoding: gzip, deflate 20 Accept-Language: cs-CZ,cs;q=0.9 21 22 </pre>	<pre>1 HTTP/2 404 Not Found 2 Perf: 7626143928 3 Cache-Control: no-cache, no-store, max-age=0 4 Content-Length: 0 5 X-Transaction-Id: 7d0d312cebe0225a 6 X-Response-Time: 107 7 X-Connection-Hash: da08e40320bf0e6205afc22589adc7ca9107830fda9b7811fa55b5d79c54ea6f 8 Date: Tue, 20 Jun 2023 16:34:53 GMT 9 Server: tsa_o 10 11 </pre>

We didn't find any request that would contain the X-Forwarded-Host header. When we added the header ourselves, the server seemed to not process that header at all.

Request	Response
<pre>1 GET /i/api/2/guide.json?include_profile_interstitial_type=1&include_blocking=1& include_blocked_by=1&include_followed_by=1&include_want_retweets=1&include_mute_edge=1& include_can_dm=1&include_can_media_tag=1&include_ext_has_ntf_avatar=1& include_ext_is_blue_verified=1&include_ext_verified_type=1&include_ext_profile_image_shape=1& skip_status=1&include_ext_user_entities=1&include_ext_text_color=1&include_ext_text_type=1& include_ext_text_size=1&include_ext_view_label=1&include_ext_with_reply_count=1& user_mode=extended&include_ext_viewer_label=1&include_ext_with_replies=1&include_ext_with_text_color=1& include_ext_with_text_type=1&include_ext_with_text_size=1&include_ext_with_user_entities=1&true& include_ext_sensitive_media_warning=true&include_ext_trusted_friends_metadata=true& send_error_codes=true&simple_quoted_tweet=true&count=40&cursor=&DefaultTopCursorValue4& display_location_web= sidebar&include_page_configuration=false&profile_user_id=44196397& entity_filters=false&ext= mediaState=1&highlightedLabel=1&hasNftAvatar=2&voiceInfo=2&birdwatchPivot=2&superFollowMetadata=1 5 Sec-Ch-Ua: "Not set" 6 X-Forwarded-Host: example.org 7 X-Forwarded-Host: example.org 8 Cookie: guest_id=v131a1e0725507413494289; kdt=CubFWUKgYB1jNEYjn6h4E7weXXWENZpaAnYK1ONO; auth_token=31840e1275ad48c2ae5da576eae07c7dc47; ct0= bb444a1e76d925ad486823ed33b5f5e6ce1158cbffab41c068f314935eb7267bcef1292e8a2930659515db062a393b4 1debcfffd317144bd90d44a527392d9a371c44e67ba04d52770c935c3d087dd; att= 1-23@40ppoo01ITs00dYzusafqL7TEf90151x22; twid=ut3D16f46646833982073c; d_prefs= MTxOLGvbnNlbNfdmVyc1vbjoyLR1eRtRdmVyc1vbjoxMDav; guest_id_ads=v131a1e0725507413494289; guest_id_marketing=v131a1e0725507413494289; personalization_id="v1_BHffhg8FkN1P9s5rRv+BDg="; guest_id_ga=GAI.2.901938001.1687255106; _gid=GAI.2.1319352204.1687255106; lang=en 5 Sec-Ch-Ua-Mobile: ?0 6 X-Twitter-Client-Language: en 7 X-Csrf-Token: bb444a1e76d925ad486823ed33b5f5e6ce1158cbffab41c068f314935eb7267bcef1292e8a2930659515db062a393b4 1debcfffd317144bd90d44a527392d9a371c44e67ba04d52770c935c3d087dd 7 Sec-Ch-Ua-Mobile: ?0 8 Authorization: Bearer AAAAAAAAAAAAAAAANR!LgAAAAAAAnWizUejRCOuH5E6IBxnz24puTs4D1zV7ttfkBLF81IUql6chjhLTvJu4FA33AG WWCpTnA 9 User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/114.0.5735.134 Safari/537.36 10 X-Twitter-Auth-Type: OAuth2Session 11 X-Client-Uuid: 0683964a-40c8-4826-b0a5-9dbfe781020f 12 X-Twitter-Active-User: yes 13 X-Twitter-UtcOffset: +0200 14 Sec-Ch-Ua-Platform: "" 15 Accept: */ 16 Sec-Fetch-Site: same-origin 17 Sec-Fetch-Mode: cors 18 Sec-Fetch-Dest: empty 19 Referer: https://twitter.com/elonmusk 20 Accept-Encoding: gzip, deflate 21 Accept-Language: cs-CZ,cs;q=0.9 22 23 </pre>	<pre>1 HTTP/2 200 OK 2 Date: Tue, 20 Jun 2023 16:39:42 GMT 3 Perf: 7626143928 4 Pragma: no-cache 5 Cache-Control: no-cache, no-store, must-revalidate, pre-check=0, post-check=0 6 Expires: Tue, 31 Mar 1981 09:00:00 GMT 7 Content-Type: application/json; charset=utf-8 8 Cache-Control: no-cache, no-store, must-validate, pre-check=0, post-check=0 9 Last-Modified: Tue, 20 Jun 2023 16:39:43 GMT 10 Content-Length: 20675 11 X-Frame-Options: SAMEORIGIN 12 X-Transaction-Id: e00619c426e3fe 13 X-Ks-Protection: 0 14 X-Rate-Limit-Limit: 20000 15 X-Rate-Limit-Remaining: 19994 16 Content-Disposition: attachment; filename=json.json 17 Timing-Allow-Origin: https://twitter.com, https://mobile.twitter.com 18 X-Content-Type-Options: nosniff 19 X-Rate-Limit-Remaining: 19994 20 X-Twitter-Response-Tags: BouncerCompliant 21 Strict-Transport-Security: max-age=63138519 22 X-Response-Time: 298 23 X-Connection-Hash: 8d87bd974df797a0b3125d3b60c69d2fd4c0898eb1c93b6e4 24 25 </pre>

4.7.18 Testing for Server-side Template Injection

No Server-side Template Injection vulnerabilities were found.

4.7.19 Testing for Server-side Request Forgery

No Server-side Request Forgery injection points were found.

4.8 Testing for Error Handling

4.8.1 Testing for Improper Error Handling

When testing for possible attack vectors we found out that the page responds correctly (with 404 (Not found) or 401 (Unauthorized)) when sending GET/POST requests to random files or files higher in the hierarchy.

Trying different requests (HEAD/DELETE...) returns 405 (Method not allowed). When trying a really long path we receive `RST_STREAM error 0x2 (Implementation fault)` which doesn't seem to be an issue on twitter's side but isn't really documented either.

Another testing was performed by messing with POST and GET parameters. The following GET request parameter `supports_ntab_ur`t returns different responses:

```
GET /i/api/2/badge_count/badge_count.json?supports_ntab_ur=1 HTTP/2
```

- 1 / true -> OK 200
- 2 / abcd -> BAD REQUEST 400 (body of response: `{"errors": [{"code": 358, "message": "Unable to parse supports_ntab_ur parameter."}]}`)
- 0 / false -> Internal Server Error 500 (body of response: `{"errors": [{"message": "Internal error", "code": 131}]})`

Which looks well defined and other tests did not find any unsuspected/improper behaviour.

4.9 Testing for Weak Cryptography

4.9.1 Testing for Weak Transport Layer Security

We ran `ssllscan --show-sigs --verbose twitter.com`. You can see the full output in outputs/ssllscan.txt.

The application only supports TLSv1.2 and TLSv1.3.

No ciphers that aren't considered secure nowadays are supported.

The SSL Certificate has signature ecdsa-with-SHA384 with key strength 128 bit, signed by DigiCert and is valid for 366 days.

```
SSL/TLS Protocols:
SSLv2      disabled
SSLv3      disabled
TLSv1.0    disabled
TLSv1.1    disabled
TLSv1.2    enabled
TLSv1.3    enabled
```

```
SSL Certificate:
Signature Algorithm: ecdsa-with-SHA384
ECC Curve Name:      prime256v1
ECC Key Strength:    128

Subject:  twitter.com
AltNames: DNS:twitter.com, DNS:www.twitter.com
Issuer:   DigiCert TLS Hybrid ECC SHA384 2020 CA1

Not valid before: Feb  5 00:00:00 2023 GMT
Not valid after:  Feb  5 23:59:59 2024 GMT
```

```
Supported Server Cipher(s):
Preferred TLSv1.3  128 bits  TLS_AES_128_GCM_SHA256      Curve 25519 DHE 253
Accepted  TLSv1.3  256 bits  TLS_AES_256_GCM_SHA384      Curve 25519 DHE 253
Accepted  TLSv1.3  256 bits  TLS_CHACHA20_POLY1305_SHA256 Curve 25519 DHE 253
SSL_get_error(ssl, cipherStatus) said: 1
Preferred TLSv1.2  128 bits  ECDHE-ECDSA-AES128-GCM-SHA256 Curve 25519 DHE 253
Accepted  TLSv1.2  128 bits  ECDHE-ECDSA-AES128-SHA       Curve 25519 DHE 253
Accepted  TLSv1.2  256 bits  ECDHE-ECDSA-AES256-GCM-SHA384 Curve 25519 DHE 253
Accepted  TLSv1.2  256 bits  ECDHE-ECDSA-AES256-SHA       Curve 25519 DHE 253
SSL_get_error(ssl, cipherStatus) said: 1
```

4.9.2 Testing for Padding Oracle

Session and authentication related cookies are encrypted but aren't multiples of 8/16 which implies that a stream cipher was used, and therefore it doesn't meet the requirements for possibility of the Padding Oracle vulnerability.

4.9.3 Testing for Sensitive Information Sent via Unencrypted Channels

All data is sent via HTTPS.

4.9.4 Testing for Weak Encryption

`ssllscan` didn't find any weak encryption on the transport layer.

As we don't have access to the back-end source code we cannot determine which algorithms are used for the encryption that happens on the server side (password hashes, authentication cookies etc.).

4.10 Business Logic Testing

4.10.1 Test Business Logic Data Validation

As for the GUI, the only input where validation is needed is the create account form. Other inputs such as tweet, searched value etc. may be pretty much anything. GUI checks the email meaning if it has form of an email address ({name}@{domain}). It doesn't check if the email actually exists, however the next step of account creation is entering the verification code which is sent to the email entered before. That implies that we cannot use neither non-existing email nor an email address that we don't have access to.

Date of birth is checked as well, account creation fails when date from future entered.


The image consists of two vertically stacked screenshots of a mobile application's account creation process. Both screenshots show "Step 1 of 5" and the title "Create your account".

Screenshot 1 (Top): This screenshot shows an invalid email entry. The "Email" field contains "notanemailaddress". Below the field, an error message says "Please enter a valid email." The "Name" field is filled with "validity_check". The "Date of birth" section shows dropdowns for Month (December), Day (17), and Year (2012). A "Next" button is at the bottom.

Month	Day	Year
December	17	2012

Screenshot 2 (Bottom): This screenshot shows a valid account creation attempt. The "Name" field is filled with "Mr. Pentester". The "Email" field contains "ehapentesttwitter3@proton.me". The "Date of birth" section shows dropdowns for Month (December), Day (10), and Year (1980). The "Year" dropdown is highlighted with a blue border. A "Next" button is at the bottom.

Month	Day	Year
December	10	1980

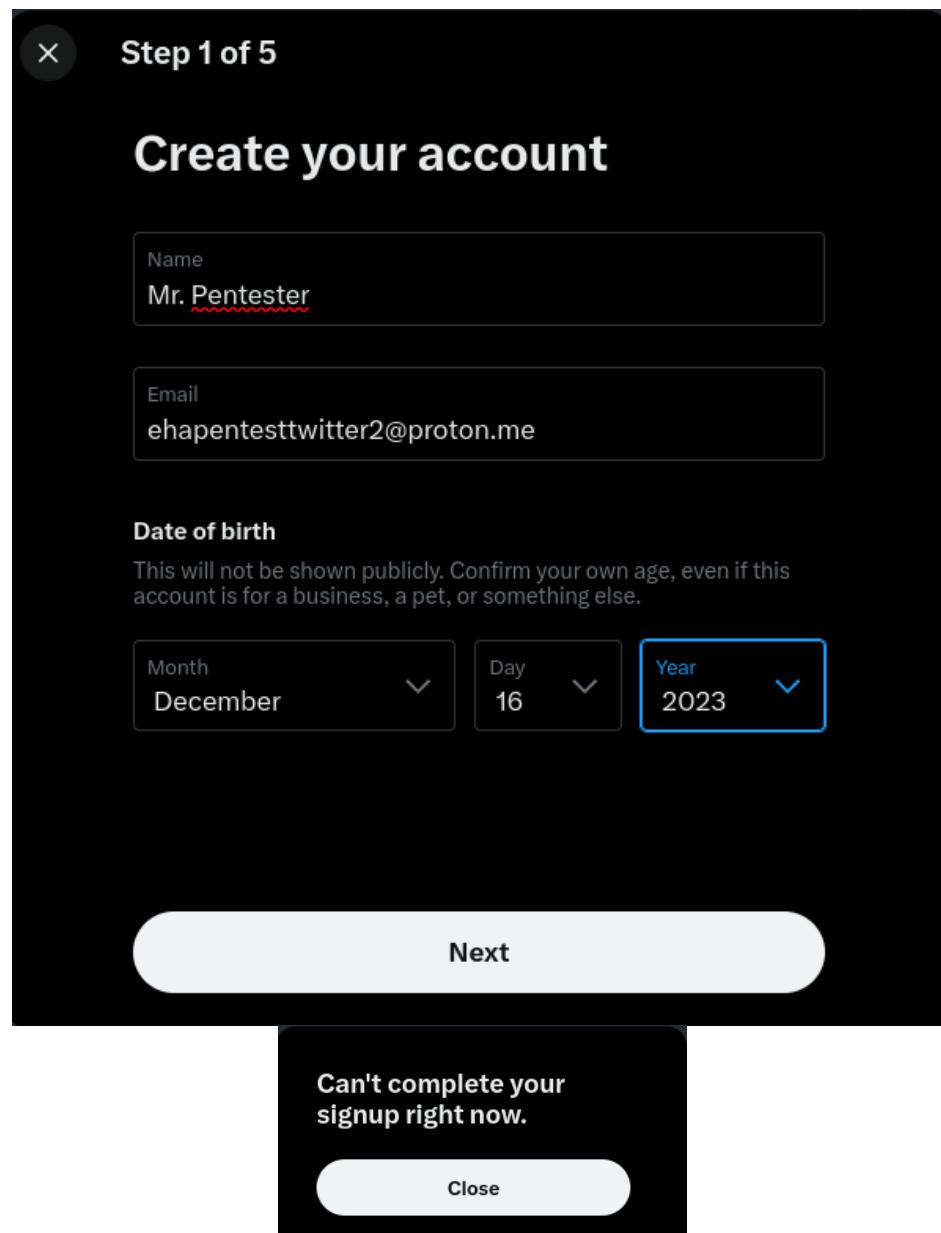

When performing single HTTP requests as such, containing invalid data, we received responses more or less describing why the request was invalid. Except when the JSON object contained two email elements, in that case the server responded with 500 Internal Server Error, meaning this edge case is not correctly handled (likely by the JSON parser).

Request	Response
<pre>Pretty Raw Hex 1 GET /i/api/i/users/email_available.json HTTP/2 2 Content-Type: application/json 3 Cookie: lang=en; d_pref=ijoXLvNvnn1bnHrfdmVyc21vbjJoyLHRIeHRfdmVyc21vbjjo; guest_id=v1%3A168708217759848894; gt=167082930315499682; ct=ob5f77f21a28ec0219ee320350a52db238; _twitter_sess=BAn7CSIK2awhc2hJ0zOnnW0aw9uQ29udUJvhXlcjg6Rmnxc2p6OKzSYXwK250ASGFzahABjoKQHvzIWR7ADoPy3J1YXR1Zf9ndGwxCGe9dtS1 ATwNY3Ny219pk250A2C11ZMh30G13YjgNGZm2NU00TMSZGH10TMwYm13ZT2kND16B21kIu14Mzgy%250AY2F1MTjYmR1YjU20WNjOg150GQ59Mc xhD8jZ4K2530K253D--73f098be2f6de744567114d22037ca97298b7c5 4 Sec-Ch-Ua: "Not A[Brand];v="24", "Chromium";v="110" 5 X-Twitter-Client-Language: en 6 X-Csrf-Token: b5f77f21e28ec0219ee320350a52db238 7 Sec-Ch-Ua-Mobile: ?0 8 Authorization: Bearer AAAAAAAIAAAAAnNRILgAAAAAAAnNwIzIejeRC0Uh5E6IBxnZz4puTs%3D1zv7ttfk8LF81IUq16chjhLTvJu4FA33AGWjCpTnA 9 User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/110.0.5481.76 Safari/537.36 10 X-Guest-Token: 167082920301549568 11 X-Twitter-Active-User: yes 12 X-Client-Platform: "Linux" 13 Accept: */* 14 Sec-Fetch-Site: same-origin 15 Sec-Fetch-Mode: cors 16 Sec-Fetch-Dest: empty 17 Referer: https://twitter.com/i/flow/signup 18 Accept-Encoding: gzip, deflate 19 Accept-Language: en-US,en;q=0.9 20 21</pre>	<pre>Pretty Raw Hex Render 1 HTTP/2 200 OK 2 Date: Mon, 19 Jun 2023 16:49:59 GMT 3 Etag: 7626143928 4 Pragma: no-cache 5 Server: tsa_o 6 Status: 200 OK 7 Expires: Tue, 31 Mar 1981 05:00:00 GMT 8 Content-Type: application/json; charset=utf-8 9 Cache-Control: no-cache, no-store, must-revalidate, pre-check=0, post-check=0 10 Last-Modified: Mon, 19 Jun 2023 16:49:59 GMT 11 X-Transaction: 7a3d94b37b46de5b 12 Content-Length: 76 13 X-Access-Level: read 14 X-Frame-Options: SAMEORIGIN 15 X-Transaction-Id: 7a3d94b37b46de5b 16 X-Xss-Protection: 0 17 X-Ratelimit-Class: api 18 X-Ratelimit-Limit: 100000 19 X-Ratelimit-Reset: 167196999 20 Content-Disposition: attachment; filename=json.json 21 X-Ratelimit-Remaining: 100000 22 X-Client-Event-Enabled: true 23 X-Content-Type-Options: nosniff 24 X-Twitter-Response-Tags: BouncerCompliant 25 Strict-Transport-Security: max-age=631138519 26 X-Response-Time: 112 27 X-Connection-Hash: 0d8f7230733b5b8e510c0f4469be89d1df0ea5979158abe49312a563e22fe664 28 29 { "valid":false, "msg":"You cannot have a blank email address.", "taken":false }</pre>

Request	Response
<pre>Pretty Raw Hex 1 GET /api/i/users/email_available.json?email=test HTTP/2 2 Host: twitter.com 3 Cookie: lang=en; d_prefs=MjoxGNvbnNlbnRfdmVyc2lvbjoyLHR1eHfdmVyc2lvbjoxDwA; guest_id=v1%3A168708217759848894; gt=1670829203015495682; ct0=b5f7f21e28ec0219e9e32035052db238; _twitter_sess=BAh7CSIKZmhch2h0zonWN0a0u029udHJvbGxlcj06Rmxhc2g60KzYXN0%250ASGFzaHsAbj0QKHvzWR7AdoPy3J1YXR1Zf9hdGwrgGhdtS1AToMY3Ny1Zpk250AzC112Wm30G13yjgNGz1M0U080TMSZGh10TMwI3ZTkh016821k1u04Mzg%250AV2fIMTjyMRY1YU20WnJ0G150GQ5MDcxDNBj2A%25D0%253D-%73f0998e2f6de44567114d22837ca07298b7ce5 4 Sec-Ch-Ua: "Not A[Brand];v='24', \"Chromium\";v='110" 5 X-Twitter-Client-Language: en 6 X-Csrftoken: b5f7f21e28ec0219e9e32035052db238 7 Sec-Ch-Ua-Mobile: ?0 8 Authorization: Bearer AAAA...ANRILgAAAAAAnNuIzUejRCOUH5E618xnZz4puTs%3D1zv7ttfk8LF81Uq16CmjLTvJu4FA33AGWWjCpTnA 9 User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/110.0.5481.78 10 X-Guest-Token: 1670829203015495682 11 X-Twitter-Active-User: yes 12 Sec-Ch-Ua-Platform: "Linux" 13 Accept: /* 14 Sec-Fetch-Site: same-origin 15 Sec-Fetch-Mode: cors 16 Sec-Fetch-Dest: empty 17 Referer: https://twitter.com/i/flow/signup 18 Accept-Encoding: gzip, deflate 19 Accept-Language: en-US,en;q=0.9 20 21</pre>	<pre>Pretty Raw Hex Render 1 HTTP/2 200 OK 2 Date: Mon, 19 Jun 2023 16:51:12 GMT 3 Perf: 7626143928 4 Pragma: no-cache 5 Server: ts_o_ 6 Status: 200 OK 7 Expires: Tue, 31 Mar 1981 05:00:00 GMT 8 Content-Type: application/json; charset=utf-8 9 Cache-Control: no-cache, no-store, must-revalidate, pre-check=0, post-check=0 10 Last-Modified: Mon, 19 Jun 2023 16:51:12 GMT 11 X-Transaction: 43c8e3251f051f29 12 Content-Length: 60 13 X-Access-Level: read 14 X-Frame-Options: SAMEORIGIN 15 X-Transaction-Id: 43c8e3251f051f29 16 X-Xss-Protection: 0 17 X-Ratelimit-Class: api 18 X-Ratelimit-Limit: 100000 19 X-Ratelimit-Reset: 1687197072 20 Content-Disposition: attachment; filename=json.json 21 X-Ratelimit-Remaining: 100000 22 X-Client-Event-Enabled: true 23 X-Content-Type-Options: nosniff 24 X-Twitter-Response-Tags: BouncerCompliant 25 Strict-Transport-Security: max-age=631138519 26 X-Response-Time: 113 27 X-Connection-Hash: 43070cc599074b0157cf7f12dc73653e0ce2d7b086c29653bd036d94f0cbe 28 29 { "valid": false, "msg": "This email is invalid.", "taken": false }</pre>
<pre>Pretty Raw Hex 1 POST /1.1/onboarding/begin_verification.json HTTP/2 2 Host: api.twitter.com 3 Cookie: d_prefs=MjoxGNvbnNlbnRfdmVyc2lvbjoyLHR1eHfdmVyc2lvbjoxDwA; guest_id=v1%3A168708217759848894; gt=1670829203015495682; _twitter_sess=BAh7CSIKZmhch2h0zonWN0a0u029udHJvbGxlcj06Rmxhc2g60KzYXN0%250ASGFzaHsAbj0QKHvzWR7AdoPy3J1YXR1Zf9hdGwrgGhdtS1AToMY3Ny1Zpk250AzC112Wm30G13yjgNGz1M0U080TMSZGh10TMwI3ZTkh016821k1u04Mzg%250AV2fIMTjyMRY1YU20WnJ0G150GQ5MDcxDNBj2A%25D0%253D-%73f0998e2f6de44567114d22837ca07298b7ce5; ct0=77607a3ff2f0652elef65383345a2be 4 Content-Length: 14 5 Sec-Ch-Ua: "Not A[Brand];v='24', \"Chromium\";v='110" 6 X-Twitter-Client-Language: en 7 X-Csrftoken: 77607a3ff2f0652elef65383345a2be 8 Sec-Ch-Ua-Mobile: ?0 9 Authorization: Bearer AAAA...ANRILgAAAAAAnNuIzUejRCOUH5E618xnZz4puTs%3D1zv7ttfk8LF81Uq16CmjLTvJu4FA33AGWWjCpTnA 10 User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/110.0.5481.78 Safari/537.36 11 Content-Type: application/json 12 Accept: /* 13 X-Guest-Token: 1670829203015495682 14 X-Twitter-Active-User: yes 15 Sec-Ch-Ua-Platform: "Linux" 16 Origin: https://twitter.com 17 Sec-Fetch-Site: same-site 18 Sec-Fetch-Mode: cors 19 Sec-Fetch-Dest: empty 20 Referer: https://twitter.com/ 21 Accept-Encoding: gzip, deflate 22 Accept-Language: en-US,en;q=0.9 23 24 { "email": "ehapentesstwitter3@proton.me", "password": "Mr. Pentester", "flow_token": "g:168708217759848894:-1687191721662:vuGpbR6GRyCmkc0SG0m7HPW1:0" }</pre>	<pre>Pretty Raw Hex Render 1 HTTP/2 400 Bad Request 2 Date: Mon, 19 Jun 2023 16:55:31 GMT 3 Perf: 7626143928 4 Pragma: no-cache 5 Server: ts_o_ 6 Expires: Tue, 31 Mar 1981 05:00:00 GMT 7 Content-Type: application/json; charset=utf-8 8 Cache-Control: no-cache, no-store, must-revalidate, pre-check=0, post-check=0 9 Last-Modified: Mon, 19 Jun 2023 16:55:31 GMT 10 Content-Length: 75 11 X-Frame-Options: SAMEORIGIN 12 X-Transaction-Id: 19ff613d8e118d84 13 X-Xss-Protection: 0 14 X-Rate-Limit-Limit: 15 15 X-Rate-Limit-Reset: 1687194428 16 Content-Disposition: attachment; filename=json.json 17 X-Content-Type-Options: nosniff 18 X-Rate-Limit-Remaining: 12 19 Strict-Transport-Security: max-age=631138519 20 Access-Control-Allow-Origin: https://twitter.com 21 Access-Control-Allow-Credentials: true 22 Access-Control-Expose-Headers: X-Twitter-Spotify-Access-Token,X-Twitter-Client-Version,X-Twitter-Diffy-Request-Key,X-Rate-Limit-Limit,X-TD-Mtime ,X-Twitter-Client,Backoff-Policy,X-Rate-Limit-Remaining,Content-Length,X-Rate-Limit-Reset,X-Transaction-Id,X-Acte d-Ac-User-Id,X-Twitter-Polling,X-Twitter-UTCOffset,X-Response-Time 23 X-Response-Time: 107 24 X-Connection-Hash: 454dc2d96f872e85alab7671938cf315elcc262dd0b77524f3180db12d9130b 25 26 { "errors": [{ "code": 398, "message": "Can't complete your signup right now." }] }</pre>
<pre>Pretty Raw Hex 1 POST /1.1/onboarding/begin_verification.json HTTP/2 2 Host: api.twitter.com 3 Cookie: d_prefs=MjoxGNvbnNlbnRfdmVyc2lvbjoyLHR1eHfdmVyc2lvbjoxDwA; guest_id=v1%3A168708217759848894; gt=1670829203015495682; _twitter_sess=BAh7CSIKZmhch2h0zonWN0a0u029udHJvbGxlcj06Rmxhc2g60KzYXN0%250ASGFzaHsAbj0QKHvzWR7AdoPy3J1YXR1Zf9hdGwrgGhdtS1AToMY3Ny1Zpk250AzC112Wm30G13yjgNGz1M0U080TMSZGh10TMwI3ZTkh016821k1u04Mzg%250AV2fIMTjyMRY1YU20WnJ0G150GQ5MDcxDNBj2A%25D0%253D-%73f0998e2f6de44567114d22837ca07298b7ce5; ct0=77607a3ff2f0652elef65383345a2be 4 Content-Length: 14 5 Sec-Ch-Ua: "Not A[Brand];v='24', \"Chromium\";v='110" 6 X-Twitter-Client-Language: en 7 X-Csrftoken: 77607a3ff2f0652elef65383345a2be 8 Sec-Ch-Ua-Mobile: ?0 9 Authorization: Bearer AAAA...ANRILgAAAAAAnNuIzUejRCOUH5E618xnZz4puTs%3D1zv7ttfk8LF81Uq16CmjLTvJu4FA33AGWWjCpTnA 10 User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/110.0.5481.78 Safari/537.36 11 Content-Type: application/json 12 Accept: /* 13 X-Guest-Token: 1670829203015495682 14 X-Twitter-Active-User: yes 15 Sec-Ch-Ua-Platform: "Linux" 16 Origin: https://twitter.com 17 Sec-Fetch-Site: same-site 18 Sec-Fetch-Mode: cors 19 Sec-Fetch-Dest: empty 20 Referer: https://twitter.com/ 21 Accept-Encoding: gzip, deflate 22 Accept-Language: en-US,en;q=0.9 23 24 { "email": "ehapentesstwitter3@proton.me", "display_name": "Mr. Pentester", "flow_token": "g:168708217759848894:-1687191721662:vuGpbR6GRyCmkc0SG0m7HPW1:0" }</pre>	<pre>Pretty Raw Hex Render 1 HTTP/2 400 Bad Request 2 Date: Mon, 19 Jun 2023 16:52:08 GMT 3 Perf: 7626143928 4 Pragma: no-cache 5 Server: ts_o_ 6 Expires: Tue, 31 Mar 1981 05:00:00 GMT 7 Content-Type: application/json; charset=utf-8 8 Cache-Control: no-cache, no-store, must-revalidate, pre-check=0, post-check=0 9 Last-Modified: Mon, 19 Jun 2023 16:52:08 GMT 10 Content-Length: 107 11 X-Frame-Options: SAMEORIGIN 12 X-Transaction-Id: 2a9e1ce9712e21e4 13 X-Xss-Protection: 0 14 X-Rate-Limit-Limit: 15 15 X-Rate-Limit-Reset: 1687194428 16 Content-Disposition: attachment; filename=json.json 17 X-Content-Type-Options: nosniff 18 X-Rate-Limit-Remaining: 14 19 Strict-Transport-Security: max-age=631138519 20 Access-Control-Allow-Origin: https://twitter.com 21 Access-Control-Allow-Credentials: true 22 Access-Control-Expose-Headers: X-Twitter-Spotify-Access-Token,X-Twitter-Client-Version,X-Twitter-Diffy-Request-Key,X-Rate-Limit-Limit,X-TD-Mtime ,X-Twitter-Client,Backoff-Policy,X-Rate-Limit-Remaining,Content-Length,X-Rate-Limit-Reset,X-Transaction-Id,X-Acte d-Ac-User-Id,X-Twitter-Polling,X-Twitter-UTCOffset,X-Response-Time 23 X-Response-Time: 139 24 X-Connection-Hash: a93a51739d8d637e44bc2a947c10b56b1082db94da69b16769795483552e332a 25 26 { "errors": [{ "code": 398, "message": "Can't send the confirmation code right now. Please try again later." }] }</pre>

Request		Response	
Pretty	Raw	Hex	Render
<pre>1 POST /1/onboarding/begin_verification.json HTTP/2 2 Host: api.twitter.com 3 Cookie: _pref=MoIxLGvnbNlbnRfdmVyc2lvbjoyLHrlleRfdmVyc2lvbjoxMDAw; guest_id=v13A168708217759848894; gt=1670829203015495682; _twitter_sess=BAh7CS1KZexch2hJ0zon0Wn0aw9u0dhvbx1cj06Rmxhc2g0kZyXN0%25ASGFzhsABj0KOHVz7NR7ADoPY3J1YXR1Zf9hdGwrgGhdtS1At0WY3NyZ1OpkZ58AZC11ZM30G13YjgNGz1MOU80TMS2GNi0TMwYmI3ZT2kND16821k1u14Mzg%250AV2F1MTJyjMwR1Yju20WNjOG150GQ5MDxNDBjZAN253DN253D-73f0998e2f6de744567114d22037ca#07298b7ce5; ct=0#76607a3ff2ff0652elef65383345a2be 4 Content-Length: 110 5 Sec-Ch-Ua: "Not A[Brand];v=24", "Chromium";v="110" 6 X-Twitter-Client-Language: en 7 X-Csrf-Token: 77607a3ff2ff0652elef65383345a2be 8 Sec-Ch-Ua-Mobile: 70 9 Authorization: Bearer AAAIAAAAAnNwIzUeRC0uHSE618xnZz4puTs%3D1zv7tfk8LF811Uq16ChjhLTvJu4FA33AGWWjCpTnA 10 User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/110.0.5481.78 Safari/537.36 11 Content-Type: application/json 12 Accept: */* 13 X-Guest-Token: 1670829203015495682 14 X-Twitter-Active-User: yes 15 Sec-Ch-Ua-Platform: "Linux" 16 Origin: https://twitter.com 17 Sec-Fetch-Site: same-site 18 Sec-Fetch-Mode: cors 19 Sec-Fetch-Dest: empty 20 Referer: https://twitter.com 21 Accept-Encoding: gzip, deflate 22 Accept-Language: en-US,en;q=0.9 23 24 { "display_name": "Mr_Pentester", "flow_token": "g:168708217759848894:-1687191721662:vu6pbR6GRyCmkc0SG0m7HPWi:0" }</pre>	<pre>1 HTTP/2 400 Bad Request 2 Date: Mon, 19 Jun 2023 16:52:55 GMT 3 Perf: 7626143928 4 Pragma: no-cache 5 Server: tse-0 6 Expires: Tue, 31 Mar 1981 05:00:00 GMT 7 Content-Type: application/json; charset=utf-8 8 Cache-Control: no-cache, no-store, must-revalidate, pre-check=0, post-check=0 9 Last-Modified: Mon, 19 Jun 2023 16:52:55 GMT 10 Content-Length: 87 11 X-Frame-Options: SAMEORIGIN 12 X-Transaction-Id: ac674772dad9eb2 13 X-Xss-Protection: 0 14 X-Rate-Limit-Limit: 15 15 X-Rate-Limit-Reset: 1687194428 16 Content-Disposition: attachment; filename=json.json 17 X-Content-Type-Options: nosniff 18 X-Rate-Limit-Remaining: 13 19 Strict-Transport-Security: max-age=631138519 20 Access-Control-Allow-Origin: https://twitter.com 21 Access-Control-Allow-Credentials: true 22 Access-Control-Expose-Headers: X-Twitter-Spotify-Access-Token,X-Twitter-Client-Version,X-Twitter-Diffy-Request-Key,X-Rate-Limit-Limit,X-TD-Mtime ,X-Twitter-Client,Backoff-Policy,X-Rate-Limit-Remaining,Content-Length,X-Rate-Limit-Reset,X-Transaction-Id,X-Acte d-As-User-Id,X-Twitter-Polling,X-Twitter-UTCOffset,X-Response-Time 23 X-Response-Time: 113 24 X-Connection-Hash: bd368a16dff46e4967e7e90bba2985428bde6dd8c654dc812aed852771f98 25 26 { "errors": [{ "code": 357, "message": "Either phone or email or arkose token must be set" }] }</pre>		
Pretty	Raw	Hex	Render
<pre>1 POST /1/onboarding/begin_verification.json HTTP/2 2 Host: api.twitter.com 3 Cookie: _pref=MoIxLGvnbNlbnRfdmVyc2lvbjoyLHrlleRfdmVyc2lvbjoxMDAw; guest_id=v13A168708217759848894; gt=1670829203015495682; _twitter_sess=BAh7CS1KZexch2hJ0zon0Wn0aw9u0dhvbx1cj06Rmxhc2g0kZyXN0%25ASGFzhsABj0KOHVz7NR7ADoPY3J1YXR1Zf9hdGwrgGhdtS1At0WY3NyZ1OpkZ58AZC11ZM30G13YjgNGz1MOU80TMS2GNi0TMwYmI3ZT2kND16821k1u14Mzg%250AV2F1MTJyjMwR1Yju20WNjOG150GQ5MDxNDBjZAN253DN253D-73f0998e2f6de744567114d22037ca#07298b7ce5; ct=0#76607a3ff2ff0652elef65383345a2be 4 Content-Length: 142 5 Sec-Ch-Ua: "Not A[Brand];v=24", "Chromium";v="110" 6 X-Twitter-Client-Language: en 7 X-Csrf-Token: 77607a3ff2ff0652elef65383345a2be 8 Sec-Ch-Ua-Mobile: 70 9 Authorization: Bearer AAAIAAAAAnNwIzUeRC0uHSE618xnZz4puTs%3D1zv7tfk8LF811Uq16ChjhLTvJu4FA33AGWWjCpTnA 10 User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/110.0.5481.78 Safari/537.36 11 Content-Type: application/json 12 Accept: */* 13 X-Guest-Token: 1670829203015495682 14 X-Twitter-Active-User: yes 15 Sec-Ch-Ua-Platform: "Linux" 16 Origin: https://twitter.com 17 Sec-Fetch-Site: same-site 18 Sec-Fetch-Mode: cors 19 Sec-Fetch-Dest: empty 20 Referer: https://twitter.com 21 Accept-Encoding: gzip, deflate 22 Accept-Language: en-US,en;q=0.9 23 24 { "email": "ehpentester@proton.me", "email": "Mr_Pentester", "flow_token": "g:168708217759848894:-1687191721662:vu6pbR6GRyCmkc0SG0m7HPWi:0" }</pre>	<pre>1 HTTP/2 500 Internal Server Error 2 Date: Mon, 19 Jun 2023 16:53:47 GMT 3 Perf: 7626143928 4 Pragma: no-cache 5 Server: tse_o 6 Expires: Tue, 31 Mar 1981 05:00:00 GMT 7 Content-Type: application/json;charset=utf-8 8 Cache-Control: no-cache, no-store, must-revalidate, pre-check=0, post-check=0 9 Last-Modified: Mon, 19 Jun 2023 16:53:48 GMT 10 X-Frame-Options: SAMEORIGIN 11 X-Transaction-Id: eac39c83c4e488c3 12 X-Xss-Protection: 0 13 X-Rate-Limit-Limit: 15 14 X-Rate-Limit-Reset: 1687194428 15 Content-Disposition: attachment; filename=json.json 16 X-Content-Type-Options: nosniff 17 X-Rate-Limit-Remaining: 13 18 Strict-Transport-Security: max-age=631138519 19 Content-Length: 52 20 Access-Control-Allow-Origin: https://twitter.com 21 Access-Control-Allow-Credentials: true 22 Access-Control-Expose-Headers: X-Twitter-Spotify-Access-Token,X-Twitter-Client-Version,X-Twitter-Diffy-Request-Key,X-Rate-Limit-Limit,X-TD-Mtime ,X-Twitter-Client,Backoff-Policy,X-Rate-Limit-Remaining,Content-Length,X-Rate-Limit-Reset,X-Transaction-Id,X-Acte d-As-User-Id,X-Twitter-Polling,X-Twitter-UTCOffset,X-Response-Time 23 X-Response-Time: 112 24 X-Connection-Hash: 962617d3d58cc0c14f45dcc2e585fd7c13ec00357d1b1704a0abfbfe1a04e5e 25 26 { "errors": [{ "message": "Internal error", "code": 131 }] }</pre>		

4.10.2 Test Ability to Forge Requests

When reviewing the common HTTP traffic, no guessable values nor hidden features were found. Data consist of user entered content and apparently randomly generated tokens and ids.

4.10.3 Test Integrity Checks

We didn't find neither hidden fields nor places to insert information into areas that are non-editable.

4.10.4 Test for Process Timing


Entering both correct and incorrect usernames and passwords took the same time to process. We didn't find any other scenario in which process timing could be taken advantage of.

4.10.5 Test Number of Times a Function Can Be Used Limits

The application has several technical limits as follows:

Functionality	Limit
Direct Messages	500 messages sent per day
Tweets	2400 per day
Changes to account email	4 per hour
Following (daily)	400 per day
Following (account-based)	5000 per account

We haven't been able to test any of them because the limits are too high to perform manually, sending repeated requests through BurpSuite or curl didn't work and API for those tasks is a paid functionality. In case of Changes to account email it would be possible to perform manual test except the fact that probably due to our penetration testing Twitter wouldn't allow us to do so, even when we created a fresh account with no suspicious history.

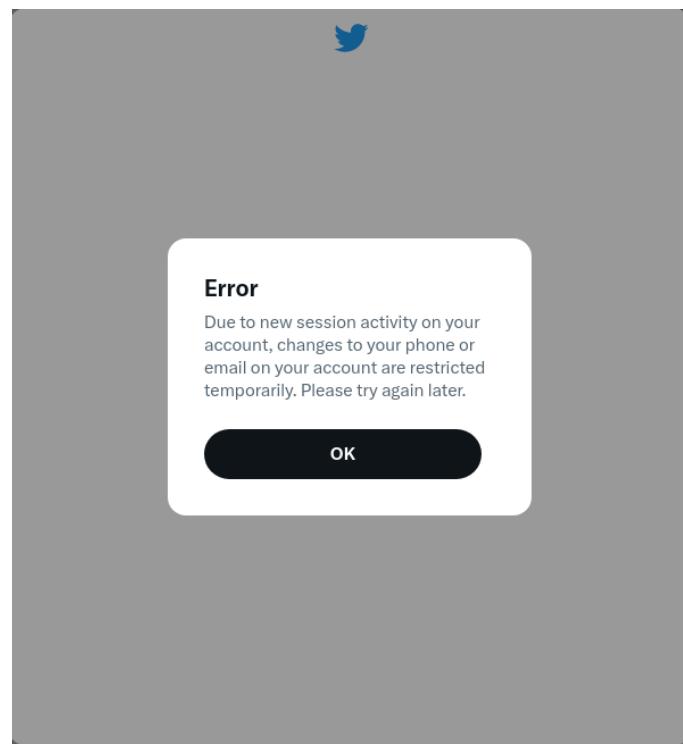

4.10.6 Testing for the Circumvention of Work Flows

The only multistep activity is the account creation, which cannot be bypassed due to email verification as one of the steps. No other multistep activity was found.

4.10.7 Test Defenses Against Application Misuse

During the testing process we have found several defense mechanisms against application misuse:


- account lock out mechanism when repeatedly entered incorrect credentials
- impossibility of repeatedly posting tweets using the same HTTP request
- impossibility of repeatedly sending direct messages using the same HTTP request
- restrictions for account settings when suspicious activity is spotted
- front-end source code is well obfuscated with no comments in place and torn into pieces which makes it nearly impossible to understand

4.10.8 Test Upload of Unexpected File Types

The application supports uploading media when posting a tweet. Officially accepted file formats are GIF, JPEG and PNG.

GUI doesn't allow to upload any file format but these three. Even when an unsupported file is given a supported suffix, the page reports that upload failed.

When intercepting the request for upload the media and changing both file type and file data, the application reports that upload failed.

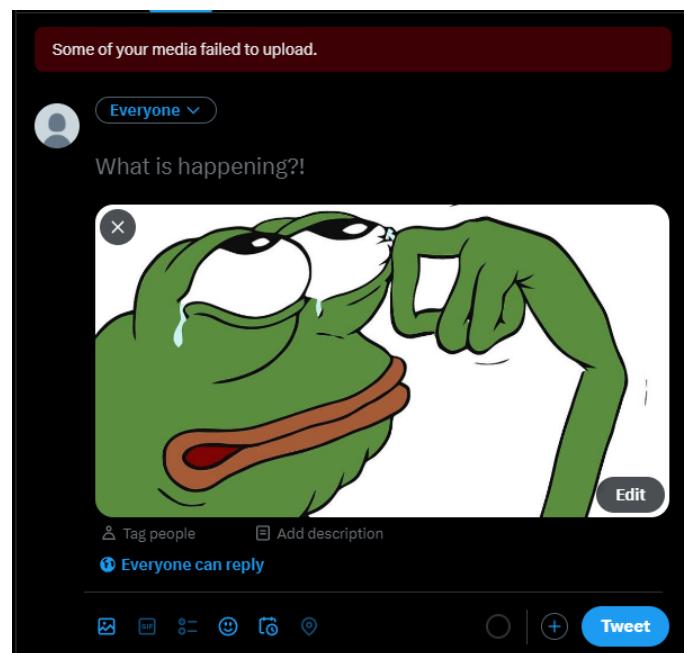

When media is uploaded successfully, the application doesn't disclose the path but only reports the media id.

Original request	Response
<pre> 1 POST /i/media/upload.json?command=INIT&total_bytes=38064&media_type=image%2Fjpeg 2 media_category=tweet image HTTP/2 3 Host: upload.twitter.com 4 Cookie: guest_id=v1%3A1e8721307697502414; d_prefs= MToxiGnvbnhlbnfamVyc1vbjoyLHR1eHfdmWyc1vbjoxMDAw; guest_id_adw=v1%3A1e8721307697502414; guest_id_marketing=v1%3A1e8721307697502414; personalization_id=v1%3A1e8721307697502414; _twitter_sess... BAH7CSIKMxmc2hJcgcwWUoVEngS2ndHvhGcljcjgEPmhcc1g60k7eyX0t%25QAS0S7g+RnA5bKQHVzZWR7AdpPY3J1 XWYyvphGwvG5v5wvH1AT-MT3Mly12g%25D0ZC11NUyODU2NDaxYT2mNj13TV150DmV1130QjD6Hm7yB21f1uUS EjEx1250ANdVYUyMshhInI427m1NUUNjNkAjPhmUDTw153D155D%97fcd4fa611Ch77c4849c664ff1b6 15an75; _ga=GAI.3.5e8231015.1687213084; _gid=GAI.2.148318266.1687213084; Kdt... khigUUtzf4areNLxRtLDb9gD00bxG9q94C92hBLA7; auth_token=0d4e73ee6eatt92ccc70les9ab72f90d11e79500 : ct0= dcaaSb3f6a70f39ec08a7caa0dbbc94a095429b23735d8430e6b209e4f0ed8e55017df71472e778c00aaafac7eaa dcf6e1ecf5f6ff4dbf4f1c1e6bb5941e3fd3310222bf7d92117fd9949ef81fb866f; atts= 1-XrkrloczYS2UfSHjHyalsQfVcpQES9GkG7gvohIgxf1; twid=u13D166466480339828732; lang=en 4 Content-Length: 0 5 Sec-Ch-Ua: "Chromium";v="111", "Not (A Brand";v="0" 6 X-Csrftoken: dcaaSb3f6a70f39ec08a7caa0dbbc94a095429b23735d8430e6b209e4f0ed8e55017df71472e778c00aaafac7eaa dcf6e1ecf5f6ff4dbf4f1c1e6bb5941e3fd3310222bf7d92117fd9949ef81fb866f 7 Pragma: No-cache, Pragma: No-cache, Pragma: No-cache 8 Sec-Ch-Ua-Mobile: ?0 9 Authorization: Bearer AAAAAAAAAAAAAAAAAAAAANR1lglAAAAAAAnNwizUejRCOUH5E618xnZz4puTs43D1zv7ttfkGLF8lIUq16cHjhLTvJu4FA3 3AGWVjCptNn 10 User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/111.0.5563.111 Safari/537.36 11 Sec-Ch-Ua-Platform: "Windows" 12 Accept: /* 13 Origin: https://twitter.com 14 Sec-Fetch-Site: same-site 15 Sec-Fetch-Mode: cors 16 Sec-Fetch-Dst: empty 17 Referer: https://twitter.com/ 18 Accept-Encoding: gzip, deflate 19 Accept-Language: cs-CZ,cs;q=0.9 20 21 </pre>	<pre> 1 HTTP/2 202 Accepted 2 Date: Mon, 19 Jun 2023 22:08:39 GMT 3 Perf: 7626.143928 4 Vary: Origin 5 Pragma: no-cache 6 Server: tsa_o 7 Status: 202 Accepted 8 Expires: Tue, 31 Mar 1981 05:00:00 GMT 9 X-Meta-Request-ID: 03e95e4707a6dc31 10 Content-Type: application/json; charset=utf-8 11 Cache-Control: no-cache, no-store, must-revalidate, pre-check=0, post-check=0 12 Last-Modified: Mon, 19 Jun 2023 22:08:39 GMT 13 X-Transaction: 03e95e4707a6dc31 14 Content-Length: 135 15 X-Access-Limits: read-write-directmessages 16 X-Frame-Options: SAMEORIGIN 17 X-Transaction-Id: 03e95e4707a6dc3 18 X-Xss-Protection: 1; mode=block 19 X-Rate-Limit-Limit: 415 20 X-Rate-Limit-Reset: 1687716909 21 Content-Disposition: attachment; filename=json.json 22 X-File-Size-Remaining: 0 23 X-Content-Type-Options: nosniff 24 X-Rate-Limit-Remaining: 412 25 X-Twitter-Response-Tags: BouncerCompliant 26 Strict-Transport-Security: max-age=631138519 27 Access-Control-Allow-Origin: https://twitter.com 28 Access-Control-Expose-Headers: 29 Access-Control-Allow-Credentials: true 30 X-Response-Time: 130 31 X-Connection-Hash: 51ec50f5095e801fe5fa5ac527609906e15f197454leaf3a59cb01efb2705da8 32 33 { "media_id": "1670921563191779331", "media_id_string": "1670921563191779331", "expires_after_secs": 18400, "media_key": "3_1670921563191779331" } </pre>

4.10.9 Test Upload of Malicious Files

As we weren't able to upload any unexpected file types, that leaves us with uploading a malicious image, but since the malicious code inserted into an image would be run by the browser, not the application, it is beyond the scope of this pentest.

4.11 Client-side Testing

4.11.1 Testing for DOM-Based Cross Site Scripting

Manual testing and searching for possible sources of DOM CSS did not yield any results. Testing with Burp Suite's DOM Invader gave a few sinks but these have proven to be false-positives. Application does not seem vulnerable to DOM-based CSS.

Sinks (1)		Value	outerHTML	Frame path	Event	Options	Stack Trace
element.setAttribute.href (4)		https://twitter.com/home@ http:// location.href	<link>	top			at Object.XobjA...
		https://twitter.com/messages@ http:// location.href	<link>	top			at Object.XobjA...
		https://twitter.com/verified-choose@ http:// location.href	<link>	top			at Object.XobjA...
		https://twitter.com/debab4451276852@ http:// location.href	<link>	top			at Object.XobjA...

Twitter uses GraphQL and its API to load dynamic page contents and store user tweets. All validation therefore happens in the backend, which we have no access to, so it is very difficult to guess what is happening there. However all tests indicate that the all the input validation/sanitization is well performed and no errors or suspicious artefacts were found.

4.11.2 Testing for JavaScript Execution

Similar to the previous paragraph, we did not find any possible attack vector.

4.11.3 Testing for HTML Injection

Again no possible input for HTML Injection found.

4.11.4 Testing for Client-side URL Redirect

URL redirect again happens through backend API and does not leave room for tampering.

When user clicks a link in a tweet from a different user he is redirected with the following GET request and response.

The screenshot shows a browser developer tools Network tab. A GET request is made to `https://t.co/sjAHvYnSTG`. The response is an HTTP/2.00 OK with status code 200, content type text/html, and a content length of 331. The response includes several headers: Date, Per-Conn-ID, Vary, Server, Expires, Set-Cookie, Content-Type, Cache-Control, and X-Transaction-Id. The response body contains a head section with a noscript tag containing a META refresh attribute pointing to a Facebook group URL, and a script tag with a window.opener assignment.

```

Request
Pretty Raw Hex
1 GET /sjAHvYnSTG HTTP/2
2 Host: t.co
3 Cookie: muc=09cad1c6-d1b-4b32-a0f-84b6e18d40ed
4 Sec-Ch-Ua: "Chromium";v="107", "Not=A7Brand";v="24"
5 Sec-Ch-Ua-Mobile: ?0
6 Sec-Ch-Ua-Platform: "Linux"
7 Upgrade-Insecure-Requests: 1
8 User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko)
  Chrome/107.0.5904.107 Safari/537.36
9 Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/avif,image/webp,image/apng,*/*;q=0.8,application/signed-exchange;v=b3;q=0.9
10 Sec-Fetch-Site: cross-site
11 Sec-Fetch-Mode: navigate
12 Sec-Fetch-User: ?1
13 Sec-Fetch-Dest: document
14 Accept-Encoding: gzip, deflate
15 Accept-Language: en-US,en;q=0.9
16
17

Response
Pretty Raw Hex Render
1 HTTP/2.00 OK
2 Date: Mon, 19 Jun 2023 19:42:58 GMT
3 Per-Conn-ID: 76261439928
4 Vary: Origin
5 Server: t.co
6 Expires: Mon, 19 Jun 2023 19:47:58 GMT
7 Set-Cookie: muc=09cad1c6-d1b-4b32-a0f-84b6e18d40ed; Max-Age=34214400; Expires=Fri, 19 Jul 2024 19:42:58 GMT;
8 Content-Type: text/html; charset=utf-8
9 Cache-Control: private,max-age=300
10 Content-Length: 331
11 X-Transaction-Id: 2942d4bb236fe12c
12 X-Xss-Protection: 0
13 Strict-Transport-Security: max-age=0
14 X-Response-Time: 113
15 X-Connection-Hash: d02dc269003bb0f0b49a425b2ea04cbd259663aedde55acd44ed59a9ec1bb1a
16
17 <head>
  <noscript>
    <META http-equiv="refresh" content="0;URL=https://www.facebook.com/groups/484773319060428/?ref=share">
  </noscript>
<title>
  https://www.facebook.com/groups/484773319060428/?ref=share
</title>
<script>
  window.opener = null;
  location.replace("https://www.facebook.com/groups/484773319060428/?ref=share")
</script>

```

We can see that the request goes to the `t.co` webpage, which is twitter's own link shortener that, they [claim](#), also protects users from various malicious activity.



Twitter uses the t.co domain as part of a service to protect users from harmful activity, to provide value for the developer ecosystem, and as a quality signal for surfacing relevant, interesting Tweets.

[Back to Twitter](#)[Learn more](#)

4.11.5 Testing for CSS Injection

No CSS injection point found on the website.

4.11.6 Testing for Client-side Resource Manipulation

No vulnerability was found.

4.11.7 Testing Cross Origin Resource Sharing

Twitter uses **Access-Control-Allow-Origin** header safely only allowing <https://twitter.com> (no wildcard used). Other **Access-Control** headers are also used in a reasonable way.


```
HTTP/2 200 OK
Access-Control-Allow-Origin: https://twitter.com
Access-Control-Allow-Credentials: true
Access-Control-Allow-Methods: HEAD,PUT,GET,POST,DELETE
Access-Control-Allow-Headers:
X-Contributor-Version,X-Twitter-Client-Version,Dtab-Local,X-Twitter-Client-Language,If-Modified-Since,X-Twitter-Client,X-TD-If-Mtime,X-Twitter-Auth-Type,X-B3-Flags,Content-Type,X-TD-Mtime-Check,X-CSRF-Token,X-Twitter-Polling,X-Twitter-Active-User,X-Guest-Token,X-Twitter-UTCOffset,X-Act-As-User-Id,Authorization,X-Contribute-To-User-Id
Access-Control-Max-Age: 1728000
Access-Control-Expose-Headers:
X-Twitter-Client-Version,X-Rate-Limit-Limit,X-TD-Mtime,X-Twitter-Client,X-Rate-Limit-Remaining,X-Rate-Limit-Reset,X-Acted-As-User-Id,X-Twitter-Polling,X-Twitter-UTCOffset
X-Connection-Hash: 0eb1a0e9806761a13db7e6b959e4fea52009aaf9226d6d6a92496ac94c44c69
Date: Mon, 19 Jun 2023 19:41:35 GMT
Server: tsa_o
```

4.11.8 Testing for Cross Site Flashing

Attack not possible.

4.11.9 Testing for Clickjacking

Basic clickjacking attempt yields no result as the page does not show in our frame.

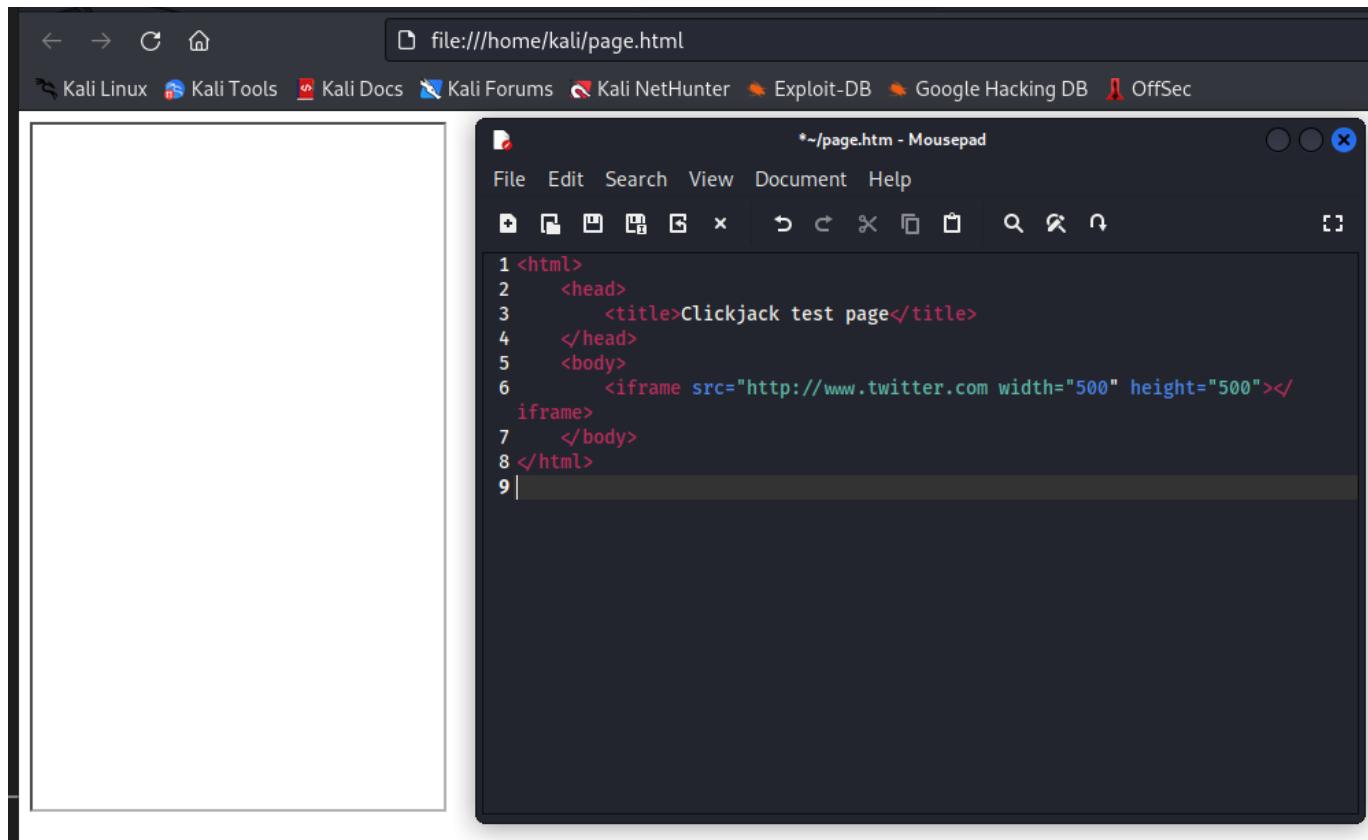

Advanced clickjacking attempts like double framing or using sandbox and security attributes are also unsuccessful.

Twitter uses header **X-Frame-Options: SAMEORIGIN** that ensures that page's contents can not be loaded into frames, iframes etc. that are from different origin than the page itself, effectively preventing Clickjacking attacks.

4.11.10 Testing WebSockets

No WebSockets signs were found in the client-side source code or communication.

4.11.11 Testing Web Messaging

Twitter does not use Web Messaging (Cross Document Messaging).

4.11.12 Testing Browser Storage

Twitter does not store any persistent values in **window.localStorage**, the only value output when trying to list the storage is **volume: 1** (note that the value changes based on browser used).

Listing **sessionStorage** which is non-persistent and resets after window closes yields some results but does not store any sensitive data.

```

> for (let i = 0; i < sessionStorage.length; i++) {
  const key = sessionStorage.keys(i);
  const value = sessionStorage.getItem(key);
  console.log(`${key}: ${value}`);
}
RichHistory: [{"locationsHistory": [{"locationKey": "initialWebLocationKey", "locationPathname": "/krakensupportl4g3tf77location.pathname", "isModalRoute": false}, {"locationKey": "jf9jjv", "locationPathname": "/home", "isModalRoute": false}], "currentLocationIndex": 1}

```

Listing IndexedDB does not show any issues.

Cookies do not store any sensitive data neither.

Nothing of interest found stored as global window object.

4.11.13 Testing for Cross Site Script Inclusion

No global variables/function parameters or CSV values containing sensitive data were found.
There are no JS warnings or errors in the browser console.

Sources

- https://blog.twitter.com/engineering/en_us/topics/infrastructure/2017/the-infrastructure-behind-twitter-scale
- <https://www.first.org/cvss>
- https://blog.twitter.com/engineering/en_us/topics/
- <http://www.pentest-standard.org>
- <https://www.thirdrocktechkno.com/blog/react-security-vulnerabilities/>
- <https://help.twitter.com/en/rules-and-policies/twitter-limits>
- <https://help.twitter.com/en/rules-and-policies/twitter-cookies>