



median σ_t Module H is actually queried with, per SNR (n=12 trials, separate probe)



(a) where the site is damaged: shift_med peaks on $\sigma \in [0.092, 0.216]$

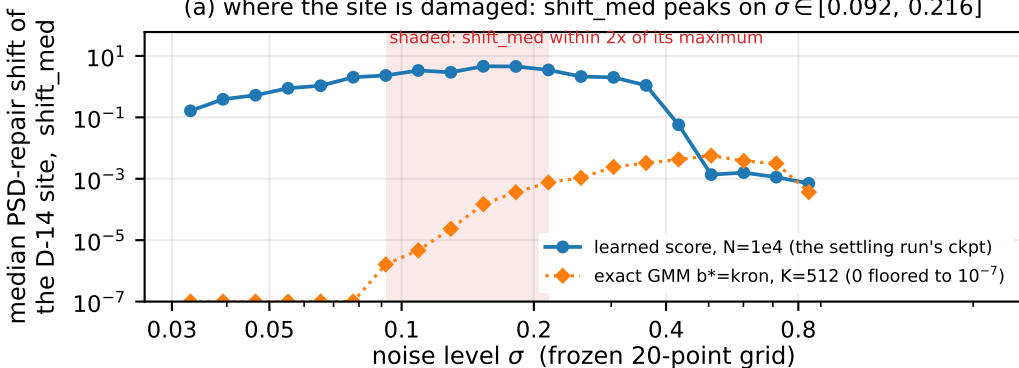

(b) what it costs the receiver: settling experiment, D2 cell C2, n=256 paired trials

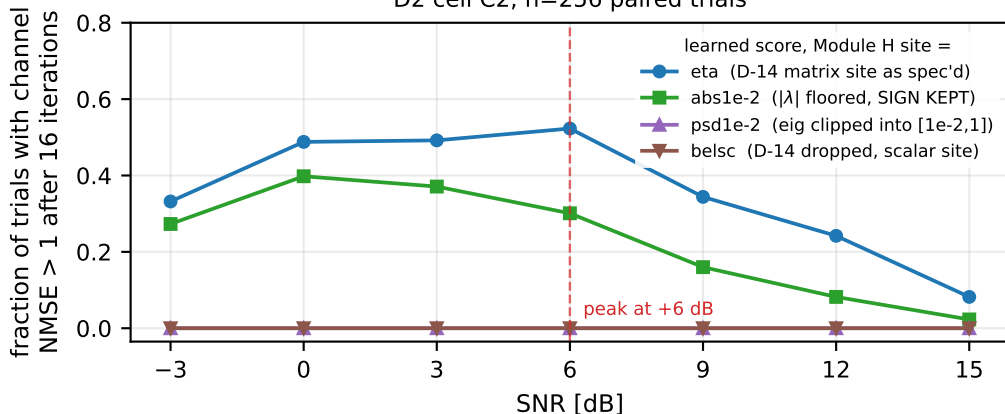

(a) and (b) have DIFFERENT x quantities and are NOT forced onto one axis. The only link drawn is the ruler above (a): the median σ_t the receiver queries at each SNR, measured separately at n=12 (logs/diag_sigma_coverage.log); grey bars are its inter-quartile span. +12 dB was not measured there, so it has no row.