
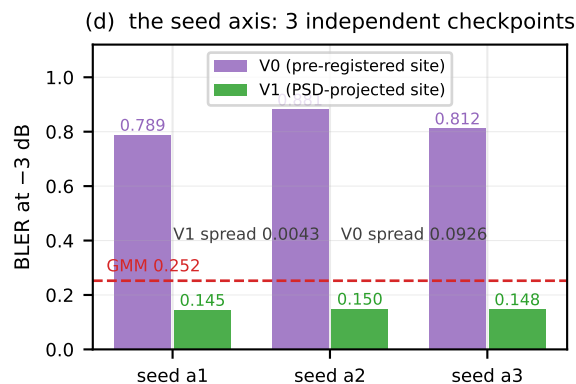
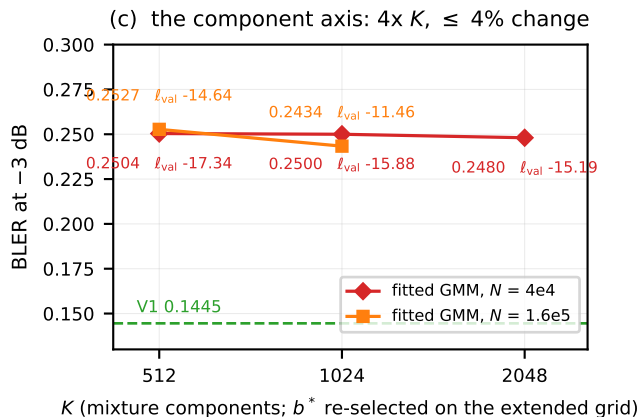
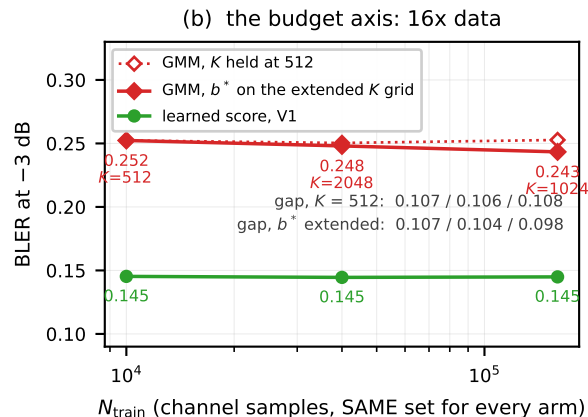


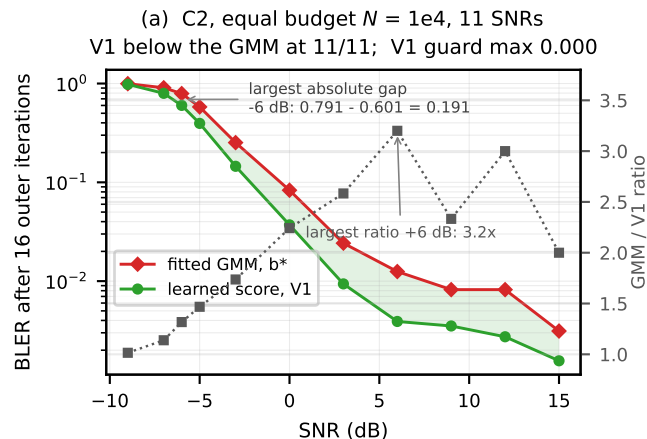

All panels: D2, cell C2 ($T_p = 4$), $n = 2560$ trials per point, receiver identical across arms; within every point the GMM and the learned prior see the SAME channel set.

(a), (c) $N=4e4$ column and (d) use checkpoints whose D1 siblings FAIL GC (0.243 at $N=1e4$, 0.167 at $N=4e4$); (b) rightmost point and (c) $N=1.6e5$ use the gate-passing d2sx_N160000_a1.

56d registers the gate-failing points as budget-axis measurements, not arm results.