Residual differences across obstacles at the actual next pose

DoN 0.85 | signed-distance Gaussian diagnostic, not logged optimizer residuals

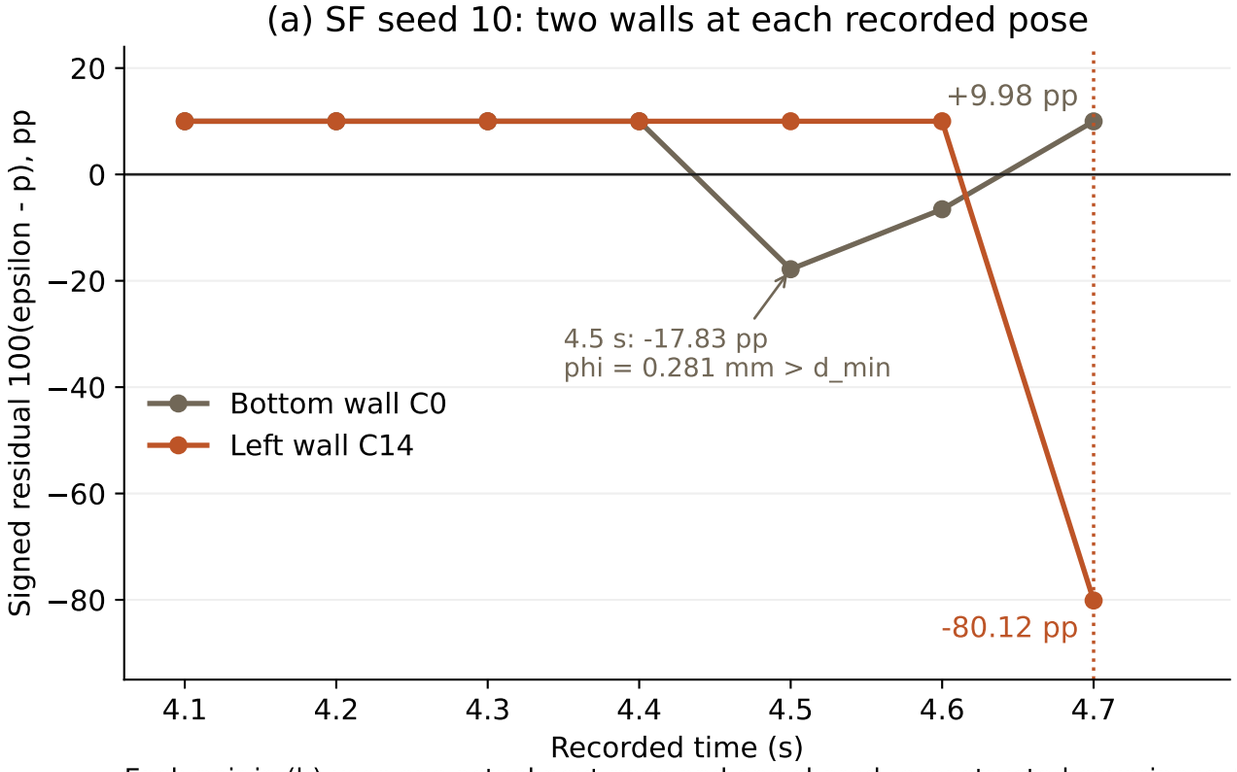

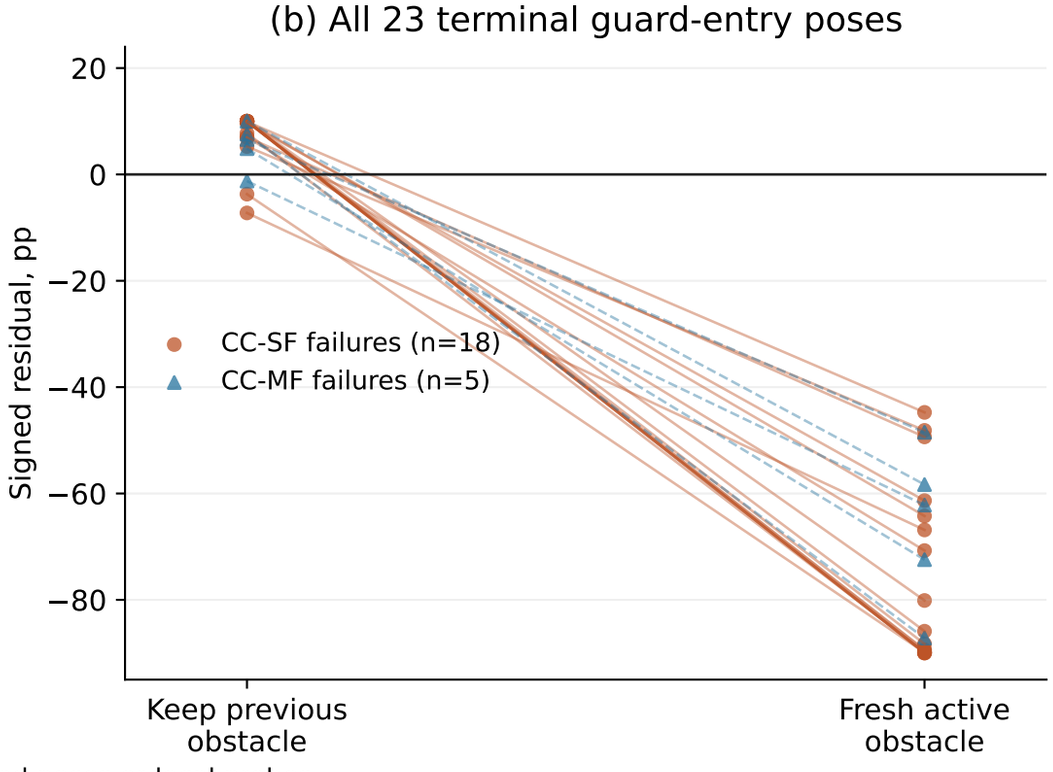

Each pair in (b) uses one actual next pose and one shared reconstructed covariance. No interpolated poses or local probes.

Terminal poses are outside the native MF activation domain. Their values are formal signed-distance Gaussian scores, not native MF violations.

Keeping an obstacle recomputes its closest geometry; it does not recover the primitive or nominal row used by the optimizer.