
ASSIGNMENT -2

CB.SC.U4CYS24124

PRAHARSHA

CLASS A:

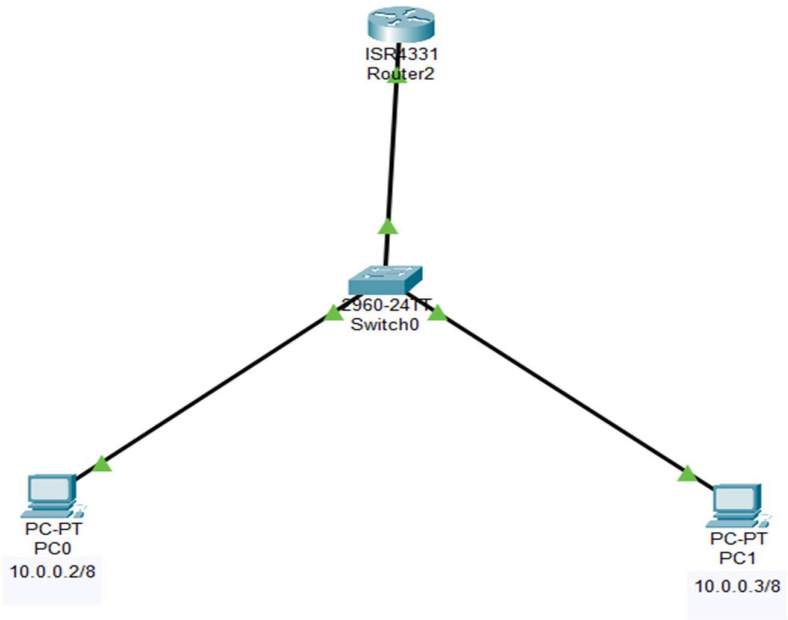

Connected two PC's to a switch which is connected to a router.

Used Class A IP addresses for assigning IP's to devices.

For class A
Subnet mask : 255.0.0.0

First bit representation: 0XXXXXXX


Here I have given router IP 10.0.0.1 and the network address is that.

And a switch is used for connecting router to two devices where PC0 was assigned IP 10.0.0.2 and PC1 was assigned 10.0.0.3

Packet was successfully sent from PC0 to router as well as PC0 to PC1

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
	Successful	PC0	Router1	ICMP		0.000	N	0	(edit)	(delete)
	Successful	PC0	PC1	ICMP		0.000	N	1	(edit)	(delete)

CLASS B:

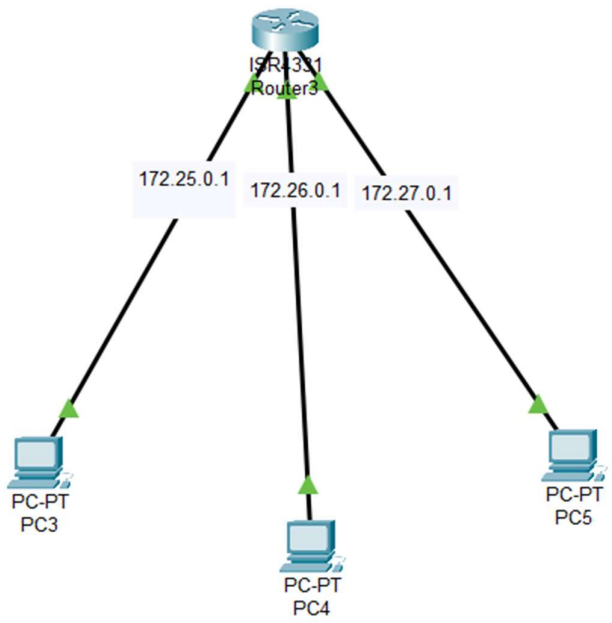


Subnet mask : 255.255.0.0

First bit representation: 10XXXXXX.XXXXXXXX

This is assigning of IP addresses using Class B IP's. And each port of router is connected to different networks. I have used 176.25.0.1 , 176.26.0.1 , 176.27.0.1 for each port.



CLASS C:

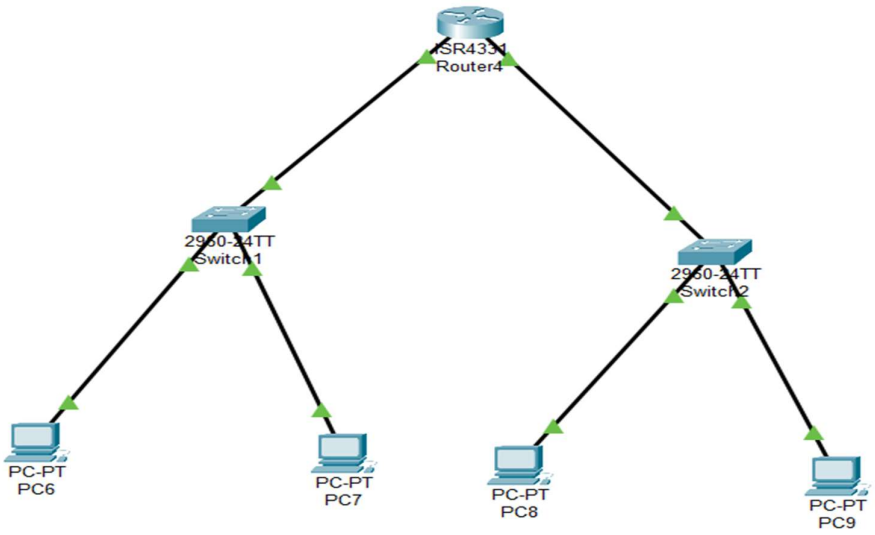

Subnet mask :255.255.255.0

First bit representation: 110XXXXXX.XXXXXXXX.XXXXXXXX


This is assignment of IP's using Class C IP assignment. I have created two networks with IP 192.168.0.1 and 192.168.1.1

PC6 and PC7 is connected to one switch which connects to network 192.168.0.1 with IPS's 192.168.0.2 and 192.168.0.3 respectively.


PC8 and PC9 is connected to one switch which connects to network 192.168.1.1 with IPS's 192.168.1.2 and 192.168.1.3 respectively.

Packets were sent successfully inter network as well as intra network.

From PC6 to PC7 as well as PC7 to PC8.

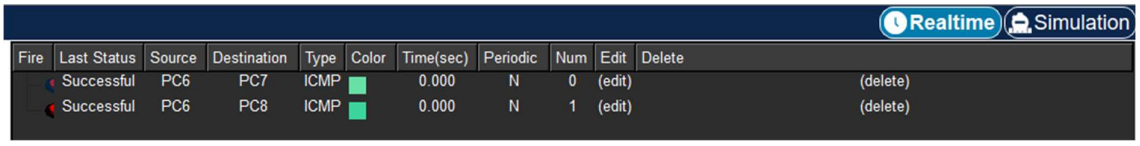

CLASS D:

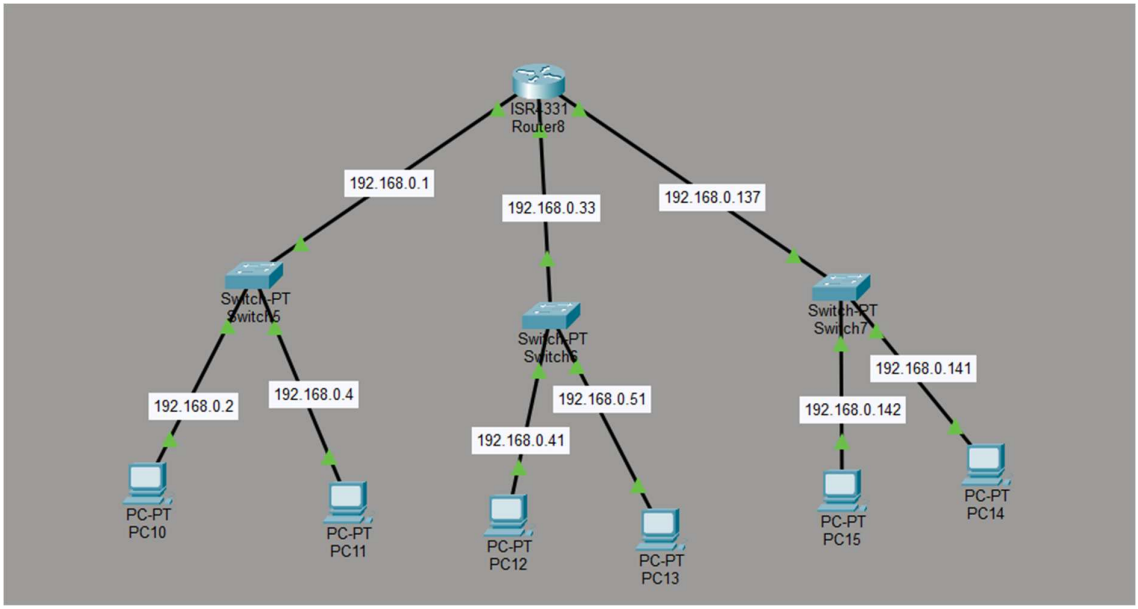

PC10 and PC11 are connected to a switch which is connected to the router interface with IP address 192.168.0.1/29. The PCs are assigned IP addresses 192.168.0.2 and 192.168.0.4 respectively.

PC12 and PC13 are connected to a switch which is connected to the router interface with IP address 192.168.0.33/27. The PCs are assigned IP addresses 192.168.0.41 and 192.168.0.51 respectively.

PC14 and PC15 are connected to another switch which is connected to the router interface with IP address 192.168.0.137/29. The PCs are assigned IP addresses 192.168.0.141 and 192.168.0.142 respectively.

A packet has been successfully sent in devices connected to intranet. From PC10 to PC11 , from PC12 to PC13 , from PC14 to PC15.

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
	Successful	PC10	PC11	ICMP		0.000	N	0	(edit)	(delete)
	Successful	PC12	PC13	ICMP		0.000	N	1	(edit)	(delete)
	Successful	PC15	PC14	ICMP		0.000	N	2	(edit)	(delete)