



Styling HTML with CSS


Instructor: Rashida



Styling HTML with CSS

- CSS stands for Cascading Style Sheets.
- CSS describes how HTML elements are to be displayed on screen, paper, or in other media.
- CSS saves a lot of work. It can control the layout of multiple web pages all at once.
- CSS can be added to HTML elements in 3 ways:

Ways to add CSS in HTML page

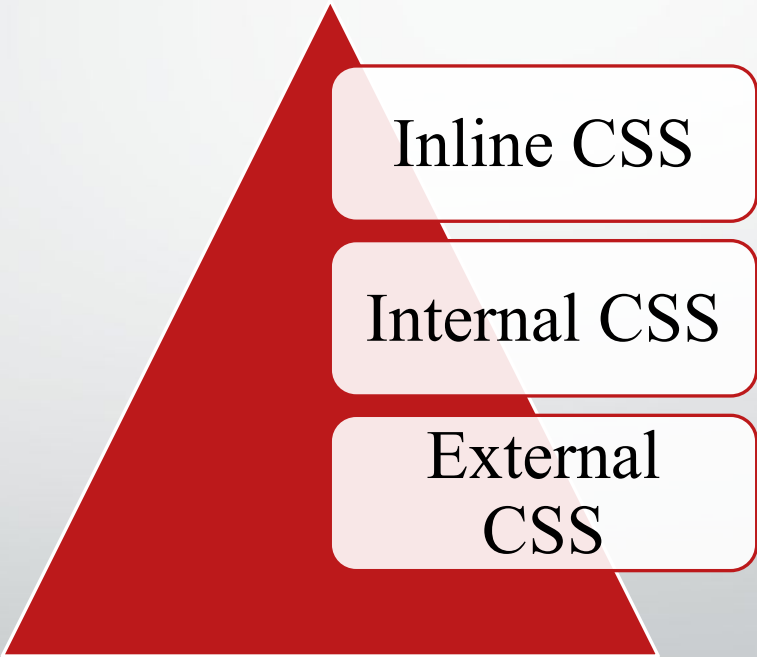

Inline CSS

Internal CSS

External
CSS

Ways to add CSS in HTML page

- Inline - by using the style attribute in HTML elements
- Internal - by using a `<style>` element in the `<head>` section
- External - by using an external CSS file
- The most common way to add CSS, is to keep the styles in separate CSS files. However, here we will use inline and internal styling, because this is easier to demonstrate, and easier for you to try it yourself.

Inline CSS

- An inline CSS is used to apply a unique style to a single HTML element.
- An inline CSS uses the style attribute of an HTML element.
- This example sets the text color of the <h1> element to blue:

```
<h1 style="color:blue;">This is a Blue Heading</h1>
```

The HTML Style Attribute

Setting the style of an HTML element, can be done with the **style** attribute.

The HTML **style** attribute has the following syntax:


```
<tagname style="property:value;">
```

The *property* is a CSS property. The *value* is a CSS value.




Color and Background-color property

```
<h1 style="color:red;  
background-color:yellow"> </h1>
```

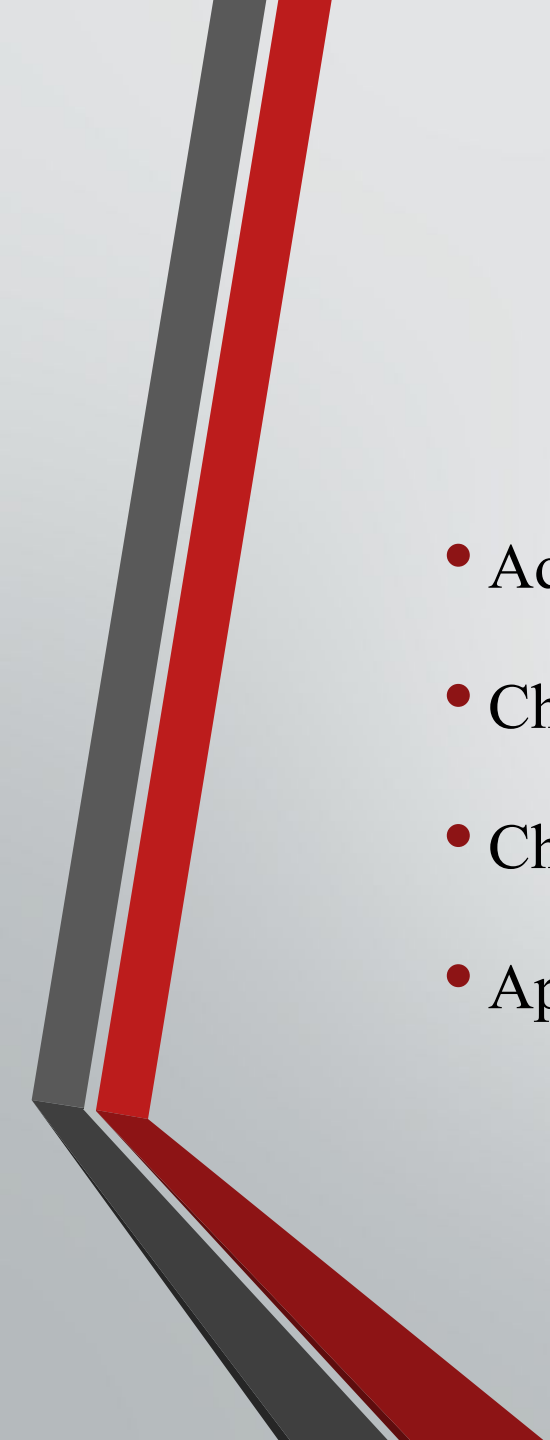

Task

- Add headings and paragraphs.
- Change text color and background-color of paragraph and heading.
- Change the background color of the page
- Apply border to headings and paragraphs.

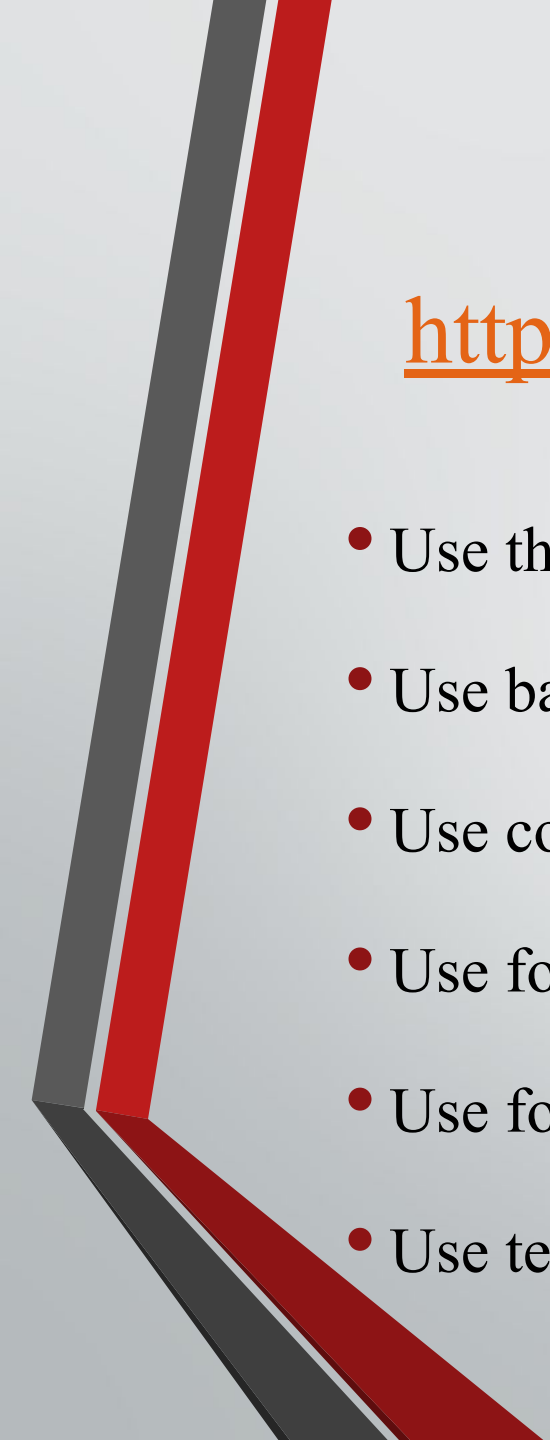

Practice all the tasks on this site:

https://www.w3schools.com/html/html_styles.asp

- Use the style attribute for styling HTML elements
- Use background-color for background color
- Use color for text colors
- Use font-family for text fonts
- Use font-size for text sizes
- Use text-align for text alignment

Quiz # 1

- Create two pages P1.html and p2.html
- In p1.html add the following:
 - Insert a heading “Parts of Speech”
 - Insert Ordered list: Noun, pronoun,.... Etc
 - Insert a picture any random
 - Insert anchor to the picture so that when you click it should open LinkedIn’ official site
 - Insert a text go to page 2. when you user clicks page 2 you should be navigated to p2. from page 2 go back to page 1.




Lab 09

- Internal CSS
- Definition List [do it yourself]
- Insert Table

Internal CSS

- An internal CSS is used to define a style for a single HTML page.
- An internal CSS is defined in the `<head>` section of an HTML page, within a `<style>` element:

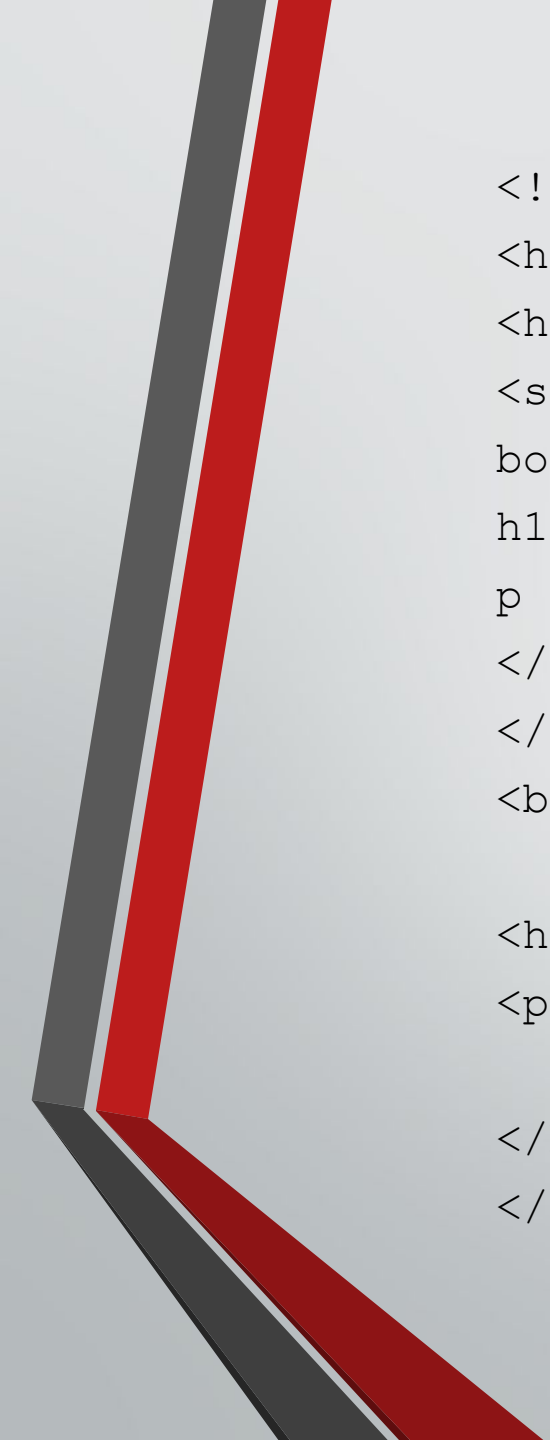

```
<!DOCTYPE html>
<html>
<head>
<style>
body {background-color: powderblue;}
h1   {color: blue;}
p    {color: red;}
</style>
</head>
<body>

<h1>This is a heading</h1>
<p>This is a paragraph.</p>

</body>
</html>
```

Task 1

```
body {  
  background-color: powderblue;  
}  
h1 {  
  color: blue;  
}  
p {  
  color: red;  
}
```

```
<body>  
<h1> AROR University </h1>  
<p> this is a paragraph </p>  
</body>
```



CSS Fonts

- The CSS color property defines the text color to be used.
- The CSS font-family property defines the font to be used.
- The CSS font-size property defines the text size to be used.

Example

```
<!DOCTYPE html>
<html>
<head>
<style>
h1 {
  color: blue;
  font-family: verdana;
  font-size: 300%;
}
p {
  color: red;
  font-family: courier;
  font-size: 160%;
}
</style>
</head>
<body>

<h1>This is a heading</h1>
<p>This is a paragraph.</p>

</body>
</html>
```


Editable Code

```
<!DOCTYPE html>
<html>
<head>
<style>
h1 {
  color: blue;
  font-family: verdana;
  font-size: 300%;
}
p {
  color: red;
  font-family: courier;
  font-size: 160%;
}
</style>
</head>
```

```
<body>

<h1>This is a heading</h1>
<p>This is a paragraph.</p>

</body>
</html>
```

CSS Border

- The CSS border property defines a border around an HTML element:

```
p {  
  border: 1px solid powderblue;  
}
```

CSS Padding

- The CSS padding property defines a padding (space) between the text and the border:

```
p {  
  border: 1px solid powderblue;  
  padding: 30px;  
}
```

CSS Margin

- The CSS margin property defines a margin (space) outside the border


```
p {  
  border: 1px solid powderblue;  
  margin: 50px;  
}
```

Chapter Summary

- Use the HTML style attribute for inline styling
- Use the HTML <style> element to define internal CSS
- Use the HTML <link> element to refer to an external CSS file
- Use the HTML <head> element to store <style> and <link> elements
- Use the CSS color property for text colors
- Use the CSS font-family property for text fonts
- Use the CSS font-size property for text sizes
- Use the CSS border property for borders
- Use the CSS padding property for space inside the border
- Use the CSS margin property for space outside the border

HTML File Paths

Path	Description
<code></code>	picture.jpg is located in the same folder as the current page
<code></code>	picture.jpg is located in the images folder in the current folder
<code></code>	picture.jpg is located in the images folder at the root of the current web
<code></code>	picture.jpg is located in the folder one level up from the current folder

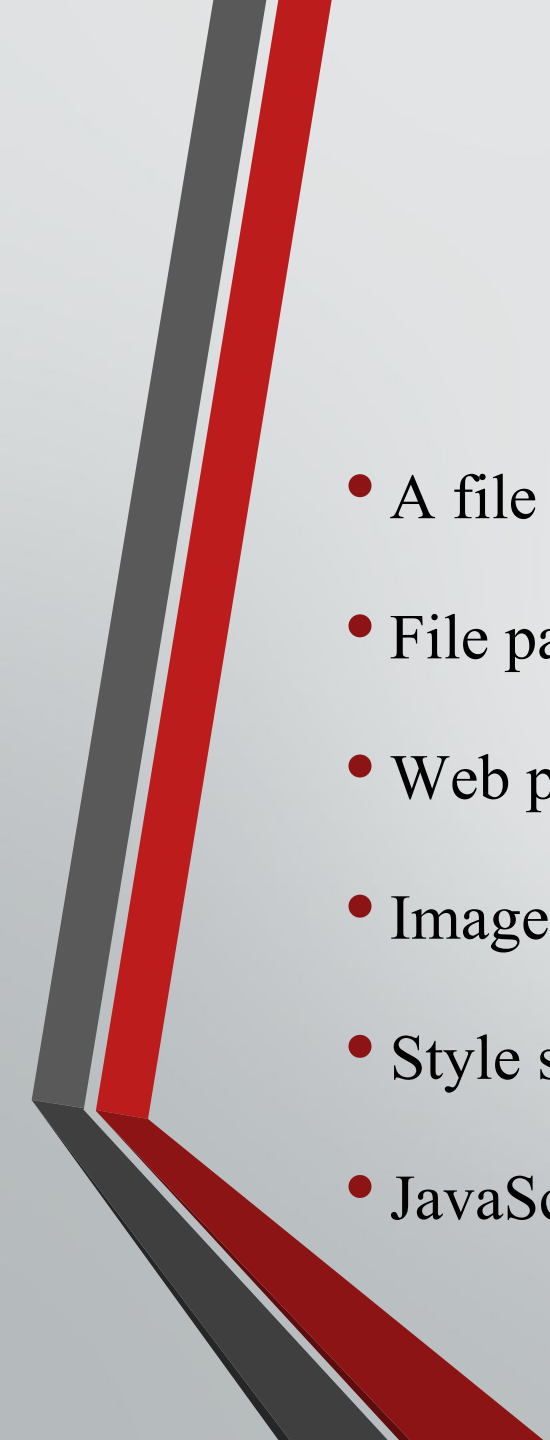

HTML File Paths

- A file path describes the location of a file in a web site's folder structure.
- File paths are used when linking to external files like:
 - Web pages
 - Images
 - Style sheets
 - JavaScripts

HTML Images

- Use the HTML `<img>` element to define an image
- Use the HTML `src` attribute to define the URL of the image
- Use the HTML `alt` attribute to define an alternate text for an image, if it cannot be displayed
- Use the HTML `width` and `height` attributes to define the size of the image
- Use the CSS `width` and `height` properties to define the size of the image (alternatively)

Task 3

- `<h1 style="background-color:Tomato;">Tomato</h1>`
- `<h1 style="background-color:Orange;">Orange</h1>`
- `<h1 style="background-color:DodgerBlue;">DodgerBlue</h1>`
- `<h1 style="background-color:MediumSeaGreen;">MediumSeaGreen</h1>`
- `<h1 style="background-color:Gray;">Gray</h1>`
- `<h1 style="background-color:SlateBlue;">SlateBlue</h1>`
- `<h1 style="background-color:Violet;">Violet</h1>`
- `<h1 style="background-color:LightGray;">LightGray</h1>`



Tomato

Orange

DodgerBlue

MediumSeaGreen

Gray

SlateBlue

Violet

LightGray

Activate Windows

Go to PC settings to activate Windows.

Hello World

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed diam nonummy nibh euismod tincidunt ut laoreet dolore magna aliquam erat volutpat. Ut wisi enim ad minim veniam, quis nostrud exercitation ullamcorper suscipit lobortis nisl ut aliquip ex ea commodo consequat.

background-color:DodgerBlue;

background-color:Tomato;

Task

- `<h1 style="background-color:DodgerBlue;">Hello World</h1>`
- `<p style="background-color:Tomato;">`
- Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed diam nonummy nibh euismod tincidunt ut laoreet dolore magna aliquam erat volutpat.
- Ut wisi enim ad minim veniam, quis nostrud exercitation ullamcorper suscipit lobortis nisl ut aliquip ex ea commodo consequat.
- `</p>`

Task

- `<h3 style="color:Tomato;">Hello World</h3>`
- `<p style="color:DodgerBlue;">This is a paragraph .</p>`
- `<p style="color:MediumSeaGreen;">This is another paragraph.</p>`

HTML Attributes

- Attributes provide additional information about HTML elements.
- All HTML elements can have **attributes**
- Attributes provide **additional information** about an element
- Attributes are always specified in **the start tag**
- Attributes usually come in name/value pairs like: **name="value"**

The href Attribute

- HTML links are defined with the `<a>` tag. The link address is specified in the href attribute:
- `<a href="https://www.google.com">This is a link</a>`

The src Attribute

- HTML images are defined with the `<img>` tag.
- The filename of the image source is specified in the src attribute:
- ``

The width and height Attributes

- HTML images also have width and height attributes, which specifies the width and height of the image:
- ``
- The width and height are specified in pixels by default; so width="500" means 500 pixels wide.

The alt Attribute

- The alt attribute specifies an alternative text to be used, if an image cannot be displayed.
- The value of the alt attribute can be read by screen readers. This way, someone "listening" to the webpage, e.g. a vision impaired person, can "hear" the element.

The style Attribute

- The style attribute is used to specify the styling of an element, like color, font, size etc.
- `<p style="color:red">This is a red paragraph.</p>`

Single or Double Quotes?

- Double quotes around attribute values are the most common in HTML, but single quotes can also be used.
- In some situations, when the attribute value itself contains double quotes, it is necessary to use single quotes:
- `<p title='John "ShotGun" Nelson'>`

HTML Horizontal Rules

- The `<hr>` tag defines a thematic break in an HTML page, and is most often displayed as a horizontal rule.
- The `<hr>` element is used to separate content (or define a change) in an HTML page:

Revision

- All HTML elements can have attributes
- The title attribute provides additional "tool-tip" information
- The href attribute provides address information for links
- The width and height attributes provide size information for images
- The alt attribute provides text for screen readers
- At W3Schools we always use lowercase attribute names
- At W3Schools we always quote attribute values