


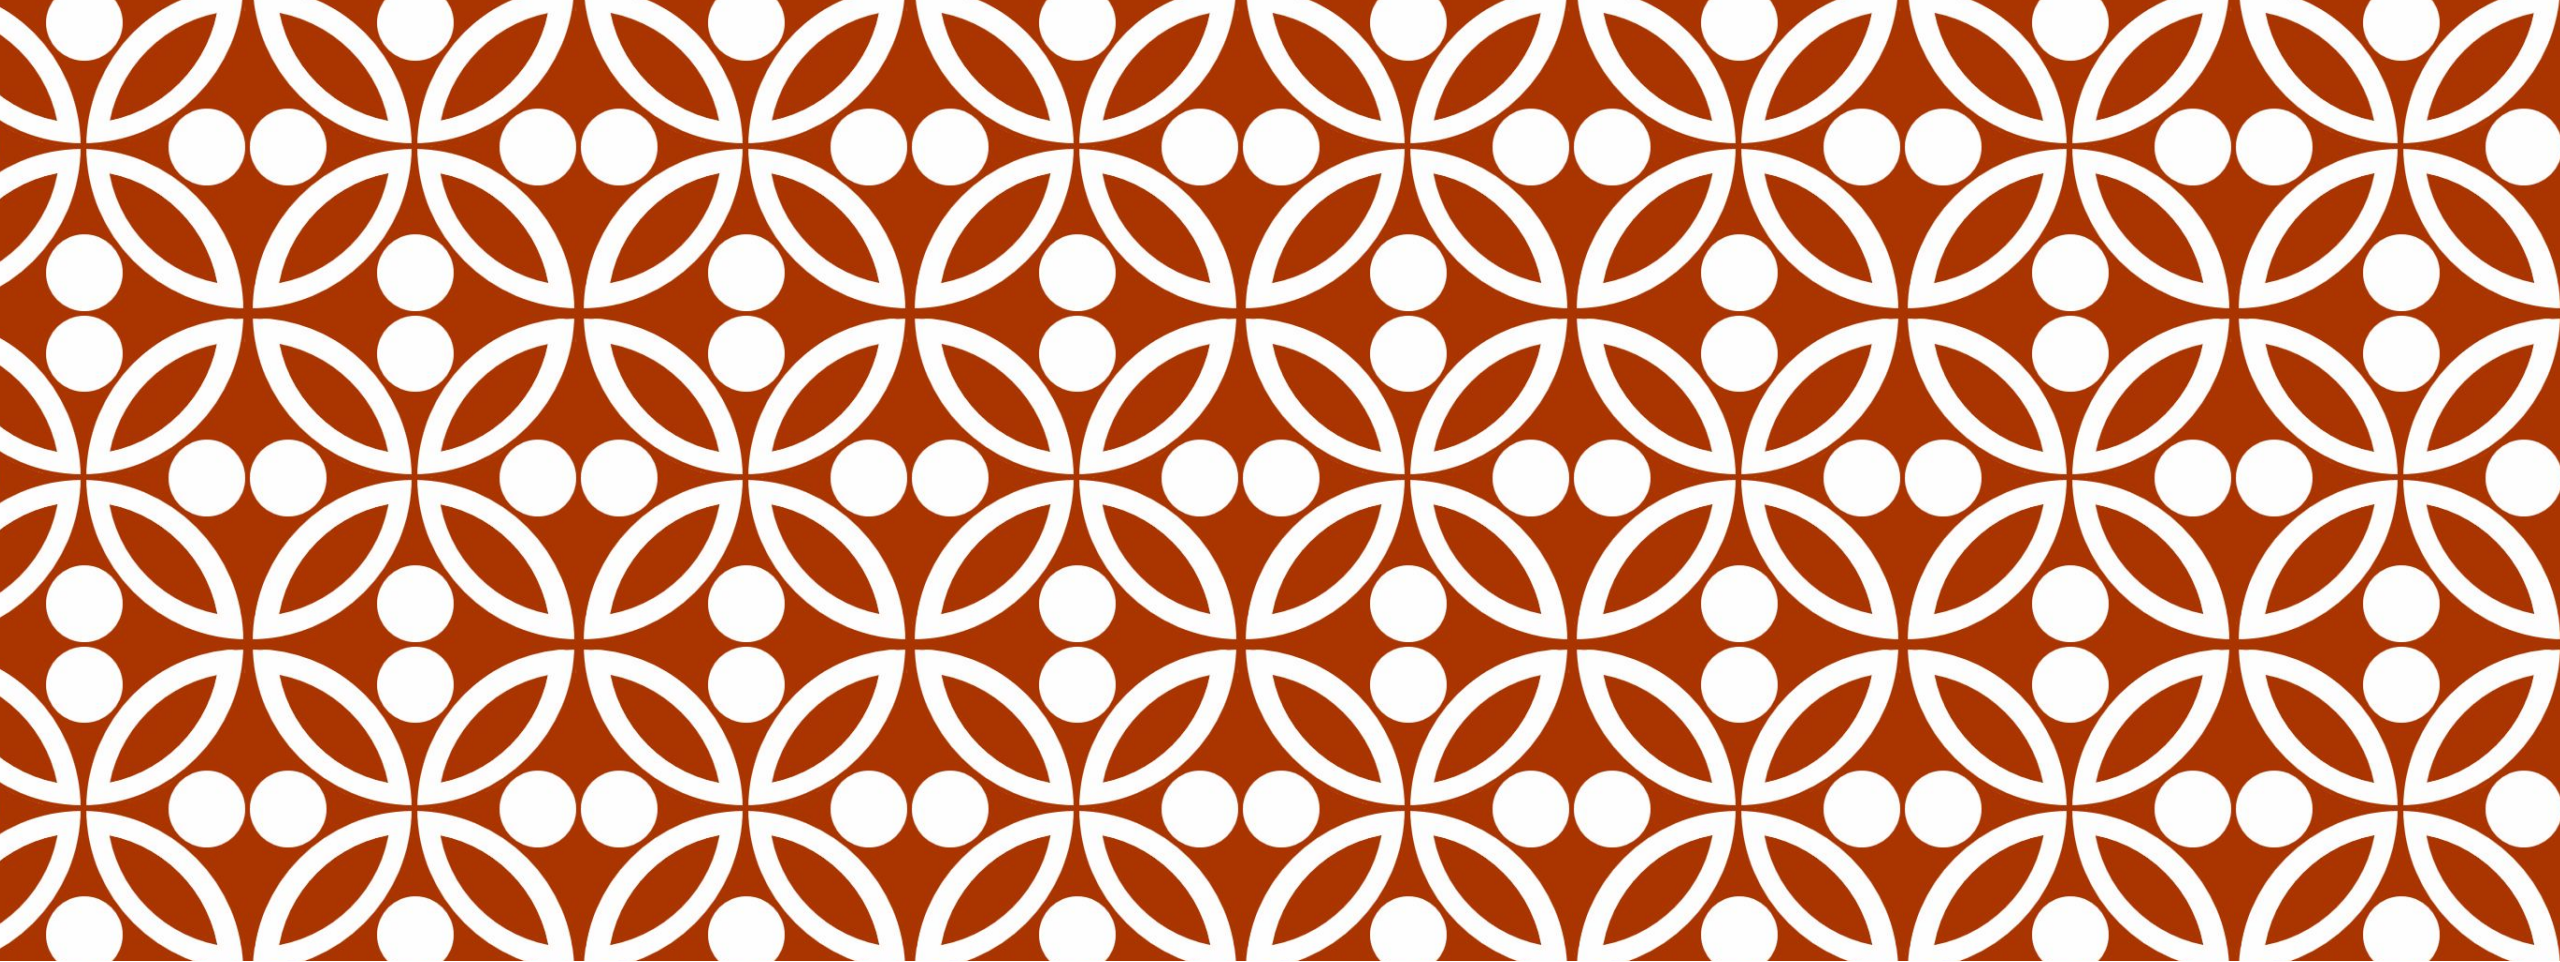

RECOGNIZE THE DIFFERENT TYPES OF OPERATORS

Sajjad Ali Rajper
Lecturer
Aror University

ARITHMETIC OPERATOR

+	Addition
-	Subtraction
*	Multiplication
/	Division
%	Modulus (Remainder Operator)

TWO CATEGORIES

Unary Operators:

Unary operators are those which can be implemented on a single operand. Commonly used unary operators are + +, - -

Binary Operators:

Binary operators are those which can be implemented on two operands. Commonly used binary operators are +, -, *, /, %

ARITHMETIC OPERATOR - CODE

```
#include <iostream>

using namespace std;

int main() {
    int a=6;
    int b = 8;

    cout << "Addition (a + b): " << a + b << endl;
    cout << "Subtraction (a - b): " << a - b << endl;
    cout << "Multiplication (a * b): " << a * b << endl;

    return 0;
}
```

RELATIONAL OPERATORS

>	greater than
<	lesser than
>=	greater than or equal to
<=	less than or equal to
==	is equal to
!=	is not equal to

LOGICAL OPERATORS

Commonly used Logical operators are:

&& (Logical AND), || (Logical OR), (Logical NOT)

TASK

You are developing a decision-making system for a company to decide on an employee's eligibility for a senior position. The system uses two criteria: age and salary. The company only considers employees who are:

- Age ≥ 30
- Salary > 50000

Write a program that:

1. Takes the age and salary of the employee as input.
2. Uses logical and relational operators to check if the employee meets the criteria for promotion.
3. Print "Eligible for Senior Position" if both criteria are met; otherwise, print "Not Eligible for Senior Position."