

How To Host A Static Website On AWS S3




Learn how to deploy your static website files directly onto Amazon S3. This guide walks you through configuring your bucket for web hosting, setting the necessary access permissions, and successfully uploading your site content for public viewing.


1

Navigate to


<https://eu-north-1.console.aws.amazon.com/console/home?region=eu-north-1>

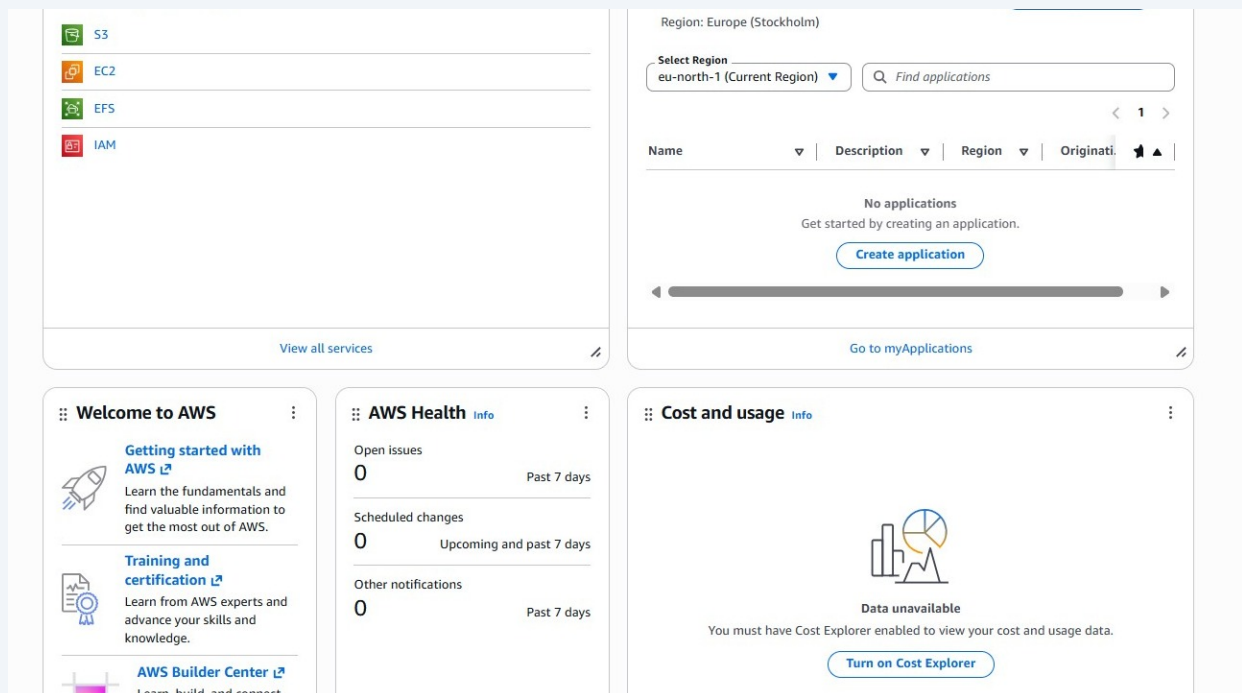

2 Double-click "S3"

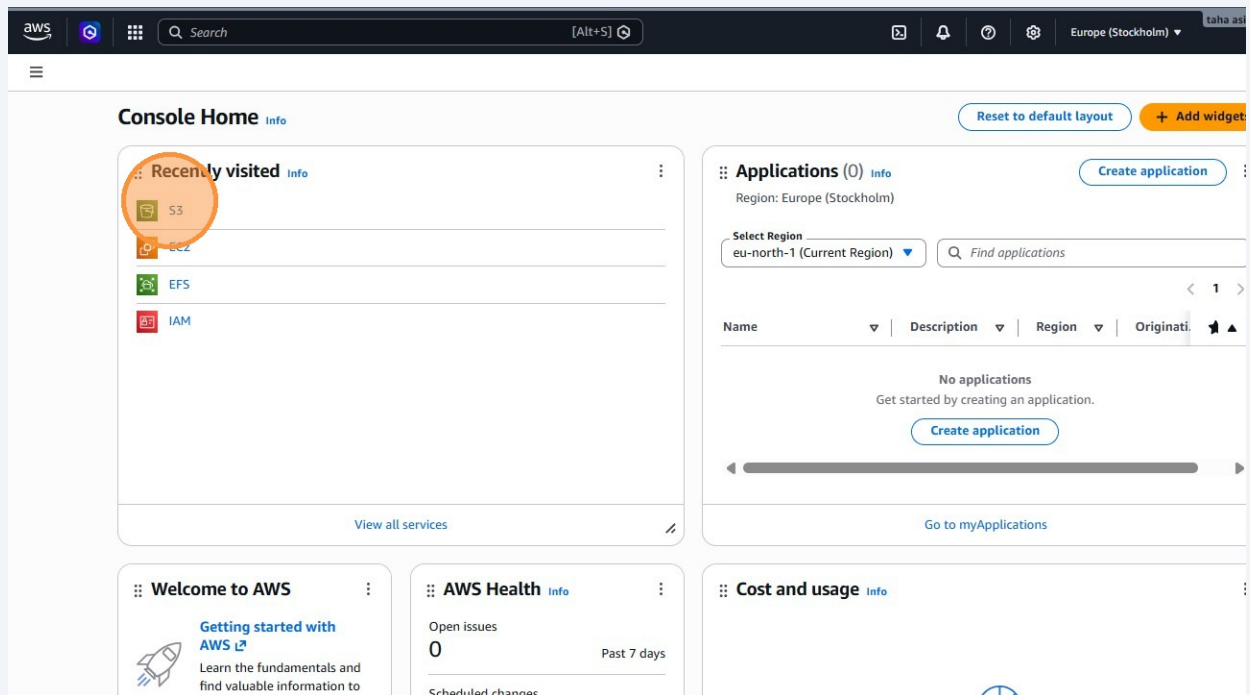

3 Click "Create bucket"

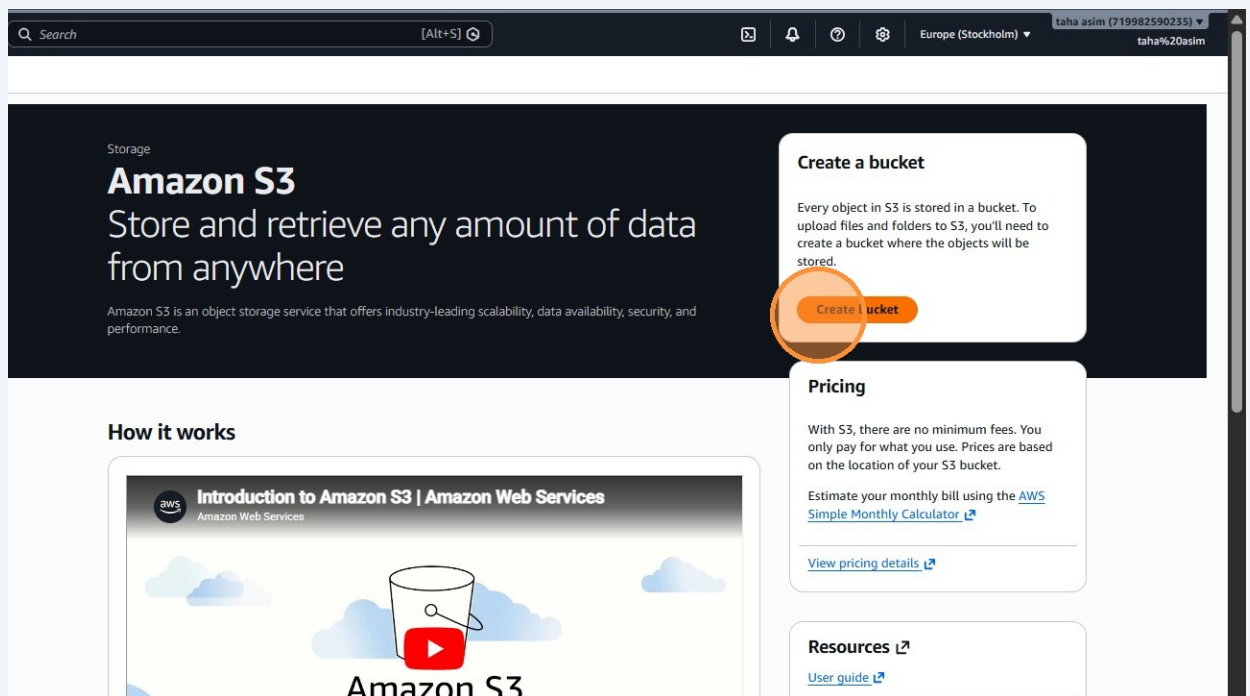

4 Click the "Bucket name" field.

General configuration

AWS Region

Europe (Stockholm) eu-north-1

Bucket type [Info](#)



General purpose

Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.



Directory

Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, faster processing of data within a single Availability Zone.

Bucket namespace

Choose the namespace where you want to create your bucket. [Learn more](#)

☒ Global namespace

By default, S3 creates general purpose buckets in the global namespace.

☐ Account Regional namespace (recommended)

General purpose buckets created in your account Regional namespace are unique to your account. These buckets can never be created by another AWS account.

Bucket name [Info](#)

amazon-s3-demo-bucket

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn more](#)

Copy settings from existing bucket - optional

Only the bucket settings in the following configuration are copied.

[Choose bucket](#)

Format: s3://bucket/prefix

Object Ownership [Info](#)

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership



ACLs disabled (recommended)

All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.



ACLs enabled

Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

Object Ownership

5 Type "taha-bucket-1235" make sure the name your entering is unique globally

6 To allow all public access you need to unblock it

Object Ownership [Info](#)

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

☒ ACLs disabled (recommended)

All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

☐ ACLs enabled

Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

Object Ownership

Bucket owner enforced

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on **Block all public access**. These settings apply only to this bucket and its access points. AWS recommends that you turn on **Block all public access**, but before applying any of these settings, ensure that your applications will work without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☒ Block all public access

Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

☒ Block public access to buckets and objects granted through new access control lists (ACLs)

S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow put resources using ACLs.

☒ Block public access to buckets and objects granted through any access control lists (ACLs)

S3 will ignore all ACLs that grant public access to buckets and objects.

☒ Block public access to buckets and objects granted through new public bucket or access point policies

S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

☒ Block public and cross-account access to buckets and objects through any public bucket or access point policies

S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning

7 This is used for creating versions so that incase if one version fails there are other versions present, to make sure the previous version can be hosted.

S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

☐ Block public and cross-account access to buckets and objects through any public bucket or access point policies

S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Turning off block all public access might result in this bucket and the objects within becoming public

AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.

☐ I acknowledge that the current settings might result in this bucket and the objects within becoming public.

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning

☒ Disable

☐ Enable

Tags - optional

You can use bucket tags to analyze, manage and specify permissions for a bucket. [Learn more](#)

 You can use s3:ListTagsForResource, s3:TagResource, and s3:UntagResource APIs to manage tags on S3 general purpose buckets for access control in addition to cost allocation and resource organization. To make a seamless transition, please provide permissions to s3:ListTagsForResource, s3:TagResource, and s3:UntagResource actions. [Learn more](#)

No tags associated with this bucket.

[Add new tag](#)

You can add up to 50 tags.

Default encryption [Info](#)

Server-side encryption is automatically applied to new objects stored in this bucket.

8 Click "Create bucket"

position, please provide permissions to s3:ListTagsForResource, s3:TagResource, and s3:UntagResource actions. [Learn more](#)

with this bucket.

)

tags.

Encryption Info

Encryption is automatically applied to new objects stored in this bucket.

Info

There are two separate layers of encryption. For details on pricing, see [DSSE-KMS pricing](#) on the [Storage](#) tab of the [Amazon S3 pricing page](#).

Encryption with Amazon S3 managed keys (SSE-S3)

Encryption with AWS Key Management Service keys (SSE-KMS)

Server-side encryption with AWS Key Management Service keys (DSSE-KMS)

Encryption with SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. [Learn more](#)

Bucket settings

For this bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

Cancel

Create bucket

Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences

9 Click "I acknowledge that the current settings might result in this bucket and the objects within becoming public."

access. These settings apply only to this bucket and its access points. AWS recommends that you turn on block all public access, but before applying any of these settings, ensure that your applications will work without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☐ Block all public access

Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

☐ Block public access to buckets and objects granted through new access control lists (ACLs)

S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to resources using ACLs.

☐ Block public access to buckets and objects granted through any access control lists (ACLs)

S3 will ignore all ACLs that grant public access to buckets and objects.

☐ Block public access to buckets and objects granted through new public bucket or access point policies

S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

☐ Block public and cross-account access to buckets and objects through any public bucket or access point policies

S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

☒ Turning off block all public access might result in this bucket and the objects within becoming public

AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.

☐ I acknowledge that the current settings might result in this bucket and the objects within becoming public.

☒ You must select the check box to continue creating the bucket.

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning

☐ Disable

☒ Enable

Tags - optional

You can use bucket tags to analyze, manage and specify permissions for a bucket. [Learn more](#)

You can use s3:ListTagsForResource, s3:TagResource, and s3:UntagResource APIs to manage tags on S3 general purpose buckets for access control in addition to cost allocation and resource organization. T

10 Click "Create bucket"

position, please provide permissions to s3:ListTagsForResource, s3:TagResource, and s3:UntagResource actions. [Learn more](#)

with this bucket.

)

tags.

Encryption [Info](#)

Encryption is automatically applied to new objects stored in this bucket.

Info

There are two separate layers of encryption. For details on pricing, see [DSSE-KMS pricing](#) on the [Storage](#) tab of the [Amazon S3 pricing page](#).

Encryption with Amazon S3 managed keys (SSE-S3)

Encryption with AWS Key Management Service keys (SSE-KMS)

Server-side encryption with AWS Key Management Service keys (DSSE-KMS)

Server-side encryption for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. [Learn more](#)

Settings

For this bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

[Cancel](#) [Create bucket](#)

[Console Mobile App](#) © 2026, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

11 Click here.

[Search](#) [Alt+S] [Europe \(Stockholm\)](#) [taha asim \(719982590235\)](#) [taha%20asim](#)

[buckets](#) > [taha-bucket-1235](#)

Created bucket "taha-bucket-1235"

1235 [Info](#)

[Metadata](#) [Properties](#) [Permissions](#) [Metrics](#) [Management](#) [File systems - new](#) [Access Points](#)

[Refresh](#) [Copy S3 URI](#) [Copy URL](#) [Download](#) [Open](#) [Delete](#) [Actions](#) [Create folder](#) [Upload](#)

fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

☐ Show versions [1](#) [Settings](#)

Type	Last modified	Size	Storage class
No objects			
You don't have any objects in this bucket.			

[Upload](#)

12 Click "Add files" the one you need for hosting on cloud

The screenshot shows the AWS S3 console 'Upload' page for a bucket named 'taha-bucket-1235'. The page has a dark header with a search bar, navigation icons, and the user's name 'taha asim (719982590235)'. Below the header, the breadcrumb 'buckets > taha-bucket-1235 > Upload' is visible. The main content area has a dashed box for dragging files, followed by a section titled 'Uploaders (0)' with a text input and a table. The table has columns for 'Folder', 'Type', and 'Size'. Below the table, there is a message: 'No files or folders. You have not chosen any files or folders to upload.' At the bottom, there is a section for 'Permissions' with a link to 'Learn more'. The 'Add files' button is circled in orange.

Search [Alt+S] Europe (Stockholm) taha asim (719982590235) taha%20asim

buckets > taha-bucket-1235 > Upload

rs you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.

Uploaders (0)
in this table will be uploaded.

Remove Add files Add folder

Folder	Type	Size
No files or folders You have not chosen any files or folders to upload.		

ifo

235 [235](#)

etails
that impact new objects stored in the specified destination.

13 Click "Upload"

The screenshot shows the AWS S3 console 'Upload' page with a list of files. The table has columns for 'Folder', 'Type', and 'Size'. The files listed are '50509184000.jpg' (53.9 KB), '50509184003.jpg' (60.2 KB), and '206.0 B'. Below the table, there is a section for 'Permissions' with a link to 'Learn more'. The 'Upload' button is circled in orange.

Folder	Type	Size
-	image/jpeg	53.9 KB
-	image/jpeg	60.2 KB
-	text/html	206.0 B

ifo

235 [235](#)

etails
that impact new objects stored in the specified destination.


and access to other AWS accounts.

s, encryption settings, tags, and more.

Cancel Upload

Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

14 Click "Close"

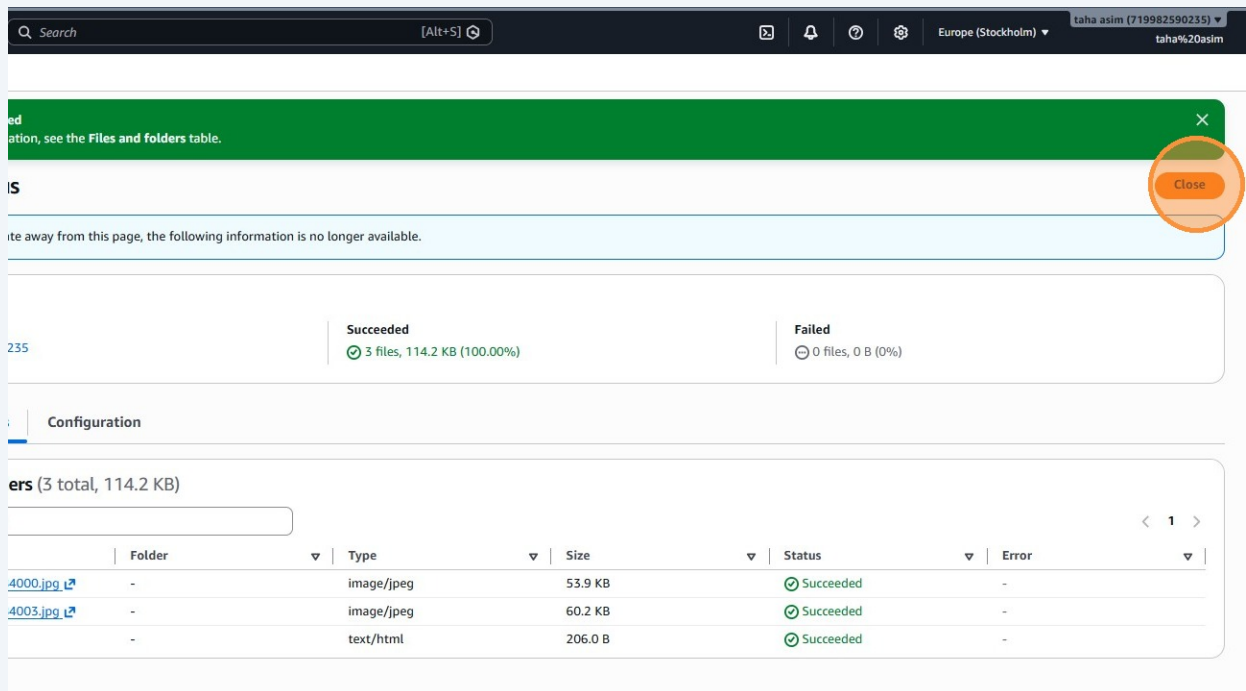

ed
ation, see the Files and folders table.

IS

ite away from this page, the following information is no longer available.

235

Succeeded
✔ 3 files, 114.2 KB (100.00%)


Failed
✖ 0 files, 0 B (0%)

Configuration

ers (3 total, 114.2 KB)

	Folder	Type	Size	Status	Error
4000.jpg	-	image/jpeg	53.9 KB	✔ Succeeded	-
4003.jpg	-	image/jpeg	60.2 KB	✔ Succeeded	-
	-	text/html	206.0 B	✔ Succeeded	-

15 Click "Properties"

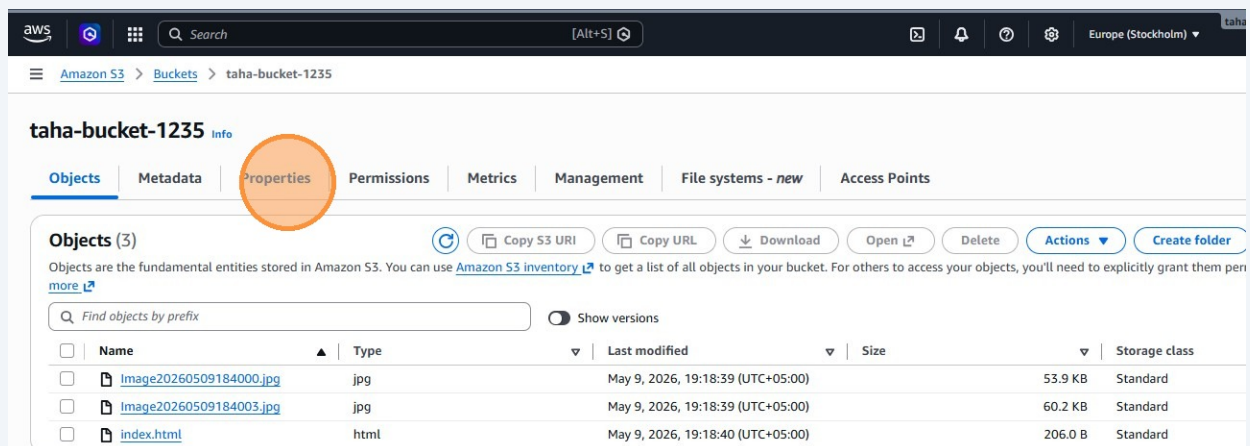

aws

Search [Alt+S]

Europe (Stockholm)

taha asim (719982590235)

taha%20asim

Amazon S3 > Buckets > taha-bucket-1235

taha-bucket-1235 Info

Objects Metadata **Properties** Permissions Metrics Management File systems - new Access Points

Objects (3)


Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permission [more](#).

Find objects by prefix


Show versions

	Name	Type	Last modified	Size	Storage class
☐	Image20260509184000.jpg	jpg	May 9, 2026, 19:18:39 (UTC+05:00)	53.9 KB	Standard
☐	Image20260509184003.jpg	jpg	May 9, 2026, 19:18:39 (UTC+05:00)	60.2 KB	Standard
☐	index.html	html	May 9, 2026, 19:18:40 (UTC+05:00)	206.0 B	Standard

16 Click "Edit"

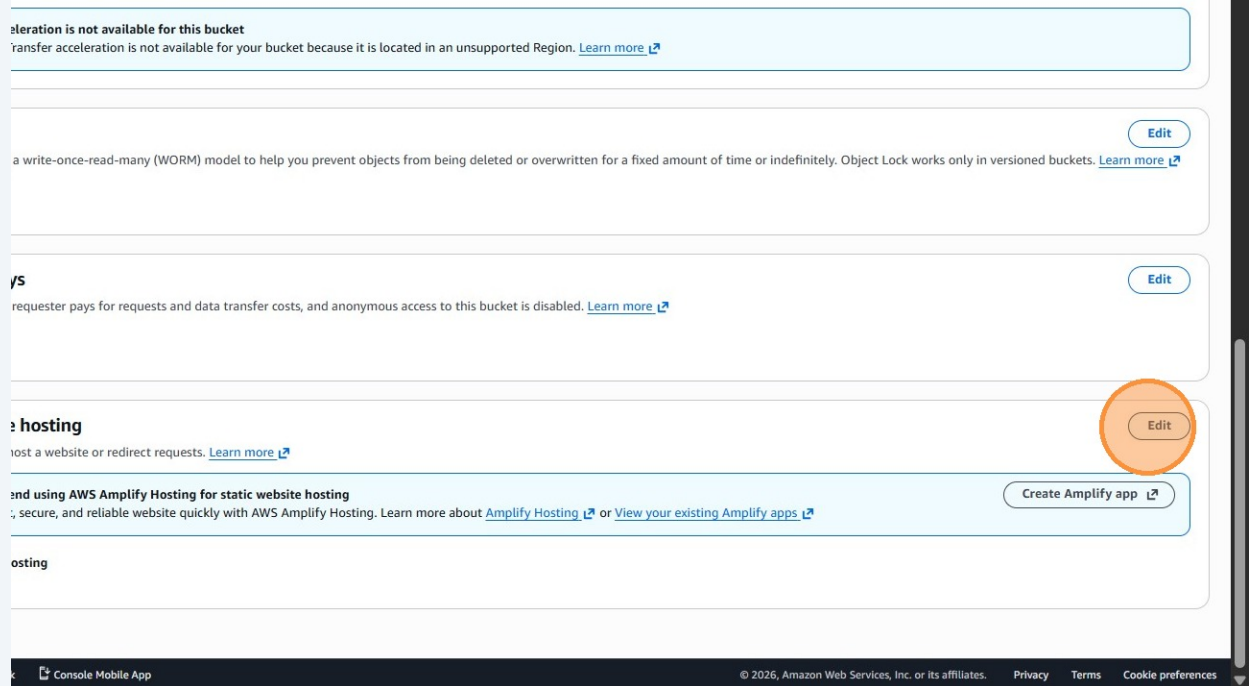

17 Static website hosting this is where you dont need servers to make it running.

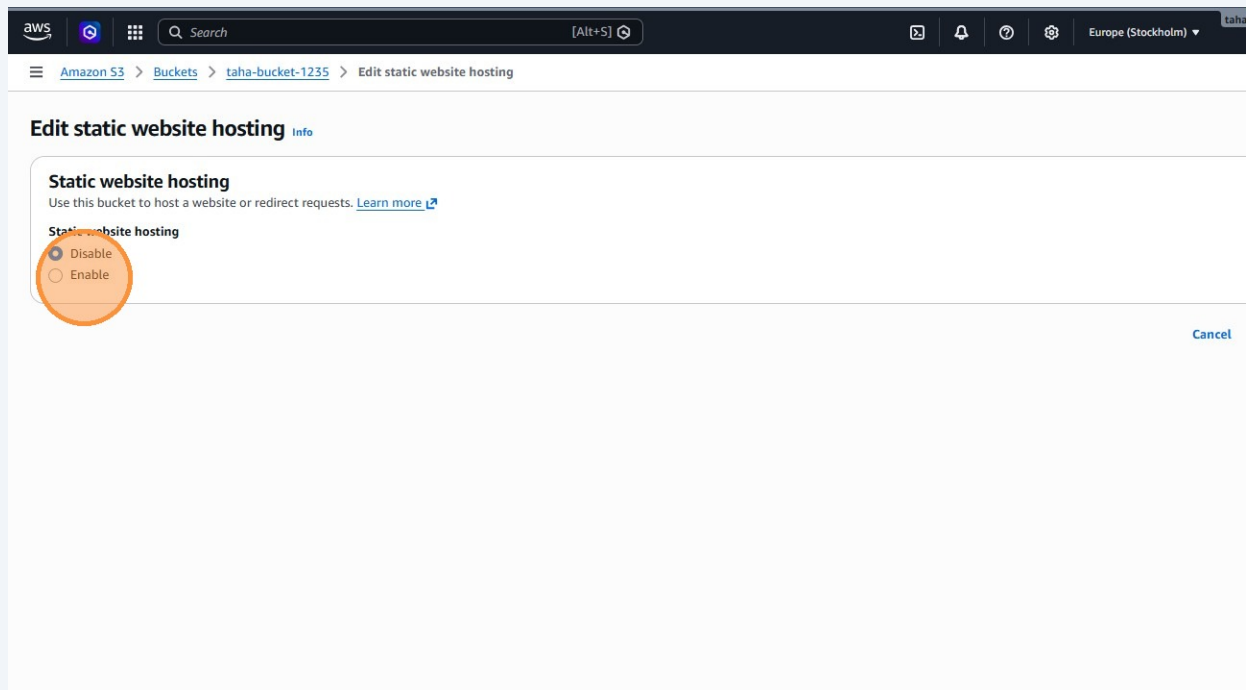

18 Click "Save changes"

optional

en in JSON, automatically redirect webpage requests for specific content. [Learn more](#)

--	--

Col 1 Errors: 0 Warnings: 0

Cancel

Save changes

Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences

19 Click the "Index document" field.

aws [Search] [Alt+S] Europe (Stockholm) taha as

Amazon S3 Buckets taha-bucket-1235 Edit static website hosting

☐ Redirect requests for an object
Redirect requests to another bucket or domain. [Learn more](#)

Index document
Specify the home or default page of the website.

Must be at least 1 characters long.


Error document - optional
This is returned when an error occurs.

Redirection rules - optional
Redirection rules, written in JSON, automatically redirect webpage requests for specific content. [Learn more](#)

1		
---	--	--

20 Type "index.html"

21 Click "Save changes"

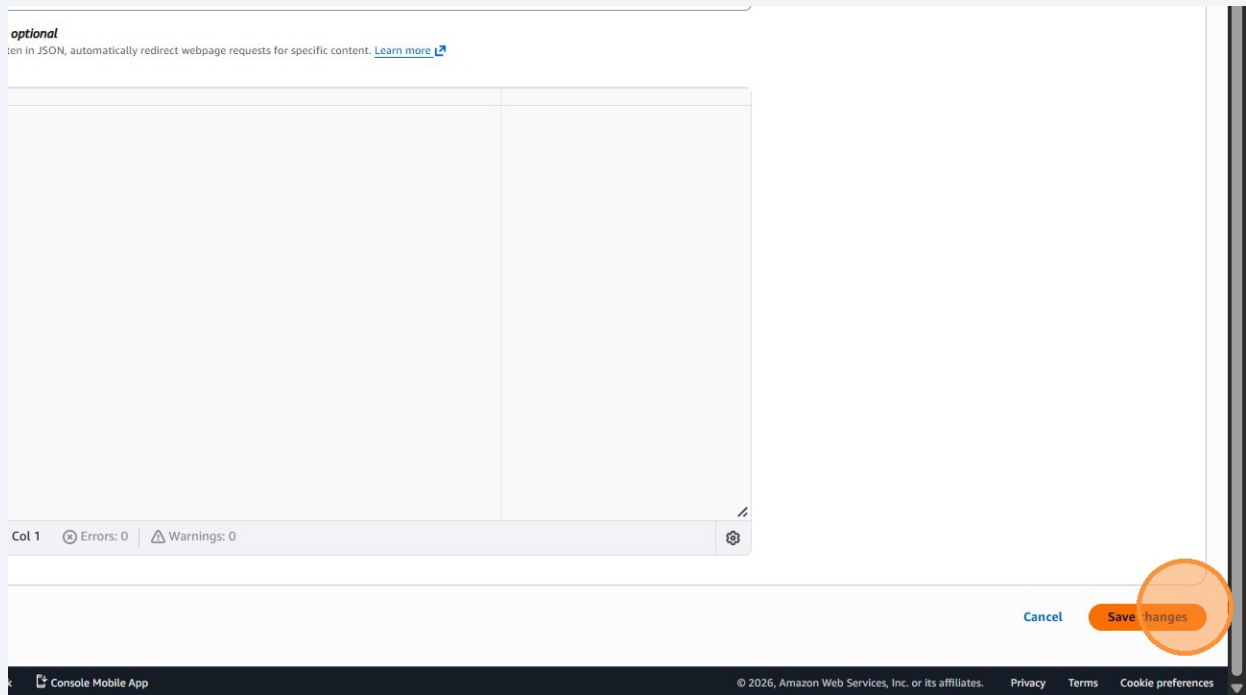

22 Click Bucket website endpoint to access the website

Object Lock

Store objects using a write-once-read-many (WORM) model to help you prevent objects from being deleted or overwritten for a fixed amount of time or indefinitely. Object Lock works only in versioned buckets.

Object Lock
Disabled

Requester pays

When enabled, the requester pays for requests and data transfer costs, and anonymous access to this bucket is disabled. [Learn more](#)

Requester pays
Disabled

Static website hosting

Use this bucket to host a website or redirect requests. [Learn more](#)

 We recommend using [AWS Amplify Hosting](#) for static website hosting

Deploy a fast, secure, and reliable website quickly with AWS Amplify Hosting. Learn more about [Amplify Hosting](#) or [View your existing Amplify apps](#)

Create Amplify

S3 static website hosting
Enabled

Hosting type
Bucket hosting

Bucket website endpoint

When you configure your bucket as a static website, the website is available at the AWS Region-specific website endpoint of the bucket. [Learn more](#)

 <http://taha-bucket-1235.s3-website-eu-north-1.amazonaws.com>

 CloudShell  Feedback  Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#)

23 Click "Permissions"

[Alt+S]Europe (Stockholm)taha as

[Amazon S3](#) > [Buckets](#) > taha-bucket-1235

Successfully edited static website hosting.

taha-bucket-1235 [Info](#)

[Objects](#) | [Metadata](#) | [Properties](#) | [Permissions](#) | [Metrics](#) | [Management](#) | [File systems - new](#) | [Access Points](#)

Bucket overview

AWS Region Europe (Stockholm) eu-north-1	Amazon Resource Name (ARN)  arn:aws:s3:::taha-bucket-1235	Creation date May 9, 2026, 19:18:23 (UTC+05:00)
--	--	---

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With v

can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning
Enabled

Multi-factor authentication (MFA) delete

An additional layer of security that requires multi-factor authentication for changing Bucket Versioning settings and permanently deleting object versions. To modify MFA delete settings, use the AWS CLI, AWS SDK, or the Amazon S3 REST API.


Disabled

Bucket ABAC


Attribute-based access control (ABAC) is an authorization strategy that defines permissions based on attributes. With ABAC, you can attach tags to your general purpose buckets and AWS Identity and Access Man

entities (users or roles), then scale access to objects in your S3 general purpose buckets using tag-based policies. [Learn more](#)

24 Click "Edit"

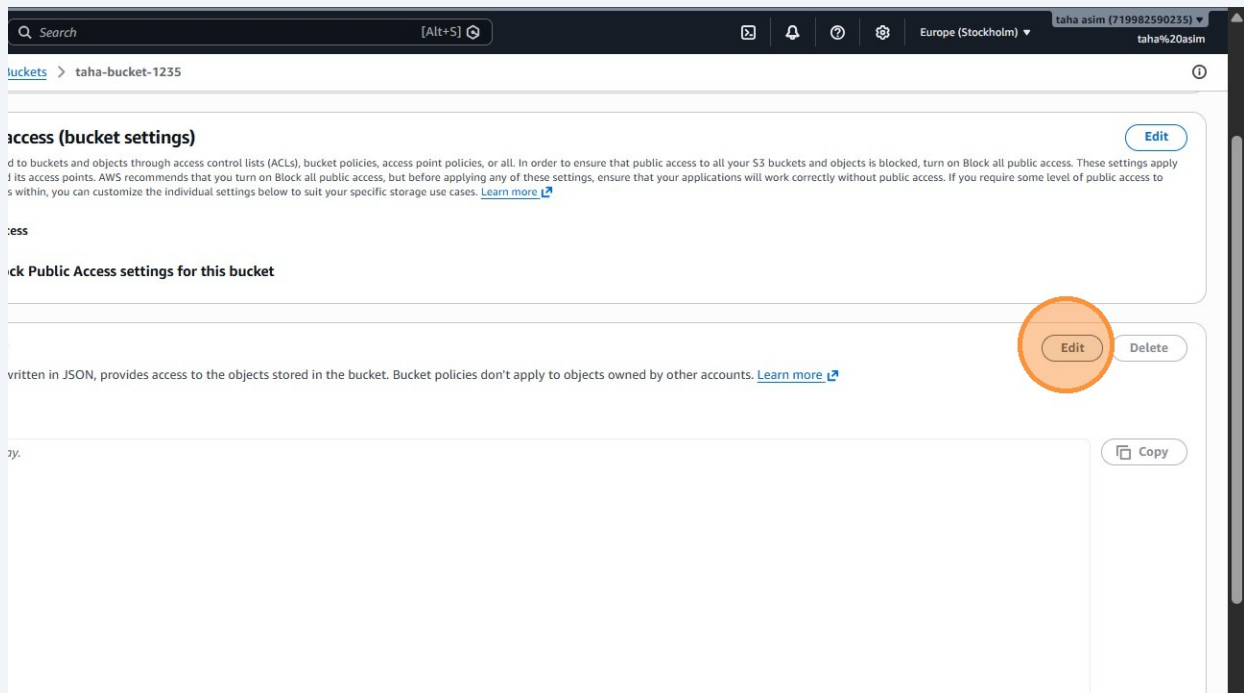

25 Click "Editor content, press Enter to start editing, press Escape to exit"

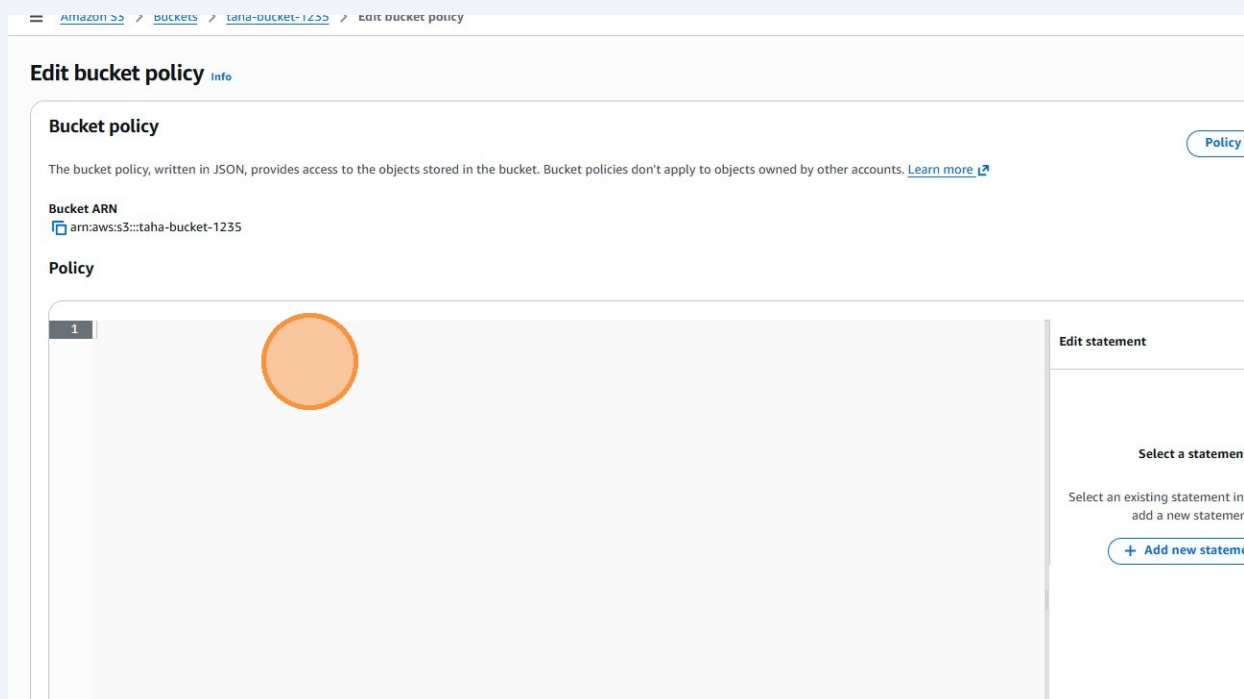

26 Click "Editor content, press Enter to start editing, press Escape to exit"

Bucket ARN
arn:aws:s3:::taha-bucket-1235

Policy

1

Edit statement

Select a statement

Select an existing statement in
add a new statement

+ Add new statement

+ Add new statement

27 Press **ctrl + v**

The screenshot shows the AWS Management Console interface for editing a bucket policy. The breadcrumb navigation at the top reads: **Amazon S3** > **Buckets** > **taha-bucket-1235** > **Edit bucket policy**. The main heading is **Edit bucket policy** with an **Info** link. Below this, the **Bucket policy** section explains that the policy is written in JSON and provides access to objects in the bucket. A **Policy examples** link is available. The **Bucket ARN** is shown as `arn:aws:s3:::taha-bucket-1235`. The **Policy** section features a large text area for editing the JSON policy, with a line number indicator showing '1'. To the right of the text area is the **Edit statement** panel, which prompts the user to 'Select a statement' and provides an **+ Add new statement** button. At the bottom of the text area, there is another **+ Add new statement** button. The status bar at the bottom indicates 'JSON Ln 1, Col 0' and shows zero counts for Security, Errors, Warnings, and Suggestions. A **Preview external access** link is also present. The footer of the console includes links for CloudShell, Feedback, and Console Mobile App, along with copyright information for 2026 Amazon Web Services, Inc.

28 Here we are creating a policy to make sure that users can access the website

Bucket policy

The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

Bucket ARN
arn:aws:s3:::taha-bucket-1235

Policy

```
1 {
2   "Version": "2012-10-17",
3   "Statement": [
4     {
5       "Sid": "AllowGetObjectAccess",
6       "Effect": "Allow",
7       "Principal": "*",
8       "Action": "s3:GetObject",
9       "Resource": "arn:aws:s3:::YOUR_BUCKET_NAME/*"
10    }
11  ]
12 }
```

Edit statement

Select a statement

Select an existing statement in
add a new statement

[+ Add new statement](#)

29 Click "Properties"

aws [Search] [Alt+S] Europe (Stockholm) taha asl

Amazon S3 > Buckets > taha-bucket-1235

Successfully edited bucket policy.

taha-bucket-1235 Info

Objects | Metadata | **Properties** | Permissions | Metrics | Management | File systems - new | Access Points

Permissions overview

Access finding
Access findings are provided by IAM external access analyzers. Learn more about [How IAM analyzer findings work](#)
[View analyzer for eu-north-1](#)

Block public access (bucket settings)
Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to all your S3 buckets and objects is blocked, turn on Block all public access. The only way to this bucket and its access points, AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to your buckets or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

Block all public access
Off

► Individual Block Public Access settings for this bucket

Bucket policy [Edit](#)

The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

30 Click "Objects"

The screenshot shows the AWS Management Console interface for the bucket 'taha-bucket-1235'. The 'Objects' tab is highlighted with an orange circle. The console displays the bucket's overview, including its AWS Region (Europe (Stockholm) eu-north-1), Amazon Resource Name (ARN), and Creation date (May 9, 2026, 19:18:23 (UTC+05:00)). Below the overview, there are sections for Bucket Versioning (Enabled), Multi-factor authentication (MFA) delete (Disabled), and Bucket ABAC (Disabled).

Bucket overview

Property	Value
AWS Region	Europe (Stockholm) eu-north-1
Amazon Resource Name (ARN)	arn:aws:s3::taha-bucket-1235
Creation date	May 9, 2026, 19:18:23 (UTC+05:00)

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning
Enabled

Multi-factor authentication (MFA) delete
An additional layer of security that requires multi-factor authentication for changing Bucket Versioning settings and permanently deleting object versions. To modify MFA delete settings, use the AWS CLI, AWS SDK, or the Amazon S3 REST API.
Disabled

Bucket ABAC

Attribute-based access control (ABAC) is an authorization strategy that defines permissions based on attributes. With ABAC, you can attach tags to your general purpose buckets and AWS Identity and Access Management (IAM) entities (users or roles), then scale access to objects in your S3 general purpose buckets using tag-based policies. [Learn more](#)

ABAC status
Disabled

31 Click "Upload"

The screenshot shows the AWS Management Console interface for the bucket 'taha-bucket-1235'. The 'Upload' button is highlighted with an orange circle. The console displays the bucket's overview, including its AWS Region (Europe (Stockholm) eu-north-1), Amazon Resource Name (ARN), and Creation date (May 9, 2026, 19:18:23 (UTC+05:00)). Below the overview, there are sections for Bucket Versioning (Enabled), Multi-factor authentication (MFA) delete (Disabled), and Bucket ABAC (Disabled).

Bucket overview

Property	Value
AWS Region	Europe (Stockholm) eu-north-1
Amazon Resource Name (ARN)	arn:aws:s3::taha-bucket-1235
Creation date	May 9, 2026, 19:18:23 (UTC+05:00)

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning
Enabled

Multi-factor authentication (MFA) delete
An additional layer of security that requires multi-factor authentication for changing Bucket Versioning settings and permanently deleting object versions. To modify MFA delete settings, use the AWS CLI, AWS SDK, or the Amazon S3 REST API.
Disabled

Bucket ABAC

Attribute-based access control (ABAC) is an authorization strategy that defines permissions based on attributes. With ABAC, you can attach tags to your general purpose buckets and AWS Identity and Access Management (IAM) entities (users or roles), then scale access to objects in your S3 general purpose buckets using tag-based policies. [Learn more](#)

ABAC status
Disabled


32 Click "Add files"

The screenshot shows the AWS S3 console 'Upload' page. At the top, there's a search bar and navigation links. Below, a message states: 'Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.' Below this is a table with columns: 'Folder', 'Type', and 'Size'. The table is currently empty, with a message: 'No files or folders. You have not chosen any files or folders to upload.' To the right of the table, there are three buttons: 'Remove', 'Add files' (circled in orange), and 'Add folder'.

33 Click "Upload"

The screenshot shows the AWS S3 console 'Upload' page. At the top, there's a search bar and navigation links. Below, a message states: 'Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.' Below this is a table with columns: 'Folder', 'Type', and 'Size'. The table contains one row with the following data: 'Folder: -', 'Type: text/html', 'Size: 197.0 B'. To the right of the table, there are two buttons: 'Cancel' and 'Upload' (circled in orange).

34 Click "Close"

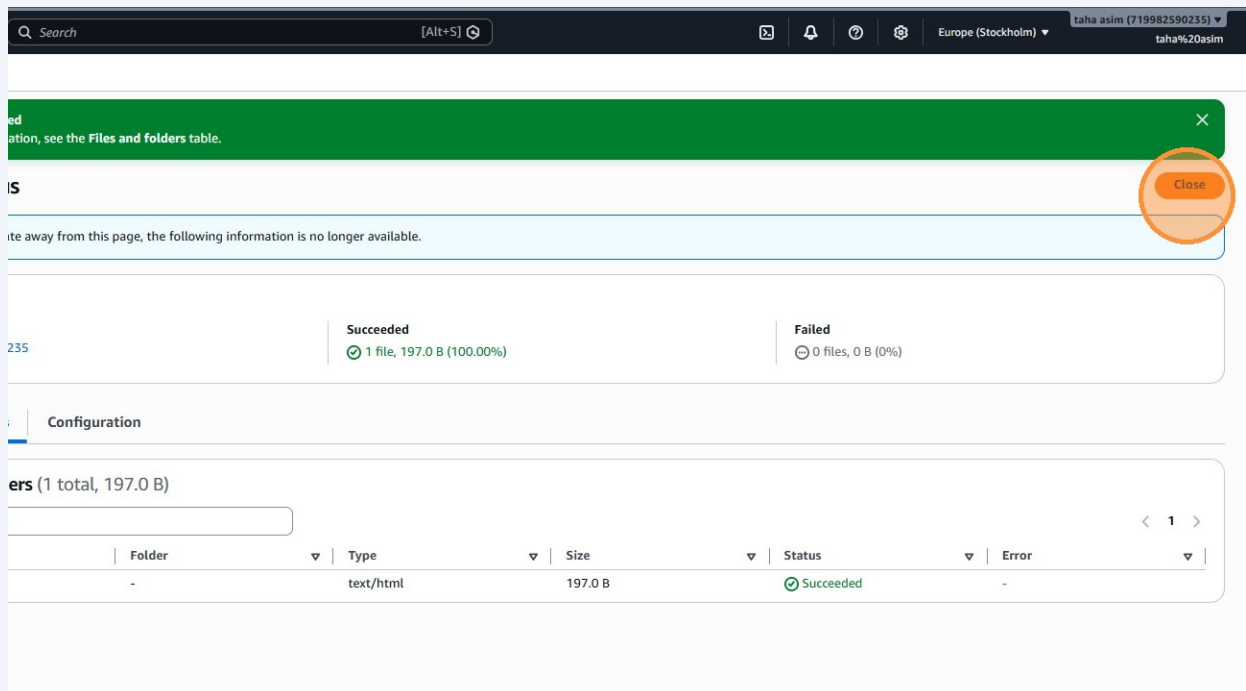

Search [Alt+S] Europe (Stockholm) taha asim (719982590235) taha%20asim

ed
ation, see the Files and folders table.

Close

IS

ite away from this page, the following information is no longer available.

235

Succeeded
1 file, 197.0 B (100.00%)


Failed
0 files, 0 B (0%)

Configuration

ers (1 total, 197.0 B)

Folder	Type	Size	Status	Error
-	text/html	197.0 B	Succeeded	-

35 Click "index.html"

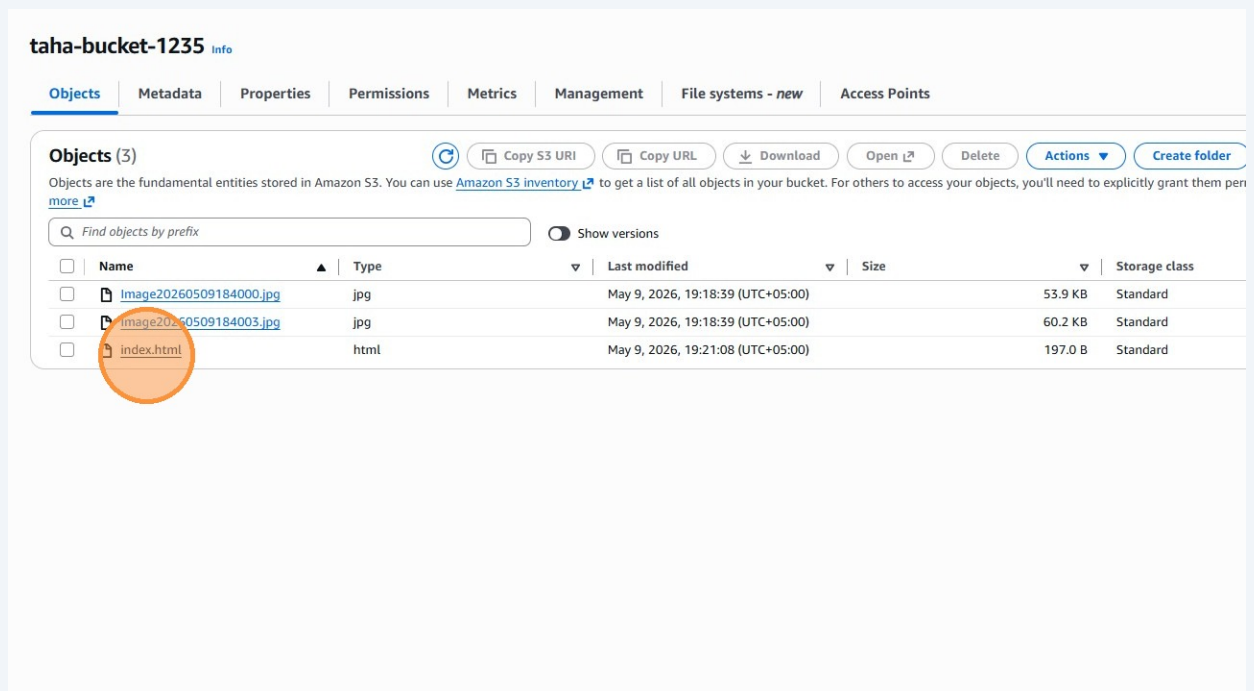

taha-bucket-1235 Info

Objects Metadata Properties Permissions Metrics Management File systems - new Access Points

Objects (3)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permission [more](#).

Find objects by prefix Show versions

Name	Type	Last modified	Size	Storage class
image20260509184000.jpg	jpg	May 9, 2026, 19:18:39 (UTC+05:00)	53.9 KB	Standard
image20260509184003.jpg	jpg	May 9, 2026, 19:18:39 (UTC+05:00)	60.2 KB	Standard
index.html	html	May 9, 2026, 19:21:08 (UTC+05:00)	197.0 B	Standard

36 Click this button.

The screenshot shows the AWS S3 console interface. At the top, there are buttons for 'Copy S3 URI', 'Download', 'Open', and 'Object actions'. Below these, the 'Info' tab is selected, showing details for the object 'index.html'. The 'Object URL' field is highlighted with an orange circle. The 'Object URL' field contains the URL 'https://taha-bucket-1235.s3.eu-north-1.amazonaws.com/index.html'. Other fields shown include 'S3 URI', 'Amazon Resource Name (ARN)', and 'Entity tag (Etag)'.

Overview

id61cd84583936befff8f268be37424df209d9176d6ba4ceb60f8db0

n
ockholm) eu-north-1

ied
6, 19:21:08 (UTC+05:00)

tml

Management overview
ng bucket properties and object management configurations impact the behavior of this object.

Properties

Versioning
d, multiple variants of an object can be stored in the bucket to easily recover from unintended user actions and failures.

Management configurations

Replication status
When a replication rule is applied to an object the replication status indicates the progress of the operation.
-

[View replication rules](#)

37 In a new tab, navigate to <https://taha-bucket-1235.s3.eu-north-1.amazonaws.com/index.html>

38

Click "I Really love coffee"

I Really love coffee



Hello world!

