

UGC NET • Paper 1 & Paper 2 (Computer Science, Code 87)

UGC NET Computer Science

Complete Study Material

- All 10 units of Paper 1 and all 10 units of Paper 2
- Simple-language notes with 100+ diagrams
- Worked numericals and step-by-step traces
- Previous-year-pattern questions with answers for every unit
- Exam-day formula sheet and a 120-day study plan

Target: 250+ / 300 ($\approx$ 126 of 150 questions correct)

Contents

Strategy — Exam Pattern & the 250+ Strategy

Paper 1

Teaching & Research Aptitude

Paper 1 · Unit 1 — Teaching Aptitude

Paper 1 · Unit 2 — Research Aptitude

Paper 1 · Unit 3 — Comprehension

Paper 1 · Unit 4 — Communication

Paper 1 · Unit 5 — Mathematical Reasoning & Aptitude

Paper 1 · Unit 6 — Logical Reasoning

Paper 1 · Unit 7 — Data Interpretation

Paper 1 · Unit 8 — Information & Communication Technology (ICT)

Paper 1 · Unit 9 — People, Development & Environment

Paper 1 · Unit 10 — Higher Education System

Paper 2

Computer Science & Applications

Paper 2 · Unit 1 — Discrete Structures & Optimization

Paper 2 · Unit 2 — Computer System Architecture

Paper 2 · Unit 3 — Programming Languages & Computer Graphics

Paper 2 · Unit 4 — Database Management Systems

Paper 2 · Unit 5 — System Software & Operating Systems

Paper 2 · Unit 6 — Software Engineering

Paper 2 · Unit 7 — Data Structures & Algorithms

Paper 2 · Unit 8 — Theory of Computation & Compilers

Paper 2 · Unit 9 — Data Communication & Computer Networks

Paper 2 · Unit 10 — Artificial Intelligence

Revision

Revision — Exam-Day Formula & Facts Sheet (UGC NET CS)

Revision — 120-Day Study Plan for 250+ (Paper 1 + Paper 2)

Exam Pattern & the 250+ Strategy


In this unit

1. Exam Pattern at a Glance
2. What 250+ Really Means

- 1 5. About the PYQs
- 1 6. Golden Rules for 250+

- 2
- 2

1. Exam Pattern at a Glance

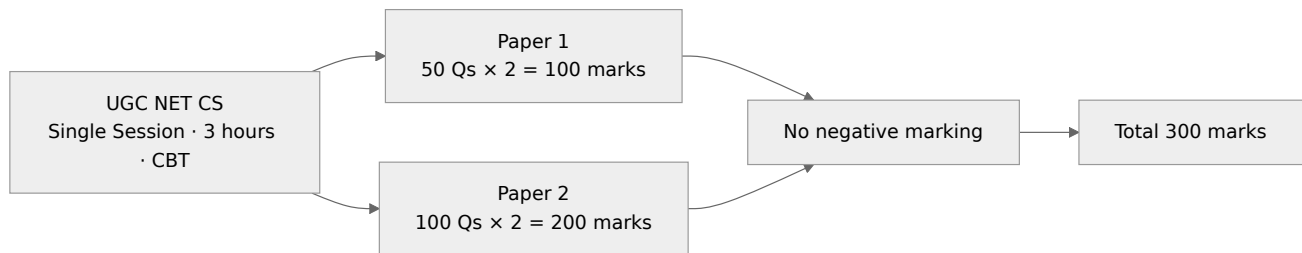


Item	Paper 1	Paper 2
Questions	50 (all compulsory)	100 (all compulsory)
Marks	100	200
Negative marking	None	None
Nature	Teaching/Research aptitude, reasoning	Core CS (10 units)

No negative marking → never leave a question blank.

2. What 250+ Really Means

$250 / 300 = 125$ correct out of 150 ($\approx 83\%$ accuracy).

Target split for 250+ (marks)

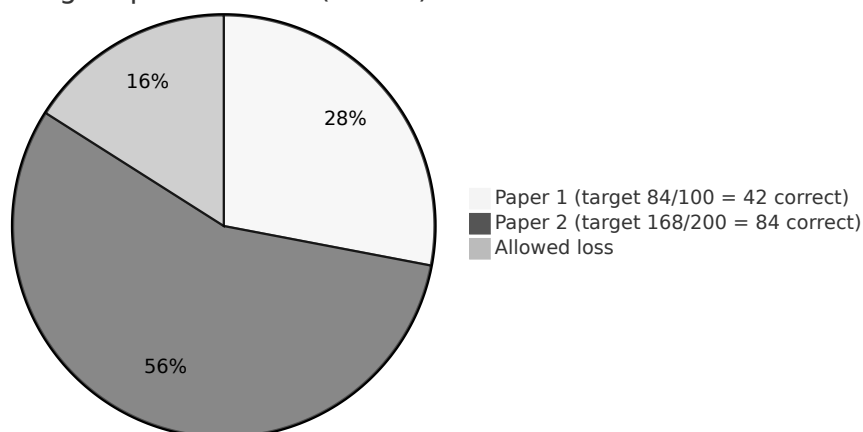

Paper	Questions	Target correct	Marks	Allowed mistakes
Paper 1	50	42+	84+	8
Paper 2	100	84+	168+	16
Total	150	126	252	24

Where marks come from (approx. Paper 2 weightage — ~10 Qs per unit)

Unit	Expected Qs	Difficulty	Priority for 250+
Discrete Structures & Optimization	10–12	Medium	★★★
Computer System Architecture	8–10	Medium	★★★
Programming Languages & Graphics	8–10	Easy-Med	★★
DBMS	10–12	Easy-Med	★★★★ (scoring)
System Software & OS	10–12	Medium	★★★★ (scoring)
Software Engineering	8–10	Easy	★★★★ (scoring, theory)
Data Structures & Algorithms	10–12	Medium	★★★
TOC & Compilers	10–12	Hard	★★★★ (differentiator)
Networks	10–12	Medium	★★★
Artificial Intelligence	8–10	Medium	★★

Paper 1: roughly 5 questions per unit; **Data Interpretation, Reasoning, Comprehension** are “sure marks” (≈ 15 Qs) — aim for 100% there.

5. About the PYQs

The questions under “**Previous Year Questions (PYQ pattern)**” are reconstructed from the recurring question types and concepts asked in NTA UGC NET (2012–2025) and its predecessor CBSE NET papers. Numbers and wording may differ from the original papers, and year tags are deliberately left out where they could not be verified. Always pair these notes with the **official NTA question papers & answer keys** (ugcnet.nta.ac.in) for the last 5–6 cycles — solve them fully timed at least twice.

6. Golden Rules for 250+

1. **Paper 2 decides your score** — 2/3 of total marks. Spend ~70% of your time on it.
2. **Theory units are free marks** (SE, DBMS, OS, Networks, AI): learn definitions exactly.
3. **Numerical units are differentiators** (Discrete, COA, TOC, Algorithms): practise daily.
4. **PYQs repeat** — concepts recur cycle after cycle. Solve every PYQ in these files twice.
5. **Mocks**: at least 25 full-length mocks in the last 6 weeks; analyse every wrong answer.
6. **Attempt all 150** — no negative marking.

Paper 1

Teaching & Research Aptitude

Teaching Aptitude

In this unit

1. What is Teaching?	4	6. Evaluation Systems	8
2. Learner's Characteristics	5	7. Deeper Dive — Learning Theories, Micro-teaching & Teaching Models	8
3. Factors Affecting Teaching	6	Previous Year Questions (PYQ pattern)	10
4. Methods of Teaching	6		
5. Teaching Support System	7		


Expected questions: ~5 (10 marks) · Target: 5/5

Syllabus checklist

- ☐ Teaching: concept, objectives, levels (memory, understanding, reflective), characteristics & basic requirements
- ☐ Learner's characteristics (adolescent & adult; academic, social, emotional, cognitive), individual differences
- ☐ Factors affecting teaching (teacher, learner, support material, instructional facilities, environment, institution)
- ☐ Methods of teaching: teacher-centred vs learner-centred; offline vs online (SWAYAM, SWAYAMPRAKHA, MOOCs)
- ☐ Teaching support system: traditional, modern, ICT-based
- ☐ Evaluation systems: elements & types; evaluation in CBCS; computer-based testing; innovations


1. What is Teaching?

Teaching is a **purposeful, interactive process** that brings a desirable change in the learner's behaviour (knowledge, skills, attitudes).

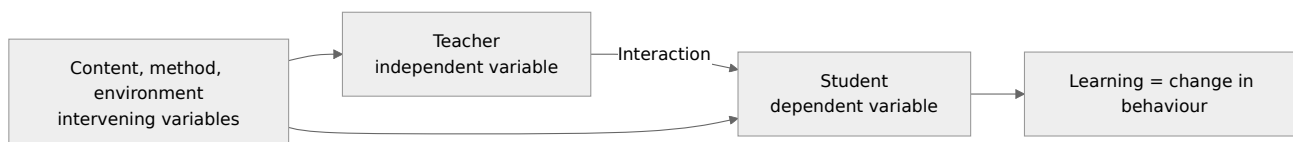

Variable type	What it is	Example
Independent	Teacher (plans, organises, leads)	Teacher's planning
Dependent	Student (acts as per teacher)	Learner's performance
Intervening	Content, method, A/V aids, environment	Smart board

Phases of Teaching (Philip W. Jackson)



- **Pre-active:** fixing goals, choosing content, deciding method.
- **Inter-active:** perception of class size, diagnosis, action (questioning, reinforcement).
- **Post-active:** test design, measuring changes, changing strategies.

Levels of Teaching (most asked!)

Level 3 (highest)	REFLECTIVE level – Hunt (1971) "thoughtful" – critical, creative thinking	Student-centred, problem solving, highest insight
Level 2	UNDERSTANDING level – Morrison (1931) Generalisation, principles	Memory + insight; "memory with understanding"; teacher-centred
Level 1 (lowest)	MEMORY level – Herbart (Herbartian steps) Recall, recognition	Rote learning, thoughtless, teacher-dominated

Level	Proponent	Teacher role	Student role	Evaluation
Memory	Herbart	Dominant	Passive	Oral/written recall tests
Understand- ing	Morrison	Dominant	Semi-active	Objective + essay
Reflective	Hunt	Democratic/ secondary	Active	Essay, problem-solving

Herbartian 5 steps: **Preparation** → **Presentation** → **Comparison/Association** → **Generalisation** → **Application**.
Morrison's steps: **Exploration** → **Presentation** → **Assimilation** → **Organisation** → **Recitation**.

Bloom's Taxonomy (Cognitive domain, revised 2001 by Anderson & Krathwohl)

▲	Creating	(design, construct, produce)
▲▲	Evaluating	(judge, critique, justify)
▲▲▲	Analysing	(compare, differentiate)
▲▲▲▲	Applying	(use, execute, solve)
▲▲▲▲▲	Understanding	(explain, classify)
▲▲▲▲▲▲	Remembering	(recall, list, define)


Original (1956): Knowledge → Comprehension → Application → Analysis → **Synthesis** → **Evaluation**. Revised: Evaluation comes **before** Creating (Synthesis renamed Creating; nouns became verbs).

Three domains: **Cognitive** (Bloom), **Affective** (Krathwohl: Receiving → Responding → Valuing → Organisation → Characterisation), **Psychomotor** (Simpson / Dave: Imitation → Manipulation → Precision → Articulation → Naturalisation).

Maxims of Teaching

- Known → Unknown · Simple → Complex · Concrete → Abstract · Particular → General · Whole → Part
- Analysis → Synthesis · Empirical → Rational · Psychological → Logical · Induction → Deduction

2. Learner's Characteristics

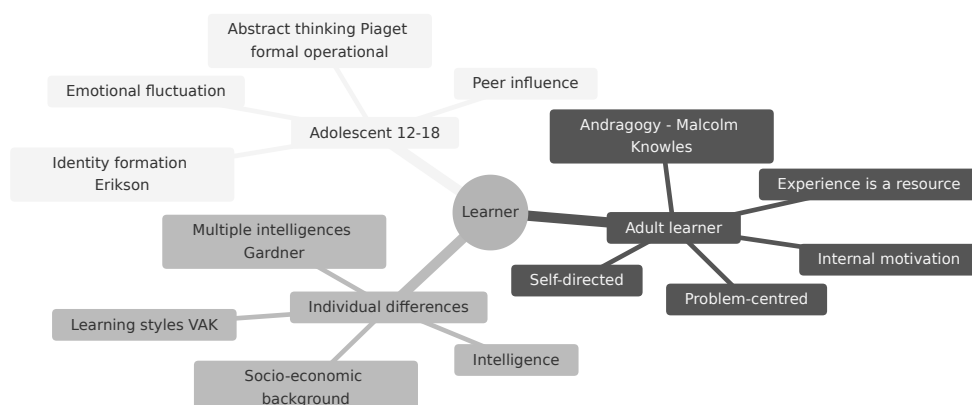


- **Pedagogy** = teaching children; **Andragogy** = teaching adults (Knowles); **Heutagogy** = self-determined learning.
- **Piaget stages**: Sensorimotor (0–2) → Pre-operational (2–7) → Concrete operational (7–11) → Formal operational (11+).
- **Vygotsky**: Zone of Proximal Development (ZPD), **scaffolding**, social constructivism.
- **Gardner** multiple intelligences: linguistic, logical-mathematical, spatial, musical, bodily-kinesthetic, interpersonal, intrapersonal, naturalistic (8).
- **VAK** learning styles: Visual, Auditory, Kinesthetic.

3. Factors Affecting Teaching

Factor	Examples
Teacher	Subject knowledge, communication, personality, motivation
Learner	Aptitude, interest, motivation, readiness, prior knowledge
Support material	Textbooks, A/V aids, e-content
Instructional facilities	Labs, library, smart classroom
Learning environment	Class size, seating, light/ventilation, classroom climate
Institution	Policies, administration, culture

4. Methods of Teaching

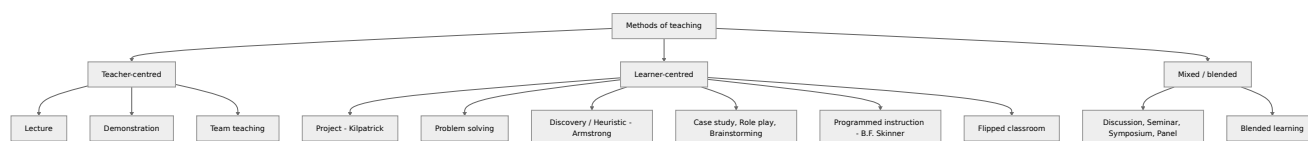

Method	Key idea	Proponent
Project method	Learning by doing, purposeful activity	W.H. Kilpatrick (based on Dewey)
Heuristic	Student as discoverer	H.E. Armstrong
Programmed instruction	Small steps, immediate feedback, linear	B.F. Skinner
Branching programming	Branches based on response	Norman Crowder
Dalton plan	Contract-based individual work	Helen Parkhurst
Montessori	Child-centred, didactic apparatus	Maria Montessori
Kindergarten	"Garden of children"	Froebel
Basic education (Nai Talim)	Craft-centred	Gandhi
Flipped classroom	Content at home, practice in class	Bergmann & Sams


Group discussion formats: Seminar (paper + discussion), Symposium (several speakers on aspects of one topic), Panel discussion (informal conversation among experts before audience), Workshop (hands-on).

Online Teaching — Government Initiatives (asked every cycle)


Initiative	What it is
SWAYAM	Study Webs of Active-Learning for Young Aspiring Minds — MOOC platform (2017), 4 quadrants
SWAYAM 4 quadrants	e-Tutorial (video), e-Content (text), Self-assessment (quiz), Discussion forum
SWAYAM PRABHA	DTH educational channels (24×7), launched with 32, now 40+ channels, via GSAT-15
NPTEL	IITs + IISc engineering courses
NDL	National Digital Library (IIT Kharagpur)
e-PG Pathshala	PG e-content by UGC/INFLIBNET
e-Yantra	Robotics (IIT Bombay)
Shodhganga	Repository of Indian theses (INFLIBNET)
Shodhgangotri	Repository of synopses
DIKSHA	School teachers' platform (One Nation One Digital Platform)
Virtual Labs	MHRD remote labs
Spoken Tutorial	IIT Bombay software training
NMEICT	National Mission on Education through ICT
National coordinators of SWAYAM	AICTE, NPTEL, UGC, CEC, NCERT, NIOS, IGNOU, IIMB, NITTTR

MOOC: Massive Open Online Course. Term coined by Dave Cormier (2008). cMOOC (connectivist) vs xMOOC (extended, structured).

5. Teaching Support System

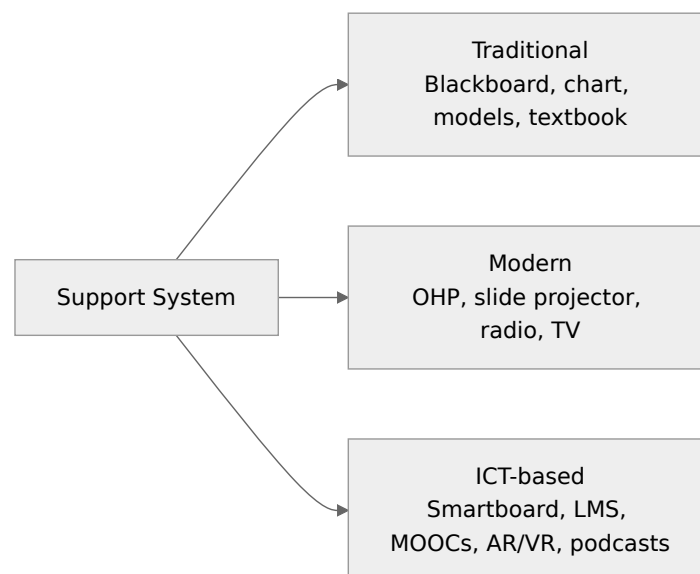


Edgar Dale's Cone of Experience (most concrete at base):

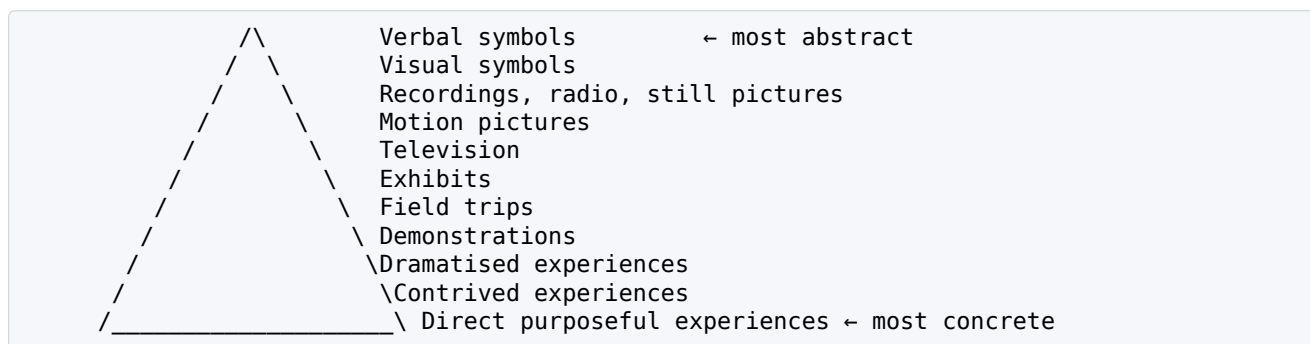

People remember ~10% of what they read, ~90% of what they say and do.

Audio aids: radio, tape recorder, podcast. Visual: chart, map, blackboard. **Audio-visual:** TV, film, video. Projected aids: OHP, LCD; Non-projected: blackboard, charts, models.

6. Evaluation Systems

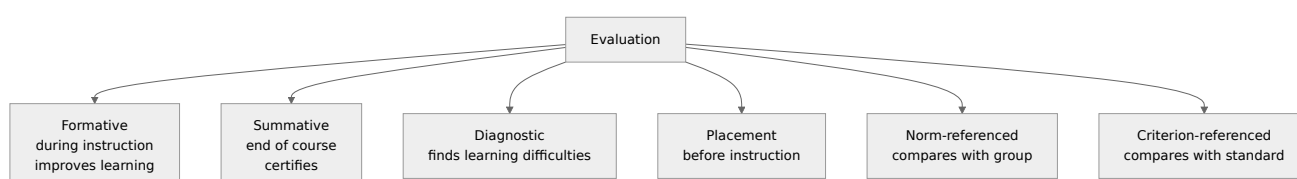

Term	Meaning
Measurement	Quantitative description (numbers)
Assessment	Collecting information about learning
Evaluation	Measurement + value judgement (qualitative + quantitative)
CCE	Continuous & Comprehensive Evaluation — scholastic + co-scholastic
Reliability	Consistency of scores
Validity	Measures what it intends to measure (most important)
Objectivity	Free from examiner bias
Usability/Practicability	Easy to administer


Evaluation in CBCS: credit = 1 hr lecture/week per semester (or 2 hrs practical). Letter grades: O (10), A+ (9), A (8), B+ (7), B (6), C (5), P (4), F (0), Ab.

- $SGPA = \frac{\sum(C_i \times G_i)}{\sum C_i}$ (semester) • $CGPA = \frac{\sum(C_i \times S_i)}{\sum C_i}$ (across semesters)
- Percentage $\approx CGPA \times 9.5$ (UGC rule-of-thumb).
- CBCS course types: Core, Elective (Discipline-specific, Generic), Ability Enhancement (AECC, SEC).

Computer-based testing & innovations: CAT (Computer Adaptive Testing — difficulty adapts to answers), open-book exams, online proctoring, e-portfolios, rubrics, peer assessment, grading instead of marks, question banks.

7. Deeper Dive — Learning Theories, Micro-teaching & Teaching Models

7.1 Learning Theories (asked in almost every cycle)

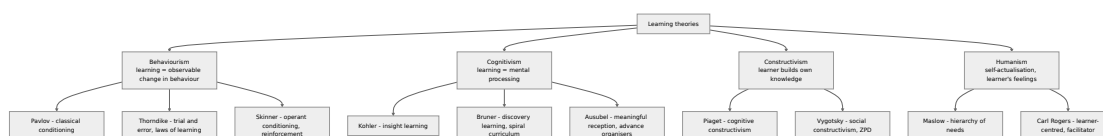


Theorist	Key idea	Classroom implication
Pavlov	Classical conditioning; neutral stimulus + unconditioned stimulus → conditioned response (dog & bell)	Pleasant classroom associations reduce fear of a subject
Thorndike	Connectionism; laws of readiness, exercise, effect	Practice, rewards, readiness before teaching
Skinner	Operant conditioning; positive/negative reinforcement, punishment, shaping, schedules of reinforcement	Programmed instruction, immediate feedback
Kohler	Insight learning (chimpanzee Sultan) — sudden “aha” grasp of relationships	Present whole problems
Bruner	Discovery learning; modes: enactive → iconic → symbolic ; spiral curriculum	Revisit topics with increasing depth
Ausubel	Meaningful verbal learning; advance organisers	Start a lesson with an overview linking to prior knowledge
Bandura	Social learning / observational learning (Bobo doll); modelling; self-efficacy	Teacher as role model
Gagné	Conditions of learning; 8 types of learning; 9 events of instruction	Structured lesson design
Maslow	Physiological → safety → love/belonging → esteem → self-actualisation	Basic needs before academic growth

- **Negative reinforcement** = removing an unpleasant stimulus to *increase* behaviour (not punishment).
- Gagné's 9 events: gain attention → inform objectives → recall prior learning → present content → provide guidance → elicit performance → give feedback → assess performance → enhance retention and transfer.

7.2 Micro-teaching

Developed at **Stanford University (1961–63)** by **Dwight Allen** and colleagues. A scaled-down teaching encounter: one skill, 5–10 students, 5–10 minutes.

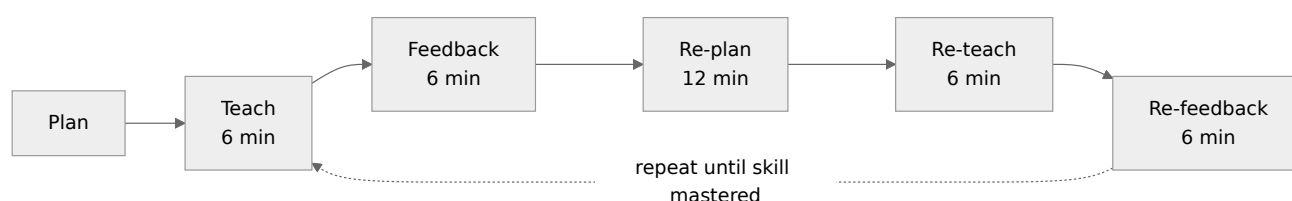


- Indian model (NCERT/Passi): total cycle **36 minutes**.
- Skills: introducing a lesson, questioning (fluency, probing), explaining, illustrating with examples, **reinforcement**, stimulus variation, blackboard writing, closure, using A/V aids.
- **Simulated teaching** = role play of teaching in a training situation; **team teaching** = two or more teachers plan and teach together.

7.3 Models of Teaching

Model	Proponent	Key steps / idea
Basic Teaching Model	Robert Glaser (1962)	Instructional objectives → Entering behaviour → Instructional procedures → Performance assessment (with feedback loop)
Concept Attainment	Jerome Bruner	Examples & non-examples → identify concept attributes
Inductive Thinking	Hilda Taba	Concept formation → interpretation of data → application
Advance Organiser	David Ausubel	Organiser presented before content
Inquiry Training	Richard Suchman	Puzzling event → students ask yes/no questions → form theories
Jurisprudential	Oliver & Shaver	Debating public issues
Synectics	William Gordon	Creativity through metaphors & analogies

Families of teaching models (**Joyce & Weil**): Information processing, Social interaction, Personal, Behavioural systems.

Glaser's Basic Teaching Model

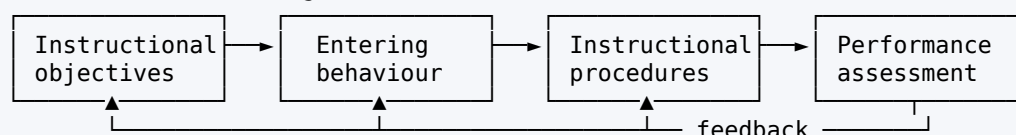

7.4 Questioning & Classroom Management

- **Convergent** questions (one correct answer, lower order) vs **divergent** (many answers, creativity).
- **Wait time** (Mary Budd Rowe): waiting 3–5 seconds after a question improves answer quality.
- **Kounin**: "withitness" (teacher aware of everything), overlapping, momentum, smoothness.
- Teacher leadership styles (Lewin): **autocratic**, **democratic**, **laissez-faire** — democratic is best for learning climate.
- **Hidden curriculum**: values and norms learnt implicitly from school culture.

Previous Year Questions (PYQ pattern)

Levels of teaching

1. The "reflective level" of teaching is associated with: (a) Herbart (b) Morrison (c) Hunt (d) Skinner — **Ans: (c)**
2. Which level of teaching is the most "thoughtless"? (a) Memory (b) Understanding (c) Reflective (d) Autonomous — **Ans: (a)**
3. Arrange the levels from lowest to highest: **Memory → Understanding → Reflective.**

Bloom's taxonomy

4. In revised Bloom's taxonomy the highest cognitive level is: (a) Evaluating (b) Creating (c) Analysing (d) Synthesis — **Ans: (b)**
5. "Characterisation by a value" belongs to which domain? — **Ans: Affective (Krathwohl)**
6. Match: Remembering–recall; Applying–use; Analysing–differentiate; Evaluating–judge. (Standard match question.)

Learner characteristics

7. Andragogy refers to: (a) teaching children (b) teaching adults (c) self-learning (d) group learning — **Ans: (b)**
8. ZPD is a concept given by: **Vygotsky**
9. Which is NOT a characteristic of adult learners? (a) self-directed (b) experience-based (c) externally driven (d) problem-centred — **Ans: (c)**

Methods

10. Programmed instruction is based on the theory of: (a) Classical conditioning (b) Operant conditioning (c) Insight (d) Constructivism — **Ans: (b) Skinner**
11. "Learning by doing" is the core of: **Project method (Kilpatrick)**
12. Which is a learner-centred method? (a) Lecture (b) Demonstration (c) Problem solving (d) Team teaching — **Ans: (c)**
13. In a flipped classroom, students first encounter new content: **at home (videos/readings)**

Online initiatives

14. SWAYAM PRABHA provides: (a) MOOCs (b) 24x7 DTH educational channels (c) Digital library (d) Thesis repository — **Ans: (b)**
15. How many quadrants does a SWAYAM course have? — **Ans: 4**
16. Shodhganga is maintained by: **INFLIBNET (Gandhinagar)**
17. The national coordinator for engineering courses on SWAYAM: **NPTEL**

Evaluation

18. Evaluation that takes place during the teaching-learning process is: **Formative**

19. A test that measures what it intends to measure is: **Valid**
20. Consistency of test scores refers to: **Reliability**
21. Norm-referenced test compares a student with: **performance of peer group**
22. Diagnostic evaluation is meant to: **identify learning difficulties**
23. In CBCS, the grade point for "O" (Outstanding) is: **10**

Teaching aids

24. In Edgar Dale's Cone, the most concrete experience is: **Direct purposeful experience**
25. Which is a non-projected aid? (a) LCD (b) OHP (c) Blackboard (d) Slide — **Ans: (c)**

Statement-based (common format)

26. Statement I: Effective teaching is learner-centred. Statement II: The teacher's role is only to transmit content. — **I true, II false**

More practice questions

27. Learning by insight was demonstrated by: **Wolfgang Kohler**
28. "Law of effect" is associated with: **E.L. Thorndike**
29. Advance organisers were proposed by: **David Ausubel**
30. Bruner's three modes of representation in order: **Enactive, Iconic, Symbolic**
31. Removing an unpleasant stimulus to increase a desired behaviour is: **negative reinforcement**
32. Micro-teaching was developed at: **Stanford University**
33. Duration of one micro-teaching cycle in the Indian model: **36 minutes**
34. The basic teaching model was given by: **Robert Glaser**
35. The first component of Glaser's model is: **instructional objectives**
36. Concept attainment model is associated with: **Jerome Bruner**
37. A question with several acceptable answers is: **divergent**
38. Observational (social) learning theory was given by: **Albert Bandura**
39. In Maslow's hierarchy, the highest need is: **self-actualisation**
40. Which leadership style creates the most positive classroom climate? **Democratic**
41. Statement I: Formative evaluation is diagnostic in nature. Statement II: Summative evaluation is used for certification. — **Both true**
42. Match: Kilpatrick–Project method; Skinner–Programmed learning; Armstrong–Heuristic; Parkhurst–Dalton plan.
43. Which is NOT a characteristic of effective teaching? (a) learner involvement (b) feedback (c) rote memorisation (d) use of examples — **Ans: (c)**

Quick Revision Box

- Memory–Herbart · Understanding–Morrison · Reflective–Hunt
- Formative = during; Summative = end; Diagnostic = difficulties; Placement = before
- Validity > Reliability (valid test is always reliable, not vice versa)
- SWAYAM (2017, MOOCs, 4 quadrants) · SWAYAM PRABHA (DTH channels, 32 at launch → 40+) · Shodhganga (theses, INFLIBNET)

Research Aptitude

In this unit

1. Meaning & Characteristics	12	7. ICT in Research	14
2. Types of Research	12	8. Research Ethics	15
3. Variables & Hypothesis	13	9. Deeper Dive — Research Designs, Reliability, Validity & Statistics	15
4. Steps of Research	13	Previous Year Questions (PYQ pattern)	16
5. Sampling	14		
6. Thesis & Article Writing	14		

Expected questions: ~5 (10 marks) · Target: 5/5

Syllabus checklist

- ☐ Research: meaning, types, characteristics; positivism & post-positivistic approach
- ☐ Methods: experimental, descriptive, historical, qualitative, quantitative
- ☐ Steps of research
- ☐ Thesis & article writing: format and styles of referencing
- ☐ Application of ICT in research
- ☐ Research ethics

1. Meaning & Characteristics

Research = **systematic, objective, controlled, empirical, critical** investigation to discover new facts or verify old ones. (*Re + search* = search again.) Characteristics: systematic, logical, empirical, replicable, reductive, controlled, generalisable.

2. Types of Research




Type	Key feature	Remember
Fundamental	Adds to knowledge/theory	Not immediately applicable
Applied	Solves immediate practical problem	Product-oriented
Action	Done by practitioner (teacher) to improve own practice; cyclic	Coined by Kurt Lewin; in education by Stephen Corey
Experimental	Manipulation of IV + control	Most scientific, cause-effect
Ex-post facto	IV already occurred, no manipulation	"After the fact"
Historical	Past events; primary & secondary sources	External criticism (authenticity) & internal criticism (credibility)
Descriptive	"What is" — survey, correlational	No manipulation
Ethnography	Culture studied by immersion	Participant observation
Grounded theory	Theory emerges from data	Glaser & Strauss
Phenomenology	Lived experiences	Husserl

Positivism vs Post-positivism

Positivism (Auguste Comte)	Post-positivism / Interpretivism
Reality is objective, single	Reality is multiple, constructed
Quantitative, deductive	Qualitative (or critical realism)
Researcher detached	Researcher involved
Hypothesis testing, generalisation	Understanding meaning (<i>Verstehen</i> – Weber)


Paradigm (Thomas Kuhn) = ontology (nature of reality) + epistemology (nature of knowledge) + methodology.

3. Variables & Hypothesis

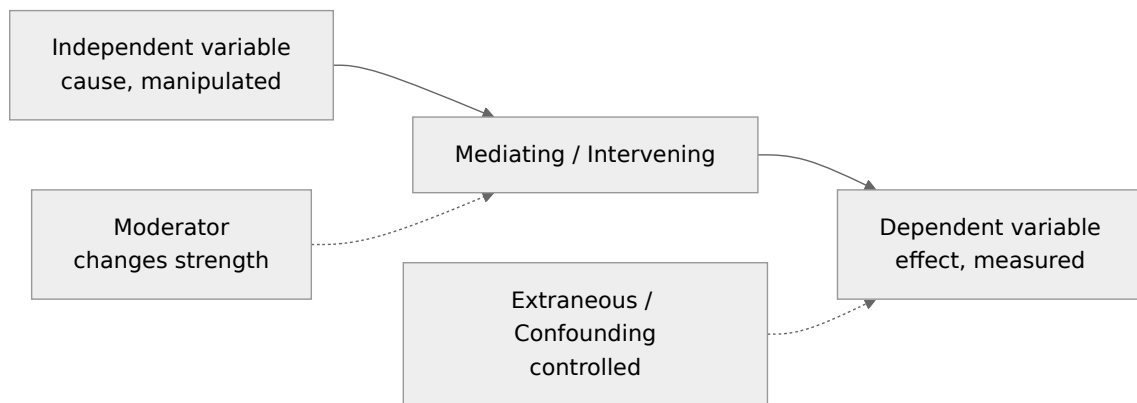


- **Hypothesis** = tentative, testable statement about relationship between variables.
- **Null hypothesis (H_0)**: no relationship/difference. **Alternative (H_1)**: there is.
- **Type I error (α)**: rejecting a TRUE null. **Type II error (β)**: accepting a FALSE null. Power = $1 - \beta$.
- Directional (one-tailed) vs non-directional (two-tailed).

4. Steps of Research



5. Sampling

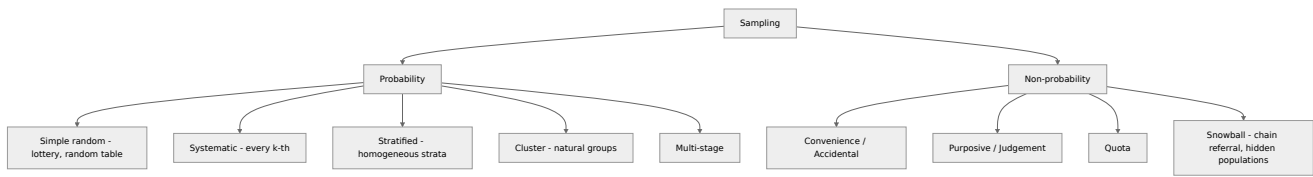

Tools of data collection: questionnaire (closed/open), interview (structured, unstructured), observation (participant, non-participant), schedule (filled by enumerator), rating scales (**Likert** – 5-point agree/disagree; **Thurstone** – equal-appearing intervals; **Guttman** – cumulative; **Semantic differential** – Osgood; bipolar adjectives).

Scales of measurement (Stevens): Nominal (labels) → Ordinal (rank) → Interval (no true zero, e.g. °C) → Ratio (true zero, e.g. weight).

Parametric tests (normal data): t-test, z-test, ANOVA (F), Pearson r. **Non-parametric:** Chi-square, Mann-Whitney U, Wilcoxon, Kruskal-Wallis, Spearman rho, sign test.

6. Thesis & Article Writing

Thesis format: Preliminary pages (title, declaration, certificate, acknowledgement, contents, list of tables) → Main body (Introduction, Review of Literature, Methodology, Results, Discussion, Conclusion) → References → Appendices.

IMRAD structure of research article: Introduction, Methods, Results, And Discussion.

Style	Used in	Example in-text
APA (American Psychological Assoc.)	Social sciences, education	(Sharma, 2020) — author-date
MLA (Modern Language Assoc.)	Humanities, literature	(Sharma 45) — author-page
Chicago	History; notes-bibliography or author-date	Footnotes
Harvard	General author-date	(Sharma 2020)
IEEE	Engineering, CS	[1] numbered
Vancouver	Medicine	numbered

- *Ibid.* = same source as previous note; *Op. cit.* = work cited earlier (different page); *Loc. cit.* = same place cited earlier; *et al.* = and others.
- **Bibliography** = all sources consulted; **References** = only those cited.
- **Abstract:** ~150–300 words, written last, placed first. **Annotated bibliography** includes short summaries.

7. ICT in Research

Need	Tool
Literature search	Google Scholar, Scopus, Web of Science, PubMed, Shodhganga, INFLIBNET N-LIST, e-ShodhSindhu
Reference management	Mendeley, Zotero, EndNote
Statistical analysis	SPSS, R, SAS, STATA, Excel
Qualitative analysis	NVivo, ATLAS.ti, MAXQDA
Plagiarism detection	Shodhshuddhi (DrillBit/Ouriginal-URKUND) , Turnitin, iThenticate
Writing	LaTeX, MS Word
Unique researcher ID	ORCID, Scopus Author ID, ResearcherID
Metrics	Impact Factor (Clarivate JCR), h-index (Hirsch), i10-index (Google Scholar), CiteScore (Scopus)

h-index: a researcher has index h if h papers have $\geq h$ citations each. **Impact factor (2024)** = citations in 2024 to items published in 2022–23 $\div$ citable items published in 2022–23.

8. Research Ethics

- **Plagiarism:** UGC Regulations 2018 (Promotion of Academic Integrity and Prevention of Plagiarism):

Level	Similarity	Penalty (for students)
Level 0	up to 10%	Minor, no penalty
Level 1	10–40%	Resubmit within 6 months
Level 2	40–60%	Debarred from resubmission for 1 year
Level 3	> 60%	Registration cancelled

- Other ethics: informed consent, confidentiality, anonymity, no fabrication / falsification, honest authorship, avoid **predatory journals**; UGC-CARE list of quality journals (2019).
- **Salami slicing:** splitting one study into many papers. **Duplicate publication** is unethical.
- COPE: Committee on Publication Ethics.


9. Deeper Dive — Research Designs, Reliability, Validity & Statistics

9.1 Experimental Designs (Campbell & Stanley notation: R = random assignment, O = observation, X = treatment)

Design	Notation	Notes
One-shot case study (pre-experimental)	X O	No comparison; weakest
One-group pre-test post-test	O X O	No control group
Static group comparison	X O / — O	Non-random groups
Pre-test post-test control group (true)	R O X O / R O — O	Classic true experiment
Post-test only control group	R X O / R — O	Avoids testing effect
Solomon four-group	Combines both above (4 groups)	Controls pre-test sensitisation; strongest
Quasi-experimental: non-equivalent control group	O X O / O — O	Intact groups (e.g. two existing classes)
Time-series	O O O X O O O	Repeated observations
Factorial design	$2 \times 2, 2 \times 3 \dots$	Two or more IVs and their interaction

Threats to internal validity: history, maturation, testing, instrumentation, statistical regression, selection bias, experimental mortality (attrition). **External validity** = generalisability; threats: reactive effects (Hawthorne effect), interaction of selection and treatment.

9.2 Reliability & Validity

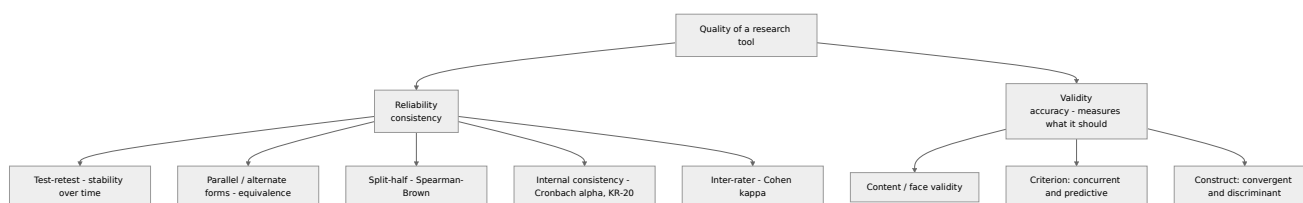


- Reliability is necessary but **not sufficient** for validity. A valid test must be reliable.
- **Spearman–Brown:** full-test reliability $r_{\text{full}} = 2r_{\text{half}} / (1 + r_{\text{half}})$.

- Cronbach's $\alpha \geq 0.7$ is usually acceptable.


Target analogy

Reliable, not valid




(tight cluster off-centre)

Valid & reliable



(cluster on centre)

Neither



(scattered)

9.3 Statistics for Researchers

Concept	Key point
Correlation r (Pearson)	$-1 \leq r \leq +1$; $r = 0 \rightarrow$ no linear relation; correlation $\neq$ causation
Spearman rank ρ	$\rho = 1 - 6\sum d^2 / (n(n^2 - 1))$ for ordinal data
Coefficient of determination	r^2 = proportion of variance explained
Regression	Predicts Y from X: $Y = a + bX$
Level of significance	$\alpha = 0.05$ or 0.01 (probability of Type I error)
Degrees of freedom	t-test (one sample) $n - 1$; chi-square $(r - 1)(c - 1)$
Normal curve	Mean = median = mode; 68.26% within $\pm 1\sigma$, 95.44% within $\pm 2\sigma$, 99.74% within $\pm 3\sigma$
Skewness	Positive: mean $>$ median $>$ mode; Negative: mean $<$ median $<$ mode
Kurtosis	Leptokurtic (peaked), Mesokurtic (normal), Platykurtic (flat)

Worked (Spearman ρ): $n = 5$, $\sum d^2 = 4 \rightarrow \rho = 1 - (6 \times 4) / (5 \times 24) = 1 - 0.2 = 0.8$.

9.4 Research Proposal (Synopsis) Structure

Title $\rightarrow$ Introduction & background $\rightarrow$ Review of literature & research gap $\rightarrow$ Statement of the problem $\rightarrow$ Objectives $\rightarrow$ Hypotheses $\rightarrow$ Methodology (design, population, sample, tools, analysis) $\rightarrow$ Delimitations $\rightarrow$ Significance $\rightarrow$ Chapterisation $\rightarrow$ Time-frame $\rightarrow$ References.

- **Delimitations** = boundaries set by the researcher; **Limitations** = constraints beyond the researcher's control.
- **Operational definition** = defining a variable in terms of how it is measured.

Previous Year Questions (PYQ pattern)

Types of research

1. A teacher conducts research to solve a problem of absenteeism in her class. It is: **Action research**
2. Research aimed at developing theory is: **Fundamental**
3. Study of the effect of an event that has already happened without manipulation: **Ex-post facto**
4. "Who coined action research?" — **Kurt Lewin** (in education popularised by Stephen Corey)
5. In historical research, testing authenticity of a source is: **External criticism**

Positivism

6. Positivism was proposed by: **Auguste Comte**
7. Which is associated with qualitative research? (a) generalisation (b) hypothesis testing (c) thick description (d) large samples — **Ans: (c)**

Hypothesis & errors

8. Rejecting a true null hypothesis is: **Type I error**
9. Hypothesis that states "no difference" is: **Null hypothesis**
10. The variable manipulated by the researcher: **Independent variable**

Sampling

11. Studying drug users via referral chains: **Snowball sampling**
12. Population divided into homogeneous subgroups then randomly sampled: **Stratified random**
13. Which is a non-probability method? (a) cluster (b) systematic (c) quota (d) stratified — **Ans: (c)**

Scales & tools

14. Temperature in °C is measured on which scale? **Interval**
15. A 5-point agree–disagree scale is: **Likert scale**
16. Chi-square test is: **Non-parametric**

Writing & referencing

17. "Ibid." is used when: **citing the same source as the immediately preceding citation**
18. APA style follows: **author–date system**
19. The abstract of a thesis is written: **at the end, placed at the beginning**
20. Correct sequence of research steps: **Problem → Literature → Hypothesis → Design → Data → Analysis → Report**

ICT & Ethics

21. UGC's plagiarism software made available to universities: **Shodhshuddhi (URKUND/Ouriginal, later Drill-Bit)**
22. As per UGC 2018 regulations, similarity up to 10% is: **Level 0 (no penalty)**
23. h-index was proposed by: **J.E. Hirsch (2005)**
24. Which identifier uniquely identifies a researcher? **ORCID**
25. Reference management software: **Mendeley / Zotero**

More practice questions

26. The design that controls the effect of pre-testing using four groups: **Solomon four-group design**
27. Using two intact classes without random assignment is a: **quasi-experimental design**
28. Improvement in performance because subjects know they are being observed: **Hawthorne effect**
29. Consistency of scores over time is measured by: **test-retest reliability**
30. Cronbach's alpha measures: **internal consistency**
31. Split-half reliability is corrected by: **Spearman–Brown formula**
32. A test predicting future job performance has: **predictive validity**
33. In a normal distribution, the percentage of cases within $\pm 1\sigma$: **68.26%**
34. When mean > median > mode, distribution is: **positively skewed**
35. Degrees of freedom for a 3×4 contingency table chi-square: **6**
36. Boundaries set by the researcher on the scope of study: **delimitations**
37. $r = -0.9$ indicates: **strong negative correlation**
38. Which is NOT a threat to internal validity? (a) history (b) maturation (c) generalisability (d) attrition — **Ans: (c)**
39. Defining "academic achievement" as "marks obtained in the annual exam" is an: **operational definition**

Quick Revision Box

- Action research → practitioner, local, immediate · Ex-post facto → no manipulation
- Type I = reject true H_0 (α) · Type II = accept false H_0 (β)
- NOIR = Nominal, Ordinal, Interval, Ratio
- Plagiarism levels: 0 (≤ 10), 1 (10–40), 2 (40–60), 3 (> 60)

Comprehension

In this unit


What Is Asked	18	Deeper Dive — Two Full Practice Passages (solve in 8	
Step-by-Step Strategy	18	minutes each)	19
Question Types & How to Crack Them	19	Previous Year Questions (PYQ pattern — typical stems	
Tone Words Cheat Sheet	19	seen every cycle)	21
Common Traps	19	Practice Routine for 5/5	21
Solved Mini-Example	19		

Expected questions: 5 (one passage) · Target: 5/5 — these are sure-shot marks

What Is Asked

A passage of ~400–600 words followed by **5 questions** on: central idea, title, author's tone, inference, vocabulary in context, factual detail, and "which statement is true/false".

Step-by-Step Strategy

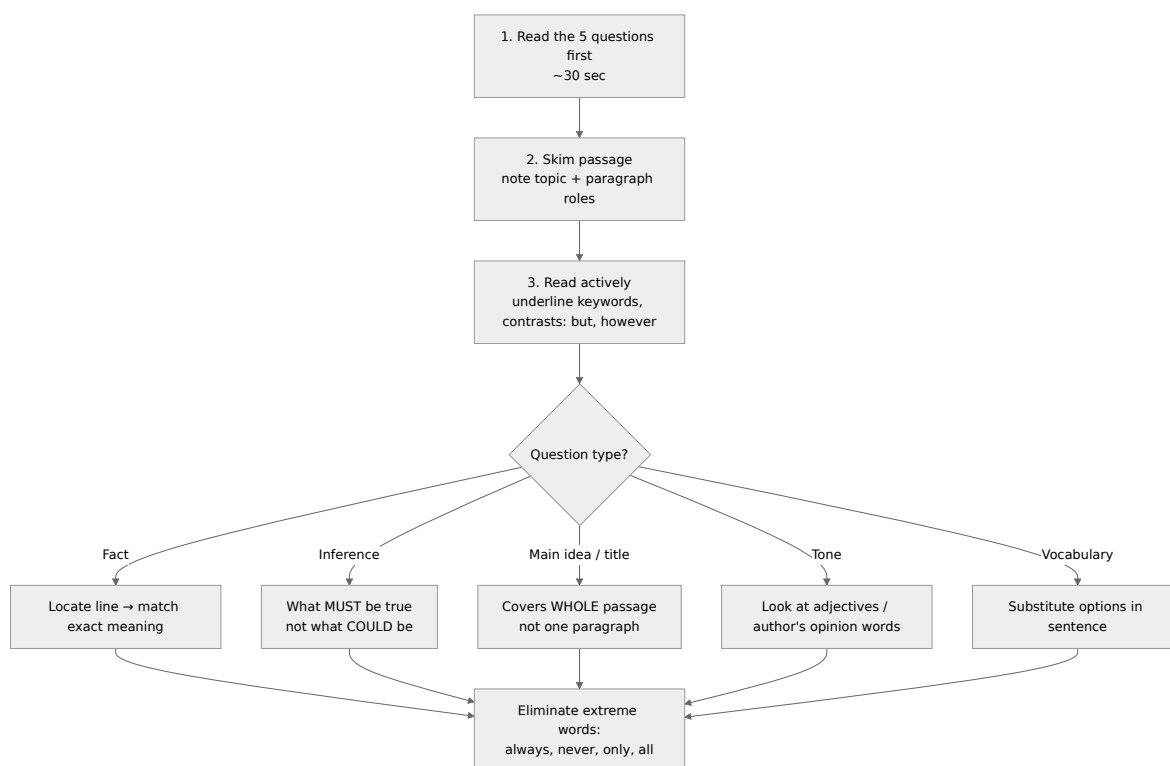

Question Types & How to Crack Them

Type	Signal words	Trick
Main idea	"central theme", "primarily concerned"	Answer must cover the whole passage; avoid too narrow/broad
Title	"suitable title"	Short, covers the main idea, often from first/last paragraph
Fact	"according to the passage"	Answer is <i>stated</i> ; paraphrase of a line
Inference	"it can be inferred", "implies"	Must logically follow; no outside knowledge
Tone/attitude	"author's tone"	Critical, analytical, sarcastic, optimistic, pessimistic, neutral, didactic
Vocabulary	"the word X means"	Meaning in <i>this context</i>
Assumption	"the author assumes"	Unstated premise the argument depends on
Not true / except	"which is NOT"	Verify each option in passage

Tone Words Cheat Sheet

Positive laudatory, optimistic, appreciative, eulogistic enthusiastic	Neutral objective, analytical, informative, descriptive didactic (instructive)	Negative critical, cynical, sarcastic, pessimistic, derisive, satirical
--	---	--

Common Traps

1. **Option true in real life but not in passage** → wrong.
2. **Partially correct** option (one half right) → wrong.
3. **Extreme/absolute words** (always, never, all) → usually wrong.
4. **Out-of-scope** generalisation → wrong.
5. Repeated exact words from the passage used in a twisted sense → check carefully.

Solved Mini-Example

Passage (excerpt): *"Digital technology has democratised access to knowledge. Yet access alone does not produce learning; without guidance, learners drown in information. Teachers therefore are not replaced by technology but repositioned — from transmitters of facts to curators and mentors."*

1. Main idea? → **Technology changes, rather than eliminates, the teacher's role.**
2. The author's tone? → **Analytical / balanced.**
3. "Curators" means here? → **Selectors and organisers of relevant content.**
4. Which can be inferred? → (a) technology is harmful (b) access ensures learning (c) guidance is necessary for learning from digital resources (d) teachers are obsolete → **(c)**
5. Which is NOT stated? → "Teachers will become obsolete" — contradicted.

Deeper Dive — Two Full Practice Passages (solve in 8 minutes each)

Passage 1

India's traditional knowledge systems were never confined to scriptures alone. Farmers who read the sky to predict monsoon onset, healers who classified hundreds of plants by their effects, and artisans who worked metals without modern furnaces all practised forms of empirical inquiry. Yet because this knowledge travelled orally and through apprenticeship, it was rarely recorded in the formats that modern institutions recognise. Colonial administrators, trained to value written evidence, frequently dismissed it as superstition.

The challenge today is not to romanticise this heritage but to examine it critically. Some practices survive rigorous testing; others do not. Treating every traditional claim as valid is as unscientific as rejecting all of them. What is needed is a dialogue in which communities are partners, not merely sources of data, and in which the benefits of any discovery return to those who preserved the knowledge.

1. The passage primarily argues that traditional knowledge should be: (a) accepted without question (b) rejected as superstition (c) critically examined in partnership with communities (d) recorded only in scriptures — **Ans: (c)**
2. According to the passage, traditional knowledge was dismissed during colonial times mainly because: **it was transmitted orally rather than in written form**
3. The author's tone is best described as: **balanced and analytical**
4. "Romanticise" in the passage means: **to present something as better or more ideal than it is**
5. Which statement is NOT supported by the passage? (a) Artisans practised empirical inquiry (b) All traditional practices survive testing (c) Communities should benefit from discoveries (d) Knowledge was passed through apprenticeship — **Ans: (b)**

Passage 2

Universities are often described as engines of economic growth, and policymakers increasingly measure them by patents, start-ups and graduate salaries. These indicators matter, but they capture only what is easily counted. A university also preserves languages, questions received wisdom and trains citizens to disagree without hostility. None of these appears in a ranking table.

When funding follows only measurable outputs, departments that produce long-term, uncertain or critical knowledge are the first to shrink. The irony is that many technologies now celebrated as commercial successes grew out of research that once looked useless. A wiser policy would balance accountability with patience, judging institutions over decades rather than budget cycles.

1. The central idea: **Universities have valuable functions beyond measurable economic outputs, and policy should recognise them.**
2. The "irony" mentioned refers to: **commercially successful technologies originating from research once considered useless**
3. The author would most likely support: **long-term evaluation of universities**
4. Which is an assumption of the author? **Funding decisions influence which departments survive.**
5. Suitable title: **"Beyond the Ranking Table: What Universities Are For"**

Inference vs Assumption vs Conclusion

Term	Meaning	Test
Inference	Logically follows from what is stated	"Must this be true if the passage is true?"
Assumption	Unstated premise the argument relies on	Negate it — does the argument collapse?
Conclusion	The main claim the author argues for	Usually signalled by "therefore", "thus", or the last line

Previous Year Questions (PYQ pattern — typical stems seen every cycle)

1. "The central idea of the passage is..." — pick the option that covers all paragraphs.
2. "Which of the following is the most appropriate title?"
3. "According to the passage, which of the following statements is/are correct? (A)... (B)... (C)... Choose: A and B only / B and C only..." — verify each individually.
4. "The author's attitude towards X is..."
5. "What does the author mean by the phrase '...'?"
6. "Which of the following can be inferred from the passage?"
7. "Which one of the following is NOT supported by the passage?"

Past passages have covered: environment & sustainability, education policy, Indian philosophy/culture, technology & society, economics of development, ethics, colonial history, art & literature.

More practice: common distractor patterns

8. Option repeats a phrase from the passage but changes its meaning → **wrong (distortion)**
9. Option is true in general knowledge but not mentioned → **wrong (outside scope)**
10. Option covers only one paragraph when the question asks for the central idea → **too narrow**
11. Option makes a sweeping claim ("all", "never") → **usually extreme, wrong**

Practice Routine for 5/5

- Daily: 1 editorial (The Hindu / Indian Express) → write a 1-line main idea + tone.
- Weekly: 5 timed passages (8 minutes each).
- Maintain a vocabulary notebook of words met in context.

Communication

In this unit

1. Meaning	22	6. Mass Media & Society	24
2. Models of Communication	22	7. Deeper Dive — Listening, Feedback, Networks & Classroom Talk	25
3. Types of Communication	23	Previous Year Questions (PYQ pattern)	26
4. Barriers to Communication	24		
5. Inter-cultural & Group Communication	24		

Expected questions: ~5 (10 marks) · Target: 5/5


Syllabus checklist

- ☐ Communication: meaning, types and characteristics
- ☐ Effective communication: verbal & non-verbal, inter-cultural & group communication, classroom communication
- ☐ Barriers to effective communication
- ☐ Mass-media and society

1. Meaning


Latin *communis* / *communicare* = "to make common / to share". Communication is the process of transmitting information, ideas and feelings to create **shared understanding**.

2. Models of Communication

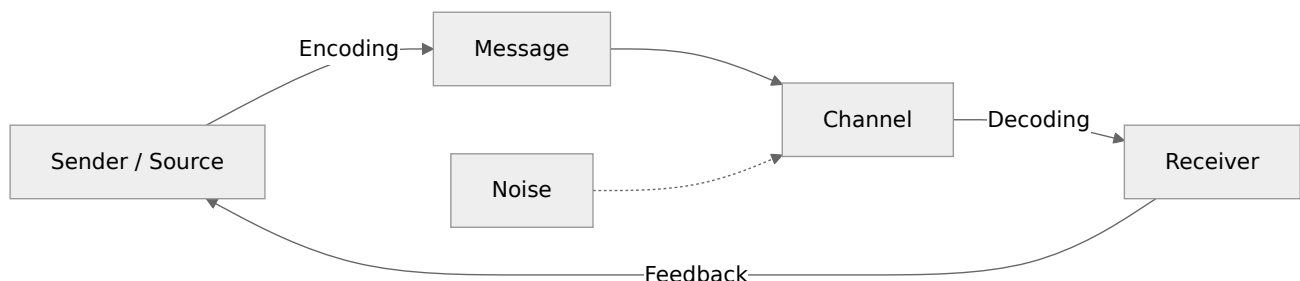


Model	Type	Key point
Aristotle	Linear, oldest	Speaker → Speech → Audience (persuasion: ethos, pathos, logos)
Lasswell (1948)	Linear	<i>Who says What in which Channel to Whom with what Effect</i>
Shannon–Weaver (1949)	Linear, "mother of all models"	Introduced noise ; information source, transmitter, channel, receiver, destination
Berlo SMCR (1960)	Linear	Source, Message, Channel, Receiver
Osgood–Schramm	Circular	Both are encoder-interpreter-decoder
Schramm (1954)	Interactive	Field of experience must overlap
Westley–MacLean	Mass comm	Gatekeeper role
Dance (helical)	Transactional	Communication grows like a helix
Barnlund	Transactional	Simultaneous sending & receiving

Schramm's model – meaning is shared only where fields of experience overlap

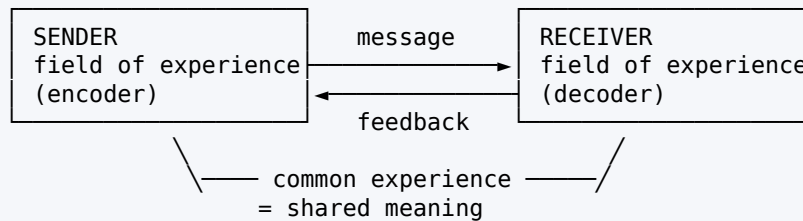

3. Types of Communication

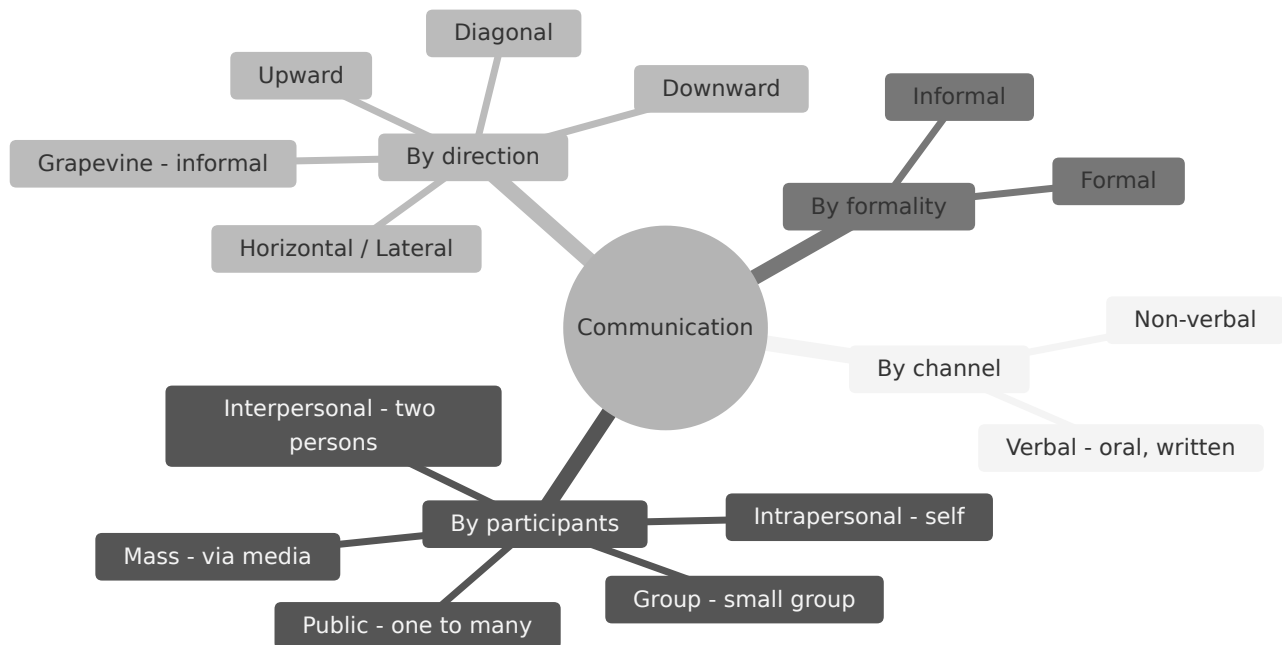

Non-verbal communication (frequently asked)

Kind	Meaning
Kinesics	Body movements, gestures, facial expressions, posture
Proxemics	Use of space / distance (Edward T. Hall)
Haptics	Touch
Chronemics	Use of time
Paralanguage / Vocalics	Tone, pitch, volume, pauses — <i>how</i> it is said
Oculesics	Eye contact
Artifacts	Clothing, appearance, objects
Olfactics	Smell


Hall's proxemic zones: Intimate (0–1.5 ft), Personal (1.5–4 ft), Social (4–12 ft), Public (12 ft+).

Mehrabian's 7-38-55 rule (for feelings/attitudes): 7% words, 38% tone of voice, 55% body language.

Classroom Communication

- Mostly **interpersonal + group**; should be two-way, with feedback.
- **Flanders' Interaction Analysis Category System (FIACS)** — 10 categories (7 teacher talk, 2 student talk, 1 silence/confusion); teacher talk = indirect (1–4) + direct (5–7).
- Effective classroom communication: clarity, eye contact, questioning, active listening, empathy, using examples.

4. Barriers to Communication

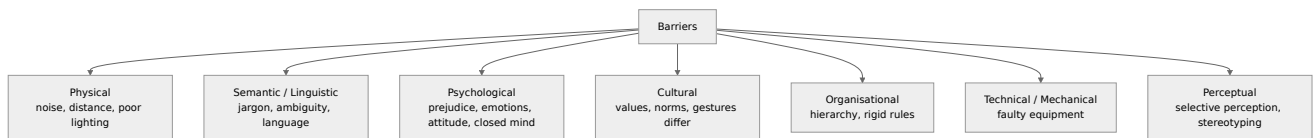

7 Cs of effective communication: **Clear, Concise, Concrete, Correct, Coherent, Complete, Courteous.**

5. Inter-cultural & Group Communication

- **Hofstede's cultural dimensions**: power distance, individualism–collectivism, masculinity–femininity, uncertainty avoidance, long-term orientation, indulgence.
- **High-context** cultures (India, Japan) rely on implicit cues; **low-context** (USA, Germany) are explicit (E.T. Hall).
- Ethnocentrism = judging other cultures by one's own — barrier.
- Tuckman's group stages: **Forming → Storming → Norming → Performing → Adjourning.**

6. Mass Media & Society

Theory	Idea
Hypodermic needle / Magic bullet	Media has direct, powerful effect on passive audience
Two-step flow (Lazarsfeld & Katz)	Media → opinion leaders → public
Agenda-setting (McCombs & Shaw)	Media tells us <i>what to think about</i>
Uses & Gratifications (Katz, Blumler)	Active audience uses media to satisfy needs
Cultivation (George Gerbner)	Long TV exposure shapes perception of reality ("mean world")
Spiral of silence (Noelle-Neumann)	Minority opinion holders stay silent
Medium is the message (Marshall McLuhan)	"Global village"; hot vs cool media
Gatekeeping (Kurt Lewin, David Manning White)	Editors filter news

Functions of mass media (Lasswell + Wright): surveillance, correlation, transmission of culture, entertainment. Indian landmarks: First newspaper — *Hicky's Bengal Gazette* (1780, James Augustus Hicky); Doordarshan (1959); All India Radio (1936, named; Akashvani 1957); Press Council of India (1966); Prasar Bharati (1997).

7. Deeper Dive — Listening, Feedback, Networks & Classroom Talk

7.1 Listening

Hearing is physiological; **listening** is psychological (attending, understanding, remembering, responding).

Type of listening	Purpose
Active / empathetic	Understand the speaker's feelings; paraphrase, nod, ask clarifying questions
Critical / evaluative	Judge the message, logic and evidence
Informational / comprehensive	Learn and retain content (lectures)
Appreciative	Enjoyment (music, poetry)
Selective	Hearing only what one wants — a barrier

Stages (HURIER model, Brownell): **Hearing** → **Understanding** → **Remembering** → **Interpreting** → **Evaluating** → **Responding**.




7.2 Feedback

- **Positive** (reinforces), **negative / corrective** (points out errors), **descriptive** (specific, non-judgemental), **evaluative** (judgement).
- Good feedback is specific, timely, focused on behaviour (not the person), and actionable.
- **Johari window** (Joseph Luft & Harrington Ingham): self-awareness in communication.

	Known to self	Not known to self
Known to others	OPEN (arena)	BLIND spot
Not known to others	HIDDEN (facade)	UNKNOWN

Feedback from others shrinks the blind area; self-disclosure shrinks the hidden area.

7.3 Communication Networks (small groups)



Network	Speed (simple tasks)	Accuracy	Member satisfaction	Leader emergence
Wheel	High	High	Low (except centre)	High
Chain	Moderate	High	Low	Moderate
Circle	Slow	Low	High	None
All-channel	Fast for complex tasks	Moderate	Highest	None

7.4 Effective Classroom Communication

- Use **simple language**, examples from learners' lives, and checks for understanding.
- Combine verbal with **non-verbal** cues (eye contact, gestures, movement).
- **Two-way**: questions, discussions, feedback.
- **Barriers** in class: noise, overcrowding, teacher's monotone, unclear objectives, learner's anxiety.
- **Teacher immediacy**: behaviours that reduce psychological distance (smiling, using names) → better learning.

7.5 Communication Ethics & Digital Communication

- Accuracy, honesty, respect for privacy, avoidance of plagiarism and misinformation.
- **Fake news / misinformation** (false but shared without intent to deceive) vs **disinformation** (deliberately false).
- **Netiquette**: rules of good online behaviour; ALL CAPS = shouting.
- **Digital divide**: unequal access to ICT.

Previous Year Questions (PYQ pattern)

1. "Who says what in which channel to whom with what effect" was given by: **Harold Lasswell**
2. Which model first introduced the concept of "noise"? **Shannon-Weaver**
3. The study of body movements as communication: **Kinesics**
4. Use of space in communication: **Proxemics**
5. The study of touch: **Haptics**
6. Tone and pitch of voice belong to: **Paralanguage**
7. Communication from subordinates to superiors: **Upward**
8. Informal communication network in an organisation: **Grapevine**
9. Jargon and ambiguous words cause which barrier? **Semantic**
10. Prejudice is a: **Psychological barrier**
11. "The medium is the message" — **Marshall McLuhan**
12. Media determines "what to think about" — **Agenda-setting theory**
13. Theory that the audience actively selects media to satisfy needs: **Uses and Gratifications**
14. Heavy TV viewers perceive the world as more dangerous — **Cultivation theory (Gerbner)**
15. "Global village" — **McLuhan**
16. Feedback in communication helps to: **verify that the message was understood as intended**
17. Classroom communication is basically: **Interactive / two-way, interpersonal + group**
18. FIACS was developed by: **Ned Flanders** (10 categories)
19. Arrange Tuckman's stages: **Forming, Storming, Norming, Performing, Adjourning**
20. The first newspaper in India: **Hicky's Bengal Gazette (1780)**
21. Communication with oneself: **Intrapersonal**
22. Statement: "Effective communication requires the sender and receiver to share a common field of experience."
— **True (Schramm)**

More practice questions

23. The first stage of the listening process: **Hearing (receiving)**
24. In the Johari window, information known to others but not to self is the: **blind area**
25. Self-disclosure reduces the: **hidden area**
26. The most centralised small-group network: **wheel**

27. Network with highest member satisfaction: **all-channel**
28. Feedback should be: **specific, timely and descriptive**
29. Deliberately false information spread to deceive: **disinformation**
30. Typing in ALL CAPS in online communication is considered: **shouting (poor netiquette)**
31. Teacher behaviours that reduce psychological distance: **immediacy behaviours**
32. Which is NOT a characteristic of effective classroom communication? (a) two-way (b) jargon-heavy (c) clear (d) learner-centred — **Ans: (b)**

Quick Revision Box

- Lasswell = 5 Ws · Shannon-Weaver = noise · Schramm = field of experience · Berlo = SMCR
- Kinesics–body, Proxemics–space, Haptics–touch, Chronemics–time
- Agenda setting (what to think about) vs Cultivation (TV shapes reality) vs Two-step (opinion leaders)

Mathematical Reasoning & Aptitude

In this unit


1. Number Series — Pattern Checklist	28	5. Arithmetic Aptitude — Formula Bank	29
2. Letter Series & Coding	29	Worked Examples	30
3. Blood Relations	29	6. Deeper Dive — More Question Types with Shortcuts	30
4. Classification (Odd one out)	29	Previous Year Questions (PYQ pattern)	32

Expected questions: ~5 (10 marks) · Target: 5/5 (pure practice unit)

Syllabus checklist

- ☐ Types of reasoning
- ☐ Number series, letter series, codes
- ☐ Relationships (blood relations)
- ☐ Classification
- ☐ Mathematical aptitude: fraction, time & distance, ratio, proportion, percentage, profit & loss, interest & discounting, averages

1. Number Series — Pattern Checklist

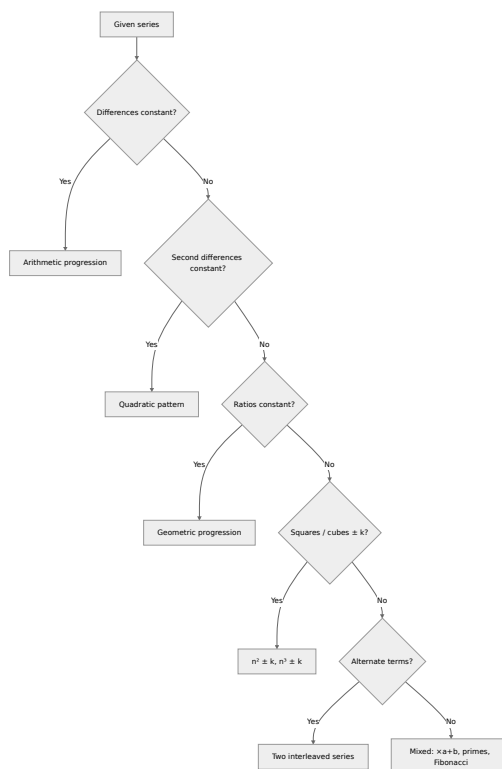

Examples:

- 2, 6, 12, 20, 30, **42** → $n(n+1)$
- 3, 7, 15, 31, 63, **127** → $\times 2 + 1$
- 1, 8, 27, 64, **125** → n^3
- 2, 3, 5, 7, 11, **13** → primes
- 1, 1, 2, 3, 5, 8, **13** → Fibonacci

- 4, 9, 25, 49, 121, 169 → squares of primes
- 1, 2, 6, 24, 120, 720 → $\times 2, \times 3, \times 4 \dots$ (factorials)

2. Letter Series & Coding

Position table (memorise both directions):

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	
Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A	(reverse)

Trick: **EJOTY** = 5, 10, 15, 20, 25. Opposite pairs sum to 27 ($A \leftrightarrow Z, M \leftrightarrow N$).


- Coding: If CAT → DBU (+1 each), then DOG → **EPH**.
- If CAT = 24 ($3+1+20$), then DOG = $4+15+7 = 26$.
- Reverse coding: CAT → XZG (opposite letters).

3. Blood Relations

Use a **family tree diagram** with symbols:

+ male - female = married | parent-child - siblings

Example: "A is the brother of B. B is the daughter of C. C is the husband of D."



Coded relations: "P + Q means P is father of Q; $P \times Q$ means P is sister of Q" → draw step-by-step.

4. Classification (Odd one out)

Find the common property in 3 of 4: primes, squares, multiples, vowels, same-category items. Example: 121, 144, 169, **190** → 190 is not a perfect square.

5. Arithmetic Aptitude — Formula Bank

Percentage

$x\% \text{ of } y = y\% \text{ of } x$
 Increase by $a\%$ then $b\% \Rightarrow \text{net} = a + b + \frac{ab}{100}$
 If price $\uparrow r\%$, consumption must $\downarrow$ by $\frac{r}{(100+r)} \times 100\%$ to keep expenditure same
 Successive discount $d_1, d_2 \Rightarrow d_1 + d_2 - \frac{d_1 \cdot d_2}{100}$

Profit & Loss

Profit% = $\frac{(SP - CP)}{CP} \times 100$
 $SP = CP \times \frac{(100 + P\%)}{100}$
 Marked price M, discount $d\% \Rightarrow SP = \frac{M(100 - d)}{100}$
 Two items sold at same SP, one at $x\%$ gain, other at $x\%$ loss $\Rightarrow$ always LOSS of $\frac{x^2}{100}\%$
 Dishonest dealer (uses 900g for 1kg) $\Rightarrow \text{gain} = \frac{100}{900} \times 100 = 11.11\%$


Simple & Compound Interest

$SI = P \cdot R \cdot T / 100$
 $CI: A = P(1 + R/100)^T$; $CI = A - P$
 $CI - SI \text{ for } 2 \text{ yrs} = P(R/100)^2$
 $CI - SI \text{ for } 3 \text{ yrs} = P(R/100)^2(3 + R/100)$
Money doubles in T years at $SI \Rightarrow R = 100/T$

Ratio, Proportion, Averages

$a : b = c : d \Rightarrow ad = bc$
Mean proportional of $a, b = \sqrt{ab}$; Third proportional to $a, b = b^2/a$
Average = Sum / Count
If one value replaced changes average by d over n items $\Rightarrow$ change in value = $n \cdot d$
Average speed (equal distances) = $2xy/(x + y)$

Time, Speed, Distance

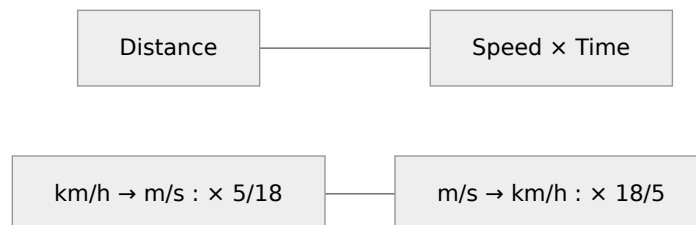

- Relative speed: same direction ($a - b$), opposite direction ($a + b$).
- Train crossing pole: time = L / S ; crossing platform: $(L + P) / S$.
- Boats: downstream = $u + v$, upstream = $u - v$; still water speed = $(D + U)/2$, stream = $(D - U)/2$.

Time & Work

A does work in a days, B in b days $\Rightarrow$ together = $ab/(a + b)$ days
Pipes: inlet +, outlet - (rates add)
 $M1 \cdot D1 \cdot H1 / W1 = M2 \cdot D2 \cdot H2 / W2$

Worked Examples


1. A price rises 20% then falls 20%. Net? $\rightarrow 20 - 20 - 400/100 = -4\%$ (loss).
2. ₹5000 at 10% CI for 2 yrs: $CI - SI = 5000 \times (0.1)^2 = ₹50$.
3. A car goes at 40 km/h and returns at 60 km/h. Average speed = $2 \times 40 \times 60 / 100 = 48$ km/h.
4. A can finish in 10 days, B in 15. Together = $150/25 = 6$ days.
5. Two articles each sold at ₹990, one at 10% profit, another at 10% loss. $\rightarrow 1\%$ loss.

6. Deeper Dive — More Question Types with Shortcuts

6.1 Types of Reasoning

- **Deductive:** general $\rightarrow$ specific; conclusion certain. **Inductive:** specific $\rightarrow$ general; conclusion probable.
- **Abductive:** inference to the best explanation (a doctor diagnosing from symptoms).
- **Analogical:** reasoning from similarity of two cases.

6.2 Mixtures & Alligation

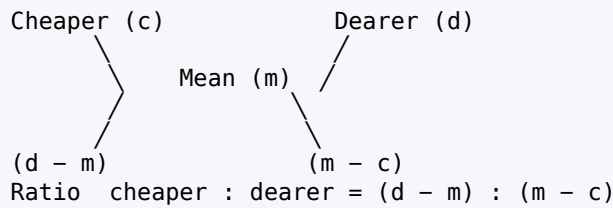

Example: Rice at ₹40/kg and ₹60/kg mixed to get ₹52/kg → ratio = $(60 - 52) : (52 - 40) = 8 : 12 = 2 : 3$.

Repeated dilution: from a vessel of x litres, y litres replaced by water n times → remaining pure = $x(1 - y/x)^n$.

6.3 Ages

Translate words into equations. "A is twice as old as B; 10 years ago A was three times as old as B": $A = 2B$, $A - 10 = 3(B - 10) \rightarrow 2B - 10 = 3B - 30 \rightarrow B = 20, A = 40$.

6.4 Partnership

Profit shared in ratio of **capital × time**. A invests ₹5000 for 12 months, B ₹6000 for 8 months → $60000 : 48000 = 5 : 4$.

6.5 Discounting (banker's & true discount)

True discount TD = $(\text{Amount} \times R \times T) / (100 + R \cdot T)$
 Banker's discount BD = SI on the amount = $A \cdot R \cdot T / 100$
 BD - TD = SI on TD (Banker's gain) ; Present worth PW = $A - TD$

Example: A = ₹1100 due in 1 year at 10%: TD = $1100 \times 10 / 110 = ₹100$; PW = ₹1000; BD = ₹110; BG = ₹10.

6.6 Coding–Decoding Variants

Type	Example
Letter shift	COMPUTER → DPNQVUFS (+1)
Reverse alphabet	GOOD → TLLW (A↔Z)
Position sum	BAD = 2 + 1 + 4 = 7
Word reversal	READ → DAER
Symbol substitution	If + means ×, - means ÷: $8 + 2 - 4 = 8 \times 2 \div 4 = 4$

6.7 Fractions & Comparison

- To compare fractions quickly, cross-multiply: $5/7$ vs $7/10 \rightarrow 50$ vs $49 \rightarrow 5/7$ is larger.
- Recurring decimals: $0.333... = 1/3$; $0.2727... = 27/99 = 3/11$.

6.8 Worked Mixed Set

- Successive discounts 20% and 10% = $20 + 10 - 2 = 28\%$.
- A sum becomes ₹1331 in 3 years at 10% CI → principal = $1331 / 1.331 = ₹1000$.
- 15 men finish work in 20 days; how many days for 25 men? $15 \times 20 / 25 = 12$ days.
- Boat: 16 km downstream in 2 h, 8 km upstream in 2 h → speeds 8 and 4 → still water **6 km/h**, stream **2 km/h**.
- Average of first 50 natural numbers = $(50 + 1) / 2 = 25.5$.

Previous Year Questions (PYQ pattern)

1. Next term: 2, 5, 10, 17, 26, ? $\rightarrow 37$ ($n^2 + 1$)
2. Next term: 1, 4, 9, 16, 25, ? $\rightarrow 36$
3. Missing: 3, 12, 48, ?, 768 $\rightarrow 192$ ($\times 4$)
4. Next: 6, 11, 21, 36, 56, ? $\rightarrow 81$ (diffs 5,10,15,20,25)
5. Letter series: AZ, BY, CX, ? $\rightarrow$ **DW**
6. If TEACHER is coded as VGCEJGT (+2), then STUDENT $\rightarrow$ **UVWFGPV**
7. If PEN = 35 (16+5+14), INK = ? $\rightarrow 9+14+11 = 34$
8. Pointing to a photograph, a man says, "Her mother is the only daughter of my mother." The man is the girl's: **Maternal uncle**
9. A is B's sister, C is B's mother, D is C's father, E is D's mother. A is E's: **Great-granddaughter**
10. Odd one out: 27, 64, 125, 144 $\rightarrow 144$ (not a cube)
11. A shopkeeper marks 25% above CP and allows 10% discount. Gain% = $1.25 \times 0.9 = 1.125 \rightarrow 12.5\%$
12. A sum doubles in 8 years at SI. Rate = **12.5%**
13. A train 150 m long passes a pole in 15 s. Speed = 10 m/s = **36 km/h**
14. Average of 5 numbers is 20; one number removed, average becomes 18. Removed number = $100 - 72 = 28$
15. Ratio of A:B = 2:3, B:C = 4:5. A:B:C = **8:12:15**
16. If the population increases 10% annually, from 10000 after 2 years: **12100**
17. Salary increased by 25%; by what % must it be reduced to restore? $25/125 \times 100 = 20\%$
18. Two trains 120 m and 180 m at 50 & 40 km/h opposite directions. Time to cross = $300 / (90 \times 5/18) = 300/25 = 12$ s

More practice questions

19. Milk at ₹30/L mixed with water (free) to sell at ₹30 with 20% profit. Ratio milk : water = **5 : 1** (cost price of mixture $25 \rightarrow (25 - 0) : (30 - 25)$)
20. Next term: 1, 3, 7, 15, 31, ? $\rightarrow 63$
21. Next term: 3, 5, 9, 17, 33, ? $\rightarrow 65$ ($\times 2 - 1$)
22. Find the odd one: 3, 5, 11, 14, 17 $\rightarrow 14$ (not prime)
23. A and B invest ₹20,000 and ₹30,000 for 6 and 4 months; profit ratio = $120000 : 120000 = 1 : 1$
24. Ten years ago, father was 4 times his son's age; now he is twice. Son's present age: $S - 10 = (2S - 10)/4 \rightarrow 15$ years
25. If 'SCHOOL' is coded as 'RBGNK' (-1), then 'COLLEGE' is: **BNKKDFD**
26. Pointing to a lady, Rahul says, "She is the daughter of my grandfather's only son." The lady is Rahul's: **sister**
27. 40% of a number is 60. 75% of it = **112.5**
28. Ratio of present worth to true discount for ₹1210 due in 2 years at 10% SI: $PW = 1210/1.2 = 1008.33$; $TD = 201.67 \rightarrow 5 : 1$

Quick Revision Box

- Net % change = $a + b + ab/100$ · Same SP, $\pm x\% \Rightarrow$ loss $x^2/100$ %
- CI-SI (2 yr) = $P(R/100)^2$ · Avg speed = $2xy/(x+y)$
- EJOTY = 5,10,15,20,25 · Opposite letters sum to 27

Logical Reasoning

In this unit

1. Argument Basics	33	6. Analogies	36
2. Categorical Propositions (A E I O)	33	7. Indian Logic (Nyaya) — Very High Weightage	36
3. Categorical Syllogism — Mood & Figure	34	8. Deeper Dive — Venn Diagram Practice, Conditionals & More Indian Logic	37
4. Fallacies	35	Previous Year Questions (PYQ pattern)	39
5. Uses of Language; Connotation & Denotation	35		

Expected questions: ~5 (10 marks) · Target: 5/5

Syllabus checklist

- ☐ Structure of arguments: argument forms, categorical propositions, mood & figure, formal & informal fallacies, uses of language, connotations & denotations, classical square of opposition
- ☐ Evaluating & distinguishing deductive and inductive reasoning
- ☐ Analogies
- ☐ Venn diagram: simple & multiple use for establishing validity of arguments
- ☐ Indian Logic: means of knowledge (Pramanas), structure & kinds of Anumana (inference), Hetvabhasas (fallacies of inference)

1. Argument Basics

An **argument** = premises + conclusion. Premise indicators: *since, because, for*. Conclusion indicators: *therefore, hence, thus, so*.

	Deductive	Inductive
Direction	General → particular (not strictly)	Particular → general
Conclusion	Necessarily follows	Probably follows
Evaluation	Valid / invalid ; sound = valid + true premises	Strong / weak ; cogent = strong + true premises
Example	All men are mortal; Socrates is a man; ∴ mortal	Every crow seen is black ∴ all crows are black


Validity is about **form**, not truth. An argument with false premises can be valid.

2. Categorical Propositions (A E I O)

Code	Form	Quantity	Quality	Distributes
A	All S are P	Universal	Affirmative	S only
E	No S is P	Universal	Negative	S and P
I	Some S are P	Particular	Affirmative	None
O	Some S are not P	Particular	Negative	P only

Memory: **AffIrmo** (A, I affirmative), **nEgO** (E, O negative). Distribution: "**ASEBINOP**" — A: Subject, E: Both, I: Nothing, O: Predicate.

Square of Opposition

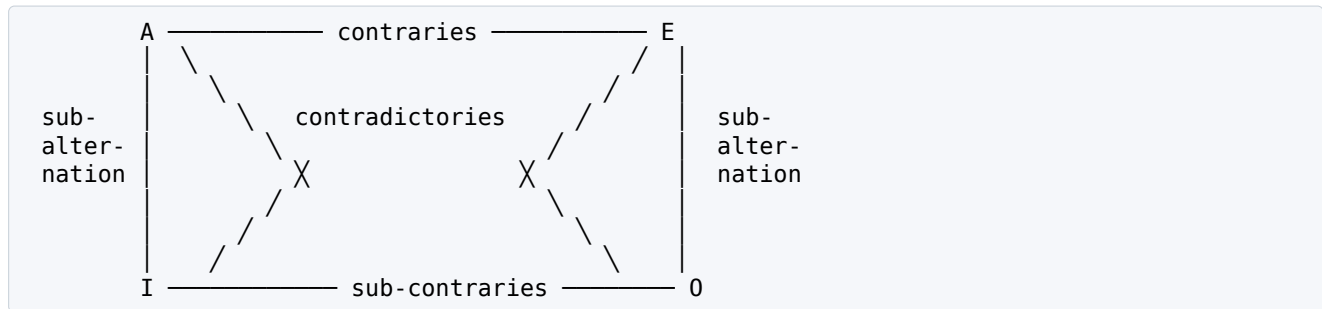

Relation	Pair	Rule
Contradictory	A-O, E-I	Exactly one is true (opposite truth values always)
Contrary	A-E	Both cannot be true; both can be false
Sub-contrary	I-O	Both cannot be false; both can be true
Sub-alternation	A→I, E→O	If universal true ⇒ particular true; if particular false ⇒ universal false

Inference table (if given proposition is TRUE):

Given true	A	E	I	O
A	T	F	T	F
E	F	T	F	T
I	?	F	T	?
O	F	?	?	T

If given FALSE: A false → O true, E?, I?; E false → I true; I false → E true, A false, O true; O false → A true, E false, I true.

3. Categorical Syllogism — Mood & Figure

Three terms: Major (P – predicate of conclusion), Minor (S – subject of conclusion), Middle (M – in both premises, not conclusion).

Figure 1	Figure 2	Figure 3	Figure 4
M – P	P – M	M – P	P – M
S – M	S – M	M – S	M – S
S – P	S – P	S – P	S – P


Mood = the letters of the three propositions, e.g. AAA-1 (Barbara), EAE-1 (Celarent), AII-1 (Darii), EIO-1 (Ferio).

Rules of validity

1. Middle term must be distributed at least once (else **fallacy of undistributed middle**).
2. A term distributed in conclusion must be distributed in premise (else **illicit major/minor**).
3. Two negative premises → no conclusion (**exclusive premises**).
4. A negative premise → negative conclusion; and vice-versa.
5. Two particular premises → no conclusion.
6. Exactly three terms (else **four-term fallacy**).

Venn Diagram Method (for syllogism questions)

Premise: All A are B



Premise: Some B are C

Possible conclusions:
"Some A are C" → NOT definite
"Some C are B" → TRUE (conversion of I)

Technique: draw the **minimum overlap** diagram; a conclusion follows only if it is true in **every** possible diagram.

4. Fallacies

Formal fallacies

Undistributed middle, illicit major, illicit minor, affirming the consequent ($p \rightarrow q, q \therefore p$), denying the antecedent ($p \rightarrow q, \neg p \therefore \neg q$), four terms.

Informal fallacies

Fallacy	Meaning
Ad hominem	Attacking the person, not the argument
Ad populum (bandwagon)	Many people believe it $\Rightarrow$ true
Ad verecundiam	Appeal to inappropriate authority
Ad ignorantiam	Not proved false $\Rightarrow$ true
Ad misericordiam	Appeal to pity
Ad baculum	Appeal to force
Straw man	Distorting opponent's argument
Red herring	Diverting to an irrelevant issue
Begging the question (petitio principii)	Conclusion assumed in premise (circular)
Hasty generalisation	Too small a sample
False cause (post hoc)	After this, therefore because of this
Slippery slope	One step leads to disaster chain
False dilemma	Only two options presented
Equivocation	Word used in two senses
Composition / Division	Parts $\leftrightarrow$ whole wrongly transferred

5. Uses of Language; Connotation & Denotation

- Functions of language (Copi): **Informative, Expressive, Directive**, (also ceremonial, performative).
- **Denotation (extension)** = the set of objects a term refers to. **Connotation (intension)** = properties/attributes.
- As connotation increases, denotation decreases (inverse relation). e.g. "animal" $\rightarrow$ "mammal" $\rightarrow$ "dog".


6. Analogies

A : B :: C : ? — identify relation: part-whole, cause-effect, tool-worker, synonym, antonym, product-raw material, degree.

- Pen : Writer :: Scalpel : **Surgeon** · Cow : Calf :: Horse : **Foal** · Ornithology : Birds :: Entomology : **Insects**

7. Indian Logic (Nyaya) — Very High Weightage

Pramanas (means of valid knowledge)

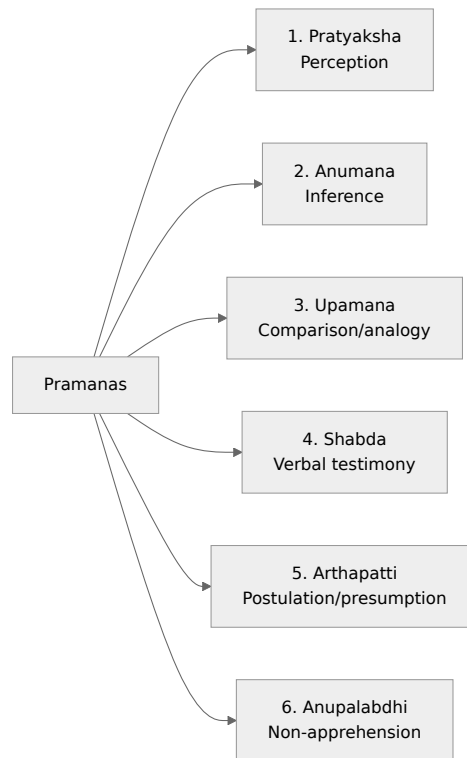

School	Pramanas accepted	Count
Charvaka	Pratyaksha only	1
Buddhism, Vaisheshika	Pratyaksha, Anumana	2
Samkhya, Yoga, Jainism	+ Shabda	3
Nyaya	+ Upamana	4
Prabhakara Mimamsa	+ Arthapatti	5
Bhatta Mimamsa, Advaita Vedanta	+ Anupalabdhi	6

- **Arthapatti**: "Devadatta is fat but doesn't eat by day $\Rightarrow$ he eats at night."
- **Anupalabdhi**: knowing the absence of a jar by not perceiving it.

Anumana — Five-membered syllogism (Panchavayava)

1. Pratijna (Proposition) : The hill has fire.
2. Hetu (Reason) : Because it has smoke.
3. Udaharana (Example) : Whatever has smoke has fire, like a kitchen.
4. Upanaya (Application) : The hill has smoke (pervaded by fire).
5. Nigamana (Conclusion) : Therefore the hill has fire.

Terms: **Paksha** (minor term: hill), **Sadhya** (major term: fire), **Hetu/Linga** (middle term: smoke). **Vyapti** = invariable concomitance (universal relation) between hetu and sadhya — the basis of inference.

Kinds of anumana:

- By purpose: **Svarthanumana** (for oneself) and **Pararthanumana** (for others, uses 5 members).
- By Nyaya (Gautama): **Purvavat** (cause → effect), **Sheshavat** (effect → cause), **Samanyatodrishta** (based on general observation).
- By vyapti: Kevalanvayi, Kevalavyatireki, Anvaya-vyatireki.


Hetvabhasa (fallacies of inference — 5)

Hetvabhasa	Meaning
Savyabhichara (Anaikantika)	Irregular / inconclusive middle — hetu found with and without sadhya
Viruddha	Contradictory — hetu proves the opposite
Satpratipaksha	Counter-balanced — another hetu proves the opposite
Asiddha (Sadhyasama)	Unproved — hetu itself not established
Badhita (Kalatita)	Contradicted by other pramana (e.g. "fire is cold because it is a substance")

8. Deeper Dive — Venn Diagram Practice, Conditionals & More Indian Logic

8.1 Six Standard Venn Situations


All A are B



No A is B



Some A are B



Some A are not B: the part of A outside B is non-empty (shade / mark with x)

Method for "Statements → Conclusions":

1. Draw the **minimum** case allowed by each statement.
2. A conclusion follows only if it holds in **every** possible diagram.
3. "Some A are not B" from "All A are B"? No. "Some B are A" from "All A are B"? Yes (conversion by limitation).

Worked: Statements: All pens are books. Some books are bags.

- Conclusion I: Some pens are bags — **does not follow** (bags may touch only the books outside pens).
- Conclusion II: Some bags are books — **follows** (conversion of "Some books are bags").
- "Either I or II" type options apply only when two conclusions form a complementary pair (e.g. Some A are B / No A is B).

8.2 Immediate Inference

Operation	From	To
Conversion	E: No S is P / I: Some S are P	No P is S / Some P are S (valid)
Conversion by limitation	A: All S are P	Some P are S
Obversion	All S are P	No S is non-P (change quality, negate predicate)
Contraposition	All S are P	All non-P are non-S

O-propositions cannot be converted.

8.3 Conditional (Hypothetical) Statements

Valid: If P then Q; P; $\therefore$ Q (Modus ponens)
 Valid: If P then Q; not Q; $\therefore$ not P (Modus tollens)
 Invalid: If P then Q; Q; $\therefore$ P (Affirming the consequent)
 Invalid: If P then Q; not P; $\therefore$ not Q (Denying the antecedent)
 "P only if Q" $\equiv$ If P then Q "P unless Q" $\equiv$ If not Q then P

8.4 Truth & Validity Combinations

Premises	Conclusion	Can the argument be valid?
True	True	Yes
True	False	No — impossible for a valid argument
False	True	Yes
False	False	Yes

8.5 More Indian Logic

- **Prama** = valid knowledge; **Aprama** = invalid knowledge (doubt — samshaya, error — viparyaya, hypothetical — tarka).
- **Pratyaksha** types (Nyaya): **Nirvikalpaka** (indeterminate) and **Savikalpaka** (determinate); also **laukika** (ordinary) and **alaukika** (extraordinary).
- **Upamana**: knowledge of a word-object relation through similarity (learning that a gavaya resembles a cow).
- **Shabda**: testimony of a reliable person (**apta vakya**); Vedic and secular.
- **Jain logic**: **Anekantavada** (many-sidedness), **Syadvada** — 7 modes of predication (**Saptabhengi naya**): syad asti, syad nasti, syad asti-nasti, syad avaktavya, ...
- **Buddhist logic**: Dignaga and Dharmakirti; accept only perception and inference.
- **Vyapti** is established through **anvaya** (agreement in presence: where smoke, there fire) and **vyatireka** (agreement in absence: where no fire, no smoke).
- Nyaya Sutra author: **Gautama** (**Akshapada**); 16 categories (padarthas) beginning with pramana and prameya.

Previous Year Questions (PYQ pattern)

Square of opposition

1. If "All poets are dreamers" is true, which is false? → **"Some poets are not dreamers" (O)** and "No poets are dreamers" (E)
2. If "Some students are not intelligent" (O) is false, then "All students are intelligent" (A) is: **True**
3. Two propositions which cannot both be true but can both be false: **Contraries (A–E)**
4. Two propositions which cannot both be false but can both be true: **Sub-contraries (I–O)**
5. Which proposition distributes only the predicate? **O**

Syllogism

6. Premises: All cats are animals. Some animals are dogs. Conclusion "Some cats are dogs" → **Does not follow** (undistributed middle)
7. Statements: No A is B. All C are B. Conclusion: **No C is A** — follows.
8. Mood and figure of: "All M are P; All S are M; ∴ All S are P" → **AAA-1 (Barbara)**

Deductive/inductive

9. In a deductive argument, the conclusion: **follows necessarily**
10. An argument which is valid and has true premises is: **Sound**
11. Inductive arguments are evaluated as: **strong/weak**

Fallacies

12. "He is a criminal, so his argument about taxes is wrong" — **Ad hominem**
13. "No one has proved ghosts don't exist, so they exist" — **Ad ignorantiam**
14. "I wore a lucky shirt and won — so the shirt causes wins" — **Post hoc (false cause)**

Language

15. Denotation of a term refers to: **the objects to which it applies**
16. "Close the door" serves which function? **Directive**

Indian logic

17. Number of pramanas accepted by Nyaya: **4**
18. Charvakas accept only: **Perception**
19. Advaita Vedanta accepts how many pramanas? **6**
20. In "the hill has fire because it has smoke", the middle term (hetu) is: **smoke**; paksha is: **hill**
21. The invariable relation between hetu and sadhya is: **Vyapti**
22. Inference for others is: **Pararthanumana**
23. Arrange Panchavayava: **Pratijna, Hetu, Udaharana, Upanaya, Nigamana**
24. A hetu that proves the contrary of what is intended: **Viruddha**
25. Knowledge of non-existence is obtained through: **Anupalabdhi**
26. Arthapatti is accepted by: **Mimamsa (Prabhakara & Bhatta) and Advaita**

Analogy

27. Book : Author :: Statue : **Sculptor**

More practice questions

28. Obverse of "All S are P": **No S is non-P**
29. Which proposition cannot be converted? **O**
30. Converse of "All doctors are graduates" by limitation: **Some graduates are doctors**
31. A valid argument cannot have: **true premises and a false conclusion**
32. "If it rains, the match is cancelled. The match is cancelled. So it rained." — **affirming the consequent**
33. Statements: No cat is a dog. All dogs are animals. Conclusion "Some animals are not cats" — **follows**
34. Syadvada is associated with: **Jainism**
35. Number of modes in Saptabhangi: **7**

36. Determinate perception in Nyaya: **Savikalpaka**
37. Vyapti by agreement in absence: **Vyatireka**
38. Author of Nyaya Sutras: **Gautama (Akshapada)**
39. Knowledge from similarity (gavaya–cow): **Upamana**
40. Analogy: Doctor : Hospital :: Teacher : **School**

Quick Revision Box

- A(S) E(S,P) I(none) O(P) — distribution
- Contradictory A–O, E–I · Contrary A–E · Sub-contrary I–O
- Charvaka 1 · Buddhist 2 · Samkhya 3 · Nyaya 4 · Prabhakara 5 · Bhatta/Advaita 6
- 5 Hetvabhasa: Savyabhichara, Viruddha, Satpratipaksha, Asiddha, Badhita

Data Interpretation

In this unit


1. Data Basics	41	6. Data and Governance	43
2. Graph Types — When to Use	41	7. Deeper Dive — Pie Chart & Line Graph Sets, Common Pitfalls	43
3. Measures of Central Tendency & Dispersion	42	Previous Year Questions (PYQ pattern)	44
4. Speed-Calculation Tricks	42		
5. Worked Data Set (typical NET format)	42		

Expected questions: 5 (one data set) · Target: 5/5 — pure calculation marks

Syllabus checklist

- ☐ Sources, acquisition and classification of data
- ☐ Quantitative and qualitative data
- ☐ Graphical representation (bar chart, histograms, pie chart, table chart, line chart) and mapping of data
- ☐ Data interpretation
- ☐ Data and governance

1. Data Basics

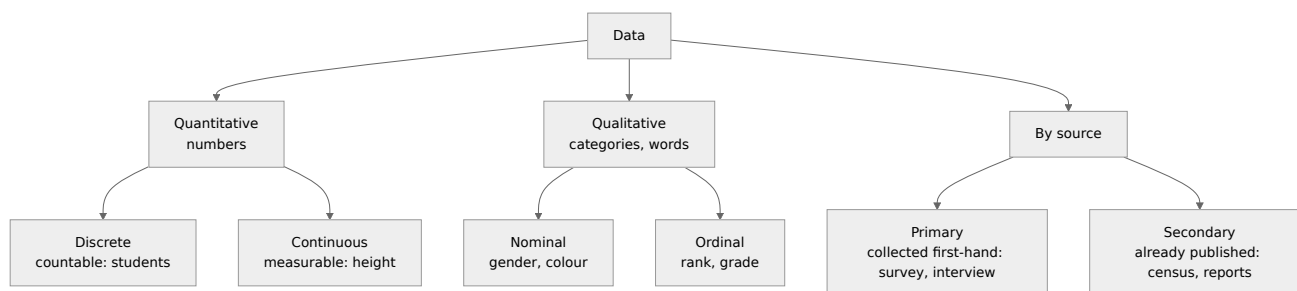

- Classification bases: **Geographical (spatial)**, **Chronological (temporal)**, **Qualitative**, **Quantitative**.
- Data mapping: choropleth maps (shades by region), dot maps, isopleths, cartograms.

2. Graph Types — When to Use

Graph	Best for	Note
Bar chart	Comparing categories	Gaps between bars
Histogram	Frequency of continuous classes	No gaps ; area $\propto$ frequency
Frequency polygon	Joining midpoints of histogram	
Ogive	Cumulative frequency (less than / more than)	Intersection gives median
Pie chart	Part of a whole	Angle = $(\text{value}/\text{total}) \times 360^\circ$
Line chart	Trend over time	
Scatter plot	Correlation between two variables	
Table	Exact values	

Pie chart conversions

1% = 3.6° 25% = 90° 50% = 180°
 angle $\theta \Rightarrow$ percentage = $\theta / 3.6$

3. Measures of Central Tendency & Dispersion

Measure	Formula	Note
Mean	$\Sigma x / n$	Affected by extreme values
Median	Middle value	Best for skewed data
Mode	Most frequent	Only one for nominal data
Empirical relation	Mode = 3 Median – 2 Mean	Moderately skewed
Range	Max – Min	
Variance	$\Sigma(x - \bar{x})^2 / n$	
SD	$\sqrt{\text{Variance}}$	
Coefficient of variation	SD / Mean $\times 100$	Compare consistency

4. Speed-Calculation Tricks

Percentage change = $(\text{New} - \text{Old}) / \text{Old} \times 100$
 Percentage points = simple difference of two percentages
 Ratio comparisons $\rightarrow$ compare cross-products: $a/b > c/d \Leftrightarrow ad > bc$
 CAGR = $(\text{End}/\text{Start})^{(1/n)} - 1$
 Fraction-percent 1/2=50 1/3=33.33 1/4=25 1/5=20 1/6=16.67 1/7=14.28
 1/8=12.5 1/9=11.11 1/11=9.09 1/12=8.33 1/16=6.25

Approximate first, then pick nearest option; options are usually far apart.

5. Worked Data Set (typical NET format)

Production of cars (thousands) by 4 companies:

Year	P	Q	R	S	Total
2019	40	30	25	15	110
2020	45	35	20	20	120
2021	50	30	30	25	135
2022	60	40	35	25	160

Bar view of P across years

2019 40
 2020 45
 2021 50
 2022 60

- % increase in total from 2019 to 2022 = $50/110 \times 100 = 45.45\%$
- Average production of Q = $135/4 = 33.75$
- In which year did R have the highest share of total? 2019: 22.7%, 2020: 16.7%, 2021: 22.2%, 2022: 21.9% $\rightarrow$ **2019**
- Ratio of P(2022) to S(2019+2020) = $60 : 35 = 12 : 7$
- Pie-chart angle for S in 2021 = $25/135 \times 360 = 66.67^\circ$


6. Data and Governance

- **Open Government Data (OGD) Platform India** — data.gov.in (NDSAP 2012 — National Data Sharing & Accessibility Policy).
- **Digital Personal Data Protection Act, 2023 (DPDP)** — rights of Data Principal, duties of Data Fiduciary, Data Protection Board.
- **National Data Governance Framework Policy (2022)**, India Data Management Office.
- **Aadhaar (UIDAI, 2009; Aadhaar Act 2016)**, **e-governance**: Digital India (2015), DigiLocker, UMANG, GSTN, PFMS.
- Data governance principles: quality, privacy, security, accountability, transparency, interoperability.
- Census of India — every 10 years (Registrar General & Census Commissioner, MHA); NSO (merged NSSO + CSO, 2019) under MoSPI.

7. Deeper Dive — Pie Chart & Line Graph Sets, Common Pitfalls

7.1 Pie-Chart Set (worked)

A university's annual expenditure of ₹80 crore is distributed as follows:

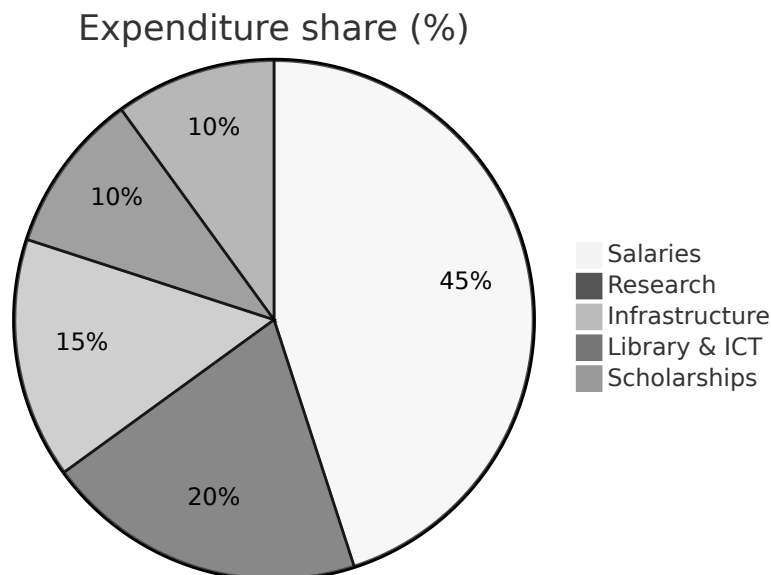

Head	%	Amount (₹ crore)	Central angle
Salaries	45	36	162°
Research	20	16	72°
Infrastructure	15	12	54°
Library & ICT	10	8	36°
Scholarships	10	8	36°

1. Research exceeds Library & ICT by: $16 - 8 = ₹8 \text{ crore}$ (= 100% more).
2. If salaries rise by 10% and total stays the same, salaries' new share = $39.6/80 = 49.5\%$.
3. Ratio of infrastructure to scholarships = **3 : 2**.
4. Angle for research + scholarships = **108°**.
5. If research grants come only from a ₹12 crore grant plus internal funds, internal funds = $16 - 12 = ₹4 \text{ crore}$.

7.2 Two-Series Set (worked)

Number of PhD scholars admitted (two departments):

Scholars admitted (each ■ = 5 scholars)

2021	CS	■ ■ ■ ■ ■	30
	Maths	■ ■ ■ ■	20
2022	CS	■ ■ ■ ■ ■ ■	40
	Maths	■ ■ ■ ■ ■	30
2023	CS	■ ■ ■ ■ ■ ■ ■	50
	Maths	■ ■ ■ ■ ■ ■	35
2024	CS	■ ■ ■ ■ ■ ■ ■ ■	60
	Maths	■ ■ ■ ■ ■ ■ ■	45

Year	CS	Maths	Total
2021	30	20	50
2022	40	30	70
2023	50	35	85
2024	60	45	105

1. Year with the highest % growth for Maths: 2022 (50%), 2023 (16.7%), 2024 (28.6%) → **2022**.
2. Average CS admissions = $180/4 = 45$.
3. Total growth 2021→2024 = $(105 - 50)/50 = 110\%$.
4. Ratio CS : Maths over four years = $180 : 130 = 18 : 13$.
5. CAGR of CS (2021→2024, 3 years) = $(60/30)^{(1/3)} - 1 \approx 26\%$.

7.3 Pitfalls Examiners Exploit

- **Percentage vs percentage points:** 20% → 25% is a rise of 5 percentage points but 25%.
- **Base year confusion:** "% increase from 2022 to 2023" uses 2022 as the base.
- **Average of percentages** ≠ overall percentage (weights differ).
- **Units:** lakhs vs crores (1 crore = 100 lakh); thousands in the table header.
- Read the **question first**, then compute only what is asked.

7.4 Data Mapping & Governance Extras

- **GIS** layers data on maps; **choropleth** uses shading per region; **isopleth** lines join equal values (isotherms, isobars).
- **Data lifecycle:** collection → storage → processing → analysis → sharing → archival/deletion.
- **Metadata** = data about data. **Open data** principles: accessible, machine-readable, licence-free.

Previous Year Questions (PYQ pattern)

DI questions always come as a set of 5 on one table/graph. Typical stems:

1. "What is the percentage increase in X from year A to year B?"
2. "In which year was the ratio of X to Y the maximum?"
3. "What is the average of X over the given years?"
4. "The central angle corresponding to X in the pie chart is..."
5. "What is the difference between total X and total Y?"
6. "For how many years was X above its average?"

Concept questions:

7. A histogram is used for: **continuous frequency distribution**
8. The median can be obtained graphically from: **Ogives (intersection of less-than and more-than)**
9. Data collected by the researcher for the first time: **Primary data**

10. Census data used by a researcher is: **Secondary data**
11. Pie chart: if a sector is 72° , it represents **20%**
12. Classification of data by time is called: **Chronological**
13. Which measure is best for ordinal data? **Median**
14. Which portal provides open government data in India? **data.gov.in**
15. Coefficient of variation is used to compare: **consistency/variability of two series**

More practice questions

16. A pie-chart sector of 54° represents what %? **15%**
17. If total = ₹500 crore and a sector is 18%, amount = ₹**90 crore**
18. Rise from 40% to 50% is how many percentage points? **10**, and what % increase? **25%**
19. Average of 20, 30, 40 with frequencies 2, 3, 5 = $(40 + 90 + 200)/10 =$ **33**
20. Lines joining places of equal rainfall on a map: **isohyets** (a type of isopleth)
21. A map using colour shades by state for literacy rate: **choropleth map**

Quick Revision Box

- $1\% = 3.6^\circ$ · Mode = $3\text{Median} - 2\text{Mean}$ · $\text{CV} = \text{SD}/\text{Mean} \times 100$
- Histogram no gaps; bar chart gaps · Ogive → median
- Learn fraction ↔ percent table by heart

Information & Communication Technology (ICT)

In this unit


1. Computer Basics	46	6. Digital Initiatives in Higher Education	48
2. Abbreviations (must know)	47	7. ICT & Governance	49
3. Internet, Intranet, Extranet	47	8. Deeper Dive — Generations, Software, File Types & Emerging Tech	49
4. E-mail	48	Previous Year Questions (PYQ pattern)	51
5. Audio & Video Conferencing	48		

Expected questions: ~5 (10 marks) · Target: 5/5 — easiest unit for a CS candidate


Syllabus checklist

- ☐ ICT: general abbreviations and terminology
- ☐ Basics of Internet, Intranet, E-mail, Audio and Video-conferencing
- ☐ Digital initiatives in higher education
- ☐ ICT and Governance

1. Computer Basics

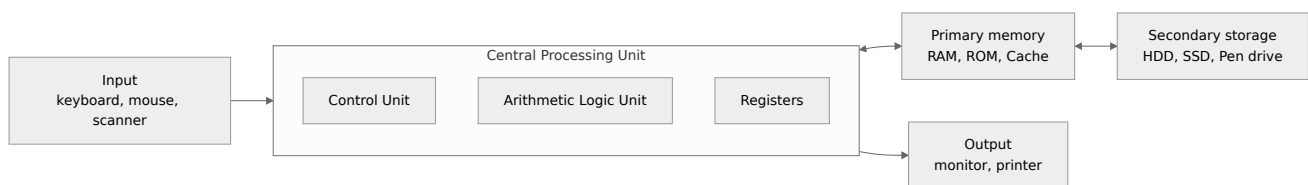

Memory hierarchy (fast/costly at top)

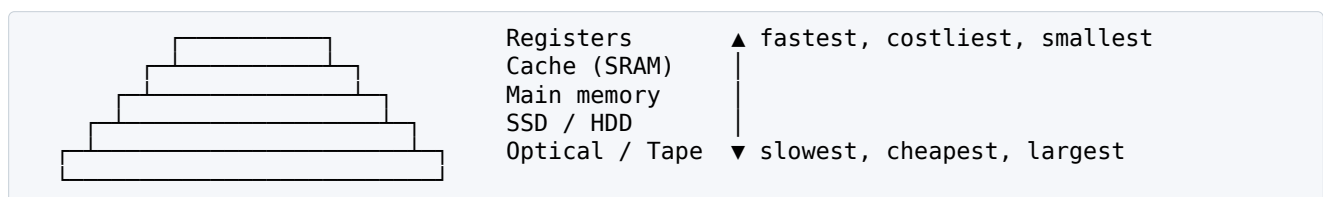

Units

1 nibble = 4 bits	1 byte = 8 bits		
1 KB = 2^{10} B	1 MB = 2^{20} B	1 GB = 2^{30} B	1 TB = 2^{40} B
1 PB = 2^{50} B	1 EB = 2^{60} B	1 ZB = 2^{70} B	1 YB = 2^{80} B


Number Systems (frequent question!)

- Binary (2), Octal (8), Decimal (10), Hexadecimal (16).
- $(25)_{10} = (11001)_2 = (31)_8 = (19)_{16}$
- $(1010.101)_2 = 10.625$
- Group 3 bits → octal, 4 bits → hex.

2. Abbreviations (must know)


Abbr.	Full form
ALU	Arithmetic Logic Unit
BIOS	Basic Input Output System
CMOS	Complementary Metal Oxide Semiconductor
DNS	Domain Name System
DHCP	Dynamic Host Configuration Protocol
FTP	File Transfer Protocol
HTML	HyperText Markup Language
HTTP(S)	HyperText Transfer Protocol (Secure)
IMAP	Internet Message Access Protocol
ISP	Internet Service Provider
LAN/MAN/WAN	Local/Metropolitan/Wide Area Network
MODEM	Modulator–Demodulator
OCR / OMR / MICR	Optical Character / Optical Mark / Magnetic Ink Character Recognition
POP3	Post Office Protocol v3
SMTP	Simple Mail Transfer Protocol
TCP/IP	Transmission Control Protocol / Internet Protocol
URL	Uniform Resource Locator
VoIP	Voice over Internet Protocol
VPN	Virtual Private Network
Wi-Fi	Wireless Fidelity
GIF, JPEG, PNG	Graphics Interchange Format, Joint Photographic Experts Group, Portable Network Graphics
PDF	Portable Document Format
CC / BCC	Carbon Copy / Blind Carbon Copy
IoT	Internet of Things
LMS	Learning Management System (Moodle)
NIC	National Informatics Centre
CERT-In	Indian Computer Emergency Response Team

3. Internet, Intranet, Extranet

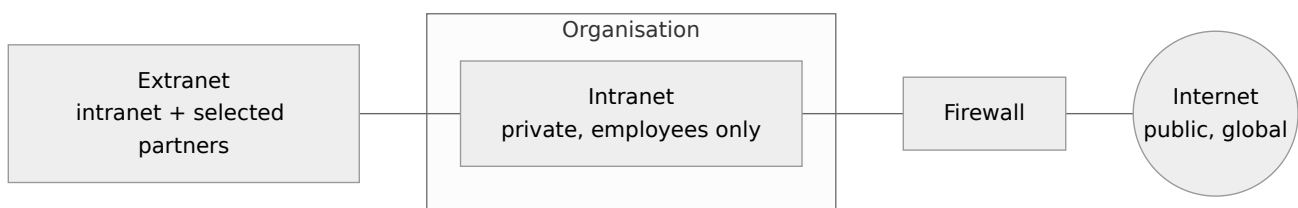

- **Internet** originated from **ARPANET (1969)**, US DoD. **WWW** invented by **Tim Berners-Lee (1989, CERN)**.
- India's first: **ERNET (1986)**; public internet by **VSNL on 15 Aug 1995**.
- IPv4 = 32 bits; IPv6 = 128 bits. Domain types: .com, .org, .edu, .gov, .ac.in, .nic.in.
- Browser = client software (Chrome, Firefox); Search engine = website (Google, Bing).
- **Cookies** = small data files stored by websites in the browser.

4. E-mail

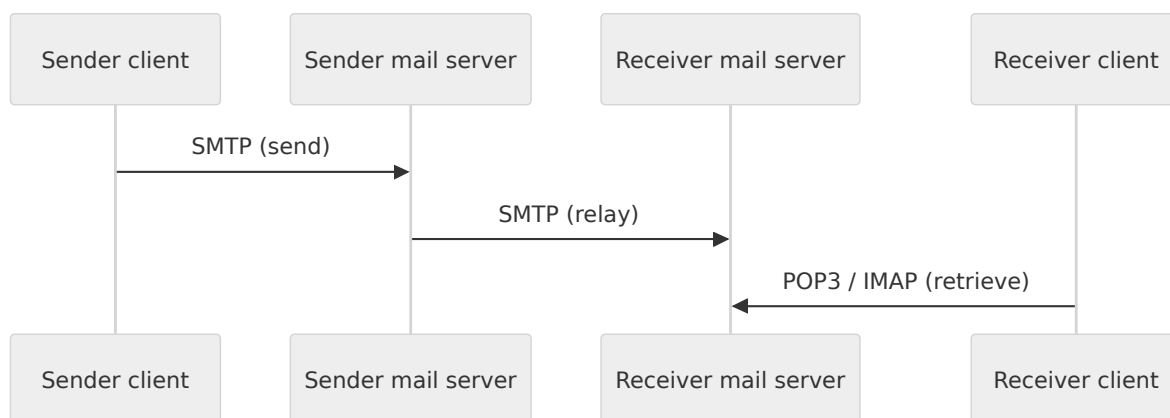

- **SMTP** = sending (port 25/587); **POP3** = download & delete (110); **IMAP** = sync, mail stays on server (143).
- First email: **Ray Tomlinson (1971)**, introduced @.
- **BCC** recipients are hidden from others. **Spam** = unsolicited mail. **Phishing** = fraudulent mail to steal data.
- Attachments: MIME (Multipurpose Internet Mail Extensions).


5. Audio & Video Conferencing

- Real-time communication over IP: Zoom, Google Meet, Microsoft Teams, Webex; government: **JioMeet, Bharat VC (NIC's)**.
- Protocols: **H.323, SIP** (Session Initiation Protocol), RTP. Codecs compress audio/video.
- Synchronous (live) vs asynchronous (recorded, forums, email) learning.
- Webinar = web seminar; Podcast = audio episodes; Vodcast = video podcast.

6. Digital Initiatives in Higher Education

Initiative	Purpose
SWAYAM	MOOCs (2017)
SWAYAM PRABHA	DTH educational TV channels
NDL India	National Digital Library (IIT Kharagpur)
e-PG Pathshala	PG e-content (UGC/INFLIBNET)
Shodhganga / Shodhgangotri	Theses / synopses repository
e-ShodhSindhu	E-journal consortium (merged UGC-INFONET, N-LIST, INDEST)
ONOS (One Nation One Subscription)	Nation-wide access to scholarly journals (2024/25)
NAD / DigiLocker	National Academic Depository — digital certificates
ABC	Academic Bank of Credits (NEP 2020)
NIRF	National Institutional Ranking Framework (2015)
AISHE	All India Survey on Higher Education
Virtual Labs, Spoken Tutorial, e-Yantra, FOSSEE	Lab/skill initiatives
SAMARTH	e-Governance suite for universities
VIDWAN	Database of experts (INFLIBNET)
PM e-VIDYA	Multi-mode access to digital education (2020)
NEAT	National Educational Alliance for Technology (AICTE, AI-based adaptive learning)
DIKSHA	Teachers' platform

7. ICT & Governance

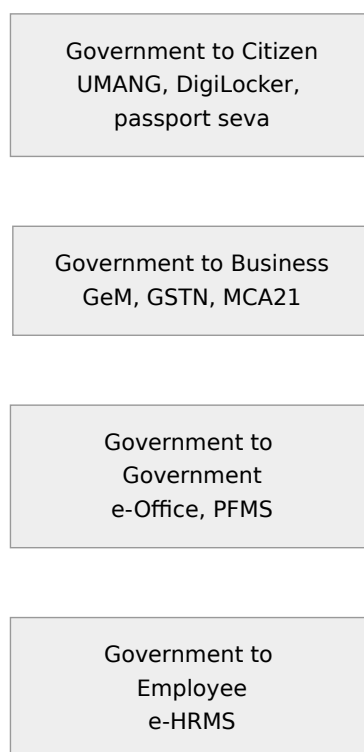

- **Digital India** (1 July 2015) — 9 pillars incl. broadband highways, e-Kranti, Information for All.
- Key platforms: **UMANG** (unified app), **DigiLocker**, **GeM** (Government e-Marketplace), **BHIM-UPI** (NPCI), **CoWIN**, **MyGov**, **e-Hospital**, **Bhashini** (language AI).
- **IT Act 2000** (amended 2008) — legal recognition of e-records & digital signatures; Sec 66A struck down (Shreya Singhal, 2015). **DPDP Act 2023**.
- Cyber security: firewall, antivirus, encryption, 2FA. Malware: virus (needs host), worm (self-replicating), Trojan (disguised), ransomware, spyware.


8. Deeper Dive — Generations, Software, File Types & Emerging Tech

8.1 Generations of Computers

Generation	Period	Technology	Example
1st	1940–56	Vacuum tubes; machine language	ENIAC, UNIVAC
2nd	1956–63	Transistors; assembly, FORTRAN, COBOL	IBM 1401
3rd	1964–71	Integrated circuits; OS, multiprogramming	IBM 360
4th	1971–present	Microprocessors (VLSI); PCs, GUI	Intel 4004 (first microprocessor)
5th	Present & beyond	AI, ULSI, parallel processing, quantum	—

India: **PARAM 8000 (1991)** by C-DAC (first Indian supercomputer); **National Supercomputing Mission (2015)**; **AIRAWAT** (AI supercomputer).

8.2 Software

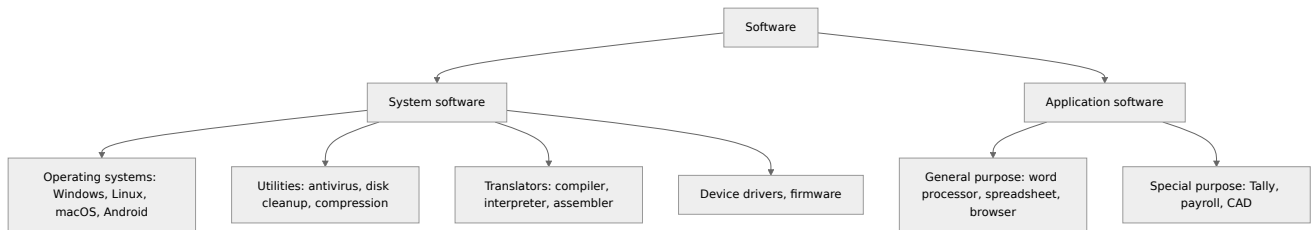

- **Open source** (source available, free to modify: Linux, LibreOffice, Moodle) vs **proprietary** (MS Office).
- **Freeware** (free, closed), **shareware** (trial), **firmware** (software in ROM/flash).

8.3 File Extensions & Office Shortcuts

Extension	Type	Extension	Type
.docx	Word document	.xlsx	Spreadsheet
.pptx	Presentation	.pdf	Portable document
.txt	Plain text	.csv	Comma-separated values
.jpg/.png/.gif	Images	.mp3/.wav	Audio
.mp4/.avi	Video	.zip/.rar	Compressed
.exe	Executable (Windows)	.html	Web page

Shortcut	Action	Shortcut	Action
Ctrl + C / X / V	Copy / cut / paste	Ctrl + Z / Y	Undo / redo
Ctrl + S	Save	Ctrl + P	Print
Ctrl + F	Find	Ctrl + H	Replace
Ctrl + A	Select all	F7	Spell check (Word)
F5	Slideshow / refresh	Alt + F4	Close window

Spreadsheet: cell address = column letter + row number (B3); **absolute reference** \$B\$3; functions SUM, AVERAGE, COUNT, IF, VLOOKUP.

8.4 Emerging Technologies (frequently asked one-liners)

Term	Meaning
Cloud computing	On-demand computing over the internet: SaaS, PaaS, IaaS
IoT	Physical devices with sensors connected to the internet
Artificial Intelligence	Machines performing tasks needing human intelligence; ChatGPT, Bhashini
Machine learning	Systems that learn patterns from data
Blockchain	Distributed, tamper-evident ledger (Bitcoin)
Big data	Volume, velocity, variety (+ veracity, value)
AR / VR	Augmented reality overlays digital on real; virtual reality is fully immersive
5G	Fifth-generation mobile; launched in India on 1 Oct 2022
Quantum computing	Qubits, superposition; India's National Quantum Mission (2023)
Open educational resources (OER)	Free, openly licensed learning materials (Creative Commons)

8.5 Internet Basics Extended

- Web 1.0 (read-only) → Web 2.0 (read-write, social media) → Web 3.0 (semantic, decentralised).
- **Search operators:** "exact phrase", `site:ac.in`, `filetype:pdf`, minus sign to exclude.
- **Bandwidth** measured in bps; **latency** in ms. Wired (Ethernet, fibre) vs wireless (Wi-Fi, 4G/5G, satellite).
- **IP address** identifies a device; **MAC address** identifies a network card (48 bits).

Previous Year Questions (PYQ pattern)

1. $(1011)_2 + (0111)_2 = ? \rightarrow (10010)_2$
2. $(237)_8$ in decimal = $2 \times 64 + 3 \times 8 + 7 = 159$
3. 1 TB equals: **1024 GB**
4. Which protocol is used to send e-mail? **SMTP**
5. Which protocol keeps mail on the server and syncs folders? **IMAP**
6. BCC stands for: **Blind Carbon Copy**
7. Which is NOT an input device? (a) scanner (b) light pen (c) plotter (d) OMR — **Ans: (c)**
8. WWW was invented by: **Tim Berners-Lee**
9. The internet originated from: **ARPANET**
10. Private network inside an organisation using internet technology: **Intranet**
11. URL stands for: **Uniform Resource Locator**
12. Which is a volatile memory? **RAM**
13. Which converts domain names to IP addresses? **DNS**
14. IPv6 address length: **128 bits**
15. "Academic Bank of Credits" is an initiative under: **NEP 2020**
16. The portal providing Indian theses: **Shodhganga**
17. The national ranking framework for HEIs: **NIRF**
18. Which is a G2B service? **GeM / GSTN**
19. Malware that replicates itself without a host program: **Worm**
20. Fraudulent attempt to obtain credentials via email: **Phishing**
21. Video conferencing protocol: **H.323 / SIP**
22. The Information Technology Act was passed in: **2000**
23. Arrange in increasing order of capacity: **KB < MB < GB < TB < PB**

More practice questions

24. The first Indian supercomputer: **PARAM 8000**
25. Integrated circuits were used in: **third-generation computers**
26. Which is open-source software? (a) MS Word (b) LibreOffice Writer (c) Photoshop (d) Windows — **Ans: (b)**
27. Absolute cell reference in a spreadsheet: **\$A\$1**
28. Shortcut to undo: **Ctrl + Z**
29. A .csv file stores: **tabular data as comma-separated text**
30. Web 2.0 is characterised by: **user-generated content and interactivity**
31. Software stored permanently in ROM: **firmware**
32. Which is NOT system software? (a) OS (b) compiler (c) spreadsheet (d) device driver — **Ans: (c)**
33. 5G services were launched in India in: **October 2022**
34. Search operator to restrict results to a website: **site:**

Quick Revision Box

- SMTP send · POP3 download · IMAP sync
- ARPANET 1969 · WWW 1989 (Berners-Lee) · India public internet 1995 (VSNL)
- IT Act 2000 · Digital India 2015 · DPDP Act 2023

People, Development & Environment

In this unit

1. MDGs → SDGs	52	6. Environmental Laws & International Agreements	55
2. Pollution — Sources & Health Effects	53	7. Deeper Dive — Climate Science, COP Timeline, Indian Programmes & Disasters	56
3. Waste Management	54	Previous Year Questions (PYQ pattern)	57
4. Natural & Energy Resources	54		
5. Natural Hazards & Disasters	54		

Expected questions: ~5 (10 marks) · Target: 4–5/5

Syllabus checklist

- ☐ Development and environment: Millennium Development and Sustainable Development Goals
- ☐ Human and environment interaction: anthropogenic activities and their impacts on environment
- ☐ Environmental issues: local, regional and global; air, water, soil, noise pollution; waste (solid, liquid, biomedical, hazardous, electronic); climate change and its socio-economic and political dimensions
- ☐ Impacts of pollutants on human health
- ☐ Natural and energy resources: solar, wind, soil, hydro, geothermal, biomass, nuclear and forests
- ☐ Natural hazards and disasters: mitigation strategies
- ☐ Environmental Protection Act (1986), NAPCC, international agreements/efforts: Montreal Protocol, Rio Summit, CBD, Kyoto Protocol, Paris Agreement, ISA

1. MDGs → SDGs

Development goals

Year	Event
2000	Millennium Development Goals (8 goals, 21 targets) — target year 2015
2015	Sustainable Development Goals (17 goals, 169 targets, 231 unique indicators) — Agenda 2030
2030	SDG target year

8 MDGs: (1) eradicate extreme poverty & hunger (2) universal primary education (3) gender equality (4) reduce child mortality (5) improve maternal health (6) combat HIV/AIDS, malaria (7) environmental sustainability (8) global partnership.


17 SDGs (memorise numbers — directly asked):

#	Goal	#	Goal
1	No Poverty	10	Reduced Inequalities
2	Zero Hunger	11	Sustainable Cities
3	Good Health & Well-being	12	Responsible Consumption & Production
4	Quality Education	13	Climate Action
5	Gender Equality	14	Life Below Water
6	Clean Water & Sanitation	15	Life on Land
7	Affordable & Clean Energy	16	Peace, Justice & Strong Institutions
8	Decent Work & Economic Growth	17	Partnerships for the Goals
9	Industry, Innovation & Infrastructure		

5 Ps of SDGs: **People, Planet, Prosperity, Peace, Partnership**. In India, **NITI Aayog** monitors (SDG India Index, 2018).

Sustainable development (Brundtland Report "Our Common Future", 1987): *development that meets the needs of the present without compromising the ability of future generations to meet their own needs*.

2. Pollution — Sources & Health Effects

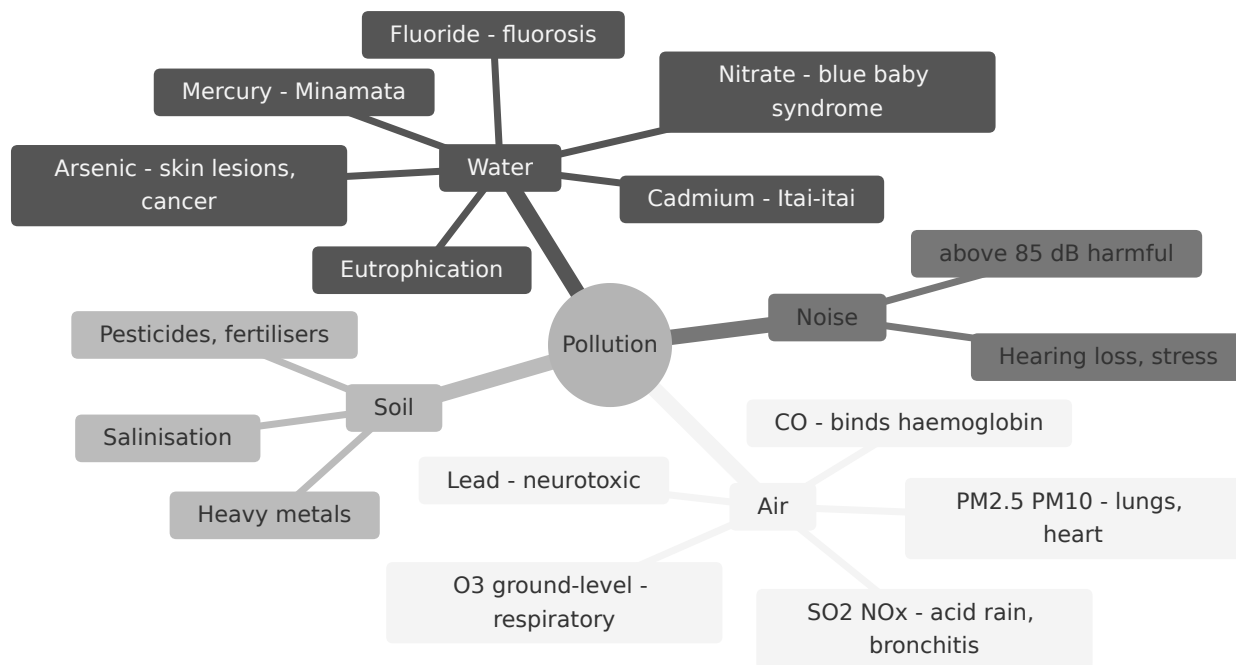

Disease/Event	Cause
Minamata disease	Mercury (Japan)
Itai-itai	Cadmium (Japan)
Blue baby syndrome (methaemoglobinaemia)	Nitrates in water
Black-foot disease	Arsenic
Fluorosis	Excess fluoride
Bhopal gas tragedy (1984)	Methyl isocyanate (MIC)
Chernobyl (1986)	Nuclear accident (Ukraine)
Silicosis	Silica dust
Asbestosis	Asbestos
London smog (1952)	SO ₂ + smoke (classical/sulphurous smog)
Photochemical smog	NO _x + VOC + sunlight → O ₃ , PAN


- **NAAQS** (CPCB): PM_{2.5} annual 40 µg/m³, 24-hr 60; PM₁₀ annual 60, 24-hr 100. **AQI** has 8 pollutants (PM₁₀, PM_{2.5}, NO₂, SO₂, CO, O₃, NH₃, Pb), 6 categories.
- **WHO 2021** guideline PM_{2.5} annual: 5 µg/m³.
- Greenhouse gases: CO₂, CH₄, N₂O, HFCs, PFCs, SF₆ (+ NF₃ under Doha amendment). GWP: CO₂=1, CH₄≈28, N₂O≈265, SF₆≈23,500.
- Ozone depletion: **CFCs** (chlorine radicals); ozone measured in **Dobson Units**; ozone layer in stratosphere.

3. Waste Management

Waste	Rules in India
Solid waste	Solid Waste Management Rules 2016 — segregation at source (wet, dry, hazardous)
Plastic	Plastic Waste Management Rules 2016 (amended 2021/22) — single-use plastic ban from 1 July 2022
E-waste	E-Waste (Management) Rules 2016 → 2022 (EPR — Extended Producer Responsibility)
Bio-medical	Bio-Medical Waste Management Rules 2016 — colour-coded bins (yellow, red, white, blue)
Hazardous	Hazardous & Other Wastes Rules 2016
C&D waste	Construction & Demolition Waste Rules 2016


Waste hierarchy (most → least preferred): **Prevent → Reduce → Reuse → Recycle → Recover → Dispose.**

4. Natural & Energy Resources

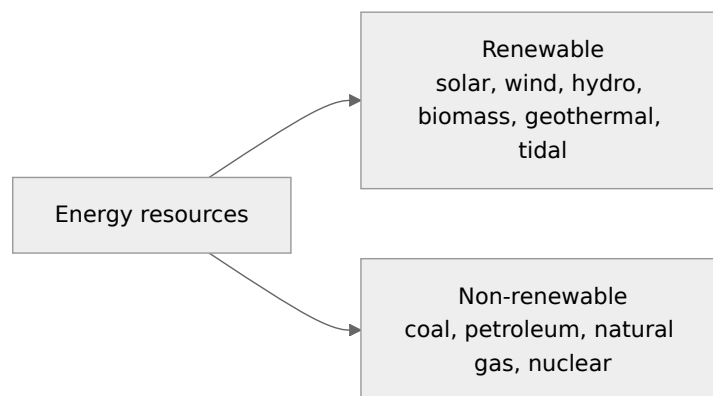

- India's targets: **500 GW non-fossil capacity by 2030; Net zero by 2070** (Panchamrit, COP26 Glasgow).
- Largest share of India's electricity: **coal (thermal)**. Largest renewable: **solar** (overtook wind).
- Top states: solar — Rajasthan, Gujarat; wind — Gujarat, Tamil Nadu.
- Nuclear: Tarapur (first, 1969). Geothermal sites: Puga Valley (Ladakh). Tidal potential: Gulf of Khambhat, Kutch.
- India's forest cover ~21.7% (ISFR 2021); tree + forest ~25%. National Forest Policy 1988 target: **33%**.

5. Natural Hazards & Disasters

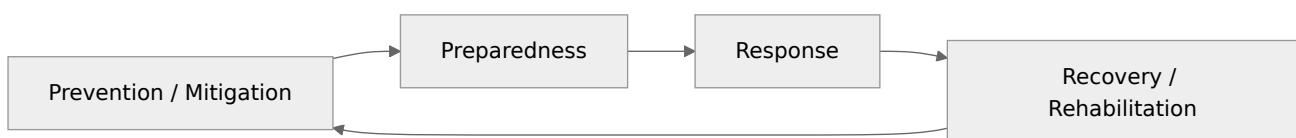

- **Disaster Management Act 2005** → **NDMA** (chaired by PM), **SDMA** (CM), **DDMA** (Collector). **NDRF** (response force).
- **Sendai Framework (2015–2030)** — 4 priorities, 7 targets (succeeded Hyogo Framework 2005–2015).
- Hazards: earthquake (Richter/moment magnitude), cyclone, flood, drought, landslide, tsunami (2004 Indian Ocean).
- Risk = Hazard × Vulnerability / Capacity.

6. Environmental Laws & International Agreements

Indian Acts

Act	Year
Wildlife Protection Act	1972
Water (Prevention & Control of Pollution) Act	1974 (created CPCB)
Forest (Conservation) Act	1980
Air (Prevention & Control of Pollution) Act	1981
Environment (Protection) Act	1986 (post-Bhopal; umbrella act)
Biological Diversity Act	2002
National Green Tribunal Act	2010

NAPCC (2008) — 8 National Missions: Solar, Enhanced Energy Efficiency, Sustainable Habitat, Water, Sustaining Himalayan Ecosystem, Green India, Sustainable Agriculture, Strategic Knowledge on Climate Change.

International


Global environment milestones

Year	Event
1972	Stockholm Conference — UNEP created
1985	Vienna Convention (ozone)
1987	Montreal Protocol — ODS phase out · Brundtland Report
1992	Rio Earth Summit — UNFCCC, CBD, Agenda 21, UNCCD process
1997	Kyoto Protocol — binding targets for developed countries (in force 2005)
2002	Johannesburg (Rio+10)
2012	Rio+20 — The Future We Want
2015	Paris Agreement COP21 — well below 2°C, aim 1.5°C, NDCs · ISA launched
2016	Kigali Amendment — phase down HFCs
2021	COP26 Glasgow — India net zero 2070

Agreement	Key point
Ramsar (1971)	Wetlands
CITES (1973)	Trade in endangered species
Montreal (1987)	Ozone-depleting substances; most successful treaty
Basel (1989)	Transboundary hazardous waste
CBD (1992)	Biodiversity; Cartagena (biosafety, 2000), Nagoya (ABS, 2010), Kunming-Montreal GBF (2022, 30x30)
Kyoto (1997)	CDM, Joint Implementation, Emissions Trading; Annex-I countries' targets; 1st commitment 2008–12
Paris (2015)	NDCs every 5 years; global stocktake
Stockholm Convention (2001)	POPs (persistent organic pollutants)
Minamata Convention (2013)	Mercury
ISA	International Solar Alliance — launched by India & France at COP21 (2015); HQ Gurugram; "One Sun One World One Grid"

7. Deeper Dive — Climate Science, COP Timeline, Indian Programmes & Disasters

7.1 Greenhouse Effect & Climate Change



- Pre-industrial CO₂ ≈ 280 ppm; now > 420 ppm. Largest anthropogenic GHG by volume: **CO₂**; methane is far more potent per molecule over 20 years.
- **IPCC** (1988, UNEP + WMO) assessment reports; AR6 (2021–23): warming about 1.1 °C above pre-industrial.
- Impacts: sea-level rise, glacier retreat, heatwaves, extreme rainfall, ocean acidification, coral bleaching, crop yield changes, vector-borne diseases.
- **Socio-economic & political dimensions**: climate justice; **CBDR-RC** (Common But Differentiated Responsibilities and Respective Capabilities) — principle from Rio 1992; loss and damage fund (COP27, Sharm el-Sheikh 2022); climate finance (USD 100 billion goal; NCQG at COP29 Baku 2024).
- Mitigation (reduce emissions) vs **adaptation** (adjust to impacts).
- **Carbon credit** = 1 tonne CO₂-equivalent reduced. India's Carbon Credit Trading Scheme (2023). **LiFE** (Lifestyle for Environment) mission launched by India at COP26.

7.2 Conference of Parties (COP) — Key Milestones

COP	Year & place	Outcome
COP1	1995 Berlin	Berlin Mandate
COP3	1997 Kyoto	Kyoto Protocol
COP8	2002 New Delhi	Delhi Declaration
COP13	2007 Bali	Bali Action Plan
COP15	2009 Copenhagen	Copenhagen Accord
COP16	2010 Cancun	Green Climate Fund
COP21	2015 Paris	Paris Agreement; ISA launched
COP26	2021 Glasgow	Glasgow Climate Pact; India Panchamrit, net zero 2070
COP27	2022 Sharm el-Sheikh	Loss & damage fund
COP28	2023 Dubai	First global stocktake; "transition away from fossil fuels"
COP29	2024 Baku	New climate finance goal (NCQG)

7.3 Indian Environmental Programmes

Programme	Year	Aim
Ganga Action Plan	1985	River cleaning → Namami Gange (2014)
National Clean Air Programme (NCAP)	2019	Cut PM by 20–30% (revised 40%) in non-attainment cities
Swachh Bharat Mission	2014	Sanitation, ODF
Pradhan Mantri Ujjwala Yojana	2016	LPG to poor households (reduces indoor air pollution)
UJALA	2015	LED bulbs — energy efficiency
National Green Hydrogen Mission	2023	Green hydrogen production
Nagar Van Yojana	2020	Urban forests
Green India Mission	NAPCC	Increase forest/tree cover
Bharat Stage VI emission norms	2020	Leapfrogged from BS-IV

Environmental movements: **Chipko** (1973, Uttarakhand — Sunderlal Bahuguna, Gaura Devi), **Appiko** (1983, Karnataka), **Silent Valley** (Kerala), **Narmada Bachao Andolan** (Medha Patkar), **Bishnoi** sacrifice (Khejarli, 1730, Amrita Devi).

7.4 Disasters — Scales & Facts

Hazard	Measure / fact
Earth-quake	Magnitude (Richter / moment magnitude — logarithmic); intensity (Modified Mercalli, I–XII); India has seismic zones II–V (Zone V highest: NE, J&K, Kutch)
Cyclone	IMD categories; named by WMO/ESCAP panel; Bay of Bengal more cyclone-prone than Arabian Sea
Tsunami	Caused by undersea earthquakes; INCOIS Hyderabad runs the warning centre
Flood	Most frequent disaster in India; Assam, Bihar most affected
Drought	Meteorological, hydrological, agricultural
Landslide	Himalayas and Western Ghats
Heat wave	Declared by IMD when max temp $\geq 40^\circ\text{C}$ (plains) and departure $\geq 4.5^\circ\text{C}$

Disaster management cycle: **Mitigation** → **Preparedness** → **Response** → **Recovery**.

7.5 Renewable Energy — India Snapshot

- Installed renewable capacity crossed **200 GW** (2024); solar is the largest renewable source.
- Largest solar park: **Bhadla (Rajasthan)**; large hybrid park: **Khavda (Gujarat)**.
- **PM-KUSUM** (solar pumps for farmers), **PM Surya Ghar Muft Bijli Yojana** (2024, rooftop solar).
- Hydro: Tehri dam (tallest in India); nuclear plants: Kudankulam (largest), Tarapur (oldest).

Previous Year Questions (PYQ pattern)

1. How many SDGs and targets? **17 goals, 169 targets**
2. SDG 4 is about: **Quality education**; SDG 13: **Climate action**
3. The Brundtland report is titled: **Our Common Future (1987)**
4. Minamata disease is caused by: **Mercury**
5. Blue baby syndrome is caused by excess: **Nitrates**
6. Bhopal gas tragedy gas: **Methyl isocyanate**
7. Which is NOT a greenhouse gas? (a) CO_2 (b) CH_4 (c) N_2 (d) N_2O — **Ans: (c)**
8. Montreal Protocol relates to: **ozone-depleting substances**
9. Kigali Amendment aims to phase down: **HFCs**
10. Kyoto Protocol came into force in: **2005**
11. Paris Agreement aims to limit warming to: **well below 2°C , pursue 1.5°C**
12. ISA headquarters: **Gurugram, India**
13. Environment (Protection) Act enacted in: **1986**
14. Number of missions in NAPCC: **8**
15. NDMA is chaired by: **Prime Minister**
16. Sendai Framework period: **2015–2030**
17. Arrange chronologically: Stockholm (1972), Montreal (1987), Rio (1992), Kyoto (1997), Paris (2015)
18. Which pollutant is NOT included in India's AQI? (a) $\text{PM}_{2.5}$ (b) NH_3 (c) CO_2 (d) Pb — **Ans: (c)**
19. India's net-zero target year: **2070**
20. Ozone thickness is measured in: **Dobson units**
21. Which is a renewable resource? **Geothermal**
22. E-waste rules make producers responsible through: **Extended Producer Responsibility (EPR)**
23. CBD was opened for signature at: **Rio Earth Summit 1992**

More practice questions

24. The IPCC was established in: **1988 by UNEP and WMO**
25. The principle of CBDR originated at: **Rio Earth Summit 1992**

26. The loss and damage fund was agreed at: **COP27, Sharm el-Sheikh**
27. COP28 was held in: **Dubai (2023)**
28. National Clean Air Programme was launched in: **2019**
29. Chipko movement began in: **1973 (Uttarakhand)**
30. India's highest seismic zone: **Zone V**
31. Tsunami early-warning centre of India is at: **INCOIS, Hyderabad**
32. The most frequent natural disaster in India: **floods**
33. The LiFE mission was announced by India at: **COP26 Glasgow**
34. Bhadla solar park is in: **Rajasthan**
35. Arrange COPs chronologically: Kyoto (COP3) → Copenhagen (COP15) → Paris (COP21) → Glasgow (COP26)

Quick Revision Box

- MDG 8 (2000–15) · SDG 17/169 (2015–30)
- Hg–Minamata · Cd–Itai-itai · NO₃–blue baby · As–black foot · F–fluorosis
- EPA 1986 · NAPCC 2008 (8 missions) · DM Act 2005 · NGT 2010
- Montreal 87 · Rio 92 · Kyoto 97 · Paris 15 · Kigali 16 · ISA 2015 (Gurugram)

Higher Education System

In this unit

1. Ancient Indian Centres of Learning	59	6. Skill-based & Professional Education	61
2. Evolution of Higher Education — Timeline	60	7. Value & Environmental Education	62
3. NEP 2020 — Higher Education Highlights (most asked)	60	8. Governance & Administration	62
4. Types of Institutions & Programmes	61	9. Deeper Dive — NEP 2020 Details, Quality Frameworks & Key Regulations	62
5. Regulatory & Professional Bodies	61	Previous Year Questions (PYQ pattern)	64

Expected questions: ~5 (10 marks) · Target: 4–5/5

Syllabus checklist

- ☐ Institutions of higher learning and education in ancient India
- ☐ Evolution of higher learning and research in post-independence India
- ☐ Oriental, conventional and non-conventional learning programmes in India
- ☐ Professional, technical and skill-based education
- ☐ Value education and environmental education
- ☐ Policies, governance and administration

1. Ancient Indian Centres of Learning

Centre	Location (present)	Key facts
Takshashila	Rawalpindi, Pakistan	Oldest (~6th c. BCE); Chanakya, Panini, Charaka, Jivaka; no formal degrees
Nalanda	Bihar	Founded by Kumaragupta I (Gupta, 5th c. CE); Xuanzang & I-tsing studied; library <i>Dharmaganja</i> (Ratnasagara, Ratnodadhi, Ratnaranjaka); destroyed by Bakhtiyar Khalji (~1193)
Vikramashila	Bhagalpur, Bihar	Founded by Dharmapala (Pala, 8th c.); Tantric Buddhism; Atisha Dipankara
Valabhi	Gujarat	Maitraka dynasty; Hinayana Buddhism
Odantapuri	Bihar	Gopala (Pala)
Somapura Mahavihara	Bangladesh	Dharmapala; UNESCO site
Kanchi (Kanchipuram)	Tamil Nadu	Pallavas; Ghatika
Pushpagiri	Odisha	
Jagaddala	Bengal	Ramapala


Vedic education: **Gurukul**; teaching via *Shravana* (listening) → *Manana* (reflection) → *Nididhyasana* (meditation). Upanayana ceremony marked entry. Buddhist education: *Pabbajja* (entry) and *Upasampada* (full ordination) ceremonies; viharas & monasteries.

2. Evolution of Higher Education — Timeline

Modern higher education in India

Year	Event
1781	Calcutta Madrasa (Warren Hastings)
1791	Sanskrit College, Benares (Jonathan Duncan)
1813	Charter Act — ₹1 lakh for education
1835	Macaulay's Minute — English education
1854	Wood's Despatch — "Magna Carta of English education in India"
1857	Universities of Calcutta, Bombay, Madras (London University model)
1882	Hunter Commission
1902	Raleigh Commission → Indian Universities Act 1904
1917	Sadler (Calcutta University) Commission
1948	Radhakrishnan Commission (University Education Commission) — recommended UGC
1953	UGC set up (formally inaugurated 28 Dec 1953)
1956	UGC Act — statutory body
1964	Kothari Commission (1964-66) — 10+2+3; "destiny of India is being shaped in her classrooms"
1968	First National Policy on Education
1986	NPE 1986 (revised 1992 — Programme of Action)
2005	National Knowledge Commission (Sam Pitroda)
2009	Yashpal Committee
2013	RUSA
2020	National Education Policy 2020 (K. Kasturirangan)

3. NEP 2020 — Higher Education Highlights (most asked)

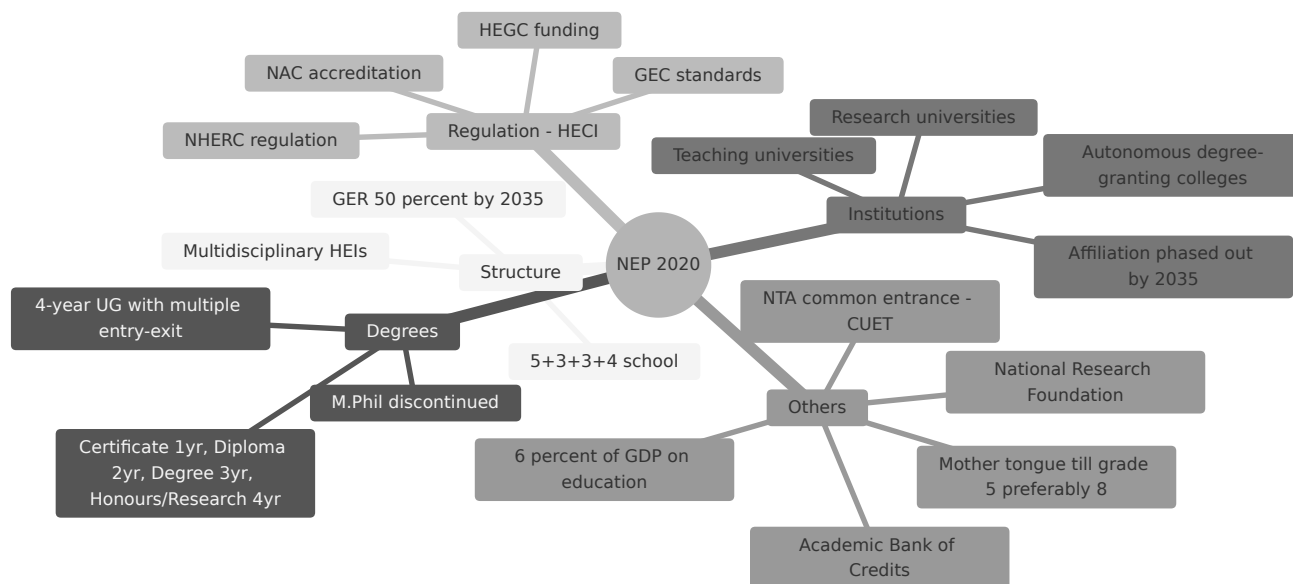

- **HECI** (Higher Education Commission of India) — single umbrella regulator with 4 verticals: NHERC, NAC, HEGC, GEC (proposed; would subsume UGC/AICTE/NCTE except medical & legal).
- **ANRF** (Anusandhan National Research Foundation) Act 2023 — implements NRF idea.
- **Multidisciplinary Education & Research Universities (MERUs)**.

4. Types of Institutions & Programmes

Type	Notes
Central university	Act of Parliament (e.g. JNU, DU, BHU, AMU)
State university	State Act
Deemed-to-be university	Sec 3 of UGC Act, declared by Central Govt on UGC advice
Private university	State Act; cannot affiliate colleges
Institutions of National Importance	Act of Parliament (IITs, NITs, AIIMS, IIMs)
Institution of Eminence	2017 scheme — 10 public + 10 private
Open universities	IGNOU (1985); first state open univ: Dr. B.R. Ambedkar Open Univ, Hyderabad (1982)

- **Oriental learning:** Sanskrit, Pali, Persian, Arabic institutions — e.g. Rashtriya Sanskrit Sansthan; Central Sanskrit University (2020).
- **Conventional:** classroom-based degrees. **Non-conventional:** distance, open, online, MOOCs, part-time.

5. Regulatory & Professional Bodies

Body	Field	Est.
UGC	Universities (funding, standards)	1953 / Act 1956
AICTE	Technical education	1945 (statutory 1987)
NCTE	Teacher education	1973 (statutory 1993)
NMC	Medical (replaced MCI)	2020
BCI	Legal education	1961
ICAR	Agriculture	1929
PCI / INC / DCI	Pharmacy / Nursing / Dental	
COA	Architecture	1972
RCI	Rehabilitation	1992
NAAC	Accreditation of HEIs (Bengaluru)	1994
NBA	Accreditation of programmes (technical)	1994
NIRF	Ranking (MoE)	2015
NTA	Testing (UGC NET, CUET, NEET, JEE Main)	2017
CABE	Central Advisory Board of Education — oldest advisory body	1920/1935
NIEPA	Educational planning & admin	

NAAC grades: A++, A+, A, B++, B+, B, C, D on 4-point CGPA; criteria = 7 (Curricular aspects; Teaching-learning & evaluation; Research, innovations & extension; Infrastructure; Student support; Governance; Institutional values & best practices).


6. Skill-based & Professional Education

- **Skill India / PMKVY** (2015), **NSQF** (National Skills Qualification Framework, levels 1–10), **NCVET** (2018), B.Voc / D.Voc, Community colleges, **Apprenticeship embedded degree programmes**.
- **NHEQF** (National Higher Education Qualification Framework, levels 4.5–8) & **NCrF** (National Credit Framework).

7. Value & Environmental Education

- Value education: truth, non-violence, peace, love, right conduct (Sathya Sai model); constitutional values; NEP emphasises ethics, Indian Knowledge Systems (IKS).
- Environmental education made compulsory at all levels by **Supreme Court (M.C. Mehta case, 1991/2003)**; UGC mandated a 6-month core module course for UG.
- **Tbilisi Declaration (1977)** — first intergovernmental conference on environmental education (UNESCO-UNEP); Belgrade Charter (1975).


8. Governance & Administration

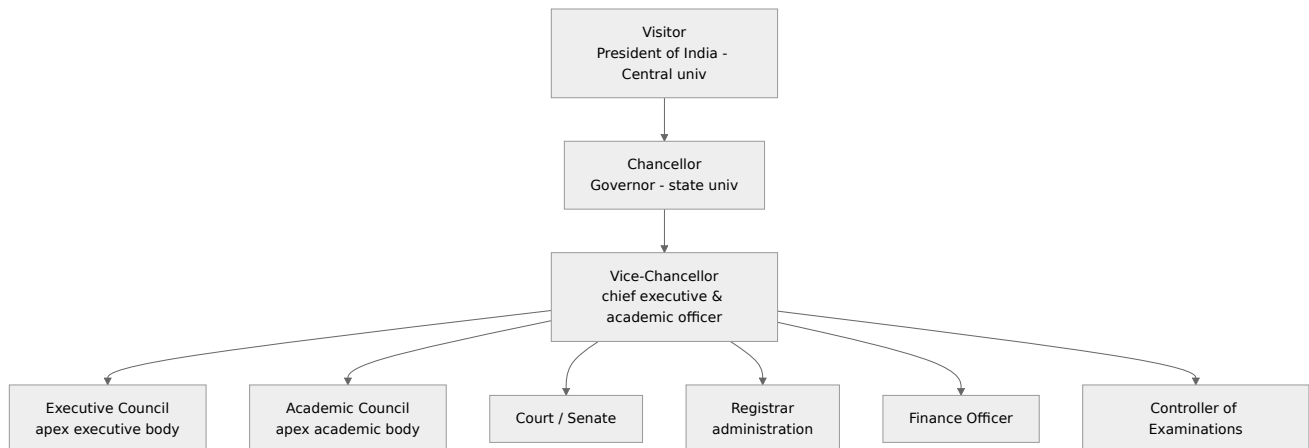

- Education was moved from State List to **Concurrent List** by the **42nd Amendment (1976)**.
- **Article 21A** — right to education (6–14 yrs) via 86th Amendment 2002; RTE Act 2009.
- Article 30 — minorities' right to establish institutions; Article 45 — ECCE; Article 46 — education of SC/ST/weaker sections.
- Entry 66, Union List — coordination & determination of standards in higher education.
- **Ministry of Education** (renamed from MHRD in 2020). **RUSA (2013)** — funding to state HEIs.

9. Deeper Dive — NEP 2020 Details, Quality Frameworks & Key Regulations

9.1 NEP 2020 — Multiple Entry/Exit & Credit System

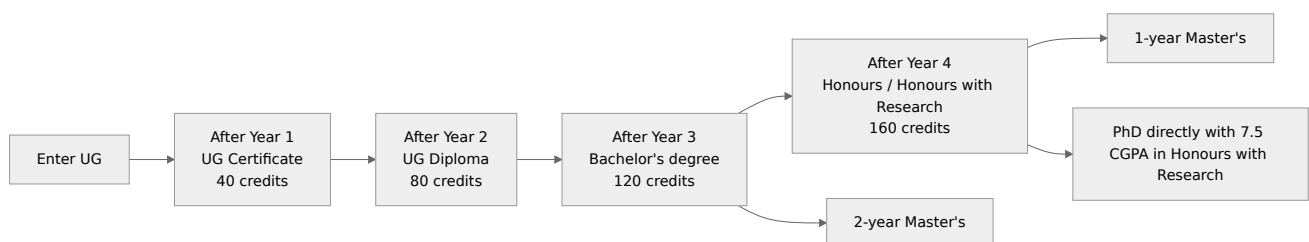

- **UGC Curriculum & Credit Framework for UG Programmes (CCFUP, 2022)**; credits stored in **Academic Bank of Credits (ABC)**, ID via DigiLocker / APAAR ID (One Nation One Student ID).
- Students may earn up to **40% of credits** through SWAYAM/online courses per semester (UGC Credit Framework for Online Learning Courses through SWAYAM, 2021).
- Course categories: Major (core), Minor, Multidisciplinary, Ability Enhancement (AEC), Skill Enhancement (SEC), Value-Added (VAC), internships, research project.
- **UGC (Minimum Standards and Procedures for Award of PhD) Regulations 2022**: 4-year UG (with 7.5 CGPA) eligible for PhD; M.Phil not required; 2-year coursework rule relaxed; publication requirement removed.
- **Professor of Practice** scheme (2022): industry experts can teach (up to 10% of sanctioned posts).
- Foreign university campuses permitted (UGC Regulations 2023); GIFT City.

- **Light but tight** regulation; graded autonomy; Board of Governors for institutions.

9.2 NIRF — Parameters (since 2016)

Parameter	Weight (overall category)
Teaching, Learning & Resources (TLR)	30%
Research & Professional Practice (RP)	30%
Graduation Outcomes (GO)	20%
Outreach & Inclusivity (OI)	10%
Perception (PR)	10%

9.3 NAAC Grading (cumulative GPA on a 4-point scale)

CGPA range	Grade	Status
3.51–4.00	A++	Accredited
3.26–3.50	A+	Accredited
3.01–3.25	A	Accredited
2.76–3.00	B++	Accredited
2.51–2.75	B+	Accredited
2.01–2.50	B	Accredited
1.51–2.00	C	Accredited
≤ 1.50	D	Not accredited

NAAC is moving to **binary accreditation** (accredited / not accredited) and **Maturity-Based Graded Levels (1–5)** following the Radhakrishnan Committee (2022–24) recommendations.

9.4 Constitutional & Legal Provisions on Education

Provision	Content
Article 21A	Free & compulsory education 6–14 years (86th Amendment, 2002)
Article 28	No religious instruction in fully state-funded institutions
Article 29	Protection of minorities' cultural & educational interests
Article 30	Minorities' right to establish & administer institutions
Article 45	Early childhood care & education below 6 years (DPSP)
Article 46	Promote education of SC/ST & weaker sections
Article 51A(k)	Parent's duty to provide education to child 6–14
Article 350A	Instruction in mother tongue at primary stage
Union List entry 63–66	Institutions of national importance; standards in higher education
Concurrent List entry 25	Education (since 42nd Amendment)

9.5 Value Education & Indian Knowledge Systems

- **IKS division** at AICTE (2020); Bharatiya Bhasha Samiti; courses on Indian philosophy, mathematics, astronomy, Ayurveda.
- Value frameworks: Delors Commission (UNESCO, 1996) "**Learning: The Treasure Within**" — **four pillars**: learning to know, to do, to live together, to be.
- **Mulya Pravah** (UGC, 2019, revised 2.0 in 2023): guidelines for human values & professional ethics in HEIs.
- **Deeksharambh**: student induction programme (UGC).
- **Paramarsh** (mentoring for NAAC accreditation), **STRIDE** (research), **LOCF** (learning outcomes-based curriculum framework).

Previous Year Questions (PYQ pattern)

1. Nalanda University was founded by: **Kumaragupta I**
2. Vikramashila was founded by: **Dharmapala**
3. Which Chinese traveller studied at Nalanda? **Xuanzang (Hiuen Tsang)** and I-tsing
4. Nalanda was destroyed by: **Bakhtiyar Khalji**
5. Takshashila is located in present-day: **Pakistan**
6. "Magna Carta of English education in India": **Wood's Despatch 1854**
7. The first three universities were established in: **1857**
8. University Education Commission (1948) was chaired by: **Dr. S. Radhakrishnan**
9. 10+2+3 pattern was recommended by: **Kothari Commission**
10. UGC became a statutory body in: **1956**
11. NEP 2020 GER target for higher education: **50% by 2035**
12. Which degree is discontinued by NEP 2020? **M.Phil**
13. NEP 2020 proposes a single regulator: **HECI**
14. NAAC is located in: **Bengaluru**
15. Programme-level accreditation for engineering: **NBA**
16. Education was placed in the Concurrent List by: **42nd Amendment, 1976**
17. Right to Education is under Article: **21A**
18. IGNOU was established in: **1985**
19. Apex academic body of a university: **Academic Council**
20. Who is the Visitor of central universities? **President of India**
21. Number of NAAC criteria: **7**
22. The Tbilisi conference (1977) dealt with: **Environmental education**
23. Arrange chronologically: Macaulay's Minute (1835), Wood's Despatch (1854), Hunter (1882), Sadler (1917), Radhakrishnan (1948), Kothari (1964–66)

More practice questions

24. Credits required for a UG certificate under NEP's multiple exit: **40**
25. Maximum credits that can be earned through SWAYAM per semester (UGC 2021): **40%**
26. "Learning: The Treasure Within" is the report of the: **Delors Commission (UNESCO, 1996)**
27. Four pillars of learning do NOT include: (a) to know (b) to do (c) to compete (d) to be — **Ans: (c)**
28. Weight of Teaching, Learning & Resources in NIRF overall ranking: **30%**
29. NAAC grade for CGPA 3.30: **A+**
30. Article 30 deals with: **right of minorities to establish educational institutions**
31. Article 350A provides for: **instruction in mother tongue at the primary stage**
32. Mulya Pravah guidelines relate to: **human values and professional ethics in HEIs**
33. Student induction programme of UGC: **Deeksharambh**
34. UGC scheme for mentoring institutions towards accreditation: **Paramarsh**
35. Under UGC PhD Regulations 2022, a 4-year UG graduate needs a minimum CGPA of: **7.5**

Quick Revision Box

- Nalanda–Kumaragupta I · Vikramashila–Dharmapala · Destroyer–Khalji
- 1835 Macaulay · 1854 Wood · 1857 3 univs · 1948 Radhakrishnan · 1953/56 UGC · 1964-66 Kothari · 1968/1986 NPE · 2020 NEP
- NEP: GER 50% (2035), 4-yr UG, ABC, HECI (4 verticals), M.Phil out

Paper 2

Computer Science & Applications

Discrete Structures & Optimization

In this unit

1. Mathematical Logic	67	6. Boolean Algebra	71
2. Sets & Relations	68	7. Optimization	72
3. Counting & Probability	69	8. Deeper Dive — Worked Simplex, Transportation, Assignment, Groups & Recurrences	73
4. Algebraic Structures	70	Previous Year Questions (PYQ pattern)	75
5. Graph Theory	70		

Expected questions: 10–12 · Target: 9+ · Type: numerical + concept

Syllabus checklist

- ☐ Mathematical logic: propositional & predicate logic, propositional equivalences, normal forms, predicates & quantifiers, nested quantifiers, rules of inference
- ☐ Sets & relations: set operations, representation & properties of relations, equivalence relations, partially ordering
- ☐ Counting, mathematical induction & discrete probability: basics of counting, pigeonhole principle, permutations & combinations, inclusion-exclusion, mathematical induction, probability, Bayes' theorem
- ☐ Group theory: groups, subgroups, semigroups, product & quotients of algebraic structures, isomorphism, homomorphism, automorphism, rings, integral domains, fields, applications of group theory
- ☐ Graph theory: simple graph, multigraph, weighted graph, paths & circuits, shortest paths, Eulerian & Hamiltonian, planar graph, graph colouring, bipartite graphs, trees & rooted trees, prefix codes, tree traversals, spanning trees & cut-sets
- ☐ Boolean algebra: Boolean functions & representation, simplification
- ☐ Optimization: linear programming (graphical, simplex, duality), integer programming, transportation & assignment, PERT-CPM

1. Mathematical Logic

1.1 Connectives & Truth Table

p	q	$\neg p$	$p \wedge q$	$p \vee q$	$p \rightarrow q$	$p \leftrightarrow q$	$p \oplus q$
T	T	F	T	T	T	T	F
T	F	F	F	T	F	F	T
F	T	T	F	T	T	F	T
F	F	T	F	F	T	T	F

$p \rightarrow q$ is false ONLY when p is true and q is false.

Implication family ($p \rightarrow q$)

Converse $q \rightarrow p$

Inverse $\neg p \rightarrow \neg q$

Contrapositive $\neg q \rightarrow \neg p \equiv p \rightarrow q$ (logically equivalent)

Converse $\equiv$ Inverse

1.2 Important Equivalences

$p \rightarrow q \equiv \neg p \vee q$
 $p \leftrightarrow q \equiv (p \rightarrow q) \wedge (q \rightarrow p)$
 De Morgan $\neg(p \wedge q) \equiv \neg p \vee \neg q$; $\neg(p \vee q) \equiv \neg p \wedge \neg q$
 Absorption $p \vee (p \wedge q) \equiv p$; $p \wedge (p \vee q) \equiv p$
 Exportation $(p \wedge q) \rightarrow r \equiv p \rightarrow (q \rightarrow r)$
 $(p \rightarrow q) \wedge (p \rightarrow r) \equiv p \rightarrow (q \wedge r)$
 $(p \rightarrow r) \wedge (q \rightarrow r) \equiv (p \vee q) \rightarrow r$

- **Tautology**: always true ($p \vee \neg p$). **Contradiction**: always false. **Contingency**: neither.
- Functionally complete sets: $\{\wedge, \neg\}$, $\{\vee, \neg\}$, $\{\text{NAND}\}$, $\{\text{NOR}\}$, $\{\rightarrow, \neg\}$, $\{\rightarrow, F\}$.

1.3 Normal Forms

- **CNF** = AND of ORs (product of sums); **DNF** = OR of ANDs (sum of products).
- Number of Boolean functions on n variables = 2^{2^n} .

1.4 Rules of Inference

Rule	Form
Modus Ponens	$p, p \rightarrow q \vdash q$
Modus Tollens	$\neg q, p \rightarrow q \vdash \neg p$
Hypothetical syllogism	$p \rightarrow q, q \rightarrow r \vdash p \rightarrow r$
Disjunctive syllogism	$p \vee q, \neg p \vdash q$
Addition	$p \vdash p \vee q$
Simplification	$p \wedge q \vdash p$
Resolution	$p \vee q, \neg p \vee r \vdash q \vee r$
Universal instantiation	$\forall x P(x) \vdash P(c)$
Existential generalisation	$P(c) \vdash \exists x P(x)$

Fallacies: affirming the consequent ($q, p \rightarrow q \vdash p$ ✗), denying the antecedent ($\neg p, p \rightarrow q \vdash \neg q$ ✗).

1.5 Predicates & Quantifiers

$\neg \forall x P(x) \equiv \exists x \neg P(x)$ $\neg \exists x P(x) \equiv \forall x \neg P(x)$
 $\forall x (P \wedge Q) \equiv \forall x P \wedge \forall x Q$ $\exists x (P \vee Q) \equiv \exists x P \vee \exists x Q$
 $\exists x \forall y P(x, y) \rightarrow \forall y \exists x P(x, y)$ (valid; converse NOT valid)
 "All students are smart" $\forall x (S(x) \rightarrow M(x))$ ← use $\rightarrow$ with $\forall$
 "Some students are smart" $\exists x (S(x) \wedge M(x))$ ← use $\wedge$ with $\exists$

2. Sets & Relations

- $|A \cup B| = |A| + |B| - |A \cap B|$; $|P(A)| = 2^n$; $|A \times B| = mn$.
- Number of relations on A ($|A| = n$) = 2^{n^2} .


Relation type	Count on n elements
Reflexive	$2^{(n^2 - n)}$
Irreflexive	$2^{(n^2 - n)}$
Symmetric	$2^{(n(n+1)/2)}$
Antisymmetric	$2^n \cdot 3^{(n(n-1)/2)}$
Asymmetric	$3^{(n(n-1)/2)}$

Relation type	Count on n elements
Reflexive & symmetric	$2^{n(n-1)/2}$
Equivalence relations	Bell number B_n (1, 1, 2, 5, 15, 52, 203 ...)
Functions $A \rightarrow B$ (	A
One-one ($m \leq n$)	$n!/(n-m)!$
Onto	$\sum (-1)^k C(n,k) (n-k)^m$
Bijections ($m = n$)	$n!$

Equivalence relation = Reflexive + Symmetric + Transitive $\rightarrow$ partitions the set into equivalence classes.


Partial order (POSET) = Reflexive + Antisymmetric + Transitive.

Hasse diagram of divisibility on $\{1, 2, 3, 6, 12\}$:




- **Lattice:** every pair has LUB (join, $\vee$) and GLB (meet, $\wedge$).
- **Bounded:** has 0 (least) and 1 (greatest). **Complemented:** every element has a complement. **Distributive:** no sub-lattice isomorphic to M_3 (diamond) or N_5 (pentagon).
- **Boolean algebra** = complemented + distributive lattice. Divisor lattice D_n is Boolean iff n is square-free.
- **Total order (chain):** every pair comparable. **Well-ordered:** every nonempty subset has least element.

M_3 (diamond)



N_5 (pentagon)



$\rightarrow$ Neither is distributive

3. Counting & Probability

Permutations $nPr = n!/(n-r)!$ Combinations $nCr = n!/(r!(n-r)!)$
Circular arrangements $(n-1)!$ Necklace/garland $(n-1)!/2$
Permutations with repetition of types: $n!/(p! q! r!)$
 r objects from n types with repetition: $C(n+r-1, r)$ (stars & bars)
Derangements $D_n = n! [1 - 1/1! + 1/2! - \dots + (-1)^n/n!]$ $D_1=0$ $D_2=1$ $D_3=2$ $D_4=9$ $D_5=44$
Catalan $C_n = C(2n,n)/(n+1) \rightarrow 1, 1, 2, 5, 14, 42$ (BSTs with n keys, valid parentheses)

- **Pigeonhole principle:** n items into m boxes $\Rightarrow$ some box has at least $\lceil n/m \rceil$ items. *e.g. Min. people to ensure 2 share a birth month = 13.*
- **Inclusion-exclusion:** $|A \cup B \cup C| = \Sigma A - \Sigma(A \cap B) + (A \cap B \cap C)$.
- **Mathematical induction:** base case + $(P(k) \Rightarrow P(k+1))$. Strong induction assumes all $P(1) \dots P(k)$.


Recurrence relations

- Linear homogeneous: $a_n = c_1 a_{n-1} + c_2 a_{n-2} \rightarrow$ characteristic equation $r^2 - c_1 r - c_2 = 0$. Distinct roots r_1, r_2 : $a_n = \alpha r_1^n + \beta r_2^n$; repeated root r : $a_n = (\alpha + \beta n) r^n$.
- Fibonacci: $F_n = F_{n-1} + F_{n-2}$. Tower of Hanoi: $T_n = 2T_{n-1} + 1 = 2^n - 1$.

Probability

$P(A \cup B) = P(A) + P(B) - P(A \cap B)$
 $P(A | B) = P(A \cap B) / P(B)$
 Independent: $P(A \cap B) = P(A) \cdot P(B)$
 Bayes: $P(A|B) = P(B|A) \cdot P(A) / P(B)$
 Binomial: $P(X=k) = C(n,k) p^k (1-p)^{n-k}$; mean np , variance npq
 Poisson: $P(X=k) = e^{-\lambda} \lambda^k / k!$; mean = variance = λ
 Expectation $E[X] = \sum x \cdot P(x)$; $E[aX+b] = aE[X]+b$; $Var = E[X^2] - (E[X])^2$

4. Algebraic Structures

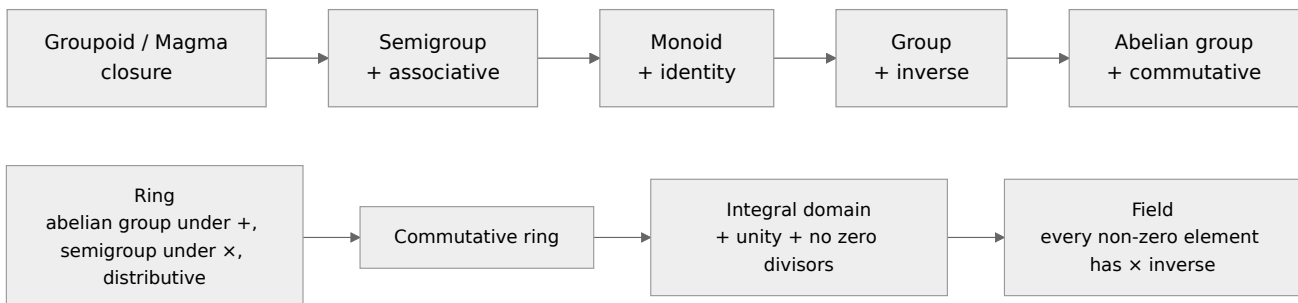

Key facts:


- Lagrange's theorem:** order of a subgroup divides the order of the group (finite).
- Every group of **prime order** is cyclic and abelian. Every cyclic group is abelian.
- Number of generators of cyclic group of order $n = \phi(n)$ (Euler totient).
- Groups of order ≤ 5 are abelian. Smallest non-abelian group: S_3 (order 6).
- $(\mathbb{Z}_n, +_n)$ is a group; $(\mathbb{Z}_n^*, \times_n)$ group of units has $\phi(n)$ elements; $\mathbb{Z}_n$ is a **field iff n is prime**.
- Every finite integral domain is a field.
- Homomorphism:** $f(a*b) = f(a) \circ f(b)$. **Isomorphism:** bijective homomorphism. **Automorphism:** isomorphism onto itself.
- Normal subgroup** H : $gH = Hg \forall g$; quotient group G/H has order $|G|/|H|$.
- Order of an element $a =$ smallest k with $a^k = e$.

5. Graph Theory

5.1 Basic results

Handshaking lemma: $\sum \deg(v) = 2|E| \Rightarrow$ number of odd-degree vertices is EVEN
 Max edges in simple graph with n vertices = $n(n-1)/2$
 Complete graph K_n : $n(n-1)/2$ edges, each vertex degree $n-1$
 Complete bipartite $K_{\{m,n\}}$: mn edges
 Tree with n vertices: $n - 1$ edges; forest with k trees: $n - k$ edges
 Number of labelled trees on n vertices (Cayley): n^{n-2} = spanning trees of K_n
 Number of simple labelled graphs on n vertices: $2^{n(n-1)/2}$

5.2 Euler vs Hamilton

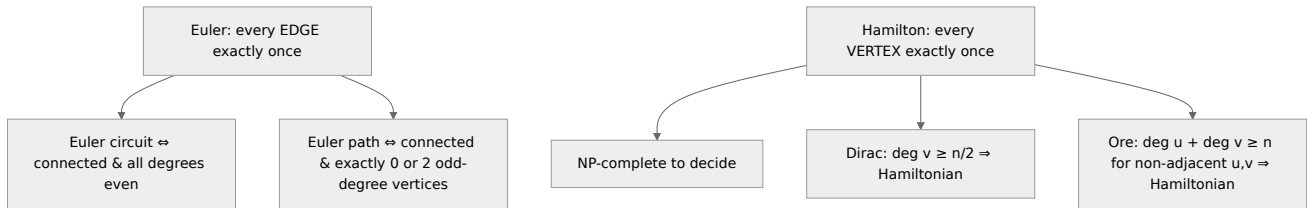


- K_n is Eulerian iff n is odd. K_n has $(n-1)!/2$ Hamiltonian cycles.


5.3 Planar Graphs

Euler's formula (connected planar): $V - E + F = 2$ (k components: $V - E + F = k + 1$)
 Simple planar, $V \geq 3$: $E \leq 3V - 6$
 Planar with no triangles: $E \leq 2V - 4$
 Kuratowski: G is planar $\Leftrightarrow$ no subdivision of K_5 or $K_{3,3}$
 K_5 and $K_{3,3}$ are the smallest non-planar graphs; K_4 is planar.

$K_{3,3}$ (non-planar)



K_4 (planar drawing)



5.4 Colouring

- **Chromatic number** $\chi(G)$: min colours so adjacent vertices differ.
- $\chi(K_n) = n$; $\chi(\text{bipartite with } \geq 1 \text{ edge}) = 2$; $\chi(\text{tree, } n \geq 2) = 2$; $\chi(\text{cycle } C_n) = 2$ if n even, 3 if odd; $\chi(\text{Wheel } W_n) = 3$ or 4.
- **Four colour theorem**: planar $\Rightarrow \chi \leq 4$.
- G is **bipartite** $\Leftrightarrow$ no odd cycle $\Leftrightarrow$ 2-colourable.
- Chromatic polynomial of tree with n vertices: $k(k-1)^{n-1}$; of K_n : $k(k-1)\dots(k-n+1)$.

5.5 Other definitions

- **Independent set, clique, vertex cover**: $\alpha(G) + \beta(G) = n$ (independence number + vertex cover number).
- **Matching**; perfect matching. Edge chromatic number (Vizing): $\Delta \leq \chi' \leq \Delta + 1$.
- **Cut vertex / articulation point, bridge, cut-set**. Vertex connectivity $\kappa \leq$ edge connectivity $\lambda \leq \delta$ (min degree) — Whitney.
- **Isomorphism** invariants: same #vertices, #edges, degree sequence, cycles.
- **Prefix codes**: Huffman coding gives optimal prefix-free code using a binary tree.


6. Boolean Algebra

Idempotent $x + x = x, \quad x \cdot x = x$
 Absorption $x + xy = x, \quad x(x + y) = x$
 $x + x'y = x + y \quad (x + y)(x + z) = x + yz$
 Consensus $xy + x'z + yz = xy + x'z$
 Duality: swap $+$ and $\cdot$ and $0 \leftrightarrow 1$


K-maps and minimisation are covered in [Unit 2](#).

7. Optimization

7.1 Linear Programming (LPP)

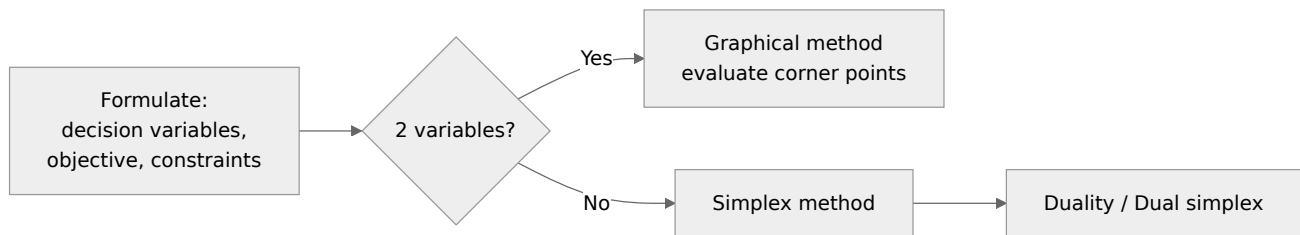

Graphical example: Max $Z = 3x + 5y$, s.t. $x + 2y \leq 8$, $3x + 2y \leq 12$, $x, y \geq 0$.

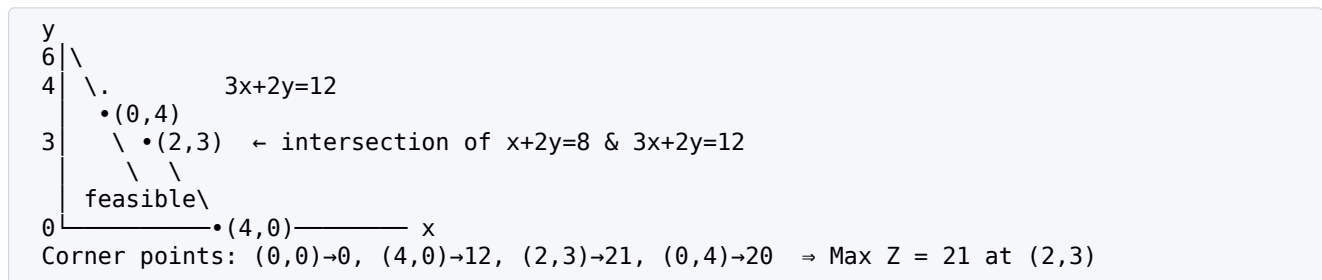

- Optimal solution occurs at a **corner point** (extreme point) of the convex feasible region.
- Special cases: **unbounded**, **infeasible**, **alternate optima** (objective parallel to a binding constraint), **degeneracy** (basic variable = 0).
- Slack (for $\leq$), surplus (for $\geq$), artificial variables (Big-M / Two-phase).
- Simplex: entering variable = most negative $C_j - Z_j$ (max) ; leaving variable = **minimum ratio test**.
- **Duality**: primal max $\Leftrightarrow$ dual min; #constraints $\leftrightarrow$ #variables; dual of dual = primal. Strong duality: optimal values equal. Weak duality: any feasible dual value bounds the primal.
- **Dual simplex**: starts optimal but infeasible, keeps optimality till feasibility.

7.2 Transportation Problem

- m sources, n destinations; balanced if supply = demand (else add dummy).
- A basic feasible solution has $m + n - 1$ allocations (fewer $\rightarrow$ degenerate).
- Initial solution: **North-West Corner**, **Least Cost**, **Vogel's Approximation (VAM — best)**.
- Optimality: **MODI (u-v) method** or **Stepping stone**.


7.3 Assignment Problem

- n jobs to n persons, one-to-one; solved by **Hungarian method** (row reduction, column reduction, cover zeros with min lines; if lines = $n \Rightarrow$ optimal).
- Special case of transportation (all supplies/demands = 1); highly degenerate.

7.4 Integer Programming

- Variables restricted to integers: **Branch and Bound**, **Gomory's cutting plane**.

7.5 PERT-CPM



Paths: A-C-E = $3+5+3 = 11$ (critical), B-D-E = $4+2+3 = 9$. Project duration = 11.

Concept	Formula
Earliest start (forward pass)	$ES = \max(\text{EF of predecessors})$
Latest finish (backward pass)	$LF = \min(\text{LS of successors})$
Total float	$LS - ES = LF - EF$
Critical activity	Total float = 0
PERT expected time	$t_e = (a + 4m + b)/6$
PERT variance	$\sigma^2 = ((b - a)/6)^2$
Probability	$Z = (T - T_e)/\sigma_{\text{path}}$

- **CPM:** deterministic time, cost-oriented (crashing). **PERT:** probabilistic (β -distribution), event-oriented.
- **Crashing:** reducing duration by adding resources; crash cost slope = (crash cost – normal cost)/(normal time – crash time).
- **Resource levelling:** smooth resource usage without changing project duration (use floats).

8. Deeper Dive — Worked Simplex, Transportation, Assignment, Groups & Recurrences

8.1 Simplex Method — Full Worked Example

Max $Z = 3x_1 + 5x_2$ subject to $x_1 \leq 4$, $2x_2 \leq 12$, $3x_1 + 2x_2 \leq 18$, $x_1, x_2 \geq 0$. Add slacks s_1, s_2, s_3 .

Tableau 0 (Z row written as $Z - 3x_1 - 5x_2 = 0$)

Basic	x_1	x_2	s_1	s_2	s_3	RHS	Ratio
s_1	1	0	1	0	0	4	—
s_2	0	2	0	1	0	12	$12/2 = 6 \leftarrow$
s_3	3	2	0	0	1	18	$18/2 = 9$
Z	-3	-5 $\uparrow$	0	0	0	0	

x_2 enters (most negative), s_2 leaves (minimum ratio). Pivot = 2.

Tableau 1

Basic	x_1	x_2	s_1	s_2	s_3	RHS	Ratio
s_1	1	0	1	0	0	4	4
x_2	0	1	0	1/2	0	6	—
s_3	3	0	0	-1	1	6	$6/3 = 2 \leftarrow$
Z	-3 $\uparrow$	0	0	5/2	0	30	

x_1 enters, s_3 leaves.

Tableau 2 (optimal — no negative entries in Z row)

Basic	x_1	x_2	s_1	s_2	s_3	RHS
s_1	0	0	1	1/3	-1/3	2
x_2	0	1	0	1/2	0	6
x_1	1	0	0	-1/3	1/3	2
Z	0	0	0	3/2	1	36

Optimal: $x_1 = 2$, $x_2 = 6$, $Z = 36$. Shadow prices (dual solution) are read from the Z row under the slacks: $y_1 = 0$, $y_2 = 3/2$, $y_3 = 1$ — and $4(0) + 12(3/2) + 18(1) = 36$ confirms strong duality.

8.2 Transportation Problem — NWC + MODI

	D1	D2	D3	Supply
S1	4	6	8	20
S2	5	8	7	30
S3	6	9	5	25
Demand	10	25	40	75 (balanced)

North-West Corner: $S1D1 = 10, S1D2 = 10, S2D2 = 15, S2D3 = 15, S3D3 = 25 \rightarrow 5$ allocations = $m + n - 1 \checkmark$. Cost = $40 + 60 + 120 + 105 + 125 = 450$.

MODI test (set $u_1 = 0$; for basic cells $u_i + v_j = c_{ij}$): $v_1 = 4, v_2 = 6, u_2 = 2, v_3 = 5, u_3 = 0$. Reduced cost of non-basic cell = $c_{ij} - u_i - v_j$: $S1D3 = 3, S2D1 = 5 - 2 - 4 = -1$ (negative $\rightarrow$ improve), $S3D1 = 2, S3D2 = 3$.

Closed loop for $S2D1$: $S2D1(+)$ $\rightarrow$ $S1D1(-)$ $\rightarrow$ $S1D2(+)$ $\rightarrow$ $S2D2(-)$; $\theta = \min(10, 15) = 10$. New allocation: $S1D2 = 20, S2D1 = 10, S2D2 = 5, S2D3 = 15, S3D3 = 25 \rightarrow$ cost = $120 + 50 + 40 + 105 + 125 = 440$. Recomputing u, v gives all reduced costs $\geq 0 \rightarrow$ **optimal cost 440**.

8.3 Assignment Problem — Hungarian Method

	J1	J2	J3
A	9	2	7
B	6	4	3
C	5	8	1

Row reduction (subtract row minima 2, 3, 1)

A	7	0	5
B	3	1	0
C	4	7	0

Column reduction (col minima 3, 0, 0)

A	4	0	5
B	0	1	0
C	1	7	0

Zeros can be covered by 3 lines = $n \Rightarrow$ optimal: A $\rightarrow$ J2, B $\rightarrow$ J1, C $\rightarrow$ J3

Minimum cost = $2 + 6 + 1 = 9$

8.4 Groups — Cayley Tables

$(Z_4, +_4)$

+	0	1	2	3
0	0	1	2	3
1	1	2	3	0
2	2	3	0	1
3	3	0	1	2

cyclic (generators 1, 3)

Klein four-group $V_4 = \{e, a, b, c\}$

·	e	a	b	c
e	e	a	b	c
a	a	e	c	b
b	b	c	e	a
c	c	b	a	e

not cyclic; every element has order 2

- Both have order 4 and are abelian, but are **not isomorphic** (Z_4 has an element of order 4; V_4 does not).
- Subgroups of Z_4 : $\{0\}, \{0, 2\}, Z_4$. Cosets of $H = \{0, 2\}$: H and $\{1, 3\} \rightarrow Z_4/H \cong Z_2$.
- Every group of order 4 is isomorphic to Z_4 or V_4 ; every group of order 6 is Z_6 or S_3 .

8.5 Solving a Recurrence

$$a_n = 5a_{n-1} - 6a_{n-2}, a_0 = 1, a_1 = 0.$$

Characteristic equation: $r^2 - 5r + 6 = 0 \rightarrow r = 2, 3$

General: $a_n = \alpha \cdot 2^n + \beta \cdot 3^n$

$a_0: \alpha + \beta = 1$; $a_1: 2\alpha + 3\beta = 0 \Rightarrow \beta = -2, \alpha = 3$


$a_n = 3 \cdot 2^n - 2 \cdot 3^n$ check: $a_2 = 12 - 18 = -6 = 5(0) - 6(1) \checkmark$

Non-homogeneous: $a_n = 2a_{n-1} + 1$ (Hanoi) $\rightarrow$ particular solution constant $c = 2c + 1 \Rightarrow c = -1$; $a_n = A \cdot 2^n - 1$; $a_1 = 1 \Rightarrow a_n = 2^n - 1$.

Generating functions: the sequence $1, 1, 1, \dots \leftrightarrow 1/(1-x)$; $a_n = C(n+k-1, k-1) \leftrightarrow 1/(1-x)^k$. Used to count integer solutions and to solve recurrences.

8.6 Graph Isomorphism & Colouring Checks

G1: square a-b-c-d with diagonal a-c



G2: vertices p, q, r, s with edges p-q, q-r, r-s, s-p, q-s

Degrees: p 2, q 3, r 2, s 3

Degrees: a 3, b 2, c 3, d 2

- Both graphs have 4 vertices, 5 edges and degree sequence (3, 3, 2, 2) — each is K_4 minus one edge.
- Mapping $a \rightarrow q, c \rightarrow s, b \rightarrow p, d \rightarrow r$ preserves every edge $\rightarrow$ **isomorphic**.
- $\chi(G1) = 3$, because the triangle a-b-c needs three colours.

Quick invariant checklist for isomorphism: number of vertices and edges, degree sequence, number of cycles of each length, connectivity, bipartiteness. Matching invariants are necessary, not sufficient — finish by exhibiting a mapping.

Previous Year Questions (PYQ pattern)

Logic

- Which is a tautology? (a) $p \rightarrow (p \vee q)$ (b) $(p \vee q) \rightarrow p$ (c) $p \wedge \neg p$ (d) $p \rightarrow \neg p$ — **Ans: (a)**
- The contrapositive of "If it rains, the ground is wet" is: **"If the ground is not wet, it did not rain."**
- $\neg \forall x (P(x) \rightarrow Q(x))$ is equivalent to: $\exists x (P(x) \wedge \neg Q(x))$
- "Every student has a computer": with $S(x), C(x): \forall x (S(x) \rightarrow C(x))$
- Number of Boolean functions of 3 variables: $2^8 = 256$
- Which is functionally complete? (a) $\{\wedge, \vee\}$ (b) $\{\uparrow\}$ NAND (c) $\{\vee, \leftrightarrow\}$ (d) $\{\wedge, \rightarrow\}$... — **NAND**
- From $p \rightarrow q$ and $\neg q$ we infer $\neg p$ — this is: **Modus Tollens**

Sets, relations, functions

- Number of reflexive relations on a set of 4 elements: $2^{12} = 4096$
- Number of symmetric relations on 3 elements: $2^6 = 64$
- Number of equivalence relations on $\{1, 2, 3, 4\}$: **15**
- Number of onto functions from a 4-set to a 3-set: $3^4 - 3 \cdot 2^4 + 3 \cdot 1 = 81 - 48 + 3 = 36$
- Relation " $\leq$ " on integers is: **partial order (in fact total)**
- Which lattice is not distributive? **Pentagon N_5 / Diamond M_3**
- D_{30} (divisors of 30) is a Boolean algebra because 30 is: **square-free** (D_{12} is not)

Counting

- Minimum students so that at least 3 share birthday month: $2 \times 12 + 1 = 25$
- Number of derangements of 4 letters: **9**
- Number of ways to arrange letters of "MISSISSIPPI": $11!/(4!4!2!) = 34650$
- Number of non-negative integer solutions of $x+y+z=10$: $C(12, 2) = 66$
- Solution of $a_n = 6a_{n-1} - 9a_{n-2}$ has form: **$(\alpha + \beta n)3^n$**

20. Number of distinct BSTs with 3 keys: **5** (Catalan)

Probability

21. Two dice thrown; probability sum = 7: **1/6**

22. A box: 3 defective of 10. Probability of picking 2 non-defective without replacement: $(7/10)(6/9) = 7/15$

23. Bayes problem: Machines A, B produce 60%, 40%; defect rates 2%, 3%. $P(A | \text{defective}) = 0.012/0.024 = 1/2$

Groups

24. Which is NOT a group? (a) $(\mathbb{Z}, +)$ (b) $(\mathbb{Q} - \{0\}, \times)$ (c) $(\mathbb{Z}, \times)$ (d) $(\mathbb{R}, +)$ — **Ans: (c)** (no inverses)

25. A group of order 7 is: **cyclic (prime order)**

26. Number of generators of cyclic group of order 12: $\phi(12) = 4$

27. Possible orders of subgroups of a group of order 15: **1, 3, 5, 15**

28. $\mathbb{Z}_n$ is a field iff: **n is prime**

29. Every finite integral domain is a: **field**

Graphs

30. Sum of degrees of a graph with 15 edges: **30**

31. A connected planar graph has 10 vertices and 15 edges. Number of faces: $15 - 10 + 2 = 7$

32. Max edges in simple planar graph with 8 vertices: $3 \times 8 - 6 = 18$

33. Which graph is non-planar? (a) K_4 (b) $K_{2,3}$ (c) $K_{3,3}$ (d) Q_3 — **(c)**

34. K_n has Euler circuit iff: **n is odd**

35. Chromatic number of a cycle with 7 vertices: **3**

36. Number of spanning trees of K_4 : $4^2 = 16$

37. Graph with degree sequence (3,3,3,1) — possible? Sum = 10 even $\rightarrow$ yes; (3,3,3,3,1)? Sum = 13 odd $\rightarrow$ **No**

38. Chromatic number of bipartite graph: **2**

Optimization

39. In a transportation problem with 4 sources and 5 destinations, a non-degenerate BFS has: **8 allocations**

40. The best initial basic feasible solution method: **Vogel's approximation**

41. Assignment problems are solved by: **Hungarian method**

42. The dual of a primal with 3 variables and 5 constraints has: **5 variables, 3 constraints**

43. In PERT, $a=2, m=5, b=14$: $t_e = (2+20+14)/6 = 6$, $\sigma^2 = (12/6)^2 = 4$

44. Activities on the critical path have total float: **zero**

45. Simplex leaving variable is chosen by: **minimum ratio test**

46. If the objective function is parallel to a binding constraint: **multiple optimal solutions**

More practice questions

47. In simplex, if all entries in the pivot column are ≤ 0 , the LPP has: **an unbounded solution**

48. If an artificial variable remains in the basis at a positive level in the optimal tableau: **the problem is infeasible**

49. Shadow price of a constraint equals the optimal value of the corresponding: **dual variable**

50. A transportation solution with fewer than $m + n - 1$ positive allocations is: **degenerate**

51. In MODI, a negative reduced cost ($c_{ij} - u_i - v_j$) for an unoccupied cell means: **the solution can be improved**

52. Unbalanced assignment problems are balanced by adding: **dummy rows or columns with zero cost**

53. Number of subgroups of $\mathbb{Z}_4$: **3**

54. Klein four-group is: **abelian but not cyclic**

55. Solution of $a_n = 4a_{n-1} - 4a_{n-2}$ has the form: **$(\alpha + \beta n)2^n$**

56. Coefficient of x^5 in $1/(1-x)^3$: **$C(7, 2) = 21$**

57. The number of edges in a graph with degree sequence (3, 3, 2, 2): **5**

58. Which statement is true? (a) every abelian group is cyclic (b) every cyclic group is abelian (c) every group of order 4 is cyclic (d) S_3 is abelian — **Ans: (b)**

59. Order of element 2 in $(\mathbb{Z}_6, +_6)$: **3**

60. Number of perfect matchings in K_4 : **3**

Quick Revision Box

- $p \rightarrow q \equiv \neg p \vee q \equiv \neg q \rightarrow \neg p$ · Relations on n : 2^{n^2}
- $V - E + F = 2$ · $E \leq 3V - 6$ · Cayley n^{n-2} · Odd-degree vertices even
- Lagrange: $|H|$ divides $|G|$ · $\mathbb{Z}_n$ field iff n prime · generators = $\varphi(n)$
- Transport BFS = $m + n - 1$ · PERT $t_e = (a+4m+b)/6$

Computer System Architecture

In this unit

1. Digital Logic	78	8. I/O Organisation	83
2. Data Representation	80	9. Memory Hierarchy	84
3. Register Transfer & Micro-operations	80	10. Multiprocessors	85
4. Basic Computer (Mano)	81	11. Deeper Dive — Booth Trace, Instruction Encoding, Cache Behaviour & Interrupts	85
5. Control Unit	81	Previous Year Questions (PYQ pattern)	87
6. CPU Organisation	81		
7. Pipelining	82		

Expected questions: 8–10 · Target: 8+ · Type: numericals (cache, pipeline, number systems) + concepts (Morris Mano)

Syllabus checklist

- ☐ Digital logic circuits & components: gates, Boolean algebra, K-maps, combinational circuits, flip-flops, sequential circuits, ICs, decoders, multiplexers, registers, counters, memory unit
- ☐ Data representation: number systems, complements, fixed & floating point, error-detection codes, computer arithmetic
- ☐ Register transfer & micro-operations
- ☐ Basic computer organization & design: instruction codes, registers, timing & control, instruction cycle, interrupts
- ☐ Programming the basic computer; microprogrammed control
- ☐ CPU: general register & stack organisation, instruction formats, addressing modes, RISC vs CISC
- ☐ Pipeline & vector processing
- ☐ I/O organisation: interfaces, asynchronous transfer, modes of transfer, priority interrupt, DMA, serial communication
- ☐ Memory hierarchy: main, auxiliary, associative, cache, virtual memory
- ☐ Multiprocessors: interconnection structures, arbitration, synchronisation, cache coherence, multicore

1. Digital Logic

1.1 Gates

Gate	Expression	Output 1 when
AND	AB	all inputs 1
OR	$A + B$	any input 1
NOT	A'	input 0
NAND	$(AB)'$	any input 0 — universal
NOR	$(A+B)'$	all inputs 0 — universal
XOR	$A \oplus B = A'B + AB'$	inputs differ (odd number of 1s)
XNOR	$(A \oplus B)'$	inputs equal

Gates needed using only NAND: NOT = 1, AND = 2, OR = 3, XOR = 4, XNOR = 5. Using only NOR: NOT = 1, OR = 2, AND = 3, XNOR = 4, XOR = 5.

1.2 K-Map Simplification

4-variable K-map (Gray code order)					Example: $F = \sum m(0,2,5,7,8,10,13,15)$				
AB	00	01	11	10	AB	00	01	11	10
00	m0	m1	m3	m2	00	1	0	0	1
01	m4	m5	m7	m6	01	0	1	1	0
11	m12	m13	m15	m14	11	0	1	1	0
10	m8	m9	m11	m10	10	1	0	0	1

Rules: group 1, 2, 4, 8, 16 adjacent cells (wrap-around allowed); larger groups = fewer literals; use don't-cares (X) when helpful.

- **Prime implicant:** largest possible group. **Essential PI:** covers a minterm no other PI covers.

1.3 Combinational Circuits

Half adder $S = A \oplus B$ $C = AB$	Full adder $S = A \oplus B \oplus C_{in}$ $C_{out} = AB + C_{in}(A \oplus B)$ (2 half adders + 1 OR gate)
--	--

Circuit	Function
Multiplexer $2^n:1$	n select lines choose one of 2^n inputs; any n-var function with $2^n:1$ MUX (or n+1 var with $2^n:1$ + inverter)
Demultiplexer $1:2^n$	Routes one input to one of 2^n outputs
Decoder $n:2^n$	Activates one of 2^n outputs (minterm generator)
Encoder $2^n:n$	Reverse; priority encoder handles multiple inputs
Comparator	$A > B$, $A = B$, $A < B$
Ripple carry adder	n full adders; delay $\propto n$
Carry look-ahead adder	$G_i = A_i B_i$, $P_i = A_i \oplus B_i$; $C_{i+1} = G_i + P_i C_i$ — faster

1.4 Flip-Flops

FF	Characteristic equation	Notes
SR	$Q^+ = S + R'Q$ (SR = 0)	S=R=1 invalid
JK	$Q^+ = JQ' + K'Q$	J=K=1 toggles; race-around fixed by master-slave
D	$Q^+ = D$	Delay / data latch
T	$Q^+ = T \oplus Q$	Toggle; used in counters

Excitation table (what inputs give $Q \rightarrow Q^+$)					
Q	Q^+	S	R	J	K
0	0	0	X	0	X
0	1	1	0	1	X
1	0	0	1	X	1
1	1	X	0	X	0

1.5 Counters & Registers

- n flip-flops $\rightarrow$ **mod- 2^n** ripple counter. Ring counter with n FFs $\rightarrow$ mod- n . **Johnson (twisted ring)** with n FFs $\rightarrow$ **mod- $2n$** .
- Asynchronous (ripple) counter delay = $n \times t_{pd}$; synchronous counters clock all FFs together.
- Shift registers: SISO, SIPO, PISO, PIPO.
- Memory: $2^k \times n$ RAM needs k address lines and n data lines. e.g. $4K \times 8 \rightarrow 12$ address lines.
- Number of $1K \times 4$ chips to build $16K \times 8$: $(16 \times 8)/(1 \times 4) = 32$.

2. Data Representation

2.1 Signed numbers (n bits)

Representation	Range	Zeros
Sign-magnitude	$-(2^{n-1}-1) \dots +(2^{n-1}-1)$	Two (+0, -0)
1's complement	$-(2^{n-1}-1) \dots +(2^{n-1}-1)$	Two
2's complement	$-2^{n-1} \dots +(2^{n-1}-1)$	One

8-bit 2's complement: -128 to +127. -5 = 11111011. **Overflow** in 2's-complement addition: carry into MSB $\neq$ carry out of MSB (or adding two same-sign numbers gives opposite sign). r 's complement of N (n digits) = $r^n - N$; $(r-1)$'s complement = $r^n - 1 - N$.

2.2 Floating Point — IEEE 754

Single precision (32 bits)

S	Exponent (8)	Mantissa / fraction (23)	bias = 127
---	--------------	--------------------------	------------

Double precision (64 bits): 1 | 11 | 52 bias = 1023
 Value = $(-1)^S \times 1.M \times 2^{(E - \text{bias})}$

Example: $-6.25 = -110.01_2 = -1.1001 \times 2^2 \rightarrow S=1, E=129=10000001, M=1001000\dots \rightarrow \mathbf{C0C80000}$ (hex).

- $E=0, M=0 \rightarrow \pm 0$; $E=\text{all } 1\text{s}, M=0 \rightarrow \pm \infty$; $E=\text{all } 1\text{s}, M \neq 0 \rightarrow \text{NaN}$; $E=0, M \neq 0 \rightarrow \text{denormal}$.

2.3 Codes

- **BCD** (8421), **Excess-3** (BCD + 3, self-complementing), **Gray code** (one bit changes; $G = B \oplus (B \gg 1)$).
- **Parity** detects single-bit (odd number of) errors.
- **Hamming code**: number of parity bits r satisfies $2^r \geq m + r + 1$; parity bits at positions 1, 2, 4, 8 ...; detects 2, corrects 1 (with extra bit: SEC-DED).
- **CRC**: polynomial division; used in networks.


2.4 Arithmetic

- **Booth's algorithm** (signed multiplication): look at $Q_n Q_{n+1} \rightarrow 10$: subtract M ; 01 : add M ; $00/11$: shift only; arithmetic right shift each step.
- Division: restoring and non-restoring.

3. Register Transfer & Micro-operations

- RTL: $R2 \leftarrow R1, P$: $R2 \leftarrow R1$ (conditional on control P).
- Micro-operation types: register transfer, arithmetic (add, sub, inc, dec), logic, shift (logical, circular, arithmetic).
- Common bus with k registers of n bits: n multiplexers of $k \times 1$ each, $\log_2 k$ select lines.


4. Basic Computer (Mano)

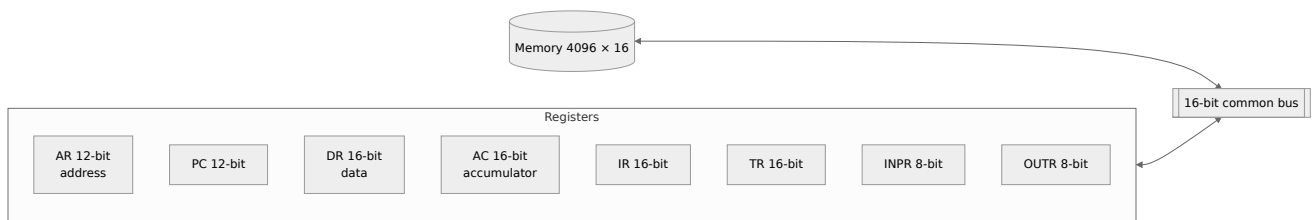

Instruction format (16 bits): I (1) | Opcode (3) | Address (12) — I = 0 direct, 1 indirect.

- Instruction types: memory-reference (opcode 000–110), register-reference (0111...), I/O (1111...).

Instruction Cycle

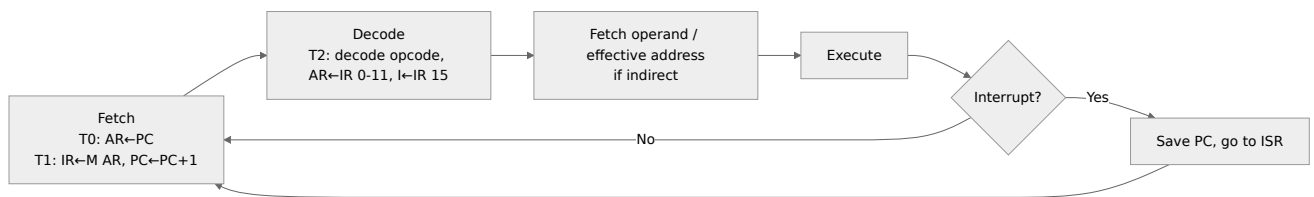

5. Control Unit

Hardwired	Microprogrammed
Logic gates, decoders, sequence counter	Control memory stores microinstructions
Fast	Slower
Difficult to modify	Flexible, easy to modify
Used in RISC	Used in CISC

- Control word bits: **horizontal** microprogramming (one bit per control signal, wide, parallel, fast) vs **vertical** (encoded, narrow, needs decoder).
- Control address register (CAR), control data register (CDR), sequencer, mapping logic.
- Control memory size = (#microinstructions) × (width).

6. CPU Organisation

6.1 Instruction formats (by number of addresses)

Evaluate $X = (A + B) \times (C + D)$:

Type	Code
3-address	ADD R1, A · ADD R2, C · D · MUL X, R1, R2
2-address	MOV R1, A · ADD R1, B · MOV R2, C · ADD R2, D · MUL R1, R2 · MOV X, R1
1-address (accumulator)	LOAD A · ADD B · STORE T · LOAD C · ADD D · MUL T · STORE X
0-address (stack)	PUSH A · PUSH B · ADD · PUSH C · PUSH D · ADD · MUL · POP X

6.2 Addressing Modes (very frequent)

Mode	Effective address	Use
Implied	Operand implicit	CMA, stack ops
Immediate	Operand in instruction	Constants
Register	Operand in register	Fast
Register indirect	$EA = (R)$	Pointers
Direct (absolute)	$EA = A$	Global variables
Indirect	$EA = M[A]$	Pointers
Auto-increment/ decrement	$EA = (R), \text{ then } R \pm 1$	Arrays, stacks
Relative	$EA = PC + A$	Branches, position-independent code
Indexed	$EA = XR + A$	Arrays
Base register	$EA = BR + A$	Relocation

Memory references to get operand: immediate 0, direct 1, indirect 2.

6.3 RISC vs CISC

RISC	CISC
Few, simple, fixed-length instructions	Many, complex, variable length instructions
Few addressing modes	Many addressing modes
Load/store architecture	Memory operands in many instructions
Many registers, register windows	Fewer registers
Hardwired control	Microprogrammed
1 instruction per cycle, pipelining easy	Multi-cycle
ARM, MIPS, SPARC, RISC-V	x86, VAX, IBM 370

7. Pipelining

4-stage instruction pipeline (IF, ID, EX, WB), 5 instructions


```

Cycle:   1   2   3   4   5   6   7   8
I1       IF  ID  EX  WB
I2       IF  ID  EX  WB
I3       IF  ID  EX  WB
I4       IF  ID  EX  WB
I5       IF  ID  EX  WB
Total = k + (n - 1) = 4 + 4 = 8 cycles

```


Pipelined time	$T_{\text{pipe}} = (k + n - 1) \times t_p$	$(t_p = \text{max stage delay} + \text{latch delay})$
Non-pipelined	$T_{\text{seq}} = n \times t_n$	$(t_n = \text{sum of stage delays})$
Speedup	$S = n \cdot t_n / ((k + n - 1) \cdot t_p) \rightarrow k \text{ as } n \rightarrow \infty \text{ (ideal, equal stages)}$	
Efficiency	$\eta = S / k$	
Throughput	n / T_{pipe}	
With stalls:	$\text{CPI}_{\text{pipe}} = 1 + \text{stall cycles per instruction} ; S = \text{CPI}_{\text{nonpipe}} / \text{CPI}_{\text{pipe}}$	

Hazards

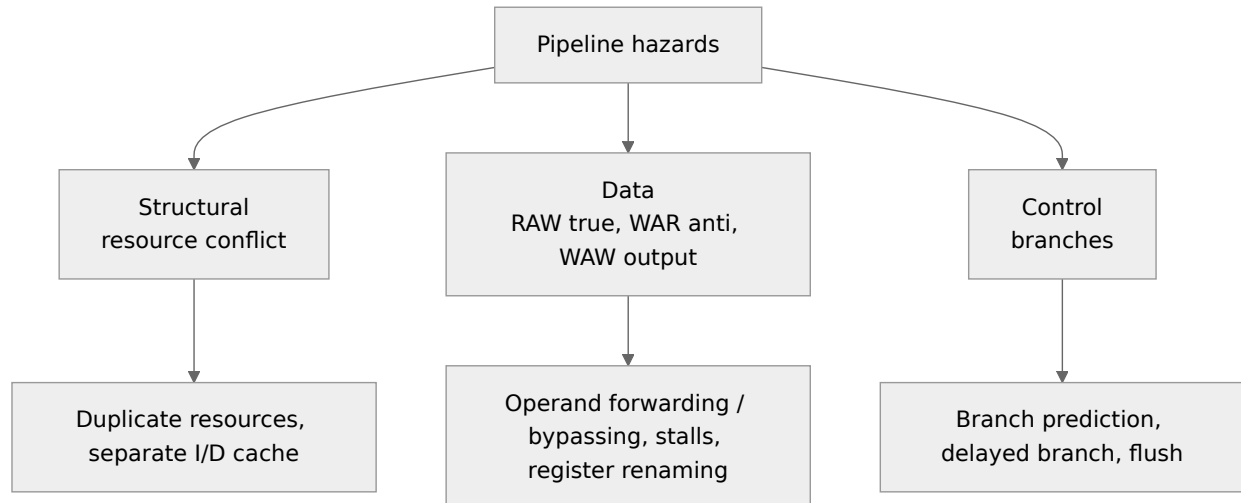

- Only **RAW** occurs in a simple in-order pipeline; WAR and WAW occur in out-of-order execution.
- **Flynn's taxonomy**: SISD (uniprocessor), **SIMD** (vector/array processors, GPU), MISD (rare; fault-tolerant), MIMD (multiprocessors).
- **Vector processing**: one instruction operates on arrays; **array processors** = SIMD with multiple PEs.
- **Amdahl's law**: $\text{Speedup} = 1 / ((1 - f) + f/s)$, f = fraction enhanced, s = speedup of that fraction.
- Superscalar (multiple issue), VLIW, superpipelining.

8. I/O Organisation

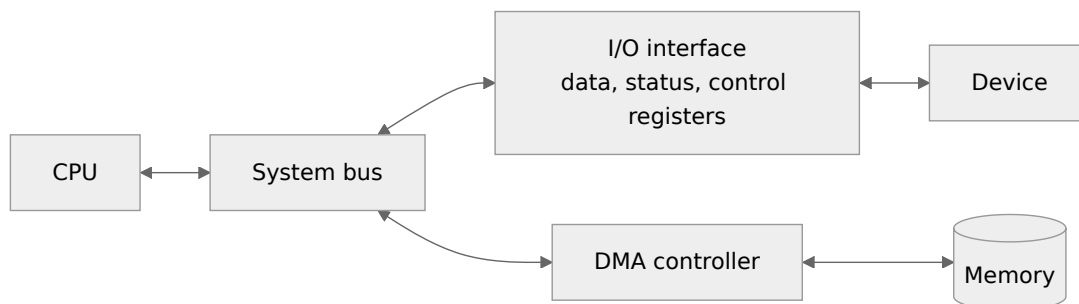


Mode	How	CPU involvement
Programmed I/O	CPU polls status flag	Very high (busy waiting)
Interrupt-driven	Device interrupts CPU	Per word
DMA	DMA controller transfers block directly to memory	Only at start/end
I/O processor (channel)	Dedicated processor	Minimal

- DMA modes: **burst** (block at once), **cycle stealing** (one word per cycle), **transparent** (when CPU not using bus).
- DMA signals: Bus Request (BR) and Bus Grant (BG).
- Asynchronous transfer: **strobe** (one control line) or **handshaking** (two lines — data valid & data accepted).
- **Priority interrupts**: polling (software), **daisy chaining** (serial hardware — nearest device highest priority), parallel priority (priority encoder).
- Vectored interrupt: device supplies ISR address. Non-maskable interrupt (NMI): cannot be disabled.
- Isolated I/O (separate address space, IN/OUT instructions) vs **memory-mapped I/O** (same address space).


- Serial communication: asynchronous (start bit, data, parity, stop bits) — UART; synchronous — USRT.

9. Memory Hierarchy

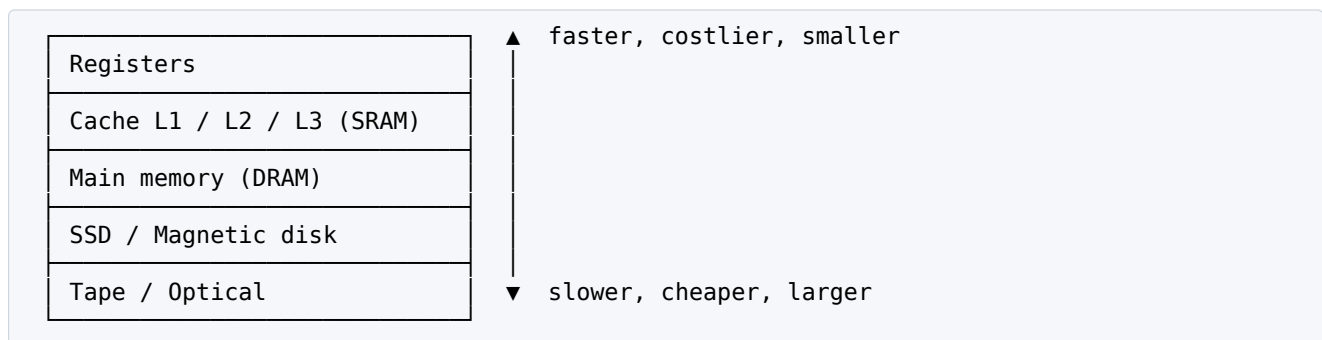

- SRAM (flip-flops, no refresh, cache) vs DRAM (capacitors, refresh, main memory).
- ROM, PROM, EPROM (UV erase), EEPROM (electrical), Flash.
- Associative memory (CAM)**: accessed by content; used in TLB.
- Locality of reference**: temporal (same item soon) & spatial (nearby items soon).

9.1 Cache Mapping

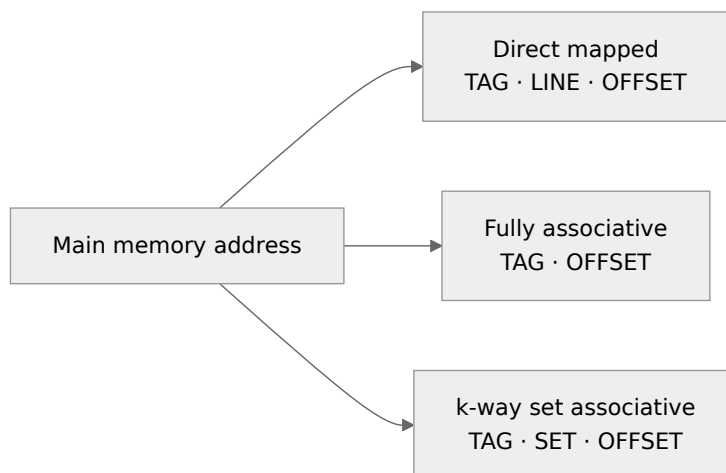

Worked example: Main memory 4 GB (32-bit address), cache 64 KB, block 32 B.

Offset bits = $\log_2 32 = 5$
 Lines = $64 \text{ KB} / 32 \text{ B} = 2048 \rightarrow 11 \text{ bits}$
 Direct: TAG = $32 - 11 - 5 = 16$ | LINE 11 | OFFSET 5
 4-way: sets = $2048/4 = 512 \rightarrow 9 \text{ bits}$; TAG = $32 - 9 - 5 = 18$
 Fully: TAG = $32 - 5 = 27$
 Tag directory size (direct) = $2048 \times 16 \text{ bits}$ (+ valid/dirty bits)

Hit ratio h ; cache access t_c ; memory access t_m
 Avg access time (simultaneous/parallel) $T = h \cdot t_c + (1 - h) \cdot t_m$
 Avg access time (hierarchical/serial) $T = h \cdot t_c + (1 - h)(t_c + t_m)$
 AMAT = Hit time + Miss rate $\times$ Miss penalty

- Replacement: LRU, FIFO, random (needed for associative/set-associative only).
- Write policies: **write-through** (update memory immediately; with write buffer) vs **write-back** (dirty bit, on eviction).
- Write miss: write-allocate (usually with write-back) vs no-write-allocate (with write-through).
- Misses: **Compulsory** (cold), **Capacity**, **Conflict** (3 Cs).

9.2 Virtual Memory

Covered in depth in [Unit 5 \(OS\)](#): paging, TLB, page replacement.

- Effective access with TLB: $EAT = h(t_{TLB} + t_m) + (1 - h)(t_{TLB} + 2t_m)$ (single-level page table).

9.3 Magnetic Disk

Disk access time = Seek time + Rotational latency + Transfer time
Avg rotational latency = $\frac{1}{2} \times (60/\text{RPM})$ s
Capacity = surfaces $\times$ tracks $\times$ sectors/track $\times$ bytes/sector

e.g. 7200 RPM $\rightarrow$ one rotation 8.33 ms $\rightarrow$ avg latency **4.17 ms**.

10. Multiprocessors

- **Tightly coupled** (shared memory, UMA/NUMA) vs **loosely coupled** (distributed memory, message passing).
- Interconnection structures: time-shared common bus, multiport memory, **crossbar switch** (n^2 switches, non-blocking), multistage networks (Omega: $(n/2) \log_2 n$ 2×2 switches), hypercube (n-cube: 2^n nodes, each with n links, diameter n).
- Inter-processor arbitration: serial (daisy chain), parallel, dynamic (time-slice, polling, LRU, FIFO, rotating daisy chain).
- Synchronisation: test-and-set, semaphores, mutual exclusion via hardware lock.
- **Cache coherence**: write-invalidate / write-update; snoopy protocols; **MESI** (Modified, Exclusive, Shared, Invalid); directory-based protocols.
- **Multicore**: multiple cores on one chip sharing L2/L3 cache; hyper-threading (SMT).

11. Deeper Dive — Booth Trace, Instruction Encoding, Cache Behaviour & Interrupts

11.1 Booth's Algorithm — Full Trace: $7 \times (-3)$, 4 bits

$M = 0111$ (7), $-M = 1001$, $Q = 1101$ (-3), $A = 0000$, $Q_{-1} = 0$.

Step	$Q_0 Q_{-1}$	Operation	A	Q	Q_{-1}
Init			0000	1101	0
1	1 0	$A \leftarrow A - M$ Arithmetic shift right	1001 1100	1101 1110	0 1
2	0 1	$A \leftarrow A + M$ Arithmetic shift right	0011 0001	1110 1111	1 0
3	1 0	$A \leftarrow A - M$ Arithmetic shift right	1010 1101	1111 0111	0 1
4	1 1	Shift only	1110	1011	1

Result $A \ Q = 1110 \ 1011 = -21$ in 8-bit 2's complement ✓. Booth reduces additions for runs of 1s; worst case is alternating bits (0101...).

11.2 Instruction Encoding Numericals

Fixed format: 32-bit instructions, 64 registers, 45 distinct opcodes, format opcode | Rd | Rs | immediate.

opcode bits = $\lceil \log_2 45 \rceil = 6$ register field = $\log_2 64 = 6$ each
 immediate = $32 - 6 - 6 - 6 = 14$ bits → signed range -8192 ... +8191

Expanding opcode: 16-bit instruction, 4-bit address fields.

3-address: 4-bit opcode → $2^4 = 16$ patterns; use 15, keep 1 as escape
 2-address: escape (4 bits) + 4 more opcode bits → 16 patterns; use 14, keep 2
 1-address: 2 escapes × 16 = 32 patterns; use 31, keep 1
 0-address: 1 escape × 16 = 16 instructions
 General rule: unused patterns at level $k \times 2^{(\text{field width})} = \text{patterns available at level } k+1$

11.3 Mapping an Address into a Set-Associative Cache

2-way set associative, 128 lines, 16-byte blocks, 16-bit byte address **0x1A2B**.

Sets = $128 / 2 = 64 \rightarrow 6$ set bits ; offset = 4 bits ; tag = $16 - 6 - 4 = 6$ bits
 Block number = $0x1A2B \gg 4 = 0x1A2 = 418$
 Set = $418 \bmod 64 = 34$ Tag = $418 \div 64 = 6$ Offset = $0xB = 11$


11.4 Hits & Misses for Three Organisations

Block reference string: 0, 4, 0, 4, 8, 0 with 4 cache lines.

Organisation	Trace	Misses
Direct mapped (line = block mod 4)	0, 4, 8 all map to line 0 → every access evicts the previous	6
2-way set assoc., LRU (set = block mod 2)	0 M, 4 M, 0 H, 4 H, 8 M (evict 0), 0 M (evict 4)	4
Fully associative, LRU	0 M, 4 M, 0 H, 4 H, 8 M, 0 H	3

Higher associativity removes **conflict misses**; the three first-time misses are **compulsory**.

11.5 Interrupt Cycle (Mano basic computer)

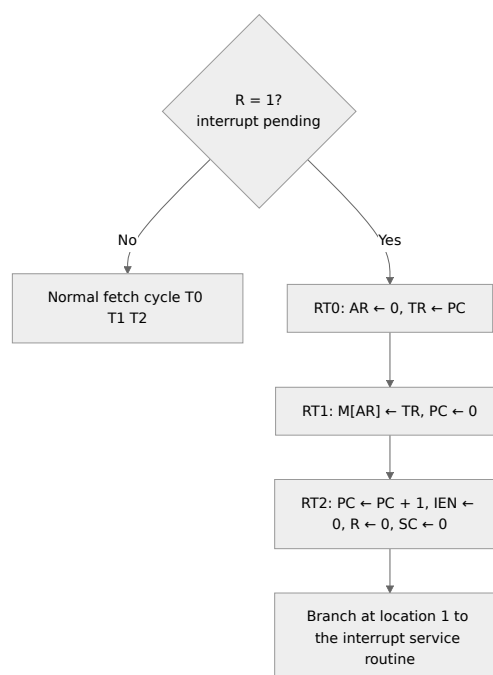

Return address is saved in memory location 0; the ISR ends with an indirect branch through location 0 (BUN 0 I), re-enabling interrupts with ION.

11.6 Microprogrammed Control Numericals

Mano's microinstruction: F1 (3) | F2 (3) | F3 (3) | CD (2) | BR (2) | AD (7) = **20 bits**; control memory 128×20 .

- Horizontal: n control signals $\rightarrow n$ bits. Vertical: encode k mutually exclusive signals in $\lceil \log_2(k+1) \rceil$ bits.
- **Example:** 48 control signals in 4 mutually-exclusive groups of 12 $\rightarrow$ vertical needs $4 \times \lceil \log_2 13 \rceil = 4 \times 4 = 16$ bits (vs 48 horizontal).

11.7 DMA & I/O Numericals

- Disk transfers 4 MB/s in 32-bit words using cycle stealing on a memory that supports 100 million cycles/s: words/s = 4 MB / 4 B = 1 M $\rightarrow$ fraction of memory cycles stolen = 1 M / 100 M = **1%**.
- Programmed I/O polling overhead: polling 100 times/s $\times$ 500 cycles each = 50,000 cycles/s $\rightarrow$ **0.05%** of a 100 MHz CPU.

11.8 Memory Interleaving

Low-order interleaving (4 modules): module = address mod 4
Address: 0 1 2 3 4 5 6 7 8 ...
Module: M0 M1 M2 M3 M0 M1 M2 M3 M0 ...
Consecutive words come from different modules $\rightarrow$ overlapped access, higher bandwidth
High-order interleaving: module = high bits $\rightarrow$ consecutive words in the same module

Previous Year Questions (PYQ pattern)

Number systems & codes

1. 2's complement of 01101000: **10011000**
2. Range of 8-bit 2's complement: **-128 to +127**
3. Gray code of binary 1011: 1, $1 \oplus 0$, $0 \oplus 1$, $1 \oplus 1 \rightarrow$ **1110**
4. Excess-3 of decimal 5: **1000**
5. Hamming code for 4 data bits needs **3** parity bits ($2^3 \geq 4+3+1$)
6. IEEE 754 single precision bias: **127**; exponent bits **8**; mantissa **23**
7. (-0.75) in IEEE 754 single: $S=1$, -1.1×2^{-1} , $E=126 \rightarrow$ **BF400000**

Digital logic

8. Minimum number of NAND gates for XOR: **4**
9. Simplify $F = \sum m(0,1,2,3)$: **A'** (for 3 variables A,B,C) — $F = A'$
10. Number of select lines for 32:1 MUX: **5**
11. Johnson counter with 4 FFs has **8** states
12. Characteristic equation of JK FF: **$Q^+ = JQ' + K'Q$**
13. Race-around condition occurs in: **JK flip-flop when $J=K=1$ and clock pulse wide** — solved by master-slave
14. A 3-to-8 decoder with an OR gate can implement: **any 3-variable Boolean function**
15. $16K \times 8$ memory needs **14** address lines

CPU & addressing

16. Addressing mode used for position-independent code: **Relative (PC-relative)**
17. Addressing mode in which operand is part of instruction: **Immediate**
18. Which addressing mode needs two memory accesses to get operand (after fetch)? **Indirect**
19. Zero-address instructions are used in: **stack-organised computers**
20. Which is a feature of RISC? **Fixed-length instructions / load-store / hardwired control**
21. Horizontal microprogramming: **one bit per control signal, longer control words**

Pipelining

22. A 5-stage pipeline, stage delay 20 ns, executes 100 instructions. Time = $(5 + 99) \times 20 = 2080$ ns
23. Ideal speedup of a k-stage pipeline: **k**
24. Stages 150, 120, 160, 140 ns, latch 5 ns. Pipeline cycle = **165 ns**; non-pipelined instruction = 570 ns
25. RAW hazard is also called: **true data dependency**; fixed by **operand forwarding**
26. Amdahl: 40% of program sped up 10 $\times$. Speedup = $1/(0.6 + 0.04) = 1.5625$
27. Vector processors belong to which Flynn category? **SIMD**

Memory & cache

28. Cache 2 ns, memory 20 ns, hit ratio 0.9, hierarchical: $0.9 \times 2 + 0.1 \times 22 = 4$ ns
29. Direct-mapped cache with 128 lines, block 16 words; 64K-word memory $\rightarrow$ address 16 bits: TAG 5, LINE 7, WORD 4
30. Which miss cannot be reduced by increasing cache size? **Compulsory miss**
31. Write-back cache uses a: **dirty bit**
32. Associative memory is accessed by: **content**
33. Disk 6000 RPM: average rotational latency = **5 ms**

I/O

34. Which mode transfers data without CPU intervention? **DMA**
35. In daisy chaining, priority is determined by: **position of device in the chain**
36. DMA cycle stealing means: **DMA takes the bus for one cycle at a time**
37. Handshaking uses: **two control lines**

Multiprocessors

38. Number of crosspoints in a crossbar connecting 8 processors to 8 memories: **64**
39. MESI protocol is used for: **cache coherence**
40. In a 4-dimensional hypercube, number of nodes: **16**, links per node: **4**

More practice questions

41. Booth's algorithm when $Q_0Q_{-1} = 01$: **add M then shift**
42. A machine has 32-bit instructions and 128 registers; a 3-register format leaves how many opcode bits? $32 - 21 = 11$
43. 16-bit instructions with 6-bit address fields: 2-address instructions use 4-bit opcodes; with 14 two-address instructions used, one-address instructions possible: $2 \times 64 = 128$
44. 4-way set associative cache, 256 lines, 32-byte blocks, 32-bit addresses: set bits **6**, offset **5**, tag **21**
45. Which miss is eliminated by full associativity? **conflict miss**
46. In Mano's interrupt cycle, the return address is stored in: **memory location 0**
47. Vertical microprogramming requires a: **decoder** for the encoded control fields
48. Low-order interleaving places consecutive addresses in: **different memory modules**
49. A DMA transfer of 1 M words/s on 50 M memory cycles/s steals: **2%** of cycles
50. Booth multiplication of $2 \times (-4)$ in 4 bits gives A Q = **1111 1000** (-8)

Quick Revision Box

- NAND: XOR=4 · NOR: XNOR=4 · Johnson n FF $\rightarrow 2n$ states
- IEEE single 1/8/23 bias 127 · double 1/11/52 bias 1023
- Pipeline time $(k + n - 1)t$ · speedup $\rightarrow k$ · Amdahl $1/((1-f)+f/s)$
- Hierarchical cache $T = h \cdot t_c + (1-h)(t_c + t_m)$
- Direct: TAG|LINE|OFFSET · Set-assoc: TAG|SET|OFFSET · Fully: TAG|OFFSET

Programming Languages & Computer Graphics

In this unit

1. Language Concepts	89	6. Computer Graphics	94
2. C Programming — Exam Traps	91	7. Deeper Dive — Scoping, More C Traps, Java	
3. OOP Concepts	92	Essentials & Graphics Traces	97
4. C++ Specifics	93	Previous Year Questions (PYQ pattern)	99
5. Web Programming	93		


Expected questions: 8–10 · Target: 8+ · Type: C/C++ output prediction, OOP concepts, graphics algorithms & transforms

Syllabus checklist

- ☐ Language design & translation: paradigms, binding times, virtual computers, syntax, stages of translation
- ☐ Elementary data types: scalar & composite
- ☐ Programming in C: tokens, data types, control, arrays, structures, unions, strings, pointers, functions, files, command-line args, preprocessor
- ☐ OOP: class, object, inheritance, encapsulation, abstract class, polymorphism
- ☐ C++: constructors/destructors, overloading, virtual functions, templates, exceptions, streams & files
- ☐ Web programming: HTML, DHTML, XML, scripting, Java, servlets, applets
- ☐ Graphics: display devices, raster/random scan, line (DDA, Bresenham), circle & ellipse (mid-point), polygon fill, boundary/flood fill
- ☐ 2-D transforms & viewing: homogeneous coordinates, composite transforms, window-to-viewport, clipping (Cohen-Sutherland, Liang-Barsky, Sutherland-Hodgman)
- ☐ 3-D: polygon/quadric surfaces, splines, Bezier & B-spline, illumination, shading, projections

1. Language Concepts

1.1 Paradigms

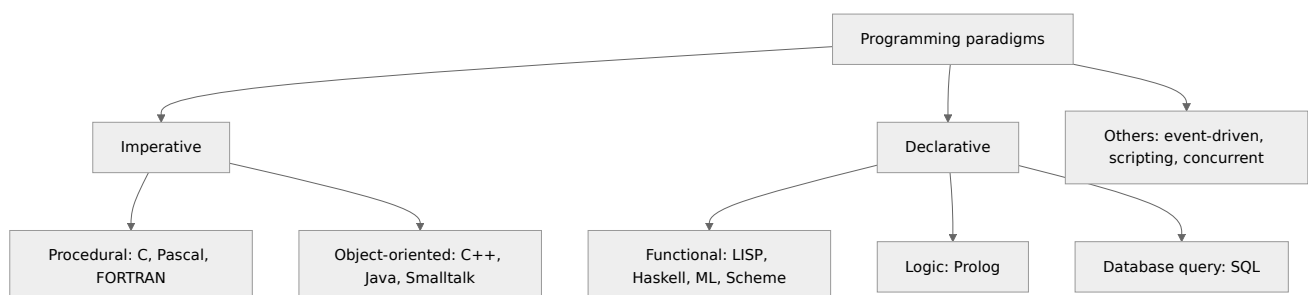

Language	Year/creator	Paradigm
FORTRAN	1957, John Backus	First high-level, scientific
LISP	1958, John McCarthy	Functional, AI
COBOL	1959, Grace Hopper (CODASYL)	Business
ALGOL	1958/60	Block structure, BNF first used
Simula 67	Dahl & Nygaard	First OO language (classes)
Smalltalk	Alan Kay	Pure OO
C	1972, Dennis Ritchie	Procedural
Prolog	1972, Colmerauer	Logic
C++	1979–83, Bjarne Stroustrup	OO + procedural

Language	Year/creator	Paradigm
Ada	1980, US DoD	Concurrency (tasks, rendezvous)
Java	1995, James Gosling (Sun)	OO, platform independent
Python	1991, Guido van Rossum	Multi-paradigm

1.2 Binding Time

Binding = association of an attribute with an entity.

Language design time → Language implementation time → Compile time → Link time → Load time → Run time
 (meaning of *) (size of int) (type of var) (library code) (address) (value)

- **Static binding** (early) before run time; **dynamic binding** (late) at run time.
- **Static scoping (lexical)**: binding by program text (C, Java). **Dynamic scoping**: by calling sequence (early LISP, Perl `local`).
- Storage: static (globals), stack-dynamic (locals), explicit heap-dynamic (new/malloc), implicit heap-dynamic.

1.3 Parameter Passing

Method	Behaviour	Language
Call by value	Copy of value	C (default)
Call by reference	Address passed; changes visible	C++ &, Pascal <code>var</code>
Call by value-result (copy-in/ copy-out)	Copy in, copy back at return	Ada <code>in out</code>
Call by name	Textual substitution, evaluated each use (Jensen's device)	ALGOL 60
Call by need	Lazy evaluation, memoised	Haskell

Classic question:

```
void swap(int x, int y) { int t = x; x = y; y = t; } // by value: caller unchanged
```

With `a = 1`, `i = 1`, `A[1] = 5`, call `f(i, A[i])` where `f` does `x = x + 1; y = y + 1;`: by name → `A[2]` incremented (since `i` changed first); by reference → `A[1]` incremented.

1.4 Data Types

- **Scalar**: integer, real, character, Boolean, enumeration, pointer.
- **Composite**: array, record/struct, union, string, set, list, file.
- Strong typing (Java, Ada), weak typing (C). Type equivalence: **name** vs **structural**.
- Type checking static (compile) vs dynamic (run time). Coercion = implicit type conversion.

2. C Programming — Exam Traps

2.1 Operator precedence (high → low)

```
( ) [ ] -> .      ++ -- (postfix)
! ~ ++ -- + - * & (type) sizeof  (unary, right-to-left)
* / %
+ -
<< >>
< <= > >=
== !=
& ^ |
&& ||
?:                (right-to-left)
= += -= ...      (right-to-left)
,
```

2.2 Output-prediction examples

```
int i = 5;
printf("%d %d", i++, ++i);    // UNDEFINED behaviour (unsequenced modification)

int a = 10, b = 3;
printf("%d %d", a / b, a % b); // 3 1
printf("%d", -7 % 3);          // -1 (sign follows dividend in C99)

int x = 0;
if (x = 5) printf("yes");      // prints yes (assignment, value 5)

char s[] = "NET";
printf("%zu %zu", sizeof(s), strlen(s)); // 4 3

int arr[] = {10, 20, 30};
int *p = arr;
printf("%d", *(p + 2));        // 30 ; arr[i] == *(arr + i) == i[arr]

int k = 3;
printf("%d", k << 2);          // 12 (multiply by 4)

static int counter() { static int c = 0; return ++c; } // retains value: 1, 2, 3 ...

#define SQ(x) x*x
printf("%d", SQ(2+3));          // 2+3*2+3 = 11 (macro pitfall)
```

2.3 Pointers

<code>int *p;</code>	pointer to int
<code>int **pp;</code>	pointer to pointer
<code>int *a[10];</code>	array of 10 pointers to int
<code>int (*a)[10];</code>	pointer to an array of 10 ints
<code>int *f();</code>	function returning pointer to int
<code>int (*f)();</code>	pointer to function returning int

- Pointer arithmetic scales by `sizeof(type)`. `p + 1` on `int*` (4 bytes) adds 4.
- `void*` generic pointer; dangling pointer (freed memory); NULL pointer; wild pointer (uninitialised).
- Memory: `malloc` (uninitialised), `calloc` (zeroed, $n \times \text{size}$), `realloc`, `free`.

2.4 Structures vs Unions

```
struct S { int i; char c; double d; }; // size = sum + padding (typically 16)
union U { int i; char c; double d; }; // size = largest member (8) – members share memory
```


2.5 Storage Classes

Class	Scope	Lifetime	Default	Storage
auto	Block	Block	Garbage	Stack
register	Block	Block	Garbage	CPU register (no &)
static	Block/file	Whole program	0	Data segment
extern	Global	Whole program	0	Data segment

2.6 Files, Command line, Preprocessor

- FILE *fp = fopen("a.txt", "r"); modes r, w, a, r+, w+, a+, rb. fgetc, fputc, fgets, fprintf, fscanf, fread, fwrite, fseek, ftell, rewind.
- int main(int argc, char *argv[]) — argv[0] is the program name; argc ≥ 1.
- Preprocessor: #include, #define, #ifdef, #ifndef, #if, #pragma, #undef; runs **before compilation**.

3. OOP Concepts

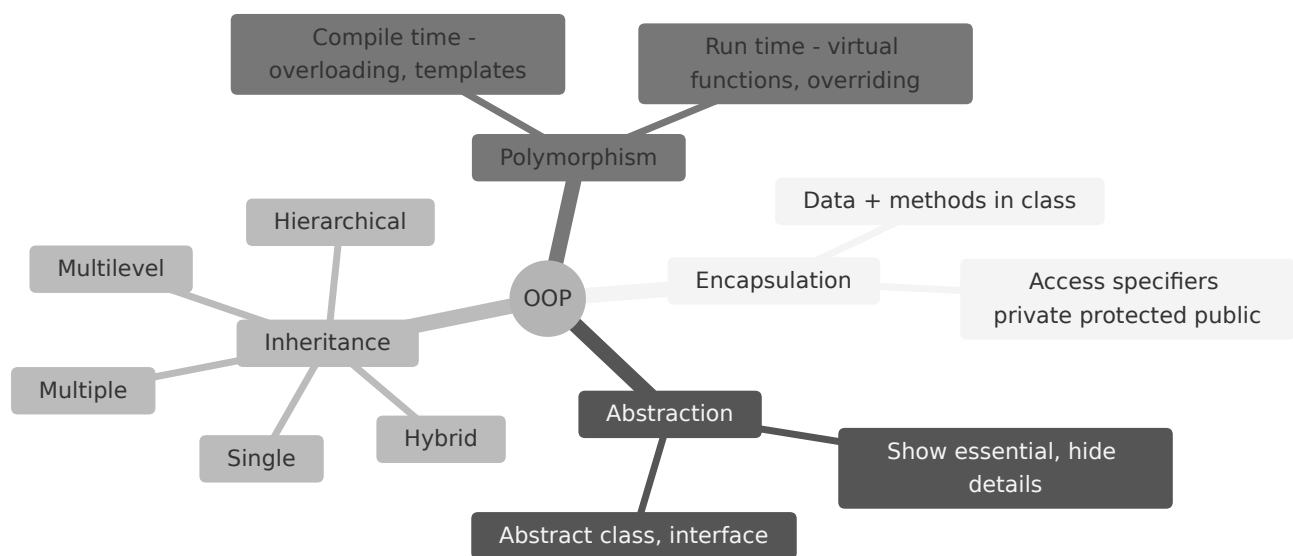

Inheritance types

Single

```

A
|
B
  
```

Multiple

```

  A      B
   \    /
    C
  
```

Multilevel

```

A
|
B
|
C
  
```

Hierarchical

```

  A
 / | \
B  C  D
  
```

Hybrid (diamond)

```

  A
 / \
B   C
 \ /
  D
  
```

- Diamond problem in C++ solved by **virtual base class**. Java avoids multiple class inheritance (uses interfaces).

4. C++ Specifics

Topic	Key point
Constructor	Same name as class, no return type; default, parameterised, copy constructor <code>X(const X&)</code>
Destructor	<code>~X()</code> , no args, cannot be overloaded; called in reverse order of construction
Order of construction	Base → member objects → derived; destruction reverse
<code>this</code> pointer	Hidden pointer to invoking object; not available in static functions
Friend function	Not a member but accesses private data; not inherited
Static member	Shared by all objects; static function accesses only static members
Inline function	Expanded at call site
Function overloading	Same name, different parameter lists (return type alone not enough)
Operator overloading	Cannot overload <code>::</code> , <code>.</code> , <code>*</code> , <code>?:</code> , <code>sizeof</code>
Virtual function	Run-time polymorphism via vtable/vptr ; call through base pointer/reference
Pure virtual	<code>virtual void f() = 0;</code> → class becomes abstract (cannot be instantiated)
Virtual destructor	Needed when deleting derived object via base pointer
Templates	Generic programming: function & class templates (compile-time polymorphism)
Exceptions	<code>try</code> , <code>throw</code> , <code>catch(...)</code> catches all
Streams	<code>cin</code> (istream), <code>cout</code> (ostream), <code>cerr</code> (unbuffered), <code>clog</code> ; <code>ifstream</code> , <code>ofstream</code> , <code>fstream</code>
Access in inheritance	public base: public→public, protected→protected; protected base: both→protected; private base: both→private; private members never accessible

```
class Base { public: virtual void show() { cout << "Base"; } };
class Der : public Base { public: void show() { cout << "Derived"; } };
Base *b = new Der();
b->show();    // "Derived" (virtual)  - without virtual: "Base"
```

5. Web Programming

Technology	Key facts
HTML	Markup; tags <code><a href></code> , <code></code> , <code><table><tr><td></code> , <code><form action method></code> ; HTML5 adds <code><canvas></code> , <code><video></code> , <code><audio></code> , <code><section></code> , <code><article></code>
DHTML	HTML + CSS + JavaScript + DOM → dynamic pages
CSS	Inline > internal > external (priority); selectors <code>.class</code> , <code>#id</code>
XML	User-defined tags, data description, must be well-formed (single root, closed tags, case-sensitive); validated by DTD/XSD ; XSLT for transformation, XPath for navigation
JavaScript	Client-side scripting; <code>document.getElementById</code>
Server-side	PHP, JSP, ASP.NET, Servlets
Java Applet	Runs in browser; life cycle: <code>init()</code> → <code>start()</code> → <code>paint()</code> → <code>stop()</code> → <code>destroy()</code> ; no <code>main()</code> (now obsolete)
Servlet	Runs on server; life cycle: <code>init()</code> → <code>service()</code> (<code>doGet/doPost</code>) → <code>destroy()</code> ; container e.g. Tomcat
Java	Bytecode on JVM ("write once run anywhere"); garbage collection; no pointers; <code>final</code> , <code>abstract</code> , <code>interface</code>
HTTP methods	GET (in URL, idempotent), POST (in body), PUT, DELETE

6. Computer Graphics

6.1 Display Devices

Raster scan	Random (vector) scan
Beam sweeps every row (top to bottom)	Beam draws only the lines of the picture
Uses frame buffer (refresh buffer)	Uses display file (display list)
Realistic images, shading	Line drawings only, smooth lines
Aliasing (jaggies)	No aliasing
TV, monitors	Pen plotters, early CAD

Frame buffer size = Resolution $\times$ bits per pixel / 8 bytes
e.g. 1024×768 , 24-bit colour $\rightarrow 1024 \times 768 \times 3 = 2.25$ MB
Number of colours = $2^{(\text{bits per pixel})}$
Refresh: interlaced (odd/even lines alternately) vs non-interlaced
Aspect ratio = width : height

- CRT parts: electron gun, focusing & deflection system, phosphor coated screen. **Persistence** = time phosphor glows. Shadow-mask (RGB) and beam-penetration (limited colours) colour CRTs.
- LCD, LED, plasma (flat panel); DVST (Direct View Storage Tube). Colour lookup table saves memory.

6.2 Line Drawing

DDA (Digital Differential Analyzer)

```
dx = x2 - x1, dy = y2 - y1, steps = max(|dx|, |dy|)
xinc = dx/steps, yinc = dy/steps
repeat steps times: x += xinc, y += yinc, plot(round(x), round(y))
→ uses floating point and rounding (slower)
```

Bresenham ($|m| < 1$) — integer only:

```
p0 = 2dy - dx
if pk < 0: next = (xk+1, yk),    pk+1 = pk + 2dy
else:     next = (xk+1, yk+1),  pk+1 = pk + 2dy - 2dx
```

Example (20,10) $\rightarrow$ (30,18): $dx=10, dy=8, p_0 = 6, 2dy = 16, 2dy-2dx = -4$.

```
k  pk  plot
0   6  (21,11)
1   2  (22,12)
2  -2  (23,12)
3  14  (24,13)
4  10  (25,14)
5   6  (26,15)
...
```

6.3 Mid-point Circle

- 8-way symmetry: compute one octant (x from 0 to $x = y$), reflect to 8.

```
p0 = 1 - r      (5/4 - r)
if pk < 0: (xk+1, yk),    pk+1 = pk + 2xk+1 + 1
else:     (xk+1, yk-1),  pk+1 = pk + 2xk+1 + 1 - 2yk+1
```

Ellipse: **4-way symmetry**, two regions (slope -1 boundary).

6.4 Filling


- **Scan-line polygon fill:** intersect each scan line with edges, sort x, fill pairs; uses edge table & active edge table.
- **Boundary fill:** fills until boundary colour found. **Flood fill:** replaces a specific interior colour.
- 4-connected vs 8-connected (8-connected may leak through diagonal gaps).
- Inside test: **odd-even (even-odd) rule, non-zero winding number rule.**

6.5 2-D Transformations (Homogeneous coordinates)

Translation	Scaling	Rotation (anticlockwise θ)
$\begin{bmatrix} 1 & 0 & t_x \\ 0 & 1 & t_y \\ 0 & 0 & 1 \end{bmatrix}$	$\begin{bmatrix} s_x & 0 & 0 \\ 0 & s_y & 0 \\ 0 & 0 & 1 \end{bmatrix}$	$\begin{bmatrix} \cos\theta & -\sin\theta & 0 \\ \sin\theta & \cos\theta & 0 \\ 0 & 0 & 1 \end{bmatrix}$
Reflection about x-axis: $\text{diag}(1, -1, 1)$ about origin: $\text{diag}(-1, -1, 1)$ X-shear: $x' = x + sh_x \cdot y$		about y-axis: $\text{diag}(-1, 1, 1)$ about $y = x$: swap x and y $\begin{bmatrix} 0 & 1 & 0 \\ 1 & 0 & 0 \\ 0 & 0 & 1 \end{bmatrix}$ Y-shear: $y' = y + sh_y \cdot x$

- Homogeneous coordinates allow **translation as matrix multiplication** $\rightarrow$ composite transforms.
- Rotation about arbitrary point (x_r, y_r) : $T(x_r, y_r) \cdot R(\theta) \cdot T(-x_r, -y_r)$ (applied right-to-left).
- Successive translations add; successive rotations add angles; successive scalings multiply.
- Matrix multiplication is generally **not commutative** (except e.g. two rotations, two scalings, rotation & uniform scaling).

6.6 Viewing & Window-to-Viewport



$$\begin{aligned}
 x_v &= x_{vmin} + (x_w - x_{wmin}) \cdot s_x & s_x &= (x_{vmax} - x_{vmin}) / (x_{wmax} - x_{wmin}) \\
 y_v &= y_{vmin} + (y_w - y_{wmin}) \cdot s_y & s_y &= (y_{vmax} - y_{vmin}) / (y_{wmax} - y_{wmin})
 \end{aligned}$$

6.7 Clipping

Cohen–Sutherland line clipping — 4-bit region code **TBRL** (Top, Bottom, Right, Left):

1001	1000	1010
0001	0000	0010
0101	0100	0110

window = 0000

- Both codes 0000 $\rightarrow$ trivially accept. $(\text{code1 AND code2}) \neq 0 \rightarrow$ trivially reject. Else clip against an edge and repeat.

Algorithm	For
Cohen–Sutherland	Lines (region codes)
Liang–Barsky	Lines (parametric, faster)
Cyrus–Beck	Lines vs convex polygon window
Nicholl–Lee–Nicholl	Lines (fewest comparisons)
Mid-point subdivision	Lines (binary search)
Sutherland–Hodgman	Polygon clipping (convex window; edge by edge)
Weiler–Atherton	Polygon clipping (concave too)

6.8 3-D Graphics

- **Polygon surfaces:** vertex, edge, polygon tables; plane equation $Ax + By + Cz + D = 0$.
- **Quadric surfaces:** sphere, ellipsoid, torus.
- **Splines:** interpolation (passes through control points) vs approximation (near them).

Bezier curve	B-spline curve
Degree = $n - 1$ for n control points	Degree independent of number of points
Passes through first & last control points	Generally doesn't pass through endpoints (uniform)
Global control — moving one point changes whole curve	Local control
Lies within convex hull of control points	Lies within convex hull
Bernstein basis polynomials	B-spline basis functions

Cubic Bezier: $P(t) = (1-t)^3P_0 + 3t(1-t)^2P_1 + 3t^2(1-t)P_2 + t^3P_3, 0 \leq t \leq 1$.


6.9 Illumination & Shading

$$I = I_a \cdot k_a + I_l \cdot k_d \cdot (N \cdot L) + I_l \cdot k_s \cdot (R \cdot V)^n$$

ambient diffuse (Lambert) specular (Phong, n = shininess)

Shading	Method	Quality
Flat (constant)	One intensity per polygon	Faceted
Gouraud	Interpolate intensities at vertices	Smooth, may miss specular highlights, Mach bands
Phong	Interpolate normals	Best quality, costlier

6.10 Projections

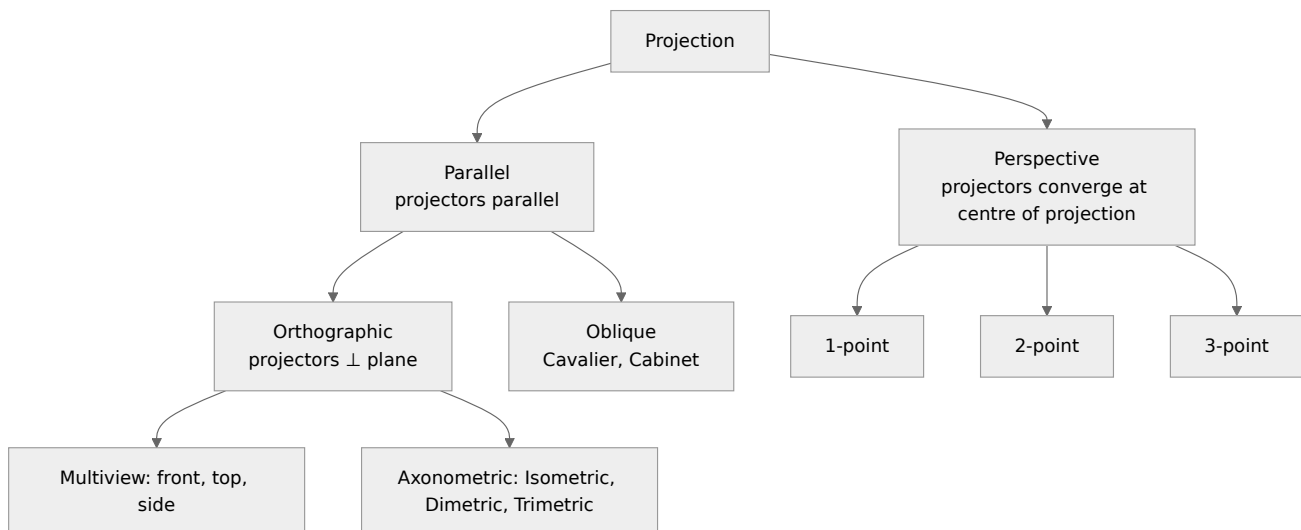

- Perspective: realistic, foreshortening, parallel lines meet at **vanishing points**; does not preserve parallelism/size.
- Cavalier (receding lines full length, 45°) vs Cabinet (half length, 63.4°).
- Hidden surface removal: **Z-buffer (depth buffer)**, painter's (depth sort), scan-line, BSP tree, back-face detection ($N \cdot V > 0 \rightarrow$ back face), Warnock (area subdivision), ray casting.

7. Deeper Dive — Scoping, More C Traps, Java Essentials & Graphics Traces

7.1 Static vs Dynamic Scoping — Classic Question

```
int x = 1;
void f() { printf("%d", x); }
void g() { int x = 2; f(); }
int main() { g(); }
```

- **Static (lexical) scoping:** f's free variable x refers to the global x → prints **1** (C, Java, Pascal).
- **Dynamic scoping:** x is looked up in the most recent active frame (g's) → prints **2**.

7.2 Recursion Trace

```
int fun(int n) { if (n <= 1) return 1; return n * fun(n - 2); }
fun(7) = 7 × fun(5) = 7 × 5 × fun(3) = 7 × 5 × 3 × fun(1) = 105
```

Call stack (grows downward)	Returns (unwinding)
fun(7)	fun(1) → 1
fun(5)	fun(3) → 3 × 1 = 3
fun(3)	fun(5) → 5 × 3 = 15
fun(1)	fun(7) → 7 × 15 = 105

7.3 More C Output Questions (with reasons)

```
// 1. switch fall-through
int k = 2;
switch (k) { case 1: printf("A"); case 2: printf("B"); case 3: printf("C"); break; default: printf("D"); }
// Output: BC    (no break after case 2)

// 2. bitwise
printf("%d %d %d", 5 & 3, 5 | 3, 5 ^ 3);      // 1 7 6
printf("%d", ~5);                          // -6 (2's complement: ~x = -x - 1)

// 3. pointer to string
char *s = "UGCNET";
printf("%s", s + 3);                        // NET
printf("%c", *s + 1);                       // V   ('U' + 1)

// 4. post-increment in loop condition
int i = 0; while (i++ < 3); printf("%d", i);  // 4

// 5. integer division & casting
printf("%.2f", (float)7 / 2);                // 3.50
printf("%d", 7 / 2 * 2);                     // 6

// 6. comma operator
int a = (1, 2, 3); printf("%d", a);          // 3

// 7. short-circuit
int p = 0, q = 5;
if (p && (q = 10)) {} printf("%d", q);       // 5 (second operand never evaluated)

// 8. 2-D array pointer arithmetic
int m[2][3] = {{1,2,3},{4,5,6}};
printf("%d", *(m + 1) + 2);                  // 6  (m[1][2])
```

7.4 Java Essentials

Modifier	Same class	Same package	Subclass (other pkg)	World
private	✓	✗	✗	✗
default (none)	✓	✓	✗	✗
protected	✓	✓	✓	✗
public	✓	✓	✓	✓

Abstract class	Interface
Can have constructors, state (fields), concrete methods	Constants + abstract methods (default/static methods since Java 8)
Single inheritance (extends)	A class can implements many interfaces
Use for "is-a" with shared code	Use for capability contracts

- **final** variable = constant; **final** method = cannot be overridden; **final** class = cannot be inherited (String).
- **static** members belong to the class. **super** refers to the parent; **this** to the current object.
- JVM components: **class loader** → **bytecode verifier** → **interpreter** / **JIT compiler**; runtime areas: heap, method area, stack, PC registers.
- Exceptions: **checked** (IOException — must be handled or declared) vs **unchecked** (RuntimeException, e.g. NullPointerException, ArithmeticException).
- **String** is immutable; **StringBuffer** (synchronised) and **StringBuilder** (faster) are mutable.

7.5 Graphics Traces

DDA: (2, 3) → (8, 6); dx = 6, dy = 3, steps = 6, x-inc = 1, y-inc = 0.5.

```
x : 2   3   4   5   6   7   8
y : 3   3.5 4   4.5 5   5.5 6
plotted (round half up): (2,3) (3,4) (4,4) (5,5) (6,5) (7,6) (8,6)
```

Mid-point circle, r = 10 (first octant, start (0, 10), p₀ = 1 - r = -9):

k	p _k	Next pixel	p _{k+1}
0	-9	(1, 10)	-6
1	-6	(2, 10)	-1
2	-1	(3, 10)	6
3	6	(4, 9)	-3
4	-3	(5, 9)	8
5	8	(6, 8)	5
6	5	(7, 7)	stop (x ≥ y)

Composite transformation: rotate P(4, 2) by 90° anticlockwise about pivot (2, 2).

1. Translate by (-2, -2): (2, 0)
2. Rotate 90°: (x cos90 - y sin90, x sin90 + y cos90) = (0, 2)
3. Translate by (+2, +2): (2, 4) → P' = (2, 4)

Scaling about fixed point (x_f, y_f): T(x_f, y_f) · S(s_x, s_y) · T(-x_f, -y_f) → x' = x_f + (x - x_f)·s_x.

Cohen-Sutherland: window (0, 0)–(10, 10); line (-5, 5) → (15, 5). Codes 0001 and 0010; AND = 0000 → not trivially rejected; clip at x = 0 → (0, 5) and at x = 10 → (10, 5).

Liang-Barsky: same window; line (-5, 3) → (15, 9); Δx = 20, Δy = 6.

$p_1 = -\Delta x = -20$, $q_1 = x_1 - x_{\min} = -5 \rightarrow r_1 = 0.25$ (entering)
 $p_2 = \Delta x = 20$, $q_2 = x_{\max} - x_1 = 15 \rightarrow r_2 = 0.75$ (leaving)
 $p_3 = -\Delta y = -6$, $q_3 = y_1 - y_{\min} = 3 \rightarrow r_3 = -0.5$ (entering)
 $p_4 = \Delta y = 6$, $q_4 = y_{\max} - y_1 = 7 \rightarrow r_4 \approx 1.17$ (leaving)
 $u_1 = \max(0, 0.25, -0.5) = 0.25$; $u_2 = \min(1, 0.75, 1.17) = 0.75$
 Clipped line: $(-5 + 0.25 \cdot 20, 3 + 0.25 \cdot 6) = (0, 4.5)$ to $(-5 + 0.75 \cdot 20, 3 + 0.75 \cdot 6) = (10, 7.5)$

7.6 3-D Transformation Matrices (homogeneous 4 × 4)

Translation	Scaling	Rotation about z-axis
$\begin{vmatrix} 1 & 0 & 0 & t_x \\ 0 & 1 & 0 & t_y \\ 0 & 0 & 1 & t_z \\ 0 & 0 & 0 & 1 \end{vmatrix}$	$\begin{vmatrix} s_x & 0 & 0 & 0 \\ 0 & s_y & 0 & 0 \\ 0 & 0 & s_z & 0 \\ 0 & 0 & 0 & 1 \end{vmatrix}$	$\begin{vmatrix} \cos\theta & -\sin\theta & 0 & 0 \\ \sin\theta & \cos\theta & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{vmatrix}$

Rotation about x: $y' = y \cos\theta - z \sin\theta$, $z' = y \sin\theta + z \cos\theta$
 Rotation about y: $z' = z \cos\theta - x \sin\theta$, $x' = z \sin\theta + x \cos\theta$
 Perspective (centre of projection at origin, plane $z = d$): $x' = x \cdot d/z$, $y' = y \cdot d/z$

Previous Year Questions (PYQ pattern)

Language concepts

1. First object-oriented language: **Simula 67**
2. Which uses call by name? **ALGOL 60**
3. Binding of a variable to its type in C occurs at: **compile time**
4. Dynamic scoping resolves a non-local name using: **the calling sequence (most recent active binding)**
5. Prolog is a: **logic programming language**
6. LISP is primarily used for: **list processing / AI (functional)**

C

7. `int a = 5; a = a++ + ++a;` → **undefined behaviour** (option often given as 12 or 13; correct per standard: UB)
8. Output of `printf("%d", sizeof('A'))` in C: **4** (char constant is int in C; 1 in C++)
9. `#define MUL(a,b) a*b; MUL(2+3, 4)` → **2+3*4 = 14**
10. Size of union `{int a; char b[10];}` (int=4): **12** with alignment (largest member 10, padded to multiple of 4)
11. Which storage class retains value between function calls? **static**
12. `char *p = "hello"; printf("%c", *(p+1));` → **e**
13. `int (*p)[5];` declares: **pointer to an array of 5 integers**
14. Which function allocates zero-initialised memory? **calloc**

OOP/C++

15. Run-time polymorphism is achieved via: **virtual functions**
16. A class with at least one pure virtual function is: **abstract class**
17. Which operator cannot be overloaded? **:: (scope resolution)** (also `., ?:, sizeof`)
18. The copy constructor takes argument by: **reference** (by value would cause infinite recursion)
19. Diamond problem is resolved by: **virtual base class**
20. Templates support: **generic programming (compile-time polymorphism)**
21. Order of destructor calls: **reverse of constructor calls**
22. Java does not support multiple inheritance of classes; achieved via: **interfaces**

Web

23. Applet life cycle method called first: **init()**
24. Servlet method handling each request: **service()**
25. XML document conforming to DTD is called: **valid**; following syntax rules: **well-formed**
26. DHTML combines: **HTML, CSS, JavaScript, DOM**

Graphics

27. Frame buffer for 640×480 with 8 bits per pixel: **300 KB** (307200 bytes)
28. Bresenham's line algorithm uses: **only integer arithmetic**
29. Initial decision parameter for mid-point circle with $r = 10$: **$1 - 10 = -9$**
30. Circle uses __-way symmetry, ellipse __-way: **8, 4**
31. Composite transformation for rotation about point P: **$T(P) \cdot R(\theta) \cdot T(-P)$**
32. Region code of a point above-left of window (TBRL): **1001**
33. Line endpoints codes 0101 and 0110: $AND = 0100 \neq 0 \rightarrow$ **trivially rejected**
34. Polygon clipping algorithm: **Sutherland–Hodgman**
35. Shading that interpolates normal vectors: **Phong**
36. Z-buffer algorithm is a: **image-space hidden surface method**
37. Bezier curve with 4 control points has degree: **3**
38. Which curve has local control? **B-spline**
39. Projection in which parallel lines converge: **Perspective**
40. Isometric projection is a type of: **axonometric orthographic projection**
41. Scaling matrix with $s_x = s_y = -1$ is equivalent to: **reflection about origin (rotation by 180°)**
42. Translating (2,3) by (4,-1): **(6,2)**

More practice questions

43. Under dynamic scoping, the code in §7.1 prints: **2**
44. Output of `printf("%d", ~0);` in C: **-1**
45. Output of `printf("%d", 10 >> 1 << 2);`: **(10 » 1) « 2 = 20**
46. In Java, a member visible only within its package has: **default (package-private) access**
47. A Java class that cannot be subclassed is declared: **final**
48. NullPointerException is a: **unchecked (runtime) exception**
49. Number of steps in DDA for line (1, 1) to (9, 4): **8**
50. Rotating point (1, 0) by 90° anticlockwise about origin gives: **(0, 1)**
51. Reflection of (3, -2) about the line $y = x$: **(-2, 3)**
52. In Liang–Barsky, $p_k < 0$ means the line is: **entering** the clip boundary
53. Shear in x with $sh_x = 2$ applied to (1, 3): **(7, 3)**
54. Homogeneous coordinates for 3-D points use: **4-element vectors / 4 × 4 matrices**

Quick Revision Box

- Simula 67 first OO · ALGOL call-by-name · C static scope
- `::`, `.`, `?:`, `sizeof` can't be overloaded · Pure virtual $\rightarrow$ abstract
- Bresenham $p_0 = 2dy - dx$ · Mid-point circle $p_0 = 1 - r$
- TBRL codes; $AND \neq 0$ reject; both 0 accept
- Gouraud = intensity interpolation · Phong = normal interpolation
- Bezier global control, passes endpoints · B-spline local control

Database Management Systems

In this unit

1. Architecture	102	8. File Organisation & Indexing	108
2. ER Model	102	9. Advanced & Enhanced Databases	109
3. Keys & Integrity	103	10. Data Warehousing & Mining	110
4. Relational Algebra & Calculus	104	11. Big Data & NoSQL	110
5. SQL	105	12. Deeper Dive — SQL on Real Tables, Minimal Cover, Full Normalisation & Schedules	111
6. Functional Dependencies & Normalisation	105	Previous Year Questions (PYQ pattern)	113
7. Transactions	106		


Expected questions: 10–12 · Target: 10+ · Type: normalisation, keys, SQL output, transactions, concepts — very scoring

Syllabus checklist

- ☐ Database system concepts & architecture: data models, schemas, instances, three-schema architecture, data independence, database languages & interfaces, centralised & client/server architecture
- ☐ Data modelling: ER diagram, relational model (constraints, languages, design, programming), relational algebra & calculus, codd rules
- ☐ SQL: data definition, types, constraints, queries, insert, delete, update, views, stored procedures, functions, triggers, SQL injection
- ☐ Normalisation: functional dependencies, 1NF, 2NF, 3NF, BCNF, multivalued dependencies & 4NF, join dependencies & 5NF, inclusion dependencies
- ☐ Transaction processing, concurrency control & recovery
- ☐ Physical database design: file organisation, indexing (single-level, multilevel, B-tree, B+-tree), query processing & optimisation
- ☐ Object & object-relational databases; database security
- ☐ Enhanced data models: temporal, multimedia, deductive, XML & internet databases, mobile, GIS, genome, distributed databases
- ☐ Data warehousing & data mining: OLAP, data cube, association rules, classification, clustering
- ☐ Big data systems: characteristics, types, architecture, MapReduce, Hadoop, NoSQL (CAP theorem, document, key-value, column, graph)

1. Architecture

1.1 Three-Schema (ANSI/SPARC) Architecture

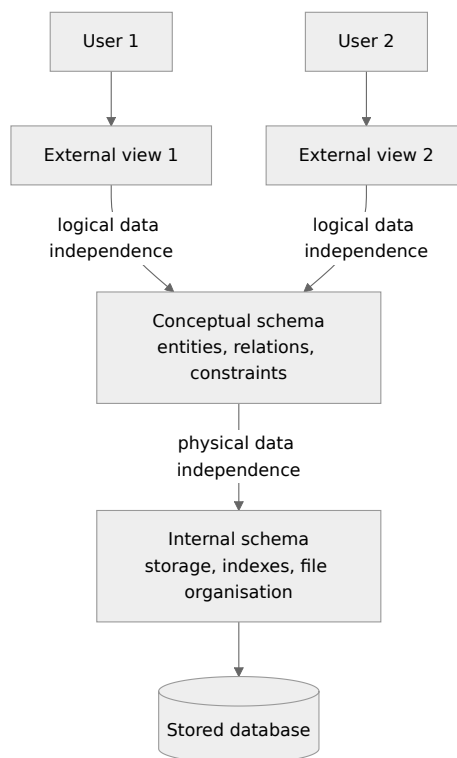


- **Logical data independence:** change conceptual schema without changing external views (harder to achieve).
- **Physical data independence:** change internal schema without changing conceptual schema.
- **Schema** = structure (intension, changes rarely); **Instance** = data at a moment (extension).
- Languages: **DDL** (CREATE, ALTER, DROP, TRUNCATE), **DML** (SELECT, INSERT, UPDATE, DELETE), **DCL** (GRANT, REVOKE), **TCL** (COMMIT, ROLLBACK, SAVEPOINT).
- Data models: hierarchical (IMS, tree), network (CODASYL, graph), relational (Codd 1970), object-oriented, object-relational.
- Architectures: centralised, **2-tier** client/server, **3-tier** (client – application server – DB server).

1.2 DBMS Components


Query processor (DDL interpreter, DML compiler, query evaluation engine), storage manager (authorisation, transaction manager, file manager, buffer manager), data dictionary (metadata).

2. ER Model

ER notation (Chen)

	Entity		Weak entity
(attr)	Attribute	((multi))	Multivalued
(<u>key</u>)	Key (underlined)	(- - -)	Derived (dashed)
◇	Relationship	◆	Identifying relationship (double diamond)
==	Total participation	—	Partial participation

- **Cardinality:** 1:1, 1:N, M:N. **Participation:** total (every entity participates — double line) or partial.
- **Weak entity:** no key of its own; identified via owner entity + partial key (discriminator).
- **Specialisation** (top-down), **generalisation** (bottom-up), **aggregation** (relationship as entity). Disjoint/overlapping, total/partial constraints.

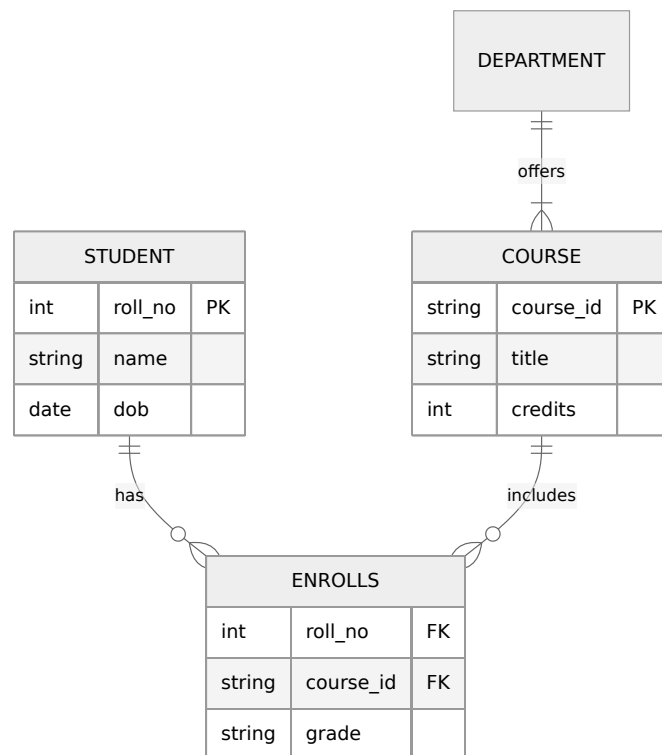


ER → Relational mapping (minimum tables)

Case	Tables
Strong entity	1 table each
1:1 relationship	Merge into either side (total participation side preferred)
1:N relationship	FK on N-side; no separate table
M:N relationship	Separate table with both PKs
Multivalued attribute	Separate table
Weak entity	Table with owner's PK + partial key

Classic: E1 —M:N— E2 —1:N— E3 → minimum tables = 3 entities + 1 (for M:N) = 4.

3. Keys & Integrity

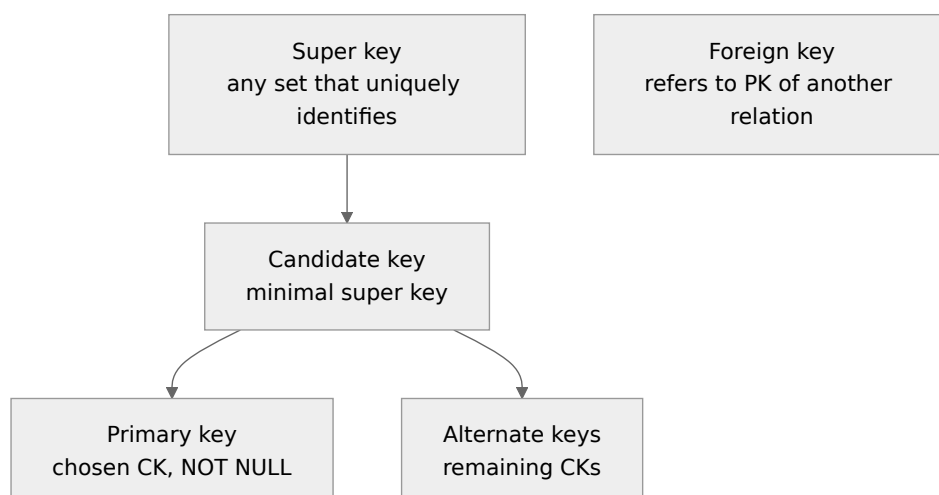

- Number of super keys of $R(A_1 \dots A_n)$ with single candidate key A_1 : 2^{n-1} .
- With candidate keys A_1 and A_2 : $2^{n-1} + 2^{n-1} - 2^{n-2} = 3 \cdot 2^{n-2}$.
- **Entity integrity**: PK cannot be NULL. **Referential integrity**: FK value must match an existing PK or be NULL.
- ON DELETE CASCADE / SET NULL / RESTRICT.

Codd's 12 rules (13 with Rule 0): Rule 0 foundation; 1 information; 2 guaranteed access; 3 systematic NULLs; 4 active online catalog; 5 comprehensive data sublanguage; 6 view updating; 7 high-level insert/update/delete; 8 physical data independence; 9 logical data independence; 10 integrity independence; 11 distribution independence; 12 non-subversion.

4. Relational Algebra & Calculus

Operation	Symbol	Notes
Selection	$\sigma_{\text{cond}}(R)$	Rows; commutative
Projection	$\pi_{\text{attrs}}(R)$	Columns; removes duplicates
Union	$R \cup S$	Union-compatible
Difference	$R - S$	
Cartesian product	$R \times S$	
Rename	ρ	
Intersection	$R \cap S = R - (R - S)$	Derived
Natural join	$R \bowtie S$	Equal common attrs
Theta join	$R \bowtie_{\theta} S$	$\sigma_{\theta}(R \times S)$
Division	$R \div S$	"for all" queries
Outer joins	$\bowtie \bowtie \bowtie$	Keep unmatched with NULLs

Fundamental: $\sigma, \pi, \cup, -, \times, \rho$. Relational algebra is **procedural**; relational calculus (TRC/DRC) is **non-procedural**. Safe calculus = relational algebra in power (relational completeness).

Tuple sizes: R has m tuples, S has n tuples

$R \times S$	$\rightarrow m \cdot n$
$R \bowtie S$	$\rightarrow 0 \dots m \cdot n$
$R \cup S$	$\rightarrow \max(m, n) \dots m+n$
$R \cap S$	$\rightarrow 0 \dots \min(m, n)$
$R - S$	$\rightarrow 0 \dots m$
$R \bowtie S$ (left outer)	$\rightarrow \text{at least } m$

Division example: "students who took **all** courses": $\pi_{\{\text{sid}, \text{cid}\}}(\text{Enrolled}) \div \pi_{\{\text{cid}\}}(\text{Course})$.

TRC: $\{ t \mid t \in \text{Student} \wedge t.\text{age} > 20 \}$ · DRC: $\{ \langle n \rangle \mid \exists a (\langle n, a \rangle \in \text{Student} \wedge a > 20) \}$.

5. SQL

```
SELECT dept, COUNT(*) AS n, AVG(salary)
FROM   employee
WHERE  salary > 20000          -- filters rows (before grouping)
GROUP BY dept
HAVING COUNT(*) > 2          -- filters groups
ORDER BY n DESC;
```

Logical order of execution: **FROM** → **WHERE** → **GROUP BY** → **HAVING** → **SELECT** → **DISTINCT** → **ORDER BY** → **LIMIT**.

- **COUNT(*)** counts all rows; **COUNT(col)** ignores NULLs; aggregates (SUM/AVG/MAX/MIN) ignore NULLs.
- NULL comparisons give UNKNOWN; use **IS NULL**. **NULL = NULL** → UNKNOWN.
- **DELETE** (DML, row-wise, rollback possible, WHERE allowed) vs **TRUNCATE** (DDL, all rows, faster) vs **DROP** (removes table structure).
- **IN**, **EXISTS**, **ANY/SOME**, **ALL**: $x > \text{ALL (subquery)}$ = greater than max; $x > \text{ANY}$ = greater than min.
- **UNION** removes duplicates; **UNION ALL** keeps them.
- Correlated subquery: inner query refers to outer — evaluated per outer row.
- Constraints: **PRIMARY KEY**, **FOREIGN KEY**, **UNIQUE** (allows NULL), **NOT NULL**, **CHECK**, **DEFAULT**.
- **View**: virtual table (stored query); updatable if based on single table without aggregates/DISTINCT/GROUP BY. **Materialised view** stores results.
- **Trigger**: ECA (Event–Condition–Action) rule; BEFORE/AFTER, row-level/statement-level.
- **Stored procedure** (CALL, may not return value) vs **function** (returns value, usable in SELECT).
- **SQL injection**: attacker inserts SQL via input, e.g. ' OR '1'='1. Prevent with **prepared statements/parameterised queries**, input validation, least privilege.

Nth highest salary:

```
SELECT MAX(salary) FROM emp WHERE salary < (SELECT MAX(salary) FROM emp); -- 2nd highest
```

6. Functional Dependencies & Normalisation

6.1 Armstrong's Axioms

- **Reflexivity**: $Y \subseteq X \Rightarrow X \rightarrow Y$ · **Augmentation**: $X \rightarrow Y \Rightarrow XZ \rightarrow YZ$ · **Transitivity**: $X \rightarrow Y, Y \rightarrow Z \Rightarrow X \rightarrow Z$
- Derived: Union, Decomposition, Pseudo-transitivity ($X \rightarrow Y, WY \rightarrow Z \Rightarrow WX \rightarrow Z$).
- Sound and complete.

6.2 Attribute Closure — Finding Candidate Keys

$R(A, B, C, D, E), F = \{A \rightarrow B, B \rightarrow C, CD \rightarrow E\}$

```
A+   = {A, B, C}
AD+  = {A, D, B, C, E} = all → AD is a key
A and D never appear on the RHS → every key must contain both → AD is the ONLY candidate key
```

Trick: attributes not on any RHS must be in every key; attributes only on RHS are never in a key.

Minimal (canonical) cover: single attribute on RHS → remove extraneous LHS attributes → remove redundant FDs.

6.3 Normal Forms



NF	Condition (for every non-trivial FD $X \rightarrow A$)
1NF	All attributes atomic (no repeating groups / multivalued)

NF	Condition (for every non-trivial FD $X \rightarrow A$)
2NF	1NF + no partial dependency (non-prime attribute depends on part of a candidate key)
3NF	X is a super key OR A is a prime attribute
BCNF	X is a super key
4NF	For every non-trivial MVD $X \twoheadrightarrow Y$, X is a super key
5NF	Every join dependency is implied by candidate keys

- Relation with **only two attributes is always in BCNF**.
- If all candidate keys are single attributes $\Rightarrow$ automatically 2NF.
- If all attributes are prime $\Rightarrow$ automatically 3NF.

6.4 Decomposition Properties

Property	Test
Lossless join (must)	R into R1, R2 is lossless iff $(R1 \cap R2) \rightarrow R1$ or $(R1 \cap R2) \rightarrow R2$
Dependency preserving (desirable)	$(F1 \cup F2)^+ = F^+$

- 3NF decomposition: always lossless **and** dependency-preserving (synthesis algorithm).
- BCNF decomposition: always lossless but **not always** dependency-preserving.


Worked: $R(A,B,C)$, $F = \{AB \rightarrow C, C \rightarrow B\}$. Keys: AB, AC. $C \rightarrow B$: C not super key but B is prime $\rightarrow$ **3NF, not BCNF**. BCNF decomposition (C,B) , (A,C) loses $AB \rightarrow C$.

7. Transactions

ACID

Property	Ensured by
Atomicity (all or nothing)	Recovery manager (undo log)
Consistency	Programmer + integrity constraints
Isolation	Concurrency control manager
Durability	Recovery manager (redo log)

Transaction States

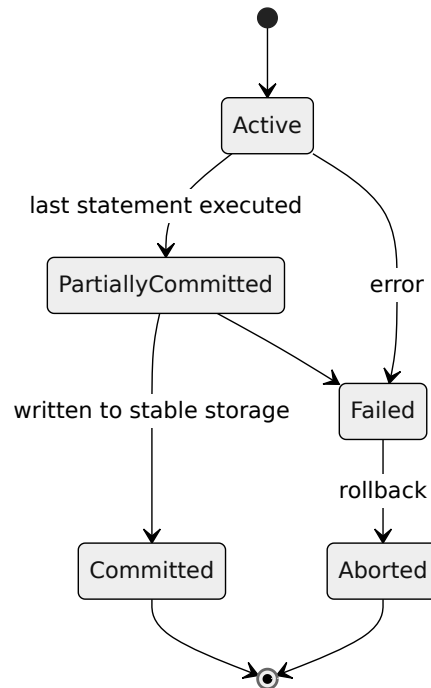

Schedules & Serializability

- **Conflicting operations**: same data item, different transactions, at least one write (RW, WR, WW).
- **Conflict serializable** $\Leftrightarrow$ **precedence graph** is **acyclic** (edge $T_i \rightarrow T_j$ if T_i 's op conflicts with and precedes T_j 's).
- **View serializable**: same initial reads, same reads-from, same final writes. Every conflict-serializable schedule is view serializable; a view-serializable schedule that is not conflict-serializable has **blind writes**.
- Number of serial schedules of n transactions: $n!$.

Example schedule: $r_1(A) \ w_2(A) \ w_1(A) \ r_3(A)$

Conflicts: $r_1(A) \rightarrow w_2(A)$: $T_1 \rightarrow T_2$; $w_2(A) \rightarrow w_1(A)$: $T_2 \rightarrow T_1 \Rightarrow$ cycle $\Rightarrow$ NOT conflict serializable

Recoverability hierarchy

Serial $\subset$ Strict $\subset$ Cascadeless (ACA) $\subset$ Recoverable $\subset$ All schedules

- **Recoverable**: if T_j reads from T_i , T_i commits before T_j commits.
- **Cascadeless**: read only committed data.
- **Strict**: no read/write of item until the last writer commits/aborts.

Concurrency problems

Lost update (WW), dirty read (WR — uncommitted dependency), unrepeatable read (RW), phantom read (insertions). SQL isolation levels: READ UNCOMMITTED < READ COMMITTED < REPEATABLE READ < SERIALIZABLE.

Concurrency Control Protocols

Protocol	Key points
Lock-based (S/X)	S compatible with S only
Basic 2PL	Growing phase then shrinking phase; ensures conflict serializability; deadlock possible , cascading rollback possible
Strict 2PL	Hold X locks till commit → cascadeless, strict
Rigorous 2PL	Hold all locks till commit; serial order = commit order
Conservative 2PL	Acquire all locks before starting → deadlock-free
Timestamp ordering	Older first; Read: if $TS(T) < W-TS(X)$ → rollback; Write: if $TS(T) < R-TS(X)$ or $< W-TS(X)$ → rollback. Deadlock-free, may starve
Thomas' write rule	Ignore obsolete write instead of rollback → allows some view-serializable schedules
Validation (optimistic)	Read → validate → write phases
Multiversion (MVCC)	Readers don't block writers
Multiple granularity	Intention locks IS, IX, SIX

Deadlock prevention with timestamps:

Wait-Die (non-preemptive): older requests → WAITS; younger requests → DIES (rolled back)
Wound-Wait (preemptive): older requests → WOUNDS (aborts) younger; younger requests → WAITS

Recovery

- **Log-based**: , <T, X, old, new>, .
- **Deferred update** (NO-UNDO/REDO), **Immediate update** (UNDO/REDO).
- **Checkpoint** reduces log scanning. After crash: transactions committed after checkpoint → REDO; uncommitted → UNDO.
- **ARIES** (WAL, LSN, repeating history): Analysis → Redo → Undo.
- **WAL (Write-Ahead Logging)**: log record written to stable storage before data page.
- Shadow paging: no log needed; copy-on-write page table.


8. File Organisation & Indexing

Index	Description
Primary	On ordering key field; sparse (one entry per block)
Clustering	On ordering non-key field
Secondary	On non-ordering field; dense
Dense	Entry for every record
Sparse	Entry for some records (needs sorted file)
Multilevel	Index on index — log _{fo} (blocks) levels

- A file can have **at most one primary or clustering index** but many secondary indexes.

B-Tree vs B+ Tree

B+ tree of order 3 (internal: keys only, leaves linked)



B-Tree	B+ Tree
Data pointers in all nodes	Data pointers only at leaves
No duplicate keys	Internal keys repeated in leaves
Leaves not linked	Leaves linked → efficient range/sequential access
Lower fan-out	Higher fan-out (internal nodes smaller) → fewer levels

Order p (max children): every node $\leq p$ children; non-root internal $\geq \lceil p/2 \rceil$ children; root ≥ 2 . **Order calculation:** block 1024 B, key 9 B, block pointer 6 B, record pointer 7 B.

- B+ internal: $p \cdot 6 + (p-1) \cdot 9 \leq 1024 \rightarrow 15p \leq 1033 \rightarrow p = 68$.
- B+ leaf: $q(9 + 7) + 6 \leq 1024 \rightarrow q = 63$.
- B-tree node: $p \cdot 6 + (p-1)(9 + 7) \leq 1024 \rightarrow 22p \leq 1040 \rightarrow p = 47$.

Hashing: static (overflow chains), dynamic — extendible hashing (directory doubles, global/local depth), linear hashing.

Query Optimisation


- Heuristics: perform **selection early**, projection early, most restrictive selection first, avoid Cartesian products, replace $\times + \sigma$ with joins.
- Cost-based: estimate block transfers & seeks. Join algorithms: nested-loop ($nr \cdot bs + br$), block nested-loop ($br \cdot bs + br$), indexed, sort-merge, hash join.
- Query tree; equivalence rules (σ commutes, cascade of π , joins associative/commutative).

9. Advanced & Enhanced Databases

Model	Notes
OODBMS	Objects, OID, inheritance; ODMG standard, OQL
ORDBMS	Relational + UDTs, inheritance (PostgreSQL, Oracle)
Temporal	Valid time & transaction time
Multimedia	Images, audio, video; content-based retrieval
Deductive	Facts + rules; Datalog (Prolog-like)
XML DB	XPath, XQuery; native XML DBs
Mobile	Intermittent connectivity, caching
GIS	Spatial data: raster/vector; R-trees, quad-trees
Genome	Biological sequence data
Distributed DB	Fragmentation (horizontal, vertical, mixed), replication, transparency; 2PC (two-phase commit: prepare → commit) — blocking; 3PC non-blocking

Security: discretionary (GRANT/REVOKE, WITH GRANT OPTION), mandatory (Bell-LaPadula: no read up, no write down), role-based access control, statistical DB inference control, encryption.

10. Data Warehousing & Mining

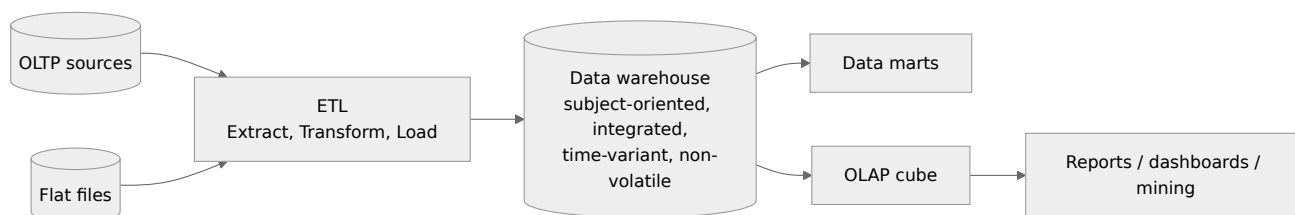

- Definition by **W.H. Inmon**: subject-oriented, integrated, time-variant, non-volatile. Kimball: dimensional modelling (bottom-up data marts).
- Schemas: **Star** (one fact table + denormalised dimensions), **Snowflake** (normalised dimensions), **Fact constellation** / **Galaxy** (multiple fact tables).
- OLAP operations: **roll-up** (aggregate up / drill-up), **drill-down**, **slice** (fix one dimension), **dice** (sub-cube on multiple), **pivot** (rotate).
- ROLAP (relational), MOLAP (multidimensional arrays), HOLAP (hybrid).
- Number of cuboids in n-dimensional cube without hierarchies: 2^n ; with L_i levels: $\prod(L_i + 1)$.
- OLTP (current, detailed, many short transactions, normalised) vs OLAP (historical, summarised, complex queries, denormalised).

Data mining (KDD process)

Selection → Pre-processing → Transformation → **Data mining** → Interpretation/Evaluation.

Association rules (Apriori):

$\text{Support}(A \rightarrow B) = \text{count}(A \cup B) / N$
 $\text{Confidence}(A \rightarrow B) = \text{support}(A \cup B) / \text{support}(A)$
 $\text{Lift} = \text{confidence}(A \rightarrow B) / \text{support}(B) \quad (>1 \text{ positive correlation})$
 Apriori property: every subset of a frequent itemset is frequent (anti-monotone)
 FP-growth: no candidate generation (FP-tree)

- Classification (supervised): decision tree (ID3 – information gain, C4.5 – gain ratio, CART – Gini), Naive Bayes, k-NN, SVM.
- Clustering (unsupervised): k-means (partitioning), k-medoids (PAM), hierarchical (agglomerative/divisive), DBSCAN (density).
- Outlier detection, regression.

11. Big Data & NoSQL

- **5 Vs**: Volume, Velocity, Variety, Veracity, Value (3 Vs originally — Doug Laney).
- Types: structured, semi-structured (JSON, XML), unstructured (text, video).
- **Hadoop**: HDFS (NameNode = master/metadata, DataNode = storage; default block 128 MB, replication 3) + **MapReduce** (Map → Shuffle & Sort → Reduce) + **YARN** (ResourceManager, NodeManager). Ecosystem: Hive (SQL-like), Pig (Pig Latin), HBase (column store), Sqoop (RDBMS ↔ HDFS), Flume (logs), ZooKeeper (coordination), Oozie (workflow), Spark (in-memory, RDDs).
- **CAP theorem** (Brewer): a distributed system can guarantee only **2 of 3**: Consistency, Availability, Partition tolerance. (CP: HBase, MongoDB; AP: Cassandra, CouchDB, DynamoDB.)
- **BASE**: Basically Available, Soft state, Eventual consistency (vs ACID).

NoSQL type	Examples
Key-value	Redis, DynamoDB, Riak
Document	MongoDB, CouchDB
Column-family	Cassandra, HBase, Bigtable
Graph	Neo4j, JanusGraph

12. Deeper Dive — SQL on Real Tables, Minimal Cover, Full Normalisation & Schedules

12.1 SQL Worked on Sample Data

EMP

eid	name	dept	salary
1	Asha	CS	50000
2	Ravi	CS	40000
3	Meena	EE	45000
4	John	EE	30000
5	Priya	ME	60000
6	Kiran	NULL	35000

DEPT

dept	building
CS	B1
EE	B2
CE	B3

#	Query	Result
1	SELECT dept, COUNT(*), AVG(salary) FROM EMP GROUP BY dept HAVING COUNT(*) > 1	(CS, 2, 45000), (EE, 2, 37500)
2	SELECT name FROM EMP WHERE salary > (SELECT AVG(salary) FROM EMP)	avg = 43333.33 → Asha, Meena, Priya
3	SELECT COUNT(dept), COUNT(DISTINCT dept) FROM EMP	5, 3 (NULL ignored)
4	EMP JOIN DEPT ON EMP.dept = DEPT.dept	4 rows (Asha, Ravi, Meena, John)
5	EMP LEFT JOIN DEPT ...	6 rows (Priya & Kiran get NULL building)
6	EMP RIGHT JOIN DEPT ...	5 rows (CE appears with NULL employee)
7	EMP FULL OUTER JOIN DEPT ...	7 rows
8	Correlated: SELECT name FROM EMP e1 WHERE salary = (SELECT MAX(salary) FROM EMP e2 WHERE e2.dept = e1.dept)	Asha, Meena, Priya (Kiran excluded: NULL = NULL is UNKNOWN)
9	SELECT dept FROM DEPT WHERE dept NOT IN (SELECT dept FROM EMP)	Empty! The subquery contains NULL, so every NOT IN test is UNKNOWN
10	Same with NOT EXISTS (SELECT * FROM EMP WHERE EMP.dept = DEPT.dept)	CE ✓ — NOT EXISTS is NULL-safe


12.2 Minimal (Canonical) Cover — Worked

$F = \{A \rightarrow BC, B \rightarrow C, A \rightarrow B, AB \rightarrow C\}$

1. Split RHS: $A \rightarrow B, A \rightarrow C, B \rightarrow C, A \rightarrow B, AB \rightarrow C$
 2. Remove duplicates: $A \rightarrow B, A \rightarrow C, B \rightarrow C, AB \rightarrow C$
 3. Extraneous LHS attr: in $AB \rightarrow C$, B is extraneous since $A^+ = \{A, B, C\} \ni C \rightarrow A \rightarrow C$ (duplicate)
 4. Redundant FDs: $A \rightarrow C$ follows from $A \rightarrow B$ and $B \rightarrow C \rightarrow$ remove
- Minimal cover $F_c = \{A \rightarrow B, B \rightarrow C\}$

12.3 Normalisation — From 1NF to BCNF

$R(S, C, I, P, G)$ — Student, Course, Instructor, instructor Phone, Grade. $F = \{ SC \rightarrow G, C \rightarrow I, I \rightarrow P \}$. S and C never appear on the right $\rightarrow$ **candidate key** = SC.

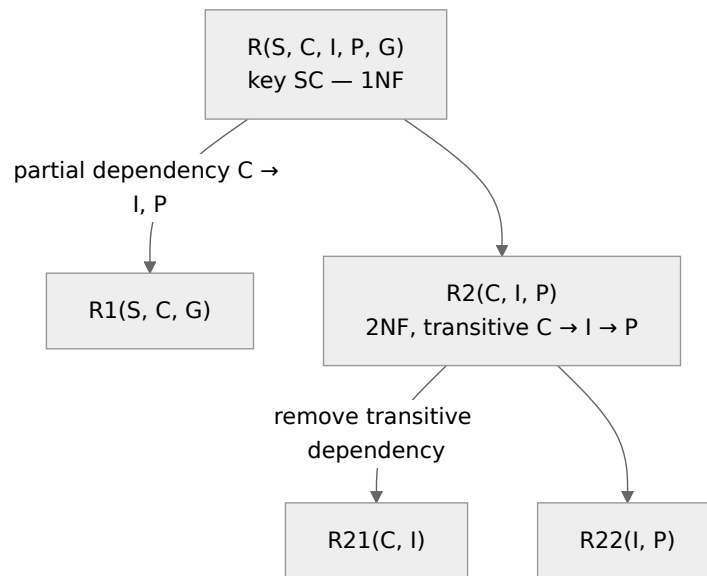


Final schema: $(S, C, G), (C, I), (I, P)$ — every determinant is a key $\rightarrow$ BCNF; decomposition is lossless (common attributes C and I are keys of a side) and preserves all three FDs.

12.4 Recoverability Examples (W = write, R = read, C = commit)

Schedule	Classification
W1(A) R2(A) C2 C1	Not recoverable — T2 commits after reading T1's uncommitted data, before T1 commits
W1(A) R2(A) C1 C2	Recoverable, but not cascadeless (abort of T1 forces abort of T2)
W1(A) C1 R2(A) C2	Cascadeless (reads only committed data)
W1(A) W2(A) C1 C2	Cascadeless but not strict (T2 overwrote uncommitted A)


12.5 Precedence Graphs

Schedule S: R1(A) W1(A) R2(A) W2(A) R1(B) W1(B) R2(B) W2(B)




Acyclic $\rightarrow$ conflict serializable, equivalent to serial order **T1 $\rightarrow$ T2**.

Schedule S': R1(X) R2(Y) W2(X) W1(Y)



Cycle $\rightarrow$ **not** conflict serializable.

12.6 Two-Phase Locking — Lock Point

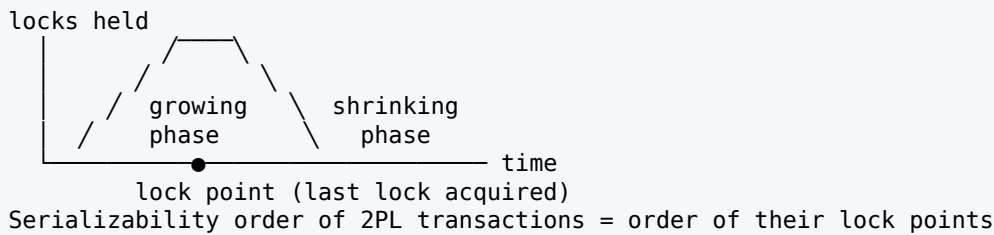

12.7 Extendible Hashing (sketch)


Global depth 2
directory

Buckets (local depth)

00	→	[4, 12, 32]	(d = 2)	
01	→			
11	→	[1, 5, 21]	(d = 1)	← two directory entries share it
10	→	[10, 6]	(d = 2)	

Overflow of a bucket with local depth = global depth → directory doubles
 Overflow with local depth < global depth → split bucket only

12.8 Data Cube Lattice (3 dimensions → $2^3 = 8$ cuboids)

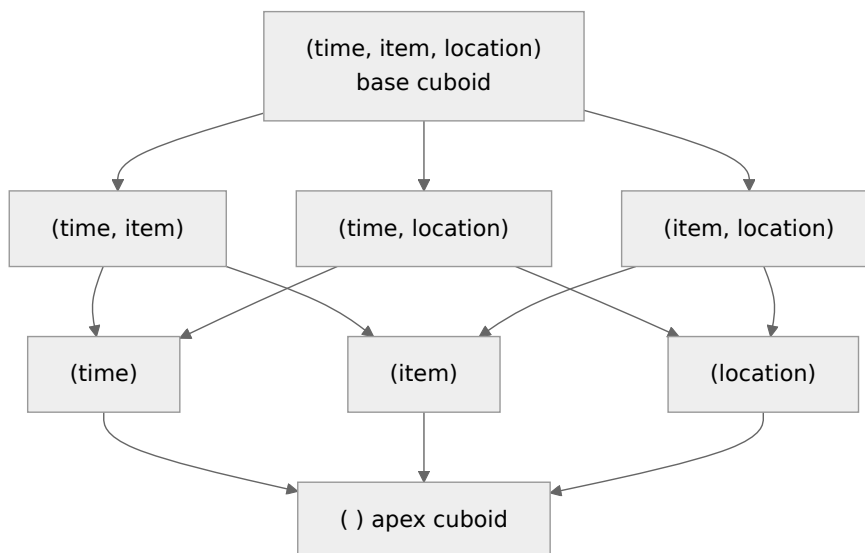

Previous Year Questions (PYQ pattern)

Architecture & ER

1. Ability to change the conceptual schema without changing application programs: **logical data independence**
2. The overall design of the database is called: **schema**
3. A weak entity set is represented by: **double rectangle**
4. Minimum number of tables for E1 (1)–R–(N) E2 with no attributes on R: **2**
5. Minimum tables for M:N relationship between two entities: **3**
6. Which is a DCL command? **GRANT**
7. TRUNCATE is a: **DDL command**

Keys

8. R(A,B,C,D) with only candidate key A — number of super keys: $2^3 = 8$

9. $R(A,B,C,D)$ with candidate keys A and B: $8 + 8 - 4 = 12$

10. Which key cannot be NULL? **Primary key**

Relational algebra / SQL

11. R has 10 tuples, S has 5; $R \times S$ has: **50**

12. Which RA operation answers "for all" queries? **Division**

13. Which is not a fundamental RA operation? (a) σ (b) π (c) $\cap$ (d) $-$ — **Ans: (c)**

14. **SELECT COUNT(*)** vs **COUNT(salary)** on a table with 10 rows and 2 NULL salaries: **10 and 8**

15. HAVING is applied: **after GROUP BY on groups**

16. **salary > ALL (SELECT salary FROM emp WHERE dept = 5)** means: **greater than the maximum salary of dept 5**

17. Which set operator retains duplicates? **UNION ALL**

18. A trigger follows which model? **Event-Condition-Action**

19. Best protection against SQL injection: **parameterised/prepared statements**

Normalisation

20. $R(A,B,C,D)$, $F = \{A \rightarrow B, B \rightarrow C, C \rightarrow D\}$. Candidate key? **A**; Normal form? **2NF** (transitive dependencies exist)

21. $R(A,B,C,D)$, $F = \{AB \rightarrow C, C \rightarrow D\}$. Key AB; $C \rightarrow D$ is transitive $\rightarrow$ **2NF**, not 3NF

22. $R(A,B,C)$, $F = \{AB \rightarrow C, C \rightarrow A\}$. Keys AB, CB. Highest NF: **3NF** ($C \rightarrow A$, A is prime)

23. Every relation with two attributes is in: **BCNF**

24. Decomposition of $R(A,B,C)$ with $A \rightarrow B$ into $(A,B), (A,C)$ is: **lossless** (common $A \rightarrow AB$)

25. Which NF deals with multivalued dependency? **4NF**; join dependency? **5NF**

26. BCNF decomposition always guarantees: **lossless join** (not dependency preservation)

27. Closure of $\{A\}$ under $\{A \rightarrow B, B \rightarrow C, C \rightarrow D, D \rightarrow E\}$: **ABCDE**

Transactions

28. Which ACID property is ensured by the concurrency control manager? **Isolation**

29. A schedule is conflict serializable iff its precedence graph is: **acyclic**

30. 2PL ensures: **conflict serializability** (not freedom from deadlock)

31. Strict 2PL avoids: **cascading rollbacks**

32. In wait-die, if an older transaction requests a lock held by a younger: **older waits**

33. In wound-wait, if an older transaction requests: **younger is aborted (wounded)**

34. Thomas' write rule modifies: **timestamp ordering protocol**

35. Number of serial schedules for 4 transactions: **24**

36. Reading uncommitted data is: **dirty read**

37. Write-ahead logging ensures: **log record on stable storage before data item**

38. After a crash, a transaction that has and in log is: **redone**

Indexing

39. B+ tree leaves are linked to support: **range queries / sequential access**

40. Max number of primary indexes on a file: **1**

41. Order of B+ tree internal node: block 512 B, key 10 B, pointer 6 B: $p \cdot 6 + (p-1) \cdot 10 \leq 512 \rightarrow 16p \leq 522 \rightarrow p = 32$

42. Secondary index is usually: **dense**

Warehousing / mining / big data

43. Data warehouse is NOT: (a) subject-oriented (b) volatile (c) time-variant (d) integrated — **Ans: (b)**

44. OLAP operation that rotates the axes: **pivot**

45. Star schema has: **one fact table, denormalised dimension tables**

46. Support of {bread, butter} in 5 of 20 transactions: **25%**; if bread in 10 $\rightarrow$ confidence(bread $\rightarrow$ butter) = **50%**

47. Apriori uses the property: **all subsets of a frequent itemset are frequent**

48. CAP theorem: choose **2 of Consistency, Availability, Partition tolerance**

49. MongoDB is a: **document store**; Cassandra: **column-family**; Neo4j: **graph**

50. In Hadoop, metadata is stored by: **NameNode**

51. K-means is a: **partitioning clustering** algorithm

More practice questions

52. A NOT IN subquery whose result contains NULL returns: **no rows**
53. COUNT(DISTINCT dept) on values {CS, CS, EE, NULL}: **2**
54. Minimal cover of $\{A \rightarrow B, B \rightarrow C, A \rightarrow C\}$: **$\{A \rightarrow B, B \rightarrow C\}$**
55. $R(A, B, C, D), F = \{A \rightarrow B, C \rightarrow D\}$. Candidate key: **AC**; highest normal form: **1NF** (partial dependencies)
56. A schedule in which transactions read only committed data is: **cascadeless**
57. Schedule $R1(X) R2(Y) W2(X) W1(Y)$ is: **not conflict serializable**
58. In 2PL, the equivalent serial order follows the: **lock points**
59. In extendible hashing, the directory doubles when an overflowing bucket's local depth: **equals the global depth**
60. Number of cuboids for 4 dimensions without hierarchies: **16**
61. Apex cuboid represents: **the grand total (all dimensions aggregated)**
62. Full outer join of R (5 tuples) and S (3 tuples) with 2 matching pairs (one-to-one): $2 + 3 + 1 =$ **6 tuples**

Quick Revision Box

- 3NF: X superkey OR A prime · BCNF: X superkey
- Lossless: $(R1 \cap R2) \rightarrow R1$ or $R2$ · 3NF = lossless + dep. preserving
- Conflict serializable $\Leftrightarrow$ acyclic precedence graph · 2PL $\rightarrow$ serializable but deadlock possible
- Wait-die: old waits, young dies · Wound-wait: old wounds, young waits
- CAP: pick 2 · HDFS NameNode/DataNode · MapReduce Map $\rightarrow$ Shuffle $\rightarrow$ Reduce

System Software & Operating Systems

In this unit


1. System Software	116	9. File Systems & I/O	123
2. OS Basics	117	10. Protection & Security	124
3. Process Management	118	11. Virtual Machines	124
4. Threads	119	12. Linux & Windows	124
5. CPU Scheduling	120	13. Distributed Systems	125
6. Deadlocks	121	14. Deeper Dive — More Scheduling, Semaphore	
7. Memory Management	122	Traces, Multilevel Paging & File Numericals	125
8. Disk & Storage	123	Previous Year Questions (PYQ pattern)	127

Expected questions: 10–12 · Target: 10+ · Type: scheduling/paging/disk numericals + Galvin concepts — highly scoring

Syllabus checklist

- ☐ System software: assembly language, assemblers, compilers vs interpreters, loading, linking, relocation, macros, debuggers
- ☐ OS basics: structure, services, system calls, boot
- ☐ Process management: process states, PCB, IPC, synchronisation, critical section, Peterson, semaphores, classical problems
- ☐ Threads: multithreading models, libraries, issues
- ☐ CPU scheduling: criteria, FCFS, SJF, SRTF, priority, RR, multilevel queues, multiprocessor & real-time scheduling
- ☐ Deadlocks: conditions, RAG, prevention, avoidance (Banker's), detection, recovery
- ☐ Memory management: contiguous allocation, paging, segmentation, TLB, demand paging, page replacement, thrashing
- ☐ Storage: disk structure, disk scheduling, RAID
- ☐ File systems & I/O: access methods, directories, allocation methods, free-space management, I/O subsystem
- ☐ Security & protection: access matrix, threats, authentication
- ☐ Virtual machines; Linux & Windows internals; distributed systems

1. System Software




Tool	Job
Assembler	Assembly → machine code. Two-pass : pass 1 builds symbol table (location counter), pass 2 generates code. One-pass needs back-patching for forward references
Compiler	Whole program → target code at once; faster execution
Interpreter	Statement by statement; slower, easier debugging
Linker	Resolves external references, combines object modules
Loader	Places program in memory; functions: Allocation, Linking, Relocation, Loading
Macro processor	Expands macros (text substitution, no call overhead); macro vs subroutine
Debugger	Breakpoints, single-step, watch variables

- Loaders: **compile-and-go**, **absolute** (programmer does relocation), **relocating** (BSS loader), **direct-linking** loader, **dynamic loading** (load routine when called), **dynamic linking** (link at run time — DLL, .SO).
- **Relocation**: adjusting address-sensitive instructions when program is loaded at a different address; relocation

bits/table.

- Assembler data structures: **Symbol table (ST)**, **Literal table (LT)**, **Opcode table (MOT/OPTAB)**, **Pseudo-op table (POT)**, Pool table.
- Assembler directives (pseudo-ops): **START**, **END**, **ORIGIN**, **EQU**, **LTORG**, **DC**, **DS**.

2. OS Basics

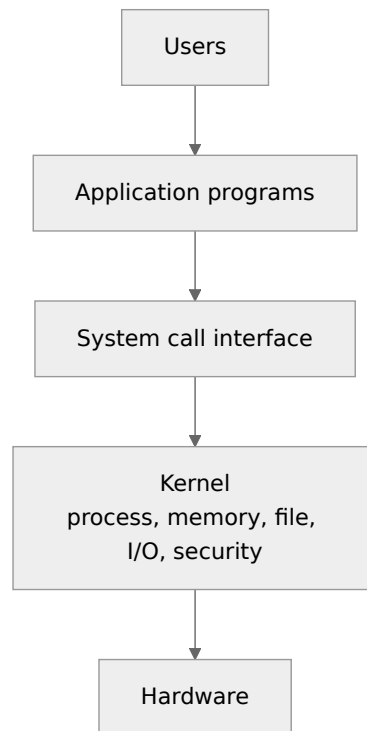

Structure	Example
Simple / monolithic	MS-DOS, early UNIX, Linux (monolithic + loadable modules)
Layered	THE OS (Dijkstra)
Microkernel	Mach, QNX, Minix — minimal kernel, services in user space via message passing
Modular	Solaris, Linux LKMs
Hybrid	Windows NT, macOS (XNU)
Exokernel	Research — exposes hardware


- **Dual mode:** user mode / kernel mode (mode bit). System call → trap → kernel mode.
- System call categories: process control (**fork**, **exec**, **exit**, **wait**), file management (**open**, **read**), device management (**ioctl**), information maintenance (**getpid**), communication (**pipe**, **shmget**), protection (**chmod**).
- Parameter passing to system calls: registers, block/table in memory, stack.
- Boot: power on → BIOS/UEFI firmware (POST) → bootstrap loader (MBR / GRUB) → kernel loaded → init/systemd.
- OS types: batch, multiprogramming (maximise CPU utilisation), time-sharing (multitasking, response time), real-time (hard/soft), distributed, network, embedded.

fork() puzzle: n consecutive **fork()** calls create $2^n - 1$ child processes (2^n total).

```
fork(); fork(); fork();    // 8 processes total, 7 children
if (fork() && fork()) fork(); // count carefully: 4 processes total (parent + 3 children)
```

3. Process Management

3.1 Process States

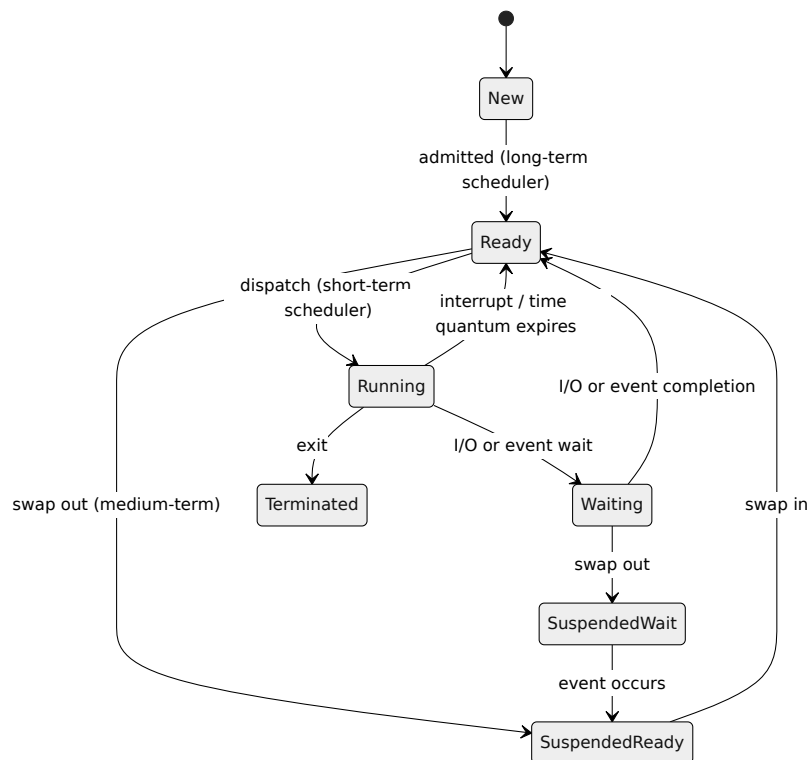

- **PCB** (Process Control Block): PID, state, PC, registers, scheduling info, memory info (page tables), accounting, I/O status.
- Schedulers: **long-term** (job; controls degree of multiprogramming), **short-term** (CPU; very frequent), **medium-term** (swapping).
- **Context switch** time is pure overhead. **Dispatcher latency**.
- **Zombie**: terminated but parent hasn't called `wait()`. **Orphan**: parent terminated (adopted by `init`).

3.2 IPC

- **Shared memory** (fast, needs synchronisation) vs **message passing** (send/receive; direct/indirect via mailboxes; blocking = synchronous, non-blocking = asynchronous).
- Pipes (ordinary – parent-child, unidirectional; named pipes/FIFOs), sockets (IP + port), RPC (stubs, marshalling), signals.

3.3 Critical Section Problem

Requirements: **Mutual exclusion**, **Progress**, **Bounded waiting**.

Peterson's solution (2 processes):

```
// shared: bool flag[2]; int turn;
do {
    flag[i] = true;
    turn = j;                // politely give turn to other
    while (flag[j] && turn == j); // busy wait
    /* critical section */
    flag[i] = false;
    /* remainder section */
} while (true);
```

Satisfies all three requirements (on sequentially consistent memory).

Hardware: **TestAndSet**, **CompareAndSwap** (atomic). Simple TAS lock gives ME + progress but not bounded waiting.

3.4 Semaphores

```
wait(S)  { while (S <= 0); S--; }    // P(), down()
signal(S) { S++; }                  // V(), up()
```

- **Binary semaphore** (mutex, 0/1) vs **counting semaphore**.
- Blocking implementation uses a waiting queue — negative value = number of waiting processes.
- Counting semaphore initial value 10, then 6 P and 4 V $\rightarrow 10 - 6 + 4 = 8$.
- Misuse $\rightarrow$ deadlock (wrong order of waits) or starvation. **Priority inversion** $\rightarrow$ solved by priority inheritance.
- **Monitors**: high-level construct; condition variables with `wait()`/`signal()`.
- **Spinlock** = busy-waiting lock (good for short waits on multiprocessors).

Classical problems

Problem	Semaphores
Bounded buffer (producer-consumer)	<code>mutex = 1, empty = n, full = 0</code>
Readers-writers	<code>rw_mutex = 1, mutex = 1, read_count = 0</code> (first readers-writers: writers may starve)
Dining philosophers (5)	<code>chopstick[5] = 1</code> ; deadlock if all pick left — fixes: at most 4 at table, asymmetric pick, pick both atomically
Sleeping barber	customers, barbers, mutex

```
Producer:
wait(empty);
wait(mutex);
add item
signal(mutex);
signal(full);
Consumer:
wait(full);
wait(mutex);
remove item
signal(mutex);
signal(empty);
(swapping the two waits in producer can cause DEADLOCK)
```

4. Threads

- Thread = lightweight process: own **PC**, **registers**, **stack**; shares code, data, files with peers.
- **User-level threads** (fast, kernel unaware; one blocks $\rightarrow$ all block in many-to-one) vs **kernel-level threads**.
- Models: **Many-to-one** (Green threads), **One-to-one** (Linux, Windows), **Many-to-many**, two-level.
- Libraries: POSIX Pthreads, Windows threads, Java threads. Implicit threading: thread pools, OpenMP, GCD, fork-join.

- Issues: `fork()`/`exec()` semantics, signal handling, thread cancellation (asynchronous vs deferred), thread-local storage, scheduler activations (LWP, upcalls).
- **Amdahl's law** for multicore: $\text{speedup} \leq 1 / (S + (1-S)/N)$.

5. CPU Scheduling

Turnaround time (TAT) = Completion - Arrival
 Waiting time (WT) = TAT - Burst
 Response time = First run - Arrival
 Throughput = #processes / total time

Algorithm	Preemptive?	Notes
FCFS	No	Convoy effect
SJF	No	Optimal average waiting time (non-preemptive)
SRTF	Yes (preemptive SJF)	Optimal average WT overall; starvation
Priority	Both	Starvation → aging
Round Robin	Yes	Time quantum q ; large $q \rightarrow$ FCFS; small $q \rightarrow$ high context switch overhead
Multilevel queue	—	Fixed queues (foreground RR, background FCFS)
Multilevel feedback queue	Yes	Processes move between queues; most general
HRRN	No	Response ratio = $(W + S)/S$; favours short jobs, avoids starvation

Worked Example

Process	Arrival	Burst
P1	0	8
P2	1	4
P3	2	9
P4	3	5

SRTF Gantt chart:

P1	P2	P4	P1	P3	
0	1	5	10	17	26

P	CT	TAT	WT
P1	17	17	9
P2	5	4	0
P3	26	24	15
P4	10	7	2

Average WT = $26/4 = 6.5$.

Round Robin ($q = 4$) on same data:

P1	P2	P3	P4	P1	P3	P4	P3	
0	4	8	12	16	20	24	25	26

CT: P1 = 20, P2 = 8, P3 = 26, P4 = 25 → WT: P1 = 12, P2 = 3, P3 = 15, P4 = 17 → average = **11.75**.

Multiprocessor & Real-time

- Asymmetric vs **symmetric multiprocessing (SMP)**; processor affinity (soft/hard); load balancing (push/pull migration).
- **Rate Monotonic** (static priority: shorter period $\rightarrow$ higher priority); schedulable if $U \leq n(2^{1/n} - 1)$ (≈ 0.69 for large n).
- **EDF** (Earliest Deadline First, dynamic): schedulable iff $U \leq 1$.
- Linux: **CFS** (Completely Fair Scheduler, red-black tree keyed by virtual runtime). Windows: 32-level priority-based preemptive.

6. Deadlocks

Four Necessary Conditions (Coffman)

Mutual exclusion · Hold and wait · No preemption · Circular wait — all four must hold.

Resource Allocation Graph

P1 —request→ [R1 •] —assigned→ P2

↑

[R2 •] ←request— P2

(assigned to P1)

Cycle with single-instance resources $\Rightarrow$ DEADLOCK

Cycle with multi-instance resources $\Rightarrow$ deadlock POSSIBLE

Strategy	How
Prevention	Break one condition: e.g. request all at once (hold & wait), allow preemption, impose total order on resources (circular wait)
Avoidance	Banker's algorithm — grant only if state remains safe
Detection & recovery	Wait-for graph (single instance), detection algorithm; recover by killing processes / preemption
Ignorance	Ostrich algorithm (UNIX, Windows)

Banker's Algorithm — Worked

5 processes, resources A(10), B(5), C(7).

P	Allocation (A B C)	Max	Need = Max – Alloc
P0	0 1 0	7 5 3	7 4 3
P1	2 0 0	3 2 2	1 2 2
P2	3 0 2	9 0 2	6 0 0
P3	2 1 1	2 2 2	0 1 1
P4	0 0 2	4 3 3	4 3 1

Available = (10,5,7) – (7,2,5) = (3,3,2).

Work=(3,3,2): P1 need(1,2,2) ✓ $\rightarrow$ Work=(5,3,2)
 P3 need(0,1,1) ✓ $\rightarrow$ Work=(7,4,3)
 P4 need(4,3,1) ✓ $\rightarrow$ Work=(7,4,5)
 P0 need(7,4,3) ✓ $\rightarrow$ Work=(7,5,5)
 P2 need(6,0,0) ✓ $\rightarrow$ Work=(10,5,7)
 Safe sequence: <P1, P3, P4, P0, P2>


Deadlock-free condition formula: n processes each needing max k instances of a resource with R instances total $\rightarrow$ deadlock-free if $R \geq n(k - 1) + 1$. e.g. 3 processes each need 3 units $\rightarrow$ minimum $R = 3 \times 2 + 1 = 7$.

7. Memory Management

7.1 Contiguous Allocation

- Fixed partitions → **internal fragmentation**. Variable partitions → **external fragmentation** (fix with compaction).
- Placement: **First fit**, **Best fit** (smallest adequate hole), **Worst fit** (largest), Next fit.
- 50-percent rule**: with first fit, N allocated blocks → $0.5N$ blocks lost to fragmentation.

7.2 Paging

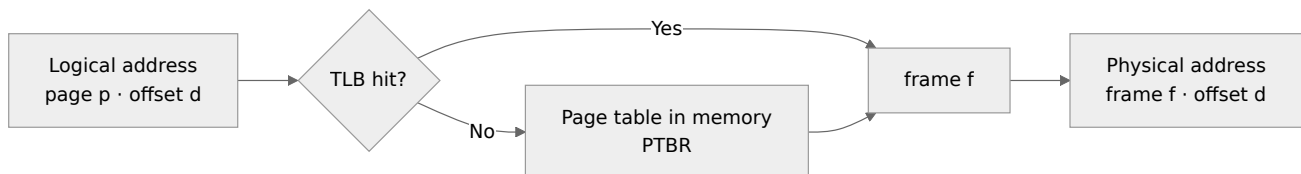

Logical address bits = $\log_2(\text{virtual space})$; offset bits $d = \log_2(\text{page size})$
 $\#pages = 2^{LA \text{ bits} - d}$; $\#frames = \text{physical size} / \text{page size}$
 Page table size = $\#pages \times \text{PTE size}$
 EAT with TLB (hit ratio h , TLB t , memory m):

$$EAT = h(t + m) + (1 - h)(t + 2m)$$

Worked: 32-bit logical address, 4 KB pages, 4-byte PTE.

- Offset = 12 bits; pages = 2^{20} ; page table = $2^{20} \times 4 \text{ B} = 4 \text{ MB}$ per process (hence multilevel paging).
- Two-level (10 | 10 | 12): outer table 1024 entries $\times 4 \text{ B} = 4 \text{ KB} = \text{one page}$.
- Inverted page table: one entry per **frame** (size $\propto$ physical memory), searched by hashing.

7.3 Segmentation

- Logical address = (segment number, offset); segment table has **base & limit**; offset $\geq$ limit → trap.
- No internal fragmentation, but external fragmentation. Segmentation with paging (Intel x86).

7.4 Virtual Memory & Demand Paging

EAT with page faults = $(1 - p) \times ma + p \times \text{page-fault service time}$
 e.g. $ma = 200 \text{ ns}$, $\text{service} = 8 \text{ ms}$, $p = 0.001 \rightarrow EAT \approx 200 + 0.001 \times 8,000,000 = 8.2 \mu\text{s}$

Page fault steps: trap → check valid → find free frame → schedule disk read → update table → restart instruction.

7.5 Page Replacement — Worked

Reference string: 7 0 1 2 0 3 0 4 2 3 0 3 2, 3 frames.

FIFO

Ref:	7	0	1	2	0	3	0	4	2	3	0	3	2
F1	7	7	7	2	2	2	2	4	4	4	0	0	0
F2		0	0	0	0	3	3	3	2	2	2	2	2
F3			1	1	1	1	0	0	0	3	3	3	3
Fault	*	*	*	*		*	*	*	*	*	*	*	*

→ 10 faults

Optimal (replace page used farthest in future) → 7 faults. **LRU** (replace least recently used) → 9 faults.

- Belady's anomaly**: more frames → more faults; occurs in **FIFO**, not in stack algorithms (LRU, Optimal). Classic string: 1 2 3 4 1 2 5 1 2 3 4 5 → FIFO 3 frames: 9 faults, 4 frames: 10 faults.
- Other algorithms: Second chance (clock), LFU, MFU, NRU (reference & modify bits).
- Thrashing**: process spends more time paging than executing — when Σ working sets $>$ available frames; fix with **working-set model** or **page-fault frequency control**, reduce degree of multiprogramming.


- Frame allocation: equal, proportional; global vs local replacement.
- **Copy-on-write** for `fork()`. **Memory-mapped files**.

8. Disk & Storage

8.1 Disk Scheduling — Worked

Queue: 98, 183, 37, 122, 14, 124, 65, 67; head at 53; cylinders 0–199.

Algorithm	Order	Total head movement
FCFS	53→98→183→37→122→14→124→65→67	640
SSTF	53→65→67→37→14→98→122→124→183	236
SCAN (towards 0)	53→37→14→0→65→67→98→122→124→183	236
C-SCAN (towards 199)	53→65→...→183→199→0→14→37	146 + 199 + 37 = 382 (counting return jump)
LOOK (towards 0)	53→37→14→65→...→183	39 + 169 = 208
C-LOOK (up)	53→65→67→98→122→124→183→14→37	130 + 169 + 23 = 322

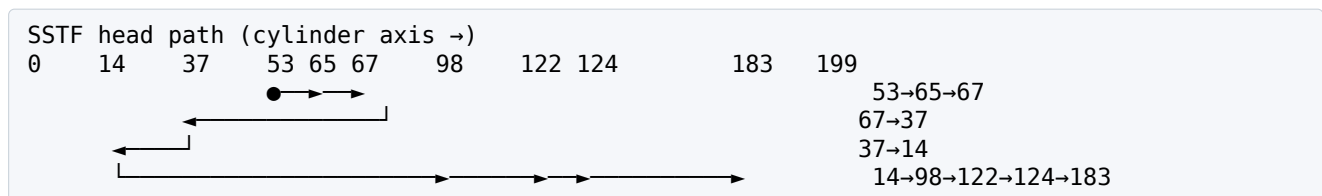

- SSTF may cause **starvation**. SCAN = elevator. C-SCAN gives more uniform wait time.

8.2 RAID

Level	Technique	Min disks	Fault tolerance
0	Striping (block)	2	None
1	Mirroring	2	1 disk
2	Bit striping + Hamming ECC	—	1
3	Byte striping + dedicated parity	3	1
4	Block striping + dedicated parity	3	1 (parity disk bottleneck)
5	Block striping + distributed parity	3	1
6	Distributed double parity (P+Q)	4	2
10 (1+0)	Mirror then stripe	4	1 per mirror pair

9. File Systems & I/O

- Access methods: sequential, direct (relative), indexed.
- Directory structures: single-level → two-level → tree → **acyclic graph** (sharing via links) → general graph (cycles; needs garbage collection).
- Hard link (same inode, same FS, no dirs) vs soft/symbolic link (path, can cross FS, can dangle).

Allocation Methods

Contiguous [A A A A] fast, direct ext. fragmentation	Linked (FAT is a variant) A→A→A→A→nil no ext. fragmentation only sequential access	Indexed (inode) index block → [b1,b2,b3,...] direct access, no ext. frag. overhead of index block
---	---	--

UNIX inode max file size: 12 direct + 1 single + 1 double + 1 triple indirect. Block 4 KB, pointer 4 B → 1024 pointers per block:

$$(12 + 1024 + 1024^2 + 1024^3) \times 4 \text{ KB} \approx 4 \text{ TB}$$

- Free-space management: **bit vector** (1 bit per block), linked list, grouping, counting.
- Directory implementation: linear list, hash table.
- Mounting, file sharing, NFS. Journaling (log-structured) file systems for consistency.

I/O: polling, interrupts, DMA (see [Unit 2](#)). Kernel I/O subsystem: scheduling, **buffering** (single, double, circular), **caching**, **spooling** (printer), error handling. Device drivers. Block vs character devices.

10. Protection & Security

- **Access matrix:** rows = domains, columns = objects. Implementations: global table, **access control lists** (column-wise, per object), **capability lists** (row-wise, per domain), lock-key.
- Revocation: immediate/delayed, selective/general, partial/total.
- Principle of **least privilege**; need-to-know.
- Program threats: Trojan horse, trap door (back door), logic bomb, stack/buffer overflow, virus. System/network threats: worms, port scanning, DoS/DDoS.
- Authentication: passwords (salted hash), OTP, biometrics, multi-factor.
- Cryptography — see [Unit 9](#).

11. Virtual Machines

- **Type 1 (bare-metal) hypervisor:** VMware ESXi, Xen, Hyper-V, KVM. **Type 2 (hosted):** VirtualBox, VMware Workstation.
- Full virtualisation, para-virtualisation (guest OS modified — Xen), hardware-assisted (Intel VT-x, AMD-V), containers (OS-level: Docker — share host kernel), emulation (QEMU).
- JVM, .NET CLR = application/process VMs.

12. Linux & Windows

Feature	Linux	Windows
Kernel	Monolithic + loadable kernel modules	Hybrid (microkernel-inspired), HAL, executive
Process creation	<code>fork()</code> + <code>exec()</code> (clone for threads)	<code>CreateProcess()</code>
Scheduling	CFS (normal), real-time FIFO/RR	Priority-based preemptive, 32 levels
Memory	Buddy system + slab allocator, demand paging	Demand paging with clustering, working sets
File system	ext2/3/4 (inodes), VFS layer; <code>/proc</code>	NTFS (MFT, journaling, ACLs), FAT32, ReFS
IPC	pipes, signals, shared memory, message queues, sockets	ALPC, pipes, mailslots
Other	GPL; first released 1991 (Linus Torvalds)	Terminal services, fast user switching

Linux process states: Running, Interruptible sleep, Uninterruptible sleep, Stopped, Zombie. **Buddy system:** memory split into power-of-2 blocks; request 70 KB from 1 MB → gets 128 KB block.

13. Distributed Systems

- Network OS (users aware of machines; remote login, file transfer) vs **Distributed OS** (transparent: data, computation, process migration).
- Topologies & communication: naming, routing, connection strategies, contention.
- Robustness: failure detection (heartbeat), reconfiguration, recovery.
- Design issues: transparency, fault tolerance, scalability.
- **Distributed File Systems**: NFS (stateless, v3), AFS (whole-file caching), GFS/HDFS. Naming transparency vs location independence; caching & consistency (write-through, delayed-write, callback).
- Clock synchronisation: **Lamport logical clocks** (happened-before $\rightarrow$), vector clocks, Cristian's, Berkeley algorithms.
- Mutual exclusion: centralised, Ricart–Agrawala ($2(n-1)$ messages), token ring. Election: **Bully**, Ring.

14. Deeper Dive — More Scheduling, Semaphore Traces, Multilevel Paging & File Numericals

14.1 Priority & HRRN Scheduling — Worked

Process	Arrival	Burst	Priority (lower = higher)
P1	0	10	3
P2	0	1	1
P3	0	2	4
P4	0	1	5
P5	0	5	2

Non-preemptive priority:

P2	P5	P1	P3	P4
0	1	6	16	18

Waiting times: P1 6, P2 0, P3 16, P4 18, P5 1 $\rightarrow$ average = $41/5 = 8.2$.

HRRN (non-preemptive; response ratio $RR = (W + S)/S$), processes A(0, 3), B(2, 6), C(4, 4), D(6, 5), E(8, 2):

```

t = 0: only A  $\rightarrow$  run A to 3
t = 3: only B arrived  $\rightarrow$  run B to 9
t = 9: C:  $(5 + 4)/4 = 2.25$    D:  $(3 + 5)/5 = 1.6$    E:  $(1 + 2)/2 = 1.5$     $\rightarrow$  run C to 13
t = 13: D:  $(7 + 5)/5 = 2.4$    E:  $(5 + 2)/2 = 3.5$     $\rightarrow$  run E to 15
t = 15: run D to 20
Order: A B C E D

```

14.2 Semaphore Tracing

```

semaphore S = 1, T = 0;
P1: wait(S); print("A"); signal(T);
P2: wait(T); print("B"); signal(S);

```

Whatever the scheduling, P2 blocks on T until P1 signals $\rightarrow$ output **"AB"** (and the pair can repeat as A B A B ... if looped). This is the standard **ordering** use of semaphores (initialise to 0 to force "happens-after").

Deadlock with wrong order:

```

P0: wait(S); wait(Q); ...      P1: wait(Q); wait(S); ...      (S = Q = 1)
P0 gets S, P1 gets Q, each waits for the other  $\rightarrow$  deadlock

```

14.3 Multilevel Paging Numericals

48-bit virtual address, 4 KB pages, 8-byte PTEs.

Offset = 12 bits $\rightarrow$ page-number bits = 36
 Entries per page-table page = $4096 / 8 = 512 = 2^9 \rightarrow$ each level indexes 9 bits
 Levels needed = $\lceil 36 / 9 \rceil = 4$ (this is x86-64 4-level paging: 9 | 9 | 9 | 9 | 12)
 Memory accesses per reference without TLB = 4 (tables) + 1 (data) = 5

Effective access time with TLB and 2-level paging: TLB 10 ns, memory 100 ns, hit ratio 90%: $EAT = 0.9 \times (10 + 100) + 0.1 \times (10 + 3 \times 100) = 99 + 31 = 130 \text{ ns}$.

14.4 Segmentation — Address Translation

Segment	Base	Limit
0	219	600
1	2300	14
2	90	100
3	1327	580

- $(0, 430) \rightarrow 430 < 600 \rightarrow$ physical **649**
- $(1, 10) \rightarrow$ **2310**
- $(2, 500) \rightarrow 500 \geq 100 \rightarrow$ **segmentation fault (trap)**
- $(3, 400) \rightarrow$ **1727**

14.5 Page Replacement with 4 Frames (Belady check)

Reference: 1 2 3 4 1 2 5 1 2 3 4 5

- FIFO, 3 frames $\rightarrow$ **9** faults; 4 frames $\rightarrow$ **10** faults (anomaly).
- LRU, 4 frames $\rightarrow$ 8 faults; Optimal, 4 frames $\rightarrow$ 6 faults.

14.6 File-System Numericals

Max file size with UNIX inode: block 1 KB, pointer 4 B $\rightarrow$ 256 pointers/block; 10 direct, 1 single, 1 double, 1 triple:

$$(10 + 256 + 256^2 + 256^3) \times 1 \text{ KB} = (10 + 256 + 65,536 + 16,777,216) \text{ KB} \approx 16 \text{ GB}$$

FAT size: 4 GB disk, 4 KB clusters, 32-bit entries $\rightarrow 2^{20}$ clusters $\times$ 4 B = **4 MB** FAT.

Disk access: 7200 RPM, average seek 8 ms, transfer rate 100 MB/s, read 4 KB block: seek 8 + latency 4.17 + transfer 0.04 $\approx$ **12.2 ms**.

14.7 Buddy System — Worked

1 MB block; requests A = 70 KB, B = 35 KB, C = 80 KB.

```

1024 → 512 + 512 → 256 + 256 → 128 + 128      A gets 128 KB (wastes 58 KB internal)
B (35 KB): split a 128 → 64 + 64                B gets 64 KB
C (80 KB): needs 128 → split the second 256 → 128 + 128, C gets 128 KB
Release: buddies of equal size and adjacent addresses coalesce back

```

14.8 Process Synchronisation Hardware

```
// Test-and-Set lock
bool lock = false;
do {
    while (test_and_set(&lock)); // atomically: old = lock; lock = true; return old
    /* critical section */
    lock = false;
} while (true);
```

Gives mutual exclusion and progress, but **not bounded waiting** (a process can be overtaken indefinitely); the bounded-waiting version uses a `waiting[]` array.

Previous Year Questions (PYQ pattern)

System software

1. A two-pass assembler's first pass: **builds the symbol table (assigns addresses)**
2. Forward reference problem in one-pass assembler is solved by: **back-patching**
3. Which loader function adjusts address-dependent locations? **Relocation**
4. Dynamic linking is performed at: **run time**
5. Macro expansion is done by: **macro processor / preprocessor** (before assembly/compilation)

Processes & threads

6. Number of child processes created by `for(i=0;i<n;i++) fork();`: $2^n - 1$
7. Which is NOT shared by threads of a process? **Stack (and registers)**
8. Degree of multiprogramming is controlled by: **long-term scheduler**
9. A process whose parent has not called `wait()`: **zombie**
10. Which multithreading model blocks the whole process on a blocking system call? **Many-to-one**

Synchronisation

11. Critical section solution requirements: **mutual exclusion, progress, bounded waiting**
12. Semaphore $S = 7$; 20 P and 15 V operations performed: final = $7 - 20 + 15 = 2$
13. Producer-consumer with bounded buffer of size n : initial values `mutex = 1`, `empty = n`, `full = 0`
14. Priority inversion is solved by: **priority inheritance protocol**
15. Peterson's solution is for: **two processes**

Scheduling

16. Algorithm with minimum average waiting time: **SJF / SRTF**
17. Round robin with very large quantum becomes: **FCFS**
18. Starvation in priority scheduling is solved by: **aging**
19. Convoy effect occurs in: **FCFS**
20. Processes $P1(0,10)$, $P2(1,1)$, $P3(2,2)$ with SRTF: average waiting time = $P1: 3, P2: 0, P3: 0 \rightarrow 1$
21. Rate-monotonic schedulability bound for 2 tasks: $2(\sqrt{2} - 1) \approx 0.828$

Deadlock

22. Necessary conditions for deadlock: **mutual exclusion, hold & wait, no preemption, circular wait**
23. Banker's algorithm is for deadlock: **avoidance**
24. Ordering resources numerically prevents: **circular wait**
25. 4 processes each need 2 tape drives; minimum drives to ensure no deadlock: $4 \times 1 + 1 = 5$
26. Cycle in RAG with single-instance resources implies: **deadlock**

Memory

27. Belady's anomaly occurs in: **FIFO**
28. Page size 4 KB, logical address 32 bits $\rightarrow$ number of pages: 2^{20}
29. TLB 20 ns, memory 100 ns, hit 80%: $EAT = 0.8 \times 120 + 0.2 \times 220 = 140$ ns

30. Thrashing is caused by: **high degree of multiprogramming / insufficient frames**
31. Internal fragmentation occurs in: **paging (fixed-size)**; external in: **segmentation / variable partitions**
32. Best fit, memory holes 100K, 500K, 200K, 300K, 600K; request 212K → **300K hole**
33. LRU faults for 1,2,3,4,1,2,5,1,2,3,4,5 with 3 frames: **10**
34. Optimal page replacement is not implementable because: **future references are unknown**
35. Working set model is used to prevent: **thrashing**

Disk / file

36. Disk scheduling that may cause starvation: **SSTF**
37. Elevator algorithm: **SCAN**
38. RAID level with distributed parity: **RAID 5**
39. RAID with mirroring: **RAID 1**
40. Allocation method that supports direct access and has no external fragmentation: **Indexed**
41. FAT uses which allocation method? **Linked (table variant)**
42. Bit vector for 1 TB disk with 4 KB blocks: 2^{28} bits = **32 MB**

Security / VM / distributed

43. Access control lists correspond to: **columns of the access matrix**
44. Capability list corresponds to: **rows (domains)**
45. A program that appears useful but performs malicious actions: **Trojan horse**
46. VMware ESXi is a: **Type 1 hypervisor**
47. Lamport clocks capture: **happened-before ordering (logical time)**
48. Linux kernel is: **monolithic with loadable modules**
49. Windows file system with MFT: **NTFS**

More practice questions

50. HRRN favours: **short jobs, while preventing starvation of long jobs (waiting time raises the ratio)**
51. Response ratio of a process with waiting time 9 and burst 3: **4**
52. Semaphore initialised to 0 is used for: **ordering / signalling between processes**
53. 32-bit virtual address, 4 KB pages, 4-byte PTEs, single-level: page table size = **4 MB**
54. Levels of paging for 48-bit VA, 4 KB pages, 8 B PTEs (page-sized tables): **4**
55. Segment (2, 500) with limit 100: **trap / segmentation fault**
56. LRU with 4 frames on 1 2 3 4 1 2 5 1 2 3 4 5: **8 faults**
57. Optimal with 4 frames on the same string: **6 faults**
58. Buddy system allocation for a 70 KB request: **128 KB block**
59. Test-and-set spin lock fails to guarantee: **bounded waiting**
60. Average rotational latency at 15,000 RPM: **2 ms**

Quick Revision Box

- n forks → 2^n processes · Threads share code/data/files, not stack/registers
- SRTF optimal WT · RR big q = FCFS · aging fixes starvation
- Deadlock-free: $R \geq n(k-1)+1$ · Banker = avoidance
- $EAT(TLB) = h(t+m) + (1-h)(t+2m)$ · Belady only FIFO
- SSTF starvation · SCAN elevator · RAID 5 distributed parity

Software Engineering

In this unit

1. Software Process Models	129	7. Software Configuration Management	136
2. Requirements Engineering	131	8. Maintenance & Re-engineering	137
3. Software Design	132	9. Deeper Dive — Modelling Examples, Test Design, Estimation & Reliability Models	137
4. Software Quality	133	Previous Year Questions (PYQ pattern)	140
5. Estimation	134		
6. Software Testing	135		


Expected questions: 8–10 · Target: 9+ · Type: mostly theory (Pressman) + metrics numericals (COCOMO, FP, cyclomatic) — most scoring unit

Syllabus checklist


- ☐ Software process models: waterfall, prototype, evolutionary (incremental, spiral), concurrent, component-based, formal methods, AOSD, unified process, Agile (XP, Scrum, DSDM, Crystal, FDD, ASD, Kanban)
- ☐ Software requirements: functional & non-functional, eliciting, analysis, requirements specification, SRS, validation, management
- ☐ Software design: abstraction, architecture, patterns, modularity, cohesion & coupling, information hiding, functional independence, refinement, architectural & UI design
- ☐ Software quality: McCall, ISO 9126, quality control & assurance, risk management, RMMM, software reliability
- ☐ Estimation & scheduling: size (LOC, FP), COCOMO, project scheduling & staffing, timeline charts
- ☐ Software testing: verification & validation, error/fault/defect/failure, unit/integration/system/acceptance, white-box & black-box, regression, performance, stress, alpha/beta
- ☐ Configuration management; maintenance & re-engineering; reverse engineering

1. Software Process Models

1.1 Waterfall (Royce, 1970)

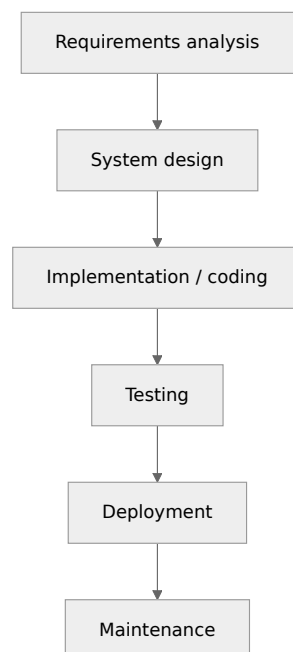

- Linear sequential; each phase completes before next. Good when **requirements are clear & stable**. No working software until late; high risk.
- **V-Model**: verification phases (left) paired with validation/testing phases (right): Requirements↔Acceptance test, System design↔System test, Architecture↔Integration test, Module design↔Unit test.

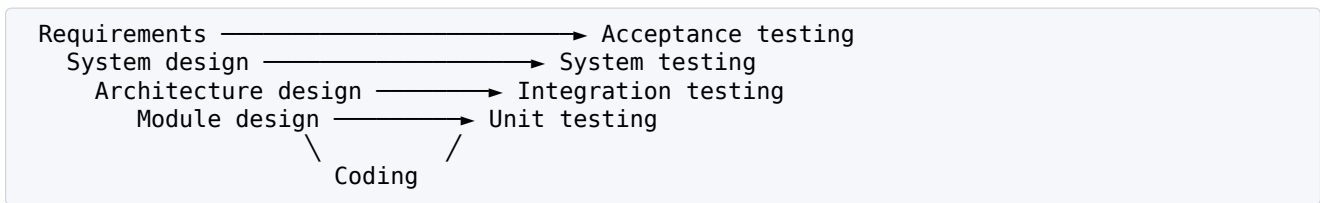


1.2 Prototype Model

Quick design → build prototype → customer evaluation → refine → (throwaway or evolutionary). Best when **requirements are unclear**.

1.3 Incremental & RAD

- **Incremental**: deliver in increments; first increment = core product.
- **RAD** (Rapid Application Development): 60–90 days, component reuse, multiple teams; needs modular & well-understood requirements.

1.4 Spiral Model (Barry Boehm, 1986) — risk-driven

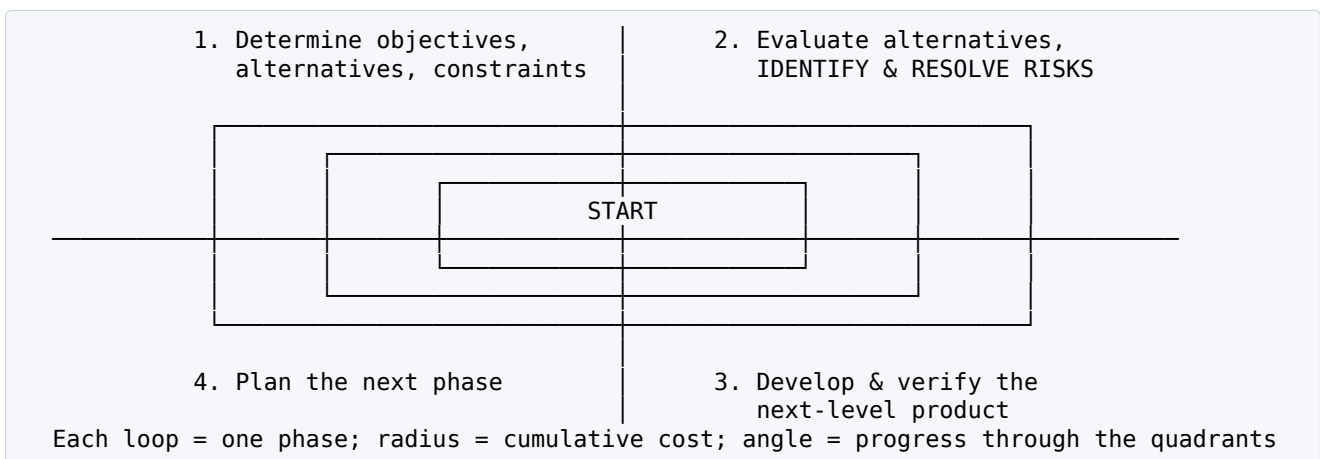

- 4 quadrants: Planning (objectives) → **Risk analysis** → Engineering → Evaluation. Meta-model; suits large, high-risk projects.

1.5 Others


Model	Key idea
Concurrent	Activities exist simultaneously in different states (state chart)
Component-based (CBSE)	Assemble pre-built COTS components
Formal methods	Mathematical specification (Z, VDM); Cleanroom SE (statistical testing, defect prevention)
AOSD	Aspect-oriented: crosscutting concerns (logging, security) as aspects
Unified Process (RUP)	Use-case driven, architecture-centric, iterative & incremental. Phases: Inception → Elaboration → Construction → Transition (+ Production)

1.6 Agile

Agile Manifesto (2001) values:

- **Individuals & interactions** over processes & tools
- **Working software** over comprehensive documentation
- **Customer collaboration** over contract negotiation
- **Responding to change** over following a plan (12 principles; e.g. deliver frequently, welcome changing requirements, sustainable pace, face-to-face communication.)


Method	Highlights
XP (Kent Beck)	Pair programming, test-first (TDD) , refactoring, continuous integration, small releases, user stories , spike solutions, CRC cards, collective ownership, 40-hour week
Scrum	Sprint (2–4 weeks, time-boxed), Product backlog , Sprint backlog, Daily Scrum (15 min stand-up), Sprint review, retrospective; roles: Product Owner , Scrum Master , Development Team ; burndown chart
DSDM	Time-boxing, MoSCoW prioritisation (Must, Should, Could, Won't); 80/20 principle
Crystal	Family (Clear, Orange...) by team size & criticality (Alistair Cockburn)
FDD	Feature Driven Development; features in ≤ 2 weeks
ASD	Adaptive SD: Speculation, Collaboration, Learning (Highsmith)
Kanban	Visual board, limit Work-In-Progress (WIP)
Lean	Eliminate waste



Model selection cheat-sheet

Situation	Model
Clear, fixed requirements	Waterfall
Unclear requirements	Prototyping
High risk, large	Spiral
Quick delivery, modular	RAD / Incremental
Changing requirements, small teams	Agile
Safety-critical	Formal methods / Cleanroom

2. Requirements Engineering




- **Functional**: what the system does (services). **Non-functional**: quality constraints — performance, security, reliability, usability, portability, maintainability (FURPS+).
- Elicitation techniques: interviews, questionnaires, **JAD** (Joint Application Development), **QFD** (Quality Function Deployment: normal, expected, exciting requirements), brainstorming, use cases, observation, prototyping.
- **SRS** (IEEE 830): characteristics — correct, unambiguous, complete, consistent, ranked, **verifiable**, modifiable, traceable. SRS says **what**, not **how**.
- Requirement traceability matrix. Validation: reviews, prototyping, test-case generation.
- Analysis models: **DFD** (process), **ER** (data), **state diagrams** (behaviour), use case diagrams, data dictionary.

DFD notation (Yourdon/DeMarco)

External entity (○) Process (bubble) == Data store → Data flow
 Level 0 DFD = Context diagram (single process, shows external entities only)
 Balancing: inputs/outputs of child DFD = those of parent process

UML Diagrams

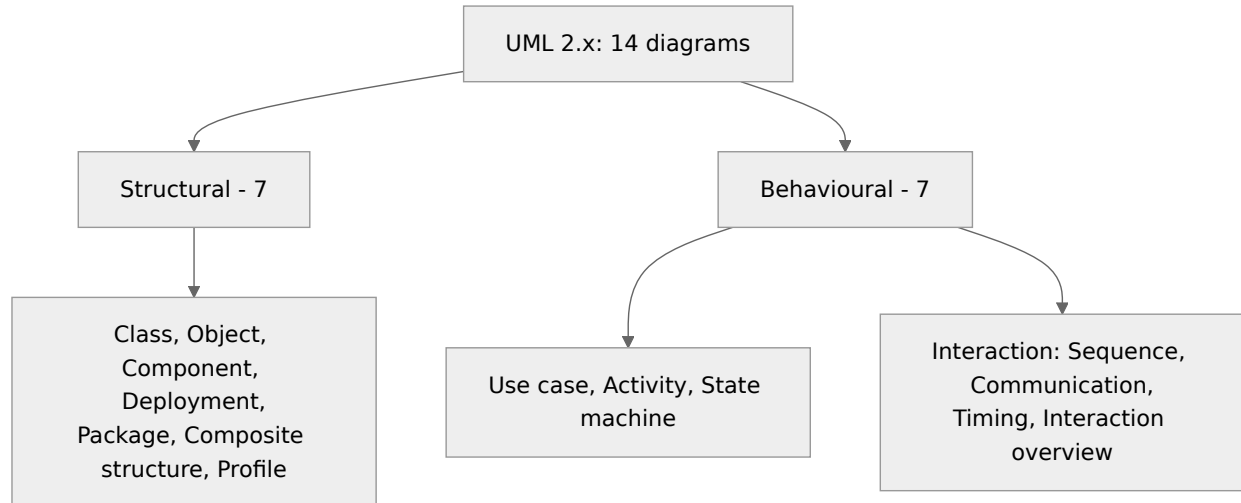

Relationships: association, aggregation (◇ hollow, "has-a", weak), composition (◆ filled, strong ownership), generalisation (△ "is-a"), dependency (dashed arrow), realisation. Use case relations: «include» (mandatory), «extend» (optional).

3. Software Design

3.1 Design Concepts

Abstraction (procedural, data), architecture, patterns, separation of concerns, **modularity**, **information hiding** (Parnas), **functional independence** (high cohesion + low coupling), stepwise refinement (Wirth), refactoring, aspects.

3.2 Cohesion (within a module) — best to worst

BEST ▲	Functional	– single well-defined task
	Sequential	– output of one part is input to next
	Communicational	– parts operate on same data
	Procedural	– parts follow a sequence of execution
	Temporal	– executed at same time (e.g. initialisation)
	Logical	– logically similar tasks, selected by flag
WORST ▼	Coincidental	– unrelated tasks

Mnemonic (worst→best): "Coin Logic Temp Proc Comm Seq Func".

3.3 Coupling (between modules) — best to worst

BEST ▲	No coupling / Data coupling – pass only needed data
	Stamp coupling – pass whole data structure, use part
	Control coupling – pass control flag
	External coupling – share external format/device/protocol
	Common coupling – share global data
WORST ▼	Content coupling – one module modifies/uses internals of another

Goal: high cohesion, low coupling.

3.4 Architectural Styles

Data-centred (repository/blackboard), data-flow (**pipe & filter**, batch sequential), call-and-return (main/subprogram, remote procedure), object-oriented, layered, client-server, **MVC**, event-driven, microservices, SOA.

3.5 Design Patterns (GoF – 23)


Category	Patterns
Creational (5)	Singleton, Factory Method, Abstract Factory, Builder, Prototype
Structural (7)	Adapter, Bridge, Composite, Decorator, Facade, Flyweight, Proxy
Behavioural (11)	Observer, Strategy, Command, Iterator, State, Template Method, Visitor, Mediator, Memento, Chain of Responsibility, Interpreter

3.6 UI Design

Golden rules (Mandel): place user in control, reduce memory load, make interface consistent. Usability heuristics (Nielsen).

4. Software Quality

McCall's Quality Factors (1977) — 11 factors in 3 perspectives

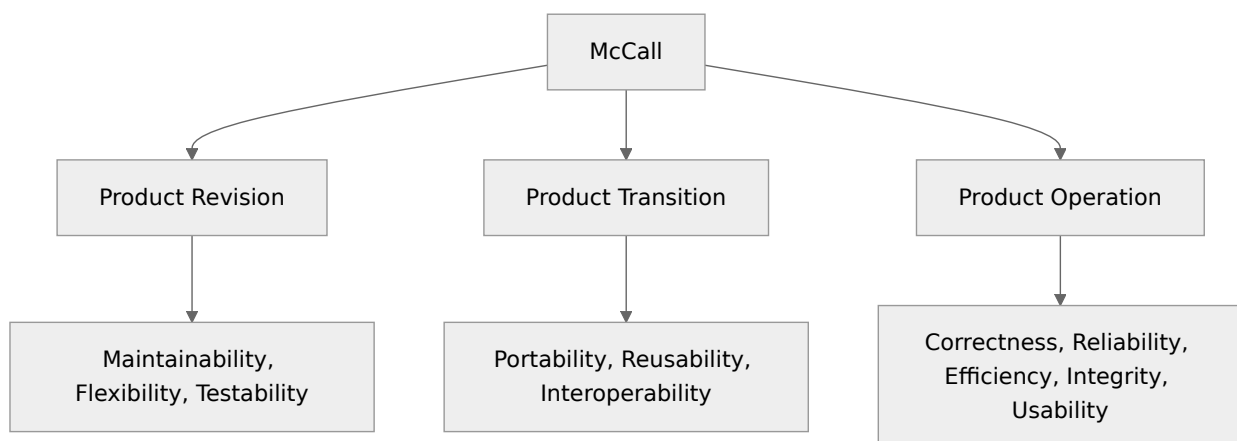

ISO 9126 (6 characteristics): **Functionality, Reliability, Usability, Efficiency, Maintainability, Portability** (FRUEMP). Replaced by **ISO/IEC 25010** (8: + Security, Compatibility; "functional suitability", "performance efficiency").

- **Quality control (QC)**: inspections, reviews, tests — product-oriented, detect defects.
- **Quality assurance (QA)**: auditing & reporting — process-oriented, prevent defects.
- **SQA activities**: FTR (Formal Technical Reviews — walkthrough, inspection: 3–5 people, ≤ 2 hours prep, ≤ 2 hours meeting), standards, audits.
- **Six Sigma**: 3.4 defects per million opportunities; DMAIC (Define, Measure, Analyse, Improve, Control).

- **CMMI levels:** 1 Initial → 2 Managed (Repeatable) → 3 Defined → 4 Quantitatively Managed → 5 **Optimising**.
- ISO 9001 — QMS standard applicable to software.

Reliability

$$MTBF = MTTF + MTTR$$

$$\text{Availability} = MTTF / (MTTF + MTTR) \times 100\%$$

ROCOF = rate of occurrence of failure; POFOD = probability of failure on demand

$$\text{Reliability } R(t) = e^{(-\lambda t)} \quad (\lambda = \text{failure rate})$$

Risk Management

- **Reactive** (fire-fighting) vs **Proactive**.
- Risk categories: project, technical, business; known, predictable, unpredictable.
- **Risk exposure** $RE = P \times C$ (probability $\times$ cost/impact).
- Risk table → **RMMM**: Risk **Mitigation** (avoid), **Monitoring**, **Management** (contingency).

5. Estimation

5.1 LOC & Function Points

Function Point (Albrecht, 1979):

$$FP = UFP \times VAF \quad VAF = 0.65 + 0.01 \times \Sigma F_i \quad (14 \text{ GSCs, each } 0-5 \rightarrow \Sigma F_i \in [0, 70])$$

VAF range: 0.65 to 1.35

Parameter	Simple	Average	Complex
External Inputs (EI)	3	4	6
External Outputs (EO)	4	5	7
External Inquiries (EQ)	3	4	6
Internal Logical Files (ILF)	7	10	15
External Interface Files (EIF)	5	7	10

Worked: EI = 10 (avg), EO = 8 (avg), EQ = 5 (avg), ILF = 4 (avg), EIF = 2 (avg); $\Sigma F_i = 42$.

$$UFP = 10 \times 4 + 8 \times 5 + 5 \times 4 + 4 \times 10 + 2 \times 7 = 40 + 40 + 20 + 40 + 14 = 154$$

$$VAF = 0.65 + 0.42 = 1.07$$

$$FP = 154 \times 1.07 = 164.78$$

5.2 COCOMO (Boehm, 1981)

Basic COCOMO: Effort $E = a \cdot (KLOC)^b$ person-months
 Time $D = c \cdot (E)^d$ months
 Staff $= E / D$

Mode	a	b	c	d	Description
Organic	2.4	1.05	2.5	0.38	Small team, familiar, < 50 KLOC
Semi-detached	3.0	1.12	2.5	0.35	Medium, mixed experience
Embedded	3.6	1.20	2.5	0.32	Tight constraints, hardware

Worked: Organic, 32 KLOC.

$E = 2.4 \times 32^{1.05} \approx 2.4 \times 38.06 \approx 91 \text{ PM}$
 $D = 2.5 \times 91^{0.38} \approx 2.5 \times 5.55 \approx 13.9 \text{ months}$
 $\text{Staff} \approx 91 / 13.9 \approx 6.5 \text{ persons}$

- **Intermediate COCOMO:** $E = a \cdot KLOC^b \times EAF$ (product of **15 cost drivers** in 4 groups: product, hardware/computer, personnel, project). Coefficients a : 3.2, 3.0, 2.8.
- **Detailed COCOMO:** phase-sensitive effort multipliers.
- **COCOMO II:** Application composition (object points), Early design, Post-architecture models; scale factors.
- **Putnam/SLIM model:** Rayleigh curve; $L = Ck \cdot K^{(1/3)} \cdot td^{(4/3)}$.
- **Brooks' law:** "Adding manpower to a late project makes it later." Communication paths among n people = $n(n-1)/2$.

5.3 Scheduling

- **WBS** (work breakdown structure), **Gantt / timeline charts**, **PERT/CPM** (critical path; see [Unit 1](#)).
- **Earned Value Analysis:** BCWS (planned value), BCWP (earned value), ACWP (actual cost).
 - $SPI = BCWP/BCWS$; $CPI = BCWP/ACWP$; $SV = BCWP - BCWS$; $CV = BCWP - ACWP$. $SPI < 1 \rightarrow$ behind schedule.
- 40-20-40 rule: 40% analysis & design, 20% coding, 40% testing.


6. Software Testing

6.1 Terminology

Mistake/Error (human) $\rightarrow$ Fault/Defect/Bug (in code) $\rightarrow$ Failure (observed deviation at run time)

- **Verification:** "Are we building the product right?" (static — reviews, inspections).
- **Validation:** "Are we building the right product?" (dynamic — testing against user needs).
- Testing shows the **presence** of bugs, not their absence (Dijkstra).

6.2 Levels of Testing

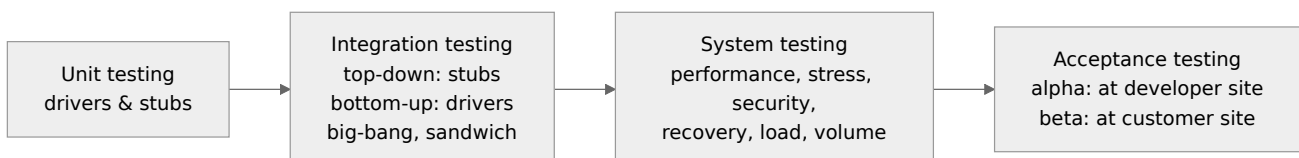

- **Stub** = dummy called module (top-down). **Driver** = dummy calling module (bottom-up).
- **Regression testing:** re-run tests after changes. **Smoke testing:** build verification. **Sanity:** narrow check after fix.
- **Alpha:** by customers at developer's site (controlled). **Beta:** by end users at their site (uncontrolled).
- Stress (beyond limits), load (expected load), volume (large data), performance, recovery, security testing.

Black-box (functional, behavioural)	White-box (structural, glass-box)
-------------------------------------	-----------------------------------

6.3 Black-box vs White-box


Black-box (functional, behavioural)	White-box (structural, glass-box)
Equivalence partitioning	Statement coverage
Boundary value analysis	Branch/decision coverage
Cause-effect graphing / decision tables	Condition, MC/DC coverage
State transition testing	Basis path testing (cyclomatic complexity)
Orthogonal array testing	Data-flow testing, loop testing
Error guessing	Mutation testing

- **Boundary value analysis** for range [1, 100]: test 0, 1, 2, 99, 100, 101 (robust) or 1, 2, 50, 99, 100 (normal: $4n + 1$ for n variables).
- **Equivalence classes** for [1, 100]: one valid (1–100), two invalid (< 1 , > 100).
- Coverage strength: Statement $<$ Branch $<$ Condition/Decision $<$ MC/DC $<$ Multiple condition $<$ Path.

6.4 Cyclomatic Complexity (McCabe, 1976)

$V(G) = E - N + 2P$ (P = connected components, usually 1)
 $V(G)$ = number of predicate (decision) nodes + 1
 $V(G)$ = number of bounded regions + 1 (regions of planar flow graph incl. outer)
 = number of linearly independent paths = minimum test cases for basis path testing

Flow graph for: if (a) { x } else { y }; while (b) { z }



$N = 6, E = 7 \rightarrow V(G) = 7 - 6 + 2 = 3$ (2 decisions + 1 = 3)

$V(G) \leq 10$ recommended.

7. Software Configuration Management

- **SCM** activities: identification, version control, change control, configuration auditing, status reporting.
- **Baseline**: formally reviewed & agreed work product; changes only via formal change control (Change Control Board / Authority).
- SCIs (Software Configuration Items). Tools: Git, SVN, CVS.

8. Maintenance & Re-engineering

Maintenance type	Share (approx.)	Purpose
Corrective	~20%	Fix bugs
Adaptive	~25%	Adapt to new environment (OS, hardware)
Perfective	~50% (largest)	New features, performance
Preventive	~5%	Improve future maintainability (refactoring)


- **Lehman's laws** of software evolution (continuing change, increasing complexity...).
- **Re-engineering**: inventory analysis → document restructuring → **reverse engineering** → code restructuring → data restructuring → **forward engineering**.
- **Reverse engineering**: extracting design/specification from code (abstraction level ↑). Forward engineering: design → code.
- **Restructuring**: change form without changing functionality.
- Software maintenance cost is typically **60–80%** of total lifecycle cost.

Other Metrics

Halstead: n_1 = distinct operators, n_2 = distinct operands, N_1 , N_2 = totals
Vocabulary $n = n_1 + n_2$; Length $N = N_1 + N_2$
Volume $V = N \log_2 n$; Difficulty $D = (n_1/2)(N_2/n_2)$; Effort $E = D \times V$
Defect density = defects / KLOC
DRE (Defect Removal Efficiency) = $E / (E + D)$ E = errors before delivery, D = defects after
CK (OO) metrics: WMC, DIT, NOC, CB0, RFC, LCOM


9. Deeper Dive — Modelling Examples, Test Design, Estimation & Reliability Models

9.1 Level-1 DFD — Library System

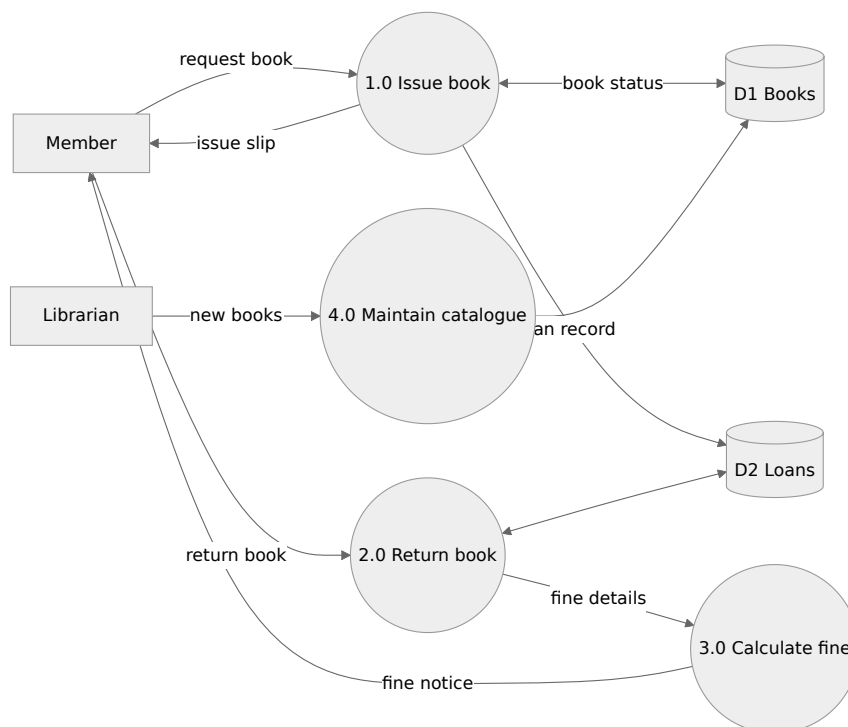


Rules: every process has at least one input and one output; data stores connect only through processes; external entities never connect directly to data stores.

9.2 UML Class Diagram

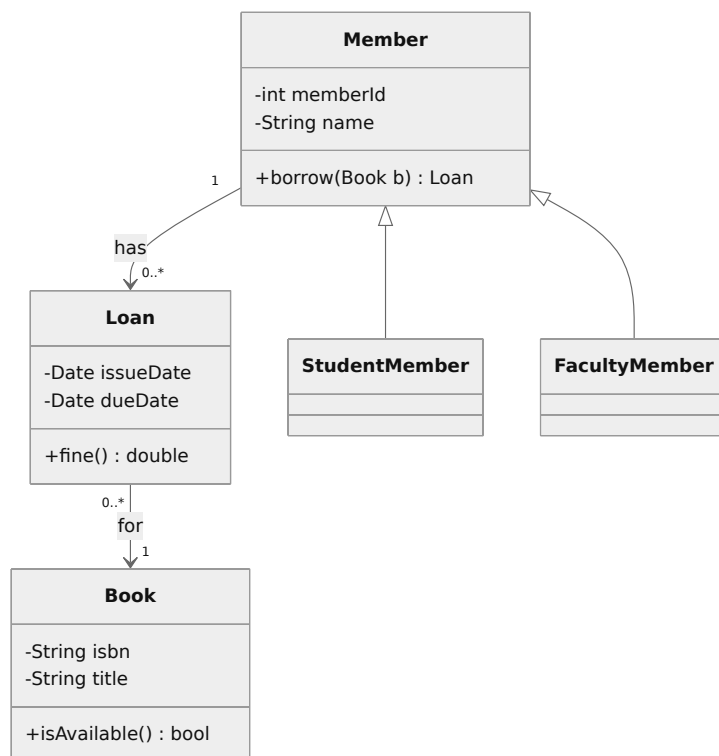

Visibility: + public, - private, # protected, ~ package. Multiplicity: 1, 0..1, 0.., 1...

9.3 UML Sequence Diagram — ATM Withdrawal

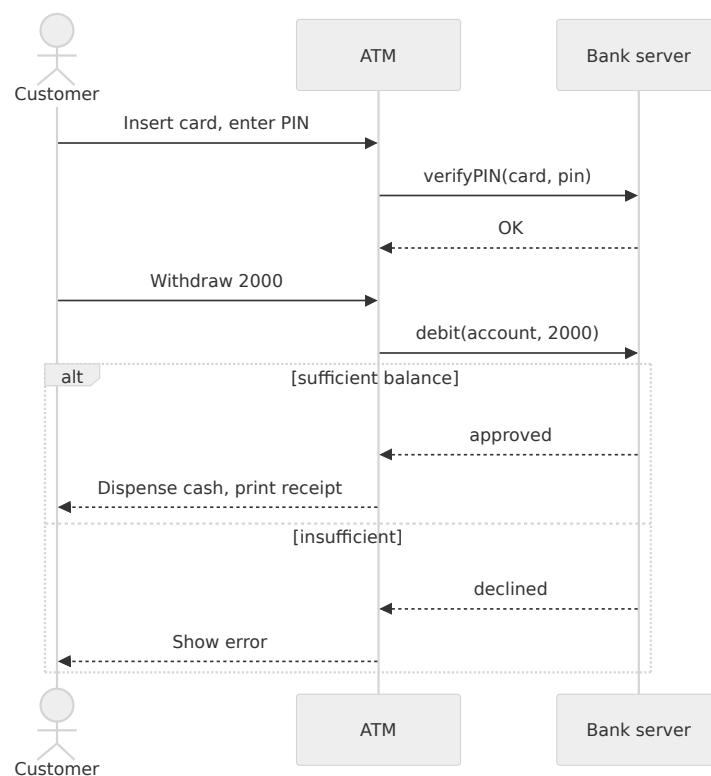

9.4 Black-box Test Design — Worked

Function: `eligible(age, grade)` where $\text{age} \in [18, 60]$ and $\text{grade} \in \{A, B, C\}$.

Technique	Test values
Equivalence classes (age)	valid 18–60 (e.g. 35); invalid < 18 (e.g. 10); invalid > 60 (e.g. 70)
Equivalence classes (grade)	valid {A, B, C}; invalid (e.g. D)
BVA (age, normal)	18, 19, 39, 59, 60
Robust BVA (age)	17, 18, 19, 39, 59, 60, 61
Worst-case BVA (2 variables)	$5^2 = 25$ combinations; robust worst-case $7^2 = 49$

Decision table (login):

Conditions / Actions	R1	R2	R3	R4
Valid user ID?	T	T	F	F
Valid password?	T	F	T	F
Grant access	✓			
Show "wrong password"		✓		
Show "unknown user"			✓	✓

9.5 Intermediate COCOMO — Worked

Semi-detached project, 50 KLOC, EAF = 1.2 (product of the 15 cost-driver multipliers).

Intermediate coefficients a: organic 3.2, semi-detached 3.0, embedded 2.8 (b as in basic)
 $E = 3.0 \times 50^{1.12} \times 1.2 \approx 3.0 \times 80 \times 1.2 \approx 288$ person-months
 $D = 2.5 \times 288^{0.35} \approx 2.5 \times 7.26 \approx 18$ months
 Average staff $\approx 288 / 18 = 16$ persons

Cost drivers include RELY (reliability), CPLX (complexity), ACAP (analyst capability), PCAP, TOOL, SCED (schedule constraint), etc.

9.6 Software Reliability Models

Model	Idea
Jelinski–Moranda (1972)	N initial faults; each fix reduces failure rate by a constant φ : $\lambda_i = \varphi(N - i + 1)$
Musa basic execution time	$\lambda(\mu) = \lambda_0 (1 - \mu/\nu_0)$: failure intensity falls linearly with failures experienced
Musa–Okumoto logarithmic	Failure intensity decreases exponentially with failures experienced
Goel–Okumoto (NHPP)	Expected failures $m(t) = a(1 - e^{(-bt)})$
Littlewood–Verrall	Bayesian; failure rates random

Worked (Musa basic): $\lambda_0 = 10$ failures/CPU-hr, $\nu_0 = 100$ total failures. After 50 failures: $\lambda = 10(1 - 50/100) = 5$ failures/CPU-hr.

9.7 Risk Table — Example

Risk	Category	Probability	Impact (1–4)	Exposure (₹)	RMMM response
Key developer leaves	Project	0.3	2	$0.3 \times 4 \text{ L} = 1.2 \text{ L}$	Cross-training, documentation
Requirements change late	Business	0.6	2	$0.6 \times 2 \text{ L} = 1.2 \text{ L}$	Agile iterations, change control
New tool unreliable	Technical	0.2	3	$0.2 \times 1 \text{ L} = 0.2 \text{ L}$	Prototype tool early

Risks are sorted by probability $\times$ impact; a **cut-off line** decides which get full RMMM plans.

9.8 CMMI Process Areas by Level (examples)

Level	Focus	Example process areas
2 Managed	Basic project management	Requirements management, project planning, configuration management, measurement & analysis, QA
3 Defined	Organisation-wide standard process	Requirements development, technical solution, verification, validation, risk management
4 Quantitatively managed	Statistical control	Organisational process performance, quantitative project management
5 Optimising	Continuous improvement	Causal analysis & resolution, organisational performance management

Previous Year Questions (PYQ pattern)

Process models

1. Which model is most suitable when requirements are not clear? **Prototyping**
2. The spiral model was proposed by: **Barry Boehm**; its key feature: **risk analysis**
3. In the spiral model, the radial dimension represents: **cumulative cost**
4. RUP phases in order: **Inception, Elaboration, Construction, Transition**
5. Which is NOT an agile method? (a) XP (b) Scrum (c) Waterfall (d) DSDM — **Ans: (c)**
6. Pair programming is a practice of: **Extreme Programming**
7. In Scrum, the time-boxed iteration is called: **Sprint**; daily meeting lasts: **15 minutes**
8. MoSCoW prioritisation is associated with: **DSDM**
9. V-model emphasises: **verification and validation at each phase**

Requirements & design

10. A level-0 DFD is also called: **context diagram**
11. "The system shall respond within 2 seconds" is a: **non-functional requirement**
12. SRS should specify: **what the system should do, not how**
13. Best type of cohesion: **functional**; worst: **coincidental**
14. Best coupling: **data coupling**; worst: **content coupling**
15. Modules sharing global data exhibit: **common coupling**
16. Passing a flag to control another module's logic: **control coupling**
17. Information hiding was proposed by: **David Parnas**
18. Which UML diagram shows the time-ordered interaction of objects? **Sequence diagram**
19. «include» vs «extend»: include is **mandatory**, extend is **optional/conditional**
20. Singleton pattern belongs to: **creational patterns**
21. Filled diamond in UML indicates: **composition**

Quality

22. Which is NOT a McCall product-operation factor? (a) correctness (b) reliability (c) portability (d) usability —

Ans: (c)

23. ISO 9126 quality characteristics count: **6**
24. CMMI level 5 is: **Optimising**
25. Availability with MTTF = 90 h and MTTR = 10 h: **90%**
26. Risk exposure with probability 0.3 and cost ₹50,000: **₹15,000**
27. RMMM stands for: **Risk Mitigation, Monitoring and Management**
28. QA is ____-oriented while QC is ____-oriented: **process; product**

Estimation

29. Value adjustment factor range: **0.65 to 1.35**
30. Number of general system characteristics in FP: **14**
31. Basic COCOMO organic effort constants: **a = 2.4, b = 1.05**
32. Intermediate COCOMO uses how many cost drivers? **15**
33. "Adding manpower to a late project makes it later" — **Brooks' law**
34. Number of communication paths among 6 team members: **15**
35. SPI = 0.8 indicates the project is: **behind schedule**

Testing

36. Cyclomatic complexity of a graph with 10 edges, 8 nodes: $10 - 8 + 2 = 4$
37. A program has 3 **if** and 1 **while**: $V(G) = 4 + 1 = 5$
38. Boundary value testing is a: **black-box technique**
39. Basis path testing is: **white-box**
40. Testing at developer's site by customer: **alpha testing**
41. Re-running tests after modification: **regression testing**
42. In top-down integration, dummy modules are: **stubs**
43. "Are we building the product right?" — **Verification**
44. Mutation testing evaluates: **the quality of test cases**
45. Number of test cases in BVA (normal) for 2 variables: $4n + 1 = 9$
46. DRE when 90 errors found before release and 10 after: **0.9**

Maintenance / SCM

47. Maintenance to accommodate a new OS: **adaptive**
48. Largest share of maintenance effort: **perfective**
49. Extracting design from source code: **reverse engineering**
50. A formally reviewed work product serving as basis for further development: **baseline**

More practice questions

51. In a DFD, a data store can connect directly to: **a process only**
52. Number of test cases in robust BVA for one variable: **7** ($6n + 1$ for n variables)
53. Worst-case BVA for 3 variables: $5^3 = 125$
54. Intermediate COCOMO coefficient a for embedded mode: **2.8**
55. In UML, # before an attribute means: **protected**
56. A hollow triangle arrowhead in a class diagram denotes: **generalisation (inheritance)**
57. In Musa's basic model, failure intensity decreases: **linearly with the number of failures experienced**
58. Goel–Okumoto is an example of: **NHPP (non-homogeneous Poisson process) model**
59. Risk management process area is introduced at CMMI level: **3**
60. A decision table with 3 Boolean conditions has at most: **8 rules**
61. Which UML diagram best shows the order of messages between objects? **Sequence diagram**

Quick Revision Box

- Unclear req → Prototype · Risk → Spiral · Changing req → Agile
- Cohesion: Functional best, Coincidental worst · Coupling: Data best, Content worst
- FP: VAF = $0.65 + 0.01\Sigma F$ (0.65–1.35), 14 GSCs · COCOMO organic 2.4/1.05/2.5/0.38
- $V(G) = E - N + 2 = \text{decisions} + 1$ · BVA $4n+1$

- Alpha at dev site · Beta at customer site · Perfective maintenance largest

Data Structures & Algorithms

In this unit

1. Asymptotic Analysis	143	9. Lower Bound Theory	149
2. Linear Data Structures	144	10. Complexity Classes	150
3. Trees	145	11. Selected Topics	150
4. Hashing	146	12. Advanced Algorithms	150
5. Sorting	147	13. Deeper Dive — Traces You Must Be Able to Do by Hand	151
6. Searching	147	Previous Year Questions (PYQ pattern)	153
7. Algorithm Design Techniques	147		
8. Graph Algorithms	148		

Expected questions: 10–12 · Target: 9+ · Type: complexity, recurrences, tree/heap/hash numericals, algorithm traces

Syllabus checklist

- ☐ Data structures: arrays, sparse matrices, stacks, queues, priority queues, linked lists, trees, binary trees, threaded trees, BST, AVL, B/B+/B* trees, sets (union-find), graphs, sorting, searching, hashing
- ☐ Performance analysis: time & space complexity, asymptotic notation, recurrence relations
- ☐ Design techniques: divide & conquer, dynamic programming, greedy, backtracking, branch & bound
- ☐ Lower bound theory: comparison trees, reductions
- ☐ Graph algorithms: BFS, DFS, shortest paths, maximum flow, MST
- ☐ Complexity theory: P, NP, NP-complete, NP-hard, reducibility
- ☐ Selected topics: number-theoretic algorithms, polynomial arithmetic, FFT, string matching
- ☐ Advanced: parallel algorithms (sorting, searching, merging), approximation & randomised algorithms

1. Asymptotic Analysis

O (upper bound)	$f(n) \leq c \cdot g(n)$	for $n \geq n_0$
Ω (lower bound)	$f(n) \geq c \cdot g(n)$	
Θ (tight bound)	$c_1 g(n) \leq f(n) \leq c_2 g(n)$	
o (strict upper)	$\lim f/g = 0$	
ω (strict lower)	$\lim f/g = \infty$	

Growth order (memorise):

$1 < \log \log n < \log n < (\log n)^k < \sqrt{n} < n < n \log n < n^2 < n^3 < 2^n < 3^n < n! < n^n$
 Note: $\log(n!) = \Theta(n \log n)$; $n^{1/\log n} = \Theta(1)$; $2^{(\log n)} = n$; $n^{(\log n)}$ is super-polynomial

Recurrences — Master Theorem

$T(n) = a \cdot T(n/b) + f(n)$, $a \geq 1, b > 1$. Compare $f(n)$ with $n^{\log_b a}$:

Case	Condition	Result
1	$f(n) = O(n^{\log_b a - \epsilon})$	$\Theta(n^{\log_b a})$
2	$f(n) = \Theta(n^{\log_b a} \cdot \log^k n)$	$\Theta(n^{\log_b a} \cdot \log^{k+1} n)$
3	$f(n) = \Omega(n^{\log_b a + \epsilon})$ and regularity	$\Theta(f(n))$

Recurrence	Solution	Algorithm
$T(n) = T(n/2) + 1$	$\Theta(\log n)$	Binary search
$T(n) = 2T(n/2) + n$	$\Theta(n \log n)$	Merge sort
$T(n) = 2T(n/2) + 1$	$\Theta(n)$	Tree traversal, max-min
$T(n) = T(n-1) + n$	$\Theta(n^2)$	Quick sort worst, selection
$T(n) = T(n-1) + 1$	$\Theta(n)$	Linear recursion
$T(n) = 2T(n-1) + 1$	$\Theta(2^n)$	Tower of Hanoi
$T(n) = 7T(n/2) + n^2$	$\Theta(n^{2.81})$	Strassen
$T(n) = 8T(n/2) + n^2$	$\Theta(n^3)$	Naive D&C matrix multiply
$T(n) = 3T(n/2) + n$	$\Theta(n^{1.585})$	Karatsuba
$T(n) = T(\sqrt{n}) + 1$	$\Theta(\log \log n)$	—
$T(n) = 2T(\sqrt{n}) + \log n$	$\Theta(\log n \cdot \log \log n)$	—
$T(n) = T(n/3) + T(2n/3) + n$	$\Theta(n \log n)$	Recursion tree

2. Linear Data Structures

2.1 Arrays

- Row-major address: $A[i][j] = B + w \cdot [(i - L_1) \cdot N + (j - L_2)]$ where N = number of columns.
- Column-major: $B + w \cdot [(j - L_2) \cdot M + (i - L_1)]$, M = rows.
- Lower triangular $n \times n$ stored row-wise: index of $(i, j) = i(i-1)/2 + j$ (1-based). Total elements = $n(n+1)/2$.
- **Sparse matrix**: triplet (row, col, value) representation; or linked lists.

2.2 Stack (LIFO)

- Applications: expression conversion/evaluation, recursion, backtracking, parenthesis matching, undo.
- **Infix $\rightarrow$ Postfix** example: $A + B * C - D / E \rightarrow A B C * + D E / -$.
- Postfix evaluation $6 \ 2 \ 3 \ + \ - \ 3 \ 8 \ 2 \ / \ + \ * \rightarrow 6 - 5 = 1; 8/2 = 4; 3 + 4 = 7; 1 \times 7 = 7$.
- Number of stack permutations of n elements = Catalan number C_n .

2.3 Queue (FIFO)

- Circular queue: full when $(rear + 1) \% n == front$ (one slot wasted). Deque, priority queue.
- Queue using two stacks: amortised $O(1)$.

2.4 Linked Lists


Singly, doubly, circular. Insert at head $O(1)$; search $O(n)$. Reverse a list: three pointers. Detect cycle: Floyd's tortoise-hare. Middle: slow/fast pointers.

3. Trees

3.1 Binary Tree Facts

Max nodes at level i (root level 0) $= 2^i$
Max nodes in tree of height h (root $h = 0$) $= 2^{(h+1)} - 1$
Min height with n nodes $= \lceil \log_2(n+1) \rceil - 1$
 $n_0 = n_2 + 1$ (leaves = nodes with 2 children + 1)
Null pointers in n -node binary tree $= n + 1$
Number of unlabelled binary trees with n nodes = Catalan $C_n = C(2n, n)/(n+1)$
Number of labelled binary trees $= n! \cdot C_n$
Full k -ary tree with i internal nodes: $n = k \cdot i + 1$ nodes, leaves $L = (k-1)i + 1$

3.2 Traversals

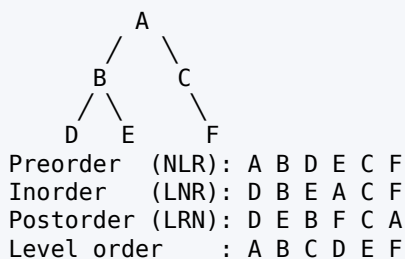


- Unique tree reconstruction needs **inorder + (preorder or postorder or level-order)**. Preorder + postorder is unique only for full binary trees.
- Threaded binary tree**: null right pointers point to inorder successor, null left to predecessor $\rightarrow$ traversal without stack.

3.3 Binary Search Tree

- Search/insert/delete: $O(h)$; $h = O(\log n)$ average, $O(n)$ worst (skewed).
- Delete node with 2 children: replace with **inorder successor** (min of right subtree) or predecessor.
- Inorder traversal of BST = **sorted order**.

3.4 AVL Tree

Balance factor = $\text{height}(\text{left}) - \text{height}(\text{right}) \in \{-1, 0, 1\}$.

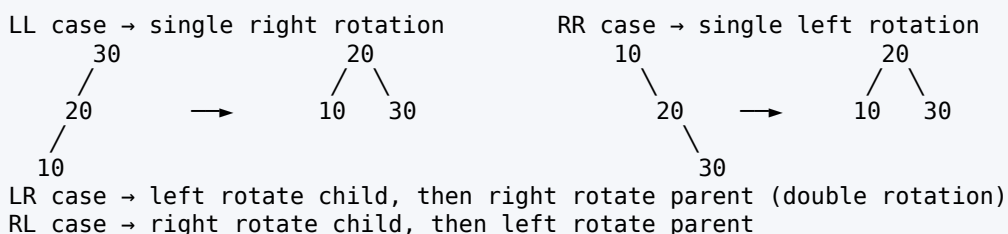


- Min nodes in AVL of height h : $N(h) = N(h-1) + N(h-2) + 1$, $N(0)=1$, $N(1)=2 \rightarrow 1, 2, 4, 7, 12, 20, 33, \dots$
- Max height $\approx 1.44 \log_2 n$. All operations $O(\log n)$.
- Red-Black tree**: root black, no two consecutive reds, same black-height on every path; height $\leq 2 \log_2(n+1)$.

3.5 B-Trees (multi-way, disk-based)

- Order m : each node $\leq m$ children, $\leq m-1$ keys; non-root $\geq \lceil m/2 \rceil$ children; all leaves same level.
- Insertion splits a full node and pushes the median up; tree grows at root.
- **B+ tree**: all data at leaves, leaves linked. **B* tree**: nodes at least $2/3$ full (redistribution before split).
- Details and order calculations: see [DBMS unit](#).

3.6 Heaps

Max-heap (array: 90 70 80 30 60 50)



Parent(i) = $\lfloor (i-1)/2 \rfloor$, Left = $2i+1$, Right = $2i+2$ (0-based)

- Insert $O(\log n)$; delete-max $O(\log n)$; **build-heap** $O(n)$; find-max $O(1)$; search $O(n)$.
- In a max-heap, the minimum is among the leaves ($\lceil n/2 \rceil$ candidates).
- **Binomial heap** (union $O(\log n)$), **Fibonacci heap** (decrease-key $O(1)$ amortised $\rightarrow$ Dijkstra $O(E + V \log V)$).

3.7 Disjoint Sets (Union-Find)

Union by rank + path compression $\rightarrow$ nearly $O(1)$ amortised: $O(\alpha(n))$ (inverse Ackermann). Used in Kruskal.

4. Hashing

Division: $h(k) = k \bmod m$ (m prime, not close to power of 2)
 Multiplication: $h(k) = \lfloor m \cdot (k \cdot A \bmod 1) \rfloor$, $A \approx 0.618$ (Knuth)
 Load factor $\alpha = n/m$

Collision resolution	Probe sequence	Issues
Chaining	Linked list per slot	Expected search $1 + \alpha$
Linear probing	$h(k) + i$	Primary clustering
Quadratic probing	$h(k) + c_1i + c_2i^2$	Secondary clustering
Double hashing	$h_1(k) + i \cdot h_2(k)$	Best of open addressing

Open addressing expected probes: unsuccessful $\leq 1/(1 - \alpha)$; successful $\leq (1/\alpha) \ln(1/(1-\alpha))$.

Worked (linear probing, $m = 10$, $h(k) = k \bmod 10$): insert 12, 18, 13, 2, 3, 23, 5, 15

```

12 → 2      18 → 8      13 → 3
 2 → 2 × 3 × 4
23 → 3 × 4 × 5 × 6      5 → 5 × 6 × 7
15 → 5 × 6 × 7 × 8 × 9

Index: 0   1   2   3   4   5   6   7   8   9
      -   -  12  13  2   3  23  5  18  15
  
```

5. Sorting

Algorithm	Best	Average	Worst	Space	Stable	In-place
Bubble	n (with flag)	n^2	n^2	1	✓	✓
Selection	n^2	n^2	n^2	1	✗	✓
Insertion	n	n^2	n^2	1	✓	✓
Merge	$n \log n$	$n \log n$	$n \log n$	n	✓	✗
Quick	$n \log n$	$n \log n$	n^2	$\log n$	✗	✓
Heap	$n \log n$	$n \log n$	$n \log n$	1	✗	✓
Shell	$n \log n$	$\sim n^{1.3}$	n^2 (gap-dependent)	1	✗	✓
Counting	$n + k$	$n + k$	$n + k$	k	✓	✗
Radix	$d(n + k)$	$d(n + k)$	$d(n + k)$	$n + k$	✓	✗
Bucket	$n + k$	$n + k$	n^2	n	✓	✗


- Selection sort makes the **minimum number of swaps** ($n - 1$).
- Insertion sort is best for **nearly sorted** data; number of comparisons $\approx$ number of inversions.
- Quick sort worst case on sorted input with first/last element as pivot. Randomised pivot $\rightarrow$ expected $O(n \log n)$.
- **Comparison-sort lower bound:** $\Omega(n \log n)$ (decision tree with $n!$ leaves has height $\geq \log_2 n!$).
- Merging k sorted lists of total n : $O(n \log k)$ with min-heap.

```
Quick sort partition (Lomuto, pivot = last)
[ 7 2 1 6 8 5 3 4 ] pivot 4
→ [ 2 1 3 | 4 | 8 5 7 6 ]
```

6. Searching

- Linear $O(n)$; **Binary** $O(\log n)$ on sorted array — max comparisons $\lceil \log_2 n \rceil + 1$.
- Interpolation search $O(\log \log n)$ average on uniform data.
- Selection (k -th smallest): Quickselect $O(n)$ average; **median of medians** $O(n)$ worst.
- Min & max together: $3n/2 - 2$ comparisons. Second largest: $n + \lceil \log_2 n \rceil - 2$.

7. Algorithm Design Techniques

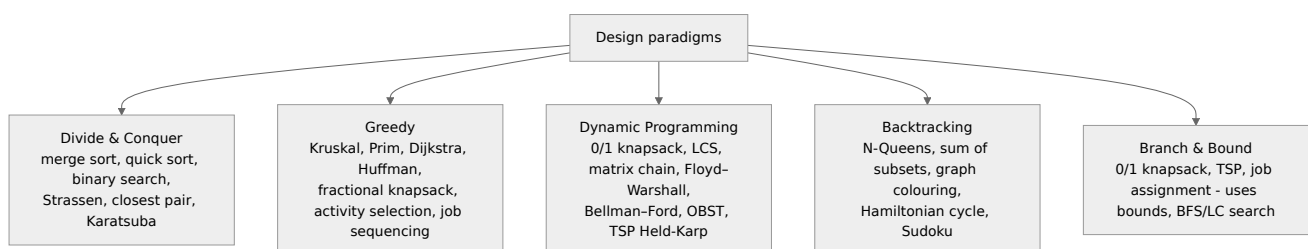

Greedy

Locally optimal choice, never reconsidered

Greedy-choice property + optimal substructure

Faster, not always optimal

Fractional knapsack ✓ ; 0/1 knapsack ✗

Dynamic programming

Solves overlapping subproblems, stores results

Optimal substructure + overlapping subproblems

Always optimal (if formulated correctly)

0/1 knapsack ✓ $O(nW)$ — pseudo-polynomial

7.1 Key DP Problems

LCS of $X = \text{ABCBDAB}$, $Y = \text{BDCABA} \rightarrow$ length 4 (e.g. BCBA). Time $O(mn)$.

$$\begin{aligned} \text{LCS}[i][j] &= \text{LCS}[i-1][j-1] + 1 && \text{if } x_i = y_j \\ &= \max(\text{LCS}[i-1][j], \text{LCS}[i][j-1]) && \text{otherwise} \end{aligned}$$

Matrix chain multiplication: dims $10 \times 30, 30 \times 5, 5 \times 60$.

$$\begin{aligned} (\text{AB})\text{C} &= 10 \cdot 30 \cdot 5 + 10 \cdot 5 \cdot 60 = 1500 + 3000 = 4500 \quad \checkmark \text{ optimal} \\ \text{A}(\text{BC}) &= 30 \cdot 5 \cdot 60 + 10 \cdot 30 \cdot 60 = 9000 + 18000 = 27000 \\ m[i][j] &= \min \text{ over } k \text{ of } m[i][k] + m[k+1][j] + p(i-1) \cdot p(k) \cdot p(j) \quad O(n^3) \\ \text{Number of parenthesisations of } n \text{ matrices} &= \text{Catalan } C(n-1) \end{aligned}$$

0/1 Knapsack: $K[i][w] = \max(K[i-1][w], v_i + K[i-1][w - w_i])$.

7.2 Greedy Problems

- **Huffman coding:** repeatedly merge two least-frequent nodes. $O(n \log n)$. Frequencies a:5, b:9, c:12, d:13, e:16, f:45 $\rightarrow$ codes f:0, c:100, d:101, a:1100, b:1101, e:111. Average bits = 2.24.
- **Activity selection:** sort by finish time, pick compatible.
- **Job sequencing with deadlines:** sort by profit, place in latest free slot.
- **Fractional knapsack:** sort by value/weight.
- **Optimal merge pattern:** like Huffman.

7.3 Backtracking

- N-Queens: 4-Queens has 2 solutions; 8-Queens has 92.
- State-space tree; prune when constraint violated (bounding function).
- Graph m-colouring, sum of subsets, Hamiltonian cycles.

7.4 Branch & Bound

- Uses BFS / **least-cost (LC) search** with bounds; FIFO B&B, LIFO B&B, LC B&B. Used for optimisation (TSP, 0/1 knapsack, assignment).

8. Graph Algorithms

8.1 Representations

Adjacency matrix: $O(V^2)$ space, $O(1)$ edge check. Adjacency list: $O(V + E)$.

8.2 BFS & DFS

Graph: $\begin{array}{ccccc} \text{A} & \text{---} & \text{B} & \text{---} & \text{E} \\ | & & | & & \\ \text{C} & \text{---} & \text{D} & & \end{array}$


BFS from A: A B C E D (queue; shortest path in unweighted graph)
DFS from A: A B E D C (stack/recursion; topological sort, SCC, cycle detection)
Both $O(V + E)$ with adjacency list, $O(V^2)$ with matrix

- DFS edge types: tree, back ($\rightarrow$ cycle), forward, cross. Undirected DFS has only tree and back edges.
- **Topological sort** (DAG only): DFS finishing order reversed, or Kahn's algorithm (in-degree 0).
- **Strongly connected components:** Kosaraju (2 DFS), Tarjan (1 DFS). $O(V + E)$.
- Articulation points & bridges: DFS with low values.

8.3 Shortest Paths

Algorithm	Type	Negative edges?	Complexity
BFS	Single-source, unweighted	—	$O(V + E)$
Dijkstra	Single-source	No	$O((V + E) \log V)$ binary heap; $O(V^2)$ array; $O(E + V \log V)$ Fibonacci
Bellman–Ford	Single-source	Yes; detects negative cycles	$O(VE)$
DAG shortest path	Single-source	Yes	$O(V + E)$
Floyd–Warshall	All-pairs (DP)	Yes (no neg. cycles)	$O(V^3)$
Johnson	All-pairs, sparse	Yes	$O(V^2 \log V + VE)$

Dijkstra worked (directed edges: $A \rightarrow B$ 4, $A \rightarrow C$ 1, $C \rightarrow B$ 2, $C \rightarrow D$ 5, $B \rightarrow D$ 1; source A)

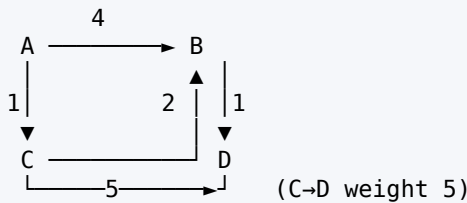

Step	Visited	dist(A, B, C, D)
0	{}	0, ∞, ∞, ∞
1	{A}	0, 4, 1, ∞
2	{A, C}	0, 3, 1, 6 B via C = 1+2 ; D via C = 1+5
3	{A, C, B}	0, 3, 1, 4 D via B = 3+1
4	{A, C, B, D}	final: A=0, B=3, C=1, D=4

8.4 Minimum Spanning Tree

Kruskal	Prim
Sort edges, add smallest that doesn't form a cycle (union-find)	Grow tree from a vertex, add cheapest edge leaving tree
$O(E \log E)$	$O(E \log V)$ heap; $O(V^2)$ matrix
Better for sparse graphs	Better for dense graphs
Forest during execution	Always a single tree

- MST is unique if all edge weights are distinct.
- **Cut property:** lightest edge across any cut belongs to some MST. **Cycle property:** heaviest edge in a cycle is not in any MST.
- Number of spanning trees of K_n : n^{n-2} .


8.5 Maximum Flow

- **Ford–Fulkerson** (augmenting paths): $O(E \cdot f^*)$. **Edmonds–Karp** (BFS augmenting paths): $O(VE^2)$.
- **Max-flow min-cut theorem:** value of max flow = capacity of min s–t cut.
- Bipartite matching reduces to max flow.

9. Lower Bound Theory

- **Comparison tree (decision tree):** sorting needs $\geq \lceil \log_2 n! \rceil = \Omega(n \log n)$ comparisons; searching sorted array $\Omega(\log n)$.
- Merging two sorted lists of size n : $2n - 1$ comparisons (worst). Finding max: $n - 1$ (tournament argument).
- **Reductions:** if A reduces to B and A has lower bound L, B has lower bound L (e.g. sorting $\leq$ convex hull $\rightarrow$ convex hull $\Omega(n \log n)$).

10. Complexity Classes

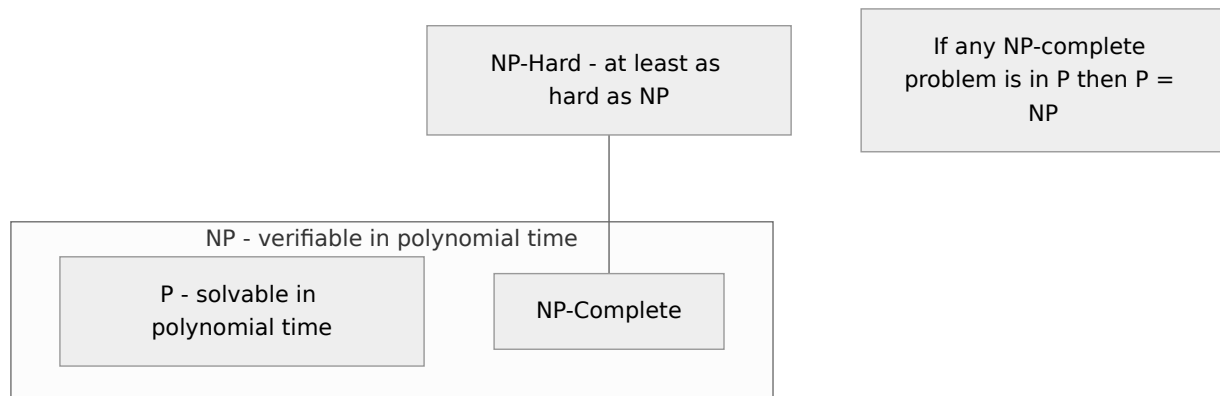

- $P \subseteq NP$ ($P = NP?$ is open). $NP\text{-Complete} = NP \cap NP\text{-Hard}$.
- To prove X is NP-complete: (1) $X \in NP$; (2) reduce a known NP-complete problem **to** X ($Y \leq_p X$).
- **Cook–Levin theorem:** SAT is the first NP-complete problem.
- NP-complete: SAT, 3-SAT, CLIQUE, Vertex Cover, Independent Set, Hamiltonian cycle, TSP (decision), Subset sum, 0/1 Knapsack (decision), Graph colouring ($k \geq 3$), Set cover, Partition.
- In P: 2-SAT, shortest path, MST, 2-colouring (bipartite test), Euler circuit, sorting, matching, linear programming, primality (AKS 2002).
- **NP-Hard but not in NP:** Halting problem; optimisation TSP.
- Reductions chain: SAT $\rightarrow$ 3-SAT $\rightarrow$ CLIQUE $\rightarrow$ Vertex Cover $\rightarrow$ Hamiltonian cycle $\rightarrow$ TSP.

11. Selected Topics

Topic	Key result
GCD (Euclid)	$\gcd(a, b) = \gcd(b, a \bmod b)$; $O(\log \min(a, b))$; extended Euclid gives x, y with $ax + by = \gcd$
Modular exponentiation	Repeated squaring $O(\log e)$
RSA	$n = pq$, $\phi = (p-1)(q-1)$, $ed \equiv 1 \bmod \phi$
Primality	Miller–Rabin (randomised), AKS (deterministic polynomial)
Polynomial multiplication	Naive $O(n^2)$; FFT $O(n \log n)$ (evaluate at roots of unity, pointwise multiply, inverse FFT)
Naive string match	$O((n - m + 1)m)$
Rabin–Karp	Rolling hash; average $O(n + m)$, worst $O(nm)$
KMP	Prefix (failure) function; $O(n + m)$
Boyer–Moore	Bad-character & good-suffix; sub-linear in practice
Finite automaton matcher	$O(n)$ matching after $O(m)$

KMP prefix function for pattern "ababaca": $\pi = [0, 0, 1, 2, 3, 0, 1]$.

12. Advanced Algorithms

- **Parallel algorithms** (PRAM models: EREW, CREW, CRCW). Parallel prefix sum $O(\log n)$ with n processors. Odd-even transposition sort $O(n)$ with n processors; bitonic sort $O(\log^2 n)$. Parallel merge $O(\log n)$. Brent's theorem.
- **Approximation algorithms:** Vertex cover — 2-approximation (pick both ends of uncovered edge); Metric TSP — 2-approx (MST doubling), **1.5-approx (Christofides)**; Set cover — $\ln n$ approx (greedy). Approximation ratio $\rho(n)$.

- **Randomised: Las Vegas** (always correct, random time — randomised quicksort) vs **Monte Carlo** (fixed time, may be wrong — Miller–Rabin, Karger's min-cut).

13. Deeper Dive — Traces You Must Be Able to Do by Hand


13.1 Recursion Tree for $T(n) = 2T(n/2) + n$

Level 0:		n		cost n
Level 1:	n/2		n/2	cost n
Level 2:	n/4	n/4	n/4	cost n
...				...
Level log n:	1	1	1 ... (n leaves)	cost n
Total = $n \times (\log_2 n + 1) = \Theta(n \log n)$				


For $T(n) = T(n-1) + n$: unrolling gives $n + (n-1) + \dots + 1 = n(n+1)/2 = \Theta(n^2)$.

13.2 AVL Insertion Trace: 10, 20, 30, 40, 50, 25



Insert 10, 20, 30 → RR imbalance at 10 → left rotation



Insert 40, 50 → RR imbalance at 30 → left rotation at 30




Insert 25 → goes left of 30; node 20 has balance -2 with right child 40 left-heavy → RL case
 Step 1: right-rotate 40 Step 2: left-rotate 20



13.3 Heap Sort Trace: [4, 10, 3, 5, 1]

Step	Array	Note
Build heap	$[4, 10, 3, 5, 1] \rightarrow [10, 4, 3, 5, 1] \rightarrow [10, 5, 3, 4, 1]$	heapify index 1, then 0
Swap 10 ↔ 1, heapify	$[5, 4, 3, 1 10]$	
Swap 5 ↔ 1, heapify	$[4, 1, 3 5, 10]$	
Swap 4 ↔ 3, heapify	$[3, 1 4, 5, 10]$	
Swap 3 ↔ 1	$[1 3, 4, 5, 10]$	sorted

13.4 Kruskal vs Prim on the Same Graph

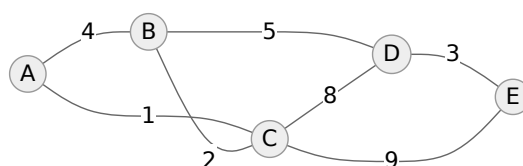

Kruskal (sorted edges)	Decision	Prim (start A)	Edge added
A-C 1	take	{A}	A-C 1
B-C 2	take	{A, C}	B-C 2
D-E 3	take	{A, B, C}	B-D 5
A-B 4	skip (cycle)	{A, B, C, D}	D-E 3
B-D 5	take → done		

Both give MST weight $1 + 2 + 3 + 5 = 11$.

13.5 Floyd–Warshall Trace

Directed graph: $1 \rightarrow 2$ (4), $1 \rightarrow 3$ (11), $2 \rightarrow 1$ (6), $2 \rightarrow 3$ (2), $3 \rightarrow 1$ (3).

D^0	D^1 (via 1)	D^2 (via 2)	D^3 (via 3) = final
0 4 11	0 4 11	0 4 6	0 4 6
6 0 2	6 0 2	6 0 2	5 0 2
3 ∞ 0	3 7 0	3 7 0	3 7 0

Updates: $D^1[3][2] = 3 + 4 = 7$; $D^2[1][3] = 4 + 2 = 6$; $D^3[2][1] = 2 + 3 = 5$.


13.6 0/1 Knapsack DP Table

Capacity $W = 5$; items (weight, value): (2, 3), (3, 4), (4, 5), (5, 6).

$i \setminus w$	0	1	2	3	4	5
0	0	0	0	0	0	0
1 (2, 3)	0	0	3	3	3	3
2 (3, 4)	0	0	3	4	4	7
3 (4, 5)	0	0	3	4	5	7
4 (5, 6)	0	0	3	4	5	7

Answer 7 (items 1 and 2). Traceback: $K[4][5] = K[3][5] = K[2][5] \neq K[1][5] \rightarrow$ item 2 taken; remaining capacity $2 \rightarrow$ item 1 taken.

13.7 Topological Sort (Kahn's algorithm)

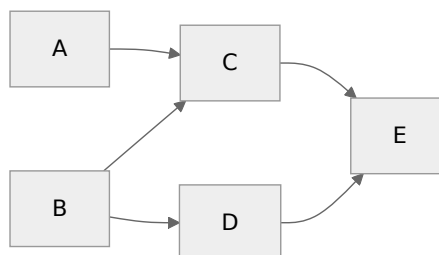

In-degrees: A 0, B 0, C 2, D 1, E 2. Queue A, B $\rightarrow$ remove A (C: 1) $\rightarrow$ remove B (C: 0, D: 0) $\rightarrow$ C $\rightarrow$ D (E: 0) $\rightarrow$ E. One valid order: **A, B, C, D, E** (B, A, D, C, E is also valid — topological orders are not unique).

13.8 Double Hashing

$m = 11$, $h_1(k) = k \bmod 11$, $h_2(k) = 7 - (k \bmod 7)$, probe i : $(h_1 + i \cdot h_2) \bmod 11$. Insert 22, 33 (22 already at 0): $22 \rightarrow 0$. $33 \rightarrow h_1 = 0$ (occupied); $h_2 = 7 - 5 = 2 \rightarrow (0 + 2) \bmod 11 = 2$. h_2 must never be 0 and should be co-prime with m (choose m prime).

Previous Year Questions (PYQ pattern)

Complexity & recurrences

1. Solution of $T(n) = 2T(n/2) + n \log n$: $\Theta(n \log^2 n)$
2. $T(n) = 4T(n/2) + n$: $\Theta(n^2)$
3. $T(n) = T(n/2) + n$: $\Theta(n)$
4. $T(n) = 3T(n/4) + n \log n$: $\Theta(n \log n)$ (case 3)
5. Which is the slowest-growing? (a) $n \log n$ (b) $n^{1.01}$ (c) $n/\log n$ (d) $\sqrt{n} \log n$ — (d)
6. Time complexity of the loop `for (i=1; i<n; i*=2):` $O(\log n)$
7. Nested `for (i=1; i<=n; i++) for (j=1; j<=n; j+=i):` $O(n \log n)$ (harmonic series)

Arrays, stacks, queues

8. $A[1..10][1..15]$, row-major, base 100, 4 bytes/element. Address of $A[5][7]$: $100 + 4[(4)(15) + 6] = 364$
9. Postfix of $(A + B) * (C - D)$: **$AB+CD-*$**
10. Prefix of $A + B * C$: **$+A*BC$**
11. Minimum stacks to implement a queue: **2**
12. Circular queue of size n holds at most: **$n - 1$** elements (one-slot-empty convention)

Trees

13. A binary tree with 20 leaves has how many nodes of degree 2? **19**
14. Maximum nodes in a binary tree of height 5 (root at height 0): $2^6 - 1 = 63$
15. Number of distinct binary trees with 4 nodes: **14**
16. Inorder: D B E A F C; Preorder: A B D E C F $\rightarrow$ Postorder: **D E B F C A**
17. Minimum nodes in an AVL tree of height 4: **12**
18. In a complete ternary tree with 10 internal nodes, leaves = $2 \times 10 + 1 = 21$
19. Inorder traversal of BST gives: **sorted order**
20. Worst-case height of BST with n nodes: **$n - 1$**

Heaps & hashing

21. Time to build a heap of n elements: **$O(n)$**
22. Array 89, 19, 50, 17, 12, 15, 2, 5, 7, 11, 6, 9, 100 — after inserting 100 into max-heap, root = **100**
23. Linear probing suffers from: **primary clustering**
24. With chaining and load factor α , expected unsuccessful search: **$\Theta(1 + \alpha)$**
25. Keys 43, 36, 92, 87, 11, 4, 71, 13, 14 hashed with $h(k) = k \bmod 11$ using chaining. Keys in slot 3: **36 and 14** ($43 \rightarrow 10, 36 \rightarrow 3, 92 \rightarrow 4, 87 \rightarrow 10, 11 \rightarrow 0, 4 \rightarrow 4, 71 \rightarrow 5, 13 \rightarrow 2, 14 \rightarrow 3$)

Sorting & searching

26. Which sorting algorithm has worst case $O(n \log n)$ and is in-place? **Heap sort**
27. Best algorithm for nearly sorted data: **Insertion sort**
28. Quick sort worst case occurs when: **array is already sorted (pivot = first/last)**
29. Which sorts are stable? **Merge, insertion, bubble, counting, radix**
30. Lower bound for comparison sorting: **$\Omega(n \log n)$**
31. Maximum comparisons in binary search on 1000 elements: $\lceil \log_2 1000 \rceil + 1 = 10$
32. Min and max of n elements need at least: **$\lceil 3n/2 \rceil - 2$ comparisons**

Design techniques

33. Matrix chain $10 \times 20, 20 \times 30, 30 \times 40$: min multiplications = $(AB)C = 6000 + 12000 = 18000$
34. LCS of "ABCD" and "ACBD": **3**

35. 0/1 knapsack using DP: **$O(nW)$** (pseudo-polynomial)
36. Huffman coding is an example of: **greedy**
37. Floyd–Warshall uses: **dynamic programming**
38. N-Queens problem is solved by: **backtracking**
39. Which needs both optimal substructure & overlapping subproblems? **Dynamic programming**

Graphs

40. Dijkstra fails with: **negative edge weights**
41. Bellman-Ford time complexity: **$O(VE)$**
42. Kruskal's time complexity: **$O(E \log E)$**
43. BFS is used to find: **shortest path in unweighted graph**
44. Topological sort is possible only for: **DAG**
45. Number of edges in the MST of a connected graph with n vertices: **$n - 1$**
46. Back edge in DFS of a directed graph indicates: **a cycle**
47. Max-flow equals: **min-cut capacity**

Complexity theory

48. First problem proved NP-complete: **SAT (Cook–Levin)**
49. Which is in P? (a) 3-SAT (b) 2-SAT (c) Clique (d) Hamiltonian cycle — **(b)**
50. If $A \leq_p B$ and $B \in P$ then: **$A \in P$**
51. If an NP-complete problem is solved in polynomial time: **$P = NP$**
52. Halting problem is: **undecidable, NP-hard but not in NP**

Selected topics

53. KMP string matching time: **$O(n + m)$**
54. FFT multiplies two polynomials of degree n in: **$O(n \log n)$**
55. Randomised quicksort is a: **Las Vegas algorithm**
56. Christofides algorithm gives approximation ratio: **1.5** (metric TSP)

More practice questions

57. After inserting 10, 20, 30 into an empty AVL tree, the root is: **20**
58. Number of rotations needed for the RL case: **2**
59. Build max-heap from [4, 10, 3, 5, 1]; the resulting array: **[10, 5, 3, 4, 1]**
60. MST weight for the graph in §13.4: **11**
61. Floyd–Warshall final distance from 2 to 1 in §13.5: **5**
62. 0/1 knapsack $W = 5$ with items (2, 3), (3, 4), (4, 5), (5, 6): **7**
63. Which is NOT a valid topological order of §13.7? (a) A B C D E (b) B A D C E (c) A C B D E (d) B D A C E —
Ans: (c) (C before B violates $B \rightarrow C$)
64. $T(n) = T(n - 1) + n$ solves to: **$\Theta(n^2)$**
65. In double hashing, $h_2(k)$ must never evaluate to: **0**
66. Kruskal's algorithm uses which data structure to detect cycles? **Disjoint-set (union-find)**

Quick Revision Box

- Master theorem: compare $f(n)$ with $n^{\log_b a}$
- $n_0 = n_2 + 1$ · Catalan 1, 1, 2, 5, 14, 42 · AVL min nodes 1, 2, 4, 7, 12, 20
- Build-heap $O(n)$ · Comparison sort $\Omega(n \log n)$
- Dijkstra no negatives · Bellman–Ford $O(VE)$ · Floyd $O(V^3)$
- SAT first NPC · 2-SAT in P · KMP $O(n + m)$

Theory of Computation & Compilers

In this unit

Part A — Theory of Computation	155	Part B — Compiler Design	161
1. Basics	155	9. Phases of a Compiler	161
2. Chomsky Hierarchy	156	10. Syntax Analysis (Parsing)	161
3. Finite Automata	156	11. Syntax-Directed Translation	163
4. Regular Expressions	158	12. Run-Time Environment	163
5. Context-Free Languages	158	13. Intermediate Code	164
6. Closure & Decision Properties (MOST ASKED TABLE)	159	14. Code Optimisation & Generation	165
7. Turing Machines	160	15. Deeper Dive — Constructions & Parsing Traces	166
8. Undecidability	160	Previous Year Questions (PYQ pattern)	169

Expected questions: 10–12 · Target: 9+ · Type: closure/decidability facts, automata construction, parsing tables — the differentiator unit for 250+

Syllabus checklist



- ☐ Formal languages, non-computational problems, diagonal argument, Russell's paradox
- ☐ Regular languages: DFA, NFA, ϵ -NFA, equivalence, regular expressions, regular grammars, pumping lemma, closure & decision properties, Mealy & Moore machines, minimisation
- ☐ Context-free languages: CFG, derivations, parse trees, ambiguity, CNF, GNF, PDA (DPDA/NPDA), pumping lemma, closure & decision properties, CYK
- ☐ Turing machines: variants, universal TM, Church–Turing thesis, recursive & RE languages, CSL & LBA, unrestricted grammars, Chomsky hierarchy
- ☐ Undecidability: halting problem, PCP, undecidable CFL problems, Rice's theorem, complexity classes
- ☐ Syntax analysis: precedence, associativity, left recursion & factoring, recursive descent, LL(1), LR(0), SLR(1), LALR(1), CLR(1)
- ☐ Semantic analysis: SDD, synthesized & inherited attributes, S- and L-attributed, dependency graphs, type checking
- ☐ Run-time environment: storage organisation, activation records, parameter passing, symbol table
- ☐ Intermediate code: three-address code, quadruples, triples, DAG, translation of expressions, Booleans, control flow
- ☐ Code generation & optimisation: basic blocks, flow graphs, data-flow analysis, local/global/loop/peephole optimisation, register allocation, instruction scheduling

Part A — Theory of Computation

1. Basics

- Alphabet Σ (finite set of symbols), string, language $L \subseteq \Sigma^*$. $|\Sigma^*|$ is countably infinite; the set of all languages 2^{Σ^*} is **uncountable**.
- **Diagonal argument (Cantor)**: proves uncountability of reals / power sets; used to show existence of non-RE languages (L_d = diagonal language).
- Since TMs are countable but languages are uncountable, **most languages are not even recursively enumerable**.
- **Russell's paradox**: the set of all sets that do not contain themselves — self-reference leads to contradiction (basis of diagonalisation).

2. Chomsky Hierarchy

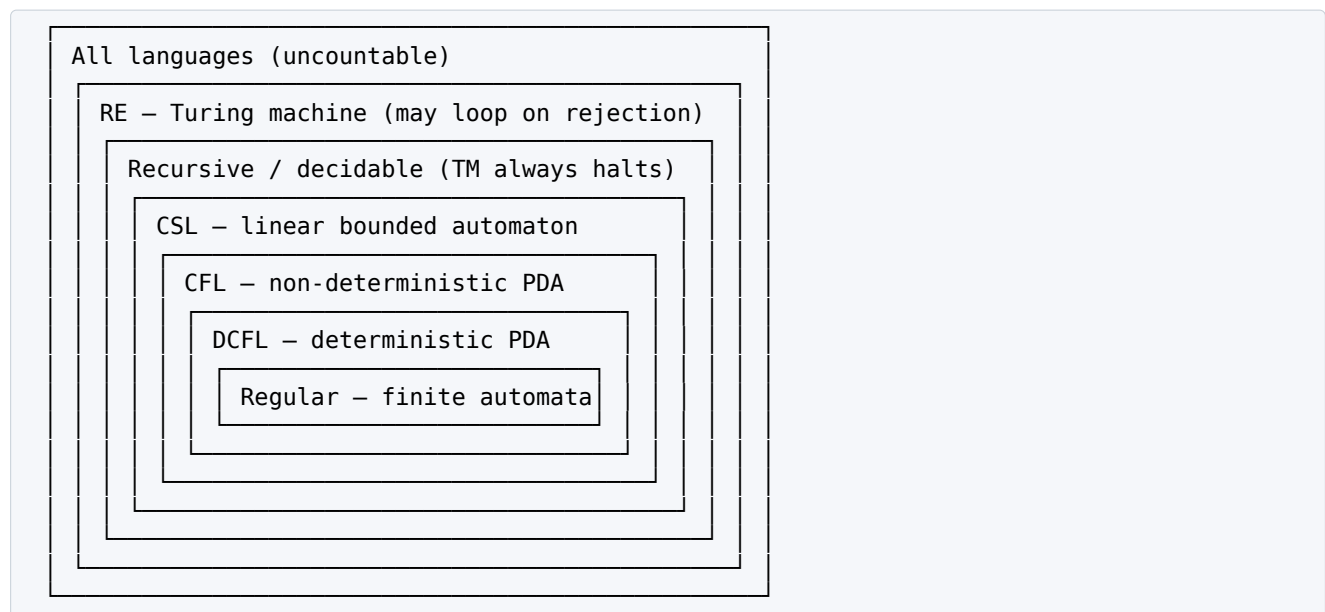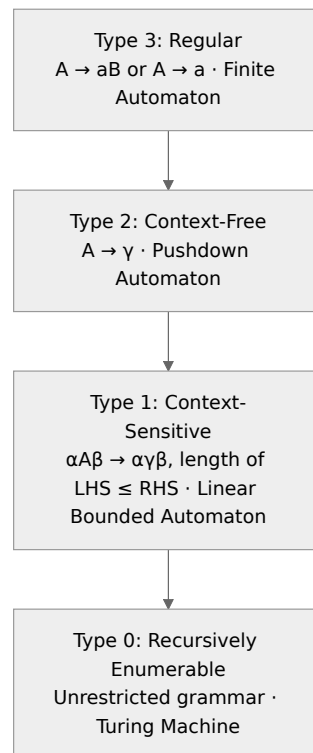


3. Finite Automata

3.1 DFA vs NFA

- DFA: $\delta: Q \times \Sigma \rightarrow Q$. NFA: $\delta: Q \times (\Sigma \cup \{\epsilon\}) \rightarrow 2^Q$.
- **DFA $\equiv$ NFA $\equiv \epsilon$ -NFA $\equiv$ Regular expressions $\equiv$ Regular grammars** in power.
- Subset construction: n -state NFA $\rightarrow$ DFA with up to 2^n states.

Example: DFA for binary strings ending in "01".

Example: DFA for binary numbers divisible by 3 (state = remainder so far; reading bit b takes remainder i to $(2i + b) \bmod 3$).

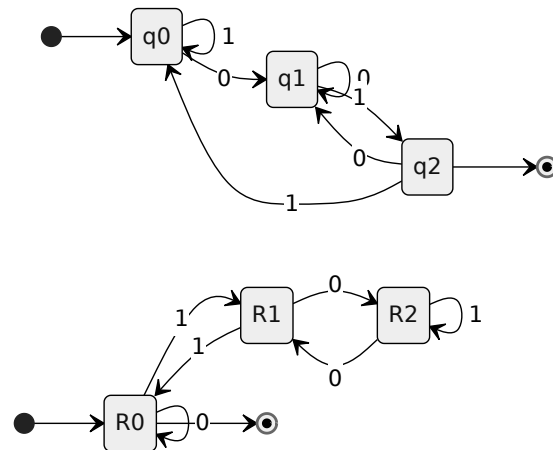

3.2 Counting minimum DFA states (common shortcuts)

Language over $\{a, b\}$	Min DFA states
Strings of length exactly n	$n + 2$
Length $\geq n$	$n + 1$
Length $\leq n$	$n + 2$
Strings where length $\equiv 0 \pmod k$	k
Strings ending with a given string of length n	$n + 1$
Strings containing a given substring of length n	$n + 1$
Strings starting with a given string of length n	$n + 2$
Number of a's $\equiv 0 \pmod m$ AND b's $\equiv 0 \pmod n$	$m \cdot n$
Binary numbers divisible by n (n odd)	n
n -th symbol from the end is 'a' (DFA)	2^n (NFA: $n + 1$)

3.3 Minimisation (Myhill–Nerode / partition method)

1. Remove unreachable states.
 2. Partition into $\{\text{final}\}, \{\text{non-final}\}$.
 3. Repeatedly split groups whose members go to different groups on some symbol.
 4. Merge equivalent states.
- Myhill–Nerode:** L is regular $\Leftrightarrow$ the number of equivalence classes of $\equiv_L$ is finite; that number = states of minimal DFA.

3.4 Mealy & Moore

Moore	Mealy
Output depends on state only	Output depends on state + input
Output length = input length + 1	Output length = input length
More states usually	Fewer states
- Mealy $\rightarrow$ Moore may need up to Q	Q

4. Regular Expressions

- Operators: union (+), concatenation, Kleene star (*). Precedence: $*$ > concatenation > +.
- Arden's theorem:** $R = Q + RP \Rightarrow R = QP^*$ (if P doesn't contain ϵ).
- Identities: $(a + b)^* = (ab)^* = (a^* + b^*)$; $(ab)a = a(ba)$; $\epsilon = \epsilon$; $\emptyset^* = \epsilon$; $R + R^* = R^*$; $(R^*)^* = R^*$.

Language	RE
All strings over {a,b}	$(a + b)^*$
Contains "aa"	$(a + b)aa(a + b)$
Even length	$((a + b)(a + b))^*$
Starts and ends with same symbol	$a(a+b)^*a + b(a+b)^*b + a + b$
No two consecutive a's	$(b + ab)^*(\epsilon + a)$
Exactly one 'a'	bab

Pumping Lemma (Regular)

If L is regular, $\exists p$ such that every $w \in L$ with $|w| \geq p$ can be split $w = xyz$ with $|xy| \leq p$, $|y| \geq 1$, and $xy^iz \in L$ for all $i \geq 0$. Used to prove **non-regularity** (it is a necessary, not sufficient condition). Non-regular: $a^n b^n$, ww^R , palindromes, a^{n^2} , a^p (p prime), balanced parentheses, $a^n b^m$ ($n < m$). Regular: $a^n b^m$ ($n, m \geq 0$), $(ab)^n$, $a^{(2n)}$, strings with equal number of "ab" and "ba" substrings, $a^n b^n$ for $n \leq 100$ (finite).

5. Context-Free Languages

5.1 Grammars & Ambiguity

- Ambiguous** grammar: some string has ≥ 2 parse trees (leftmost derivations). $E \rightarrow E + E \mid E * E \mid id$ is ambiguous.
- Inherently ambiguous language:** every grammar ambiguous, e.g. $\{a^i b^j c^k \mid i = j \text{ or } j = k\}$.
- Checking ambiguity of a CFG is **undecidable**.
- Remove ambiguity by encoding precedence & associativity:

$E \rightarrow E + T \mid T$	(+ left-assoc, lower precedence)
$T \rightarrow T * F \mid F$	(* higher precedence)
$F \rightarrow (E) \mid id$	

5.2 Normal Forms

- **CNF:** $A \rightarrow BC \mid a$. A string of length n needs exactly $2n - 1$ derivation steps; parse tree height $\geq \lceil \log_2 n \rceil + 1$.
- **GNF:** $A \rightarrow a\alpha$ ($\alpha \in V^*$). Derivation of length- n string takes exactly n steps.
- Simplification order: remove ϵ -productions $\rightarrow$ unit productions $\rightarrow$ useless symbols.

5.3 PDA

- PDA = FA + stack. Acceptance by final state $\equiv$ by empty stack (for NPDA).
- **NPDA $\supsetneq$ DPDA** (unlike FA). ww^R needs NPDA; wcw^R is DCFL.
- DCFLs are unambiguous; every LR(k) grammar generates a DCFL.

PDA for $a^n b^n$

$\delta(q_0, a, Z) = (q_0, aZ)$	push a
$\delta(q_0, a, a) = (q_0, aa)$	push a
$\delta(q_0, b, a) = (q_1, \epsilon)$	pop on b
$\delta(q_1, b, a) = (q_1, \epsilon)$	
$\delta(q_1, \epsilon, Z) = (q_f, Z)$	accept

5.4 Pumping Lemma (CFL)

$w = uvxyz$, $|vxy| \leq p$, $|vy| \geq 1$, $uv^i xy^i z \in L \forall i \geq 0$. Non-CFL: $a^n b^n c^n$, ww , a^{n^2} , a^p (prime), $a^n b^m c^n d^m$. CFL (non-regular): $a^n b^n$, ww^R , $a^n b^m c^m$, $a^n b^n c^m$, $a^i b^j c^k$ with $i = j$ or $j = k$.

5.5 CYK Algorithm

Membership for CNF grammar in $O(n^3 \cdot |G|)$; dynamic programming over substrings.

6. Closure & Decision Properties (MOST ASKED TABLE)

Operation	Regular	DCFL	CFL	CSL	Recursive	RE
Union	✓	✗	✓	✓	✓	✓
Intersection	✓	✗	✗	✓	✓	✓
Complement	✓	✓	✗	✓	✓	✗
Concatenation	✓	✗	✓	✓	✓	✓
Kleene star	✓	✗	✓	✓	✓	✓
Reversal	✓	✗	✓	✓	✓	✓
Homomorphism	✓	✗	✓	✗	✗	✓
Inverse homomorphism	✓	✓	✓	✓	✓	✓
Intersection with regular	✓	✓	✓	✓	✓	✓
Difference	✓	✗	✗	✓	✓	✗

Notes: $CFL \cap Regular = CFL$. $DCFL \cup Regular$, $DCFL \cap Regular = DCFL$. If L and L' are both RE $\Rightarrow L$ is recursive.

Decision problem	Regular	CFL	CSL	Recursive	RE
Membership	D	D	D	D	U (semi-decidable)
Emptiness	D	D	U	U	U
Finiteness	D	D	U	U	U
Equivalence	D	U (DCFL: D)	U	U	U
Ambiguity	—	U	—	—	—
$L = \Sigma^*$	D	U	U	U	U
Subset ($L_1 \subseteq L_2$)	D	U	U	U	U
Intersection empty?	D	U	U	U	U


D = decidable, U = undecidable.

7. Turing Machines

- $TM = (Q, \Sigma, \Gamma, \delta, q_0, B, F)$; infinite tape, read/write head moves L/R.
- **Variants equivalent in power**: multi-tape, multi-track, two-way infinite tape, non-deterministic TM, multi-head, TM with stay option, 2-stack PDA, queue automaton, counter machine with 2 counters.
- **PDA with 2 stacks = TM**. FA with a queue = TM.
- **Universal TM**: simulates any TM given its encoding $\langle M, w \rangle$.
- **Church–Turing thesis**: every effectively computable function is computable by a TM (a hypothesis, not a theorem).
- **Recursive (decidable)**: TM halts on all inputs. **RE (semi-decidable)**: TM halts & accepts on members; may loop otherwise.
- **LBA** (tape bounded by input length) accepts CSLs. Membership for CSL is decidable; emptiness for CSL is undecidable.
- **Unrestricted grammar** $(\alpha \rightarrow \beta) \equiv TM$.

TM for $a^n b^n$: repeatedly mark leftmost a as X, move right to leftmost b, mark as Y, return left; when no a's left, check no b's remain → accept.


8. Undecidability

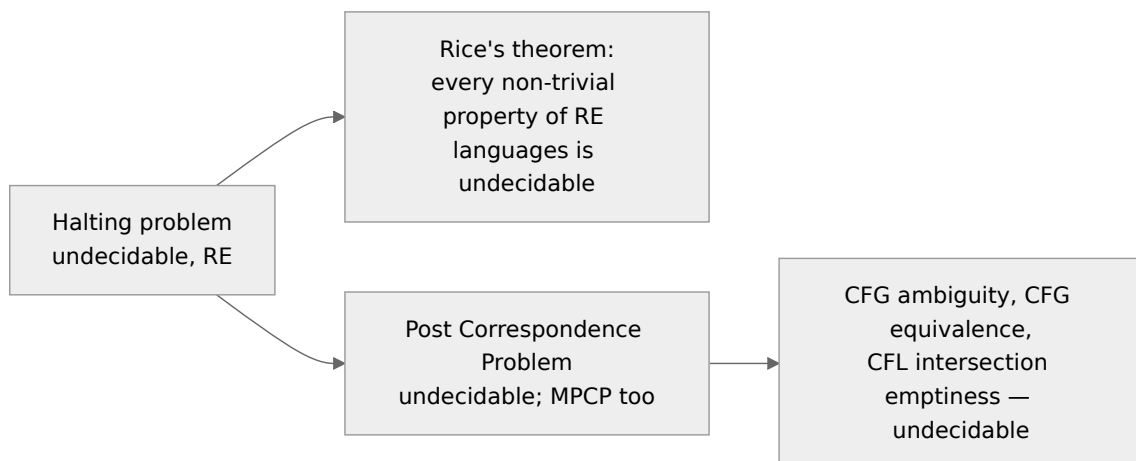

- **Halting problem** $HALT_TM = \{ \langle M, w \rangle \mid M \text{ halts on } w \}$: **RE but not recursive**; its complement is **not RE**.
- A_TM (acceptance) is RE, undecidable. Complement of A_TM is not RE.
- **Rice's theorem**: any non-trivial property of the **language** of a TM is undecidable (e.g. " $L(M)$ is empty", " $L(M)$ is regular", " $L(M)$ is finite").
- **PCP**: undecidable in general; decidable for single-letter alphabet. Bounded PCP is NP-complete.
- E_TM (emptiness) — not RE (its complement is RE). EQ_TM — neither RE nor co-RE.
- Decidable examples: whether a DFA accepts any string; whether a CFG generates the empty language; whether a TM makes more than k steps on input w (simulate k steps).
- Complexity: P, NP, PSPACE, EXPTIME; tractable (polynomial) vs intractable. See [Unit 7 §10](#).


Part B — Compiler Design

9. Phases of a Compiler

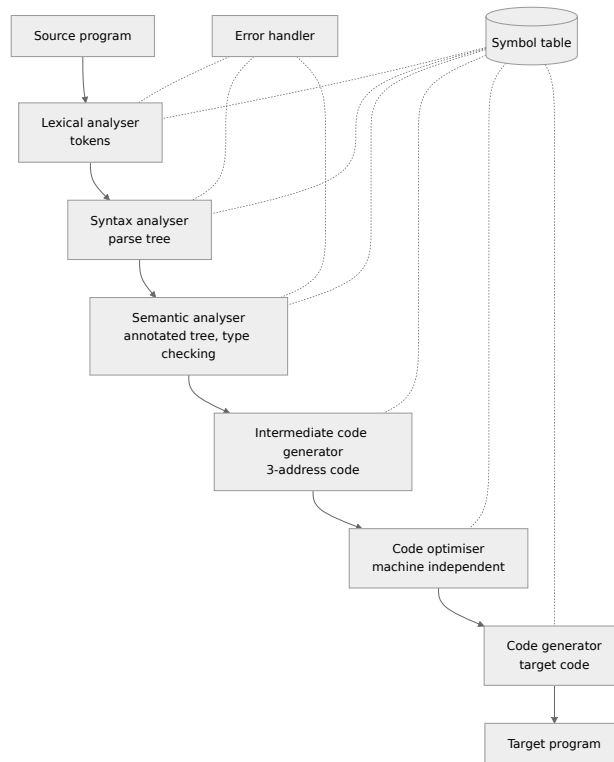

- **Front end** (analysis): lexical, syntax, semantic, ICG — language-dependent, machine-independent.
- **Back end** (synthesis): optimisation, code generation — machine-dependent.
- **Lexical analysis**: regular expressions → DFA (tools: **LEX/Flex**). Token, lexeme, pattern. Errors: illegal characters.
- **Count tokens**: `printf("i = %d", i);` → `printf(, "i = %d", ", ", i, ), ;` = **7 tokens**.
- Parser generator: **YACC/Bison** (LALR(1)).
- Compiler passes: single-pass vs multi-pass. **Cross compiler**: runs on one machine, generates code for another. **Bootstrapping**: writing a compiler in its own language (T-diagrams).

10. Syntax Analysis (Parsing)

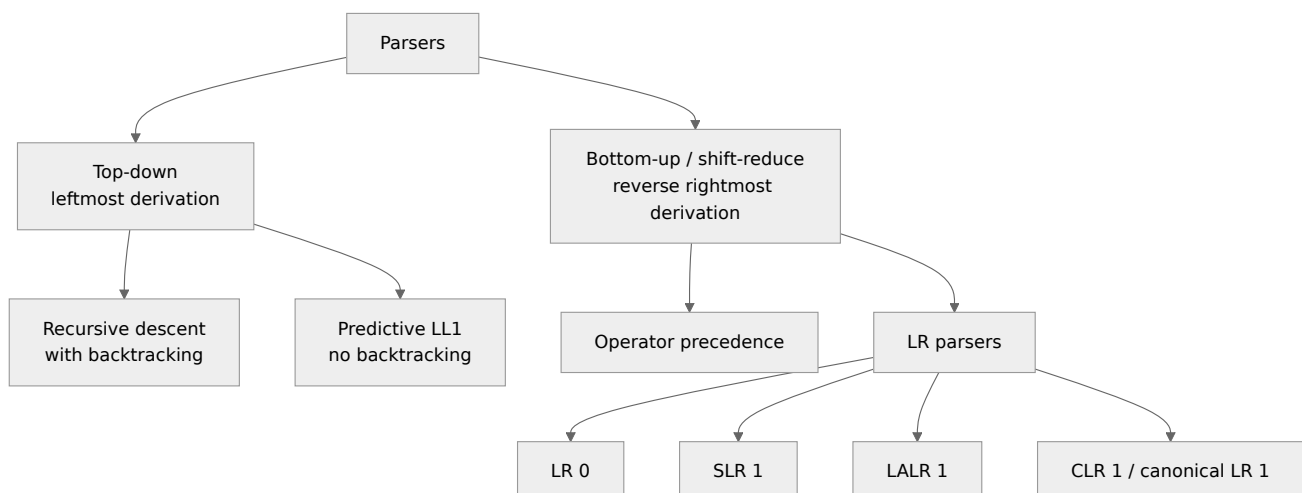

Power: $LR(0) \subset SLR(1) \subset LALR(1) \subset CLR(1)$; $LL(1) \subset LR(1)$. Number of states: $LR(0) = SLR = LALR \leq CLR$.

10.1 Grammar Transformations for Top-down

- **Left recursion removal:** $A \rightarrow A\alpha \mid \beta \Rightarrow A \rightarrow \beta A', A' \rightarrow \alpha A' \mid \epsilon$.
- **Left factoring:** $A \rightarrow \alpha\beta_1 \mid \alpha\beta_2 \Rightarrow A \rightarrow \alpha A', A' \rightarrow \beta_1 \mid \beta_2$.

10.2 FIRST and FOLLOW

Grammar:

```
E → T E'
E' → + T E' | ε
T → F T'
T' → * F T' | ε
F → ( E ) | id
```

NT	FIRST	FOLLOW
E	{ (, id }	{), \$ }
E'	{ +, ε }	{), \$ }
T	{ (, id }	{ +,), \$ }
T'	{ *, ε }	{ +,), \$ }
F	{ (, id }	{ *, +,), \$ }

LL(1) parsing table:

	id	+	*	(	)	\$
E	E→TE'			E→TE'		
E'		E'→+TE'			E'→ε	E'→ε
T	T→FT'			T→FT'		
T'		T'→ε	T'→*FT'		T'→ε	T'→ε
F	F→id			F→(E)		

LL(1) condition: for $A \rightarrow \alpha \mid \beta$: $FIRST(\alpha) \cap FIRST(\beta) = \emptyset$; if $\beta \Rightarrow^* \epsilon$ then $FIRST(\alpha) \cap FOLLOW(A) = \emptyset$. A left-recursive or ambiguous grammar is **never** LL(1).

10.3 LR Parsing

LR parser model

input: a1 a2 ... an \$

stack: s0 X1 s1 X2 s2 ... Xm sm

ACTION[s, a]: shift / reduce / accept / error
GOTO[s, A]: next state after reduce

Parser	Items	Reduce $A \rightarrow \alpha$ placed in
LR(0)	$[A \rightarrow \alpha \cdot \beta]$	all terminals
SLR(1)	LR(0) items	FOLLOW(A)
LALR(1)	LR(1) items with same core merged	lookaheads
CLR(1)	$[A \rightarrow \alpha \cdot \beta, a]$	lookahead a only

Conflicts: **shift-reduce (S/R)** and **reduce-reduce (R/R)**.

- Merging CLR states into LALR can introduce **R/R conflicts** but **never new S/R conflicts**.
- An unambiguous grammar can still have conflicts; every ambiguous grammar has conflicts in every LR table.

Operator precedence parsing: for operator grammars (no ϵ , no two adjacent non-terminals); relations $\leq$, $\doteq$, $>$.

Handle: substring matching RHS whose reduction is a step of reverse rightmost derivation. **Viable prefixes** are recognised by a DFA (LR(0) automaton).

11. Syntax-Directed Translation


Attribute	Computed from	Example
Synthesized	Children (bottom-up)	$E.val = E1.val + T.val$
Inherited	Parent and/or left siblings	type info in declarations: $L.in = T.type$

- **S-attributed SDD:** only synthesized attributes $\rightarrow$ evaluate in **bottom-up (postorder)**, natural for LR parsers.
- **L-attributed SDD:** inherited attributes depend only on parent & **left** siblings $\rightarrow$ evaluated in one **depth-first left-to-right** pass (LL parsers). **Every S-attributed is L-attributed.**
- **Dependency graph:** evaluation order = any **topological sort**; a cycle $\rightarrow$ no valid order.
- **Annotated parse tree:** shows attribute values.
- **Type checking:** static vs dynamic; type expressions; coercion; overloading resolution; strongly typed language.


```
SDT for desk calculator: input 3 * 5 + 4
L  $\rightarrow$  E n      { print(E.val) }
E  $\rightarrow$  E1 + T    { E.val = E1.val + T.val }
T  $\rightarrow$  T1 * F    { T.val = T1.val * F.val }
F  $\rightarrow$  digit     { F.val = digit.lexval }
Annotated root value: 19
```

12. Run-Time Environment

Memory layout

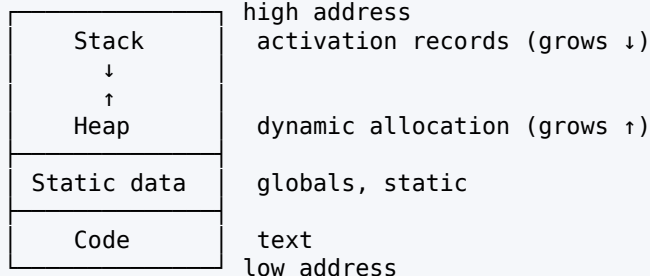

Activation record (stack frame):

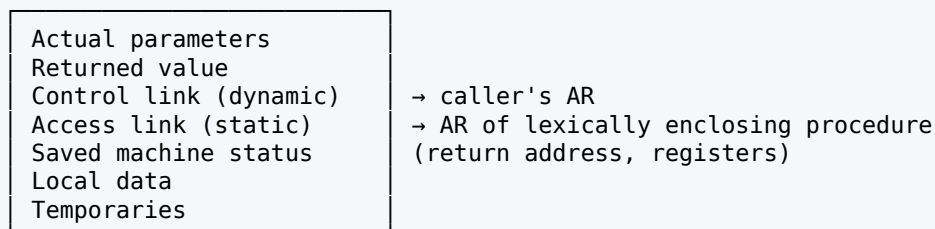

- **Activation tree:** each node = a procedure activation; the stack holds the path from root to the current node.
- Static allocation (FORTRAN — no recursion), stack allocation (C, recursion), heap allocation (closures, dynamic data).
- **Display:** array of pointers for fast non-local access in nested scopes.
- Parameter passing: see [Unit 3 §1.3](#).
- **Symbol table:** implemented with linear list, **hash table** (most common), BST; stores name, type, scope, offset. Scope handling via a stack of tables.

13. Intermediate Code

Expression: $a = b * -c + b * -c$


Three-address code:

```
t1 = minus c
t2 = b * t1
t3 = minus c
t4 = b * t3
t5 = t2 + t4
a = t5
```

Quadruples (op, arg1, arg2, result) · **Triples** (op, arg1, arg2 — results referred by position) · **Indirect triples** (list of pointers to triples, easy to reorder).

#	op	arg1	arg2	result
0	minus	c		t1
1	*	b	t1	t2
2	minus	c		t3
3	*	b	t3	t4
4	+	t2	t4	t5
5	=	t5		a

DAG for the same expression shares the common subexpression $b * -c$:

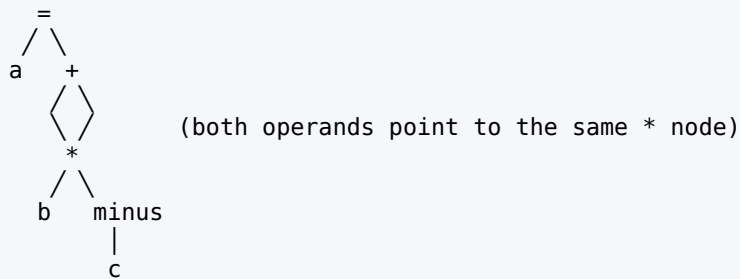


- Other IRs: syntax tree, postfix, **SSA (static single assignment)** — each variable assigned once, ϕ -functions at joins.
- Boolean expressions: numerical vs **short-circuit (jumping) code**; **backpatching** for one-pass generation of jumps (makelist, merge, backpatch).

14. Code Optimisation & Generation

14.1 Basic Blocks & Flow Graphs

Leaders: (1) first statement; (2) target of any jump; (3) statement immediately after a jump. A basic block runs from a leader up to (not including) the next leader.

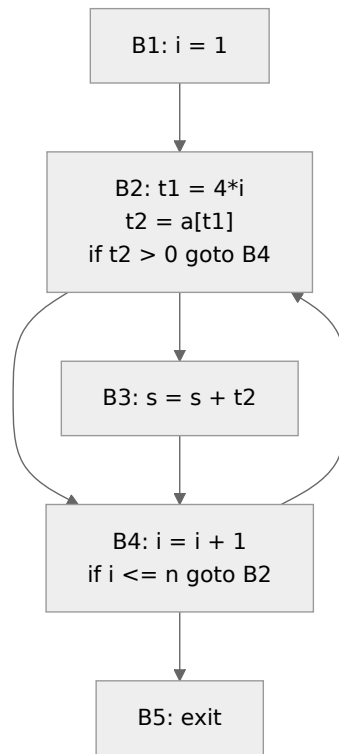

14.2 Optimisations

Level	Technique	Example
Local	Common subexpression elimination	$t1 = b*c; t2 = b*c \rightarrow$ reuse $t1$
Local	Constant folding	$x = 2 * 3.14 \rightarrow x = 6.28$
Local	Constant/copy propagation	$x = y; z = x + 1 \rightarrow z =$ $y + 1$
Local	Dead code elimination	Remove assignments never used
Loop	Code motion (loop-invariant)	Move $t = x*y$ out of the loop
Loop	Induction variable elimination	Replace i with pointer arithmetic
Loop	Strength reduction	$i*4 \rightarrow t = t + 4; x^2 \rightarrow x*x$
Loop	Loop unrolling, loop fusion (jamming), loop fission	
Global	Data-flow analysis based	
Peephole	Redundant load/store, unreachable code, flow-of-control (jump to jump), algebraic simplification, use of machine idioms (INC)	Window over target code

14.3 Data-Flow Analysis

Analysis	Direction	Meet	Use
Reaching definitions	Forward	$\cup$	Constant propagation
Live variables	Backward	$\cup$	Register allocation, dead code
Available expressions	Forward	$\cap$	Global CSE
Very busy expressions	Backward	$\cap$	Code hoisting

Reaching definitions: $OUT[B] = gen[B] \cup (IN[B] - kill[B])$; $IN[B] = \cup OUT[pred]$
 Live variables: $IN[B] = use[B] \cup (OUT[B] - def[B])$; $OUT[B] = \cup IN[succ]$

- **Loops** detected using **dominators** and back edges ($n \rightarrow d$ where $d \text{ dom } n$). Natural loop. Reducible flow graphs.

14.4 Code Generation

- Issues: instruction selection, **register allocation** (graph colouring — interference graph; spilling), evaluation order.
- **Sethi-Ullman** numbering gives the minimum registers for an expression tree.
- **get reg**, register & address descriptors. Next-use information.
- **Instruction scheduling**: reorder to avoid pipeline stalls (list scheduling); respects data dependences.

15. Deeper Dive — Constructions & Parsing Traces

15.1 NFA $\rightarrow$ DFA (Subset Construction)

NFA for strings over $\{0, 1\}$ ending in "01": $q_0 \xrightarrow{0,1} q_0$, $q_0 \xrightarrow{0} q_1$, $q_1 \xrightarrow{1} q_2$ (final).

DFA state	on 0	on 1	Final?
$\rightarrow \{q_0\}$	$\{q_0, q_1\}$	$\{q_0\}$	
$\{q_0, q_1\}$	$\{q_0, q_1\}$	$\{q_0, q_2\}$	
$\{q_0, q_2\}$	$\{q_0, q_1\}$	$\{q_0\}$	✓

Only 3 of the $2^3 = 8$ subsets are reachable — this is the same DFA drawn in §3.1.

15.2 DFA Minimisation (partition refinement)

State	on 0	on 1	Final?
$\rightarrow A$	B	C	
B	A	D	
C	E	F	✓
D	E	F	✓
E	E	F	✓
F	F	F	

$P0 = \{ C D E \} \{ A B F \}$ (final / non-final)
 $P1$: in $\{A B F\}$, F goes to non-final on 1 while A, B go to final $\rightarrow$ split
 $= \{ C D E \} \{ A B \} \{ F \}$
 $P2$: $\{A B\}$: both go to $\{A B\}$ on 0 and $\{C D E\}$ on 1 $\rightarrow$ no split
 $\{C D E\}$: all go to $\{C D E\}$ on 0 and $\{F\}$ on 1 $\rightarrow$ no split $\rightarrow$ stable
 Minimal DFA: 3 states $[AB] \xrightarrow{-1} [CDE] \xrightarrow{-1} [F]$ (dead), 0-loops on each
 Language: strings over $\{0,1\}$ containing exactly one 1

15.3 CFG $\rightarrow$ CNF

$S \rightarrow aSb \mid ab$


1. Replace terminals in long bodies: $A \rightarrow a, B \rightarrow b$
 $S \rightarrow A S B \mid A B$
2. Break bodies longer than 2: $S \rightarrow A X, X \rightarrow S B$
 CNF: $S \rightarrow AX \mid AB, X \rightarrow SB, A \rightarrow a, B \rightarrow b$

15.4 Pumping-Lemma Proof Template ($L = \{ a^n b^n \mid n \geq 0 \}$ is not regular)

1. Assume L is regular with pumping length p.
2. Choose $w = a^p b^p \in L, |w| \geq p$.
3. Any split $w = xyz$ with $|xy| \leq p, |y| \geq 1$ forces $y = a^k (k \geq 1)$.
4. Pump $i = 2$: $xy^2z = a^{p+k} b^p \notin L$ — contradiction. Hence L is not regular.

15.5 LR(0) Automaton and Parse — Worked

Grammar: (0) $S' \rightarrow S$ (1) $S \rightarrow AA$ (2) $A \rightarrow aA$ (3) $A \rightarrow b$

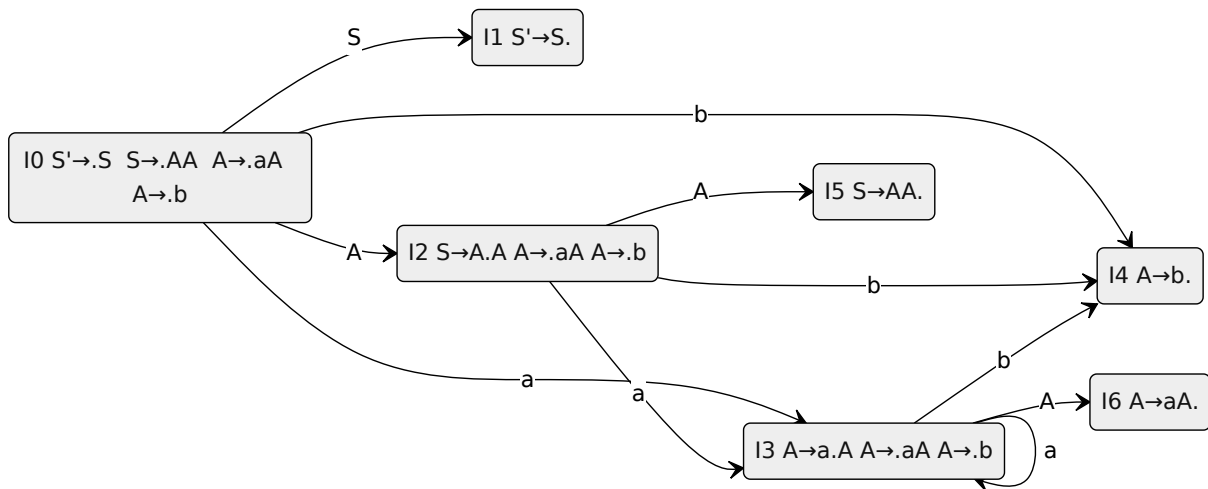

State	a	b	\$	A	S
0	s3	s4		2	1
1			acc		
2	s3	s4		5	
3	s3	s4		6	
4	r3	r3	r3		
5	r1	r1	r1		
6	r2	r2	r2		

No state contains both a shift and a complete item $\rightarrow$ the grammar is **LR(0)** (hence also SLR, LALR, CLR).

Parse of **abb\$**:

Stack	Input	Action
0	abb\$	shift 3
0 a 3	bb\$	shift 4
0 a 3 b 4	b\$	reduce $A \rightarrow b$, goto(3, A) = 6
0 a 3 A 6	b\$	reduce $A \rightarrow aA$, goto(0, A) = 2
0 A 2	b\$	shift 4
0 A 2 b 4	\$	reduce $A \rightarrow b$, goto(2, A) = 5
0 A 2 A 5	\$	reduce $S \rightarrow AA$, goto(0, S) = 1
0 S 1	\$	accept

A grammar that is LALR(1) but not SLR(1): $S \rightarrow L = R \mid R$, $L \rightarrow *R \mid \text{id}$, $R \rightarrow L$. In the state containing $S \rightarrow L \cdot = R$ and $R \rightarrow L \cdot$, $'=' \in \text{FOLLOW}(R)$, so SLR has a shift/reduce conflict on '='; LR(1) lookaheads resolve it.

15.6 Basic Blocks — Worked

<pre> 1 i = 1 2 j = 1 3 t1 = 10 * i 4 t2 = t1 + j 5 t3 = 8 * t2 6 t4 = t3 - 88 7 a[t4] = 0.0 8 j = j + 1 9 if j <= 10 goto 3 10 i = i + 1 11 if i <= 10 goto 2 12 i = 1 13 t5 = i - 1 14 t6 = 88 * t5 15 a[t6] = 1.0 16 i = i + 1 17 if i <= 10 goto 13 </pre>	Leaders: 1 (first), 2 & 3 & 13 (jump targets), 10 & 12 (follow a conditional jump) Blocks: B1 = {1} B2 = {2} B3 = {3–9} B4 = {10–11} B5 = {12} B6 = {13–17} Loops: B3 (inner, back edge B3→B3), B2–B4 (outer), B6 (self loop)
---	---

15.7 DAG-Based Local Optimisation

Block	DAG nodes built	Optimised block
a = b + c	n1 = + (b0, c0) label a	a = b + c
b = a - d	n2 = - (n1, d0) label b	b = a - d
c = b + c	n3 = + (n2, c0) label c	c = b + c
d = a - d	- (n1, d0) exists = n2 → label d too	d = b

- $d = a - d$ recomputes node n2 (same operator, same operands, nothing changed in between) → replaced by the copy $d = b$.
- $c = b + c$ is **not** a repeat of $a = b + c$, because b was reassigned in between (its operand is n2, not b0).

Previous Year Questions (PYQ pattern)

Finite automata & regular languages

1. Minimum states in DFA accepting strings over $\{0,1\}$ where the number of 0s is divisible by 3 and number of 1s divisible by 2: **6**
2. Minimum DFA states for binary strings whose 3rd symbol from the right is 1: **8**
3. Minimum DFA states for strings over $\{a,b\}$ of length exactly 3: **5**
4. An NFA with n states can be converted to a DFA with at most: **2^n states**
5. Which is NOT regular? (a) ab (b) $a^n b^n$ (c) $(ab)^*$ (d) $a^{(2n)}$ — **(b)**
6. $(a + b)^*$ is equivalent to: **$(ab)^*$**
7. Regular languages are NOT closed under: (a) union (b) complement (c) infinite union (d) intersection — **(c)** (infinite union can give any language)
8. Moore vs Mealy: in Moore the output depends on: **present state only**
9. Arden's theorem solution of $R = Q + RP$: **$R = QP^*$**
10. Pumping lemma for regular languages is used to prove a language is: **not regular**

CFLs & PDAs

11. Which language is context-free but not regular? **$a^n b^n$**
12. Which is not context-free? **$a^n b^n c^n$**
13. CFLs are NOT closed under: **intersection and complement**
14. DCFLs are closed under: **complement** (not union/intersection)
15. In CNF, a string of length n is derived in: **$2n - 1$ steps**
16. Which is undecidable for CFGs? **ambiguity / equivalence / $L = \Sigma^*$**
17. Membership of a string in a CFL can be decided by: **CYK algorithm ($O(n^3)$)**
18. ww^R is accepted by: **NPDA, not DPDA**
19. $CFL \cap regular$ is: **context-free**
20. Grammar $S \rightarrow aSb \mid ab$ generates: **$a^n b^n, n \geq 1$**

TMs & decidability

21. A language accepted by an LBA is: **context-sensitive**
22. Halting problem is: **recursively enumerable but not recursive**
23. Complement of an RE but non-recursive language is: **not RE**
24. If L and its complement are both RE then L is: **recursive**
25. Rice's theorem applies to: **non-trivial properties of the languages of TMs**
26. PCP is: **undecidable**
27. Which is equivalent in power to a TM? **PDA with two stacks**
28. Which is decidable? (a) whether a TM halts on all inputs (b) whether a CFG is ambiguous (c) whether a DFA accepts an infinite language (d) PCP — **(c)**
29. Recursive languages are closed under: **complement** (RE are not)
30. Type-1 grammars are: **context-sensitive**

Compilers

31. Number of tokens in `int a = b + 10; int, a, =, b, +, 10, ; = 7`
32. Lexical analysis is based on: **regular expressions / finite automata**
33. YACC generates: **LALR(1) parsers**
34. Which parser is most powerful? **Canonical LR(1)**
35. Number of states: SLR vs LALR for the same grammar: **equal**
36. Left-recursive grammar cannot be parsed by: **top-down (LL / recursive descent) parsers**
37. Merging CLR(1) states to LALR(1) may introduce: **reduce-reduce conflicts**
38. FOLLOW of the start symbol always contains: **$\$$**
39. A bottom-up parser produces: **reverse of the rightmost derivation**
40. S-attributed definitions use only: **synthesized attributes**
41. Inherited attributes from parent and left siblings: **L-attributed**
42. Access link in an activation record points to: **the AR of the lexically enclosing procedure**
43. Representation where results are referenced by position: **triples**

44. Replacing $x * 2$ by $x + x$ (or $x \ll 1$): **strength reduction**
45. Moving a loop-invariant computation outside the loop: **code motion**
46. Live variable analysis is a: **backward data-flow problem**
47. Peephole optimisation is applied to: **target (or intermediate) code over a small window**
48. Register allocation is commonly modelled as: **graph colouring**
49. A DAG for a basic block helps to detect: **common subexpressions**
50. Number of basic blocks in a flow graph — first find **leaders**: first statement, jump targets, statements after jumps

More practice questions

51. Subset construction for the "ends in 01" NFA yields how many reachable DFA states? **3**
52. Minimal DFA for "exactly one 1" over $\{0, 1\}$ (with dead state): **3 states**
53. CNF of $S \rightarrow aSb \mid ab$ needs how many non-terminals? **4** (S, X, A, B)
54. In the pumping-lemma proof for a^nb^n , pumping y changes: **only the number of a's**
55. Number of $LR(0)$ item sets for $S \rightarrow AA, A \rightarrow aA \mid b$: **7**
56. The grammar $S \rightarrow L = R \mid R, L \rightarrow *R \mid id, R \rightarrow L$ is: **LALR(1) but not SLR(1)**
57. Number of basic blocks in the code of §15.6: **6**
58. In $a = b + c; b = a - d; c = b + c; d = a - d$, the redundant computation is: **$d = a - d$** (equals b)
59. A shift/reduce conflict in SLR arises when a terminal in $FOLLOW(A)$ also: **labels a shift from the same state**
60. The handle in a right-sentential form is reduced by: **a bottom-up (shift-reduce) parser**

Quick Revision Box

- Regular closed under everything basic · CFL **×** $\cap$, **×** complement · DCFL **✓** complement · RE **×** complement
- CNF $2n-1$ steps · GNF n steps · CYK $O(n^3)$
- Halting: RE not recursive · $L \ \& \ \bar{L} \text{ RE} \Rightarrow$ recursive · Rice: non-trivial language properties undecidable
- $LR(0) \subset SLR \subset LALR \subset CLR$ · $SLR = LALR$ states · LALR merge $\rightarrow R/R$ only
- S-attributed $\subset$ L-attributed · Live variables backward · Reaching definitions forward

Data Communication & Computer Networks

In this unit

1. Network Models	172	9. Transport Layer	178
2. Signals & Data Rates	173	10. Application Layer	180
3. Digital & Analog Transmission	173	11. Network Security	180
4. Multiplexing & Media	174	12. Mobile & Wireless	181
5. Switching	175	13. Cloud Computing & IoT	182
6. Data Link Layer	175	14. Deeper Dive — VLSM, Routing Tables, TCP	
7. Medium Access Control	176	Numbers, Hamming & Ciphers	183
8. Network Layer	177	Previous Year Questions (PYQ pattern)	185


Expected questions: 10–12 · Target: 10+ · Type: subnetting, sliding window, Shannon/Nyquist numericals + Forouzan concepts

Syllabus checklist

- ☐ Data communication: components, data flow, topologies, protocols & standards, OSI & TCP/IP
- ☐ Analog & digital signals: bandwidth, impairments, Nyquist & Shannon limits, performance
- ☐ Digital transmission: line coding, block coding, scrambling, PCM, delta modulation
- ☐ Analog transmission: ASK, FSK, PSK, QAM
- ☐ Multiplexing (FDM, WDM, TDM), spread spectrum, transmission media
- ☐ Switching: circuit, message, packet (datagram, virtual circuit)
- ☐ Data link layer: framing, error detection & correction, flow control, Stop-and-Wait, Go-Back-N, Selective Repeat, HDLC, PPP
- ☐ MAC: ALOHA, CSMA, CSMA/CD, CSMA/CA, polling, token passing, FDMA/TDMA/CDMA; Ethernet
- ☐ Network layer: IPv4, subnetting, CIDR, NAT, IPv6, routing (DV, LS, path vector), RIP, OSPF, BGP, ARP, ICMP, DHCP
- ☐ Transport layer: UDP, TCP, SCTP, congestion control, QoS
- ☐ Application layer: DNS, HTTP, FTP, SMTP, TELNET, SNMP
- ☐ Network security: cryptography, RSA, Diffie-Hellman, digital signatures, VPN, firewalls
- ☐ Mobile technology: GSM, CDMA, GPRS, Mobile IP, MANETs, satellites, wireless LANs
- ☐ Cloud computing & IoT

1. Network Models

1.1 OSI vs TCP/IP

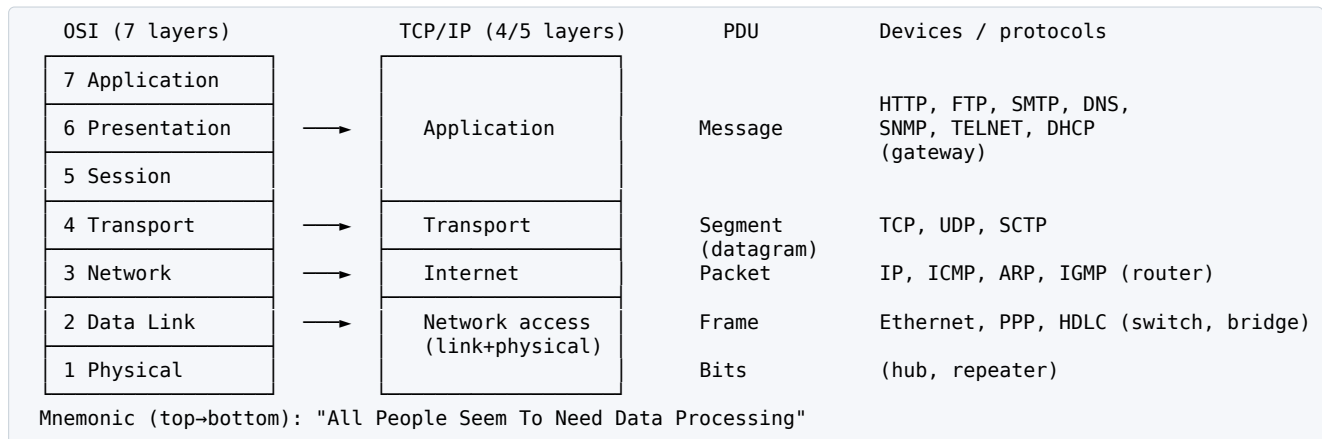

Layer	Key responsibilities	Address
Physical	Bit transmission, encoding, topology, data rate	—
Data link	Framing , physical addressing, flow & error control (hop-to-hop), MAC	MAC (48-bit)
Network	Logical addressing, routing (host-to-host / source-to-destination)	IP
Transport	Process-to-process (end-to-end) delivery, segmentation, flow, error, congestion control	Port (16-bit)
Session	Dialog control, synchronisation (checkpoints)	—
Presentation	Translation, encryption, compression	—
Application	User services	Specific (URL, email)

1.2 Topologies

Topology	Cables / links (n devices)	Notes
Mesh	$n(n-1)/2$ links; each device $n-1$ I/O ports	Robust, expensive
Star	n links	Central hub; hub failure kills network
Bus	1 backbone + drop lines	Cheap; backbone fault fails all
Ring	n links	Token passing; one break can disable
Tree / Hybrid	—	

Data flow: **simplex** (keyboard), **half-duplex** (walkie-talkie), **full-duplex** (telephone).

2. Signals & Data Rates


Nyquist (noiseless): $\text{Max bit rate} = 2 \cdot B \cdot \log_2 L$ (L signal levels)
 Shannon (noisy): $\text{Capacity } C = B \cdot \log_2(1 + \text{SNR})$
 $\text{SNR}_{\text{dB}} = 10 \log_{10}(\text{SNR}) \rightarrow 30 \text{ dB} = 1000, 20 \text{ dB} = 100, 10 \text{ dB} = 10$
 Bandwidth-delay product = bandwidth $\times$ propagation delay (bits "in the pipe")
 Propagation delay = distance / propagation speed ; Transmission delay = frame size / bandwidth
 Throughput, latency = propagation + transmission + queuing + processing
 Baud rate (signal rate) $S = N / r$ where r = bits per signal element

Worked: telephone line $B = 3000 \text{ Hz}$, $\text{SNR} = 3162$ ($\approx 35 \text{ dB}$): $C = 3000 \times \log_2(3163) \approx 3000 \times 11.62 = \mathbf{34.86 \text{ kbps}}$.
 Nyquist: $B = 3000 \text{ Hz}$, 4 levels $\rightarrow 2 \times 3000 \times 2 = \mathbf{12 \text{ kbps}}$.

Impairments: **attenuation** (loss of energy, $\text{dB} = 10 \log(P_2/P_1)$), **distortion** (different delays of components), **noise** (thermal, induced, crosstalk, impulse).

3. Digital & Analog Transmission

3.1 Line Coding

Bits: 1 0 1 1 0
 NRZ-L
 (1 = high)
 

Bits: 1 0 1 1 0
 Manchester
 (IEEE)
 


0 = high-low, 1 = low-high: every bit has a MID-BIT transition $\rightarrow$ receiver recovers the clock

NRZ-I: invert the level at the start of every 1, no change for 0
 Differential Manchester: transition at START of bit for 0, none for 1; mid-bit transition always
 AMI (bipolar): 0 $\rightarrow$ zero voltage; successive 1s alternate +V and -V (no DC component)

Scheme	Category	Notes
NRZ-L, NRZ-I	Polar	No self-sync; baseline wandering
RZ	Polar	3 levels; 2 transitions per bit
Manchester, Differential Manchester	Biphase	Self-synchronising; bandwidth = $2 \times$ NRZ; Ethernet (10 Mbps) / Token ring
AMI, Pseudoternary	Bipolar	No DC component
2B1Q, 8B6T, 4D-PAM5	Multilevel	
MLT-3	Multitransition	100Base-TX

- **Block coding:** 4B/5B (Fast Ethernet), 8B/10B (Gigabit) — for synchronisation & error detection.
- **Scrambling:** B8ZS (North America), HDB3 (Europe) — replace long zeros in AMI.
- **PCM:** Sampling $\rightarrow$ Quantisation $\rightarrow$ Encoding. **Nyquist sampling theorem:** $f_s \geq 2 \cdot f_{\text{max}}$. Bit rate = $f_s \times n$ bits.
Voice: $8000 \text{ samples/s} \times 8 \text{ bits} = \mathbf{64 \text{ kbps}}$.
- **Delta modulation:** 1 bit per sample (up/down).
- Transmission modes: **parallel**; **serial** — asynchronous (start/stop bits, gaps), synchronous, isochronous.

3.2 Digital-to-Analog

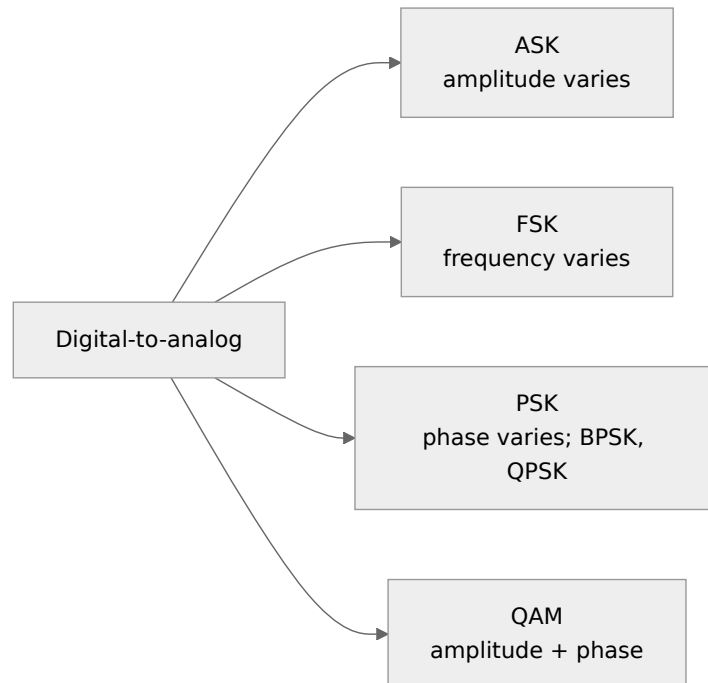

- QPSK: 2 bits per symbol; 16-QAM: 4 bits per symbol; 64-QAM: 6. Bits per baud = $\log_2(\text{constellation points})$.
- Analog-to-analog: AM, FM, PM. FM bandwidth (Carson) = $2(1 + \beta)B$.

4. Multiplexing & Media

Technique	Domain	Use
FDM	Frequency (analog)	Radio, TV, cable
WDM	Wavelength (optical)	Fibre (DWDM)
Synchronous TDM	Time slots fixed	T1 (24 channels, 1.544 Mbps), E1 (32 channels, 2.048 Mbps)
Statistical TDM	Slots on demand	Needs address in slot
Spread spectrum	FHSS, DSSS	Wireless, security

- $T1 = (24 \times 8 + 1 \text{ framing bit}) \times 8000 = 1.544 \text{ Mbps}$.

Transmission media:

Guided: Twisted pair (UTP Cat5/6, RJ-45; twisting reduces crosstalk)
Coaxial (BNC; cable TV)
Optical fibre (total internal reflection; single-mode vs multimode; highest bandwidth, no EMI)

Unguided: Radio waves (3 kHz–1 GHz, omnidirectional)
Microwaves (1–300 GHz, unidirectional, line-of-sight)
Infrared (300 GHz–400 THz, short range, can't penetrate walls)

5. Switching

Circuit switching	Packet (datagram)	Virtual circuit	Message switching
Dedicated path, setup/teardown	No setup; each packet routed independently	Setup phase; packets follow same path	Store-and-forward whole message
Telephone	Internet (IP)	ATM, Frame Relay, X.25	Telegraph
In-order, constant delay	Out-of-order possible	In-order	Large buffers
Physical layer	Network layer	Data link (ATM) / network	Application

Delay for packet switching: message split into k packets over h hops: total $\approx (k + h - 1) \times$ transmission time per packet (+ propagation).

6. Data Link Layer

6.1 Framing

Character count, **byte stuffing** (ESC/FLAG), **bit stuffing** (insert 0 after five consecutive 1s — HDLC flag 01111110), physical layer coding violations. Bit-stuffing example: data 011111111110 $\rightarrow$ 011111011111010.

6.2 Error Detection & Correction

- **Parity:** detects odd number of bit errors. 2-D parity detects all 1, 2, 3-bit errors and corrects single.
- **Checksum** (1's complement sum; used in IP, TCP, UDP).
- **CRC:** append (degree r) zeros, divide by generator (mod-2), remainder = CRC. Detects all burst errors of length $\leq r$; all odd errors if generator has factor $(x + 1)$.

CRC worked: data 1101011011, generator $x^4 + x + 1 = 10011 \rightarrow$ append 4 zeros, divide $\rightarrow$ remainder **1110**; transmitted **1101011011110**.

- **Hamming distance:** detect d errors needs $d_{\min} \geq d + 1$; correct t errors needs $d_{\min} \geq 2t + 1$.
- Hamming code (7,4): r parity bits with $2^r \geq m + r + 1$.

6.3 Flow & Error Control (Sliding Window)


```

a = propagation delay / transmission time =  $T_p / T_t$ 
Stop-and-Wait efficiency  $\eta = 1 / (1 + 2a)$ 
Sliding window (size  $W$ )  $\eta = W / (1 + 2a)$  if  $W < 1 + 2a$ , else 1
For 100% utilisation  $W \geq 1 + 2a$ 
Sequence number bits  $n$ : Go-Back-N  $W_s \leq 2^n - 1, W_r = 1$ 
                          Selective Repeat  $W_s = W_r \leq 2^{n-1}$ 
Throughput =  $\eta \times$  bandwidth

```

Protocol	Sender window	Receiver window	Retransmits	ACK
Stop-and-Wait ARQ	1	1	The one frame	Individual; seq numbers 0/1
Go-Back-N	$2^n - 1$	1	Lost frame and all after it	Cumulative
Selective Repeat	2^{n-1}	2^{n-1}	Only lost frame	Individual / NAK


Worked: 1 Mbps link, frame 1000 bits, $T_p = 20$ ms. $T_t = 1$ ms, $a = 20$. Stop-and-Wait $\eta = 1/41 \approx 2.4\%$. Window for 100% = $1 + 40 = 41 \rightarrow$ sequence bits = $\lceil \log_2 41 \rceil = 6$ (GBN; $2^6 - 1 = 63 \geq 41$).

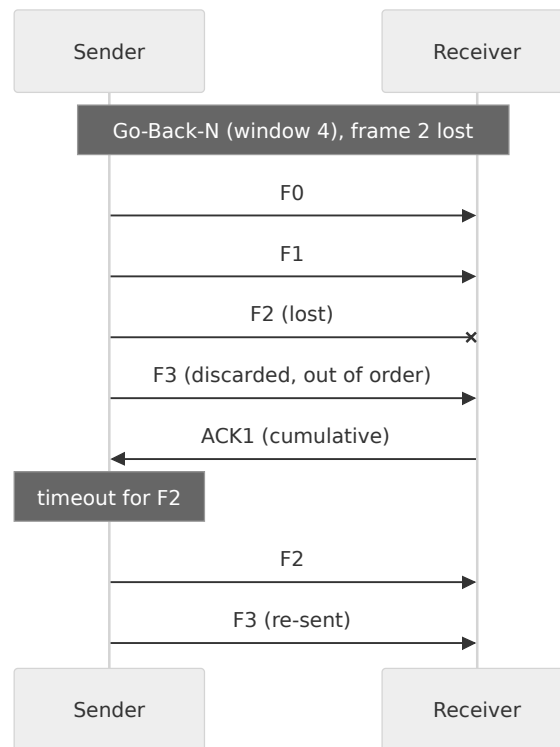

6.4 HDLC & PPP

- **HDLC**: bit-oriented; frames I (information), S (supervisory), U (unnumbered); modes NRM, ABM, ARM; flag 01111110.
- **PPP**: byte-oriented, point-to-point (dial-up, DSL); LCP (link control), NCP, authentication **PAP** (plain-text) and **CHAP** (challenge-handshake, more secure). No flow control/sequence numbers by default.

7. Medium Access Control

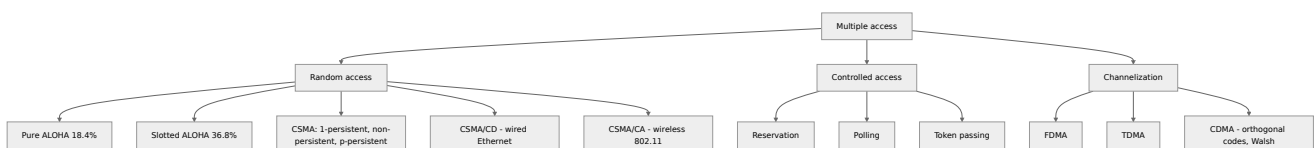

Pure ALOHA: $S = G \cdot e^{(-2G)}$, max $1/(2e) = 0.184$ at $G = 0.5$; vulnerable time = $2 \cdot T_t$
 Slotted ALOHA: $S = G \cdot e^{(-G)}$, max $1/e = 0.368$ at $G = 1$; vulnerable time = T_t
 CSMA/CD: minimum frame size: $T_t \geq 2 \cdot T_p \Rightarrow L_{\min} = 2 \cdot T_p \cdot B$
 Efficiency = $1 / (1 + 6.44a)$

Worked: 10 Mbps Ethernet, max RTT $51.2 \mu s \rightarrow L_{\min} = 10^7 \times 51.2 \times 10^{-6} = 512 \text{ bits} = 64 \text{ bytes}$.

- CSMA/CD: on collision send **jam signal**, use **binary exponential backoff** (wait random $k \times \text{slot}$, $k \in [0, 2^n - 1]$; give up after 16 attempts).
- CSMA/CA (802.11): **IFS** (DIFS, SIFS), **contention window**, **RTS/CTS** (solves **hidden terminal**), NAV, ACK.
- Token ring (802.5), token bus (802.4).

Ethernet (IEEE 802.3)

Frame: | Preamble 7 | SFD 1 | Dest 6 | Src 6 | Type/Len 2 | Data 46–1500 | CRC 4 |
Min frame = 64 B (without preamble) ; Max = 1518 B ; MAC address 48 bits (OUI 24 + 24)
Broadcast MAC: FF:FF:FF:FF:FF:FF ; multicast: LSB of first byte = 1

Standard	Speed	Media
10Base5 / 10Base2	10 Mbps	Thick / thin coax
10Base-T	10 Mbps	UTP
100Base-TX / FX	100 Mbps	UTP / fibre
1000Base-T	1 Gbps	UTP Cat5e
10GBase	10 Gbps	Fibre/Cat6a

Devices: **Repeater/hub** (L1, one collision & broadcast domain), **Bridge/switch** (L2, separates collision domains, one broadcast domain; learning, STP), **Router** (L3, separates broadcast domains), **Gateway** (all layers / protocol conversion). VLANs split broadcast domains on switches.

8. Network Layer

8.1 IPv4 Addressing

Class	First bits	First octet	Default mask	Networks	Hosts/net
A	0	0–127	/8 255.0.0.0	2^7 (126 usable)	$2^{24} - 2$
B	10	128–191	/16	2^{14}	$2^{16} - 2$
C	110	192–223	/24	2^{21}	254
D	1110	224–239	—	Multicast	—
E	1111	240–255	—	Reserved	—

- Private ranges: **10.0.0.0/8**, **172.16.0.0/12**, **192.168.0.0/16**. Loopback: 127.0.0.0/8. APIPA 169.254/16.
- **Subnetting worked:** 192.168.10.0/26

Mask 255.255.255.192 → 4 subnets of 64 addresses (62 usable hosts each)
Subnet 1: 192.168.10.0 – .63 (broadcast .63)
Subnet 2: 192.168.10.64 – .127
Subnet 3: 192.168.10.128 – .191
Subnet 4: 192.168.10.192 – .255
Host 192.168.10.100/26 → network 192.168.10.64, broadcast 192.168.10.127

- Usable hosts in /n = $2^{(32-n)} - 2$ (except /31, /32).
- **CIDR & supernetting:** 200.1.0.0/24 ... 200.1.3.0/24 aggregate to **200.1.0.0/22**. Longest prefix match in forwarding.
- **NAT:** maps private addresses to public; PAT uses ports.

8.2 IPv4 Header

Ver 4	HLEN 4	DSCP/ToS 8	Total length 16
Identification 16	Flags 3 (–, DF, MF)	Fragment offset 13 (units of 8 bytes)	
TTL 8	Protocol 8 (1 ICMP, 6 TCP, 17 UDP)	Header checksum 16	
Source IP 32	Destination IP 32	Options (0–40 B)	
Header 20–60 bytes (HLEN × 4) ; max datagram 65,535 bytes

Fragmentation worked: 4000-byte datagram (20 B header) over MTU 1500 → data per fragment = 1480 (multiple of 8): fragments carry 1480, 1480, 1020 bytes; offsets **0, 185, 370**; MF = 1, 1, 0.

8.3 IPv6

- 128-bit address (hex, colon notation; :: compresses zeros once), fixed **40-byte header**, no header checksum, **no fragmentation at routers** (source only), extension headers, flow label, built-in IPsec support, types: unicast, multicast, **anycast** (no broadcast).
- Transition: dual stack, tunnelling, header translation.

8.4 Routing

	Distance Vector	Link State	Path Vector
Algorithm	Bellman-Ford	Dijkstra	—
Knowledge	Neighbours' tables	Whole topology (LSPs flooded)	Paths (AS list)
Protocol	RIP	OSPF (also IS-IS)	BGP
Problem	Count-to-infinity (fix: split horizon, poison reverse, hold-down)	Heavy computation/flooding	Policy-based
Scope	Intra-AS (IGP)	Intra-AS (areas, backbone area 0)	Inter-AS (EGP)

- RIP: hop count metric, max **15** (16 = infinity), updates every **30 s**, runs over **UDP 520**.
- OSPF: cost metric, runs directly over **IP (protocol 89)**, hierarchical areas.
- BGP: runs over **TCP 179**; eBGP & iBGP.
- Multicast routing: DVMRP, MOSPF, PIM; **IGMP** for group membership.


8.5 Support Protocols

Protocol	Purpose
ARP	IP → MAC (broadcast request, unicast reply)
RARP / BOOTP / DHCP	Obtain IP address (DHCP: DORA — Discover, Offer, Request, Ack; UDP 67/68)
ICMP	Error reporting & query: echo (ping), destination unreachable, time exceeded (traceroute), redirect, source quench
IGMP	Multicast group membership

9. Transport Layer


Feature	TCP	UDP	SCTP
Connection	Connection-oriented	Connectionless	Connection-oriented (association)
Reliability	Reliable, ordered	Unreliable	Reliable, multi-stream
Unit	Byte stream	Message	Message (chunks)
Header	20–60 B	8 B	12 B common header
Flow/congestion control	Yes	No	Yes
Use	HTTP, FTP, SMTP	DNS, SNMP, DHCP, VoIP, TFTP	Signalling; multihoming

TCP Connection Management

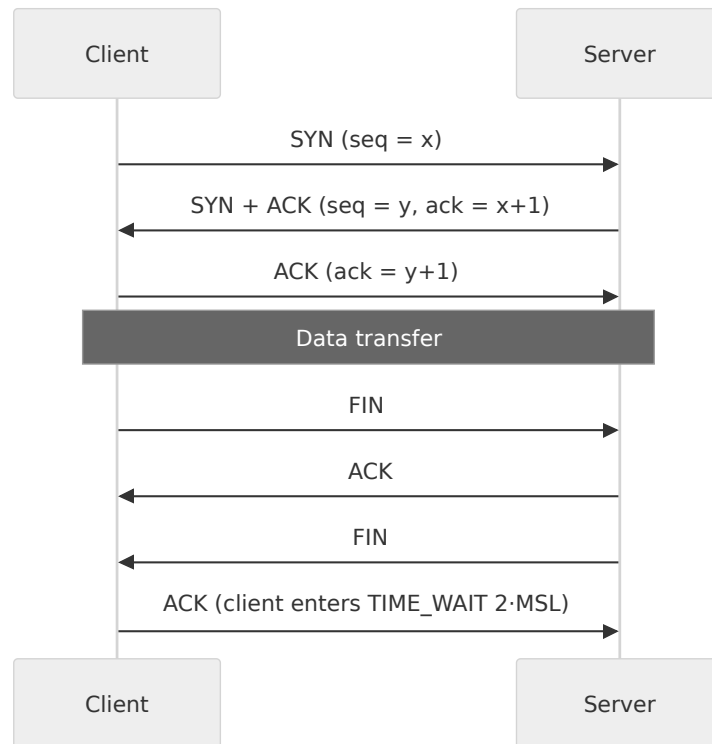

- SYN and FIN each **consume one sequence number**. Sequence numbers count bytes.
- TCP header flags: URG, ACK, PSH, RST, SYN, FIN. Window field 16 bits (window scaling option extends).
- **Wrap-around time** = $2^{32} / \text{bandwidth (bytes/s)}$.
- **Silly window syndrome**: Nagle's algorithm (sender), Clark's solution (receiver).
- Timers: retransmission (RTO via Jacobson/Karn), persistence, keep-alive, TIME-WAIT.
- RTT estimate: $\text{EstimatedRTT} = (1 - \alpha) \cdot \text{EstRTT} + \alpha \cdot \text{SampleRTT}$ ($\alpha = 1/8$).

TCP Congestion Control

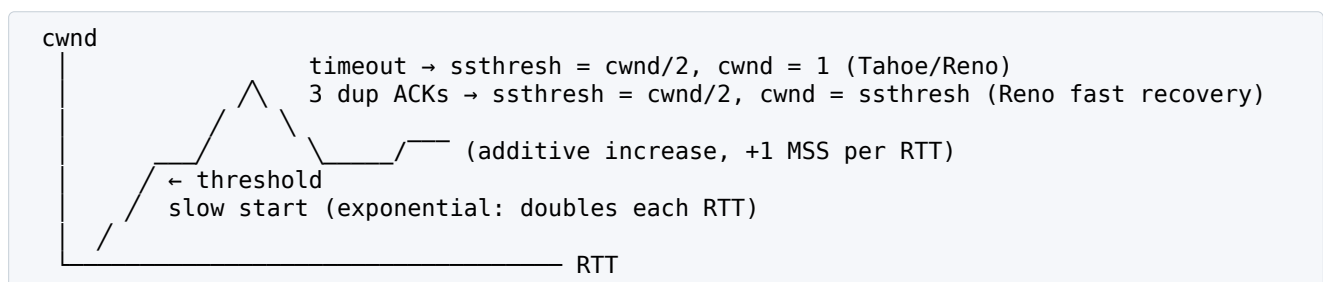

Worked: ssthresh = 16, starting cwnd = 1 MSS: 1, 2, 4, 8, 16 (slow start), then 17, 18, 19 ... (congestion avoidance). If timeout at cwnd = 20: ssthresh = 10, cwnd = 1.

- Effective window = $\min(\text{cwnd}, \text{rwnd})$.
- **QoS**: leaky bucket (constant output rate), **token bucket** (allows bursts: $\text{max burst } S = C / (M - \rho)$), IntServ (RSVP), DiffServ.

Well-known Ports

FTP 20 (data) / 21 (control) SSH 22 TELNET 23 SMTP 25 DNS 53 DHCP 67/68
TFTP 69 HTTP 80 POP3 110 NTP 123 IMAP 143 SNMP 161/162 BGP 179 HTTPS 443
Ports: well-known 0–1023, registered 1024–49151, dynamic 49152–65535

10. Application Layer


- **DNS**: hierarchical (root → TLD → authoritative); records **A** (IPv4), **AAAA** (IPv6), **MX** (mail), **CNAME** (alias), **NS**, **PTR** (reverse), **SOA**; recursive vs iterative resolution; UDP 53 (TCP for zone transfers). **DDNS** updates records dynamically.
- **HTTP**: stateless; non-persistent (HTTP/1.0; 2 RTT per object) vs persistent (HTTP/1.1, pipelining); cookies for state; methods GET, POST, PUT, DELETE, HEAD; status 1xx info, 2xx success (200 OK), 3xx redirect (301), 4xx client error (404), 5xx server error (500). HTTP/2 multiplexing, HTTP/3 over QUIC (UDP).
- **FTP**: two connections — control (21, persistent, out-of-band) & data (20, per file).
- **Email**: SMTP (push), POP3/IMAP (pull), MIME for attachments. See [Paper 1 ICT](#).
- **TELNET** (insecure remote login; NVT), **SSH** (secure).
- **SNMP**: manager-agent, **MIB**, **SMI**; GET, SET, TRAP; UDP 161/162.
- **WWW**: URL = protocol://host:port/path; web caching (proxy).
- **Bluetooth** (IEEE 802.15.1): piconet (1 primary + up to 7 active secondaries), scatternet; 2.4 GHz FHSS.

11. Network Security

11.1 Goals & Attacks

CIA: **Confidentiality**, **Integrity**, **Availability** + authentication, non-repudiation. Passive attacks (eavesdropping, traffic analysis) vs active (masquerade, replay, modification, DoS). Malware: virus, worm, Trojan, ransomware, spyware, rootkit, botnet, logic bomb, keylogger.

11.2 Cryptography

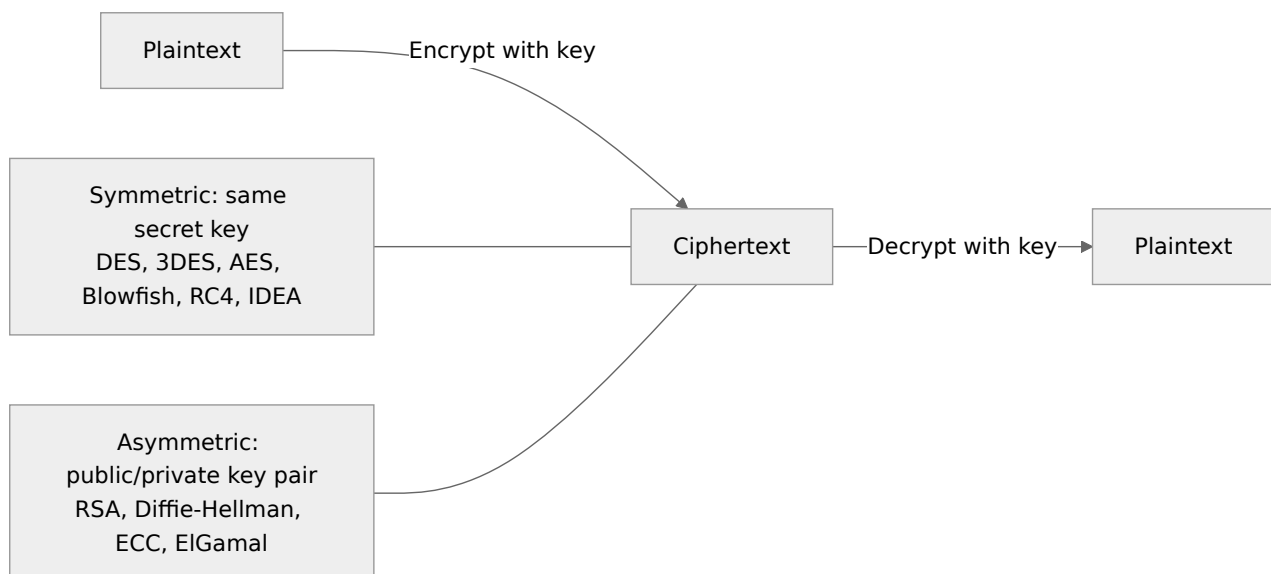

Algorithm	Type	Key facts
Caesar	Substitution (mono-alphabetic)	Shift by k ($k = 3$)
Vigenère	Poly-alphabetic	Keyword shifts
Playfair	Digraph substitution	5×5 matrix

Algorithm	Type	Key facts
Rail fence, columnar	Transposition	Rearranges letters
DES	Symmetric block (Feistel)	64-bit block, 56-bit key, 16 rounds
3DES	Symmetric	EDE, 112/168-bit key
AES (Rijndael)	Symmetric block (SPN)	128-bit block; keys 128/192/256 → 10/12/14 rounds
IDEA	Symmetric	64-bit block, 128-bit key
RC4	Stream cipher	WEP
RSA	Asymmetric	Factoring problem
Diffie–Hellman	Key exchange	Discrete log; vulnerable to man-in-the-middle
ECC	Asymmetric	Smaller keys for same security
MD5 / SHA-1 / SHA-256	Hash	128 / 160 / 256-bit digests

- Number of keys for n users: symmetric $n(n-1)/2$, asymmetric $2n$.
- **RSA worked:** $p = 3, q = 11 \rightarrow n = 33, \phi = 20$; choose $e = 3$ ($\gcd(3,20)=1$); $d = 7$ ($3 \times 7 = 21 \equiv 1 \pmod{20}$). Encrypt $M = 4$: $C = 4^3 \pmod{33} = 64 \pmod{33} = 31$. Decrypt: $31^7 \pmod{33} = 4$.
- **Diffie–Hellman worked:** $p = 23, g = 5, a = 6, b = 15 \rightarrow A = 5^6 \pmod{23} = 8, B = 5^{15} \pmod{23} = 19$; shared key = $19^6 \pmod{23} = 8^{15} \pmod{23} = 2$.

11.3 Digital Signature & PKI

Sign: `signature = Encrypt(hash(M), sender's PRIVATE key)`
 Verify: `Decrypt(signature, sender's PUBLIC key) == hash(M)`
 Confidentiality: encrypt with receiver's PUBLIC key; decrypt with receiver's PRIVATE key

Provides authentication, integrity, **non-repudiation**. Certificates (X.509) issued by **CA**; MAC/HMAC for message integrity with shared key.

- **Steganography:** hiding the existence of a message (e.g. in image LSBs), vs cryptography (hides meaning).

11.4 Security Protocols & Devices


- **IPsec** (network layer): AH (authentication), ESP (encryption); transport vs tunnel mode; IKE.
- **SSL/TLS** (transport layer): handshake, record protocol; HTTPS. **PGP** & S/MIME (email).
- **VPN:** secure tunnel over public network (IPsec, SSL VPN, PPTP, L2TP).
- **Firewalls:** packet filter (network/transport headers — stateless), stateful inspection, **proxy / application-level gateway**, circuit-level gateway. DMZ. **IDS/IPS** (signature vs anomaly).
- Kerberos (tickets, KDC: AS + TGS).

12. Mobile & Wireless

12.1 Cellular Concepts

- Frequency reuse; cluster size $N = i^2 + ij + j^2$ (1, 3, 4, 7, 12...); co-channel reuse distance $D = R\sqrt{3N}$.
- Handoff (hard — GSM, soft — CDMA). Generations: 1G (analog AMPS), 2G (GSM/CDMA digital voice, SMS), 2.5G (**GPRS**), 2.75G (EDGE), 3G (UMTS/WCDMA, CDMA2000), 4G (LTE, all-IP, OFDMA), 5G (mmWave, massive MIMO, URLLC, eMBB, mMTC).

12.2 GSM Architecture

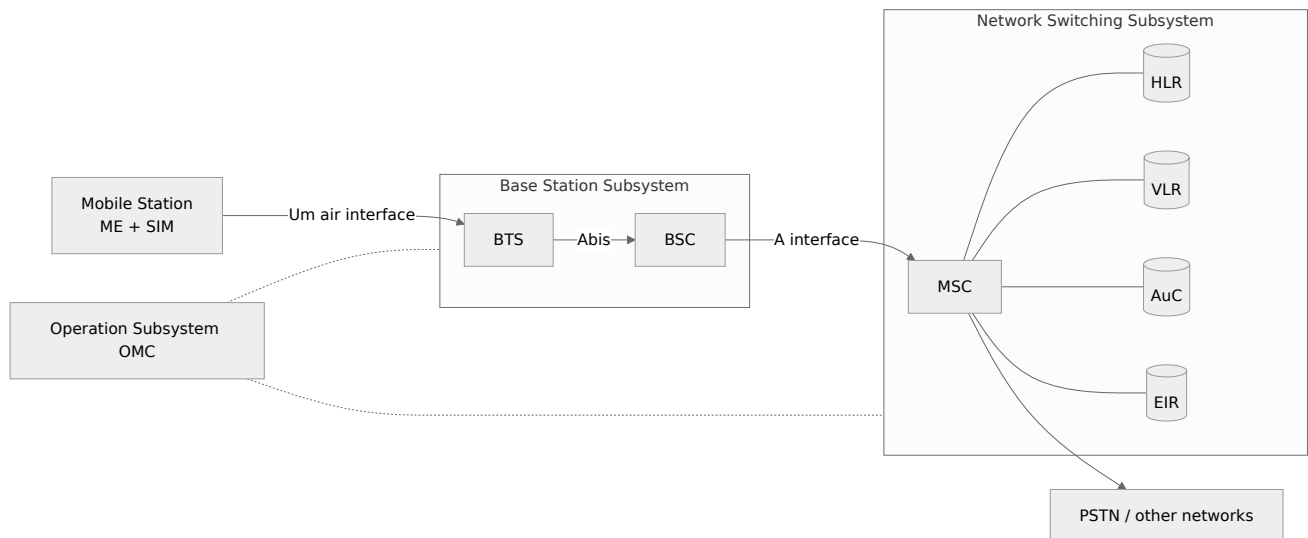

- **GSM**: TDMA + FDMA; 900/1800 MHz; 200 kHz carriers, 8 time slots; **HLR** (permanent subscriber data), **VLR** (temporary for visitors), **AuC** (authentication keys), **EIR** (IMEI database). IMSI in SIM.
- **GPRS**: packet-switched over GSM; SGSN & GGSN nodes. **SMS**: 160 characters, via SMSC, uses signalling channels.
- **CDMA (IS-95)**: spread spectrum, unique codes, soft handoff, RAKE receiver.

12.3 Mobile IP & Others

- **Mobile IP**: home agent, foreign agent, **care-of address (CoA)**, registration, **tunnelling**, triangle routing problem (route optimisation).
- Mobile computing middleware & gateways (WAP; WAP gateway translates between WAP & HTTP).
- **MANET**: infrastructure-less, self-configuring; routing — proactive (**DSDV**, **OLSR**), reactive (**AODV**, **DSR**), hybrid (**ZRP**).
- **Wireless LAN (IEEE 802.11)**: infrastructure (BSS, ESS via APs) vs ad hoc (IBSS); 802.11a/b/g/n/ac/ax (Wi-Fi 6). Security WEP → WPA → WPA2 (AES-CCMP) → WPA3.
- **Satellites**: GEO (35,786 km; ~270 ms one-way delay; 3 satellites cover earth), MEO (GPS ~20,200 km), LEO (500–2000 km; Starlink, Iridium). Uplink frequency > downlink.
- **Wireless geolocation**: GPS (trilateration, ≥ 4 satellites for 3-D fix), cell-ID, AoA, ToA, TDoA, RSSI. India: **NavIC** (IRNSS, 7 satellites).

13. Cloud Computing & IoT

SaaS	(Gmail, Salesforce, Office 365)	– user uses app
PaaS	(Google App Engine, Heroku, Azure App Service)	– dev
IaaS	(AWS EC2, Google Compute Engine, Azure VMs)	– admin

Customer manages more as you go down ; provider manages more as you go up

- **NIST essential characteristics (5)**: on-demand self-service, broad network access, resource pooling, rapid elasticity, measured service.
- Deployment: **public, private, community, hybrid**.
- **Virtualisation**: hypervisors (see [OS unit](#)); virtual servers; live migration.
- Cloud storage (object: S3; block: EBS; file), database-as-a-service; multi-tenancy; resource management (load balancing, auto-scaling).

- **SLA** (Service Level Agreement): availability (e.g. 99.9% → ~8.76 h downtime/year), response time, penalties.
- **IoT**: things with sensors + connectivity. Architecture (3-layer): **Perception (sensing)** → **Network** → **Application** (5-layer adds processing/middleware & business). Protocols: **MQTT** (publish–subscribe over TCP), **CoAP** (REST over UDP), 6LoWPAN, Zigbee (802.15.4), BLE, LoRaWAN, NB-IoT, RFID/NFC. Edge/fog computing reduces latency.


14. Deeper Dive — VLSM, Routing Tables, TCP Numbers, Hamming & Ciphers

14.1 VLSM — Worked

Split **192.168.1.0/24** for LANs needing 100, 50, 25 and 10 hosts (allocate largest first):

LAN	Hosts needed	Prefix (usable)	Subnet	Range	Broadcast
A	100	/25 (126)	192.168.1.0	.1 – .126	.127
B	50	/26 (62)	192.168.1.128	.129 – .190	.191
C	25	/27 (30)	192.168.1.192	.193 – .222	.223
D	10	/28 (14)	192.168.1.224	.225 – .238	.239
Free	—	/28	192.168.1.240	—	—

14.2 Distance-Vector Update — Worked




A's table	Initially	After receiving B's vector (B: A 1, B 0, C 2)
to A	0	0
to B	1 (direct)	1 (direct)
to C	5 (direct)	$\min(5, 1 + 2) = 3$ via B

Bellman–Ford equation: $D_x(y) = \min_v \{ c(x, v) + D_v(y) \}$.

Count-to-infinity: suppose link B–C fails. B may then believe A's stale advertisement "C at cost 3" (which was itself via B) and set $C = 1 + 3 = 4$ via A; A then updates to $1 + 4 = 5$ via B, and the two keep raising each other's cost one step at a time. Here the climb stops once it exceeds A's direct link (cost 5), but with no alternative path it would continue until "infinity" (16 in RIP). **Split horizon** (never advertise a route back to the neighbour it was learned from) and **poison reverse** (advertise it as ∞) cure this two-node loop.

14.3 TCP Sequence and Acknowledgement Numbers

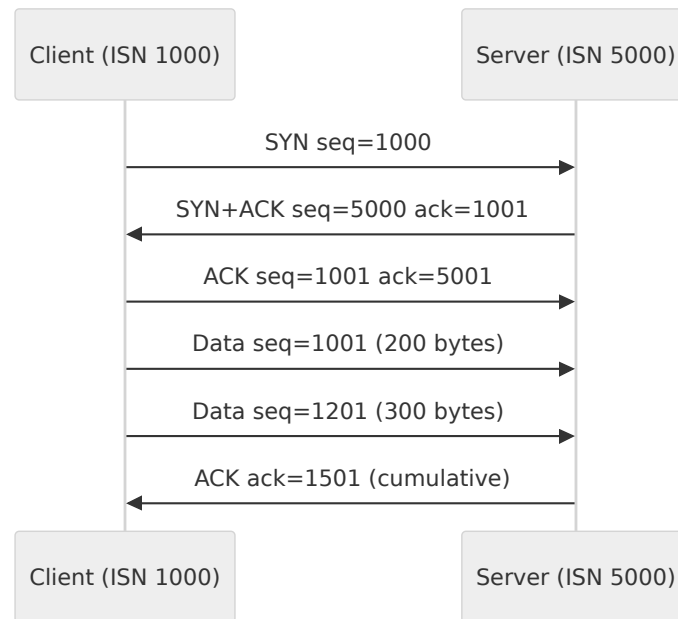

Next expected byte = last seq + length; SYN and FIN consume one number each.

Go-Back-N count: window 4, frames 0–6, frame 2 lost once (no other losses). Assume frames 0–4 have been sent when frame 2's timer expires (ACKs for 0 and 1 slid the window to 2–5). Sent 0, 1, 2 (lost), 3, 4 → on timeout resend 2, 3, 4, then send 5, 6. Total transmissions = 5 + 3 + 2 = **10**. Selective Repeat resends only frame 2: 7 + 1 = **8**.

14.4 Hamming (7, 4) — Encode and Correct

Data 1011 → positions: 1 p1, 2 p2, 3 d1, 4 p4, 5 d2, 6 d3, 7 d4 (even parity).

```

d1 d2 d3 d4 = 1 0 1 1
p1 covers 1,3,5,7 → d1 d2 d4 = 1 0 1 → p1 = 0
p2 covers 2,3,6,7 → d1 d3 d4 = 1 1 1 → p2 = 1
p4 covers 4,5,6,7 → d2 d3 d4 = 0 1 1 → p4 = 0
Codeword (positions 1..7) = 0 1 1 0 0 1 1

Received 0 1 1 0 0 0 1 (bit 6 flipped):
c1 = b1 b3 b5 b7 = 0 1 0 1 → 0
c2 = b2 b3 b6 b7 = 1 1 0 1 → 1
c4 = b4 b5 b6 b7 = 0 0 0 1 → 1
Syndrome c4 c2 c1 = 1102 = 6 → flip bit 6 → corrected
  
```

14.5 Delay Calculations


- Store-and-forward: a 1000-byte packet over 3 links of 1 Mbps (propagation ignored) → $3 \times 8 \text{ ms} = \mathbf{24 \text{ ms}}$.
- Message of 3 packets over the same path (pipelining): $(3 + 3 - 1) \times 8 = \mathbf{40 \text{ ms}}$.
- Circuit switching instead: setup time + message/bandwidth + propagation.

14.6 IPv6 Address Compression

Full	Compressed
2001:0db8:0000:0000:0000:ff00:0042:8329	2001:db8::ff00:42:8329
fe80:0000:0000:0000:0202:b3ff:fe1e:8329	fe80::202:b3ff:fe1e:8329
0000:0000:0000:0000:0000:0000:0000:0001	::1 (loopback)

Rules: drop leading zeros in each group; replace **one** longest run of all-zero groups with ::.

14.7 DNS Resolution

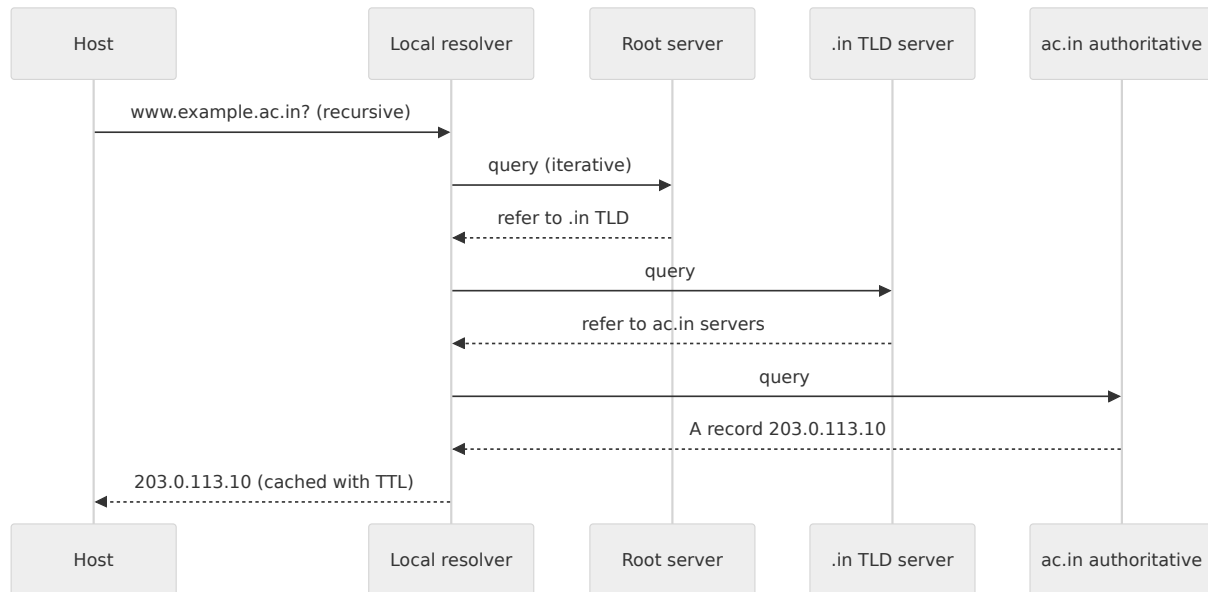

14.8 Classical Ciphers — Worked

- **Caesar** ($k = 3$): NET $\rightarrow$ QHW.
- **Vigenère**, key LEMON: ATTACK $\rightarrow$ A+L = L, T+E = X, T+M = F, A+O = O, C+N = P, K+L = V $\rightarrow$ **LXFOPV**.
- **Rail fence (2 rails)**: HELLOWORLD $\rightarrow$ rails HLOOL / ELWRD $\rightarrow$ **HLOOLELWRD**.
- **Columnar transposition** rearranges letters by a key order; **substitution** replaces letters. Product ciphers (DES, AES) combine both (confusion + diffusion — Shannon).

14.9 HTTP Exchange (what a request looks like)

```

GET /index.html HTTP/1.1
Host: www.ugcnet.example
User-Agent: Mozilla/5.0
Accept: text/html
Connection: keep-alive

HTTP/1.1 200 OK
Content-Type: text/html
Content-Length: 3421
Set-Cookie: sid=abc123

<html> ... </html>
  
```

Previous Year Questions (PYQ pattern)

Models & topologies

1. Which OSI layer handles encryption & compression? **Presentation**
2. Process-to-process delivery is the job of: **Transport layer**
3. Dialog control & synchronisation: **Session layer**
4. Number of links in a fully connected mesh of 10 nodes: **45**
5. Router operates at: **Network layer**; switch at: **Data link layer**
6. Number of collision domains with a 24-port switch: **24**; broadcast domains: **1**

Physical layer

7. Channel $B = 4$ kHz, $SNR = 63$: $C = 4000 \times \log_2 64 =$ **24 kbps**
8. Noiseless 3 kHz channel with 8 levels: $2 \times 3000 \times 3 =$ **18 kbps**
9. Manchester encoding needs bandwidth: **twice that of NRZ** (it is self-clocking)
10. Sampling a 4 kHz voice signal per Nyquist: **8000 samples/s**
11. 16-QAM carries how many bits per symbol? **4**

12. T1 line data rate: **1.544 Mbps**
13. Medium immune to electromagnetic interference: **optical fibre**

Data link

14. Bit stuffing after five consecutive 1s inserts: **a 0**
15. CRC with generator of degree 4 appends how many bits? **4**
16. Min Hamming distance to correct 2-bit errors: **5**
17. Go-Back-N with 3-bit sequence numbers: max sender window **7**; Selective Repeat: **4**
18. Stop-and-wait, $T_t = 1$ ms, $T_p = 2$ ms: $\eta = 1/(1 + 4) =$ **20%**
19. Window size for full utilisation with $a = 10$: **21**
20. Which protocol uses cumulative ACKs and discards out-of-order frames? **Go-Back-N**
21. PPP authentication protocol using a challenge: **CHAP**

MAC

22. Max throughput of slotted ALOHA: **36.8%**; pure ALOHA: **18.4%**
23. CSMA/CD: 1 Gbps, 2 km cable, signal speed 2×10^8 m/s $\rightarrow T_p = 10 \mu\text{s} \rightarrow L_{\min} = 2 \times 10 \mu\text{s} \times 10^9 =$ **20,000 bits**
24. Hidden terminal problem is solved by: **RTS/CTS (CSMA/CA)**
25. Minimum Ethernet frame size: **64 bytes**
26. Binary exponential backoff is used in: **CSMA/CD Ethernet**

Network layer

27. Class of 191.10.20.1: **Class B**
28. Usable hosts in a /27 subnet: **30**
29. Network address of 172.16.45.14/20: $45 = 0010\ 1101 \rightarrow /20$ keeps 0010 $\rightarrow$ **172.16.32.0**
30. Broadcast address of 10.1.1.130/25: **10.1.1.255**
31. Subnet mask for 500 hosts per subnet: **/23 (255.255.254.0)**
32. IPv4 header field preventing infinite looping: **TTL**
33. Fragment offset is measured in units of: **8 bytes**
34. IPv6 address size: **128 bits**; header: **40 bytes**
35. RIP uses: **distance vector, hop count (max 15)**
36. OSPF uses: **link state (Dijkstra)**
37. BGP is a: **path vector, inter-domain protocol over TCP 179**
38. Count-to-infinity occurs in: **distance vector routing**
39. Which protocol maps IP to MAC? **ARP**
40. **ping** and **traceroute** use: **ICMP**
41. DHCP message sequence: **Discover, Offer, Request, Acknowledge**

Transport & application

42. UDP header size: **8 bytes**
43. TCP 3-way handshake segments: **SYN, SYN-ACK, ACK**
44. After a timeout with $\text{cwnd} = 32$, new ssthresh : **16**, cwnd : **1**
45. Port of SMTP **25**, DNS **53**, HTTP **80**, HTTPS **443**, FTP control **21**
46. DNS record for mail server: **MX**; for IPv6: **AAAA**
47. FTP uses __ connections: **two (control + data)**; control channel is **out-of-band**
48. HTTP is: **stateless** (state maintained via cookies)
49. SNMP database of managed objects: **MIB**
50. Token bucket: capacity $C = 1$ MB, token rate $\rho = 2$ MBps, max rate $M = 10$ MBps $\rightarrow$ max burst time $= C/(M - \rho) =$ **0.125 s**

Security

51. DES key length: **56 bits**; rounds: **16**
52. AES-128 rounds: **10**
53. RSA with $p = 5$, $q = 11$, $e = 3 \rightarrow \phi = 40$, $d =$ **27**
54. In digital signatures, the sender signs with: **own private key**
55. Number of keys for 100 users with symmetric crypto: **4950**; asymmetric: **200**

56. Diffie–Hellman is vulnerable to: **man-in-the-middle attack**
57. Hiding a message inside an image: **steganography**
58. IPsec operates at: **network layer**; SSL/TLS at: **transport layer**
59. A firewall that examines application-layer data: **proxy (application-level gateway)**

Mobile, cloud, IoT

60. GSM database holding permanent subscriber information: **HLR**; temporary visitor data: **VLR**
61. GPRS is a: **packet-switched 2.5G service**
62. In Mobile IP, the address used at the foreign network: **care-of address**
63. AODV is a: **reactive (on-demand) MANET routing protocol**
64. GEO satellite altitude: **$\approx 35,786$ km**
65. Google App Engine is an example of: **PaaS**; AWS EC2: **IaaS**
66. Rapid elasticity is a characteristic of: **cloud computing (NIST)**
67. MQTT follows: **publish–subscribe model**
68. Bluetooth piconet can have at most ___ active secondaries: **7**

More practice questions

69. Using VLSM on 192.168.1.0/24, the prefix for a LAN with 50 hosts: **/26**
70. Broadcast address of 192.168.1.192/27: **192.168.1.223**
71. Split horizon is a remedy for: **count-to-infinity**
72. Client ISN 1000; after the handshake it sends 200 bytes. Sequence number of the next segment: **1201**
73. In the GBN scenario of §14.3 (frames 0–4 sent before the timeout), total transmissions: **10**; with Selective Repeat: **8**
74. Hamming (7, 4) codeword for data 1011 (even parity): **0110011**
75. Syndrome 101 in Hamming (7, 4) means the error is in bit: **5**
76. Compressed form of 2001:0db8:0000:0000:0000:0000:0001: **2001:db8::1**
77. **::** may appear in an IPv6 address: **only once**
78. Vigenère encryption of "ATTACK" with key "LEMON": **LXFOPV**
79. Caesar cipher with key 3 encrypts "NET" as: **QHW**
80. Store-and-forward delay of a 1000-byte packet over 3 links of 1 Mbps: **24 ms**

Quick Revision Box

- Shannon $C = B \log_2(1+SNR)$ · Nyquist $2B \log_2 L$
- $\eta_{SW} = 1/(1+2a)$ · GBN $W \leq 2^n - 1$ · SR $W \leq 2^{n-1}$ · $L_{min} = 2 \cdot T_p \cdot B$
- ALOHA 18.4% / 36.8% · Ethernet min 64 B
- $/n \text{ hosts} = 2^{(32-n)} - 2$ · RIP DV/15 hops/UDP 520 · OSPF LS/IP 89 · BGP PV/TCP 179
- TCP: slow start exponential $\rightarrow$ AIMD; timeout $\rightarrow$ cwnd 1
- DES 56/16 · AES 10/12/14 · sign with private, encrypt with receiver's public

Artificial Intelligence

In this unit

1. Approaches to AI	188	8. Fuzzy Sets & Logic (Zadeh, 1965)	194
2. State Space Search	189	9. Genetic Algorithms (John Holland, 1975)	195
3. Game Playing	191	10. Artificial Neural Networks	195
4. Knowledge Representation	191	11. Deeper Dive — Worked Traces for Every Numerical Topic	197
5. Planning	193	Previous Year Questions (PYQ pattern)	199
6. Natural Language Processing	193		
7. Multi-Agent Systems	194		

Expected questions: 8–10 · Target: 8+ · Type: search traces, alpha-beta, fuzzy operations, perceptron, concepts (Rich & Knight, Russell & Norvig)

Syllabus checklist


- ☐ Approaches to AI: Turing test, rational agents, state-space representation, heuristic search, game playing, minimax, alpha-beta pruning
- ☐ Knowledge representation: logic, semantic networks, frames, rules, scripts, conceptual dependency, ontologies, expert systems, uncertainty
- ☐ Planning: components, linear & non-linear planning, goal stack, hierarchical planning, STRIPS, partial-order planning
- ☐ NLP: grammars, parsing techniques, semantic analysis, pragmatics
- ☐ Multi-agent systems: agents vs objects vs expert systems, MAS structure, semantic web, agent communication, ontologies, tools
- ☐ Fuzzy sets: membership functions, fuzzification/defuzzification, operations, linguistic variables, fuzzy relations, fuzzy inference & control
- ☐ Genetic algorithms: encoding, operators, fitness function, GA cycle
- ☐ Neural networks: supervised, unsupervised, reinforcement learning; perceptron, MLP, SOM, Hopfield

1. Approaches to AI

	Human-like	Rational
Thinking	Cognitive modelling (GPS — Newell & Simon)	Laws of thought (logic)
Acting	Turing test (1950, "Computing Machinery and Intelligence")	Rational agent (Russell & Norvig — the modern approach)

- **Turing test:** interrogator communicates via text with a human and a machine; machine passes if indistinguishable. Needed capabilities: NLP, knowledge representation, automated reasoning, machine learning (+ vision & robotics for "total Turing test").
- **Chinese Room** (John Searle): argues passing the test $\neq$ understanding (strong vs weak AI).
- Term "AI" coined by **John McCarthy** at **Dartmouth Conference (1956)**.

1.1 Agents

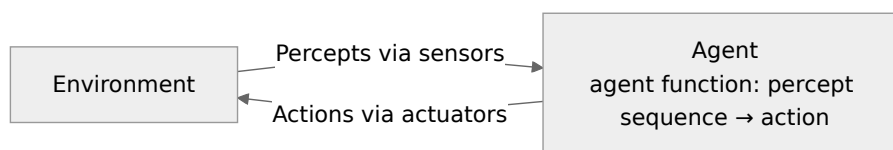

PEAS description: Performance measure, Environment, Actuators, Sensors. (Automated taxi: P = safety, speed,

legality; E = roads, traffic; A = steering, brake; S = cameras, GPS, sonar.)

Agent type	Behaviour
Simple reflex	condition-action rules on current percept only
Model-based reflex	keeps internal state of the world
Goal-based	chooses actions to reach goals (search/planning)
Utility-based	maximises expected utility
Learning agent	performance element + learning element + critic + problem generator

Environment properties: fully/partially observable, deterministic/stochastic, episodic/sequential, static/dynamic, discrete/continuous, single/multi-agent, known/unknown. (Chess with clock: fully observable, strategic, sequential, semi-dynamic, discrete, multi-agent.)

2. State Space Search

Problem = initial state, actions, transition model, **goal test**, path cost. Examples: 8-puzzle ($9!/2 = 181,440$ reachable states), water jug, missionaries & cannibals, 8-queens, Tower of Hanoi.

Water jug (4 L & 3 L, get 2 L in 4 L jug)
 $(0,0) \rightarrow (0,3) \rightarrow (3,0) \rightarrow (3,3) \rightarrow (4,2) \rightarrow (0,2) \rightarrow (2,0)$ ✓

2.1 Uninformed Search

b = branching factor, d = depth of shallowest goal, m = max depth, l = depth limit, C^* = optimal cost.

Strategy	Complete	Optimal	Time	Space
BFS	Yes (finite b)	Yes (unit cost)	$O(b^d)$	$O(b^d)$
Uniform-cost	Yes	Yes	$O(b^{(1+\lceil C^*/\epsilon \rceil)})$	same
DFS	No (infinite paths)	No	$O(b^m)$	$O(bm)$
Depth-limited	No	No	$O(b^l)$	$O(bl)$
Iterative deepening (IDDFS)	Yes	Yes (unit cost)	$O(b^d)$	$O(bd)$
Bidirectional	Yes	Yes	$O(b^{(d/2)})$	$O(b^{(d/2)})$

IDDFS combines BFS's completeness/optimality with DFS's memory — preferred uninformed method for large spaces.

Step	Expand (g, f)	Open list after expansion (g, f = g + h)
------	---------------	--

2.2 Heuristic (Informed) Search

Greedy best-first: $f(n) = h(n)$ — fast, not optimal, not complete
A*: $f(n) = g(n) + h(n)$ — optimal if h is ADMISSIBLE (tree search) or CONSISTENT (graph search)
Admissible: $h(n) \leq h^*(n)$ (never overestimates)
Consistent: $h(n) \leq c(n, n') + h(n')$ (consistent $\Rightarrow$ admissible)
Dominance: $h_2 \geq h_1$ (both admissible) $\Rightarrow h_2$ better (expands fewer nodes)


8-puzzle heuristics: h_1 = misplaced tiles, h_2 = **Manhattan distance** (h_2 dominates h_1).

A* worked — $h(S)=7, h(A)=6, h(B)=2, h(C)=1, h(G)=0$ (all admissible)

Step	Expand (g, f)	Open list after expansion (g, f = g + h)
1	S (0, 7)	A (1, 7), B (4, 6)
2	B (4, 6)	A (1, 7), C (6, 7)
3	A (1, 7)	B (3, 5) — cheaper path found, B re-opened; C (6, 7); G (13, 13)
4	B (3, 5)	C (5, 6) ; G (13, 13)
5	C (5, 6)	G (8, 8)
6	G (8, 8)	Goal reached: S $\rightarrow$ A $\rightarrow$ B $\rightarrow$ C $\rightarrow$ G, cost 8 (optimal)

Note: h here is admissible but **not consistent** ($h(A) = 6 > c(A, B) + h(B) = 4$), which is why B had to be re-opened. With a consistent heuristic, a node is never re-expanded.

- **AO*** — for AND-OR graphs (problem decomposition).
- **IDA*** — iterative deepening with f-cost limits (memory $O(bd)$). **SMA*** — memory bounded.
- **Local search: Hill climbing** (steepest ascent) — problems: **local maxima, plateaus, ridges**; fixes: random restart, sideways moves. **Simulated annealing** — accepts worse moves with probability $e^{-(\Delta E/T)}$, T decreases. **Local beam search. Genetic algorithms** (§8).
- **Constraint satisfaction (CSP)**: variables, domains, constraints; backtracking + MRV (minimum remaining values), degree heuristic, LCV (least constraining value), forward checking, **arc consistency (AC-3)**.
- **Means-ends analysis** (GPS): reduce the difference between current and goal state.

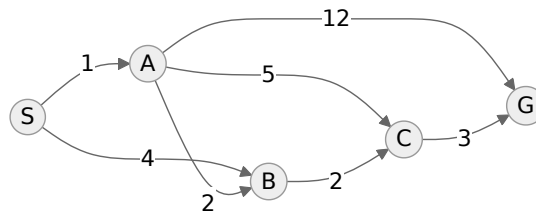


3. Game Playing

3.1 Minimax

MAX picks maximum, MIN picks minimum child value; complete & optimal against an optimal opponent. Time $O(b^m)$, space $O(bm)$.

3.2 Alpha-Beta Pruning

α = best value MAX can guarantee so far (lower bound); β = best value MIN can guarantee (upper bound). **Prune** when $\alpha \geq \beta$.

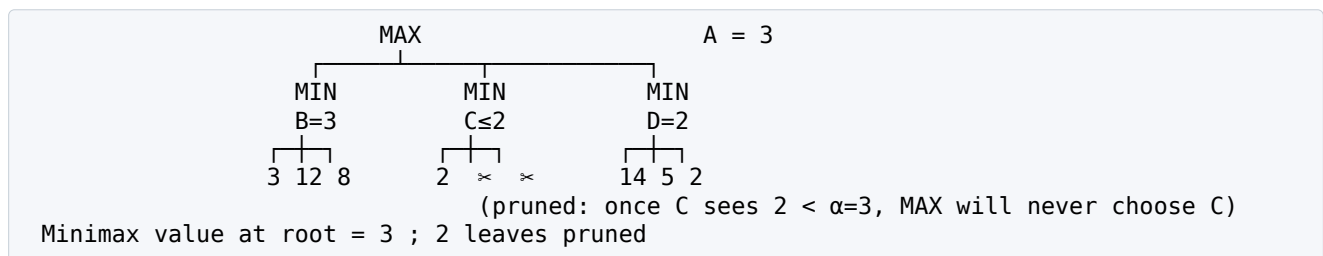


- Pruning does **not** change the final result.
- With perfect move ordering: time $O(b^{(m/2)})$ (effectively doubles the searchable depth); random ordering $\approx O(b^{(3m/4)})$.
- Stochastic games: **Expectiminimax** (chance nodes). Imperfect real-time decisions: cutoff test + evaluation function, quiescence search, horizon effect.

4. Knowledge Representation

4.1 Logic


- **Propositional logic**; **First-order predicate logic (FOPL)** — see [Unit 1](#).
- Inference: **resolution** (refutation — negate goal, convert to **CNF/clausal form**, derive empty clause), **forward chaining** (data-driven; production systems, OPS5), **backward chaining** (goal-driven; Prolog, MYCIN).
- CNF conversion steps: eliminate $\leftrightarrow$, $\rightarrow$; move $\neg$ inward; standardise variables; **Skolemise** (remove $\exists$ using Skolem constants/functions); drop $\forall$; distribute $\vee$ over $\wedge$.
- **Unification**: find substitution making literals identical (most general unifier, MGU); occurs check.
- Horn clause: at most one positive literal — basis of Prolog.
- Monotonic vs **non-monotonic** reasoning (default logic, closed-world assumption, circumscription, truth-maintenance systems).

4.2 Structured Representations

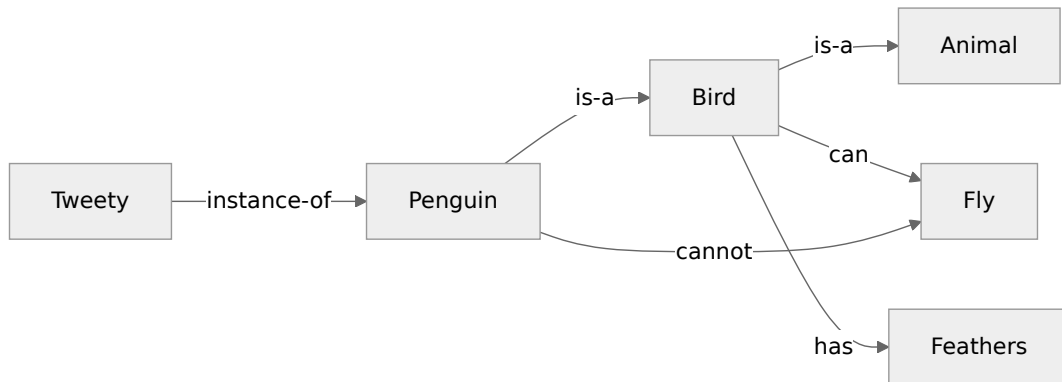

- **Semantic network** (Quillian): nodes = concepts, arcs = relations (is-a, has-a, instance); inheritance.
- **Frames** (Minsky, 1975): slots & fillers, default values, procedural attachments (if-needed, if-added demons).
- **Scripts** (Schank & Abelson): stereotyped event sequences — e.g. restaurant script: entry conditions, roles, props, scenes (entering, ordering, eating, exiting), results.
- **Conceptual Dependency** (Roger Schank): language-independent primitives — **ATRANS** (transfer possession: give), **PTRANS** (physical transfer: go), **MTRANS** (mental info: tell), **MBUILD** (build info: decide), **PROPEL**, **MOVE**, **GRASP**, **INGEST** (eat), **EXPEL**, **SPEAK**, **ATTEND** (11 primitive acts).
- **Production rules**: IF condition THEN action; conflict resolution (refractoriness, recency, specificity).
- **Ontologies**: formal specification of a shared conceptualisation (Gruber); OWL, RDF; upper ontologies.

4.3 Expert Systems

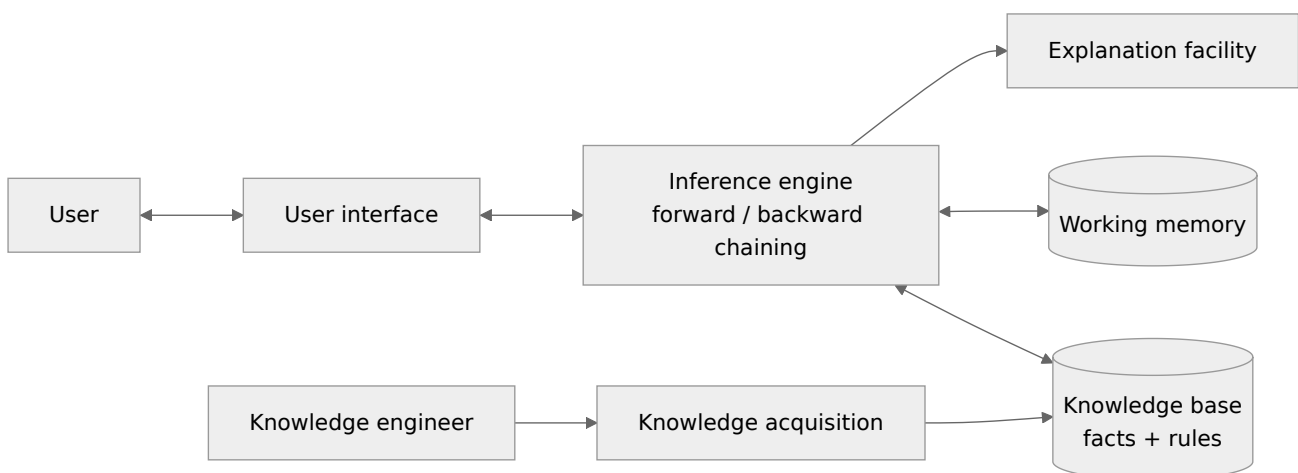

Expert system	Domain
DENDRAL (first)	Chemical structure (mass spectrometry)
MYCIN	Blood infections — backward chaining, certainty factors
EMYCIN	Shell from MYCIN
PROSPECTOR	Mineral exploration
XCON / R1	DEC computer configuration — forward chaining
INTERNIST / CADUCEUS	Internal medicine

4.4 Uncertainty

Bayes: $P(H|E) = P(E|H) \cdot P(H) / P(E)$
Certainty factor (MYCIN): $CF = MB - MD \in [-1, 1]$
combining two positive CFs: $CF = CF1 + CF2(1 - CF1)$
Dempster-Shafer: belief $Bel(A) \leq$ plausibility $Pl(A)$; mass function m over subsets
Bayesian network: DAG + conditional probability tables; $P(x_1 \dots x_n) = \prod P(x_i \mid \text{parents}(x_i))$

Other: fuzzy logic (vagueness — §7), Markov models, HMMs.

5. Planning

Concept	Meaning
STRIPS (Fikes & Nilsson, 1971)	Operators with preconditions , add list , delete list ; closed-world assumption
Linear planning (goal stack)	Solve goals one at a time using a stack — can fail on interacting goals (Sussman anomaly)
Non-linear planning	Goals interleaved; constraint posting
Partial-order planning (POP)	Least-commitment; causal links, ordering constraints; resolves threats by promotion/demotion
Hierarchical planning (HTN)	Abstract actions decomposed into sub-tasks (ABSTRIPS)
Graphplan	Planning graph with mutex links
Forward (progression) vs backward (regression) state-space planning	

STRIPS operator (Blocks world)
PICKUP(x)
PRE: $ONTABLE(x) \wedge CLEAR(x) \wedge HANDEEMPTY$
ADD: $HOLDING(x)$
DEL: $ONTABLE(x), CLEAR(x), HANDEEMPTY$
STACK(x, y)
PRE: $HOLDING(x) \wedge CLEAR(y)$
ADD: $ON(x,y), CLEAR(x), HANDEEMPTY$
DEL: $HOLDING(x), CLEAR(y)$

Sussman anomaly: initial C on A, A and B on table; goal $ON(A,B) \wedge ON(B,C)$ — goal-stack (linear) planning cannot solve it without undoing a subgoal.

6. Natural Language Processing



- Grammars: CFG, **Transformational grammar** (Chomsky), **ATN (Augmented Transition Network — Woods)**, Case grammar (Fillmore), DCG, unification grammars, Systemic grammar.
- Parsing: top-down, bottom-up, **chart parsing** (Earley — $O(n^3)$), CYK, deterministic parsing.
- Ambiguity: lexical ("bank"), syntactic/structural ("I saw a man with a telescope"), semantic, anaphoric/referential ("he"), pragmatic.
- Semantic analysis: lexical semantics, word sense disambiguation, semantic grammar, case roles.
- Pragmatics**: speech acts (Austin, Searle) — what the speaker intends; **discourse**: anaphora resolution.
- Modern NLP: n-grams, tokenisation, stemming (Porter) vs lemmatisation, POS tagging (HMM), NER, TF-IDF, word embeddings (word2vec), transformers/LLMs.
- Early systems: **ELIZA** (Weizenbaum, pattern matching therapist), **SHRDLU** (Winograd, blocks world), **LUNAR**, **PARRY**.


7. Multi-Agent Systems

	Object	Agent	Expert system
Autonomy	Methods invoked by others	Decides itself whether to act	Advises user
Behaviour	Passive	Proactive, reactive, social	Passive reasoning
Interaction	Method calls	Communication languages	User interface

- Agent properties: **autonomy, reactivity, pro-activeness, social ability** (Wooldridge & Jennings); BDI architecture (**Beliefs, Desires, Intentions**).
- MAS structure: agents + environment + interactions (cooperation, coordination, negotiation — contract net protocol, auctions).
- **Agent communication languages**: **KQML** (performatives: ask, tell, achieve...), **FIPA-ACL**; content language **KIF**.
- Knowledge sharing via **ontologies**. **Semantic web** (Tim Berners-Lee): **RDF** (triples subject–predicate–object), **RDFS**, **OWL**, **SPARQL**; layered cake.
- Tools: **JADE** (Java, FIPA-compliant), **JACK**, **Jason** (AgentSpeak), **Zeus**, **Aglets**, **NetLogo**.

8. Fuzzy Sets & Logic (Zadeh, 1965)

Membership $\mu_A(x) \in [0, 1]$ (vs crisp $\{0, 1\}$).

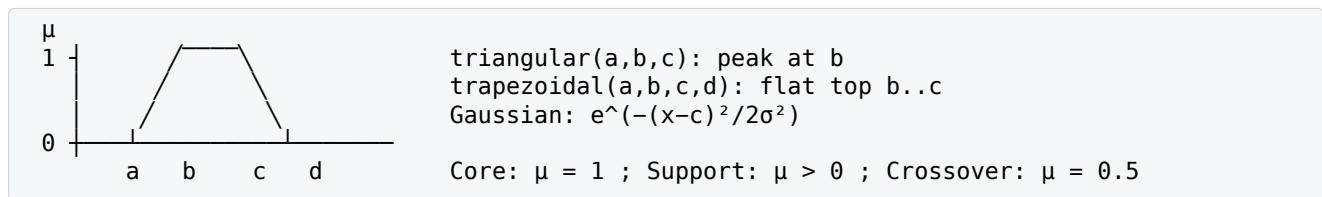

Operations (standard Zadeh)


Union $\mu_{\{A \cup B\}}(x) = \max(\mu_A, \mu_B)$
 Intersection $\mu_{\{A \cap B\}}(x) = \min(\mu_A, \mu_B)$
 Complement $\mu_{\{A'\}}(x) = 1 - \mu_A(x)$
 Algebraic sum $\mu_A + \mu_B - \mu_A \cdot \mu_B$; Algebraic product $\mu_A \cdot \mu_B$
 Bounded sum $\min(1, \mu_A + \mu_B)$; Bounded difference $\max(0, \mu_A - \mu_B)$
 Concentration (very) μ^2 ; Dilation (somewhat) $\sqrt{\mu}$

Laws that FAIL in fuzzy sets: **law of excluded middle** ($A \cup A' \neq U$) and **law of contradiction** ($A \cap A' \neq \emptyset$). De Morgan, associativity, distributivity still hold.

Worked: $A = \{0.2/x_1, 0.7/x_2, 1/x_3\}$, $B = \{0.5/x_1, 0.3/x_2, 0.8/x_3\}$

$A \cup B = \{0.5, 0.7, 1\}$ $A \cap B = \{0.2, 0.3, 0.8\}$ $A' = \{0.8, 0.3, 0\}$
 $A \cap A' = \{0.2, 0.3, 0\} \neq \emptyset$
 α -cut $A_{0.5} = \{x_2, x_3\}$ Height(A) = 1 (normal fuzzy set)


- **Fuzzy relations**: max–min composition: $(R \circ S)(x, z) = \max_y \min(R(x, y), S(y, z))$. Max-product composition.
- **Linguistic variables**: e.g. Temperature $\in \{\text{cold, warm, hot}\}$; hedges: very, somewhat.
- **Fuzzy inference system**:



- **Mamdani** (fuzzy output sets, centroid defuzzification — intuitive) vs **Sugeno / TSK** (output = linear function/constant, weighted average — efficient).
- Centroid: $z^* = \int \mu(z) \cdot z \, dz / \int \mu(z) \, dz$. Weighted average: $\sum \mu_i z_i / \sum \mu_i$.

- Applications: washing machines, ABS brakes, air-conditioners, cameras (fuzzy control).

9. Genetic Algorithms (John Holland, 1975)

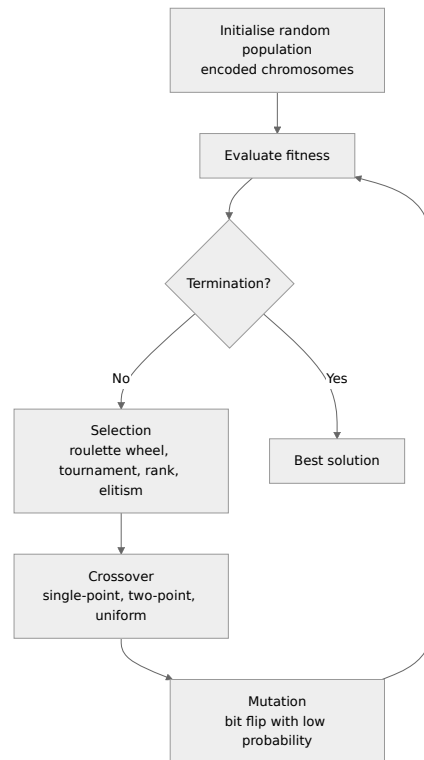

- **Encoding:** binary, permutation (TSP), value/real, tree (genetic programming).
- **Fitness function** guides selection. Roulette wheel probability $p_i = f_i / \sum f$.
- **Crossover** (exploitation of good genes) with probability $\sim 0.6-0.9$; **mutation** (exploration, maintains diversity) $\sim 0.001-0.01$.
- Single-point crossover: $1011|010 \times 0110|111 \rightarrow 1011111, 0110010$.
- **Schema theorem** (Holland): short, low-order, above-average schemata grow exponentially (building block hypothesis). Order $o(H)$ = fixed positions; defining length $\delta(H)$ = distance between first & last fixed positions. Number of schemata in a string of length l : 3^l .
- Premature convergence; elitism keeps the best individuals.

10. Artificial Neural Networks

10.1 Learning Paradigms

Type	Data	Examples
Supervised	Labelled input–output pairs	Perceptron, back-propagation MLP, SVM, decision trees
Unsupervised	Unlabelled	SOM (Kohonen) , k-means, Hebbian, competitive learning, ART
Reinforce-ment	Rewards / penalties from environment	Q-learning, SARSA, TD learning; MDP (states, actions, rewards, policy)

Q-learning: $Q(s,a) \leftarrow Q(s,a) + \alpha[r + \gamma \max_{a'} Q(s',a') - Q(s,a)]$.

10.2 Perceptron (Rosenblatt, 1958)


```

x1 —w1—\
x2 —w2—→ Σ wixi + b → step(·) → y
x3 —w3—/
Update rule: wi ← wi + η (t - y) xi      (t = target, η = learning rate)

```

- **McCulloch–Pitts neuron (1943)**: first model; binary threshold, fixed weights.
- Single-layer perceptron can learn only **linearly separable** functions — AND, OR, NAND ✓; **XOR ✗** (Minsky & Papert, 1969).
- AND with $w_1 = w_2 = 1$, threshold $\theta = 1.5$ (or bias -1.5); OR with $\theta = 0.5$.
- Perceptron convergence theorem: converges in finite steps if data is linearly separable.

10.3 Multilayer Perceptron & Backpropagation



- Input → hidden → output layers; non-linear activations: **sigmoid** $\sigma(x) = 1/(1 + e^{-x})$ with $\sigma' = \sigma(1 - \sigma)$, **tanh**, **ReLU** $\max(0, x)$, softmax (output).
- **Backpropagation** (Rumelhart, Hinton, Williams, 1986): forward pass → compute error → propagate gradients backwards (chain rule) → gradient descent: $w \leftarrow w - \eta \partial E / \partial w$. Problems: local minima, vanishing gradients (sigmoid); momentum, learning-rate tuning.
- MLP with one hidden layer is a **universal approximator**; can solve XOR.
- Overfitting → regularisation, dropout, early stopping.
- **Delta rule / Widrow–Hoff / LMS** (ADALINE): $\Delta w = \eta(t - y_{in})x$. MADALINE = multiple ADALINES.

10.4 Self-Organising Map (Kohonen)


- **Unsupervised, competitive learning**; maps high-dimensional input to a low-dimensional (2-D) grid preserving **topology**.
- Steps: find **Best Matching Unit (BMU)** (min Euclidean distance) → update BMU and neighbours: $w \leftarrow w + \eta \cdot h(t)(x - w)$; neighbourhood and η shrink over time.

10.5 Hopfield Network (1982)

- **Recurrent**, fully connected, **symmetric weights** ($w_{ij} = w_{ji}$), **no self-connections** ($w_{ii} = 0$); binary/bipolar states.
- **Associative (content-addressable) memory**: stores patterns via Hebbian rule $W = \sum p^T p - I$ (bipolar); retrieves from noisy input.
- Energy function $E = -\frac{1}{2} \sum \sum w_{ij} s_i s_j$ decreases monotonically → converges to stable state (local minimum).
- Capacity $\approx 0.138 N$ patterns for N neurons.
- Also: **Hebbian learning** ("neurons that fire together wire together") $\Delta w = \eta \cdot x \cdot y$; **BAM** (bidirectional associative memory — Kosko); **ART** (Grossberg – stability–plasticity); RBF networks; Boltzmann machine.

11. Deeper Dive — Worked Traces for Every Numerical Topic

11.1 Alpha–Beta Trace (depth 3)

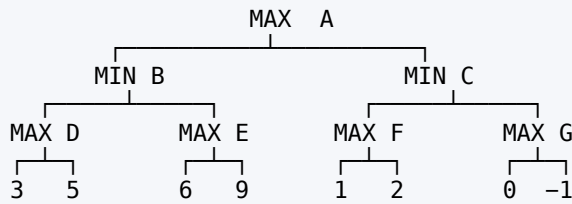

Step	Node	α, β on entry	What happens
1	D	$-\infty, +\infty$	sees 3, 5 $\rightarrow D = 5$
2	B	—	$\beta = 5$
3	E	$-\infty, 5$	sees 6 $\rightarrow \alpha = 6 \geq \beta = 5 \rightarrow$ prune leaf 9 ; E returns 6
4	B	—	$B = \min(5, 6) = 5 \rightarrow$ A's $\alpha = 5$
5	F	$5, +\infty$	sees 1, 2 $\rightarrow F = 2$
6	C	$5, +\infty$	$\beta = 2 \leq \alpha = 5 \rightarrow$ prune G (leaves 0, -1)
7	A	—	$A = \max(5, 2) = 5$

3 of 8 leaves pruned; the root value is the same as plain minimax.

11.2 Resolution Refutation

First-order: "All men are mortal. Socrates is a man. Prove Socrates is mortal."

- | | |
|---|---|
| 1. $\neg \text{Man}(x) \vee \text{Mortal}(x)$ | $(\forall x \text{ Man}(x) \rightarrow \text{Mortal}(x))$ |
| 2. $\text{Man}(\text{Socrates})$ | |
| 3. $\neg \text{Mortal}(\text{Socrates})$ | (negated goal) |
| 4. $\neg \text{Man}(\text{Socrates})$ | resolve 1, 3 with $\{x / \text{Socrates}\}$ |
| 5. $\square$ (empty clause) | resolve 2, 4 $\rightarrow$ goal proved |

Propositional: from $P \rightarrow Q, Q \rightarrow R, P$ prove R . Clauses $\neg P \vee Q, \neg Q \vee R, P, \neg R \rightarrow$ resolve $\neg Q \vee R$ with $\neg R \rightarrow \neg Q$; with $\neg P \vee Q \rightarrow \neg P$; with $P \rightarrow \square$.

11.3 Forward vs Backward Chaining

Rules: R1: $A \wedge B \rightarrow C$; R2: $C \rightarrow D$; R3: $D \wedge E \rightarrow F$. Facts: A, B, E. Goal: F.

Forward chaining (data-driven)	Backward chaining (goal-driven)
A, B $\vdash$ C (R1)	Goal F $\leftarrow$ need D and E (R3)
C $\vdash$ D (R2)	E is a fact; D $\leftarrow$ need C (R2)
D, E $\vdash$ F (R3) ✓	C $\leftarrow$ need A and B (R1); both facts ✓

11.4 Bayes — Medical Test

Disease prevalence 1%, test sensitivity 99%, false-positive rate 5%.

$$\begin{aligned}
 P(D \mid +) &= P(+ \mid D) \cdot P(D) / [P(+ \mid D) \cdot P(D) + P(+ \mid \neg D) \cdot P(\neg D)] \\
 &= 0.99 \times 0.01 / (0.0099 + 0.05 \times 0.99) \\
 &= 0.0099 / 0.0594 \approx 0.167 \quad \rightarrow \text{only about 17\% of positives actually have the disease}
 \end{aligned}$$

11.5 Fuzzy Max–Min Composition & Inference

$$\begin{aligned}
 R &= \begin{bmatrix} 0.6 & 0.3 \\ 0.2 & 0.9 \end{bmatrix} & S &= \begin{bmatrix} 1.0 & 0.5 \\ 0.8 & 0.4 \end{bmatrix} & T &= R \circ S \\
 T_{11} &= \max(\min(0.6, 1.0), \min(0.3, 0.8)) = \max(0.6, 0.3) = 0.6 \\
 T_{12} &= \max(\min(0.6, 0.5), \min(0.3, 0.4)) = \max(0.5, 0.3) = 0.5 \\
 T_{21} &= \max(\min(0.2, 1.0), \min(0.9, 0.8)) = \max(0.2, 0.8) = 0.8 \\
 T_{22} &= \max(\min(0.2, 0.5), \min(0.9, 0.4)) = \max(0.2, 0.4) = 0.4 \\
 T &= \begin{bmatrix} 0.6 & 0.5 \\ 0.8 & 0.4 \end{bmatrix}
 \end{aligned}$$

Sugeno-style inference: temperature 30 °C $\rightarrow \mu_{\text{warm}} = 0.4, \mu_{\text{hot}} = 0.6$. Rules: warm $\rightarrow$ fan 40%, hot $\rightarrow$ fan 80%.
Output = $(0.4 \times 40 + 0.6 \times 80) / (0.4 + 0.6) = 64\%$.

11.6 Genetic Algorithm — One Generation (maximise $f(x) = x^2$, 5-bit x)

String	x	$f(x)$	$p_i = f/\Sigma f$	Expected copies ($4p_i$)
01101	13	169	0.144	0.58
11000	24	576	0.492	1.97
01000	8	64	0.055	0.22
10011	19	361	0.309	1.23
		$\Sigma = 1170$		

Crossover 0110|1 $\times$ 1100|0 at position 4 $\rightarrow$ **01100** (12) and **11001** (25) — the child 25 is fitter than any parent.

11.7 Perceptron Learning AND ($\eta = 1, w = (0, 0), b = 0$, output 1 if $w \cdot x + b > 0$)

End of epoch	w_1	w_2	b	Errors in epoch
1	1	1	1	1
2	2	1	0	3
3	2	1	-1	3
4	2	2	-1	2
5	2	1	-2	1
6	2	1	-2	0 $\rightarrow$ converged

Check: (0,0) $\rightarrow -2 \rightarrow 0$; (0,1) $\rightarrow -1 \rightarrow 0$; (1,0) $\rightarrow 0 \rightarrow 0$; (1,1) $\rightarrow 1 \rightarrow 1$ ✓ = AND.

11.8 One Backpropagation Step (single sigmoid neuron)

$x = 1, w = 0.5, b = 0$, target $t = 1, \eta = 1, E = \frac{1}{2}(t - o)^2$.


$$\begin{aligned}
 \text{net} &= 0.5 \rightarrow o = \sigma(0.5) = 0.6225 \\
 \delta &= (t - o) \cdot o(1 - o) = 0.3775 \times 0.6225 \times 0.3775 \approx 0.0887 \\
 \Delta w &= \eta \delta x = 0.0887 \rightarrow w_{\text{new}} = 0.5887 \text{ (output moves toward the target)}
 \end{aligned}$$

11.9 Hopfield Storage & Recall

Store bipolar pattern $p = [1, -1, 1]$: $W = p p^T - I$.

$W = \begin{bmatrix} 0 & -1 & 1 \\ -1 & 0 & -1 \\ 1 & -1 & 0 \end{bmatrix}$	Noisy input $x = [1, 1, 1]$ $W x = [0, -2, 0] \rightarrow \text{sign (keep old value on 0)} = [1, -1, 1]$ $\rightarrow$ stored pattern recovered
---	--

11.10 CSP — Map Colouring with Heuristics

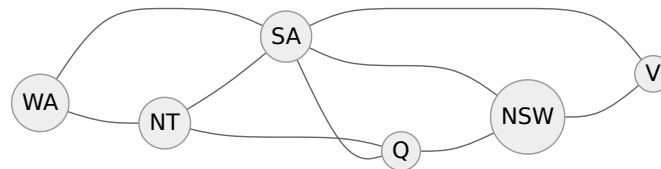

Three colours. **MRV/degree heuristic** picks SA first (degree 5). Assign SA = red $\rightarrow$ WA, NT, Q, NSW, V lose red; WA = green $\rightarrow$ NT = blue $\rightarrow$ Q = green $\rightarrow$ NSW = blue $\rightarrow$ V = green. Solution found without backtracking; **forward checking** removes inconsistent values early.

Previous Year Questions (PYQ pattern)

Foundations & agents

1. The term "Artificial Intelligence" was coined by: **John McCarthy (1956)**
2. Turing test evaluates: **whether a machine's behaviour is indistinguishable from a human's**
3. PEAS stands for: **Performance, Environment, Actuators, Sensors**
4. Agent that acts only on the current percept: **simple reflex agent**
5. Chess is: **fully observable, deterministic (strategic), sequential, discrete, multi-agent**

Search

6. Space complexity of BFS: **$O(b^d)$** ; of DFS: **$O(bm)$**
7. Search that combines benefits of BFS and DFS: **iterative deepening DFS**
8. A* is optimal if the heuristic is: **admissible (never overestimates)**
9. If $h(n) = 0$ for all n , A* reduces to: **uniform-cost search (Dijkstra)**
10. Greedy best-first search uses: **$f(n) = h(n)$**
11. Hill climbing can get stuck due to: **local maxima, plateau, ridges**
12. Simulated annealing accepts worse moves with probability: **$e^{(\Delta E/T)}$**
13. Problem reduction (AND-OR graphs) uses: **AO***
14. Means-ends analysis was used in: **GPS (General Problem Solver)**
15. For 8-puzzle, Manhattan distance is: **admissible and dominates misplaced tiles**

Games

16. Alpha-beta pruning with perfect ordering reduces time to: **$O(b^{(m/2)})$**
17. Pruning occurs when: **$\alpha \geq \beta$**
18. Alpha-beta pruning changes the minimax value? **No**
19. Minimax value of tree with MIN nodes having leaves (3,12,8), (2,4,6), (14,5,2): **$\max(3, 2, 2) = 3$**

Knowledge representation

20. Frames were proposed by: **Marvin Minsky**
21. Scripts were proposed by: **Schank & Abelson**
22. "John gave Mary a book" in CD uses primitive: **ATRANS**
23. MYCIN used: **backward chaining with certainty factors**
24. First expert system: **DENDRAL**
25. Skolemisation removes: **existential quantifiers**
26. Prolog is based on: **Horn clauses with backward chaining (SLD resolution)**

27. Resolution proves a goal by: **refutation (deriving the empty clause from negated goal)**
28. Combining CF 0.6 and 0.4 (both positive): $0.6 + 0.4 \times 0.4 = 0.76$
29. Dempster–Shafer theory uses: **belief and plausibility**

Planning & NLP

30. STRIPS operators contain: **preconditions, add list, delete list**
31. Sussman anomaly illustrates a problem with: **linear (goal-stack) planning**
32. Partial-order planning follows: **least-commitment strategy**
33. ATN stands for: **Augmented Transition Network**
34. "I saw the man with the telescope" exhibits: **structural (syntactic) ambiguity**
35. Correct NLP pipeline: **morphological → syntactic → semantic → discourse → pragmatic**
36. ELIZA was developed by: **Joseph Weizenbaum**

MAS

37. BDI stands for: **Beliefs, Desires, Intentions**
38. KQML is used for: **agent communication**
39. JADE is: **a Java framework for FIPA-compliant multi-agent systems**
40. Semantic web ontology language: **OWL**

Fuzzy

41. Fuzzy logic was introduced by: **Lotfi Zadeh (1965)**
42. $\mu_A = 0.6$, $\mu_B = 0.3$: union **0.6**, intersection **0.3**, complement of A **0.4**
43. Which law does NOT hold in fuzzy sets? **Law of excluded middle / contradiction**
44. Defuzzification method computing centre of area: **centroid**
45. Sugeno fuzzy model output is: **a linear function or constant (crisp)**
46. Max–min composition of $R = [0.3 \ 0.8]$ and $S = [0.5; 0.9]$ (column): $\max(\min(0.3, 0.5), \min(0.8, 0.9)) = 0.8$
47. "Very" hedge applied to $\mu = 0.8$: **0.64**

GA

48. Genetic algorithms were introduced by: **John Holland**
49. Operator that maintains diversity: **mutation**
50. Roulette wheel: fitness values 10, 20, 30, 40 → probability of 3rd: **0.3**
51. Number of schemata in binary string length 5: $3^5 = 243$

Neural networks

52. Single-layer perceptron cannot learn: **XOR**
53. Perceptron learning rule: $\Delta w = \eta(t - y)x$
54. Backpropagation uses: **gradient descent with chain rule**
55. Derivative of sigmoid: $\sigma(1 - \sigma)$
56. Kohonen SOM is: **unsupervised, competitive learning preserving topology**
57. Hopfield network weights are: **symmetric with zero diagonal**; used as **associative memory**
58. Hopfield storage capacity: $\approx 0.138 N$
59. Learning with reward/penalty: **reinforcement learning**
60. Hebbian learning rule: $\Delta w = \eta \cdot x \cdot y$

More practice questions

61. In the tree of §11.1, the number of leaves pruned by alpha–beta: **3**
62. Resolution proves a goal by deriving: **the empty clause from the negated goal**
63. Backward chaining starts from: **the goal**
64. Prevalence 1%, sensitivity 99%, false-positive 5%: $P(\text{disease} \mid \text{positive}) \approx 0.17$
65. Max–min composition entry $\max(\min(0.2, 1.0), \min(0.9, 0.8)) = 0.8$
66. In a GA with fitness values 169, 576, 64, 361, the selection probability of the fittest: ≈ 0.49
67. Single-point crossover of 01101 and 11000 after bit 4: **01100 and 11001**
68. Perceptron weights $(w_1, w_2, b) = (2, 1, -2)$ implement: **AND**

69. Derivative of the sigmoid at output 0.5: **0.25**
70. Hopfield weight matrix for one stored pattern p : $p p^T - I$
71. In map colouring, choosing the variable with the fewest legal values is the: **MRV heuristic**
72. Degree heuristic chooses the variable: **involved in the most constraints with unassigned variables**

Quick Revision Box

- BFS $O(b^d)$ space · DFS $O(bm)$ · IDDFS best uninformed · A* optimal if admissible
- α - β : prune when $\alpha \geq \beta$ · best ordering $O(b^{(m/2)})$
- Minsky frames · Schank scripts & CD (ATRANS, PTRANS, MTRANS) · MYCIN backward + CF
- STRIPS: pre/add/delete · Sussman anomaly → linear planning fails
- Fuzzy: $\cup$ max, $\cap$ min, $' = 1 - \mu$; excluded middle fails
- Perceptron no XOR · SOM unsupervised · Hopfield symmetric, recurrent, 0.138N

Revision

Exam-Day Formula & Facts Sheet (UGC NET CS)

In this unit

Paper 1	203	Software Engineering	204
Discrete Mathematics	203	Algorithms	205
Computer Architecture	204	TOC & Compilers	205
Programming & Graphics	204	Networks	205
DBMS	204	AI	205
Operating Systems	204		

Read this the evening before and the morning of the exam. Every line here has appeared in past papers.

Paper 1

Topic	Must-remember
Levels of teaching	Memory–Herbart · Understanding–Morrison · Reflective–Hunt
Bloom (revised)	Remember → Understand → Apply → Analyse → Evaluate → Create
Evaluation	Formative (during) · Summative (end) · Diagnostic (difficulties) · Placement (before)
Research	Type I = reject true H_0 · Type II = accept false H_0 · NOIR scales
Plagiarism (UGC 2018)	$L0 \leq 10\%$ · $L1$ 10–40 · $L2$ 40–60 · $L3 > 60$
Communication	Lasswell 5Ws · Shannon–Weaver noise · Schramm field of experience · Berlo SMCR
Logic	$A(S)$ $E(S,P)$ $I(-)$ $O(P)$ distribution · contradictory A–O, E–I
Pramanas	Charvaka 1 · Buddhist/Vaisheshika 2 · Samkhya 3 · Nyaya 4 · Prabhakara 5 · Bhatta/Advaita 6
Hetvabhasa	Savyabhichara, Viruddha, Satpratipaksha, Asiddha, Badhita
Maths	Net % = $a + b + ab/100$ · $CI - SI (2y) = P(R/100)^2$ · avg speed $2xy/(x+y)$
DI	$1\% = 3.6^\circ$ · Mode = 3 Median – 2 Mean
Environment	SDG 17/169 · EPA 1986 · NAPCC 8 missions · Kyoto 1997 · Paris 2015 · ISA Gurugram · Net zero 2070
Higher Ed	Nalanda–Kumaragupta I · Vikramashila–Dharmapala · Wood 1854 · Radhakrishnan 1948 · Kothari 1964–66 · NEP 2020 (GER 50% by 2035)

Discrete Mathematics

$p \rightarrow q \equiv \neg p \vee q \equiv \neg q \rightarrow \neg p$ Boolean functions on n vars: $2^{(2^n)}$
 Relations on n : $2^{(n^2)}$ · reflexive $2^{(n^2-n)}$ · symmetric $2^{(n(n+1)/2)}$ · antisymmetric $2^n \cdot 3^{(n(n-1)/2)}$
 Onto functions $m \rightarrow n$: $\sum (-1)^k C(n,k) (n-k)^m$ Derangements $D4 = 9$, $D5 = 44$
 Bell: 1, 1, 2, 5, 15, 52, 203 Catalan: 1, 1, 2, 5, 14, 42, 132
 Handshake $\sum \deg = 2E$ · $V - E + F = 2$ · $E \leq 3V - 6$ · Cayley n^{n-2} · K_n edges $n(n-1)/2$
 Lagrange: $|H|$ divides $|G|$ · generators of cyclic $Z_n = \phi(n)$ · Z_n field $\Leftrightarrow n$ prime
 Transportation BFS = $m + n - 1$ · PERT $t_e = (a + 4m + b)/6$, $\sigma^2 = ((b - a)/6)^2$

Computer Architecture

2's complement range: $-2^{n-1} \dots 2^{n-1} - 1$ IEEE single 1|8|23 bias 127 ; double 1|11|52 bias 1023
Hamming parity bits: $2^r \geq m + r + 1$
Pipeline: $T = (k + n - 1) \cdot t$; speedup $\rightarrow k$; Amdahl $S = 1 / ((1 - f) + f/s)$
Cache: hierarchical $T = h \cdot tc + (1 - h)(tc + tm)$; parallel $T = h \cdot tc + (1 - h) \cdot tm$
Address split: direct TAG|LINE|OFFSET · k-way TAG|SET|OFFSET (sets = lines/k)
Disk: avg rotational latency = $\frac{1}{2} \times 60/\text{RPM}$
NAND-only XOR = 4 gates · Johnson counter n FF $\rightarrow 2n$ states · ring n FF $\rightarrow n$ states

Programming & Graphics

Bresenham $p0 = 2\Delta y - \Delta x$; $pk < 0 \rightarrow pk + 2\Delta y$; else $pk + 2\Delta y - 2\Delta x$
Midpoint circle $p0 = 1 - r$; 8-way symmetry ; ellipse 4-way
Frame buffer = $W \times H \times \text{bpp} / 8$ bytes
Rotation about P: $T(P) \cdot R(\theta) \cdot T(-P)$; Cohen-Sutherland TBRL ; AND $\neq 0 \rightarrow$ reject
Bezier n control points $\rightarrow$ degree $n - 1$, global control ; B-spline local control
Gouraud $\rightarrow$ intensities ; Phong $\rightarrow$ normals ; Z-buffer $\rightarrow$ image space
Non-overloadable C++: :: . .* ?: sizeof

DBMS

Super keys with 1 CK of 1 attr among n: 2^{n-1} ; two single-attr CKs: $3 \cdot 2^{n-2}$
2NF: no partial dep · 3NF: X superkey OR A prime · BCNF: X superkey
Lossless: $(R1 \cap R2) \rightarrow R1$ or $R2$ · 3NF lossless + dep-preserving ; BCNF lossless only
Conflict serializable $\Leftrightarrow$ precedence graph acyclic · serial schedules = $n!$
Wait-Die: old waits, young dies · Wound-Wait: old wounds, young waits
B+ internal: $p \cdot Pb + (p-1) \cdot K \leq B$ · leaf: $q(K + Pr) + Pb \leq B$
Support = $n(A \cup B)/N$ · Confidence = $\sup(A \cup B)/\sup(A)$ · cuboids 2^n
CAP: choose 2 · HDFS block 128 MB, replication 3

Operating Systems

$n \text{ fork}() \rightarrow 2^n$ processes · $TAT = CT - AT$ · $WT = TAT - BT$
Deadlock-free: $R \geq n(k - 1) + 1$ · semaphore final = initial - P + V
 $EAT(TLB) = h(t + m) + (1 - h)(t + 2m)$ · $EAT(\text{page fault}) = (1 - p) \cdot ma + p \cdot \text{service}$
Page table size = $(2^{LA} / \text{page size}) \times \text{PTE}$
RM bound $n(2^{(1/n)} - 1) \rightarrow 0.69$ · EDF $U \leq 1$
Belady: FIFO only · RAID 5 distributed parity, min 3 disks · RAID 6 two parities, min 4
Inode max $\approx (12 + k + k^2 + k^3) \times \text{block}$, $k = \text{block/pointer size}$

Software Engineering

FP = $UFP \times (0.65 + 0.01 \sum F_i)$, 14 GSCs, VAF 0.65–1.35
EI 3/4/6 · E0 4/5/7 · EQ 3/4/6 · ILF 7/10/15 · EIF 5/7/10
COCOMO basic: organic 2.4,1.05,2.5,0.38 · semi 3.0,1.12,2.5,0.35 · embedded 3.6,1.20,2.5,0.32
 $V(G) = E - N + 2P = \text{decisions} + 1 = \text{regions}$
Availability = $MTTF / (MTTF + MTTR)$ · RE = $P \times C$ · BVA $4n + 1$ · paths $n(n-1)/2$
Cohesion best Functional $\rightarrow$ worst Coincidental · Coupling best Data $\rightarrow$ worst Content

Algorithms

Master: compare $f(n)$ with $n^{\log_b a}$
Binary tree: $n_0 = n_2 + 1$ · max nodes height $h = 2^{(h+1)} - 1$ · null links $n + 1$
AVL min nodes: 1, 2, 4, 7, 12, 20, 33 · RB height $\leq 2\log(n+1)$
Build-heap $O(n)$ · comparison sort $\Omega(n \log n)$ · min+max $3n/2 - 2$
Dijkstra $O((V+E)\log V)$ no negative · Bellman-Ford $O(VE)$ · Floyd $O(V^3)$ · Kruskal $O(E \log E)$
Matrix chain $O(n^3)$ · LCS $O(mn)$ · 0/1 knapsack $O(nW)$ · KMP $O(n + m)$
SAT first NPC (Cook) · 2-SAT $\in P$ · halting NP-hard not NP

TOC & Compilers

NFA $n \rightarrow$ DFA $\leq 2^n$ · nth-from-end DFA 2^n states
CNF derivation $2n - 1$ · GNF n · CYK $O(n^3)$
Regular: closed under all · CFL: not n , not complement · DCFL: complement ✓ · RE: complement ✗
 L and $\bar{L}$ RE $\Rightarrow$ recursive · Halting RE not recursive · Rice: non-trivial language props undecidable
Undecidable for CFG: ambiguity, equivalence, $L = \Sigma^*$, intersection emptiness
 $LR(0) \subset SLR \subset LALR \subset CLR$ · #states $LR(0) = SLR = LALR \leq CLR$ · LALR merge $\rightarrow$ only R/R
S-attributed $\subset$ L-attributed · live variables backward · reaching defs forward · avail. exprs forward n

Networks

Nyquist $2B \log_2 L$ · Shannon $B \log_2(1 + SNR)$ · dB = $10 \log_{10}$
 $a = T_p/T_t$ · $\eta_{SW} = 1/(1 + 2a)$ · $\eta = W/(1 + 2a)$ · GBN $2^n - 1$ · SR 2^{n-1}
Pure ALOHA 18.4% ($G = 0.5$) · slotted 36.8% ($G = 1$) · CSMA/CD $L_{min} = 2 \cdot T_p \cdot B$
Hosts $/n = 2^{(32-n)} - 2$ · d_{min} detect $d+1$, correct $2t+1$
Mesh links $n(n-1)/2$ · symmetric keys $n(n-1)/2$ · asymmetric $2n$
Token bucket burst = $C/(M - \rho)$ · T1 1.544 Mbps · E1 2.048 Mbps
RIP DV hop 15 UDP 520 · OSPF LS IP 89 · BGP PV TCP 179
DES 64/56/16 · AES 128, keys 128/192/256 $\rightarrow$ rounds 10/12/14
Ports 20/21 FTP · 22 SSH · 23 Telnet · 25 SMTP · 53 DNS · 67/68 DHCP · 80 HTTP · 110 POP3 · 143 IMAP · 161 SNMP · 443 HTTPS

AI

BFS time/space $O(b^d)$ · DFS space $O(bm)$ · IDDFS $O(b^d)$ time, $O(bd)$ space
 A^* : $f = g + h$, admissible $\Rightarrow$ optimal ; $h = 0 \Rightarrow$ UCS
 α - β prune when $\alpha \geq \beta$; best case $O(b^{(m/2)})$
Fuzzy: u max · n min · complement $1 - \mu$ · very = μ^2 · somewhat = $\sqrt{\mu}$
Perceptron $\Delta w = \eta(t - y)x$ · no XOR · sigmoid' = $\sigma(1 - \sigma)$
Hopfield capacity $0.138N$ · CF combine $CF1 + CF2(1 - CF1)$ · schemata 3^L


120-Day Study Plan for 250+ (Paper 1 + Paper 2)

In this unit

Overview	206	Exam-Hall Strategy (3 hours, 150 questions, no negative marking)	207
Phase 1 — Concept Building (Day 1–60)	206	Recommended Standard Books (for depth where needed)	208
Phase 2 — PYQs & Numerical Mastery (Day 61–90)	207	Weekly Checklist	208
Phase 3 — Mocks & Final Revision (Day 91–120)	207		
Score Tracker (fill in after every mock)	207		

Assumes ~5–6 hours/day. Compress proportionally if you have less time (e.g. 90 days → shrink Phase 1).

Overview

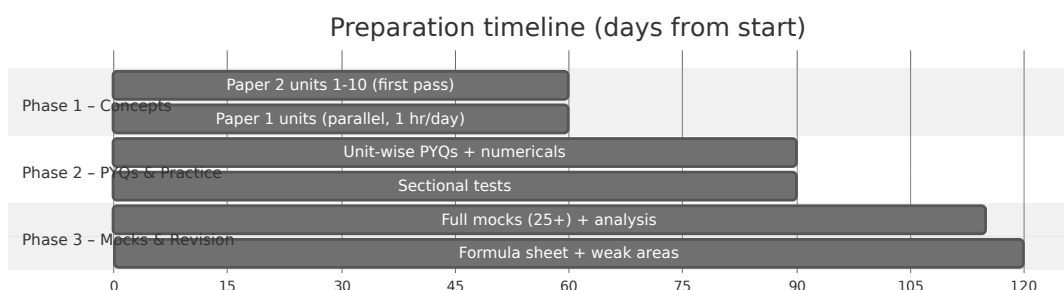

Phase 1 — Concept Building (Day 1–60)

Daily split: 4 hrs Paper 2 + 1 hr Paper 1 + 30 min revision of previous day.

Days	Paper 2 unit (file)	Paper 1 unit (parallel)
1–6	Discrete Structures & Optimization	Teaching Aptitude
7–12	Computer System Architecture	Research Aptitude
13–18	DBMS	Communication
19–24	System Software & OS	Mathematical Reasoning (daily 10 Qs from here on)
25–30	Data Structures & Algorithms	Logical Reasoning (incl. Indian logic)
31–37	TOC & Compilers	Data Interpretation (daily 1 set from here on)
38–43	Computer Networks	ICT
44–48	Software Engineering	People, Development & Environment
49–53	Programming Languages & Graphics	Higher Education System
54–58	Artificial Intelligence	Comprehension (daily 1 passage from here on)
59–60	Buffer / catch-up	Buffer

For each unit: read the notes → redraw every diagram from memory → solve every PYQ in the file → mark wrong ones with ✗ → re-solve ✗ ones after 3 days.

Phase 2 — PYQs & Numerical Mastery (Day 61–90)

- Solve **official NTA papers** (last 5–6 cycles) **unit-wise** — attempt every question of a unit across years together; patterns become obvious.
- Daily numerical drill (30 min): rotate — cache/pipeline → scheduling/paging → subnetting/sliding window → recurrences → normalisation → COCOMO/FP/V(G) → DFA minimisation.
- Sectional tests: 25 questions per unit, 30 minutes, target $\geq 85\%$.
- Maintain an **error log**: question, why wrong (concept / calculation / misread), correct idea.

Phase 3 — Mocks & Final Revision (Day 91–120)


- **25+ full-length mocks** (150 Qs, 180 min). Analyse each for at least as long as it took.
- Days 91–105: 1 mock every alternate day; fix weak areas on off days.
- Days 106–115: 1 mock daily.
- Days 116–120: only revision — [Formula Sheet](#), Quick Revision Boxes of each unit, error log. No new topics.

Score Tracker (fill in after every mock)

Mock	P1 /100	P2 /200	Total	Weakest unit	Action
1					
2					
3					
...					

Target trajectory: 180 → 210 (mock 5) → 235 (mock 12) → 250+ (mock 20 onwards, consistently).

Exam-Hall Strategy (3 hours, 150 questions, no negative marking)

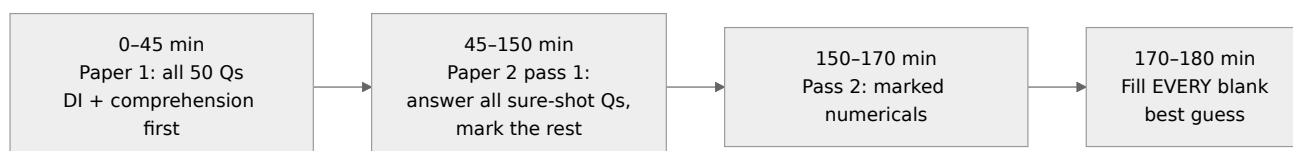

1. **Paper 1 in ≤ 45 minutes** — it carries 1/3 marks with easier questions; don't over-invest.
2. **Paper 2 two-pass method**: pass 1 answers what you know in < 40 s; mark anything needing long calculation.
3. **Statement/assertion questions**: evaluate each statement independently; eliminate options.
4. **Match-the-following**: fix the one pair you are surest of, then eliminate options.
5. **Never leave anything blank** — no negative marking. For pure guesses, eliminate first.
6. Watch for **"NOT"** / **"incorrect"** / **"false"** in question stems.

Unit	Book
------	------

Recommended Standard Books (for depth where needed)

Unit	Book
Discrete	Kenneth Rosen — <i>Discrete Mathematics and Its Applications</i>
Optimization	Hamdy Taha — <i>Operations Research</i>
COA	M. Morris Mano — <i>Computer System Architecture</i>
C/C++	Kernighan & Ritchie; E. Balagurusamy
Graphics	Hearn & Baker — <i>Computer Graphics, C Version</i>
DBMS	Korth / Navathe
OS	Galvin (Silberschatz) — <i>Operating System Concepts</i>
SE	Roger Pressman — <i>Software Engineering</i>
Algorithms	Cormen (CLRS); Horowitz–Sahni
TOC	Peter Linz; Hopcroft & Ullman
Compilers	Aho, Lam, Sethi, Ullman (Dragon book)
Networks	Forouzan — <i>Data Communications and Networking</i> ; Tanenbaum
AI	Rich & Knight; Russell & Norvig; S.N. Sivanandam (fuzzy, GA, ANN)
Paper 1	Any standard Paper 1 guide + NTA official papers

Weekly Checklist

- ☐ 6 days study + 1 day revision & error-log review
- ☐ All diagrams of the week redrawn from memory
- ☐ At least 150 PYQ/practice questions solved
- ☐ One full or sectional mock analysed