# Alert() Confirm() Prompt()



Programm

## 3 types of pop-up box

All of the popups open a modal window.


The user cannot interact with the rest of the components of the web page without responding to this window first.

- 1) Alert Box
- 2) Confirmation Box
- 3) Prompt Box




### **Alert Box**

- Used to inform/alert the user and notify about an event.
- Contains only one button, named 'OK', and returns nothing as output.
- 3) Regular syntax of it: alert("message")

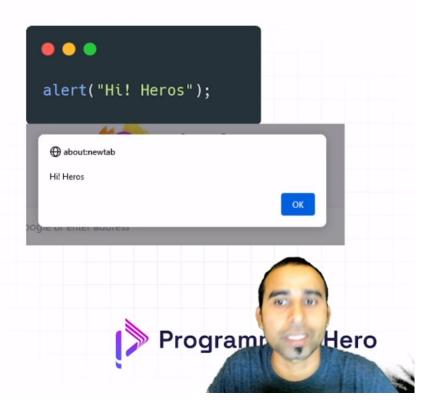

### **Confirmation Box**

- Provides user with a choice and notify about an event.
- This type of popup box has two buttons, named 'OK' and 'Cancel', and return 'true' and 'false' depending on the respective button click.
- Regular syntax of it: confirm("message")

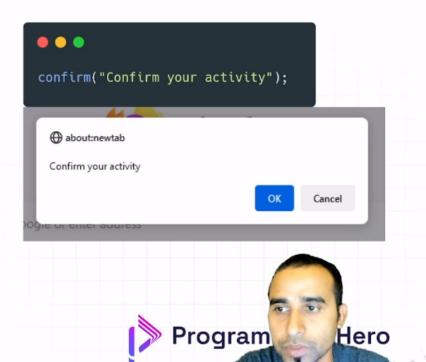

# Alert vs Confirmation

- Is used if we want the information comes through to the user.
- Need to click "OK" to proceed when an alert box pops up.
- Always return true we always need to click on "OK" to proceed further.

- □ Is used if we want the user to verify or accept something.
- Need to click either "OK" or "Cancel" to proceed when a confirmation box pops up.
- □ Return true if we click "OK", false if we don't click on "OK".





### **Prompt Box**

- Interaction with user is possible by asking the user to input some information.
- 2) Stores the user information.
- It has two button: 'Ok' and 'Cancel'. If the user clicks 'OK' the box returns the input value. If the user clicks 'Cancel' the box returns null.
- 4) Regular syntax of it: prompt("message")



## 3 types of Prompt Box

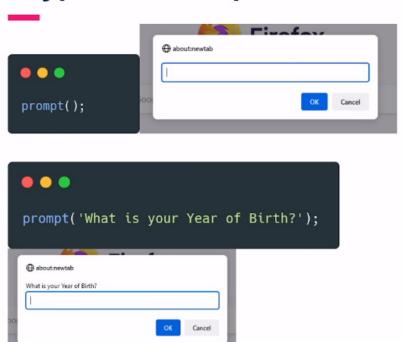

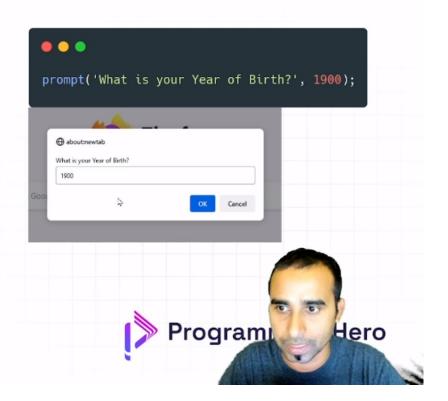

# Thank you!

B

