



Conferences & Workshops

The 35th DEXA Conferences and Workshops
26-28 August 2024
Naples, Italy

R-DiP: Re-ranking based Diffusion Pre-computation for Image Retrieval

Tatsuya Kato, Takahiro Komamizu, and Ichiro Ide




NAGOYA
UNIVERSITY



Contents
Science Lab.

Content-Based Image Retrieval (CBIR)

- Goal: find images containing a specified object in a query image
- Efficiency-Effectiveness Trade-off

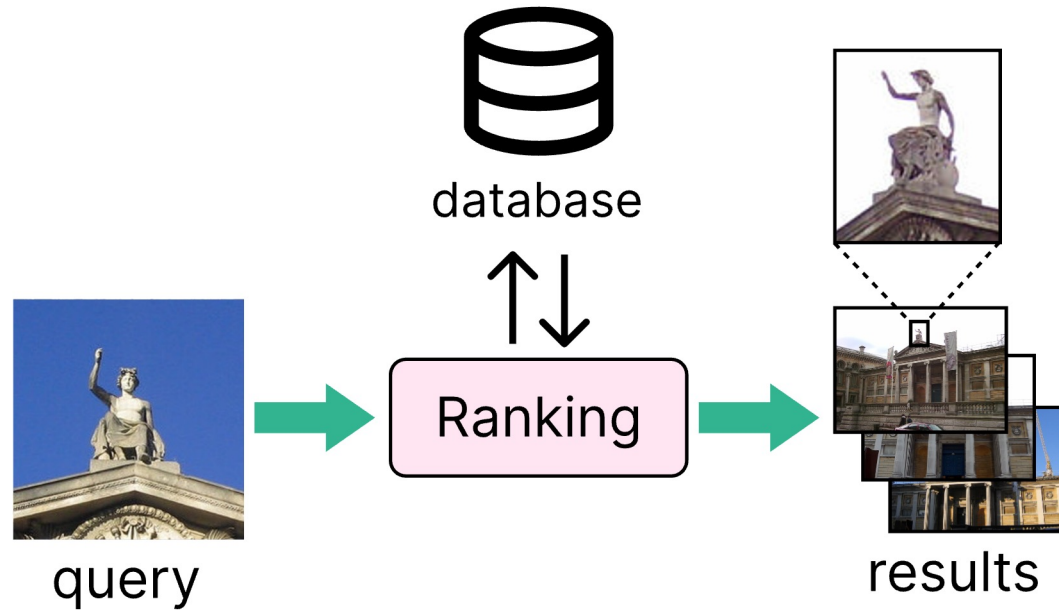


		Efficiency	Effectiveness
Existing Approaches	NN-based re-ranking	×	○
	Offline Diffusion	○	△
Objective of this paper		○	○

Difficulties of CBIR

- Different **Angle** – Diffusion is strong to this




- Different **Viewpoint** – NN-based re-ranking is strong to this

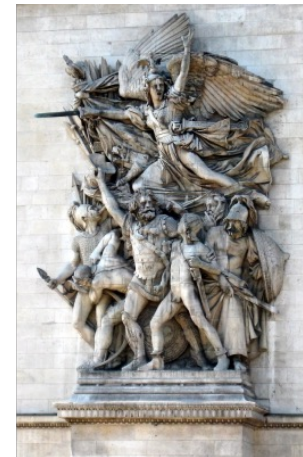

Related Work: Diffusion [9]

1. Graph Construction

- Each node is connected to k nearest neighbors based on image similarities
- Nodes are query and database images

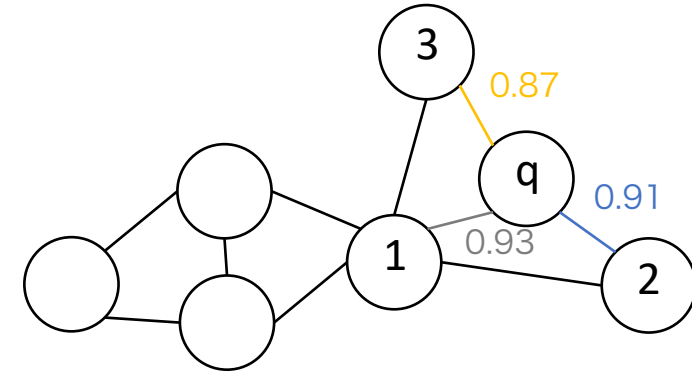


2. Graph Normalization

- Normalize similarities By

$$S = D^{-\frac{1}{2}} A D^{-\frac{1}{2}}$$

D is diagonal matrix where $d_{ii} = \sum_{j=1}^N a_{ij}$

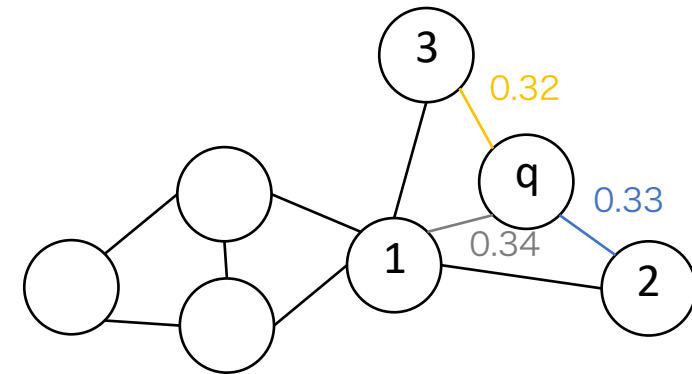


[9] Iscen, A., et al.: Efficient diffusion on region manifolds: Recovering small objects with compact CNN representations. Proc. 2017 IEEE Conf. on Computer Vision and Pattern Recognition (CVPR), pp. 926–935. IEEE (2017)

Related Work: Diffusion [9]


3. Initialization

- State of the ranking scores $f^t = [f_q^t, f_d^t]^\top \in \mathbb{R}^{1+n}$
- Initialization: $f_q^0 = 1, f_d^0 = 0 \rightarrow f^0 = [1, 0, 0, \dots, 0]^\top$

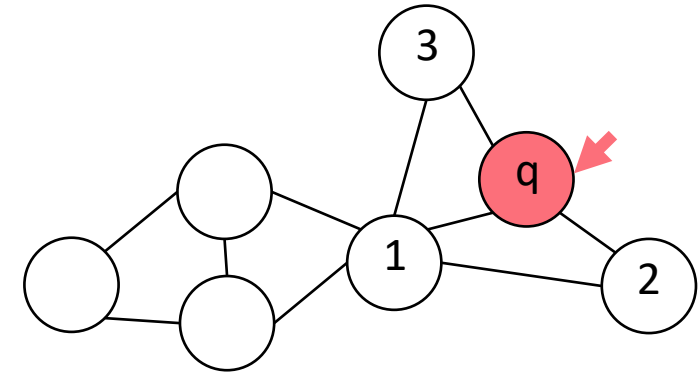

4. Random Walk: $f^{t+1} = \alpha S f^t + (1 - \alpha) f^0$

- Closed form solution $f^\infty = (1 - \alpha)(I - \alpha S)f^0$

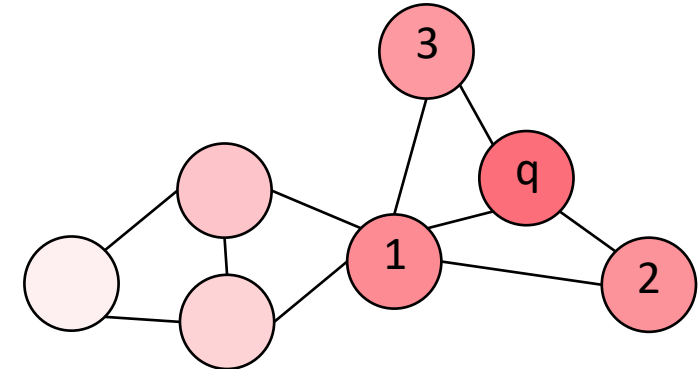


[9] Iscen, A., et al.: Efficient diffusion on region manifolds: Recovering small objects with compact CNN representations. Proc. 2017 IEEE Conf. on Computer Vision and Pattern Recognition (CVPR), pp. 926–935. IEEE (2017)

Related Work: Offline Diffusion [29] (Offline)

Idea: Similarity calculation on the database images is pre-computed.

1. Graph Construction and Normalization


- Each node is connected to k nearest neighbors based on image similarities
- Nodes are only database images

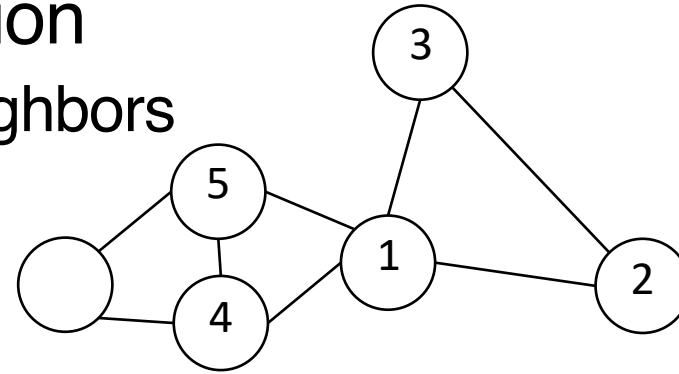


2. Perform diffusion from each node, repeatedly

- Treating each node as the query
- The offline result is $\mathcal{C} = [c_1, c_2, \dots, c_n]^T, c_i \in \mathbb{R}^n$

$c_1 =$

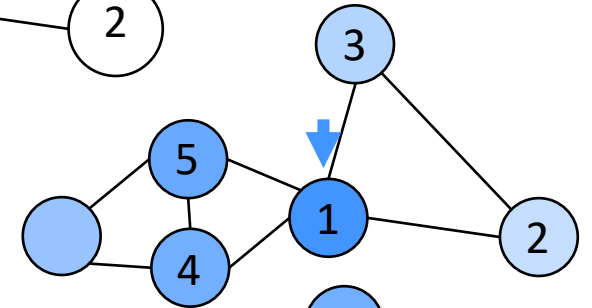

$c_2 =$

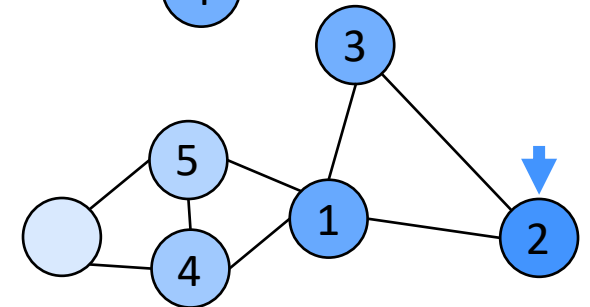


[29] Yang, F., et al.: Efficient image retrieval via decoupling diffusion into online and offline processing. Proc. 33rd AAAI Conf. on Artificial Intelligence (AAAI), pp. 9087–9094. AAAI Press (2019)

Related Work: Offline Diffusion [29] (Online)

Idea: Linear combination of pre-computed and similarities to query image

1. Perform k -NN search


- $S = [s_1, s_2, \dots, s_n], s_i = \begin{cases} \text{sim}(q, i) & \text{if } i \in k\text{NN} \\ 0 & \text{else} \end{cases}$

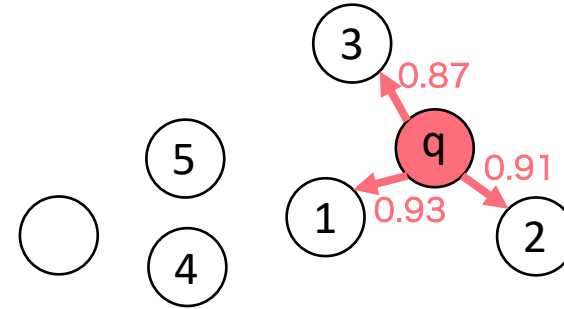

2. Linear Combination: $F = S \cdot C$

- For example,

- $$F = \begin{bmatrix} 0.93 \times c_{1,1} + 0.91 \times c_{2,1} + 0.87 \times c_{3,1} \\ 0.93 \times c_{1,2} + 0.91 \times c_{2,2} + 0.87 \times c_{3,2} \\ \vdots \\ 0.93 \times c_{1,n} + 0.91 \times c_{2,n} + 0.87 \times c_{3,n} \end{bmatrix}^T$$

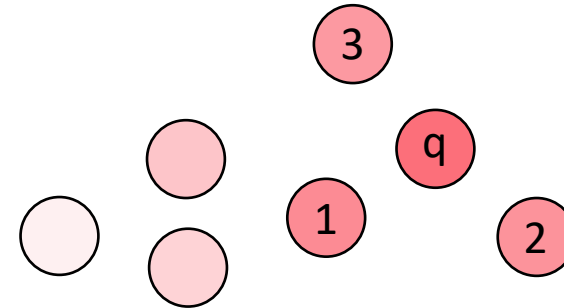

[29] Yang, F., et al.: Efficient image retrieval via decoupling diffusion into online and offline processing. Proc. 33rd AAAI Conf. on Artificial Intelligence (AAAI), pp. 9087–9094. AAAI Press (2019)

Proposed Method: R-DiP


Idea: Improve Offline Diffusion to be effective.

- Room for improvement in graph construction
 - Replace the simple k -NN search by highly effective re-ranking approaches
- Inherit the benefit of Offline Diffusion:
 - No additional overhead in the search process

Offline Diffusion

1. Graph Construction and Normalization

- Each node is connected to k nearest neighbors based on image similarities
- Nodes are only database images

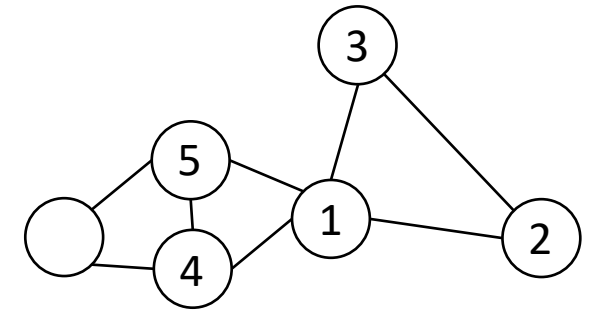

Offline Step of R-DiP

1. Perform k_m -NN search

- Search k_m nearest neighbors from each node based on image similarities


2. Re-calculate similarities

- By more sophisticated NN-based re-ranking model

3. Graph Construction

- Re-construct the k_d -NN graph ($k_m \geq k_d$)

4. The offline process is the same as Offline Diffusion

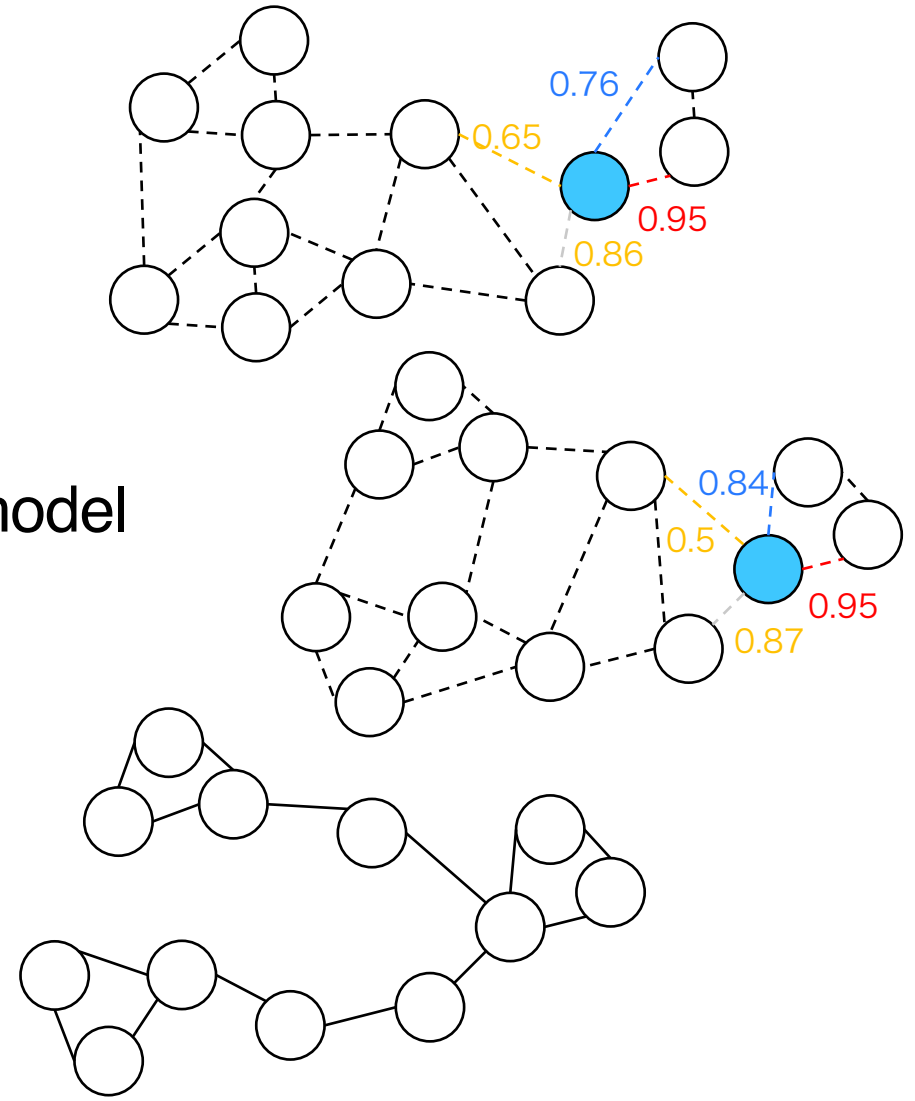

Wrap-up of the R-DiP

R-DiP: Offline-Diffusion + Re-ranking Model(s)

- Efficient and Effective
 - Efficiency: Should be comparable to Offline Diffusion.
 - Effectiveness: Should be improved through the similarity re-calculation.
- Flexibility to use any (one or more) similarity re-calculation model
 - Similarity re-calculation is re-ranking model independent
 - Models can be selected based on the objective
 - (future direction) Potentially multiple models can be used simultaneously.

Experimental Setup


- Implementation of R-DiP: Offline Diffusion [29] + SuperGlobal [21]
- Comparison Methods
 - Offline Diffusion: Verify the similarity re-calculation improves its effectiveness
 - SuperGlobal (SOTA re-ranking method): Verify improving efficiency
- Datasets: ROxford5k, RParis6k (Historical buildings and landmarks)
 - # Database images: 5,000 (ROxford5k), 6,000 (RParis6k)
 - # Query images: 70 for each dataset
 - + R1M Distractor set (about 1 million images): Similar domain images
- Evaluation metric: mean Average Precision (mAP)

[21] Shao, S., Chen, K., Karpur, A., Cui, Q., Araujo, A., Cao, B.: Global features are all you need for image retrieval and reranking. Proc. 19th IEEE/CVF Int. Conf. on Computer Vision (ICCV), pp. 11036–11046. IEEE (2023)

Evaluation of Effectiveness — ROxford5k


More effective than Offline Diffusion in most cases

-- Confirms the effectiveness of similarity re-calculation in the proposed method

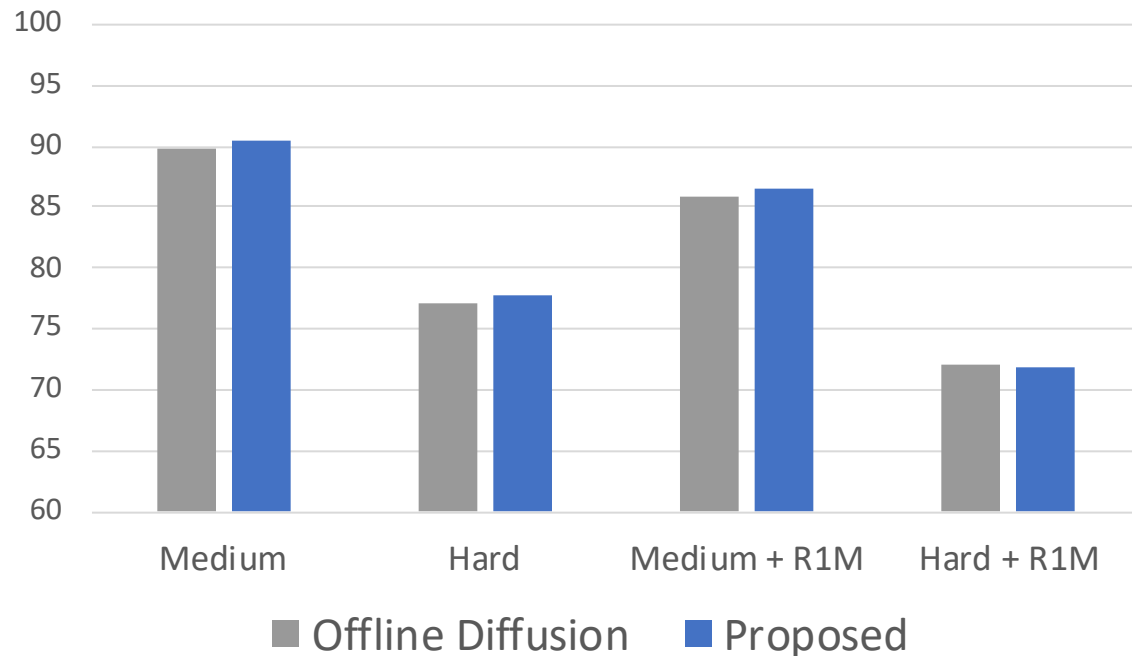



More effective than SuperGlobal on large-scale datasets

-- Suggests the effectiveness of combining diffusion and similarity re-calculation

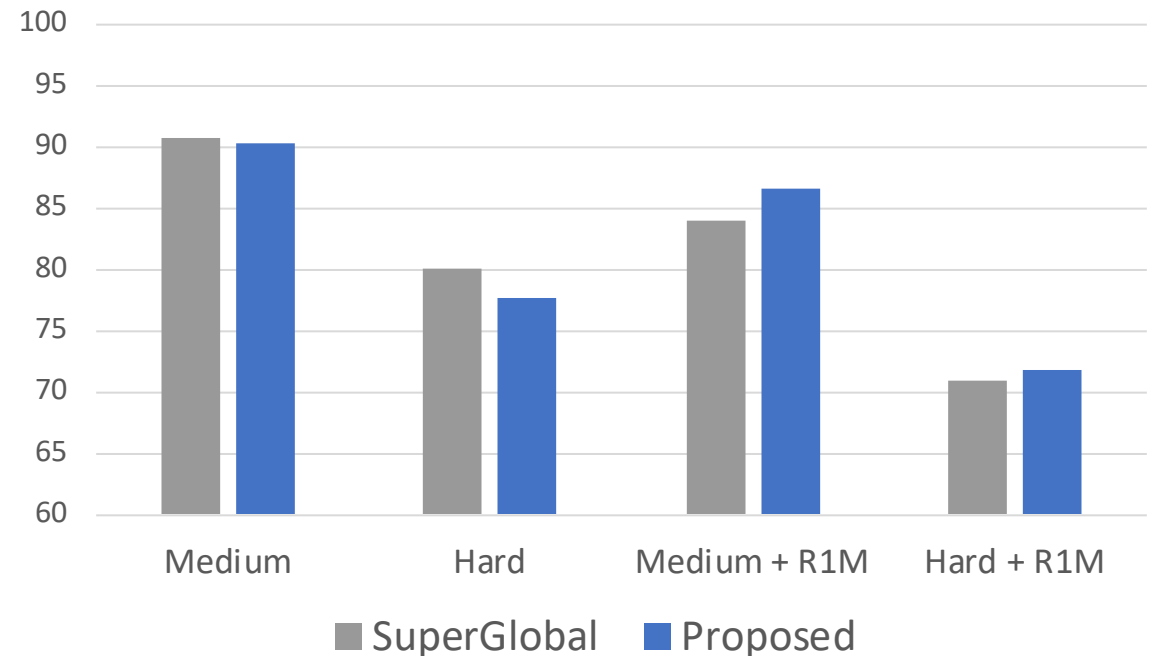



Evaluation of Effectiveness — RParis6k

- Outperforms all comparison methods
 - Significantly surpassing SuperGlobal, especially in large-scale datasets

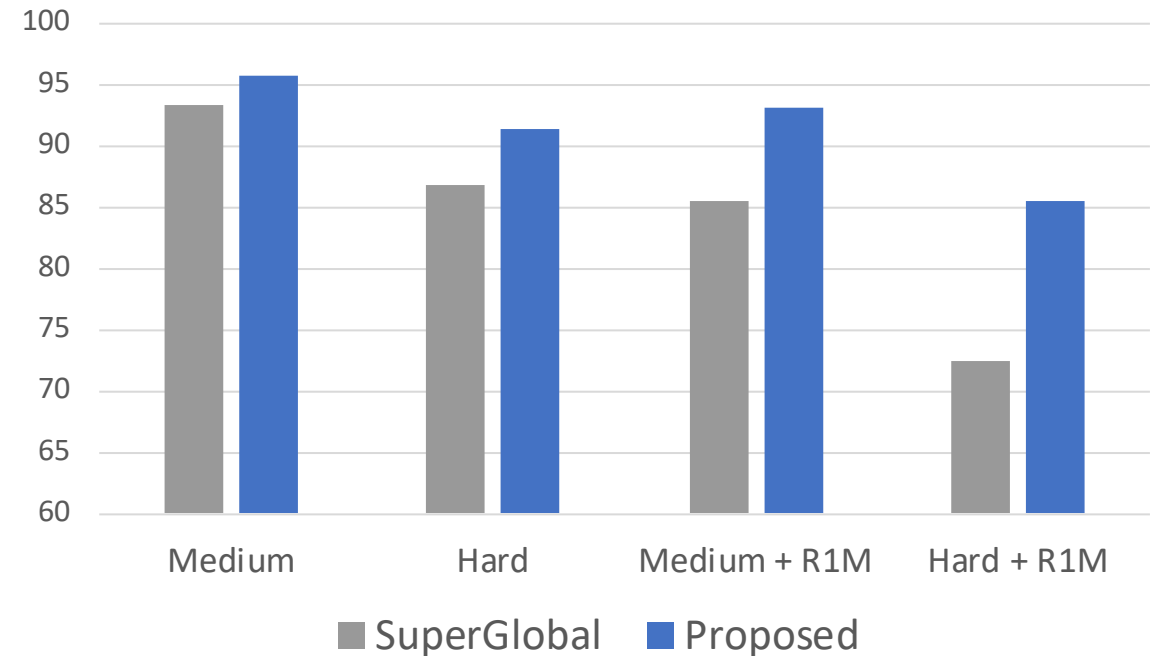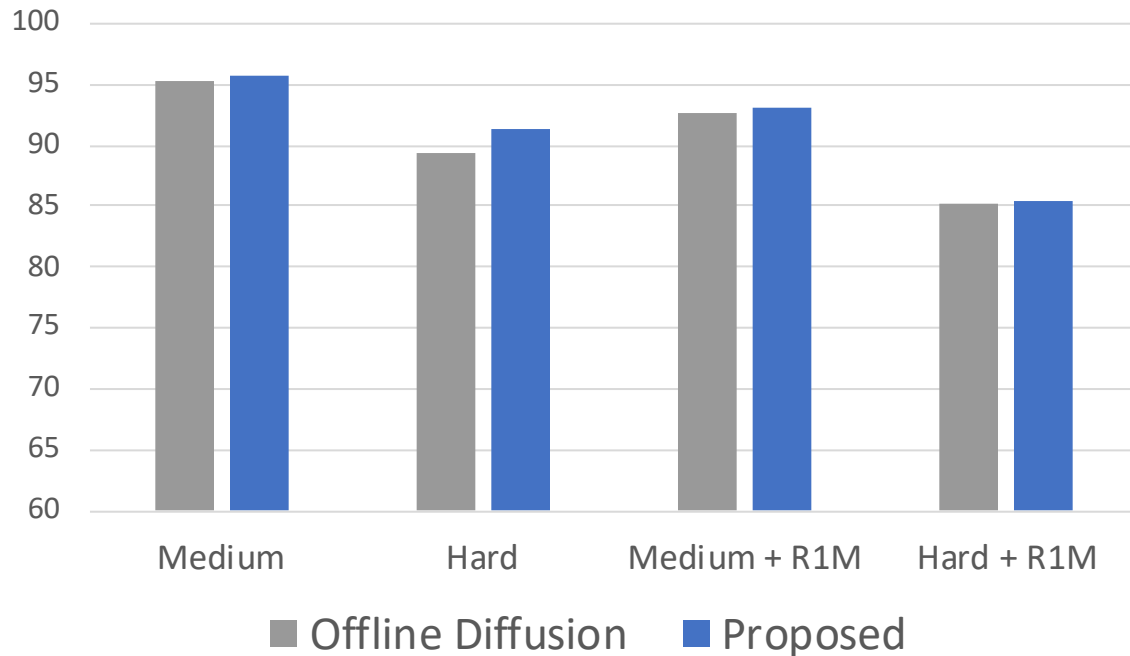

Evaluation of Efficiency

- Measure retrieval time per query [ms]
- The same efficiency as Offline Diffusion.
 - Approximately 75% reduction compared to SuperGlobal in large-scale datasets

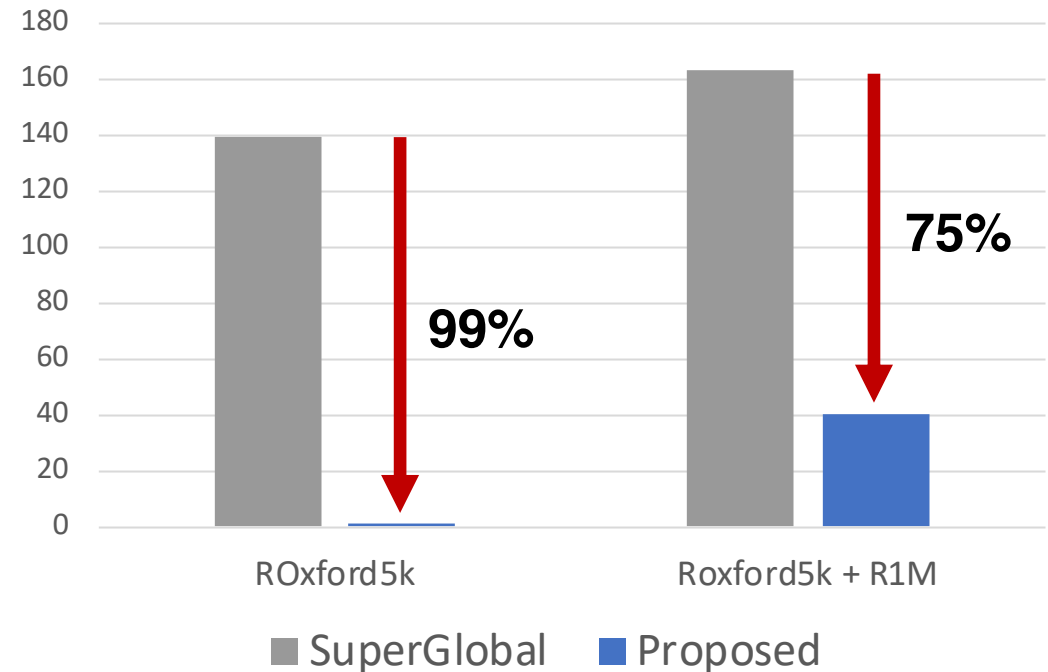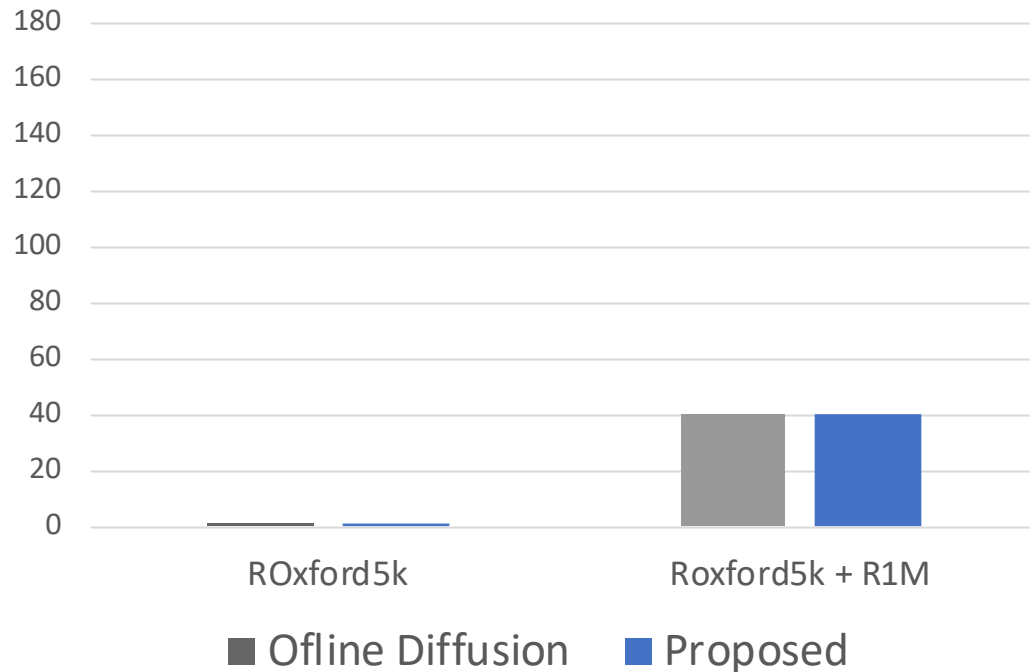

Conclusion

- R-DiP: an image retrieval framework
 - Efficient and Effective
 - Flexible to use any similarity re-calculation model
 - Maintains effectiveness even with large-scale datasets
- Future Works
 - Utilizing various similarity re-calculation models
 - Integrating multiple similarity re-calculation models
 - Addressing the overhead of pre-computation with similarity re-calculation models