

# TakeTopDSH Team

## User Guide


### ## Table of Contents

- 1. Overview
- 2. Platform Login
- 3. Admin Page
- 4. DSH Workbench
- 5. Other Member Operations
- 6. DSH Operations
- 7. Language
- 8. Platform Support

This guide is for users and covers: Installation → Login → Management parameter settings → Open Workbench → File Manager / My Tasks → task assignment, in → Member DSH usage!

### 1. Installation

**Download the installation file: go to <https://github.com/TakeTopITS/TakeTopDSHTeam> , click the download button as shown below, then unzip the package.**

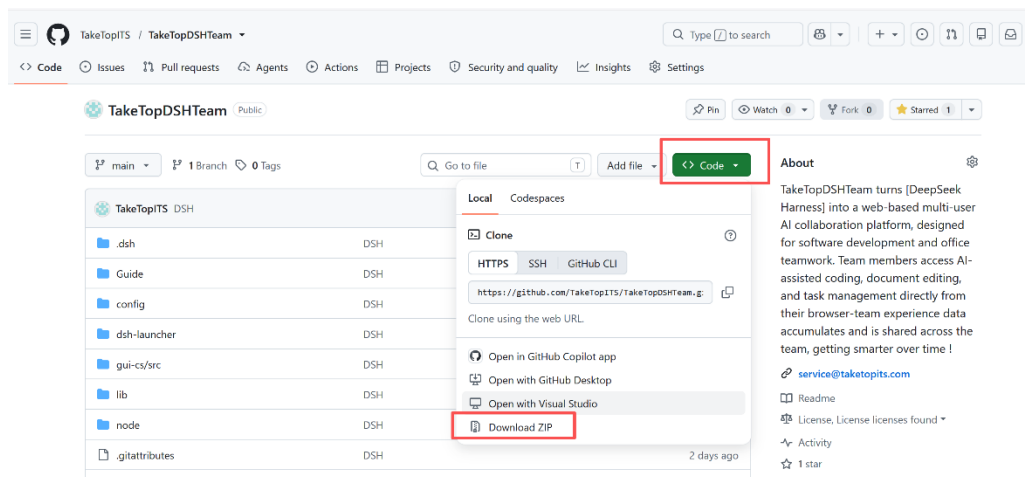

TakeTopDSH Team is a portable, copy-and-run application. Steps: copy the `TakeTopDshTeam` folder to the target machine → Windows: double-click `start.bat`; macOS/Linux: run `bash start.sh` → open `http://127.0.0.1:46001` in your browser → click **"Open DSH"** to start using it. Details below:

#### 1-1. Windows

1-1-1. Copy the entire `TakeTopDshTeam` folder to the target PC.

1-1-2. Double-click **`start.bat`** (if the port is occupied, right-click → Run as administrator).

1-1-3. Your browser will automatically open the login page at `http://127.0.0.1:46001`.

#### 1-2. macOS (Apple Silicon, arm64)

1-2-1. Copy the entire `TakeTopDshTeam` folder to the target Mac.

1-2-2. Open Terminal and navigate to the folder:

```
bash cd /path/to/TakeTopDshTeam bash start.sh
```

1-2-3. On first run, the built-in Node.js and `@deepseek-ai/dsh` dependency are automatically extracted — **fully offline**, no extra downloads or compilation needed.

1-2-4. Your browser will automatically open the login page at `http://127.0.0.1:46001`.

#### 1-3. Linux (x64 / arm64)

1-3-1. Copy the entire `TakeTopDshTeam` folder to the target machine.

1-3-2. Open Terminal and navigate to the folder:

```
bash cd /path/to/TakeTopDshTeam bash start.sh
```

1-3-3. On first run, the built-in Node.js and `@deepseek-ai/dsh` dependency are automatically extracted — **fully offline**, no extra downloads or compilation needed.

1-3-4. Your browser will automatically open the login page at `http://127.0.0.1:46001`.


## 2. Platform Login

After each restart, open the TakeTopDshTeam folder. You will see the two files below. Run the appropriate file for your system to open the login page:

|                                                                                                    |                |               |      |
|----------------------------------------------------------------------------------------------------|----------------|---------------|------|
|  <b>start.bat</b> | 2026/9/8 21:59 | Windows 批处理文件 | 3 KB |
|  <b>start.sh</b>  | 2026/9/7 0:24  | SH 文件         | 4 KB |

> - Windows: double-click **start.bat**

> - macOS / Linux: run **bash start.sh**

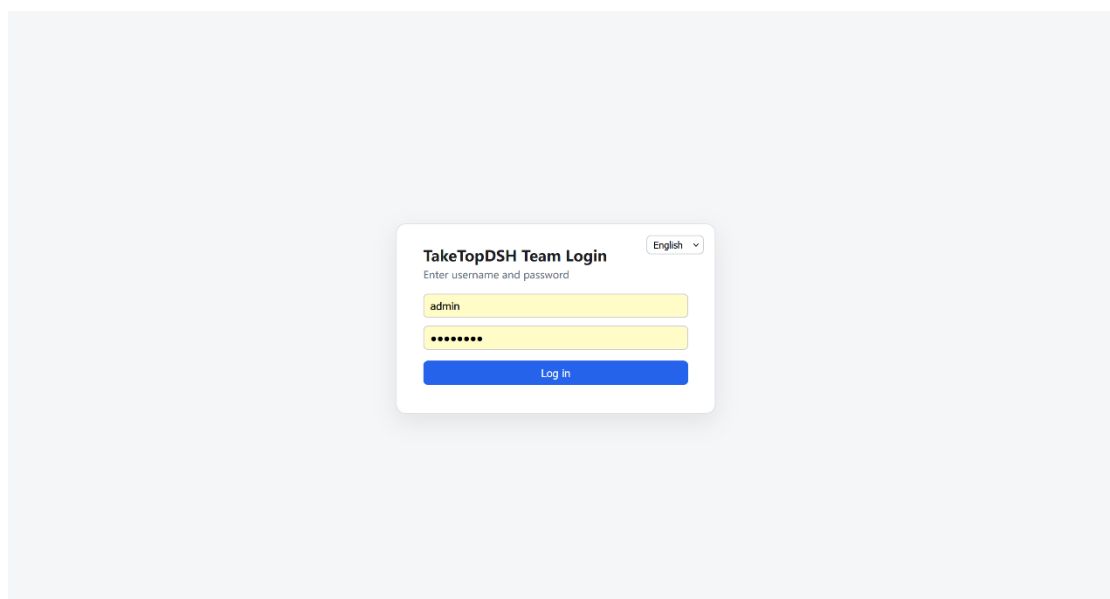

Enter username `admin` and password `12345678` to log in. After the first login, the TakeTopDSH Team backend service (TakeTopDSHLauncher) will continue running in the background. As long as the computer has not been restarted, simply open `http://127.0.0.1:46001` again in your browser to return to the login page. If the launcher has closed (e.g. after a restart), re-run the startup program above.  
<http://127.0.0.1:46001>

## 3. Admin Page

After an admin user logs in, the following page is displayed. This is the admin management page.

admin (admin)
Change Password
Logout
English

### TakeTopDshTeam Launcher

Port
46000
Start
Stop
Open DSH

Running (PID 26536)

Configuration
Instance Manager (multi-user)
Update

appsettings URL
http://127.0.0.1:46000
Save

External URL
e.g. http://server-ip:8080, empty = disabl

Workspace path
E:\WorkBuddy\WorkSpace
Browse
Save

defaultLang
English
Save

Logs
Clear

```

[2026-09-12 15:45:05] [backup] archived ericliu/session-23a6b8eb-7552-4722-83ff-02e13a837eca (12902 B)
[2026-09-12 15:45:05] [backup] archived ericliu/session-2fbd5677-651b-4cee-9600-0238c1ae685e (13044 B)
[2026-09-12 15:45:05] [backup] archived ericliu/session-4ff67d44-13a3-40f0-b0fd-64843f208596 (409 B)
[2026-09-12 15:45:05] [backup] archived ericliu/session-531d3da2-985a-4a85-83ea-6ee285a30875 (16906 B)
[2026-09-12 15:45:05] [backup] archived ericliu/session-62662c43-533b-49f4-825a-e6723ebd00e8 (20060 B)
[2026-09-12 15:45:05] [backup] archived ericliu/session-78437b9e-e705-4bb1-81c6-fe0dca608ab6 (12933 B)
[2026-09-12 15:45:05] [backup] archived ericliu/session-8d7d3c54-c2c7-4cad-b323-1110b8ad8b18 (183427 B)
[2026-09-12 15:45:05] [backup] archived ericliu/session-924fb049-6339-49d6-bc7e-25b6e92ec04a (18133 B)
[2026-09-12 15:45:05] [backup] archived ericliu/session-93c0daa7-fcbd-4c07-8f89-1e8815eaf254 (13233 B)
[2026-09-12 15:45:05] [backup] archived ericliu/session-93c5745a-a610-421a-9b5b-c9e3cf173562 (54459 B)
[2026-09-12 15:45:05] [backup] archived ericliu/session-a96567f5-c7c6-4fa6-98e3-67b0a3d7cb40 (400 B)
[2026-09-12 15:45:05] [backup] archived ericliu/session-cb2085ac-3f67-41dc-ba36-d9f1a5f9d86b (21324 B)
[2026-09-12 15:45:05] [backup] archived ericliu/session-e38592c8-ffcd-4b4a-9314-6adaf574c802 (16329 B)
[2026-09-12 15:45:05] [backup] [convert-sessions] no backup dir

```

You can: start/stop, open DSH, configure, manage instances, and change passwords. Key sections are explained below; the rest is self-explanatory.

### 3-1、 Configuration

#### Configuration

appsettings URL
http://127.0.0.1:46000
Save

External URL
e.g. http://server-ip:8080, empty = disabl

Workspace path
E:\WorkBuddy\WorkSpace
Browse
Save

defaultLang
English
Save

#### 3-1-1. Set Workspace Path

Setting the workspace path defines the platform's workspace directory. This directory can be located on any drive, but plan carefully and ensure sufficient capacity, as all data entered and files uploaded in TakeTopDSH Team are stored in this directory.

### 3-1-2. Set External URL

If you also want to access the platform from an external network, you need to set the external URL. Assign a public IP to the server, then enter it here. For example, if the public IP is 188.88.88.88, set it to <http://188.88.88.88:46000>. If unsure, consult your network administrator to ensure correct configuration.

### 3-2、 Add Member Users

| Username | Port  | Workspace                      | State   | Actions                         |
|----------|-------|--------------------------------|---------|---------------------------------|
| ericliu  | 46002 | E:\WorkBuddy\WorkSpace\ericliu | Running | Open Stop Delete Reset Password |

You can add member users here. Note that usernames should use English letters, not Chinese. Remember the password you set for each user, e.g. `12345678`. Members can change their own password after logging in. The member's workspace directory does not need to be set; it is automatically created as "main workspace directory + username".

### 3-3、 Platform Update

Since TakeTopDSH Team is an AI collaboration platform built on DeepSeek Harness, when DeepSeek Harness releases a new version, you can click this button to upgrade and ensure you are using the latest features.

## 4. DSH Workbench


After completing setup on the admin page, click the **\*\*Open DSH\*\*** button in the TakeTopDSH Team launcher area to open the workbench page.

**TakeTopDSH Team Launcher**

Port 46000 [Start] [Stop] [Open DSH]

● Running (PID 19596)


The workbench page is shown below with a split layout: the left side is the file manager / My Tasks, and the right side is the DSH chat interface.

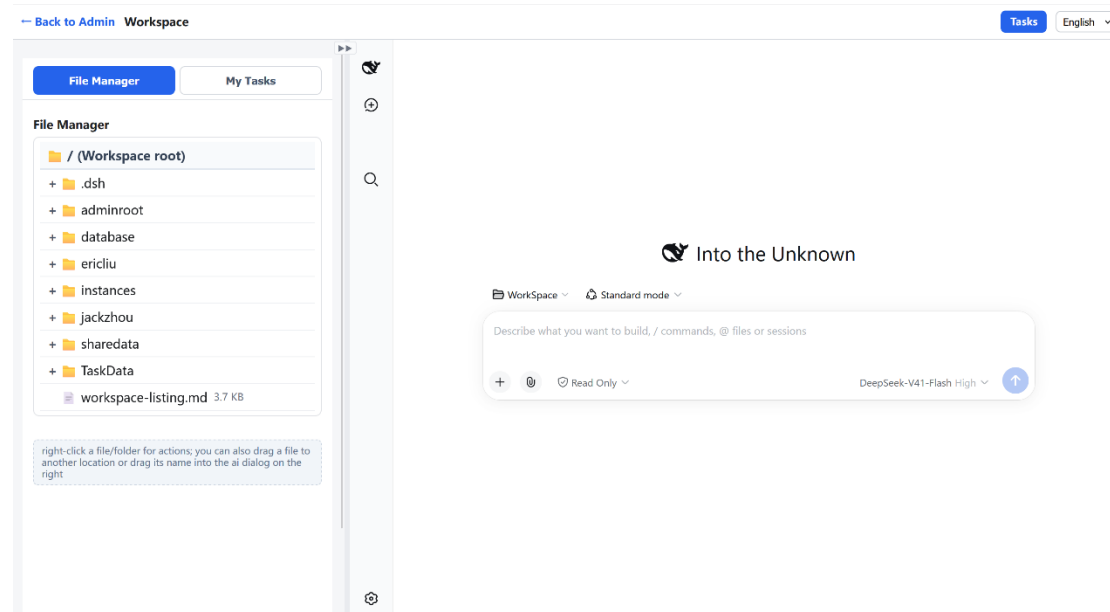

#### 4-1. Configure AI LLM API Key

Although TakeTopDSH Team is built on DeepSeek Harness, you can also connect to other LLMs such as OpenAI, Kimi, Claude, Qwen, and even local models.

First, click the settings icon in the bottom-left corner of the right sidebar to open the settings page, as shown below.

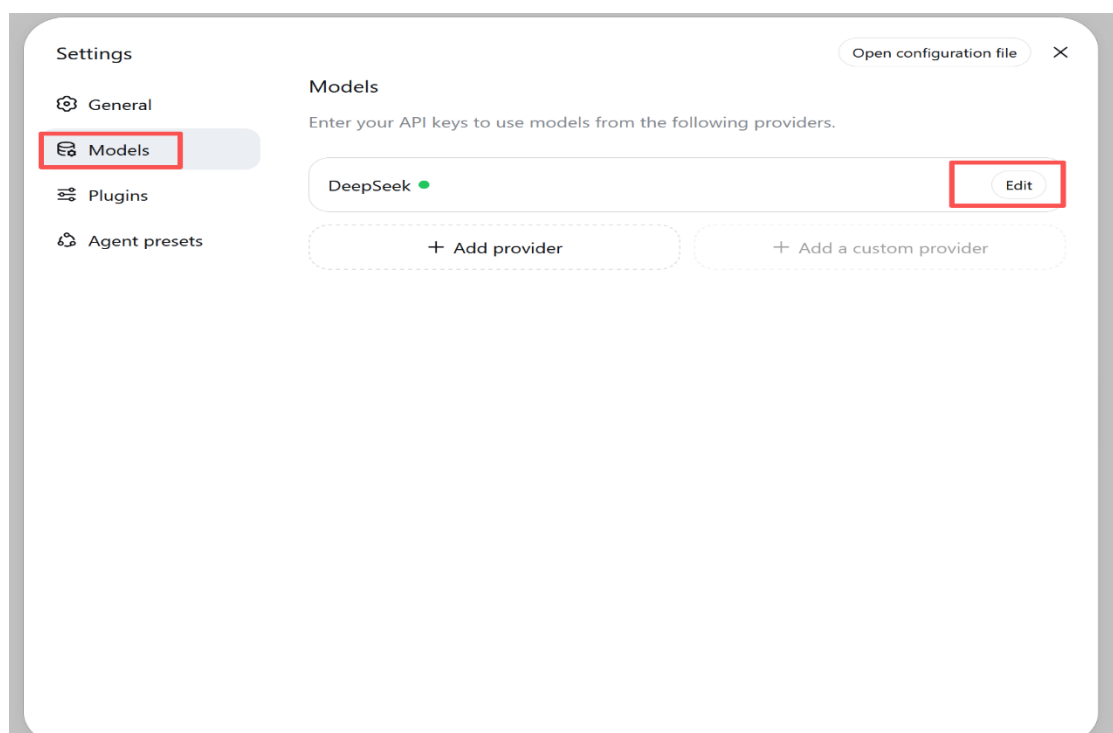


Click the Edit button, as shown below. You can select from the listed models, or click Add model to add a new one. After selecting, enter the API Key you obtained. For detailed setup instructions, refer to the website of the LLM you want to connect.

After configuring the LLM API Key, you can use DSH for AI conversations, as shown below.

#### 4-2. File Manager

The first tab on the left sidebar of the workbench is the file manager, as shown below. It displays files in your workspace directory. You can only operate on files in this workspace directory. You can upload files to this directory (supports multi-select) and perform operations such as open, download, move, rename, and delete. You can also drag selected file names to the DSH input box on the right.

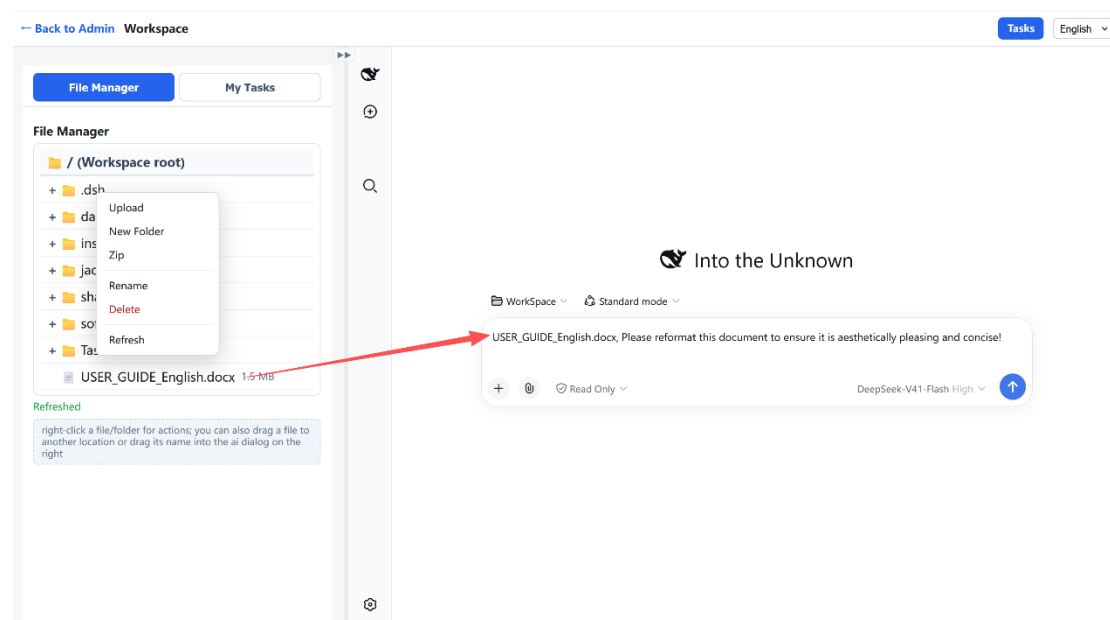

#### 4-3. My Tasks

Click the "My Tasks" tab, as shown below. It displays the task list assigned to you. Opening this page automatically widens the left pane to 70% for easier reading. The "No." column shows the task's hierarchical number (1, 1-1, 1-2-1...). Here you can: click a task name to preview it; drag a task name into the AI chat box to start processing; click "Continue Assign" to create follow-up (sub) tasks for other members (sub-tasks are added to that member's task list, and the parent task automatically expands after saving); click + in the sub-task column to inline-expand the task's sub-task tree (multi-level; no + if there are no sub-tasks); and use Edit / Delete (only available when you created the task and it has no sub-tasks). You can also click "Feedback" to fill in feedback, paste images, or use "Attach Files" to add attachments.

[Back to Admin](#) Workspace

TasksEnglish

File ManagerMy Tasks

| No. | Type     | Name                               | Feec |
|-----|----------|------------------------------------|------|
| 3   | UnitTest | test project plan to task function | Fee  |

you can drag a task name into the ai dialog on the right

Into the Unknown

WorkspaceStandard mode

test project plan to task function

+@Read Only

DeepSeek V41-Flash High

[Back to Admin](#) Workspace

TasksEnglish

File ManagerMy Tasks

| eedback  | Continue Assign | Created By | Assigned At      | Status     | Files                  | Actions    |
|----------|-----------------|------------|------------------|------------|------------------------|------------|
| Feedback | Continue Assign | jackzhou   | 2026-09-11 16:29 | Processing | USER_GUIDE_Chinese.pdf |            |
| Feedback | Continue Assign | admin      | 2026-09-12 11:54 | Processing |                        | EditDelete |
| Feedback | Continue Assign | admin      | 2026-09-12 12:13 | Processing | README.md              | EditDelete |
| Feedback | Continue Assign | jackzhou   | 2026-09-12 12:32 | Processing |                        |            |


Into the Unknown

WorkspaceStandard mode

Describe what you want to build, / commands, @ files or sessions

+@Read Only



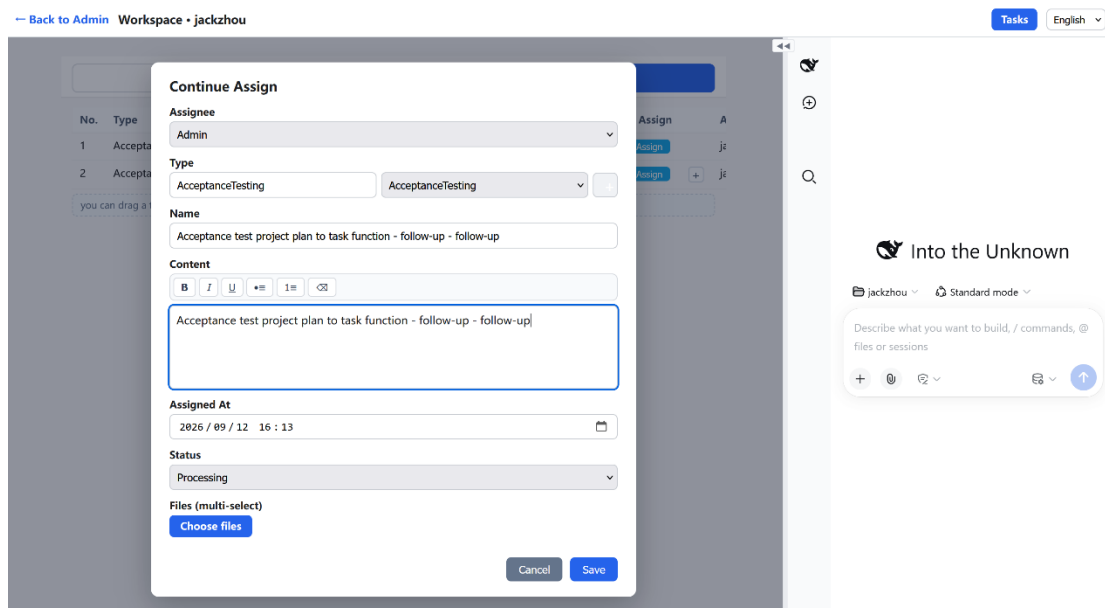


Task feedback: the input box above supports text and pasted images. Click the "Attach Files" button below to upload attachments.

#### 4-4. Task Assignment


Click the "Task Assignment" button in the upper-right corner of the page to open the task assignment page, as shown below.

It displays all tasks you have created. The member list on the left is optional (for filtering). Click the "Add Task" button to open the dialog, and select the assignee from the "Assignee" dropdown. The "Type" field contains a text box, a dropdown, and a + button: you can select an existing type, or enter a new type and click + to add it (types are remembered). You can also change the assignee when editing a task; after saving, the task moves to the new assignee's task list. Each task row has a + column to inline-expand its sub-tasks; each sub-task stores its parent task's unique ID (UID), and the "No." column shows the hierarchical number (1, 1-1, 1-2-1...). Tasks without sub-tasks do not show +.



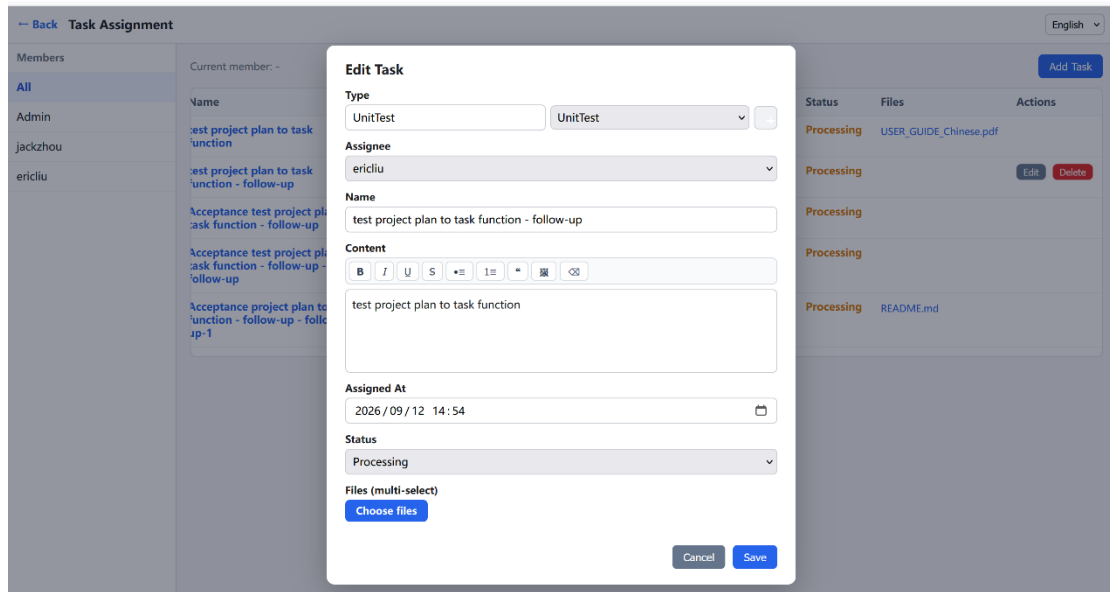

You can also click the "Feedback" button in the task list to evaluate how the member completed the task, and fill in your requirements and comments, as shown below. The operation is the same as above.

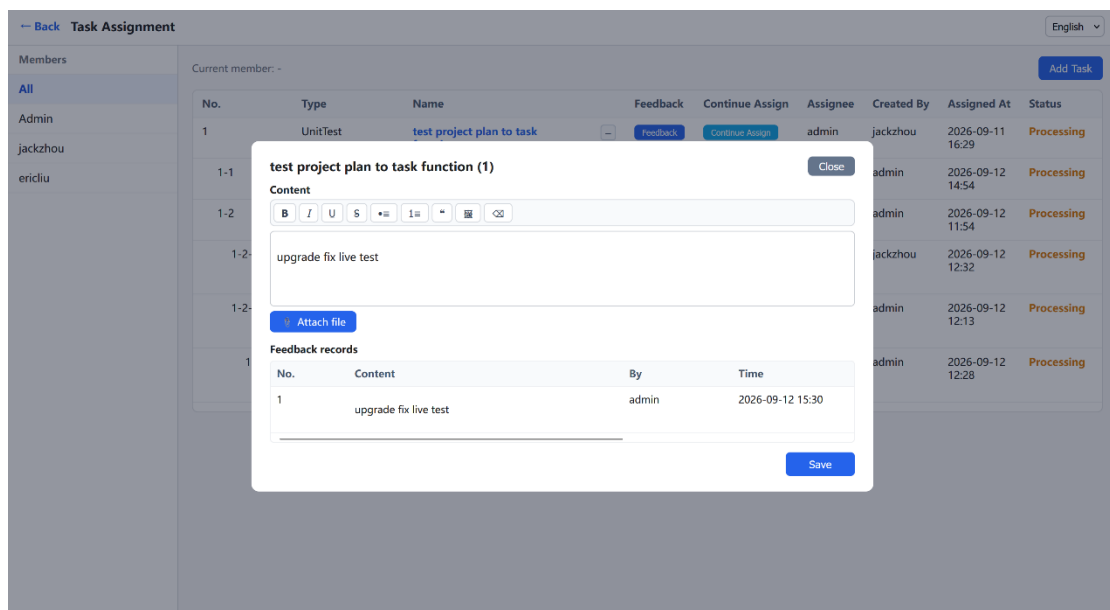


## 5. Other Member Operations

Members added by the admin on the admin page (e.g. ericliu added earlier) can also log in from the login page and access that member's management page, as shown below. It is simpler than the admin (admin) page.


On this page, you can click the "Start" button to start the DSH service. The first startup may be slow; after it starts, you can open that member's DSH page, as shown below.

The operation is the same as the admin, but note: members can only operate within their own file workspace and cannot see files in other workspaces.

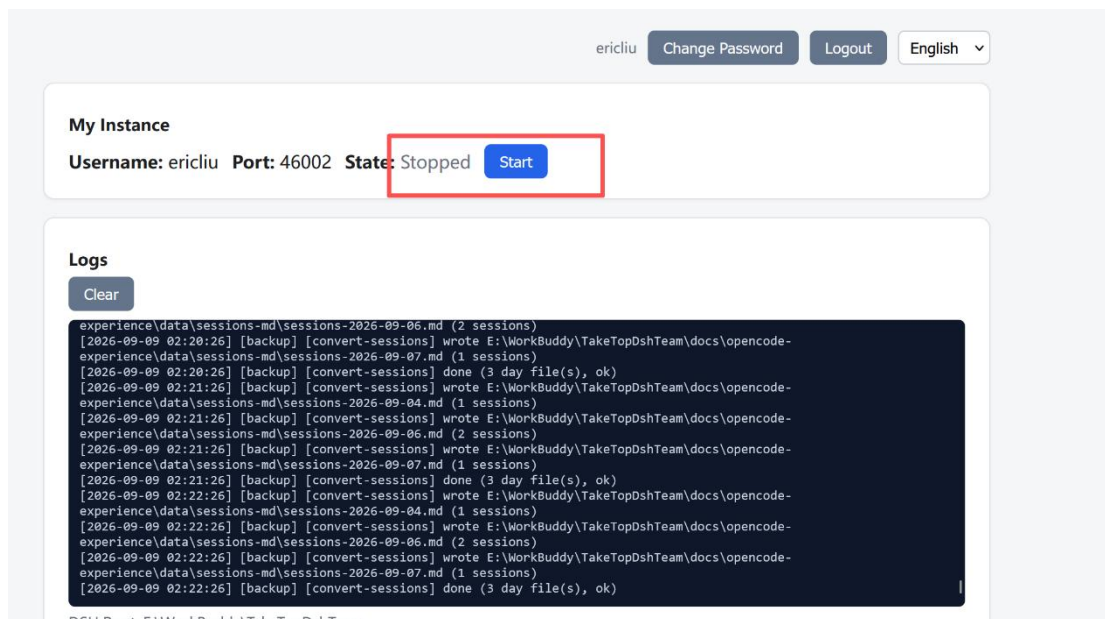

## 6. DSH Operations

After familiarizing yourself with the above page functions, you can use this AI Harness to work. For example, to modify a code file in the workspace directory, you can directly enter your desired modification instructions in the Harness input box, as shown below, then click the submit arrow button; it will call the connected LLM to complete the work.

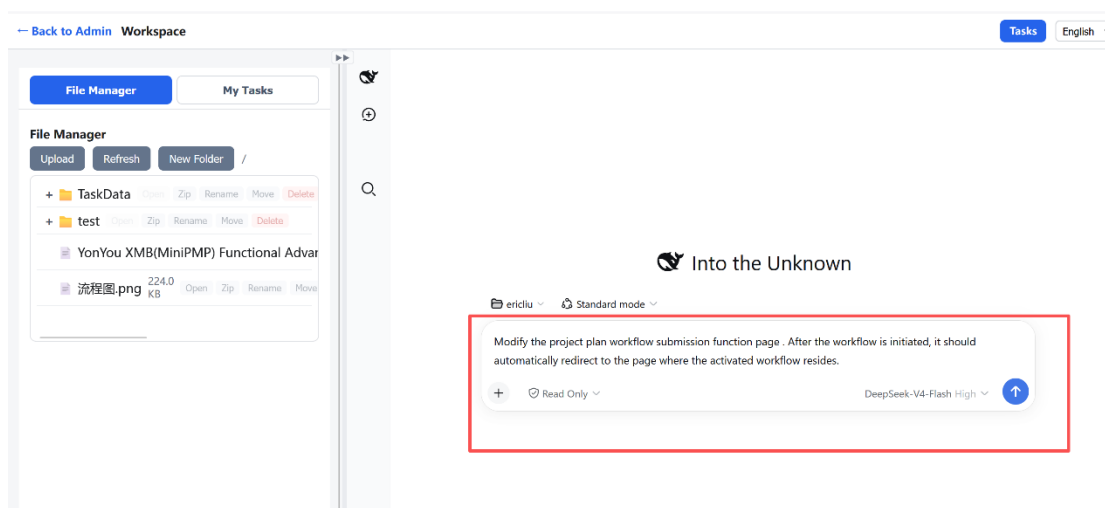

Of course, beyond software development, you can do other work such as modifying PPT files, drafting contracts, media processing, and engineering design, or

complete tasks assigned to you by others here.

## 7. Language

The console, workbench, file manager, task assignment, and task forms all support full English / Chinese switching. The login page uses the configured default language and can be switched at any time.

## 8. Platform Support

TakeTopDSHTeam is cross-platform: a single installation package covers Windows, macOS, and Linux, with fully offline installation — no compilation required, no extra downloads on the target machine.

|                               |                         |                                                                                                        |
|-------------------------------|-------------------------|--------------------------------------------------------------------------------------------------------|
| Platform                      | Node                    | @deepseek-ai/dsh<br>dependency                                                                         |
| Windows x64                   | Built-in, offline       | Built-in, offline                                                                                      |
| macOS / Linux (x64 and arm64) | Built-in (tar, offline) | Built-in (offline tarball);<br>falls back to npm install<br>only if the built-in package<br>is missing |