

TakeTopDSH Team

User Guide

Table of Contents

- [1. Installation
- [2. Platform Login
- [3. Management Page
- [4. DSH Workbench
- [5. Operations for Other Members
- [6. DSH Operation

This guide is intended for end users and clearly explains the entire process:
Installation → Login → Opening the Workspace → File Management / My Tasks →
Admin Task Assignment, Instance Management, Language Switching → Member DSH
Usage**.

I. Installation

TakeTopDSH Team is a portable software that requires no installation—just copy and use. Follow these steps: Copy the `TakeTopDshTeam` folder to the target machine → On Windows, double-click `start.bat`, On macOS/Linux, run `./start.sh` → Open your browser and go to `http://127.0.0.1:46001` → Click **"Open DSH"** to start using it. Detailed instructions are as follows:

1-1 Windows

- 1-1-1. Copy the entire `TakeTopDshTeam` folder to the target computer.
- 1-1-2. Double-click **`start.bat`** (or right-click → select "Run as administrator" if the port is occupied).
- 1-1-3. The browser will automatically open the login page at `http://127.0.0.1:46001`.

1-2 macOS (Apple Silicon, arm64)

- 1-2-1. Copy the entire `TakeTopDshTeam` folder to the target Mac.

- 1-2-2. Open Terminal, navigate to the folder:

```
bash cd /path/to/TakeTopDshTeam chmod +x start.sh./start.sh
```

- 1-2-3. On first run, it will automatically extract Node and install `@deepseek-ai/dsh` (**requires an internet connection once**).
- 1-2-4. The browser will automatically open the login page at `http://127.0.0.1:46001`.

1-3 Linux (x64 / arm64)**

- 1-3-1. Copy the entire `TakeTopDshTeam` folder to the target machine.
- 1-3-2. Open Terminal, navigate to the folder:

```
bash cd /path/to/TakeTopDshTeam chmod +x start.sh./start.sh
```

- 1-3-3. On first run, it automatically extracts Node (**already bundled, no download required**); only native dependencies for `@deepseek-ai/dsh` need **one-time online installation**, after which it works offline.
- 1-3-4. The browser will automatically open the login page at `http://127.0.0.1:46001`.


2. Platform Login

Each time you restart your computer, open the TakeTopDshTeam folder. Inside, you will see the following two files. Run the appropriate file for your operating system to open the login page.

 start.bat	2026/9/8 21:59	Windows 批处理文件	3 KB
 start.sh	2026/9/7 0:24	SH 文件	4 KB

> - Windows: Double-click **`start.bat`**

> - macOS / Linux: Run **`./start.sh`**

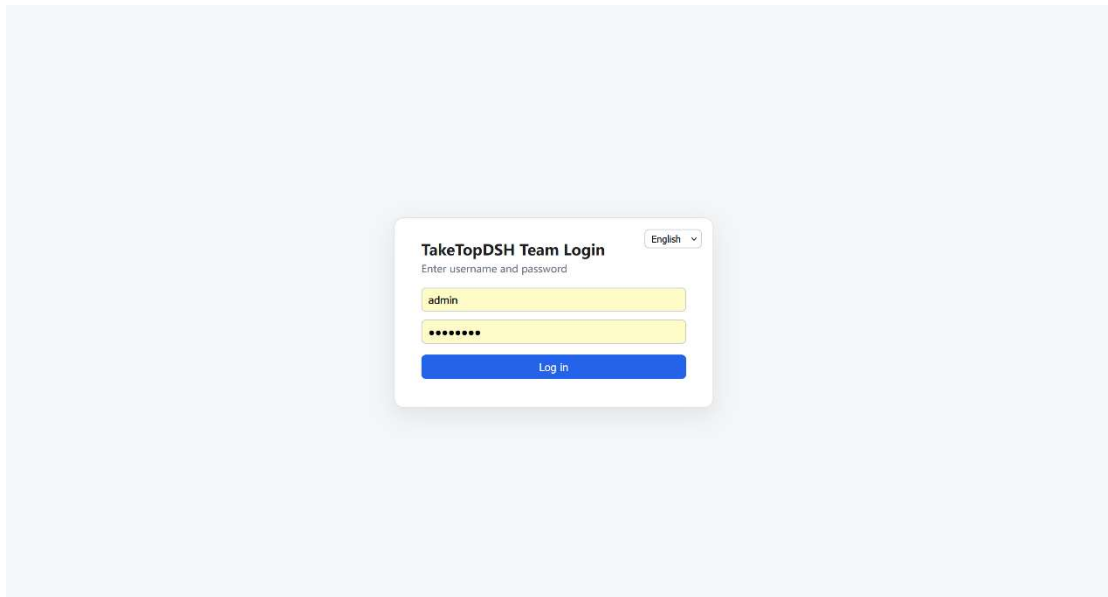

Enter the username: admin, password: 12345678 to log in to the platform. After the first login, the TakeTopDSH Team backend service, TakeTopDSHLauncher, runs in the background. As long as you have not restarted the computer, you can open the browser and enter this address <http://127.0.0.1:46001> to continue opening the login page. If the launcher has been closed (for example after restarting the computer), you need to run the start program mentioned above again!

3. Management Page

After the admin user logs in to the platform, you will see the page style below. This is the management page for the admin user.

admin (admin)Change PasswordLogoutEnglish

TakeTopDSH Team Launcher

Port46000StartStopOpen DSH

Running (PID 19596)

Configuration

appsettings URLhttp://127.0.0.1:46000Save

External URLe.g. http://server-ip:8080, empty = disabl

Workspace pathE:\WorkBuddy\WorkSpaceBrowseSave

defaultLangEnglishSave

Instance Manager (multi-user)

UsernameuserAWorkspaceLeave empty = auto global workPassword*****Create Instance

Username	Port	Workspace	State	Actions
ericliu	46002	E:\WorkBuddy\WorkSpace\ericliu	Running	OpenStopDeleteReset Password

Instance Manager (multi-user)

UsernameuserAWorkspaceLeave empty = auto global workPassword*****Create Instance

Username	Port	Workspace	State	Actions
ericliu	46002	E:\WorkBuddy\WorkSpace\ericliu	Running	OpenStopDeleteReset Password

My Instance

Username: ericliuPort: 46002State: RunningStopOpen DSH

Update

Check Update


Logs

Clear

experience\data\sessions-md\sessions-2026-09-07.md (1 sessions)
[2026-09-09 01:10:11] [backup] [convert-sessions] done (3 day file(s), ok)
[2026-09-09 01:11:11] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-experience\data\sessions-md\sessions-2026-09-04.md (1 sessions)
[2026-09-09 01:11:11] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-experience\data\sessions-md\sessions-2026-09-06.md (2 sessions)
[2026-09-09 01:11:11] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-experience\data\sessions-md\sessions-2026-09-07.md (1 sessions)
[2026-09-09 01:11:11] [backup] [convert-sessions] done (3 day file(s), ok)
[2026-09-09 01:12:11] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-experience\data\sessions-md\sessions-2026-09-04.md (1 sessions)
[2026-09-09 01:12:11] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-experience\data\sessions-md\sessions-2026-09-06.md (2 sessions)
[2026-09-09 01:12:11] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-experience\data\sessions-md\sessions-2026-09-07.md (1 sessions)

You can use this platform to: Start/Stop, Open DSH, Configure, Manage Instances, and Change Password. The following parts are explained in detail; the others are self-explanatory and will not be covered!

3-1、 Configuration

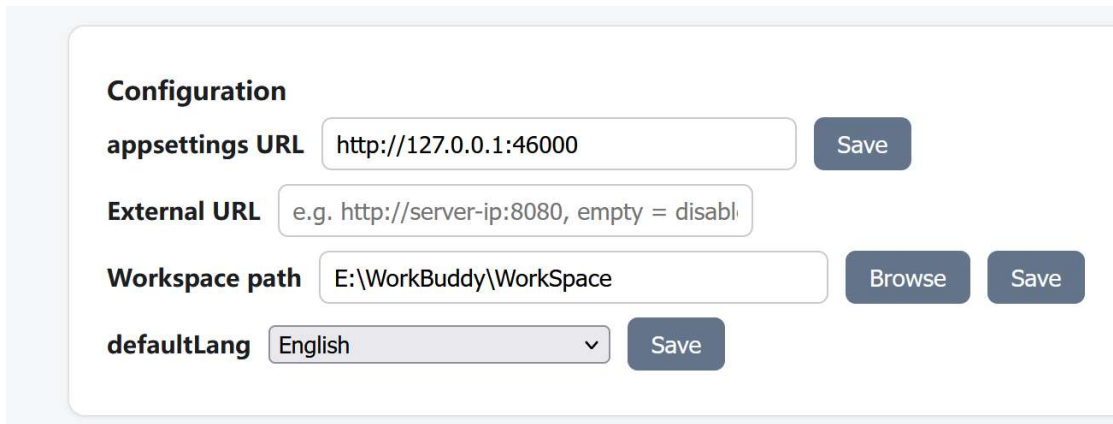

The Configuration page contains the following fields and buttons:

- Configuration** (Section Header)
- appsettings URL**: Text input field with value `http://127.0.0.1:46000` and a **Save** button.
- External URL**: Text input field with placeholder text `e.g. http://server-ip:8080, empty = disable`.
- Workspace path**: Text input field with value `E:\WorkBuddy\WorkSpace`, a **Browse** button, and a **Save** button.
- defaultLang**: Dropdown menu with value `English` and a **Save** button.


3-1-1. Set Workspace Path

Setting the Workspace path means setting the work area directory of the platform. Note that this directory can be located on any drive of your computer, but plan it well to make sure it has enough capacity, because all the data you enter and all the files you upload in TakeTopDSH Team are stored in this directory!

3-1-2. Set External URL

External URL means: if the platform also needs to be used from the external network, you can assign a public IP to the server and enter it here. For example, if the public IP is 188.88.88.88, you can set it as: `http://188.88.88.88:46000`. If you are not sure, you should consult your network administrator to make sure the setting is correct!

3-2、 Add Member User

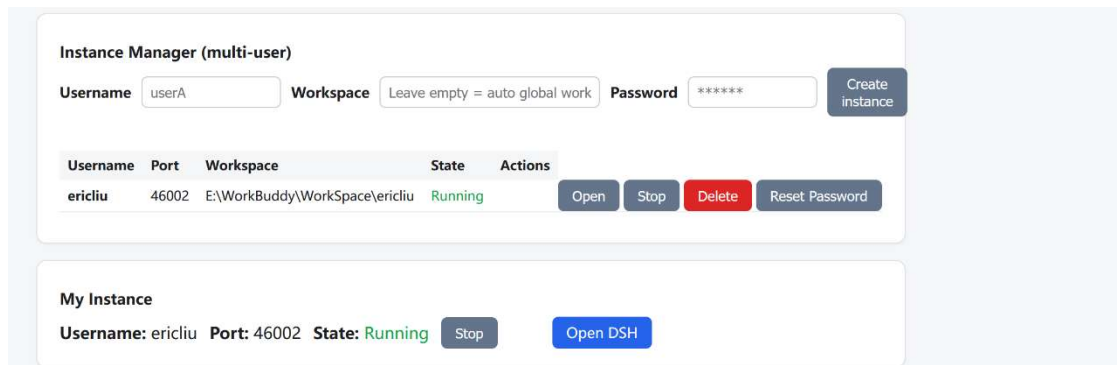


The Instance Manager (multi-user) page contains the following elements:

- Instance Manager (multi-user)** (Section Header)
- Username**: Text input field with value `userA`.
- Workspace**: Text input field with value `Leave empty = auto global work`.
- Password**: Text input field with value `*****` and a **Create Instance** button.
- | Username | Port | Workspace | State | Actions |
|----------|-------|--------------------------------|---------|---|
| ericliu | 46002 | E:\WorkBuddy\WorkSpace\ericliu | Running | Open Stop Delete Reset Password |
- My Instance** (Section Header)
- Username**: `ericliu` **Port**: `46002` **State**: `Running` **Stop** **Open DSH**

You can add member users here. Note that the username must use English letters, not Chinese. Remember the password you set for the user, for example set

it to: 12345678. After the member user logs in to the platform, they can change it by themselves. The member's work area directory does not need to be set; it is generated automatically. Specifically: main work area directory + username, and this directory is generated automatically!


3-3、 Platform Upgrade

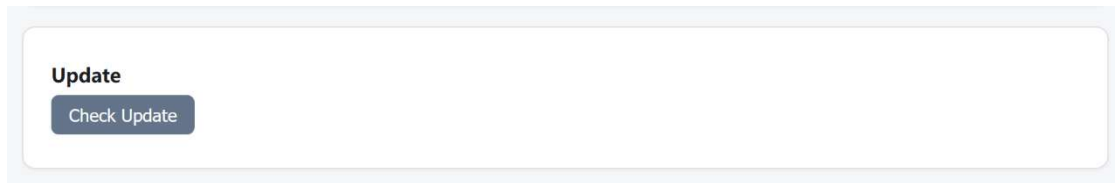


Because TakeTopDSH Team is an AI collaboration platform extended based on DeepSeek Harness, after DeepSeek Harness releases a new version you can also click this button to upgrade, ensuring that you can use the latest features of DeepSeek Harness!

4. DSH Workbench

After completing the settings on the management page above, click the Open DSH button in the TakeTopDSH Team Launcher section to open the workbench page!

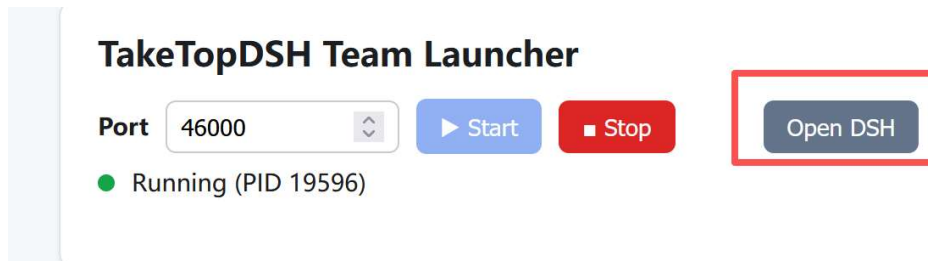


The workbench page is shown below, with left/right columns. The left side is File Management / My Tasks, and the right side is the DSH conversation interface.

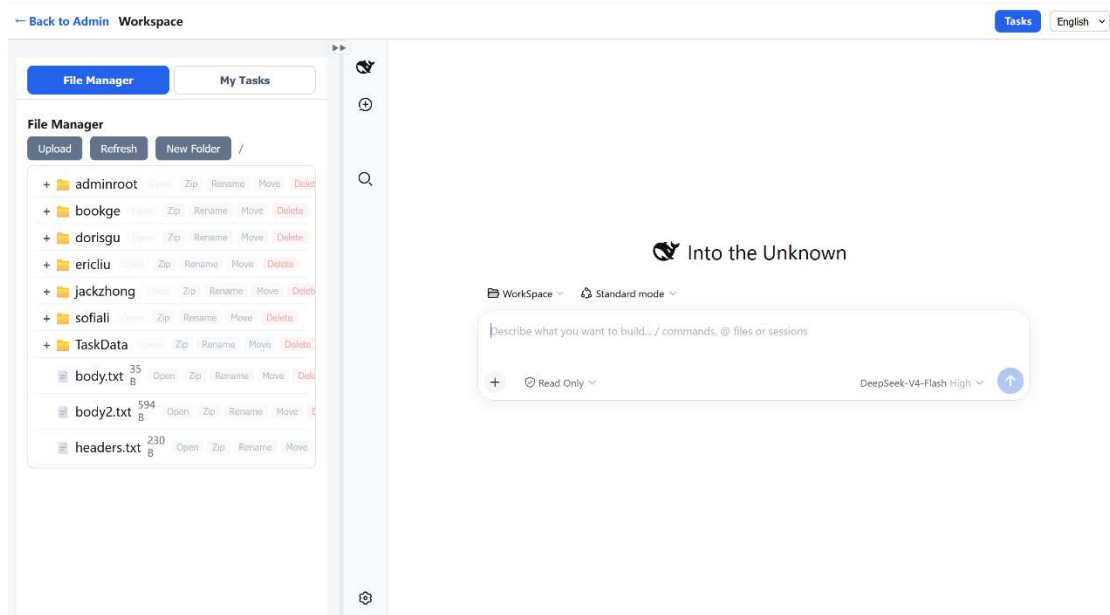


4-1. Configure the API Key of the AI Model

Although TakeTopDSH Team is extended based on DeepSeek Harness, it can also connect to other large models, such as OpenAI ,Kimi, Claude,Qwen, etc., and it can also connect to local large models!


First, click the settings icon at the top-left of the right sidebar to open the settings page, as shown below.

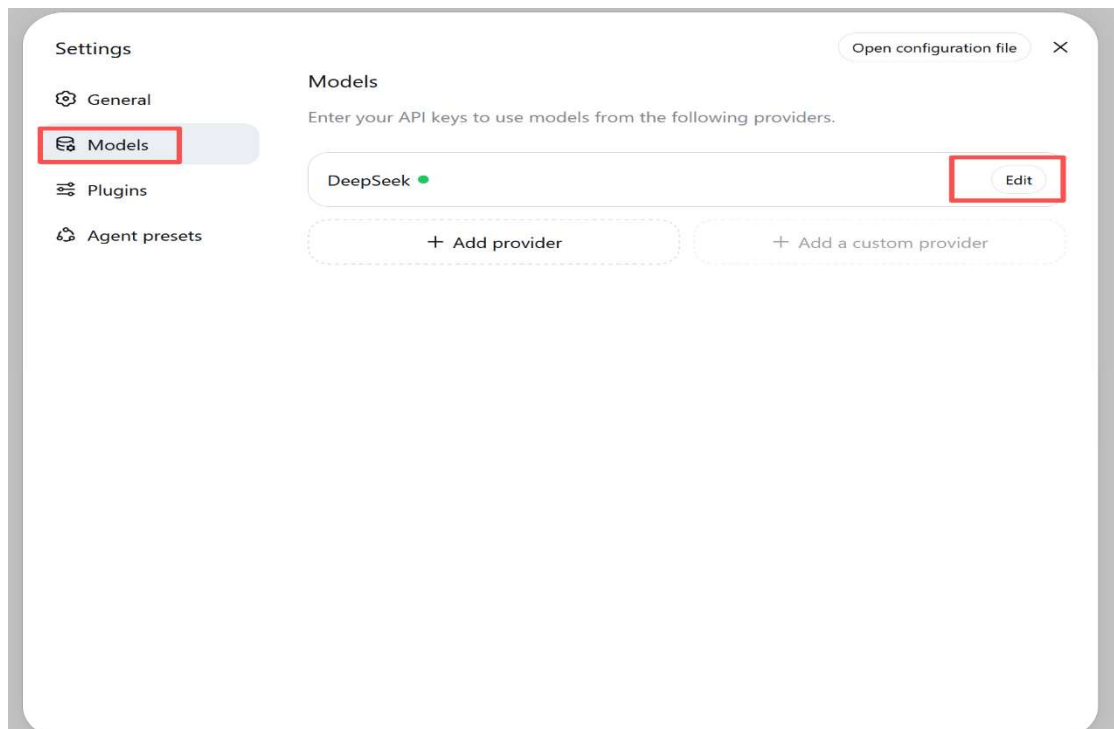

Click the Edit button. As shown below, you can select a model from the listed ones, or click Add model to add a model. After selecting, enter the key you obtained in the API Key field. You can learn how to configure it on the website of the large model you plan to connect to!

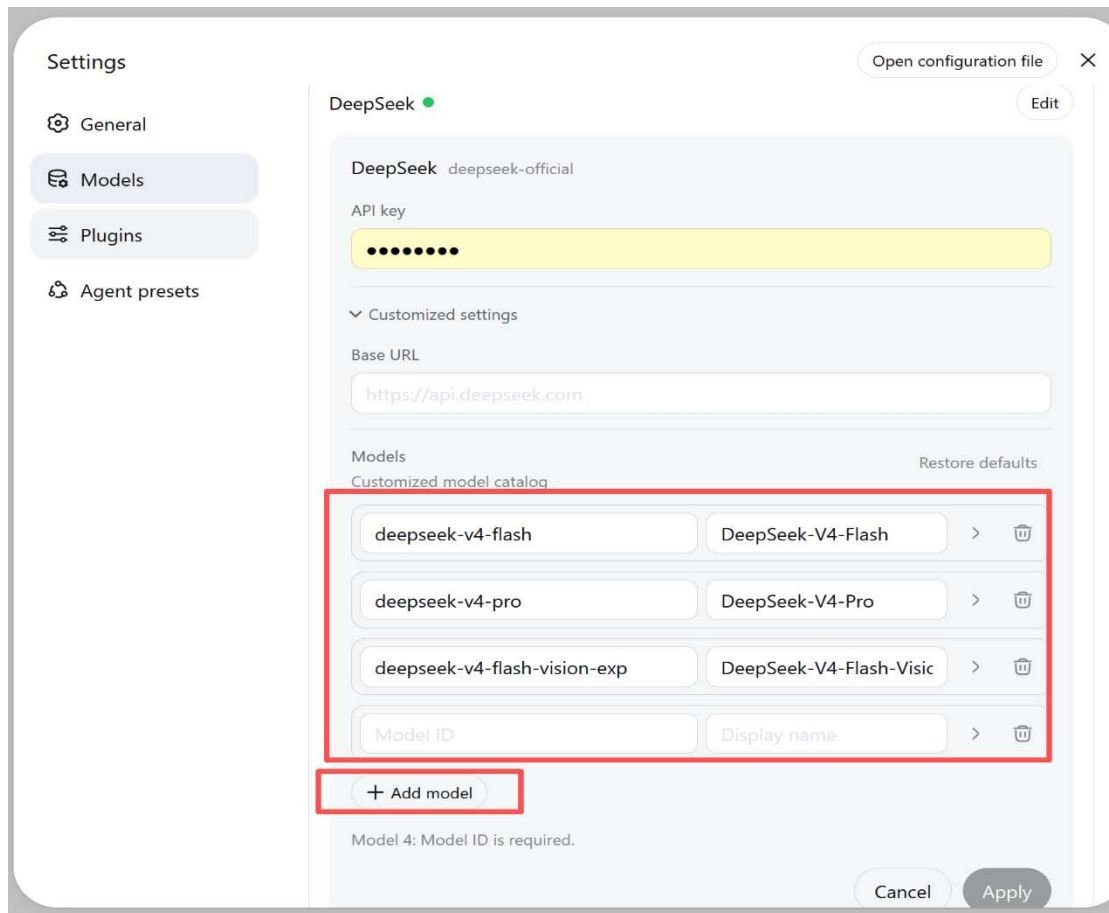


After configuring the API Key for the large model, you can use DSH to have AI conversations, as shown below:

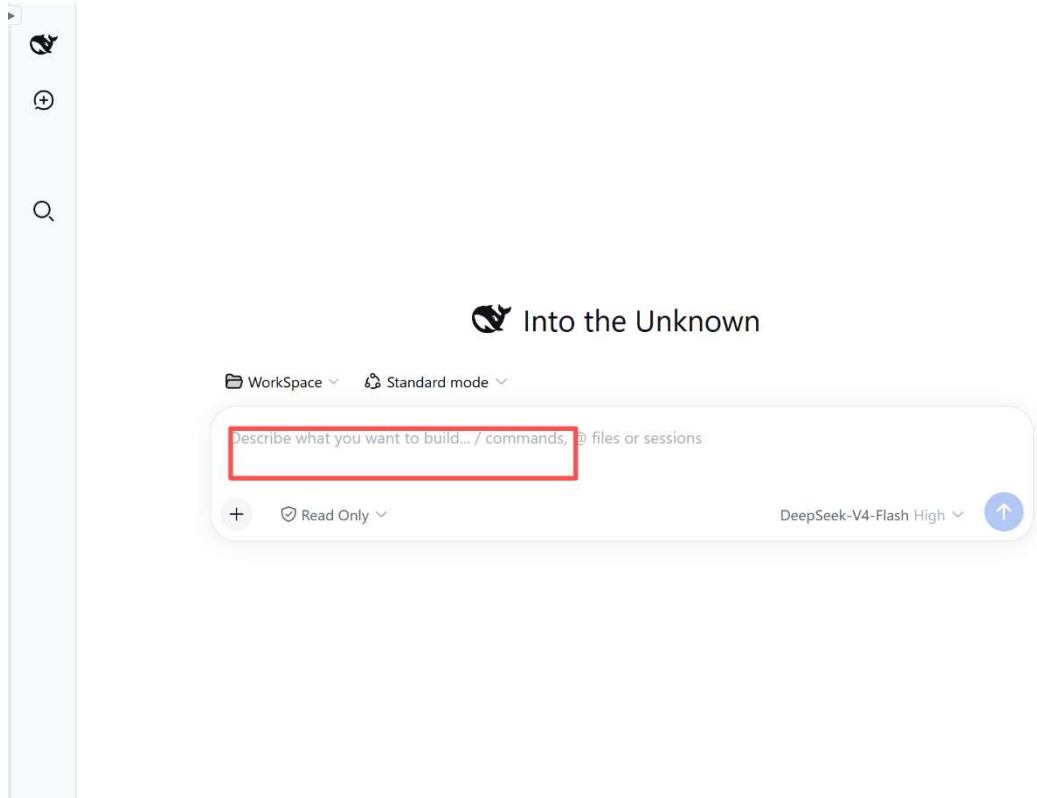


4-2. File Manager

The first tab in the left sidebar of the workbench is your File Manager, as shown below. It displays the files in your work area directory. You can only operate on the files in this work area directory. You can upload the files you want to work on to this directory (multiple file upload is supported), and you can also perform operations such as open, download, move, rename, and delete, you can also drag the filename of the selected file into the input box on the right side of DSH!

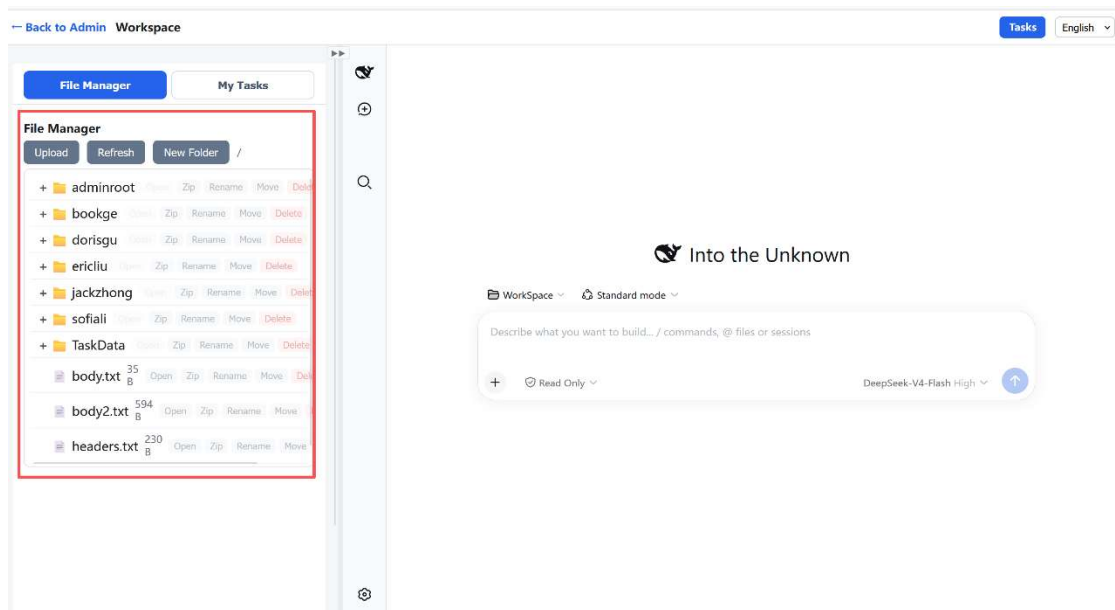

4-3. Task Management. Click the Task Management tab. As shown below, this displays the task list assigned to you by other members. You can click the task name to preview the detailed content of the task, and you can also click the feedback button to provide feedback on the details of how you handled the task!

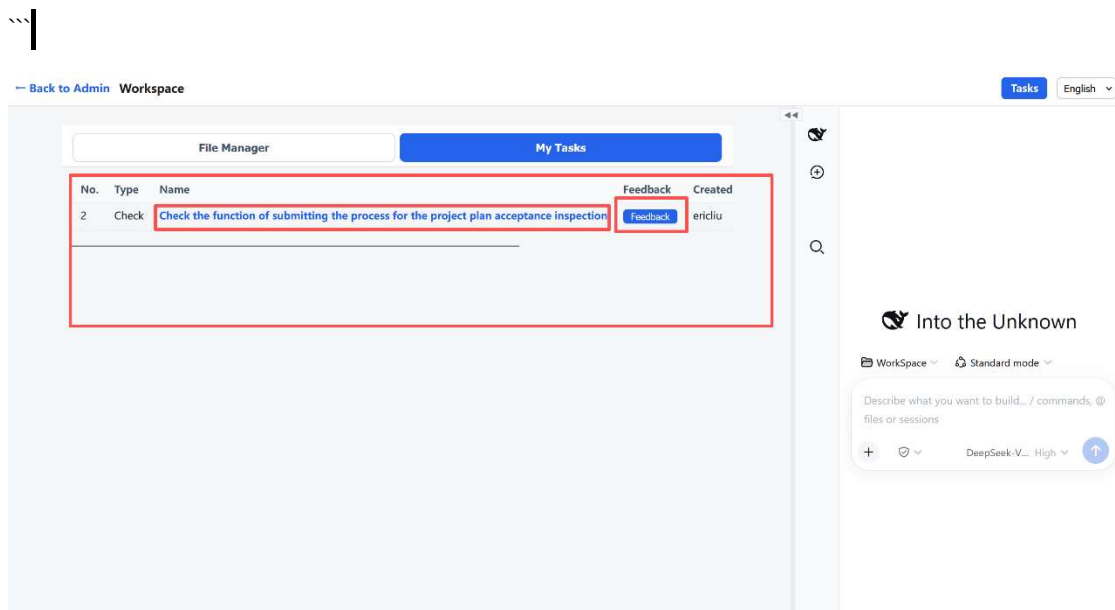

File Manager

My Tasks

No.	Type	Name	Feedback	Created															
Task: Check the function of submitting the process for the project plan acceptance inspection (#2) Close Task completion feedback B I U S *≡ 1≡ “ ” ↺ ✕ Attach file Feedback records <table> <thead> <tr> <th>No.</th> <th>Content</th> <th>By</th> <th>Time</th> <th>Files</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>领导，请尽快检查验收！</td> <td>ericliu</td> <td>2026-09-07 18:17</td> <td> 表单自定义图.png 发文流程.jpg 工作流程设计图.png 项目甘特图.png </td> </tr> <tr> <td>1</td> <td>带有附件的反馈</td> <td>admin</td> <td>2026-09-07 17:20</td> <td> test_up.txt </td> </tr> </tbody> </table> Submit					No.	Content	By	Time	Files	2	领导，请尽快检查验收！	ericliu	2026-09-07 18:17	表单自定义图.png 发文流程.jpg 工作流程设计图.png 项目甘特图.png	1	带有附件的反馈	admin	2026-09-07 17:20	test_up.txt
No.	Content	By	Time	Files															
2	领导，请尽快检查验收！	ericliu	2026-09-07 18:17	表单自定义图.png 发文流程.jpg 工作流程设计图.png 项目甘特图.png															
1	带有附件的反馈	admin	2026-09-07 17:20	test_up.txt															

The input box above can be used to enter text or paste images. Click the Attach file button below to upload attachments!

4-4. Task Assignment

Click the "Task Assignment" button at the top-right of the page to open the task assignment page, as shown below.

Back to Admin

Workspace

Tasks

English

File Manager

My Tasks

No.	Type	Name
2	Check	Check the function of submitting the proc

Into the Unknown

Workspace

Standard mode


Describe what you want to build... / commands, @ files or sessions

+


Read Only

DeepSeek-V4-Flash High

↑

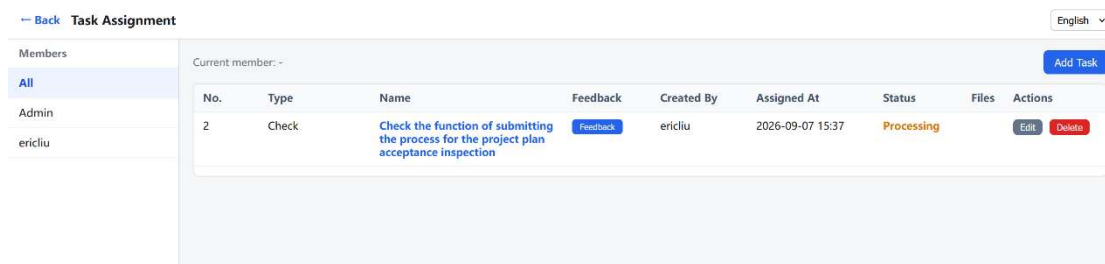

It displays all the tasks you have created. In the member list on the left, select the member to whom you want to assign a task, and click the Add Task button to assign a task to this member.

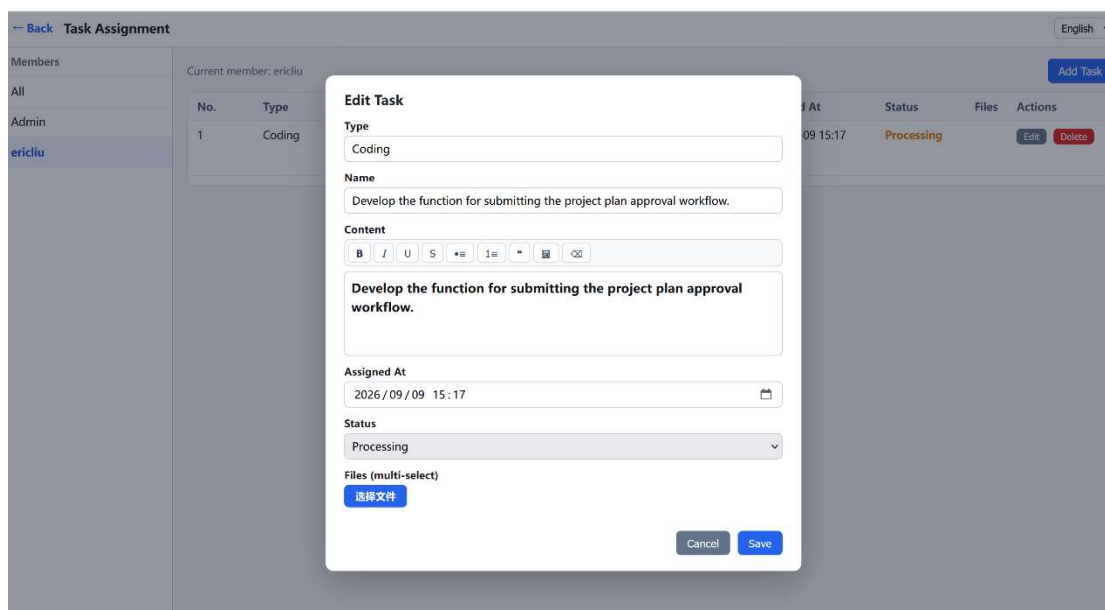

You can also click the Feedback button in the task list to review how this member completed the task, and enter your requirements and comments, as shown below. The operation is the same as above!

File Manager

My Tasks

No.	Type	Name	Feedback	Created															
Task: Check the function of submitting the process for the project plan acceptance inspection (#2) Close Task completion feedback B I U S *≡ 1≡ “ 窗 ✕ Attach file Feedback records <table> <thead> <tr> <th>No.</th> <th>Content</th> <th>By</th> <th>Time</th> <th>Files</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>领导, 请尽快检查验收!</td> <td>ericliu</td> <td>2026-09-07 18:17</td> <td> 表单自定义图.png 发文流程.jpg 工作流程设计图.png 项目甘特图.png </td> </tr> <tr> <td>1</td> <td>带有附件的反馈</td> <td>admin</td> <td>2026-09-07 17:20</td> <td>test_up.txt</td> </tr> </tbody> </table> Submit					No.	Content	By	Time	Files	2	领导, 请尽快检查验收!	ericliu	2026-09-07 18:17	表单自定义图.png 发文流程.jpg 工作流程设计图.png 项目甘特图.png	1	带有附件的反馈	admin	2026-09-07 17:20	test_up.txt
No.	Content	By	Time	Files															
2	领导, 请尽快检查验收!	ericliu	2026-09-07 18:17	表单自定义图.png 发文流程.jpg 工作流程设计图.png 项目甘特图.png															
1	带有附件的反馈	admin	2026-09-07 17:20	test_up.txt															

5. Operations for Other Members

Members added by the admin on the management page, such as the ericliu added just now, can also log in on the login page. After logging in to the member's management page, as shown below, it is simpler than the management page of the admin user.

ericliu

Change Password

Logout

English

My Instance

Username: ericliu

Port: 46002

State: Stopped

Start

Logs

Clear

```


experience\data\sessions-md\sessions-2026-09-06.md (2 sessions)
[2026-09-09 02:20:26] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-
experience\data\sessions-md\sessions-2026-09-07.md (1 sessions)
[2026-09-09 02:20:26] [backup] [convert-sessions] done (3 day file(s), ok)
[2026-09-09 02:21:26] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-
experience\data\sessions-md\sessions-2026-09-04.md (1 sessions)
[2026-09-09 02:21:26] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-
experience\data\sessions-md\sessions-2026-09-06.md (2 sessions)
[2026-09-09 02:21:26] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-
experience\data\sessions-md\sessions-2026-09-07.md (1 sessions)
[2026-09-09 02:21:26] [backup] [convert-sessions] done (3 day file(s), ok)
[2026-09-09 02:22:26] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-
experience\data\sessions-md\sessions-2026-09-04.md (1 sessions)
[2026-09-09 02:22:26] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-
experience\data\sessions-md\sessions-2026-09-06.md (2 sessions)
[2026-09-09 02:22:26] [backup] [convert-sessions] wrote E:\WorkBuddy\TakeTopDshTeam\docs\opencode-
experience\data\sessions-md\sessions-2026-09-07.md (1 sessions)
[2026-09-09 02:22:26] [backup] [convert-sessions] done (3 day file(s), ok)

```

D:\H_Root\F\WorkBuddy\TakeTopDshTeam

On this management page, you can click the Start button to start the DSH service. The first start will be a bit slow. After it starts, you can open the member's DSH page, as shown below. The operation is the same as for the admin user. However, note that the member can only work in his own file work area and cannot see the file data of other work areas!

6. DSH Operation. After you are familiar with the various functions on the pages above, users can use this AI Harness to work. For example, if you want to modify a code file in the work area directory, you can directly enter the modification instruction you want in the Harness input box, as shown below, and then click the submit arrow button; it will call the associated large model to do the work!

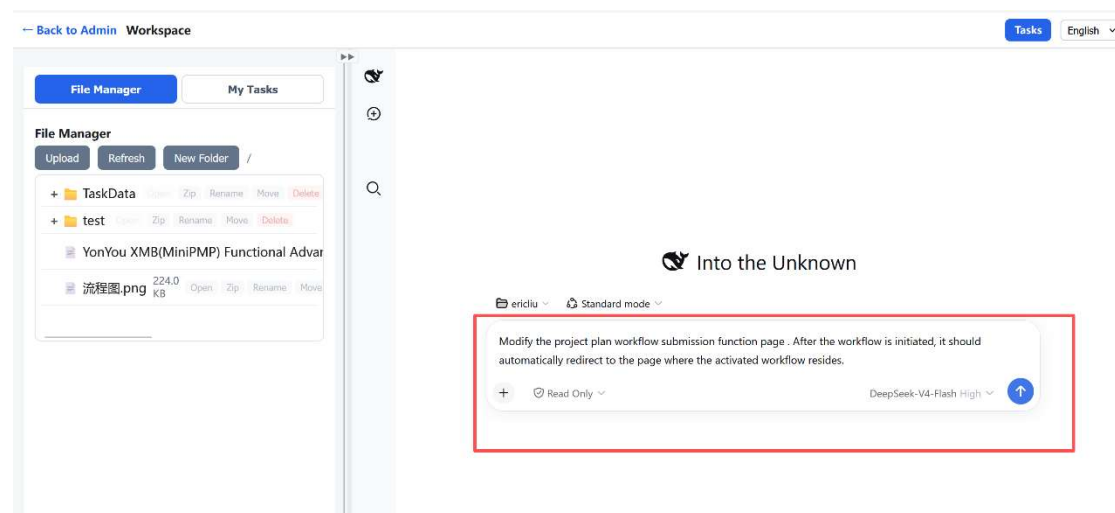

Of course, in addition to software development, you can also do other work, such as modifying a PPT file, creating a new contract file, and so on. You can also complete the tasks assigned to you here!